

# FCC 47 CFR PART 15 SUBPART C

# **TEST REPORT**

For

**LED TV** 

Model: MUAV5060Y-6586A

**Brand: AMTC, ELEMENT, WESTINGHOUSE** 

Test Report Number: C180904Z01-RP1

Issued for

Shen Zhen MTC Co.,LTD MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China Issued by:

**Compliance Certification Services (Shenzhen) Inc.** No.10-1, Mingkeda Logistics Park, No.18 Huanguan South RD., Guan Lan Town, Longhuaxin District, Shenzhen, China TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com Issued Date: Sep 04, 2018



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.

FCC ID: 2AHVH506586A6 Page 1 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.



# **Revision History**

| Rev. | Issue Date   | Revisions     | Effect<br>Page | Revised By |
|------|--------------|---------------|----------------|------------|
| 00   | Sep 04, 2018 | Initial Issue | ALL            | Anna Liu   |
|      |              |               |                |            |
|      |              |               |                |            |
|      |              |               |                |            |

FCC ID: 2AHVH506586A6 Page 2



### **TABLE OF CONTENTS**

| 1. | TEST | 「RESULT CERTIFICATION      | . 4 |
|----|------|----------------------------|-----|
|    |      | DESCRIPTION                |     |
| 3. | TEST | 「METHODOLOGY               | . 6 |
|    | 3.1  | DESCRIPTION OF TEST MODES  | . 6 |
|    | 3.2  | SETUP CONFIGURATION OF EUT | . 6 |
|    | 3.3  | SUPPORT EQUIPMENT          | . 6 |
| 4. | FACI | LITIES AND ACCREDITATIONS  | . 7 |
|    | 4.1  | FACILITIES                 | . 7 |
|    | 4.2  | ACCREDITATIONS             | . 7 |
|    | 4.3  | MEASUREMENT UNCERTAINTY    | . 7 |
| 5. | FCC  | PART 15.247                | . 8 |
|    | 5.1  | RADIATED EMISSIONS         | . 8 |



# 1. TEST RESULT CERTIFICATION

| Product                           | LED TV   |
|-----------------------------------|--|
| Model MUAV5060Y-6586A             |  |
| Brand AMTC, ELEMENT, WESTINGHOUSE |  |
| <b>Tested</b> Sep 04, 2018        |  |
| Applicant Shen Zhen MTC Co.,LTD   |  |
| Manufacturer                      | MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China |

| APPLICABLE STANDARDS         |             |  |  |
|------------------------------|-------------|--|--|
| STANDARD                     | TEST RESULT |  |  |
| FCC 47 CFR Part 15 Subpart C | PASS        |  |  |
| RSS 247 Issue 2              | PASS        |  |  |

# We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207,15.209,15.249.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

**Eve Wang** 

Supervisor of EMC Dept.

Eve. Wone

Compliance Certification Services (Shenzhen) Inc.

Nancy Fu

Supervisor of Report Dept.

Compliance Certification Services (Shenzhen) Inc.

FCC ID: 2AHVH506586A6 Page 4
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.



# 2. EUT DESCRIPTION

| Product               | LED TV   |  |  |  |
|-----------------------|--|--|--|--|
| Model Number          | MUAV5060Y-6586A  |  |  |  |
| Brand                 | AMTC, ELEMENT, WESTINGHOUSE  |  |  |  |
| Model Discrepancy     | MUAV50**Y-6586A(* can from 0 to 9, A to Z); E4SJ5018 ; WE50UB4417  |  |  |  |
| Model difference      | All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name, appearance and trade mark.           |  |  |  |
| Identify Number       | C180904Z01-RP1   |  |  |  |
| Received Date         | Sep 04, 2018   |  |  |  |
| Power Supply          | AC120V/60Hz 120W   |  |  |  |
| Frequency Range       | 802.11b/g/n(HT20):2412MHz~2462MHz<br>802.11n(HT40):2422MHz~2452MHz   |  |  |  |
| Number of Channels    | IEEE 802.11b mode: 11 Channels<br>IEEE 802.11g mode: 11 Channels<br>IEEE 802.11n HT20 MHz mode: 11 Channels<br>IEEE 802.11n HT40 MHz mode: 07 Channels |  |  |  |
| Antenna Specification | PIFA Antenna with 1.21dBi gain   |  |  |  |
| Hardware Version      | W2HM2001_V1.0  |  |  |  |
| Software Version      | JEDI.L0.MP1.mt7603u.v1.13.m.0.3  |  |  |  |

**Note:** This submittal(s) (test report) is intended for FCC ID:**2AHVH506586A6,** filing to comply with Section 15.247of the FCC Part 15, Subpart C Rules.

FCC ID: 2AHVH506586A6 Page 5
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.



# 3. TEST METHODOLOGY

# 3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Use engineering mode to control EUT to maintain continuous transmission and reception mode.

| Test Item         | Test mode   |
|-------------------|---|
| Radiated Emission | WIFI TX(802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40)) |

#### Note:

WIFI 802.11B/G/N20 test channel: 2412MHz, 2437MHz, 2462MHz. 802.11N40 test channel: 2422MHz, 2437MHz, 2452MHz.

# 3.2 SETUP CONFIGURATION OF EUT

See test photographs.

# 3.3 SUPPORT EQUIPMENT

| No. | Equipment | Model No.       | Serial No. | FCC ID | Brand  | Data Cable | Power Cord |
|-----|-----------|-----------------|------------|--------|--------|------------|------------|
| 1   | Notebook  | TianYi310-14ISK | NA         | DoC    | Lenovo | NA         | NA         |

#### Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

FCC ID: 2AHVH506586A6 Page 6 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.



# 4. FACILITIES AND ACCREDITATIONS

### 4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.10-1, Mingkeda Logistics Park, No.18 Huanguan South RD., Guan Lan Town, Longhuaxin District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA A2LA China CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

**USA** FCC

**Japan** VCCI(C-4815, R-4320, T-2317, G-10624)

Canada INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <a href="http://www.ccssz.com">http://www.ccssz.com</a>

# **4.3 MEASUREMENT UNCERTAINTY**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Parameter   | Uncertainty |
|---|-------------|
| Radiated Emission, 30 to 200 MHz Test Site: 966(2)      | +/-3.6880dB |
| Radiated Emission, 200 to 1000 MHz<br>Test Site: 966(2) | +/-3.6695dB |
| Radiated Emission, 1 to 8 GHz                           | +/-5.1782dB |
| Radiated Emission, 8 to 18 GHz                          | +/-5.2173dB |
| Radiated Emission, 18 to 26 GHz                         | +/-5.6512dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.

FCC ID: 2AHVH506586A6 Page 7
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.

# 5. FCC PART 15.247

# **5.1 RADIATED EMISSIONS**

# **LIMIT**

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (mV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009-0.490     | 2400/F(kHz)           | 300                      |
| 0.490-1.705     | 24000/F(kHz)          | 30                       |
| 1.705-30.0      | 30                    | 30                       |
| 30-88           | 100*                  | 3                        |
| 88-216          | 150*                  | 3                        |
| 216-960         | 200*                  | 3                        |
| Above 960       | 500                   | 3                        |

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

| Frequency (Hz) | Field Strength<br>(µV/m at 3-meter) | Field Strength<br>(dBµV/m at 3-meter) |
|----------------|-------------------------------------|---------------------------------------|
| 30-88          | 100                                 | 40                                    |
| 88-216         | 150                                 | 43.5                                  |
| 216-960        | 200                                 | 46                                    |
| Above 960      | 500                                 | 54                                    |

FCC ID: 2AHVH506586A6

Page 8

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.


# **MEASUREMENT EQUIPMENT USED**

| Radiated Emission Test Site 966(2) |                |              |                  |                  |                    |  |
|------------------------------------|----------------|--------------|------------------|------------------|--------------------|--|
| Name of Equipment                  | Manufacturer   | Model Number | Serial<br>Number | Last Calibration | Due<br>Calibration |  |
| PSA Series Spectrum Analyzer       | Agilent        | N9010A       | MY52221469       | 02/18/2018       | 02/19/2019         |  |
| EMI TEST RECEIVER                  | ROHDE&SCHWARZ  | ESCI         | 100783           | 02/18/2018       | 02/19/2019         |  |
| Amplifier                          | EMEC           | EM330        | 060661           | 02/17/2018       | 03/16/2019         |  |
| High Noise Amplifier               | Agilent        | 8449B        | 3008A01838       | 02/20/2018       | 02/19/2019         |  |
| Loop Antenna                       | COM-POWER      | AL-130       | 121044           | 09/25/2017       | 09/24/2018         |  |
| Bilog Antenna                      | SCHAFFNER      | CBL6143      | 5082             | 02/20/2018       | 02/19/2019         |  |
| Horn Antenna                       | SCHWARZBECK    | BBHA9120     | D286             | 02/20/2018       | 02/19/2019         |  |
| Board-Band Horn Antenna            | Schwarzbeck    | BBHA 9170    | 9170-497         | 02/20/2018       | 02/19/2019         |  |
| Turn Table                         | N/A            | N/A          | N/A              | N.C.R            | N.C.R              |  |
| Antenna Tower                      | SUNOL          | TLT2         | N/A              | N.C.R            | N.C.R              |  |
| Controller                         | Sunol Sciences | SC104V       | 022310-1         | N.C.R            | N.C.R              |  |
| Controller                         | СТ             | N/A          | N/A              | N.C.R            | N.C.R              |  |
| Temp. / Humidity Meter             | Anymetre       | JR913        | N/A              | 02/202018        | 02/19/2019         |  |
| Test S/W                           | FARAD          |              | LZ-RF / CCS      | S-SZ-3A2         | •                  |  |

Remark: Each piece of equipment is scheduled for calibration once a year.

# **Test Configuration**

# **Above 1 GHz**

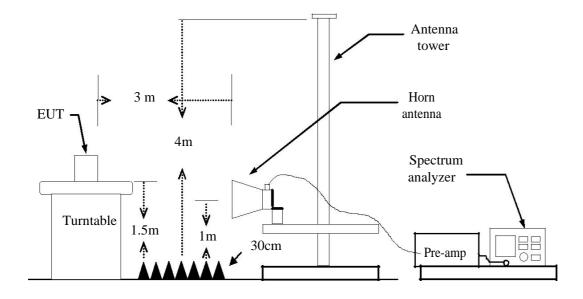

FCC ID: 2AHVH506586A6 Page 9 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.

# **MEASURING SETTING**

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                  | Setting                               |
|-------------------------------------|---------------------------------------|
| Attenuation                         | Auto                                  |
| Start Frequency                     | 1000 MHz                              |
| Stop Frequency                      | 10th carrier harmonic                 |
| RB / VB (Emission in restricted     | 1MHz / 1MHz for Peak, 1 MHz / 1/T for |
| band)                               | Average                               |
| RB / VB (Emission in non-restricted | 1MHz / 1MHz for Peak, 1 MHz / 1/T for |
| band)                               | Average                               |

| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP  |

# **TEST PROCEDURE**

# 1) Sequence of testing 9 kHz to 30 MHz

# Setup:

- --- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- --- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- --- If the EUT is a floor standing device, it is placed on the ground.
- --- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- --- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- --- The measurement distance is 3 meter.
- --- The EUT was set into operation.

#### Pre measurement:

- --- The turntable rotates from 0°to 315°using 45°steps.
- --- The antenna height is 0.8 meter.
- --- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

FCC ID: 2AHVH506586A6 Page 10



#### **Final measurement:**

- --- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0°to 360°) and by rotating the elevation axes (0°to 360°).
- --- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- --- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

# 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- --- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- --- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- --- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- --- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- --- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- --- The measurement distance is 3 meter.
- --- The EUT was set into operation.

#### Pre measurement:

- --- The turntable rotates from 0°to 315°using 45°steps.
- --- The antenna is polarized vertical and horizontal.
- --- The antenna height changes from 1 to 3 meter.
- --- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

FCC ID: 2AHVH506586A6 Page 11



#### **Final measurement:**

- --- The final measurement will be performed with minimum the six highest peaks.
- --- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position (± 45°) and antenna movement between 1 and 4 meter.
- --- The final measurement will be done with QP detector with an EMI receiver.
- --- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

# 3) Sequence of testing 1 GHz to 18 GHz

### Setup:

- --- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- --- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- --- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- --- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- --- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- --- The measurement distance is 3 meter.
- --- The EUT was set into operation.

#### Pre measurement:

- --- The turntable rotates from 0°to 315°using 45°steps.
- --- The antenna is polarized vertical and horizontal.
- --- The antenna height scan range is 1 meter to 2.5 meter.
- --- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

FCC ID: 2AHVH506586A6 Page 12



#### **Final measurement:**

- --- The final measurement will be performed with minimum the six highest peaks.
- --- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position (± 45°) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- --- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- --- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

# 4) Sequence of testing above 18 GHz Setup:

- --- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- --- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- --- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- --- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- --- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- --- The measurement distance is 1 meter.
- --- The EUT was set into operation.

#### Pre measurement:

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

#### Final measurement:

- --- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- --- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

FCC ID: 2AHVH506586A6 Page 13 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.

# **TEST RESULTS**

### **Above 1GHz**

Only show worse case

Test Mode: TX / IEEE 802.11b (CH Low)

| Frequency | Reading | Correction | Result   | Limit    | Margin | Antenna |        |
|-----------|---------|------------|----------|----------|--------|---------|--------|
| (MHz)     | (dBuV)  | Factor     | (dBuV/m) | (dBuV/m) | (dB)   | Pole    | Remark |
|           |         | (dB/m)     |          |          |        | (V/H)   |        |
| 1794      | 47.75   | -3.42      | 44.33    | 74       | -29.67 | V       | peak   |
| 1993      | 42.49   | -3.11      | 39.38    | 74       | -34.62 | V       | peak   |
| 4824      | 47.21   | 1.31       | 48.52    | 74       | -25.48 | V       | peak   |
| 7236      | 42.84   | 4.15       | 46.99    | 74       | -27.01 | V       | peak   |
|           |         |            |          |          |        |         |        |
| 1743      | 44.73   | -3.41      | 41.32    | 74       | -32.68 | Η       | peak   |
| 1962      | 42.85   | -3.12      | 39.73    | 74       | -34.27 | Н       | peak   |
| 4824      | 41.27   | 1.31       | 42.58    | 74       | -31.42 | Н       | peak   |
| 7236      | 47.88   | 4.15       | 52.03    | 74       | -21.97 | Н       | peak   |

#### Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto. b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- 5. Frequency (MHz). = Emission frequency in MHz
  - Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit ( $dB\mu V/m$ ) = Limit stated in standard

Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)

Peak =Peak Reading AVG. =Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AHVH506586A6 Page 14
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.

### Test Mode: TX / IEEE 802.11b (CH Mid)

| Frequency<br>(MHz) | Reading (dBuV) | Correction<br>Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Pole<br>(V/H) | Remark |
|--------------------|----------------|--------------------------------|--------------------|-------------------|----------------|--------------------------|--------|
|                    |                | (ub/III)                       |                    |                   |                | (V/H)                    |        |
| 1658               | 40.02          | -5.91                          | 34.11              | 74                | -39.89         | V                        | peak   |
| 2043               | 44.40          | -2.29                          | 42.11              | 74                | -31.89         | V                        | peak   |
| 4874               | 46.71          | 1.33                           | 48.04              | 74                | -25.96         | V                        | peak   |
| 7311               | 43.55          | 4.17                           | 47.72              | 74                | -26.28         | V                        | peak   |
|                    |                |                                |                    |                   |                |                          |        |
| 1719               | 47.43          | -5.84                          | 41.59              | 74                | -32.41         | Н                        | peak   |
| 2034               | 43.40          | -2.07                          | 41.33              | 74                | -32.67         | Н                        | peak   |
| 4874               | 41.53          | 1.33                           | 42.86              | 74                | -31.14         | Н                        | peak   |
| 7311               | 40.08          | 4.17                           | 44.25              | 74                | -29.75         | Н                        | peak   |

#### Remark:

- 5. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 6. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 7. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 8. Spectrum setting:
  - a. Peak Setting 1GHz 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto. b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- 5. Frequency (MHz). = Emission frequency in MHz
  - Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit ( $dB\mu V/m$ ) = Limit stated in standard

Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)

Peak =Peak Reading AVG. =Average Reading

Remark = Mark Peak Reading or Average Reading

# Test Mode: TX / IEEE 802.11b (CH High)

| Frequency | Reading | Correction | Result   | Limit    | Margin | Antenna |        |
|-----------|---------|------------|----------|----------|--------|---------|--------|
| (MHz)     | (dBuV)  | Factor     | (dBuV/m) | (dBuV/m) | (dB)   | Pole    | Remark |
|           |         | (dB/m)     |          |          |        | (V/H)   |        |
| 1652      | 42.80   | -5.91      | 36.89    | 74       | -37.11 | V       | peak   |
| 2020      | 40.29   | -2.29      | 38.00    | 74       | -36.00 | V       | peak   |
| 4924      | 47.91   | 1.33       | 49.24    | 74       | -24.76 | V       | peak   |
| 7386      | 45.11   | 4.17       | 49.28    | 74       | -24.72 | V       | peak   |
|           |         |            |          |          |        |         |        |
| 1653      | 43.97   | -5.84      | 38.13    | 74       | -35.87 | Н       | peak   |
| 1986      | 44.20   | -2.07      | 42.13    | 74       | -31.87 | H       | peak   |
| 4924      | 46.17   | 1.33       | 47.50    | 74       | -26.50 | H       | peak   |
| 7386      | 42.34   | 4.17       | 46.51    | 74       | -27.49 | Н       | peak   |

#### Remark:

- 9. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 11. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 12. Spectrum setting:
  - a. Peak Setting 1GHz 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto. b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- = Emission frequency in MHz 5. Frequency (MHz).
  - Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
  - Limit (dBµV/m) = Limit stated in standard
  - Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)
  - Peak =Peak Reading AVG. =Average Reading
  - Remark = Mark Peak Reading or Average Reading

FCC ID: 2AHVH506586A6 Page 16 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.

# Test Mode: TX / IEEE 802.11N20MIMO (CH Low)

| Frequency | Reading | Correction | Result   | Limit    | Margin | Antenna |        |
|-----------|---------|------------|----------|----------|--------|---------|--------|
| (MHz)     | (dBuV)  | Factor     | (dBuV/m) | (dBuV/m) | (dB)   | Pole    | Remark |
|           |         | (dB/m)     |          |          |        | (V/H)   |        |
| 1725      | 45.38   | -5.91      | 39.47    | 74       | -34.53 | V       | peak   |
| 1921      | 44.59   | -2.29      | 42.30    | 74       | -31.70 | V       | peak   |
| 4824      | 47.35   | 1.33       | 48.68    | 74       | -25.32 | V       | peak   |
| 7236      | 42.93   | 4.17       | 47.10    | 74       | -26.90 | V       | peak   |
|           |         |            |          |          |        |         |        |
| 1344      | 41.11   | -5.84      | 35.27    | 74       | -38.73 | Н       | peak   |
| 1926      | 44.09   | -2.07      | 42.02    | 74       | -31.98 | H       | peak   |
| 4824      | 43.69   | 1.33       | 45.02    | 74       | -28.98 | H       | peak   |
| 7236      | 44.16   | 4.17       | 48.33    | 74       | -25.67 | Н       | peak   |

#### Remark:

- 13. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 15. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 16. Spectrum setting:
  - a. Peak Setting 1GHz 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto. b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- = Emission frequency in MHz 5. Frequency (MHz).
  - Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain

Limit (dBµV/m) = Limit stated in standard

Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)

Peak =Peak Reading AVG. =Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AHVH506586A6 Page 17 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.

# Test Mode: TX / IEEE 802.11N20MIMO (CH Mid)

| Frequency | Reading | Correction | Result   | Limit    | Margin | Antenna |        |
|-----------|---------|------------|----------|----------|--------|---------|--------|
| (MHz)     | (dBuV)  | Factor     | (dBuV/m) | (dBuV/m) | (dB)   | Pole    | Remark |
|           |         | (dB/m)     |          |          |        | (V/H)   |        |
| 1621      | 46.19   | -5.91      | 40.28    | 74       | -33.72 | V       | peak   |
| 2030      | 44.57   | -2.29      | 42.28    | 74       | -31.72 | V       | peak   |
| 4874      | 45.04   | 1.33       | 46.37    | 74       | -27.63 | V       | peak   |
| 7311      | 47.54   | 4.17       | 51.71    | 74       | -22.29 | V       | peak   |
|           |         |            |          |          |        |         |        |
| 1562      | 46.43   | -5.84      | 40.59    | 74       | -33.41 | Н       | peak   |
| 1762      | 44.09   | -2.07      | 42.02    | 74       | -31.98 | H       | peak   |
| 4874      | 46.40   | 1.33       | 47.73    | 74       | -26.27 | H       | peak   |
| 7311      | 47.36   | 4.17       | 51.53    | 74       | -22.47 | Н       | peak   |

#### Remark:

- 17. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 19. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 20. Spectrum setting:
  - a. Peak Setting 1GHz 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto. b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- = Emission frequency in MHz 5. Frequency (MHz).
  - Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain

Limit (dBµV/m) = Limit stated in standard

Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)

Peak =Peak Reading AVG. =Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AHVH506586A6 Page 18 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.

# Test Mode: TX / IEEE 802.11N20MIMO (CH High)

| Frequency | Reading | Correction | Result   | Limit    | Margin | Antenna |        |
|-----------|---------|------------|----------|----------|--------|---------|--------|
| (MHz)     | (dBuV)  | Factor     | (dBuV/m) | (dBuV/m) | (dB)   | Pole    | Remark |
|           |         | (dB/m)     |          |          |        | (V/H)   |        |
| 1524      | 44.34   | -5.91      | 38.43    | 74       | -35.57 | V       | peak   |
| 1762      | 42.48   | -2.29      | 40.19    | 74       | -33.81 | V       | peak   |
| 4924      | 45.08   | 1.33       | 46.41    | 74       | -27.59 | V       | peak   |
| 7386      | 41.05   | 4.17       | 45.22    | 74       | -28.78 | V       | peak   |
|           |         |            |          |          |        |         |        |
| 1765      | 47.86   | -5.84      | 42.02    | 74       | -31.98 | Н       | peak   |
| 2011      | 44.07   | -2.07      | 42.00    | 74       | -32.00 | H       | peak   |
| 4924      | 43.24   | 1.33       | 44.57    | 74       | -29.43 | H       | peak   |
| 7386      | 43.26   | 4.17       | 47.43    | 74       | -26.57 | H       | peak   |

#### Remark:

- 21. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 22. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 23. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 24. Spectrum setting:
  - a. Peak Setting 1GHz 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto. b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- 5. Frequency (MHz). = Emission frequency in MHz
  - Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
  - Limit ( $dB\mu V/m$ ) = Limit stated in standard
  - Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)
  - Peak =Peak Reading AVG. =Average Reading
  - Remark = Mark Peak Reading or Average Reading

# Test Mode: TX / IEEE 802.11N40MIMO (CH Low)

| Frequency | Reading | Correction | Result   | Limit    | Margin | Antenna |        |
|-----------|---------|------------|----------|----------|--------|---------|--------|
| (MHz)     | (dBuV)  | Factor     | (dBuV/m) | (dBuV/m) | (dB)   | Pole    | Remark |
|           |         | (dB/m)     |          |          |        | (V/H)   |        |
| 1623      | 45.90   | -5.91      | 39.99    | 74       | -34.01 | V       | peak   |
| 1986      | 44.76   | -2.29      | 42.47    | 74       | -31.53 | V       | peak   |
| 4844      | 41.74   | 1.33       | 43.07    | 74       | -30.93 | V       | peak   |
| 7266      | 43.76   | 4.17       | 47.93    | 74       | -26.07 | V       | peak   |
|           |         |            |          |          |        |         |        |
| 1541      | 44.27   | -5.84      | 38.43    | 74       | -35.57 | Н       | peak   |
| 1936      | 45.46   | -2.07      | 43.39    | 74       | -30.61 | Н       | peak   |
| 4844      | 44.45   | 1.33       | 45.78    | 74       | -28.22 | Н       | peak   |
| 7266      | 46.31   | 4.17       | 50.48    | 74       | -23.52 | Н       | peak   |

#### Remark:

- 25. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 26. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 27. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 28. Spectrum setting:
  - a. Peak Setting 1GHz 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto. b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- = Emission frequency in MHz 5. Frequency (MHz).
  - Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain

Limit (dBµV/m) = Limit stated in standard

Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)

Peak =Peak Reading AVG. =Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AHVH506586A6 Page 20 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.

# Test Mode: TX / IEEE 802.11N40MIMO (CH Mid)

| Frequency | Reading | Correction | Result   | Limit    | Margin | Antenna |        |
|-----------|---------|------------|----------|----------|--------|---------|--------|
| (MHz)     | (dBuV)  | Factor     | (dBuV/m) | (dBuV/m) | (dB)   | Pole    | Remark |
|           |         | (dB/m)     |          |          |        | (V/H)   |        |
| 1621      | 43.88   | -5.91      | 37.97    | 74       | -36.03 | V       | peak   |
| 1936      | 45.72   | -2.29      | 43.43    | 74       | -30.57 | V       | peak   |
| 4874      | 43.56   | 1.33       | 44.89    | 74       | -29.11 | V       | peak   |
| 7311      | 47.70   | 4.17       | 51.87    | 74       | -22.13 | V       | peak   |
|           |         |            |          |          |        |         |        |
| 1729      | 45.69   | -5.84      | 39.85    | 74       | -34.15 | Н       | peak   |
| 1966      | 45.62   | -2.07      | 43.55    | 74       | -30.45 | Н       | peak   |
| 4874      | 45.79   | 1.33       | 47.12    | 74       | -26.88 | Н       | peak   |
| 7311      | 47.98   | 4.17       | 52.15    | 74       | -21.85 | Н       | peak   |

#### Remark:

- 29. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 30. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 31. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 32. Spectrum setting:
  - a. Peak Setting 1GHz 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto. b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- 5. Frequency (MHz). = Emission frequency in MHz
  - Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
  - Limit ( $dB\mu V/m$ ) = Limit stated in standard
  - Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)
  - Peak =Peak Reading AVG. =Average Reading
  - Remark = Mark Peak Reading or Average Reading

FCC ID: 2AHVH506586A6 Page 21
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.

# Test Mode: TX / IEEE 802.11N40MIMO (CH High)

| Frequency<br>(MHz) | Reading<br>(dBuV) | Correction<br>Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Pole<br>(V/H) | Remark |
|--------------------|-------------------|--------------------------------|--------------------|-------------------|----------------|--------------------------|--------|
| 1731               | 40.04             | -3.42                          | 36.62              | 74                | -37.38         | V                        | peak   |
| 1957               | 41.76             | -3.11                          | 38.65              | 74                | -35.35         | V                        | peak   |
| 4904               | 47.91             | 1.31                           | 49.22              | 74                | -24.78         | V                        | peak   |
| 7356               | 40.10             | 4.15                           | 44.25              | 74                | -29.75         | V                        | peak   |
|                    |                   |                                |                    |                   |                |                          |        |
| 1793               | 44.90             | -3.41                          | 41.49              | 74                | -32.51         | Н                        | peak   |
| 1920               | 43.05             | -3.12                          | 39.93              | 74                | -34.07         | Н                        | peak   |
| 4904               | 45.88             | 1.31                           | 47.19              | 74                | -26.81         | Н                        | peak   |
| 7356               | 40.54             | 4.15                           | 44.69              | 74                | -29.31         | Н                        | peak   |

#### Remark:

- 33. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 35. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 36. Spectrum setting:
  - a. Peak Setting 1GHz 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto. b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- 5. Frequency (MHz). = Emission frequency in MHz
  - Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain

Limit (dBµV/m) = Limit stated in standard

Margin (dB) = Result (dBµV/m)- Limit (dBµV/m)

Peak =Peak Reading AVG. =Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: 2AHVH506586A6 Page 22 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc.