


Prüfbericht-Nr.: Test report no.:	CN213MUT 002	Auftrags-Nr.: Order no.:	244290778	Seite 1 von 59 Page 1 of 59
Kunden-Referenz-Nr.: Client reference no.:	P00053126	Auftragsdatum: Order date:	2021-01-07	
Auftraggeber: Client:	Dyaco International Inc. (for FCC) 12 th floor, No111, Songjiang Rd, Taipei City 104, Taiwan, ROC Dyaco Canada Inc (for IC) 5955 Don Murie Street, Niagara Falls, ON L2G 0A9, Canada			
Prüfgegenstand: Test item:	Treadmill			
Bezeichnung / Typ-Nr.: Identification / Type no.:	TRX5500(XTERRA), GT90D(DYACO) FCC ID: 2AHVL-GT90DNT041 IC: 22282-GT90DNT041			
Auftrags-Inhalt: Order content:	Complete test			
Prüfgrundlage: Test specification:	FCC CFR47 Part 15, Subpart C Section 15.247 RSS-Gen Issue 5, Amendment 2, February 2021 RSS-247 Issue 2, February 2017 ANSI C63.10: 2013			
Wareneingangsdatum: Date of sample receipt:	2021-05-16			
Prüfmuster-Nr.: Test sample no.:	A003053162-001 A003053162-002			
Prüfzeitraum: Testing period:	Refer to test report			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by: 		genehmigt von: authorized by: 		
Datum: Date: 2021-11-09 Signed by: Elliot Zhang		Ausstellungsdatum: Issue date: 2021-11-09 Signed by: Hongfei Wu		
Stellung / Position: PE/Elliot Zhang		Stellung / Position: Reviewer/Hongfei Wu		
Sonstiges / HVIN: TRX5500, GT90D Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				



TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT*RESULT: Pass***5.1.2 20dB & 99% BANDWIDTH***RESULT: Pass***5.1.3 PEAK OUTPUT POWER***RESULT: Pass***5.1.4 FREQUENCY SEPARATION***RESULT: Pass***5.1.5 NUMBER OF HOPPING FREQUENCY***RESULT: Pass***5.1.6 TIME OF OCCUPANCY***RESULT: Pass***5.1.7 CONDUCTED BAND EDGE AND OUT-OF BAND EMISSIONS***RESULT: Pass***5.2.1 CONDUCTED EMISSION***RESULT: Pass***5.3.1 RADIATED BAND-EDGE***RESULT: Pass***5.3.2 RADIATED SPURIOUS EMISSION***RESULT: Pass*

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY.....	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	8
3.5	SUBMITTED DOCUMENTS.....	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
5.	TEST RESULTS	10
5.1	CONDUCTED TESTING AT ANTENNA PORT.....	10
5.1.1	<i>Antenna Requirement.....</i>	<i>10</i>
5.1.2	<i>20dB & 99% Bandwidth.....</i>	<i>12</i>
5.1.3	<i>Peak Output Power</i>	<i>15</i>
5.1.4	<i>Frequency Separation</i>	<i>18</i>
5.1.5	<i>Number of Hopping Frequency.....</i>	<i>21</i>
5.1.6	<i>Time of Occupancy</i>	<i>24</i>
5.1.7	<i>Conducted Band Edge and out-of Band Emissions</i>	<i>27</i>
5.2	EMISSION IN THE FREQUENCY RANGE UP TO 30MHZ	34
5.2.1	<i>Conducted Emission.....</i>	<i>34</i>
5.3	EMISSION IN THE FREQUENCY RANGE ABOVE 30MHZ.....	36
5.3.1	<i>Radiated Band-Edge</i>	<i>36</i>
5.3.2	<i>Radiated Spurious Emission.....</i>	<i>39</i>
6.	LIST OF TABLES	59
7.	LIST OF FIGURES	59

1. General Remarks

1.1 Complementary Materials

Null.

2. Test Sites

2.1 Test Facilities

TÜV Rheinland (Shanghai) Co., Ltd.

Shanghai TUV Rheinland Building No. 177, 178 Lane 777, West Guangzhong Rd, Jing'an District, Shanghai, China

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance with the requirements of section 2.948 of the FCC rules. The description of the test facility is listed under FCC registration number 958801.

The Innovation, Science and Economic Development Canada has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance. The description of the test facility is listed under chambers filing number 2932F.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Due Date
3m modified semi-anechoic chamber	Frankonia	SAC3	G1811378	2022-06-27
Bilog antenna	Teseq	CBL 6112D	G1811425	2023-03-10
EMI test receiver	Rohde & Schwarz	ESCI	G1811402	2022-09-17
Spectrum analyser	Rohde & Schwarz	FSV40	G1822702	2021-11-01
Preamplifier	Taiwan EMCI	EMC184045SE	G1825372	2023-03-06
Log periodic antenna	Rohde & Schwarz	HL050	G1811417	2023-03-10
Broadband Horn Antenna	Schwarzbeck	BBHA 9170	9170-305	2022-07-08
Preamplifier	Taiwan EMCI	EMC051845SE	G1825371	2023-03-06
Spectrum Analyzer	Keysight	N9020A	MY54500180	2022-09-08
Thermohygrometer	Testo	608-H1	1241320614	2021-10-13
EMI test receiver	R&S	ESIB26	G1811380	2023-03-06
Artificial main network	R&S	ENV432	G1830003	2022-11-01
EMC measurement software	R&S	EMC32 (Ver 10.20.01)	G1824845	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	±0.39dB
	> 1GHz	±0.68dB
Conducted Emission	150kHz - 30MHz	±3.39dB
Radiated Emission	9kHz – 30MHz	±2.93dB
	30MHz - 1GHz	±5.34dB
	> 1GHz	±5.40dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a Treadmill which supports Wi-Fi and Bluetooth. The aim of this report is to evaluate the RF characteristic of the Bluetooth Classic (AP6236) Part of this EUT. For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Description of EUT	
Product Name:	Treadmill
Model No.:	TRX5500,GT90D
Test Voltage:	DC 5V for RF Conducted and Radiated Test AC 120V/60Hz for Conducted Emission Test
Technical Specification of Bluetooth Classic(EW-BLED-26)	
Frequency Range:	2402 to 2480MHz
Modulation Type:	GFSK, $\pi/4$ DQPSK
Data Rate:	1Mbps(GFSK), 2Mbps($\pi/4$ DQPSK)
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi (Provided by the Client)
Technical Specification of Bluetooth Classic(AP6236)	
Frequency Range:	2402 to 2480MHz
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Data Rate:	1Mbps(GFSK), 2Mbps($\pi/4$ DQPSK), 3Mbps(8DPSK)
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi (Provided by the Client)
Technical Specification of Wi-Fi(AP6236)	
Frequency Range:	2412 to 2462MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (QPSK/BPSK/16QAM/64QAM)
Date Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 72.2Mbps
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi (Provided by the Client)

Note: The above two models are all the same except the model number, so only the GT90D was chosen to perform the test.

3.3 Independent Operation Modes

Table 4: Independent Operation Modes

Test Mode	Data Rate	Channel
TM1	1-DH5	00
TM2	1-DH5	39
TM3	1-DH5	78
TM4	2-DH5	00
TM5	2-DH5	39
TM6	2-DH5	78
TM7	3-DH5	00
TM8	3-DH5	39
TM9	3-DH5	78
TM10	1-DH1	Hopping
TM11	1-DH3	Hopping
TM12	1-DH5	Hopping
TM13	2-DH1	Hopping
TM14	2-DH3	Hopping
TM15	2-DH5	Hopping
TM16	3-DH1	Hopping
TM17	3-DH3	Hopping
TM18	3-DH5	Hopping
TM19	Normal Operating Mode	

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

Test Software used: Ampak RFTestTool, VER: 5.6

Table 5: Power parameter value

Channel Frequency [MHz]	Power Parameter Value
2402	Transmit Power Table Index
2441	Transmit Power Table Index
2480	Transmit Power Table Index

4.3 Special Accessories and Auxiliary Equipment

Null.

4.4 Countermeasures to achieve EMC Compliance

Null.

5. Test Results

5.1 Conducted Testing at Antenna Port

5.1.1 Antenna Requirement

RESULT:**Pass**

According to the manufacturer declared, the EUT has one PCB antenna, the directional gain of antenna is 2 dBi and the antenna is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Table 6: Antenna Requirement**FCC 15.203 – Antenna Requirement 1**

Requirement: No antenna other than that furnished by the responsible party shall be used with the device

Results: Antenna type: PCB antenna

Verdict: Pass

FCC 15.204 – Antenna Requirement 2

Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.

Results: Only one PCB antenna can be used

Verdict: Pass

RSS-Gen 6.4 – External Control

Requirement: The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the regulatory requirements, including RSS-Gen and the applicable RSSs

Results: The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.

Verdict: PASS

Prüfbericht - Nr.: CN213MUT 002

Test Report No.

Seite 11 von 59

Page 11 of 59

RSS-Gen 6.8 – Antenna Requirement

Requirement: When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

Results:

a) Antenna Type:	PCB Antenna
b) Manufacture:	N/A
c) Model No.:	N/A
d) Gain with reference to an isotropic radiator:	2dBi

Verdict: PASS

5.1.2 20dB & 99% Bandwidth

RESULT:

Pass

Date of testing	: 2021-07-07
Ambient temperature	: 20.6°C
Relative humidity	: 58.6%
Atmospheric pressure	: 101kPa
Test requirement	: FCC Part 15.247(a)(1) RSS-247 Issue 2, February 2017, Clause 5.1(a)
Test procedure	: ANSI C63.10: 2013
Test voltage	: DC 5V
Test modes applied	: TM1 to TM9


Table 7: 20dB & 99% Bandwidth, TM1 to TM9

Test Mode	Mode	CH.	Freq. [MHz]	20dB Bandwidtht [kHz]	99% Bandwidth [kHz]
TM1	1-DH5	00	2402	956.6	897.14
TM2	1-DH5	39	2441	961.0	897.96
TM3	1-DH5	78	2480	960.5	899.10
TM4	2-DH5	00	2402	1346	1191.0
TM5	2-DH5	39	2441	1343	1191.4
TM6	2-DH5	78	2480	1346	1191.6
TM7	3-DH5	00	2402	1305	1188.8
TM8	3-DH5	39	2441	1305	1188.3
TM9	3-DH5	78	2480	1301	1188.7

Note:

For frequency hopping systems operating in the 2400 – 2483.5MHz band, no bandwidth limit is specified. The test data is provide for reference.

And according to FCC, when the occupied bandwidth limit is not stated in the applicable FCC or reference measurement method, the transmitted signal band width shall be reported as the 99% emission bandwidth.

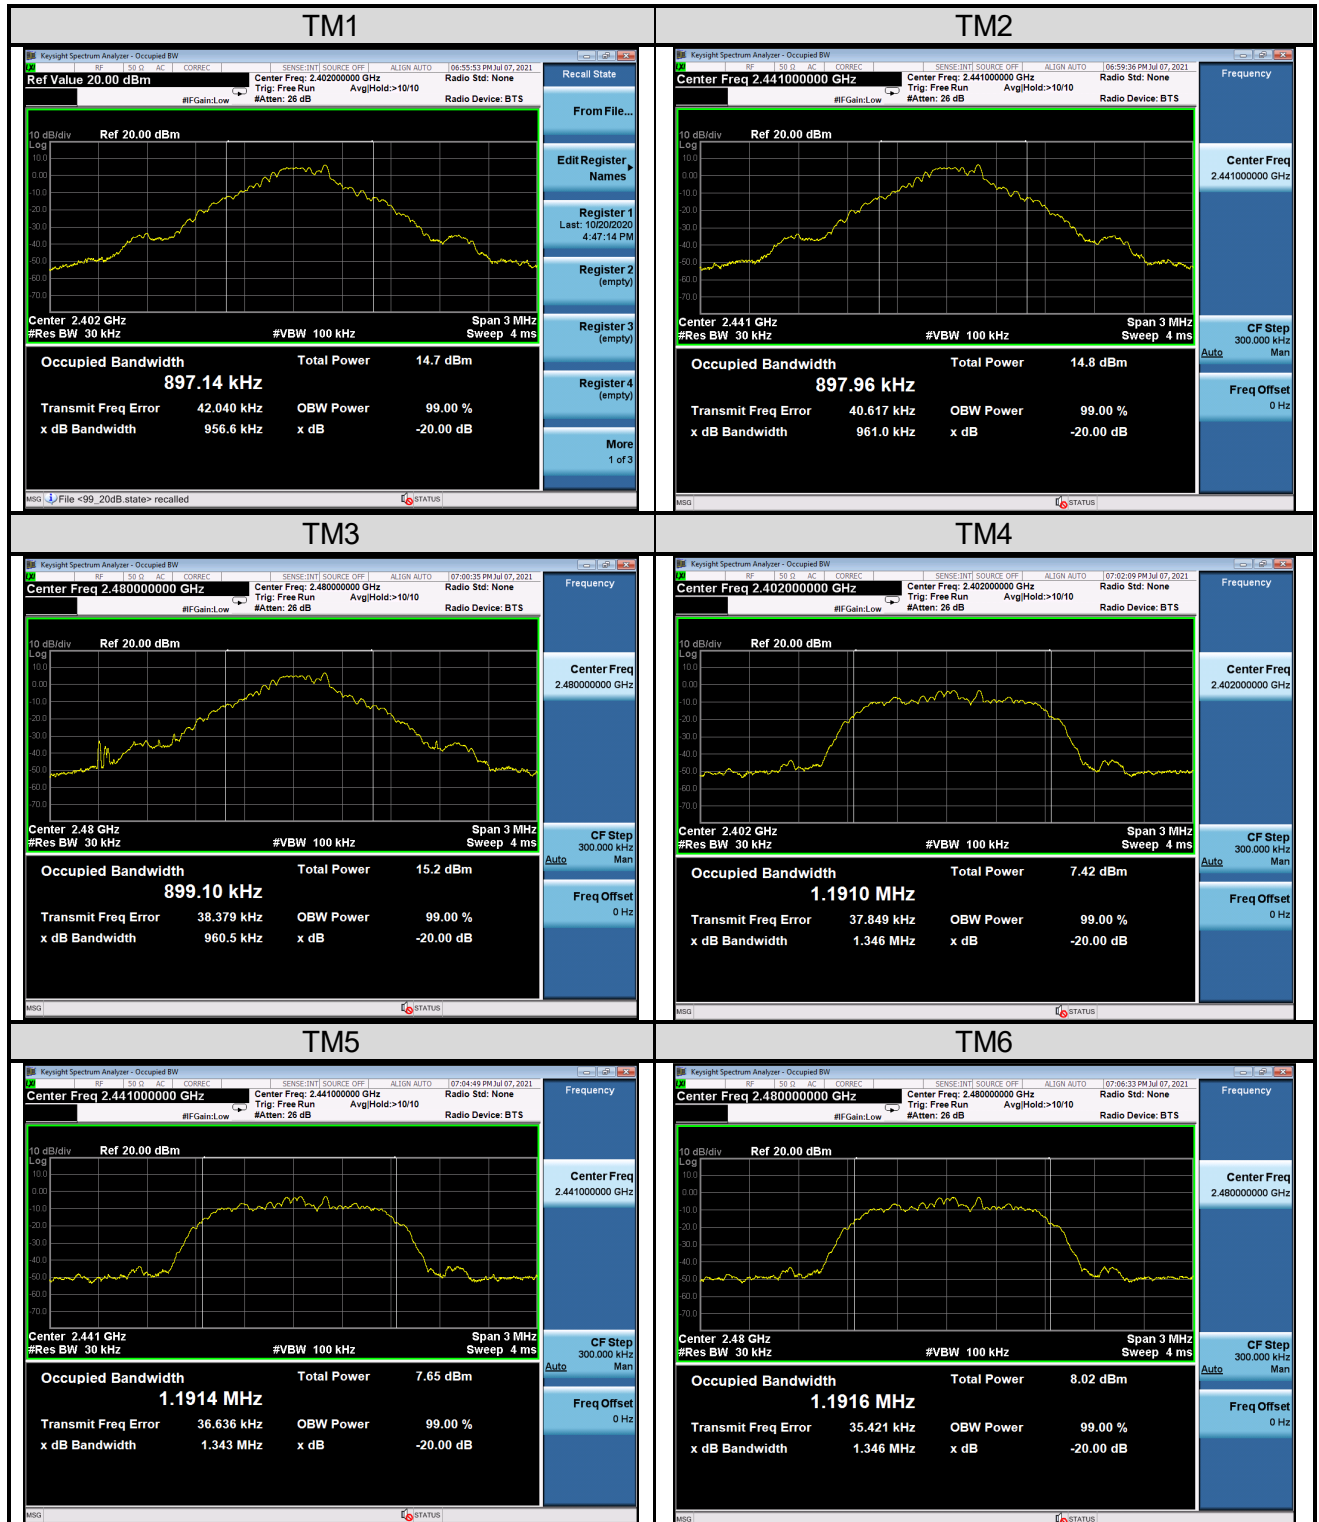Figure 1: 20dB & 99% Bandwidth, TM1 to TM9




5.1.3 Peak Output Power

RESULT:

Pass

Date of testing	: 2021-07-07
Ambient temperature	: 23.1°C
Relative humidity	: 48.5%
Atmospheric pressure	: 101kPa
Test requirement	: FCC Part 15.247(b)(1) RSS-247 Issue 2, February 2017, Clause 5.4(b)
Test procedure	: ANSI C63.10: 2013
Test voltage	: DC 5V
Test modes applied	: TM1 to TM9


Table 8: Peak Output Power


Test Mode	Antenna Gain [dBi]	CH.	Freq. [MHz]	Maximum Peak Conducted Output Power [dBm]	Peak Conducted Output Power Limit [dBm]	Maximum EIRP [dBm]	EIRP Limit [dBm]
TM1	2	00	2402	7.421	30	9.421	36
TM2		39	2441	7.640	30	9.640	36
TM3		78	2480	8.140	30	10.140	36
TM4		00	2402	2.005	30	4.005	36
TM5		39	2441	2.333	30	4.333	36
TM6		78	2480	2.665	30	4.665	36
TM7		00	2402	2.442	30	4.442	36
TM8		39	2441	2.755	30	4.755	36
TM9		78	2480	3.083	30	5.083	36

Note:

EIRP=Peak Conducted Output Power + Antenna Gain

The cable loss=1dB was provided by the client, and was factored in the result Peak Conducted Output Power

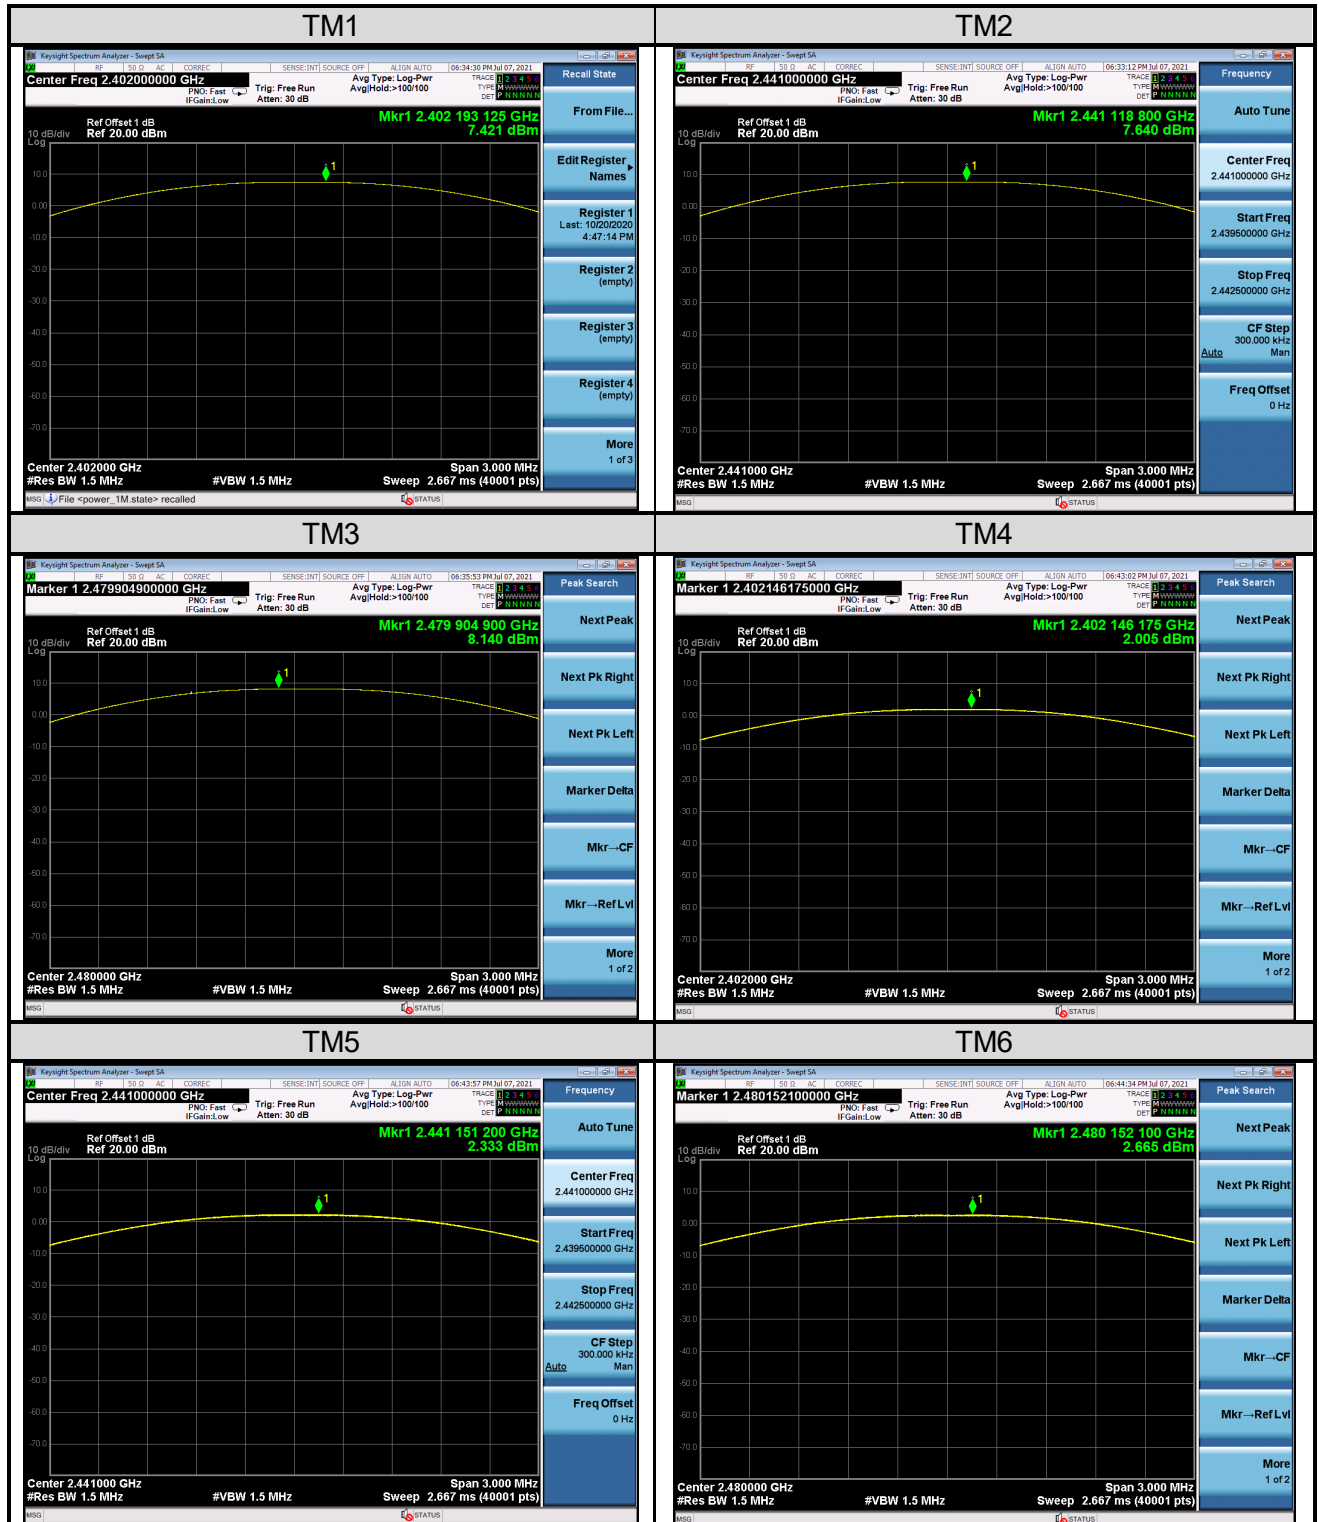Figure 2: Peak Output Power, TM1 to TM9

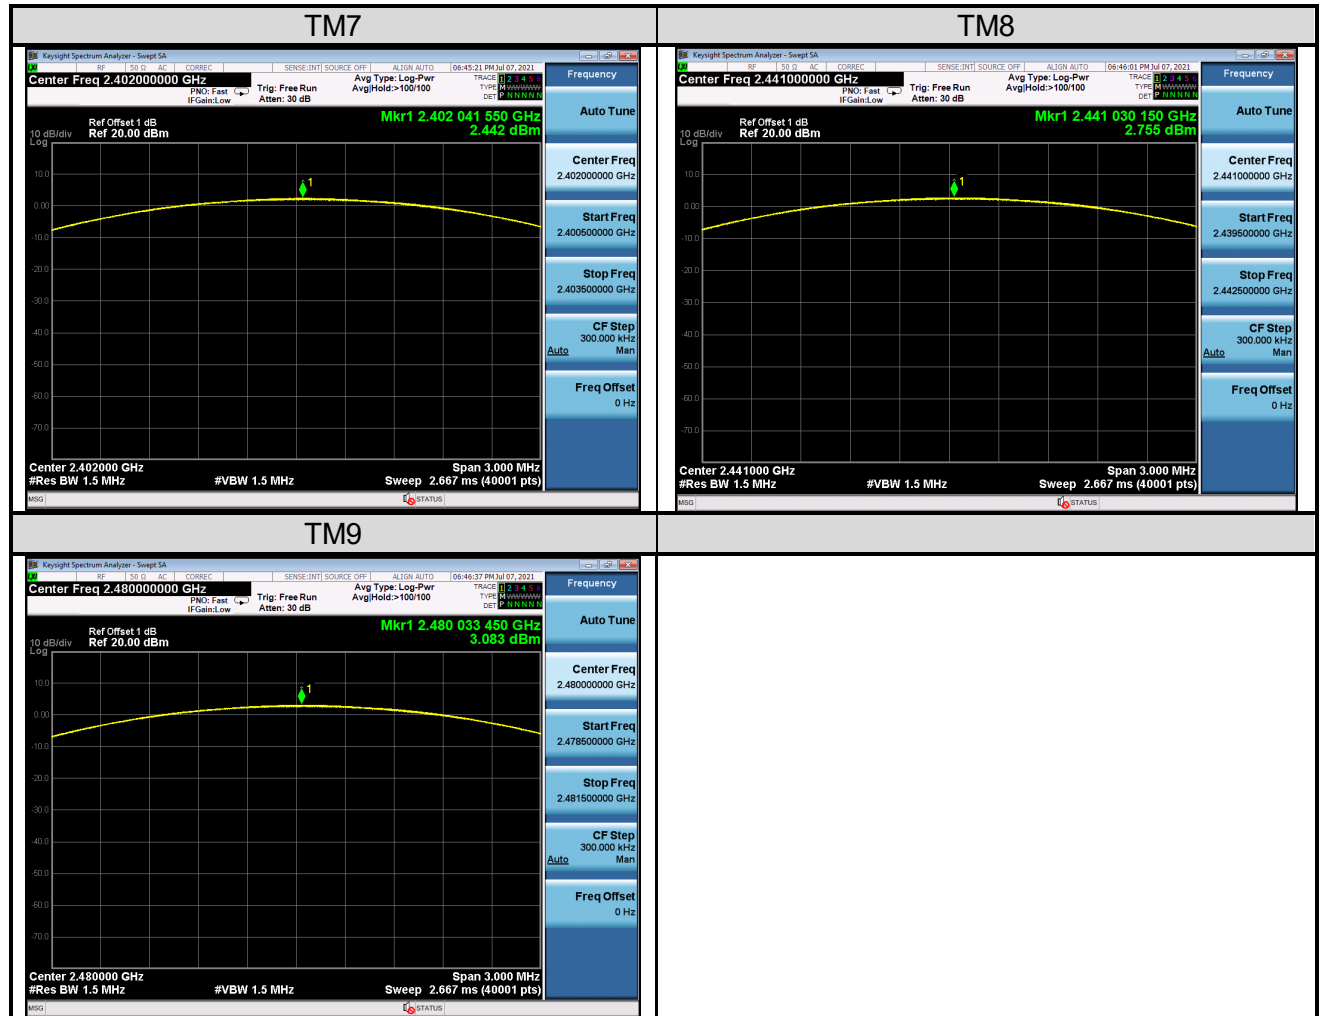


5.1.4 Frequency Separation

RESULT:

Pass

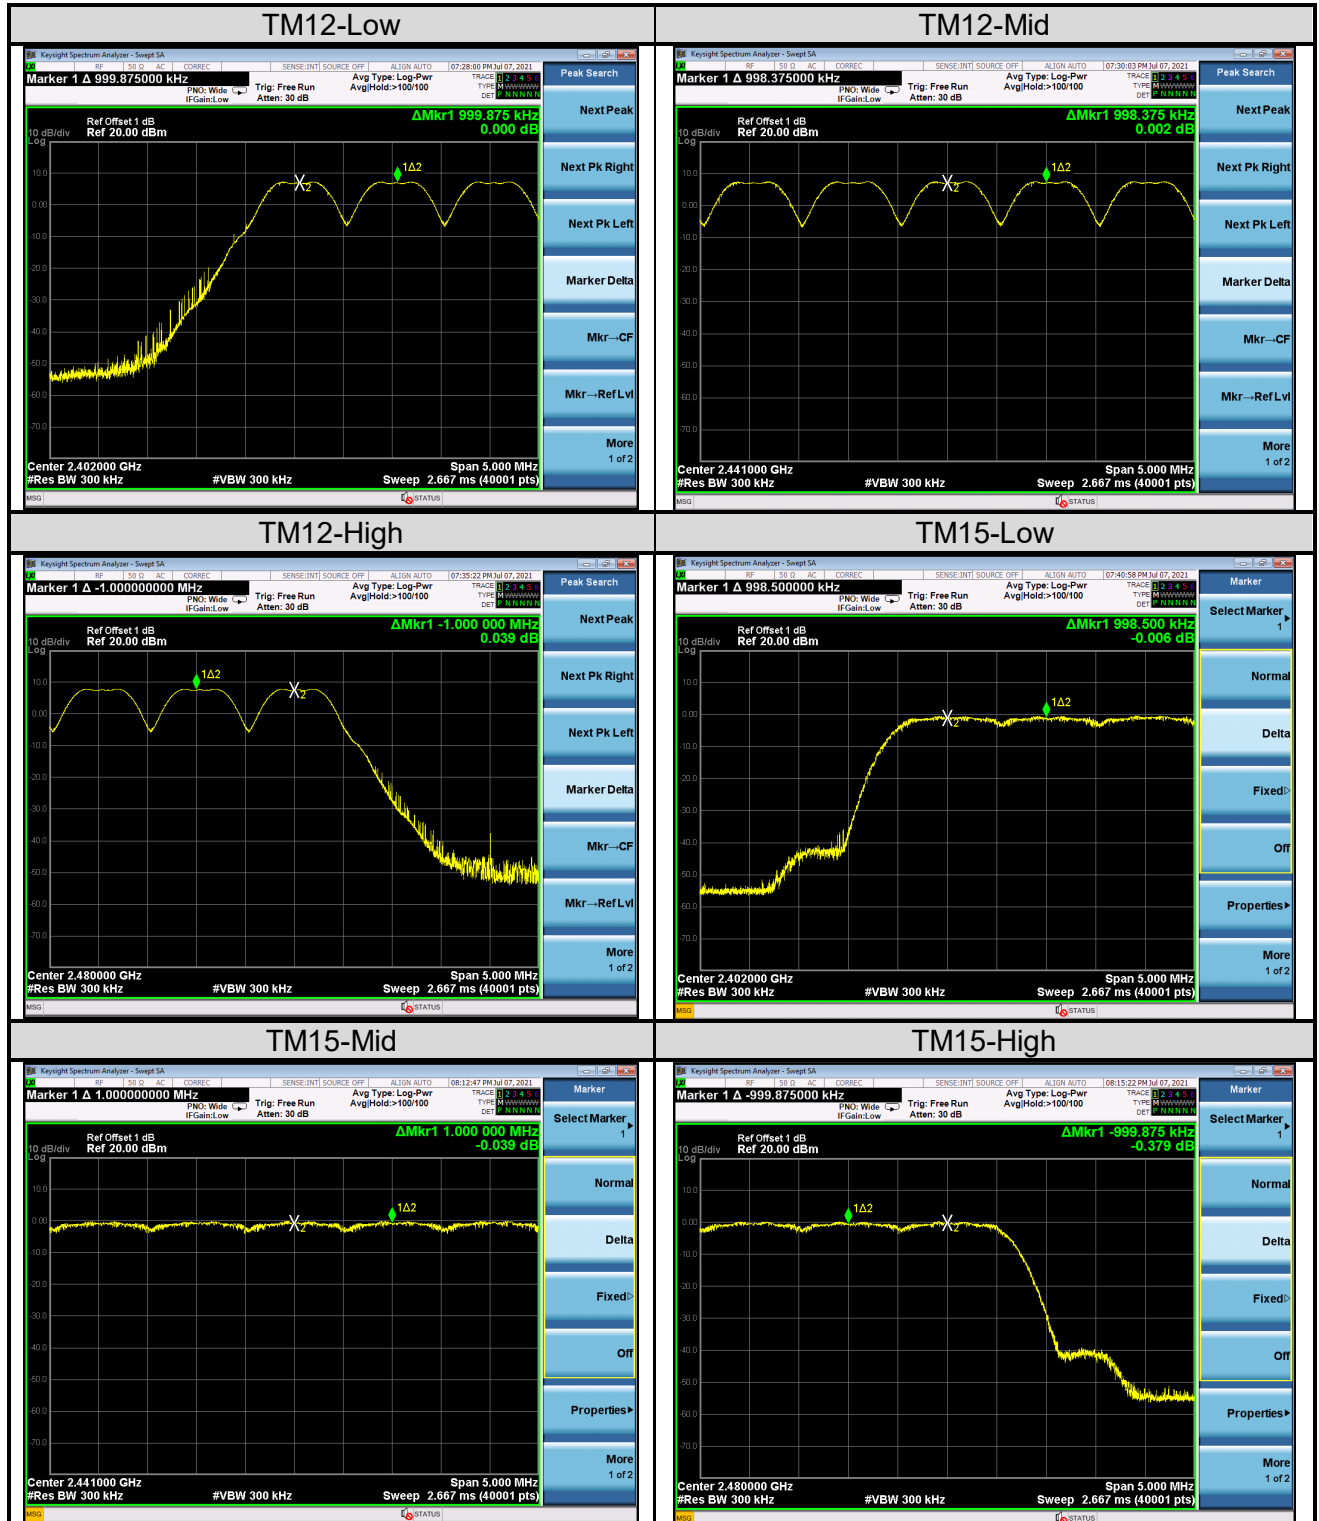
Date of testing	: 2021-07-07
Ambient temperature	: 21.4°C
Relative humidity	: 56.1%
Atmospheric pressure	: 101kPa
Test requirement	: FCC Part 15.247(a)(1) RSS-247 Issue 2, February 2017, Clause 5.1(b)
Test procedure	: ANSI C63.10: 2013
Test voltage	: DC 5V
Test modes applied	: TM12 , TM15, TM18


Table 9: Frequency Separation

Test Mode	CH.	Frequency [MHz]	Frequency Separation [kHz]	Limit [kHz]
TM12	00	2402	999.875	≥637.733
	39	2441	998.375	≥640.667
	78	2480	1000.000	≥640.333
TM15	00	2402	998.500	≥897.333
	39	2441	1000.000	≥895.333
	78	2480	999.875	≥897.333
TM18	00	2402	1000.000	≥870.000
	39	2441	1000.000	≥870.000
	78	2480	999.250	≥867.333

Note:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Figure 3: Frequency Separation

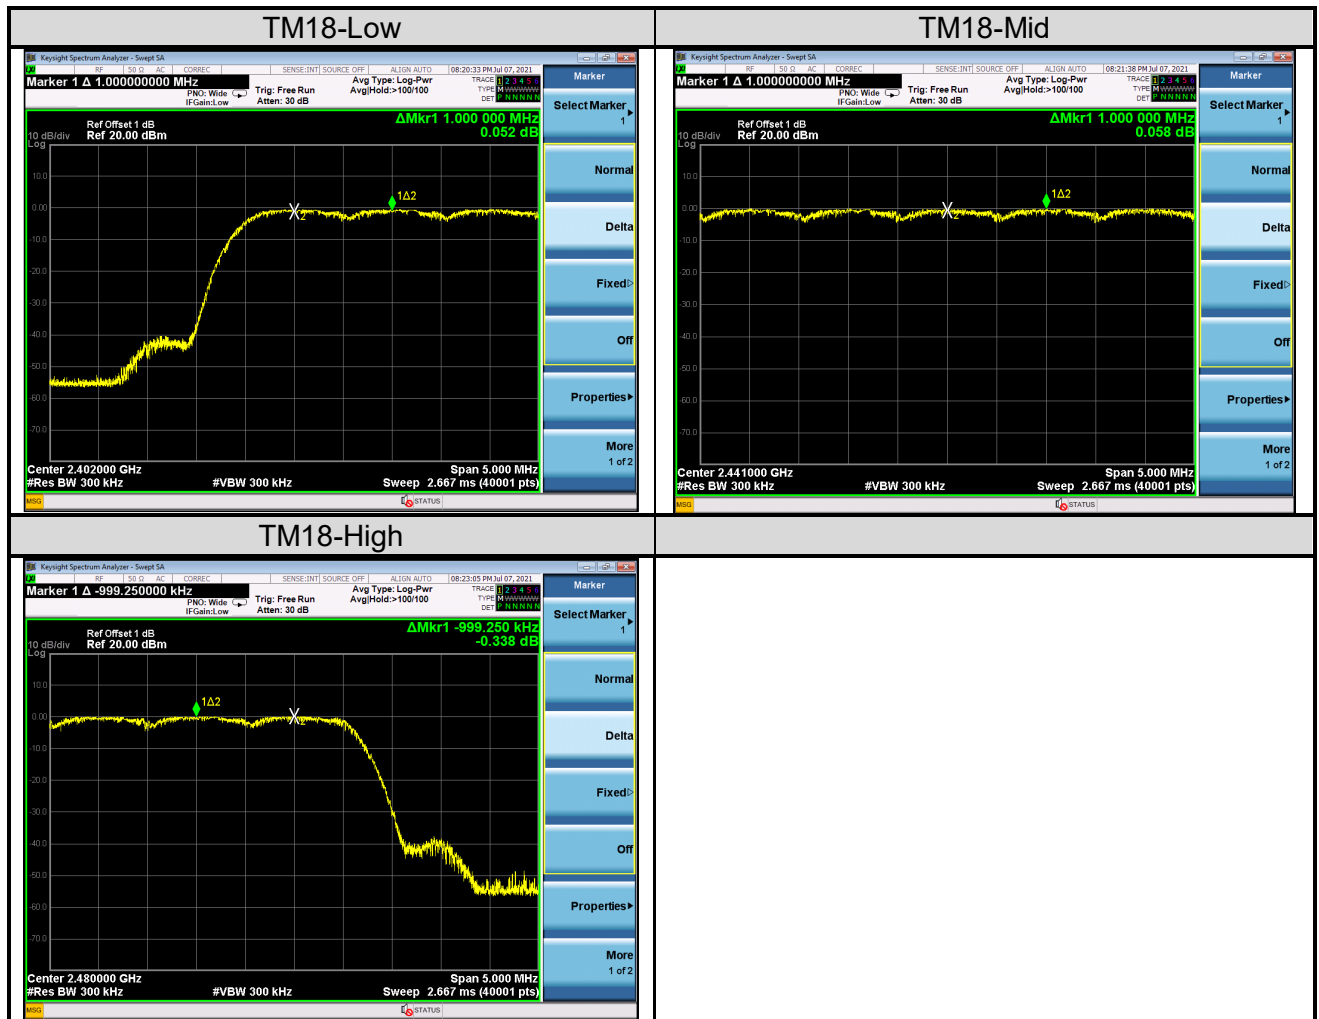


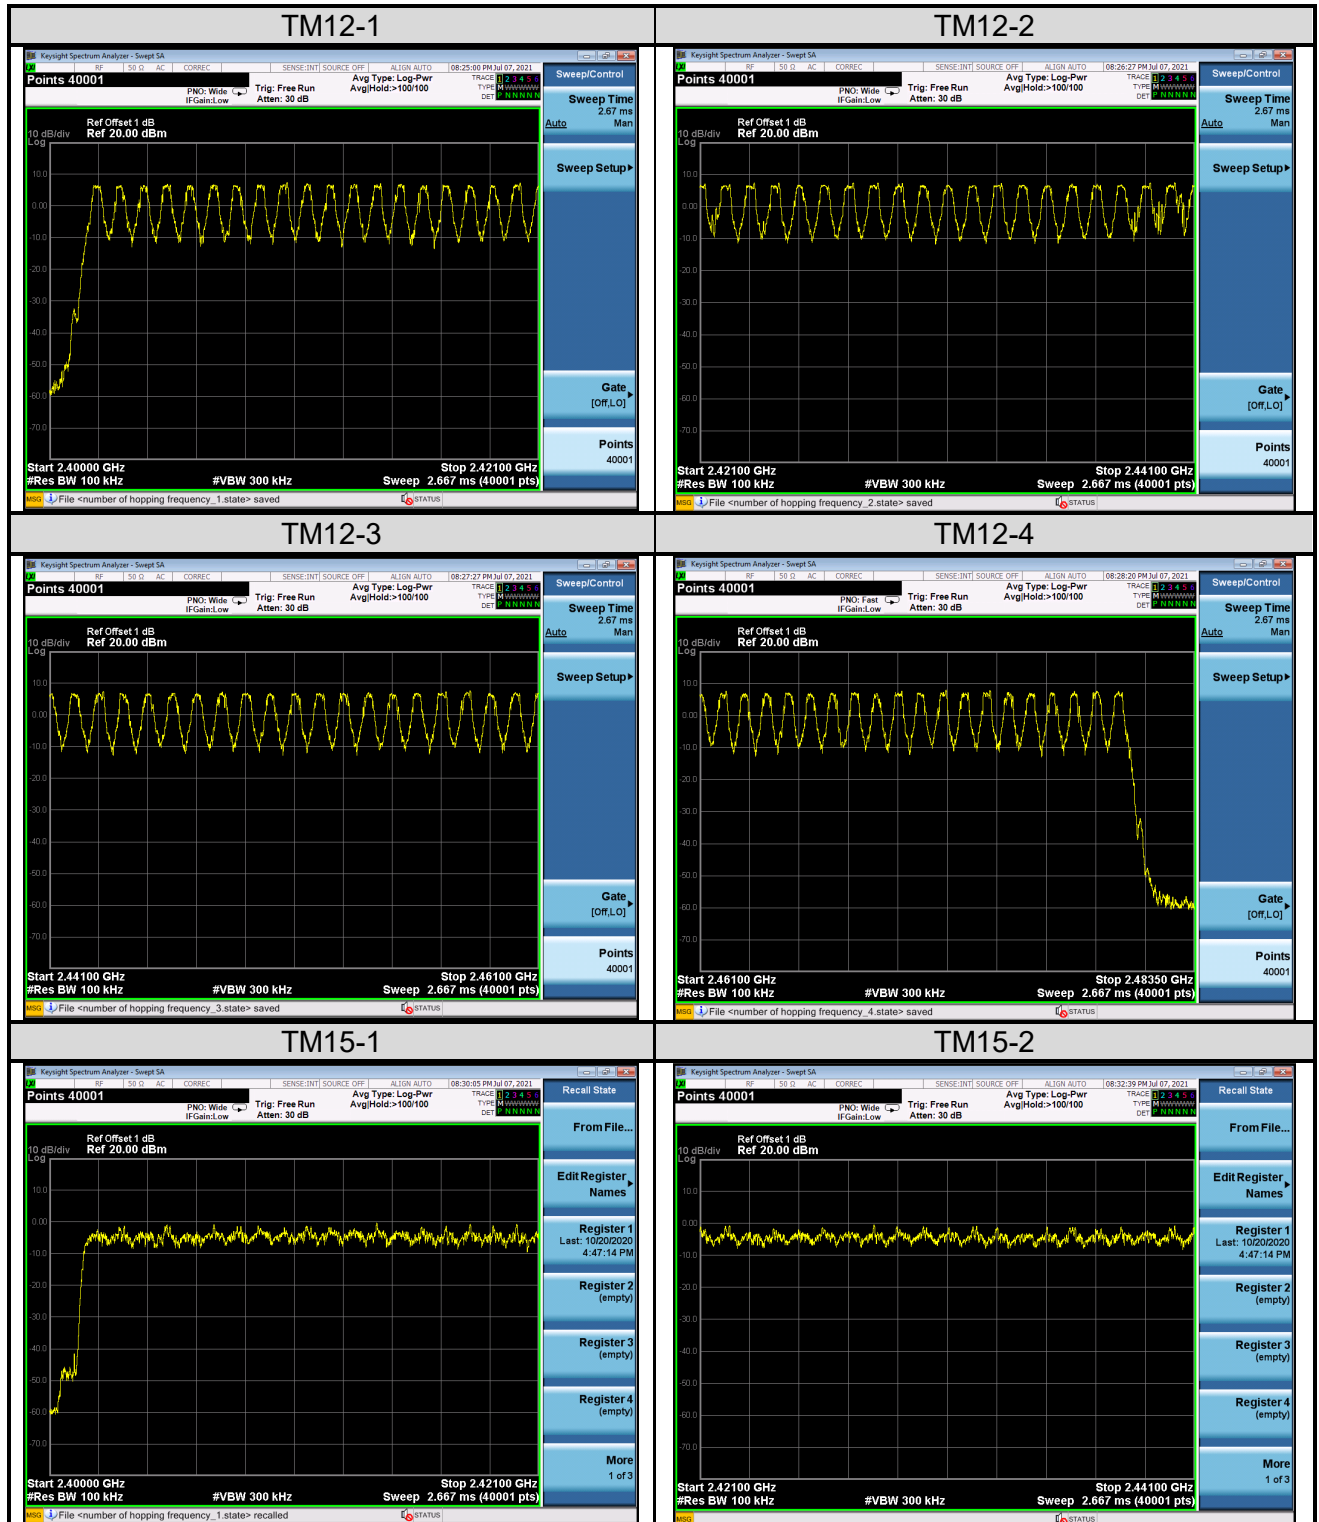
5.1.5 Number of Hopping Frequency


RESULT:**Pass**

Date of testing : 2021-07-07
Ambient temperature : 24.4°C
Relative humidity : 36.1%
Atmospheric pressure : 101kPa
Test requirement : FCC 15.247(a)(1)(iii)
RSS-247 Issue 2, February 2017, Clause 5.1(d)
Test procedure : ANSI C63.10: 2013
Test voltage : DC 5V
Test modes applied : TM12, TM15, TM18

Table 10: Number of Hopping Frequency

Frequency Range	Measured Quantity of Hopping Channel	Limit
2402 to 2480	79	≥15



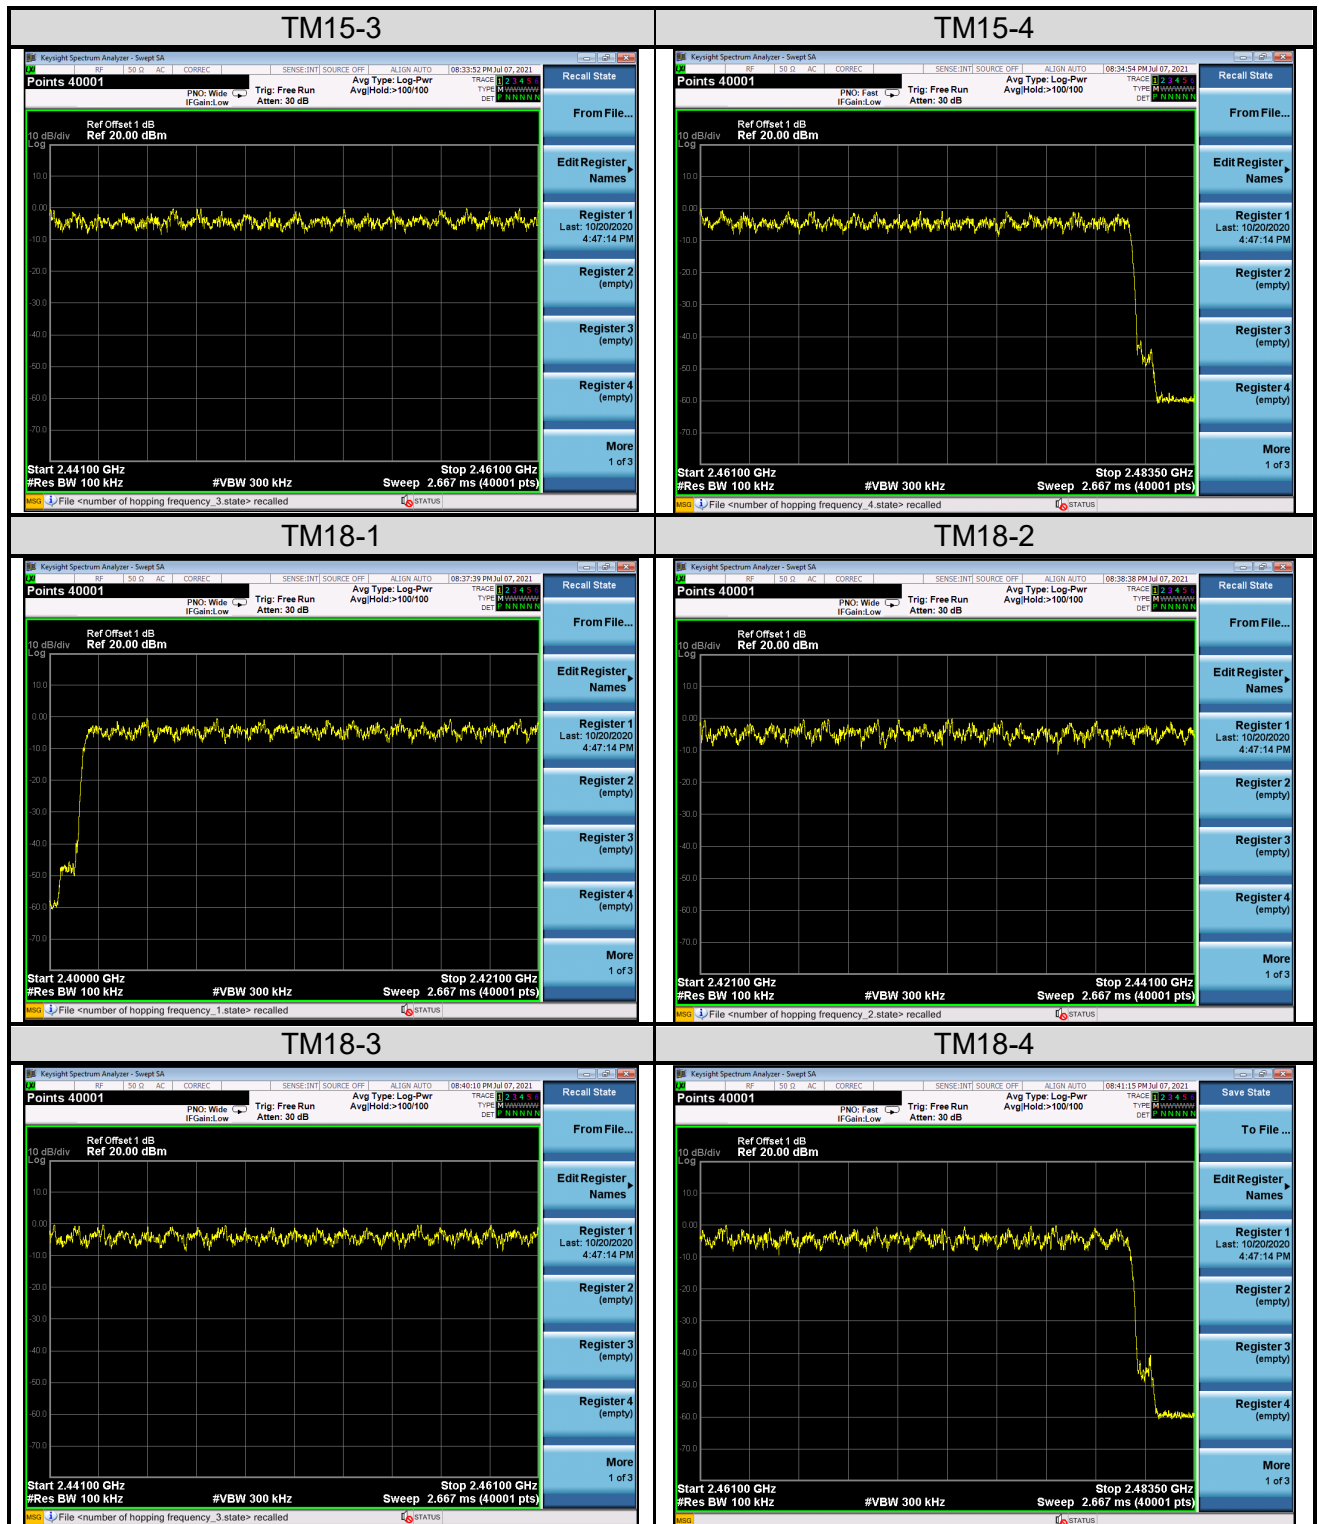

5.1.6 Time of Occupancy

RESULT:

Pass

Date of testing	: 2021-07-08
Ambient temperature	: 26.2°C
Relative humidity	: 32.7%
Atmospheric pressure	: 101kPa
Test requirement	: FCC 15.247(a)(1)(iii) RSS-247 Issue 2, February 2017, Clause 5.1(d)
Test procedure	: ANSI C63.10: 2013
Test voltage	: DC 5V
Test modes applied	: TM10 to TM18

Table 11: Time of Occupancy, TM10 to TM18

Test Mode	Mode	CH.	Frequency [MHz]	Packet Duration [ms]	Hops over Occupancy Time [Hops]	Time of Occupancy [ms]	Limit [ms]
TM10	1-DH1	39	2441	0.3772	320	120.704	400
TM11	1-DH3	39	2441	1.624	160	259.840	400
TM12	1-DH5	39	2441	2.870	107	307.090	400
TM13	2-DH1	39	2441	0.3864	320	123.648	400
TM14	2-DH3	39	2441	1.640	160	262.400	400
TM15	2-DH5	39	2441	2.890	107	309.230	400
TM16	3-DH1	39	2441	0.3895	320	124.640	400
TM17	3-DH3	39	2441	1.640	160	262.400	400
TM18	3-DH5	39	2441	2.880	107	308.160	400


Note:

Time of occupancy = Packet duration * Hops over Occupancy Time.

Hops Over Occupancy Time in 31.6s for DH1 = $1600 / 2 / 79 * 31.6 = 320$.

Hops Over Occupancy Time in 31.6s for DH3 = $1600 / 4 / 79 * 31.6 = 160$.

Hops Over Occupancy Time in 31.6s for DH5 = $1600 / 6 / 79 * 31.6 = 107$.

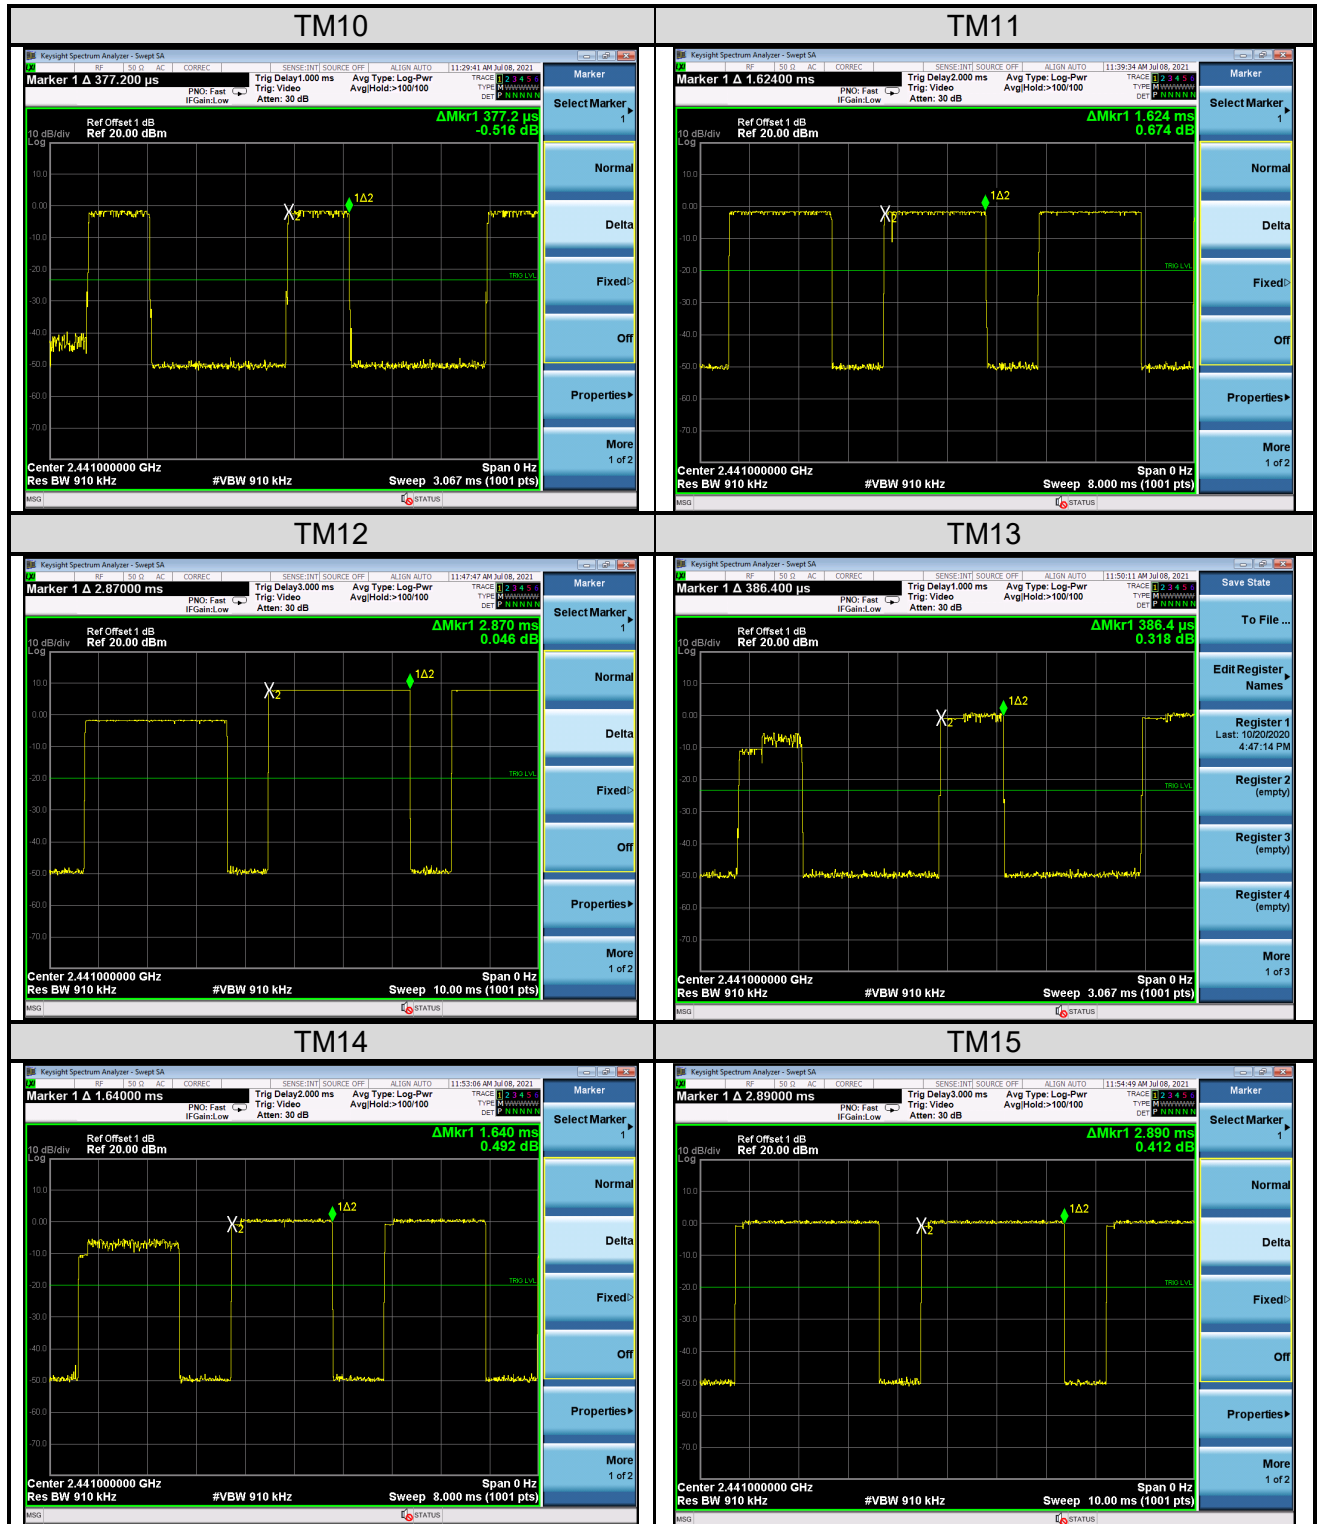Figure 5: Time of Occupancy, TM10 to TM18




5.1.7 Conducted Band Edge and out-of Band Emissions

RESULT:**Pass**

Date of testing	:	2021-07-08
Ambient temperature	:	21.4°C
Relative humidity	:	56.1%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(d) RSS-247 Issue 2, February 2017, Clause 5.5
Test procedure	:	ANSI C63.10: 2013
Test voltage	:	DC 5V
Test modes applied	:	TM1 to TM9, TM12, TM15, TM18

Figure 6: Reference level

