



6.8.2 Test setup


Below 1GHz:

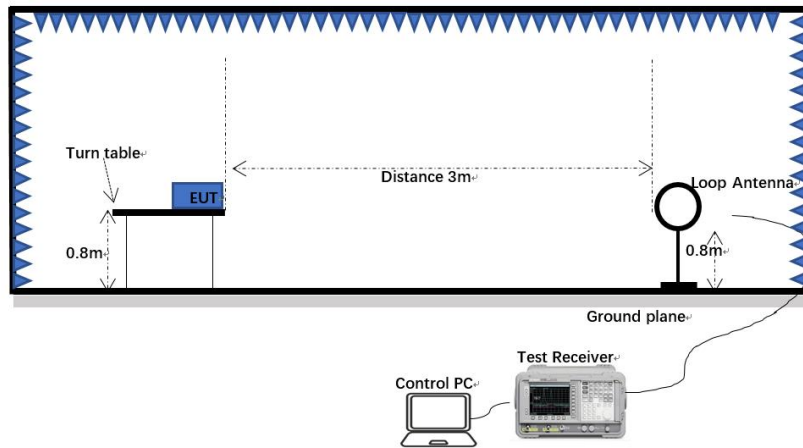

30MHz-1GHz:

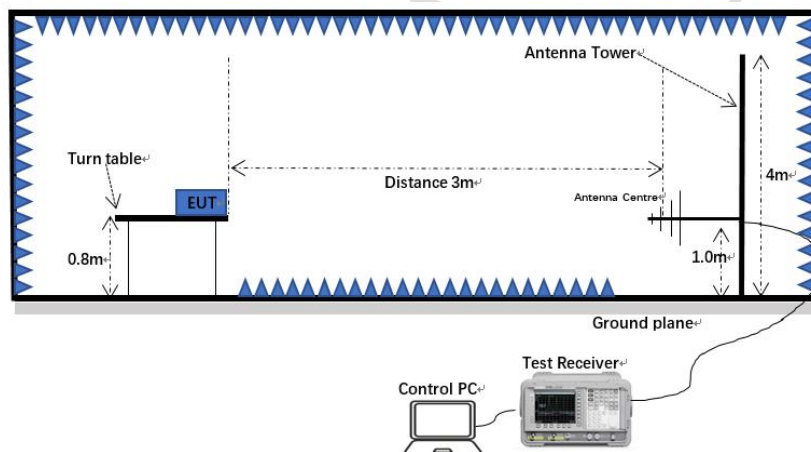

Above 1GHz:

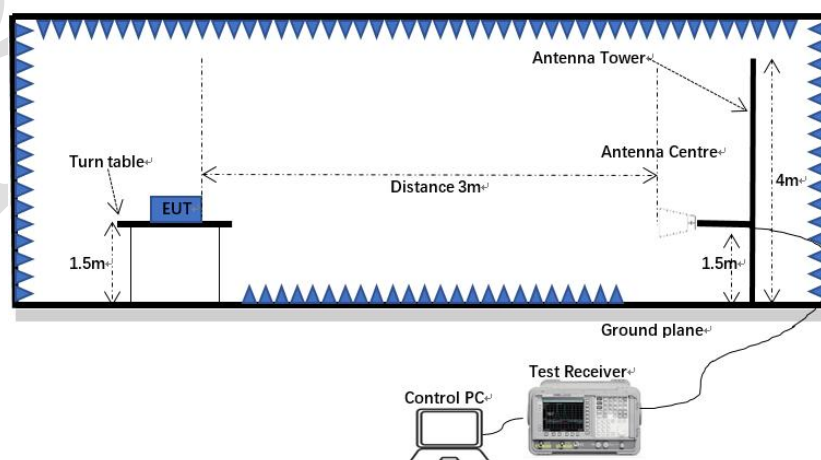

6.8.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.


Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.8.4 Test data


Remark: During the test, pre-scan the BLE1M/BLE2M mode, and found the BLE1M mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

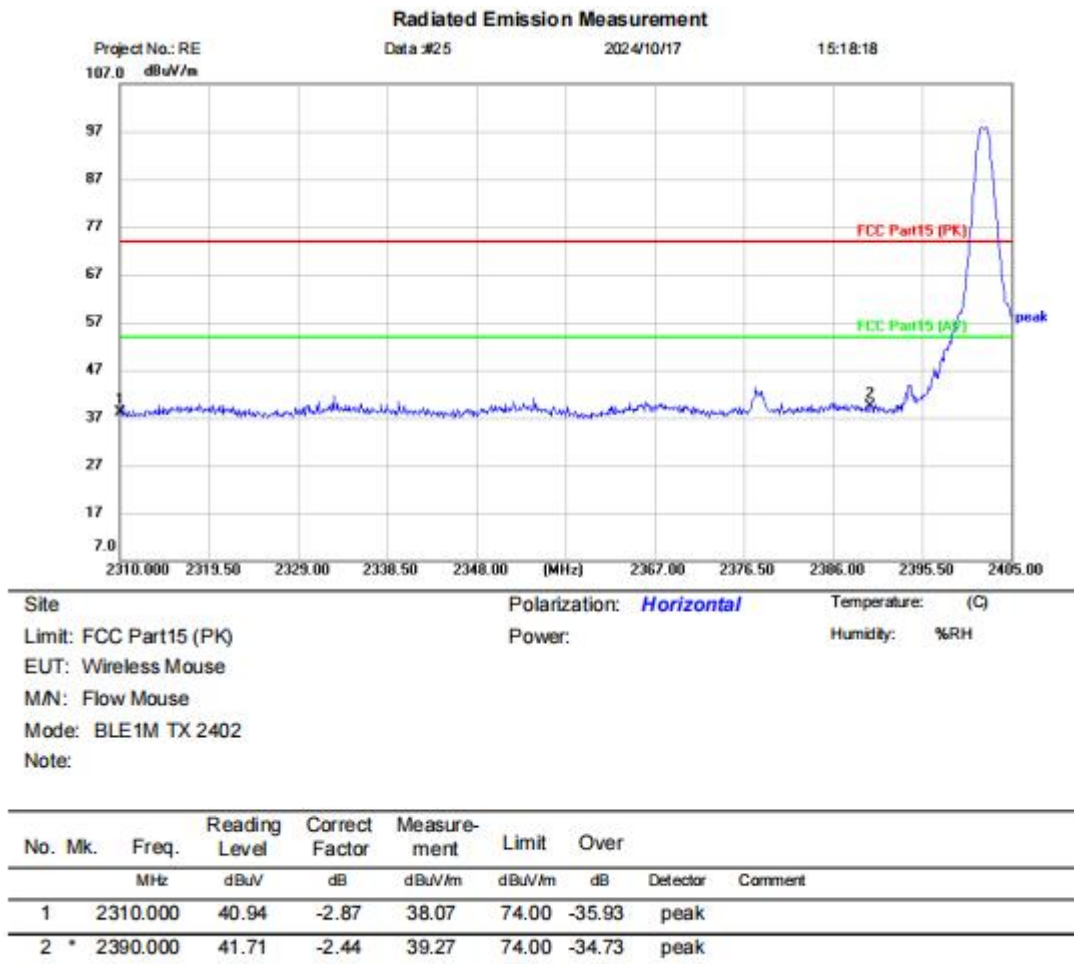

Test Result: Pass

[Test mode:TX low channel]; [Polarity: Vertical]

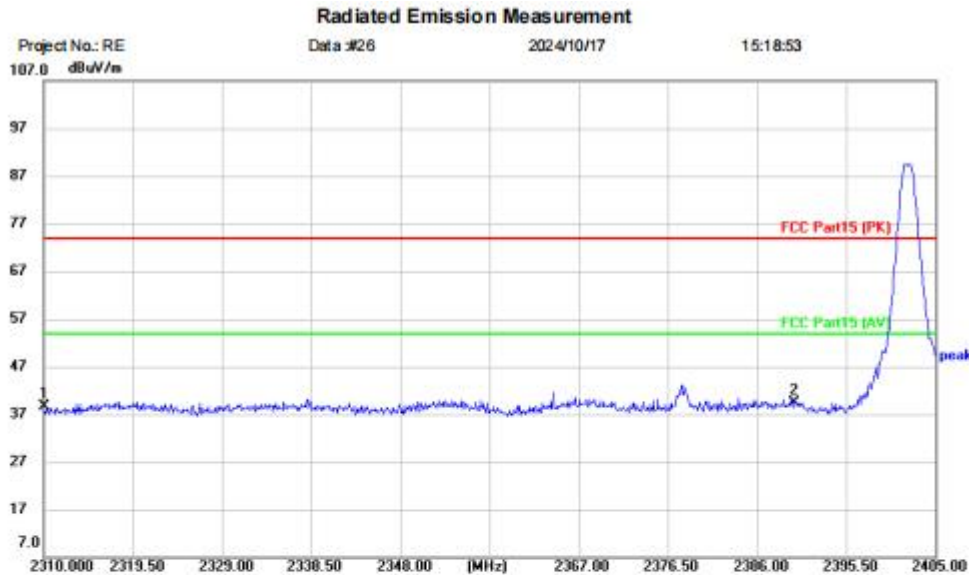


Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Wireless Mouse
MN: Flow Mouse
Mode: BLE1M TX 2402
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	41.49	-2.87	38.62	74.00	-35.38	peak	
2	*	2390.000	41.90	-2.44	39.46	74.00	-34.54	peak	


Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

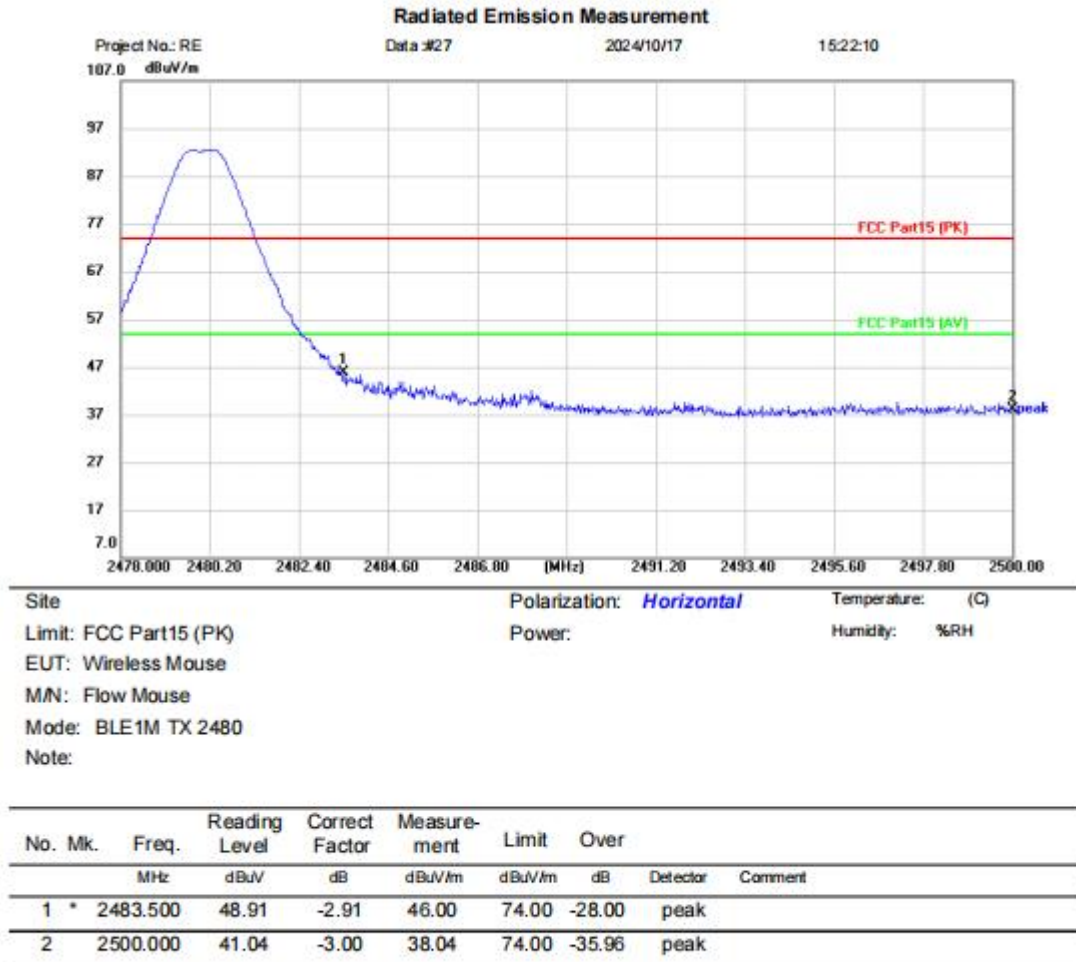

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

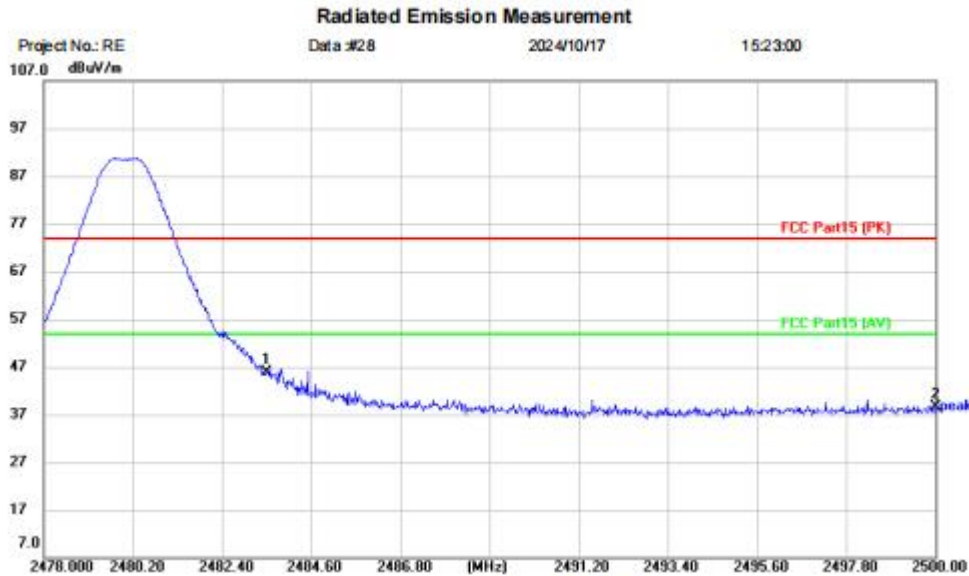

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Wireless Mouse
MN: Flow Mouse
Mode: BLE1M TX 2480
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	48.69	-2.91	45.78	74.00	-28.22	peak	
2		2500.000	41.53	-3.00	38.53	74.00	-35.47	peak	


Test Result: Pass

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.269	30	Pass
NVNT	BLE 1M	2442	Ant1	1.352	30	Pass
NVNT	BLE 1M	2480	Ant1	1.479	30	Pass
NVNT	BLE 2M	2402	Ant1	1.464	30	Pass
NVNT	BLE 2M	2442	Ant1	1.408	30	Pass
NVNT	BLE 2M	2480	Ant1	1.059	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

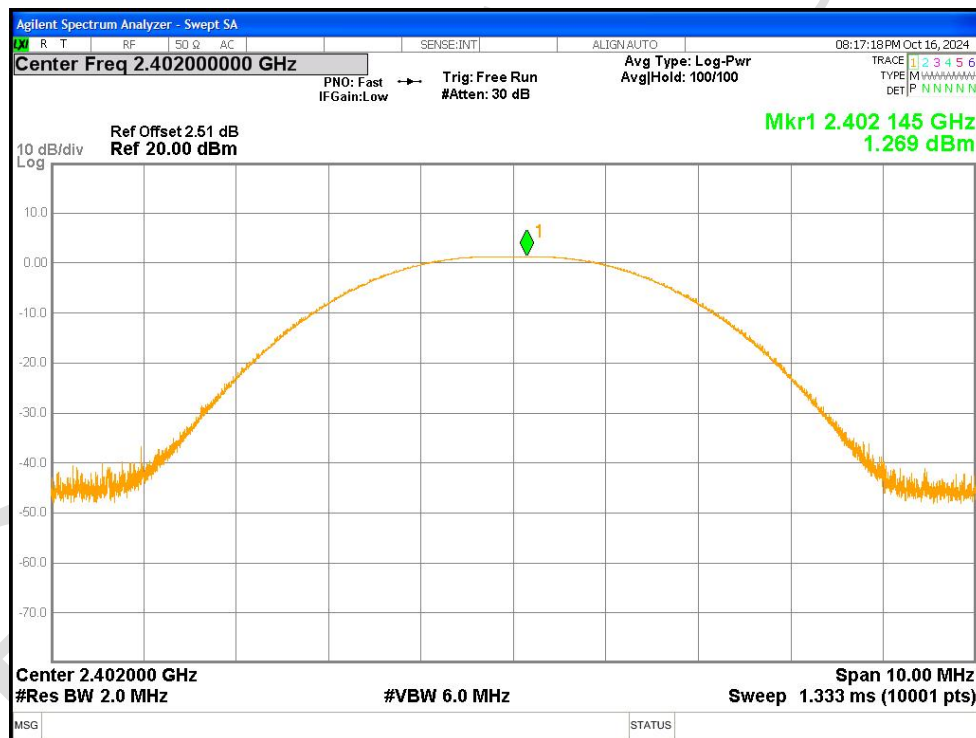


Power NVNT BLE 1M 2442MHz Ant1

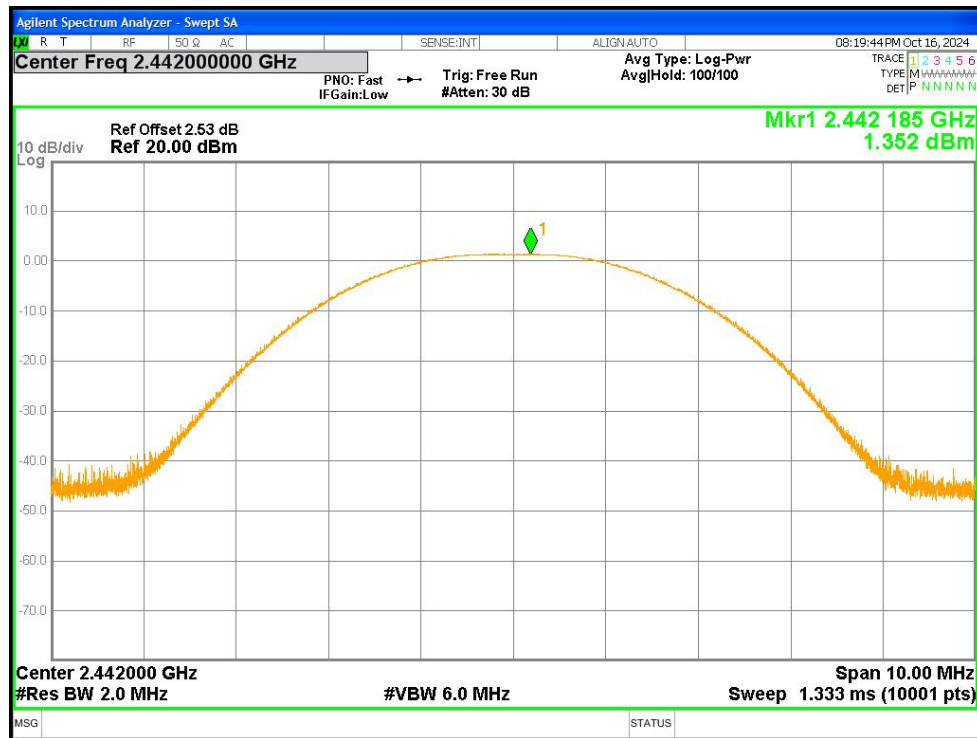


Power NVNT BLE 1M 2480MHz Ant1

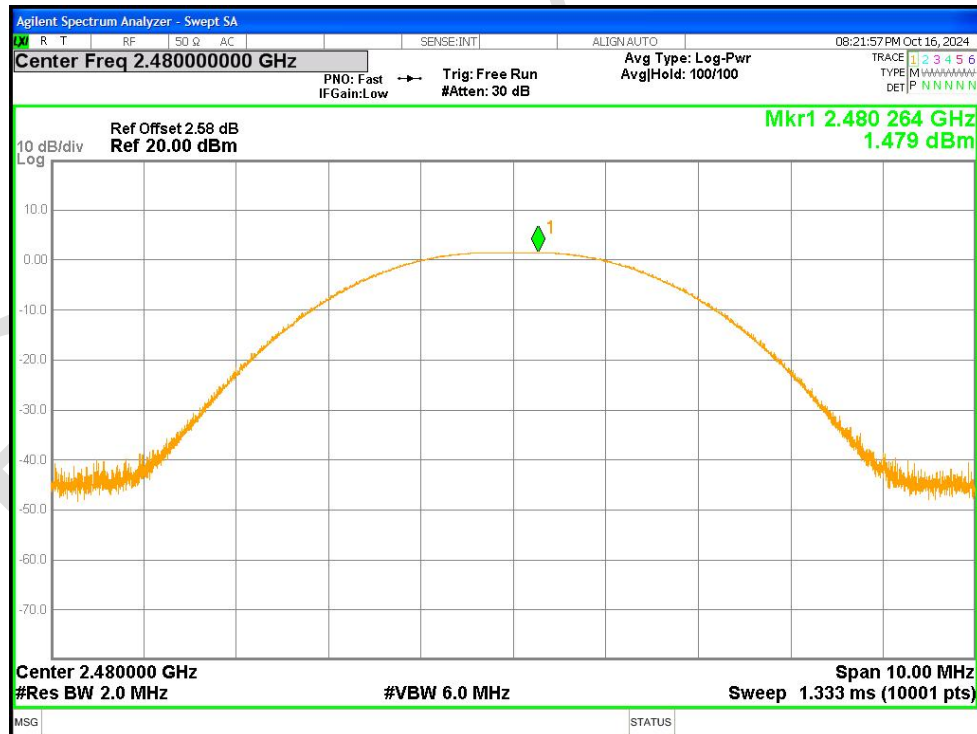


Power NVNT BLE 2M 2402MHz Ant1

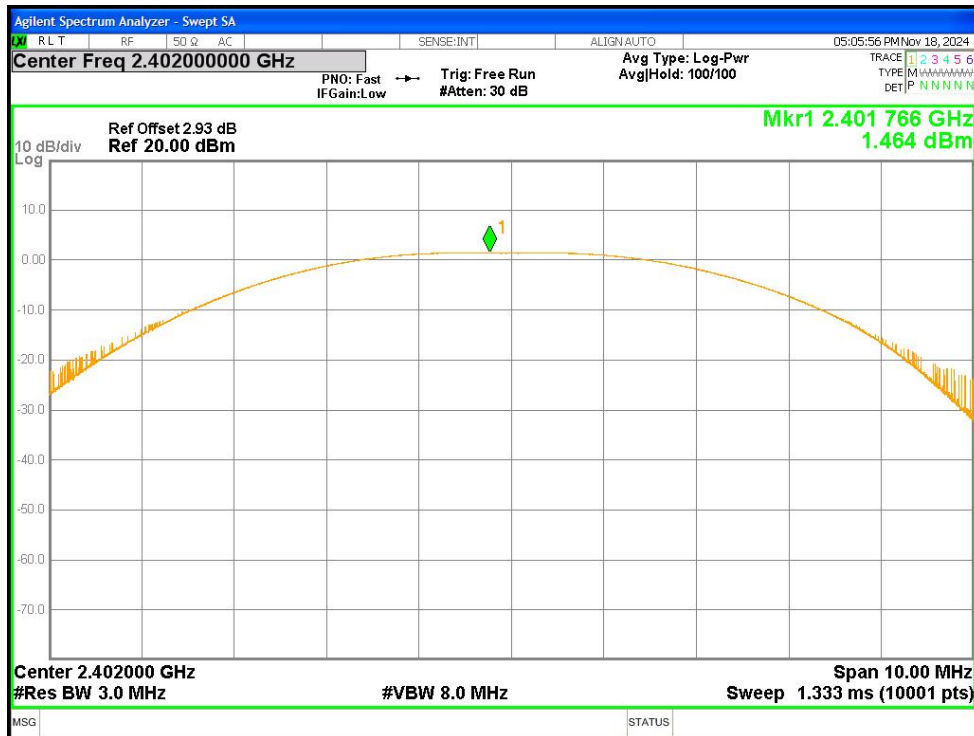

Power NVNT BLE 2M 2442MHz Ant1

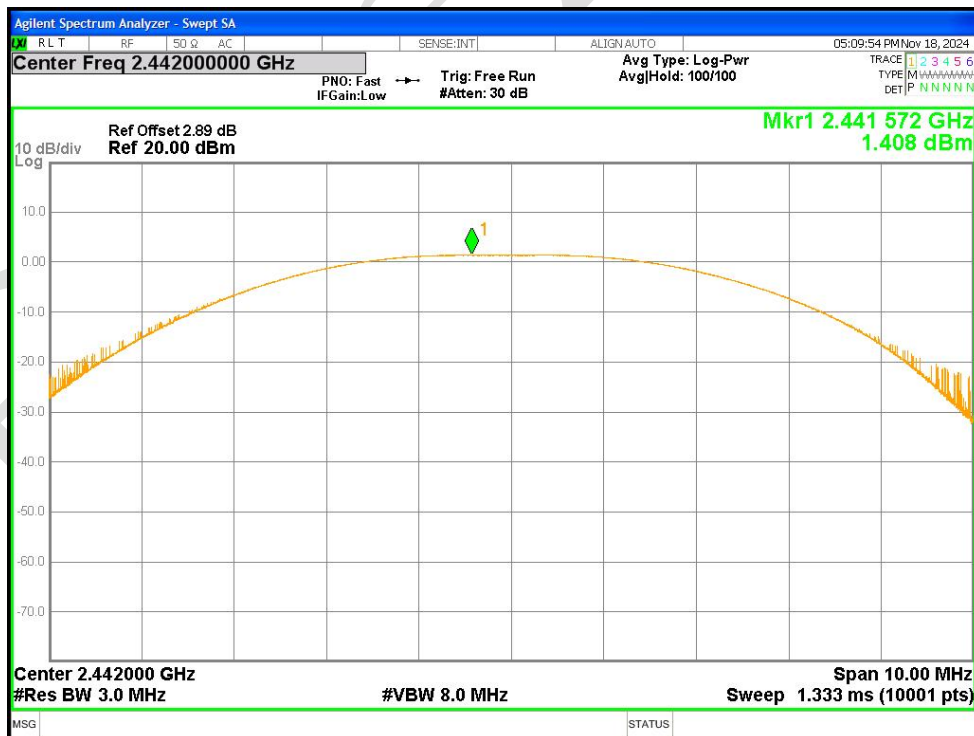


Power NVNT BLE 2M 2480MHz Ant1

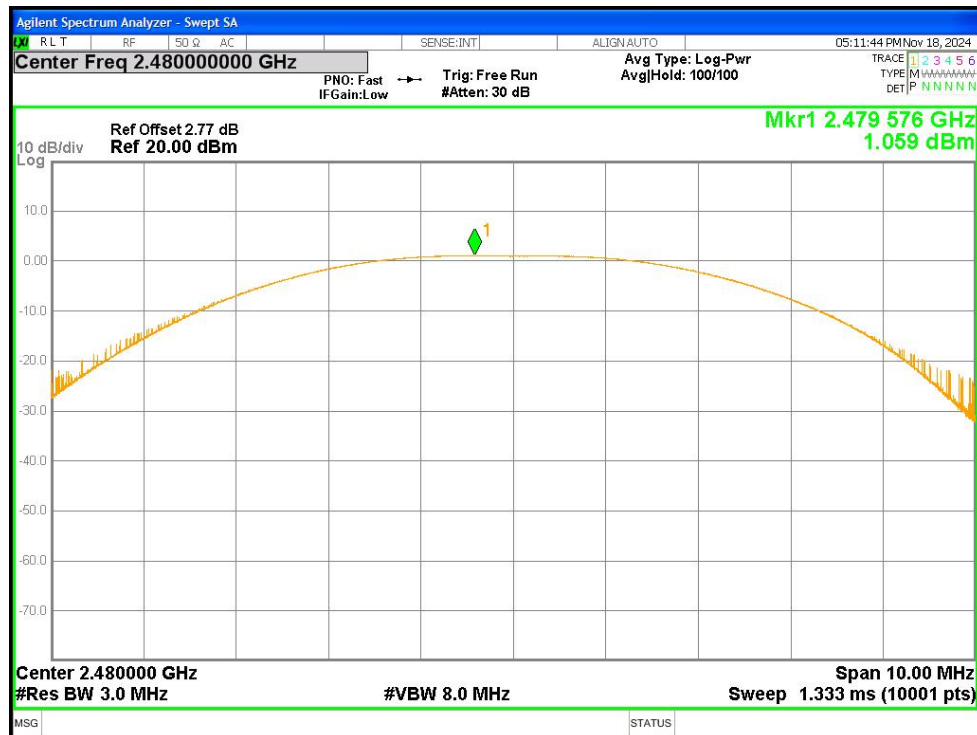


7.2 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.645	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.638	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.64	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.102	0.5	Pass
NVNT	BLE 2M	2442	Ant1	1.095	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.068	0.5	Pass


-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

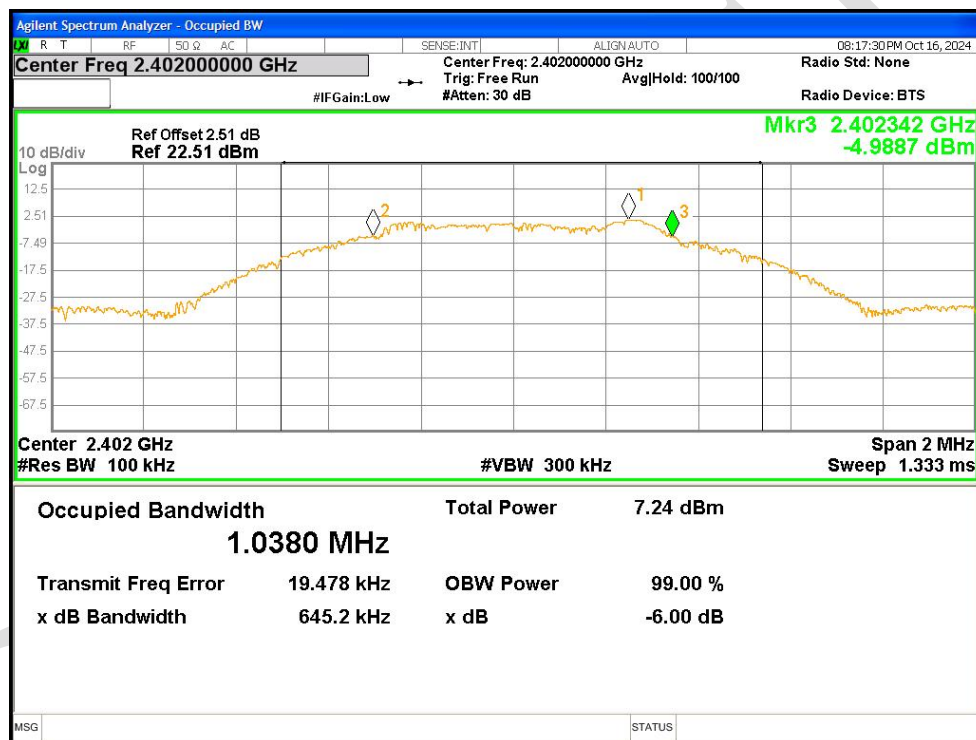


-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

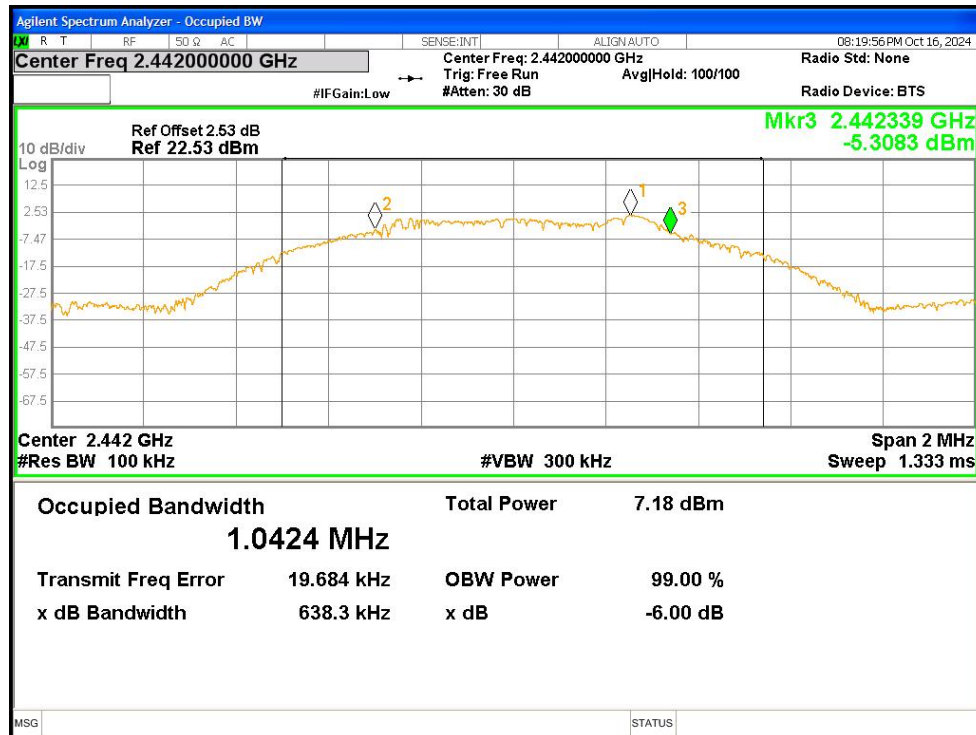

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

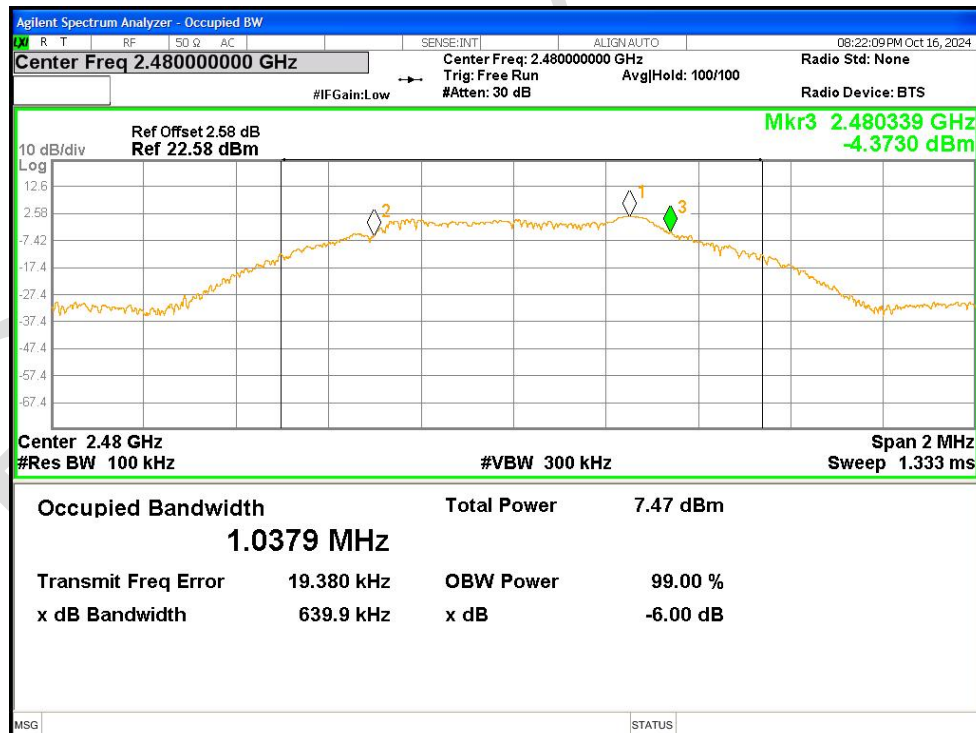


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

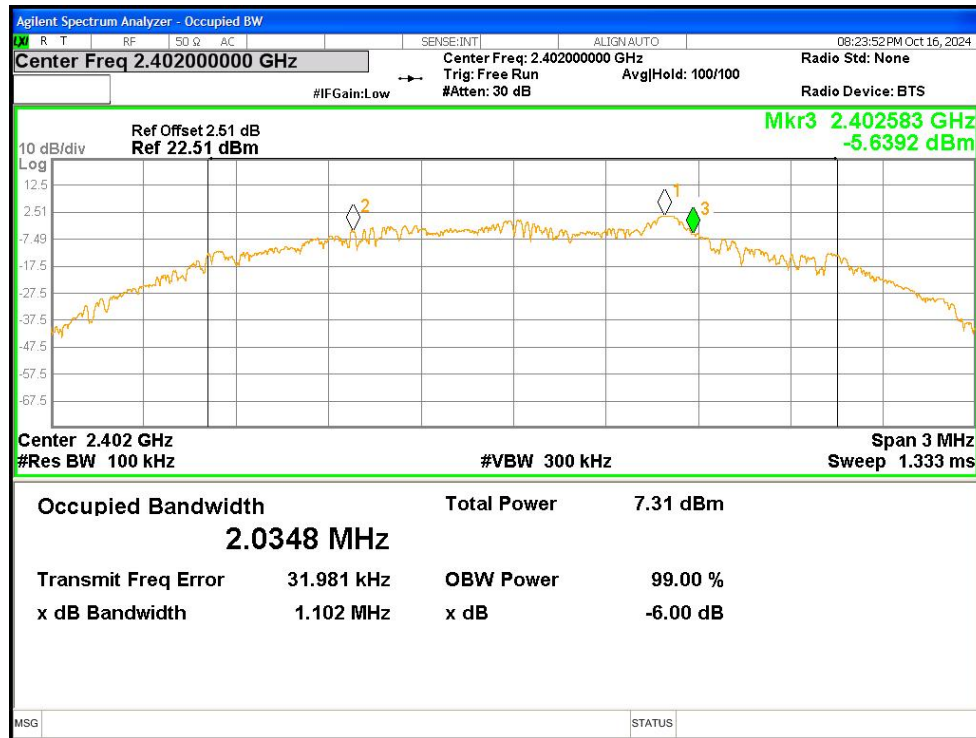

-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1




-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

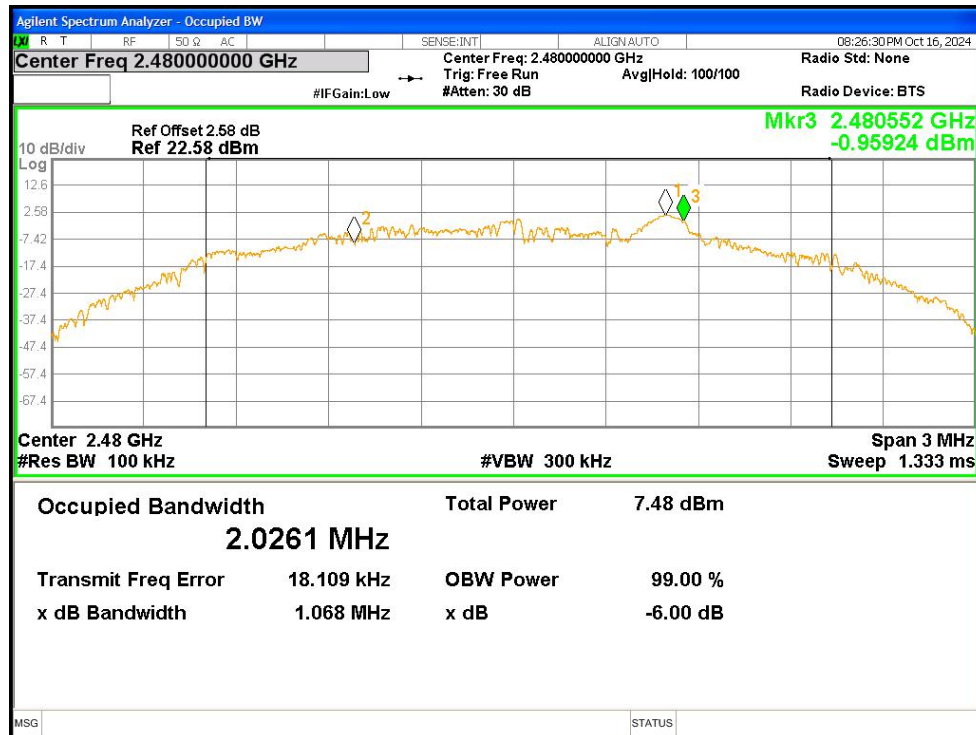


7.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.0106
NVNT	BLE 1M	2442	Ant1	1.0174
NVNT	BLE 1M	2480	Ant1	1.0069
NVNT	BLE 2M	2402	Ant1	2.0101
NVNT	BLE 2M	2442	Ant1	1.9941
NVNT	BLE 2M	2480	Ant1	2.0060


OBW NVNT BLE 1M 2402MHz Ant1

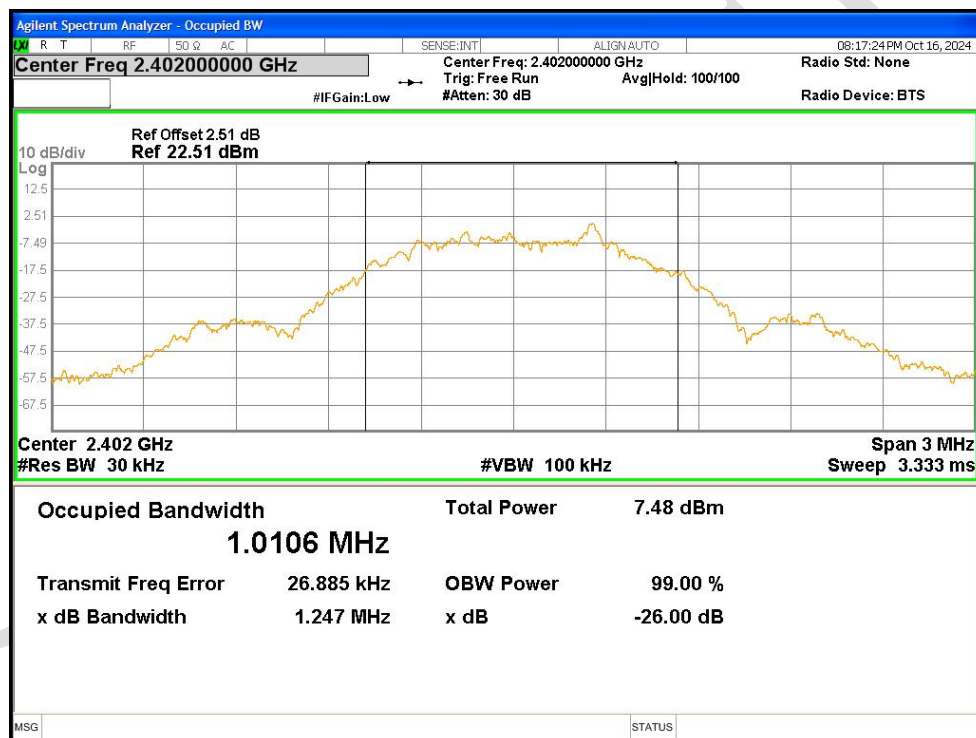


OBW NVNT BLE 1M 2442MHz Ant1

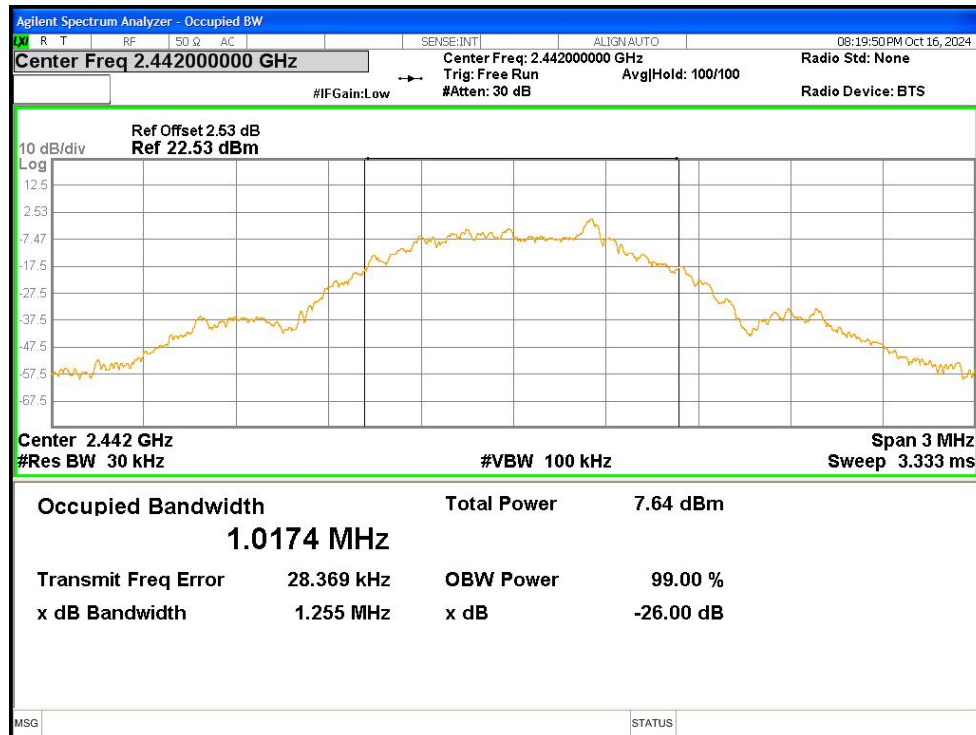


OBW NVNT BLE 1M 2480MHz Ant1

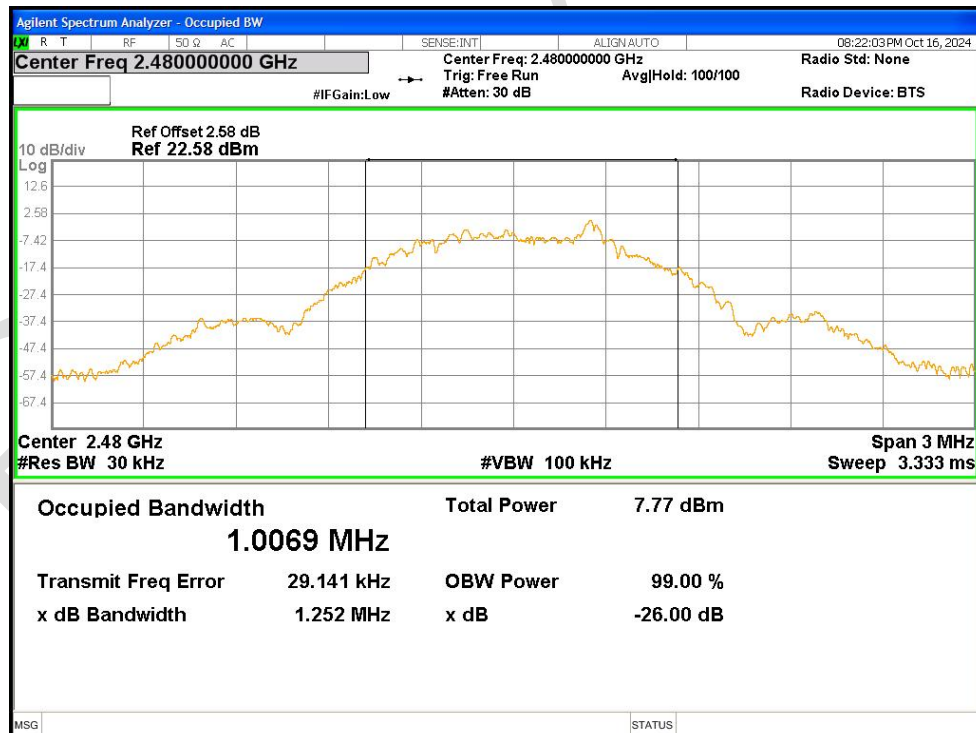


OBW NVNT BLE 2M 2402MHz Ant1

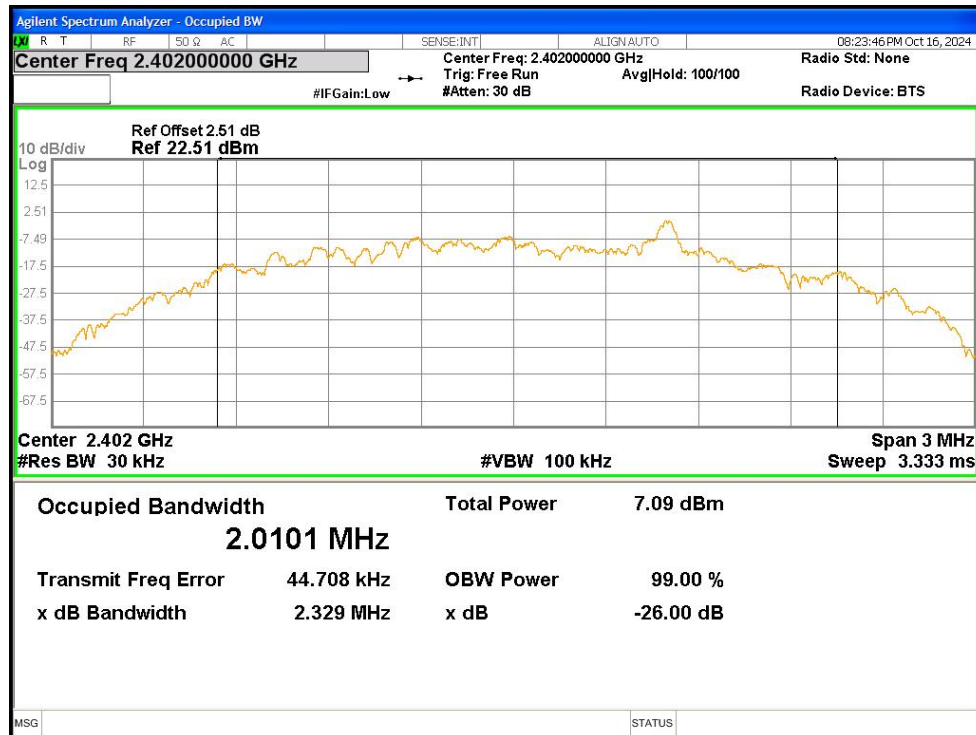

OBW NVNT BLE 2M 2442MHz Ant1

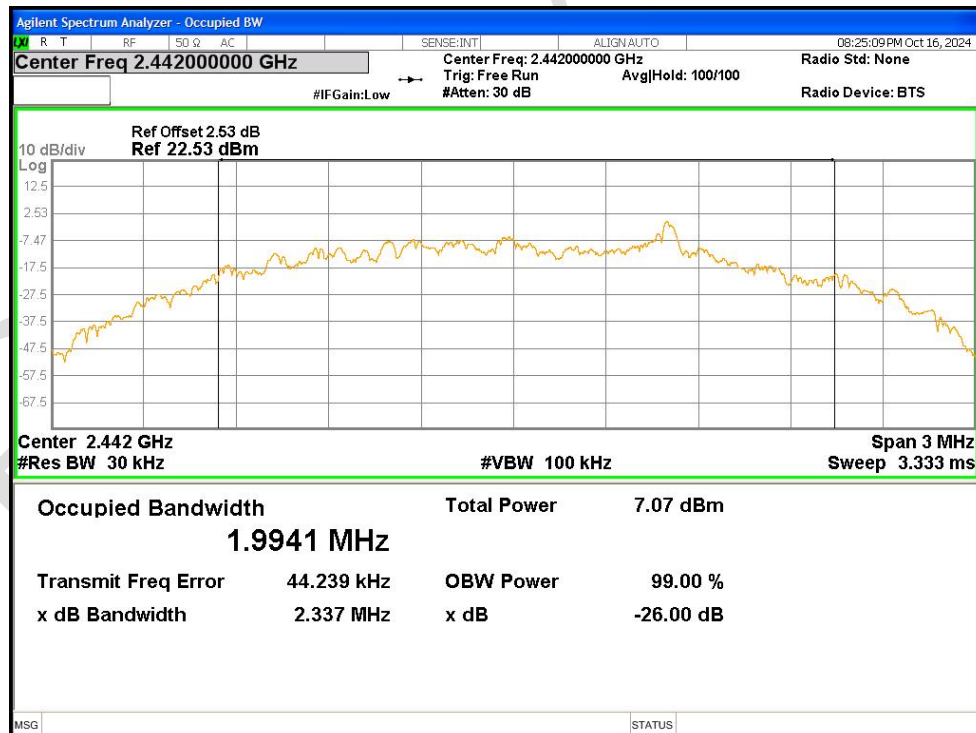


OBW NVNT BLE 2M 2480MHz Ant1

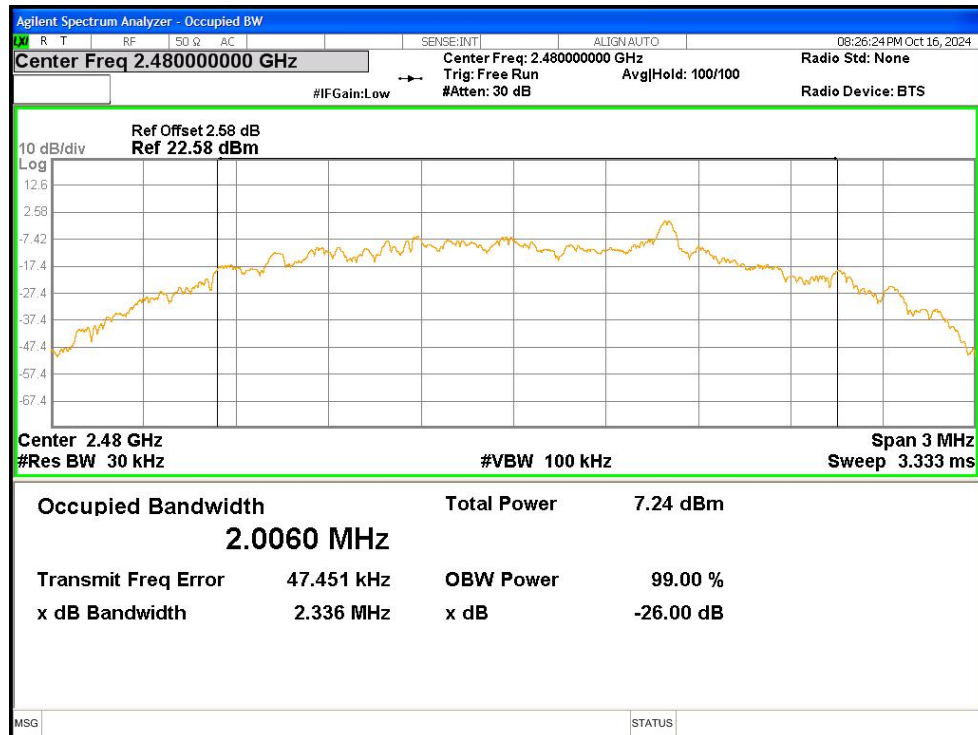


7.4 Power spectrum density

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-14.361	8	Pass
NVNT	BLE 1M	2442	Ant1	-14.283	8	Pass
NVNT	BLE 1M	2480	Ant1	-13.406	8	Pass
NVNT	BLE 2M	2402	Ant1	-15.243	8	Pass
NVNT	BLE 2M	2442	Ant1	-15.196	8	Pass
NVNT	BLE 2M	2480	Ant1	-15.141	8	Pass


PSD NVNT BLE 1M 2402MHz Ant1

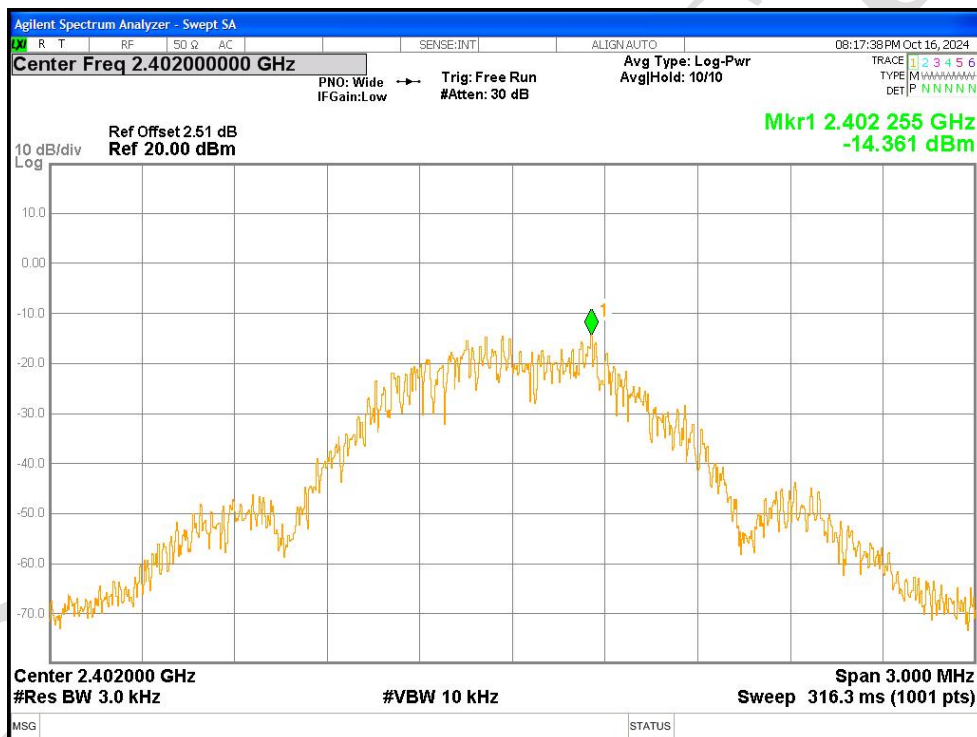



PSD NVNT BLE 1M 2442MHz Ant1

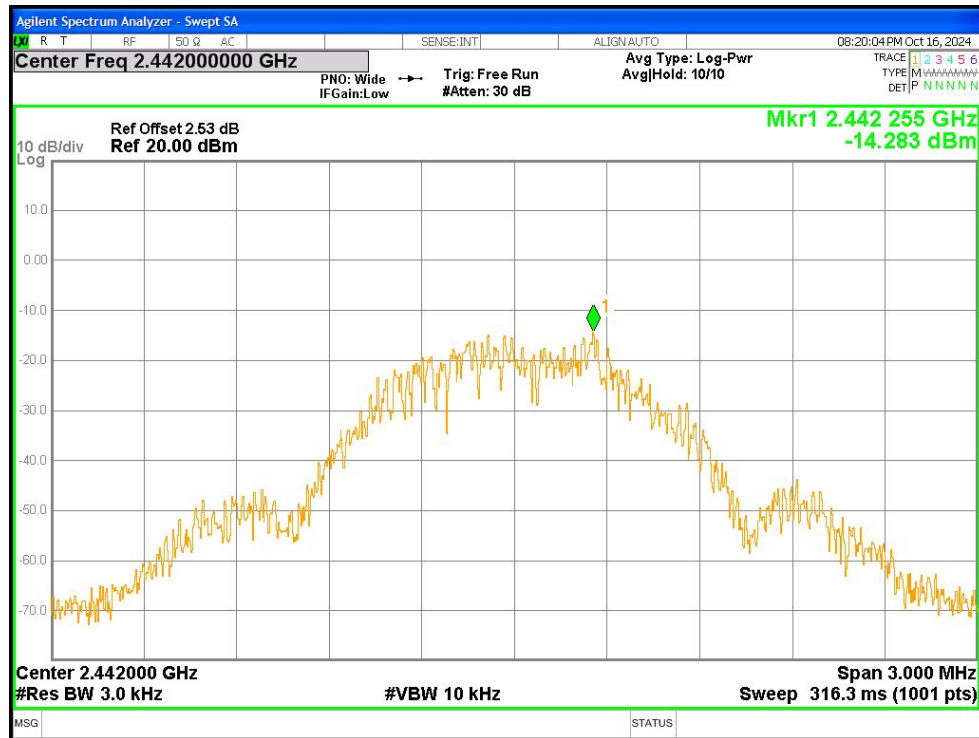


PSD NVNT BLE 1M 2480MHz Ant1

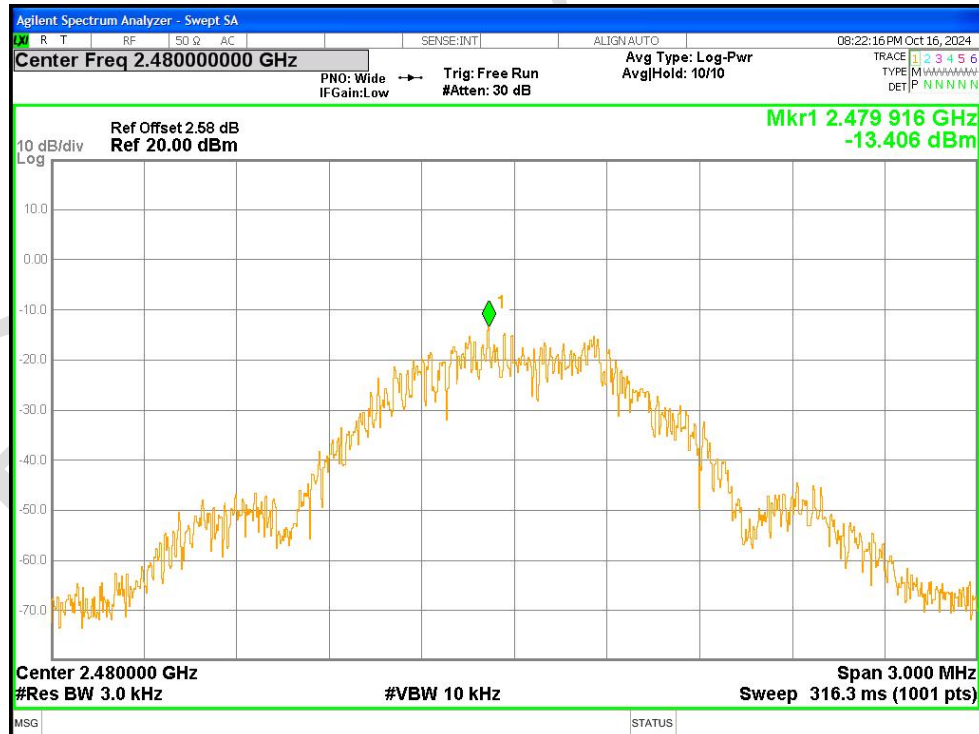

PSD NVNT BLE 2M 2402MHz Ant1

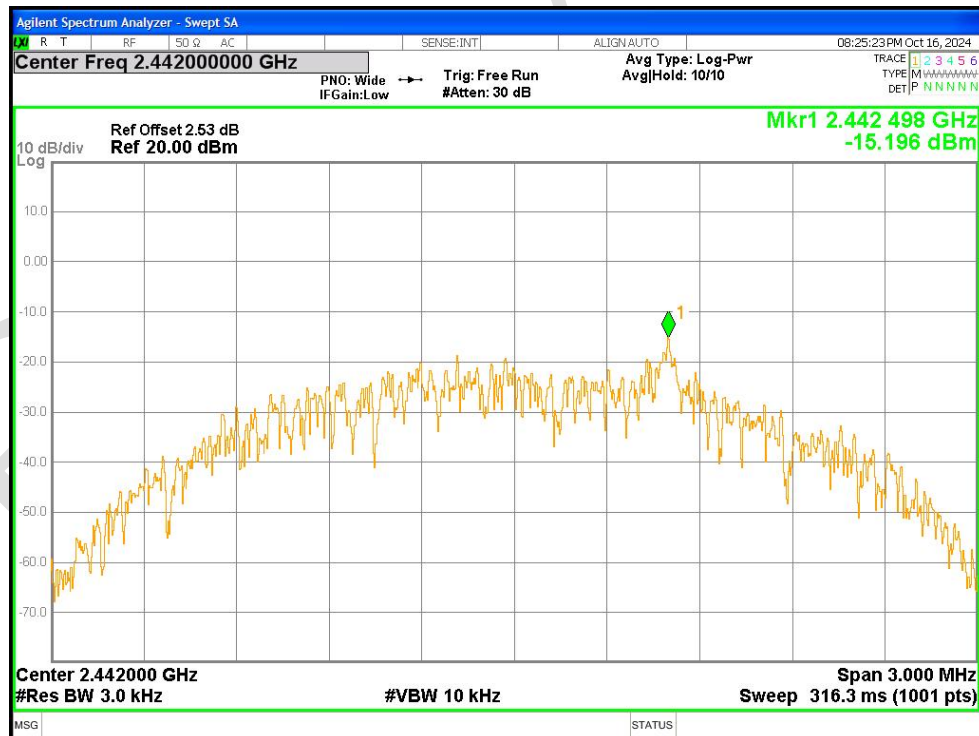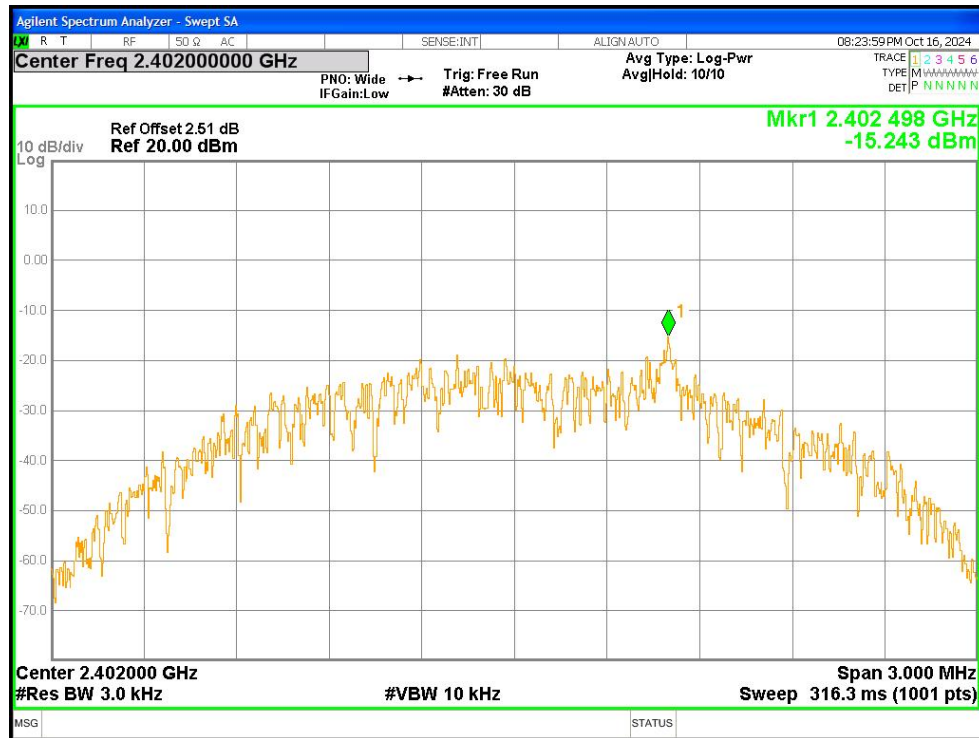

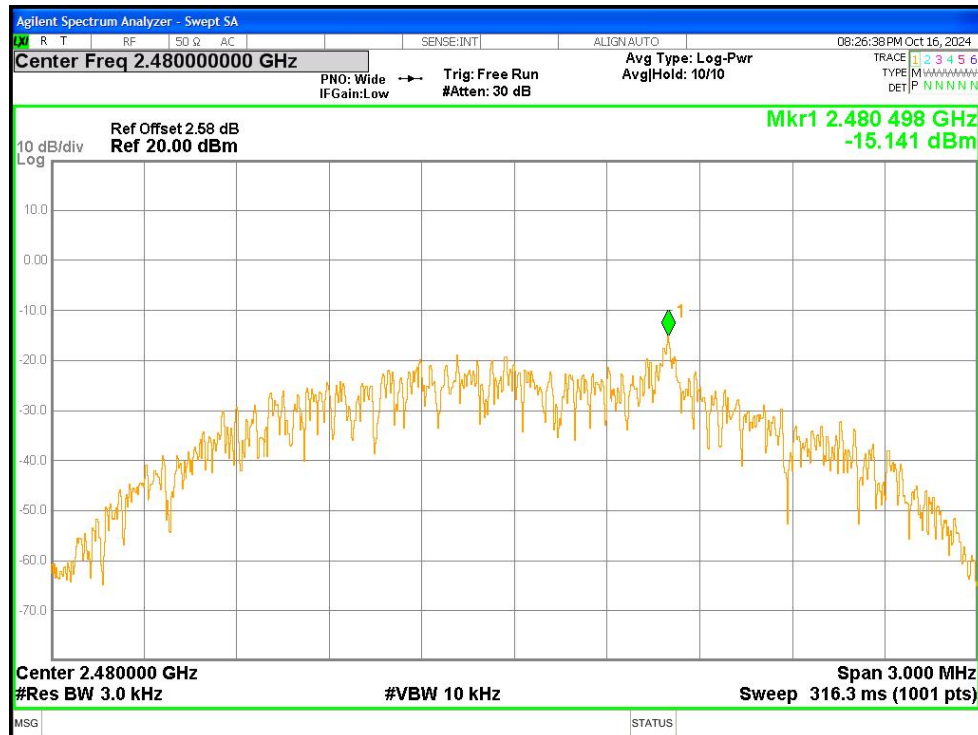


7.5 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.33	-20	Pass
NVNT	BLE 1M	2480	Ant1	-56.28	-20	Pass
NVNT	BLE 2M	2402	Ant1	-55.12	-20	Pass
NVNT	BLE 2M	2480	Ant1	-56.04	-20	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref




Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

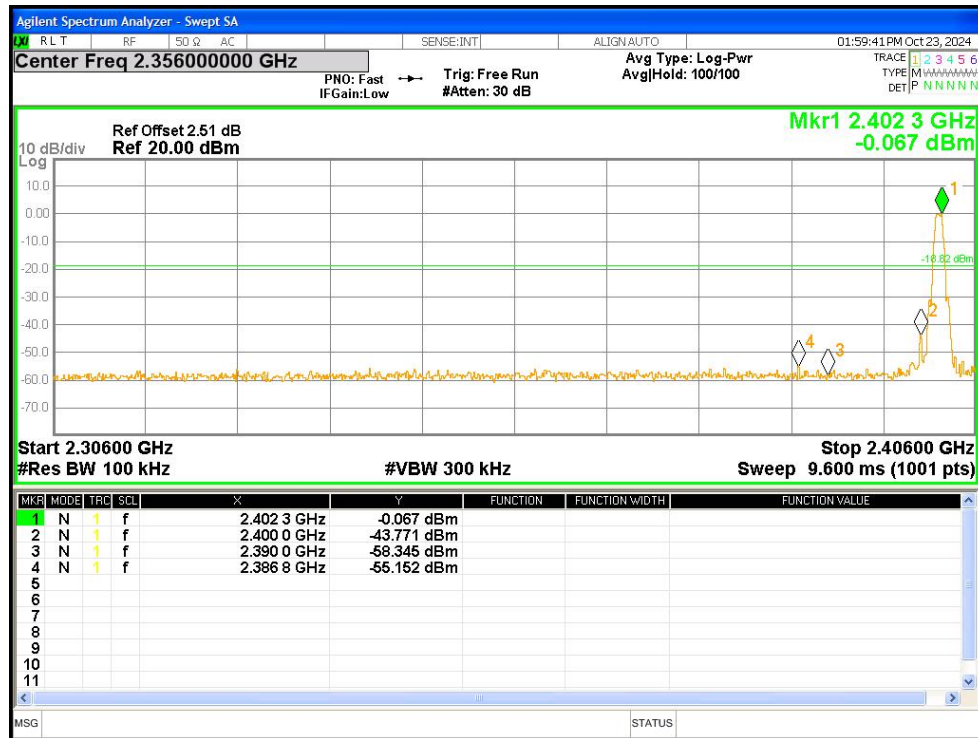

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref




Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

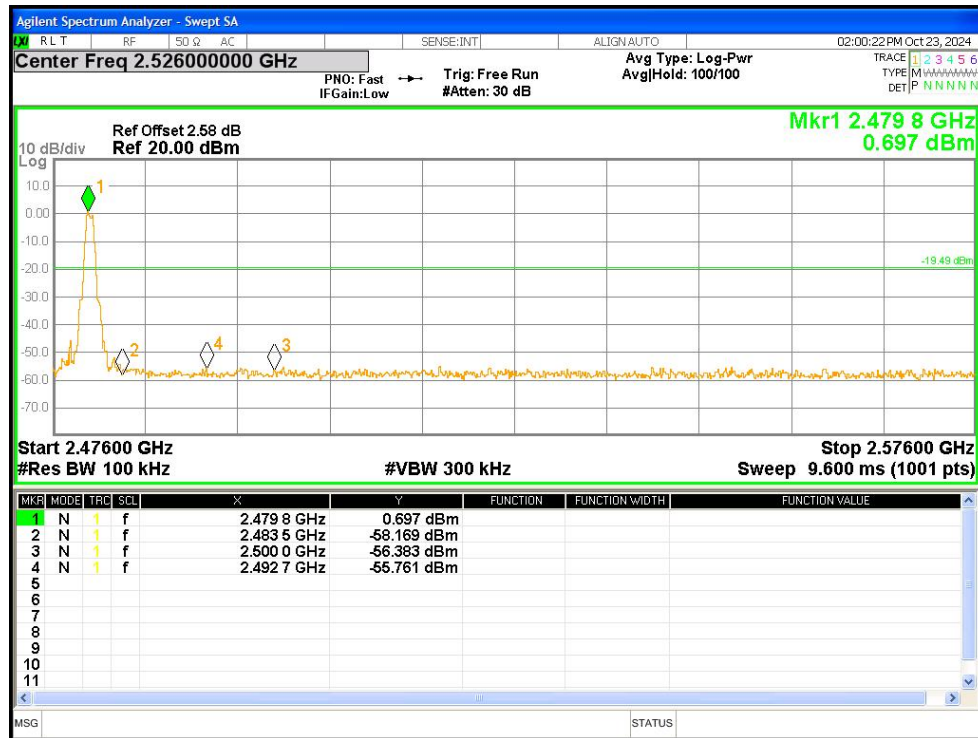


Band Edge NVNT BLE 2M 2402MHz Ant1 Ref




Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

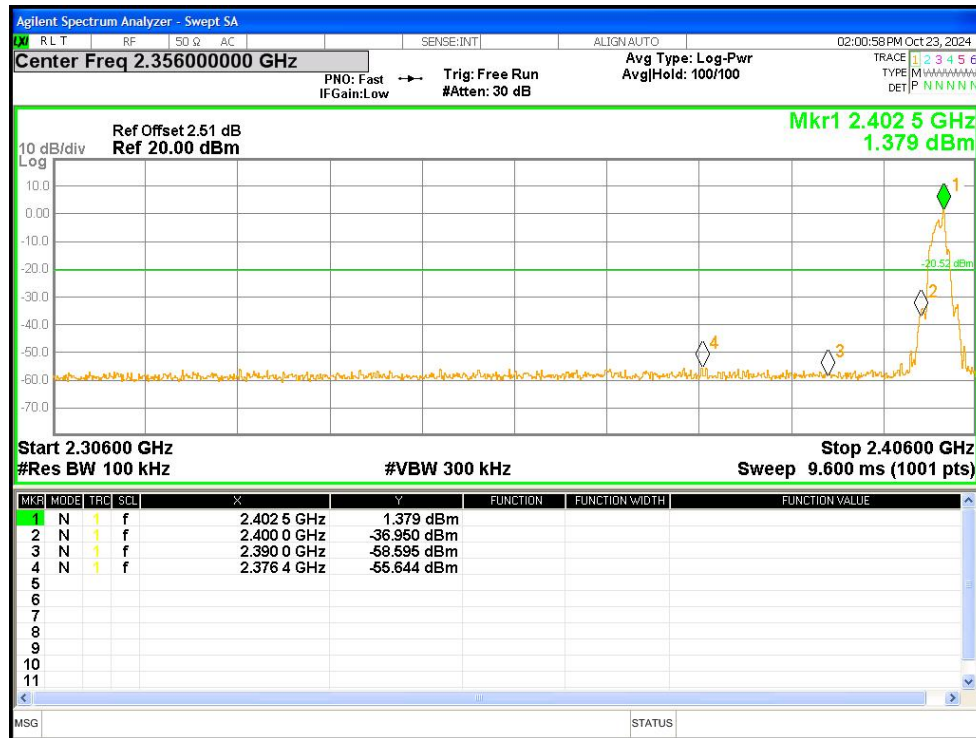

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

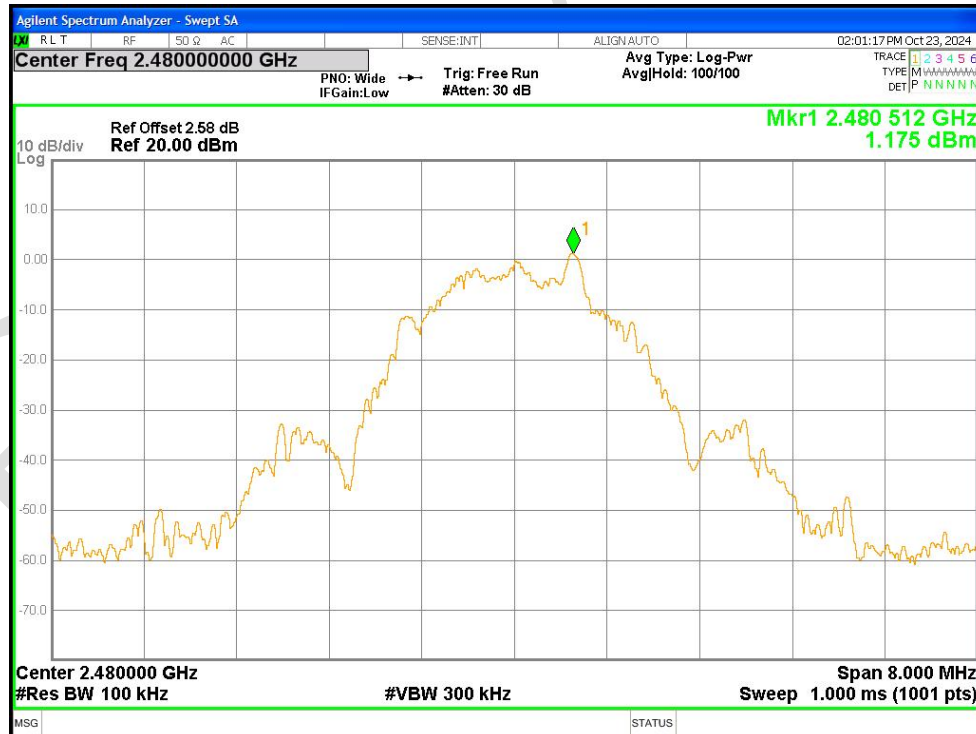

Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

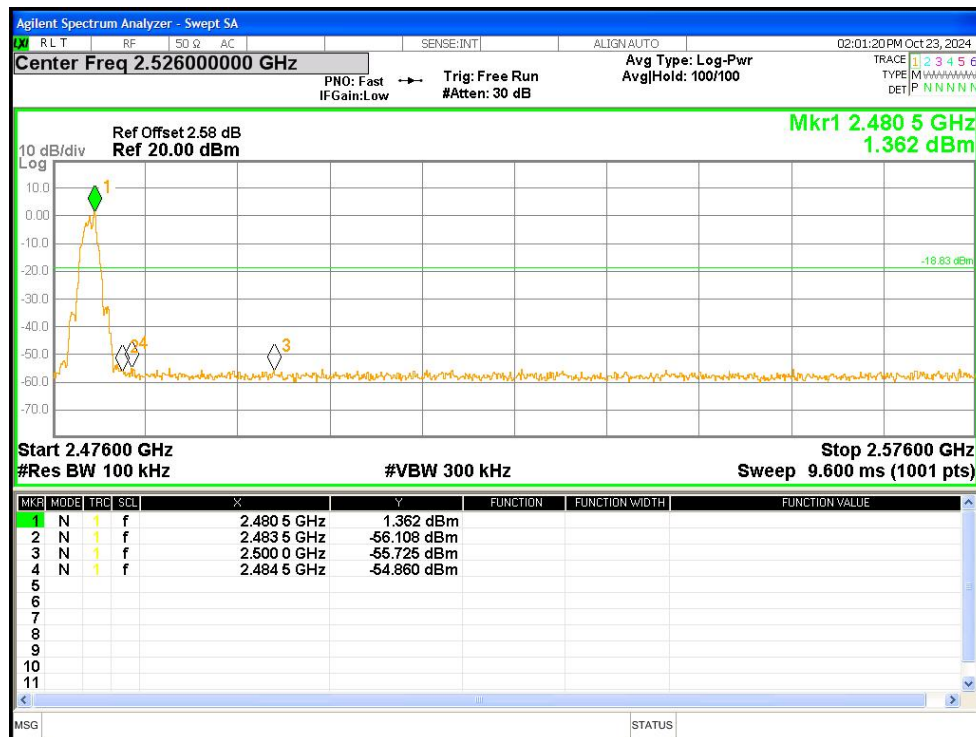


7.6 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-37.08	-20	Pass
NVNT	BLE 1M	2442	Ant1	-37.75	-20	Pass
NVNT	BLE 1M	2480	Ant1	-38.23	-20	Pass
NVNT	BLE 2M	2402	Ant1	-38.42	-20	Pass
NVNT	BLE 2M	2442	Ant1	-36.42	-20	Pass
NVNT	BLE 2M	2480	Ant1	-36.82	-20	Pass


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

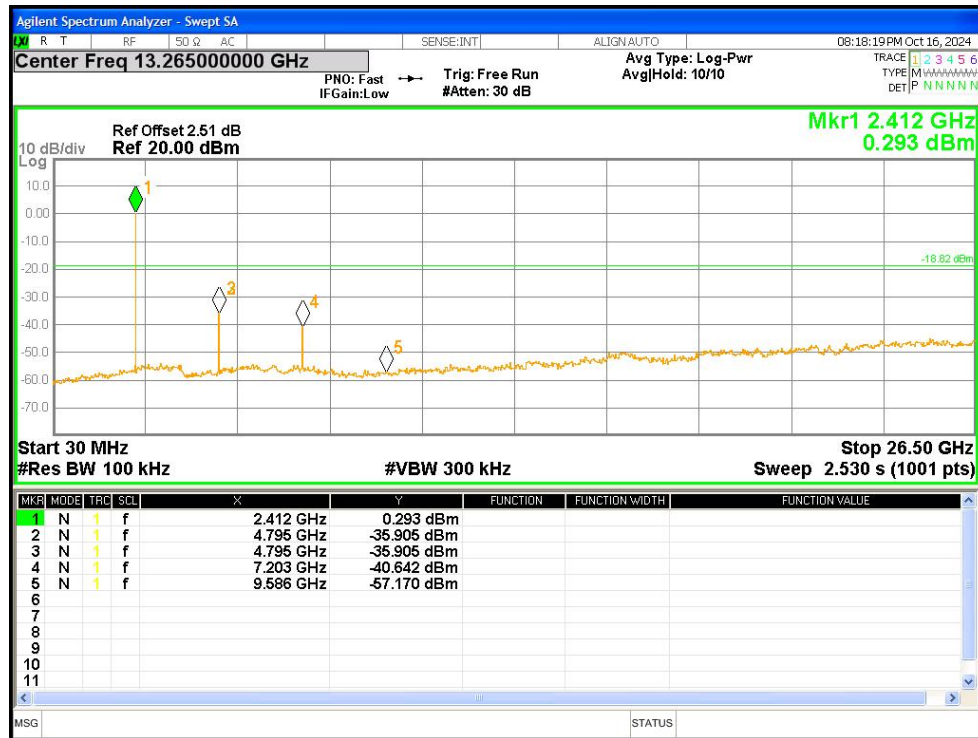


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

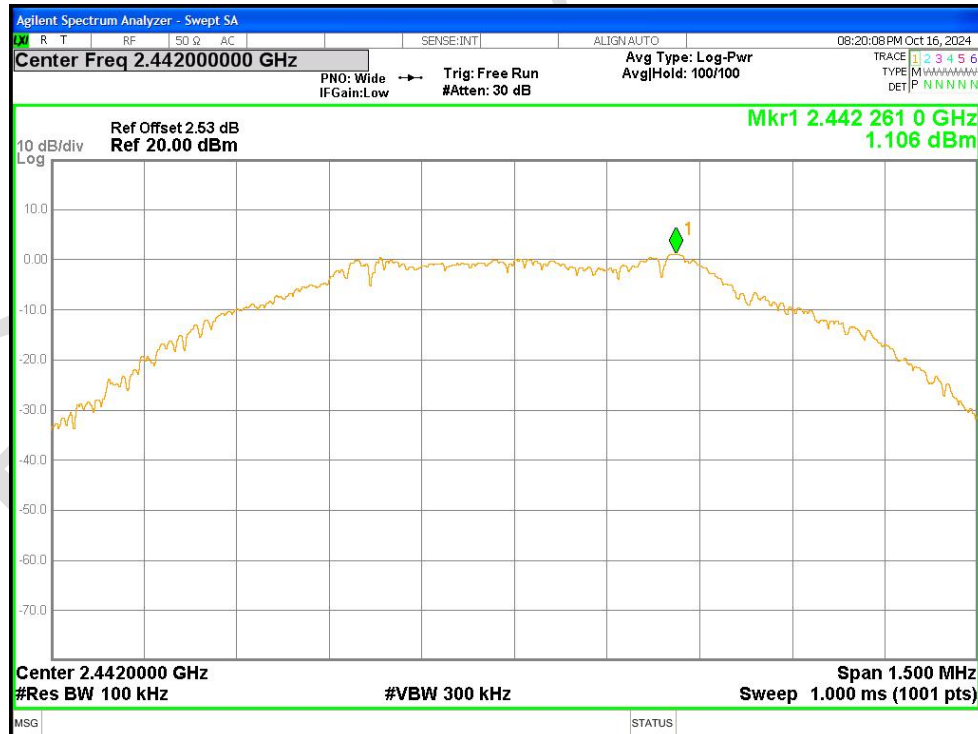

Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

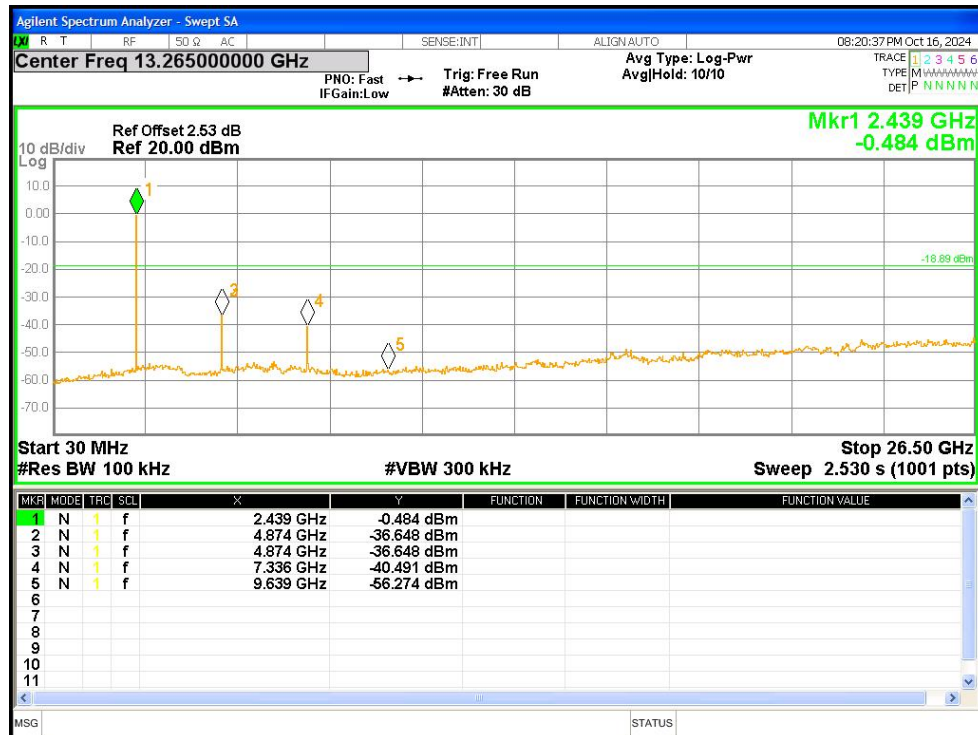

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

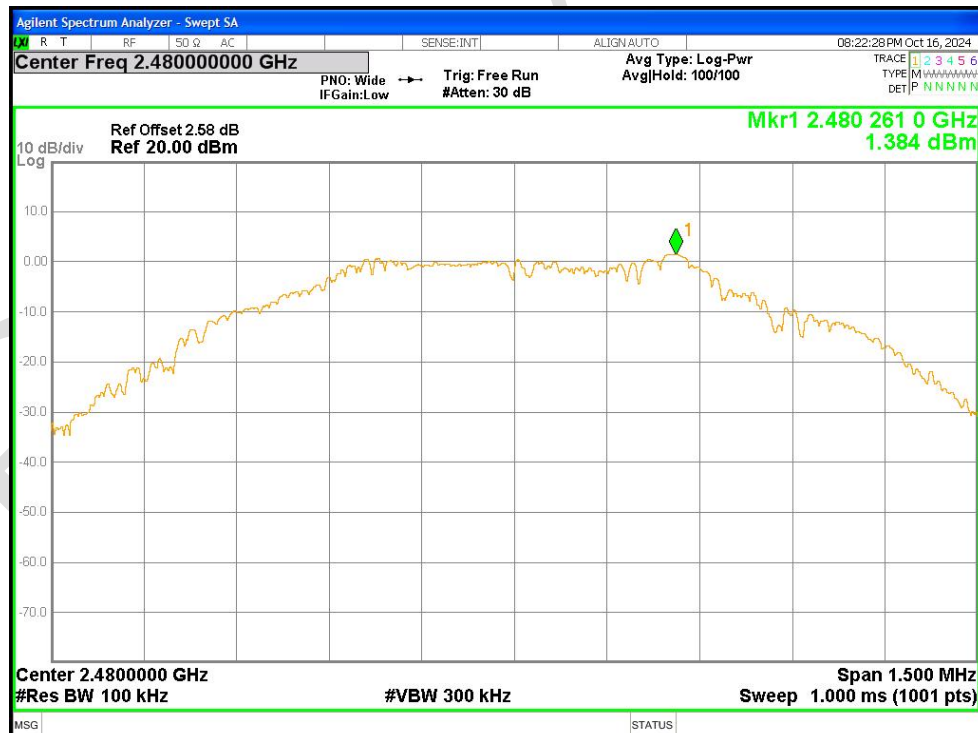

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission