

OTA TEST REPORT

Applicant Shenzhen General Test System Co., Ltd

Product RayZone1800

Issue Date May 16, 2025

Shenzhen Fu Bang Wireless Technology Co., Ltd. tested the above equipment in accordance with the requirements in **ANTI/IEEE Std 149-2008**. The test results show that the equipment tested is capable of demonstrating compliance with the Requirements as documented in this report.

Prepared by: Lunkang Yan

Approved by: QuanWang

Shenzhen Fu Bang Wireless Technology Co., Ltd.

Room 302, Lianjian Industry Part, Huarong road, Longhua District, Shenzhen, P.R. China

1. Test Laboratory

1.1 Notes of the Test report

This report shall not be reproduced in full or partial. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of applicable standards stated above.

1.2 Test facility

GTS1800 Microwave Anechoic Chamber : testing frequency ranges from 600MHz to 6GHz .

1.3 Testing Location

Company: Shenzhen Fu Bang Wireless Technology Co., Ltd

Address: Room 302, Lianjian Industry Part, Huarong road, Longhua District,
Shenzhen, P.R. China

Contact: Lunkang Yan

Telephone: 13760182610

E-mail: 646363118@qq.com

1.4 Laboratory Environment

Temperature	Min.= 19℃, Max.=25℃	
Relative humidity	Min.=40%, Max.=72%	
Shield effect	0.6-7GHz	>100dB
Ground resistance	<0.5Ω	

2. General Description of Equipment under Test

2.1 Applicant and Manufacturer information

Applicant Name	Shenzhen General Test System Co., Ltd
Applicant address	Building C-A7 Suite 805,2190 Liuxian Avenue,Nanshan District,Shenzhen,P.R. China
Manufacturer Name	Shenzhen General Test System Co., Ltd
Manufacturer address	Building C-A7 Suite 805,2190 Liuxian Avenue, Nanshan District, Shenzhen,P.R. China

2.2 General information

EUT Description	
Product Name	RayZone1800
Model	GTS-ANT D-H
HW Version	RayZone1800 V1.0
SW Version	MaxSign 100
Antenna Type	PCB Antenna
Antenna Manufacturer	Shenzhen General Test System Co., Ltd
Test Frequency	620MHz-5.8GHz

2.3 Applied Standards

According to the specifications of the manufacturer,it must comply with the requirements of the following standards:

Test Method:**ANSI/IEEE Std 149-2008**

3. Test Conditions

3.1 Test Configuration

The method is used to measure the antenna 3D GAIN of EUT in OTA qualified anechoic chamber. Equipment Under Test(EUT) geometry centre vertical projection at the centre of platform, the distance from EUT to measurement antenna is 1m.

3.2 Test Measurement

Spherical coordinate system


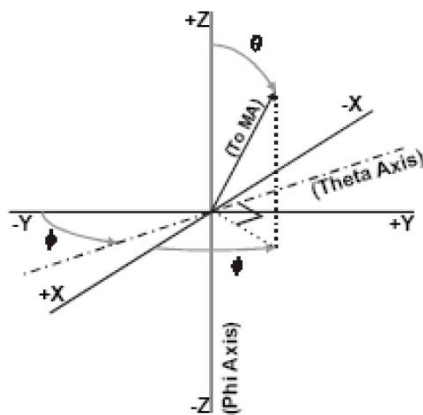


Figure 1 Test coordinate system

Note: Theta is from 0-180degree. Phi is from EUT and record the Date, the step of rotation is 15 degree.

Test Setup

RayZone1800 Test Setup

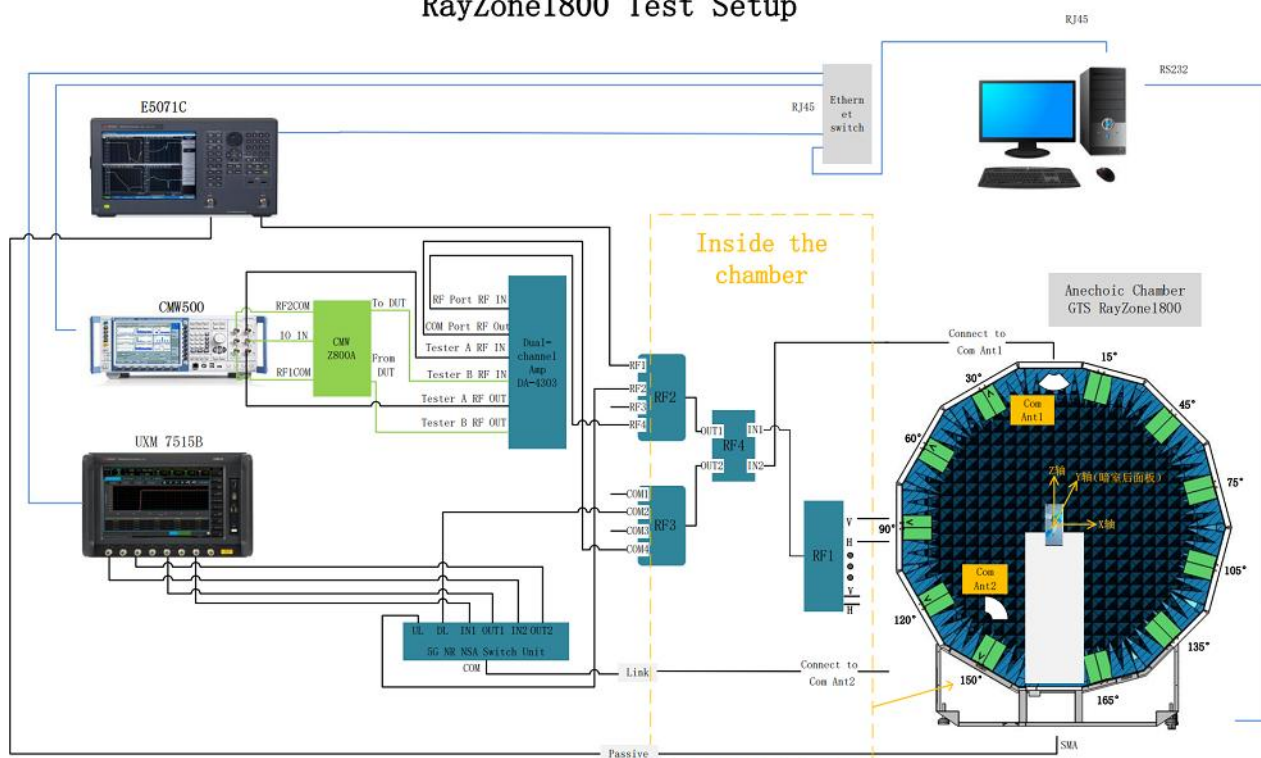

4. Test Results

4.1 Gain and Efficiency

Shenzhen Fu Bang Wireless Technology Co., Ltd.

This report shall not be reproduced except in full, without the written approval of Shenzhen FuBang Wireless Technology Co.,Ltd.
Page4

Model	Test State	Frequency (MHz)	Efficiency (%)	Gain (dBi)	Frequency (MHz)	Efficiency (%)	Gain (dBi)	Note
	Free Space	690	15.3	-4.3	1700	25.0	-1.2	
		700	16.4	-4.2	1720	26.6	-1.2	
		710	16.9	-4.1	1740	28.2	-1.0	
		720	17.3	-3.9	1760	29.6	-1.0	
		730	17.5	-3.9	1780	30.1	-1.0	
		740	17.5	-3.8	1800	33.8	-0.9	
		750	17.3	-3.9	1820	28.0	-1.0	
		760	16.6	-4.0	1840	28.9	-1.0	
		770	16.5	-4.1	1860	28.8	-1.2	
		780	15.6	-4.3	1880	29.4	-1.5	
		790	15.4	-4.4	1900	31.6	-1.3	
		800	14.6	-4.6	1920	33.4	-1.0	
		810	16.4	-4.0	1940	33.5	-1.3	
		820	17.4	-3.9	1960	34.1	-1.5	
		830	18.5	-3.5	1980	34.4	-1.6	
		840	19.6	-3.3	2000	34.7	-1.3	
		850	22.5	-2.8	2020	34.1	-1.4	
		860	21.5	-3.0	2040	33.5	-1.4	
		870	19.9	-3.2	2060	32.3	-1.4	
		880	18.4	-3.5	2080	30.2	-1.9	
		890	18.2	-3.6	2100	28.3	-2.2	
		900	17.1	-4.1	2120	27.9	-2.2	
		910	22.1	-2.8	2140	27.1	-2.2	
		920	23.7	-2.6	2160	25.1	-2.6	
		930	24.7	-2.4	2180	23.7	-2.7	
		940	24.5	-2.4	2200	24.8	-2.3	
		950	22.0	-2.8	2500	25.1	-2.4	
		960	21.6	-3.0	2520	24.7	-2.5	
					2540	25.1	-2.4	
					2560	25.7	-2.3	
					2580	25.1	-2.3	
					2600	24.6	-2.1	
					2620	25.4	-1.5	
					2640	26.4	-1.5	
					2660	26.1	-1.5	
					2680	26.3	-1.3	
					2700	26.6	-0.8	

Model	Test State	Frequency (MHz)	Efficiency (%)	Gain (dBi)	Frequency (MHz)	Efficiency (%)	Gain (dBi)	Note
	Free Space	1550	35.2	-1.3	5640	47.0	2.0	
		1560	36.1	-1.2	5680	43.9	1.7	
		1570	36.3	-1.1	5720	47.8	2.1	
		1580	36.5	-1.0	5760	45.8	1.8	
		1590	35.2	-1.3	5800	47.1	1.7	
		1600	33.2	-1.4				
		2400	32.9	-1.6				
		2410	34.2	-1.4				
		2420	33.6	-1.5				
		2430	34.5	-1.4				
		2440	34.5	-1.4				
		2450	33.2	-1.5				
		2460	32.5	-1.6				
		2470	32.2	-1.6				
		2480	32.1	-1.7				
		2490	31.7	-1.8				
		2500	32.8	-1.6				
		5100	34.7	0.4				
		5140	35.7	0.6				
		5180	35.5	0.6				
		5220	38.3	0.9				
		5260	38.7	1.0				
		5300	38.6	1.0				
		5340	44.1	1.6				
		5400	39.7	1.2				
		5440	44.5	1.7				
		5600	44.8	1.8				





5. Equipment List


Type of Equipment	Manufacture	Model Number
Network Analyzer	Key sight	E5071C
Switch control System	GTS	RayZone1800
Software	GTS	MaxSign 100Patten Measurement software

ANNEX A 3-D Patten Plots


Shenzhen Fu Bang Wireless Technology Co., Ltd.

This report shall not be reproduced except in full, without the written approval of Shenzhen FuBang Wireless Technology Co.,Ltd.

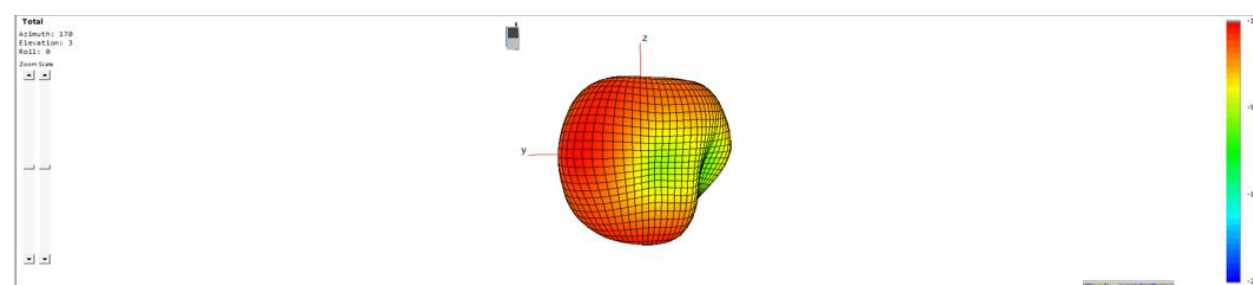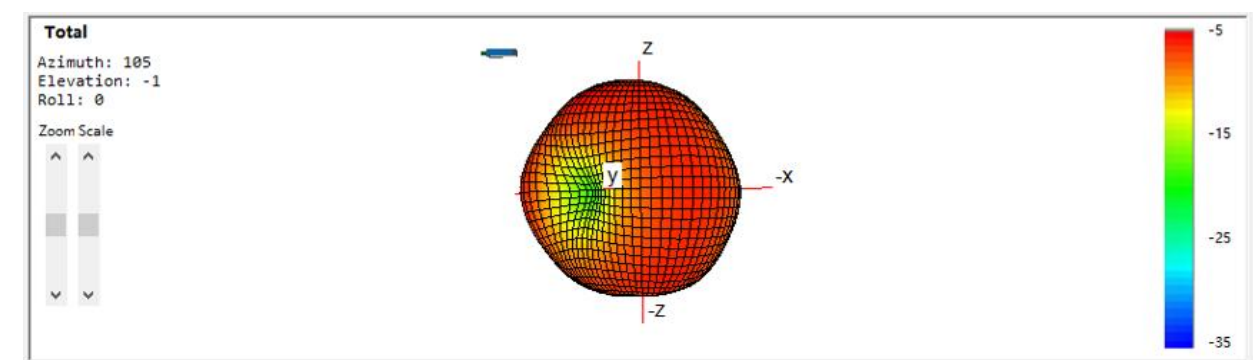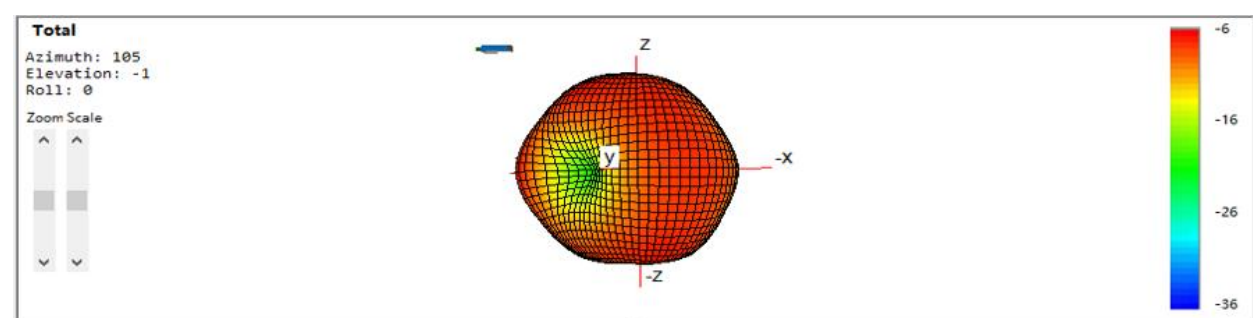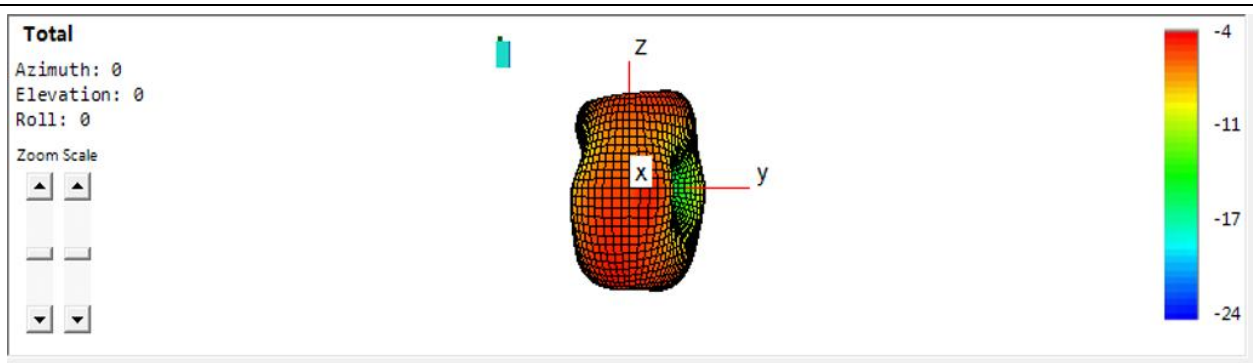


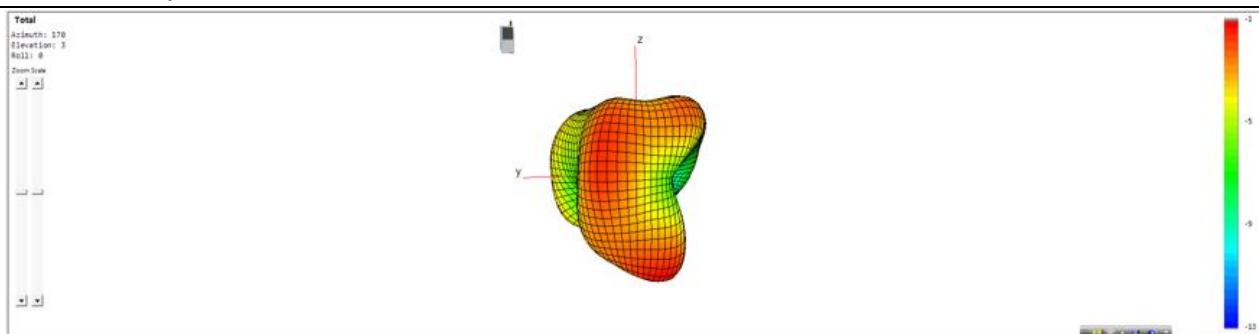


1900MHz

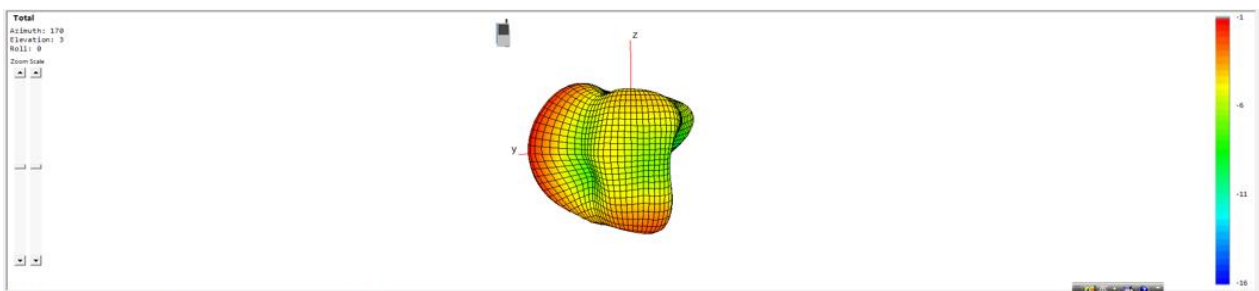


2100MHz

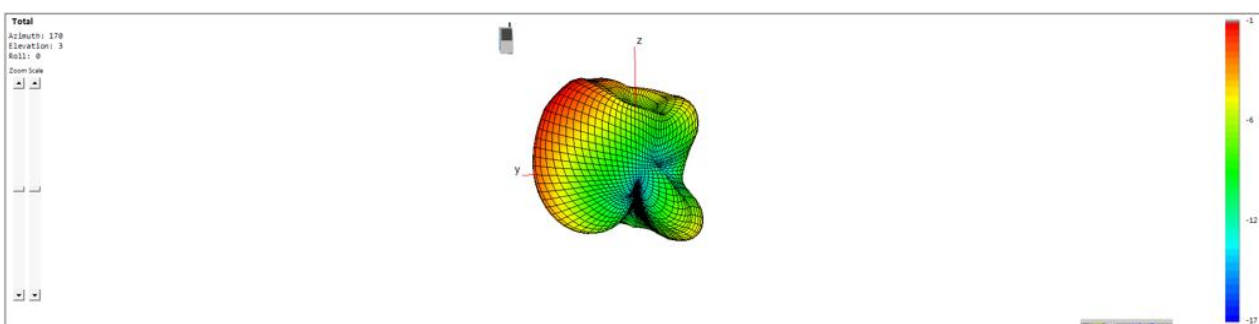


2700MHz

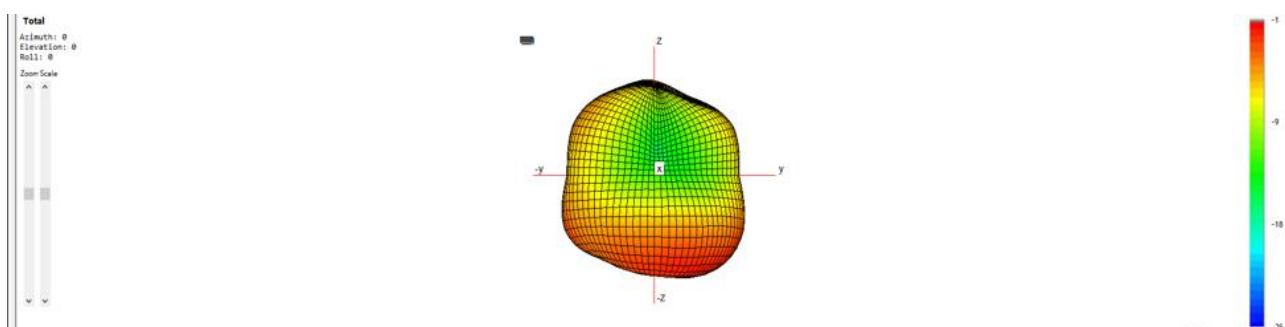

1575MHz

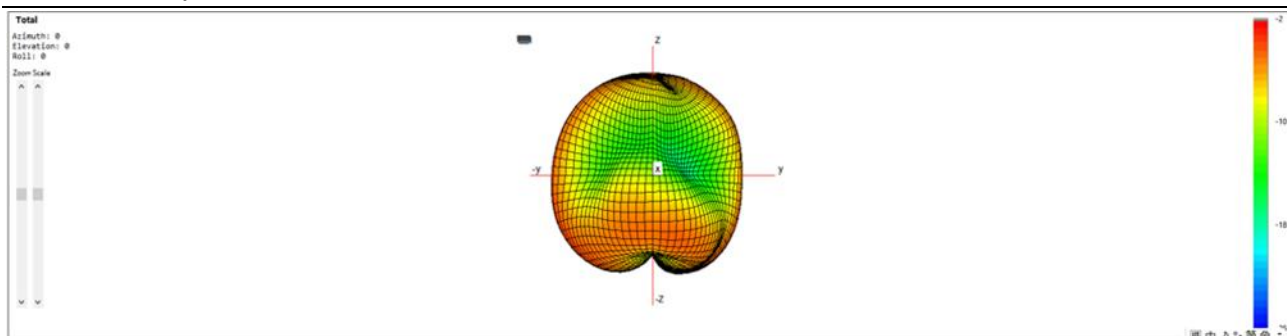



2400MHz

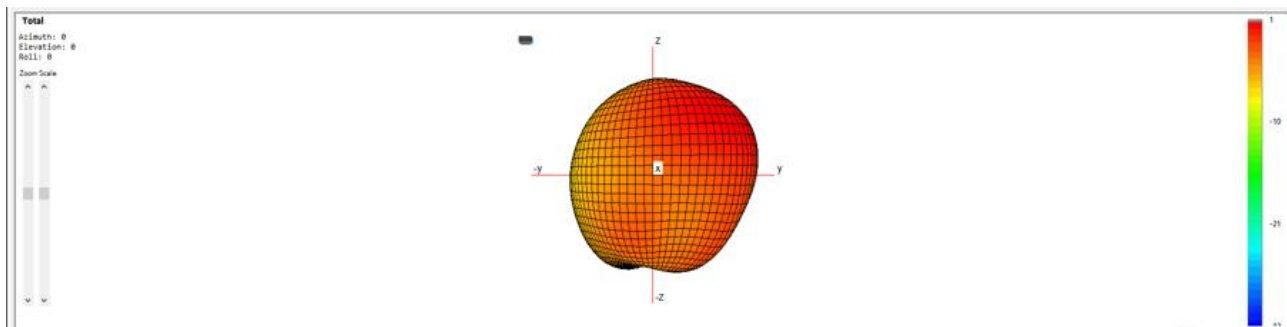

5100MHz

ANNEX B: The EUT Appearance and Test Configuration

B.1 EUT Appearance

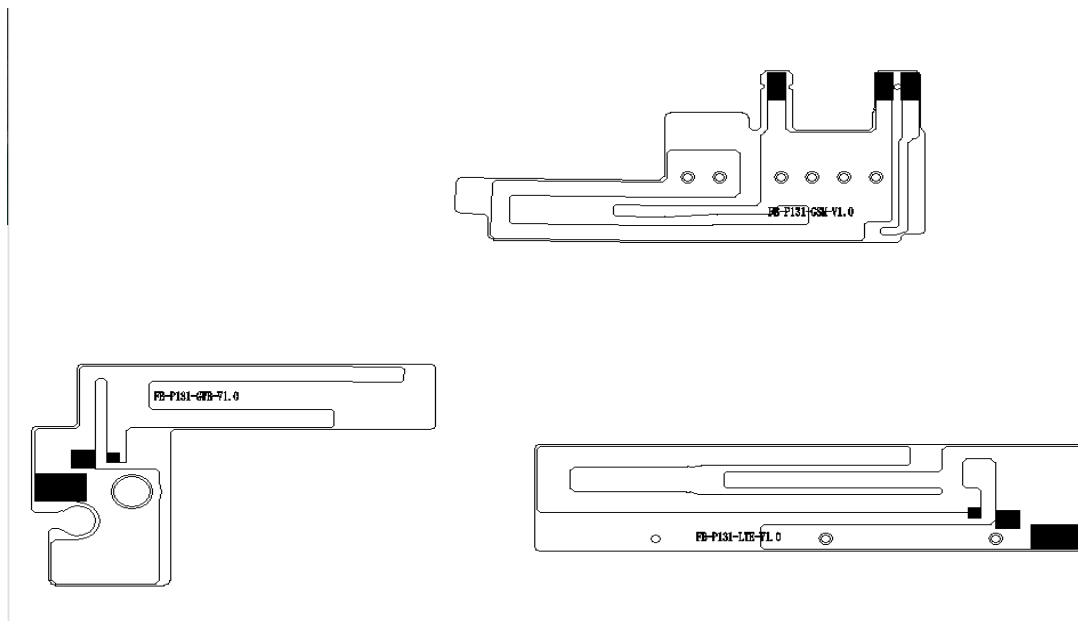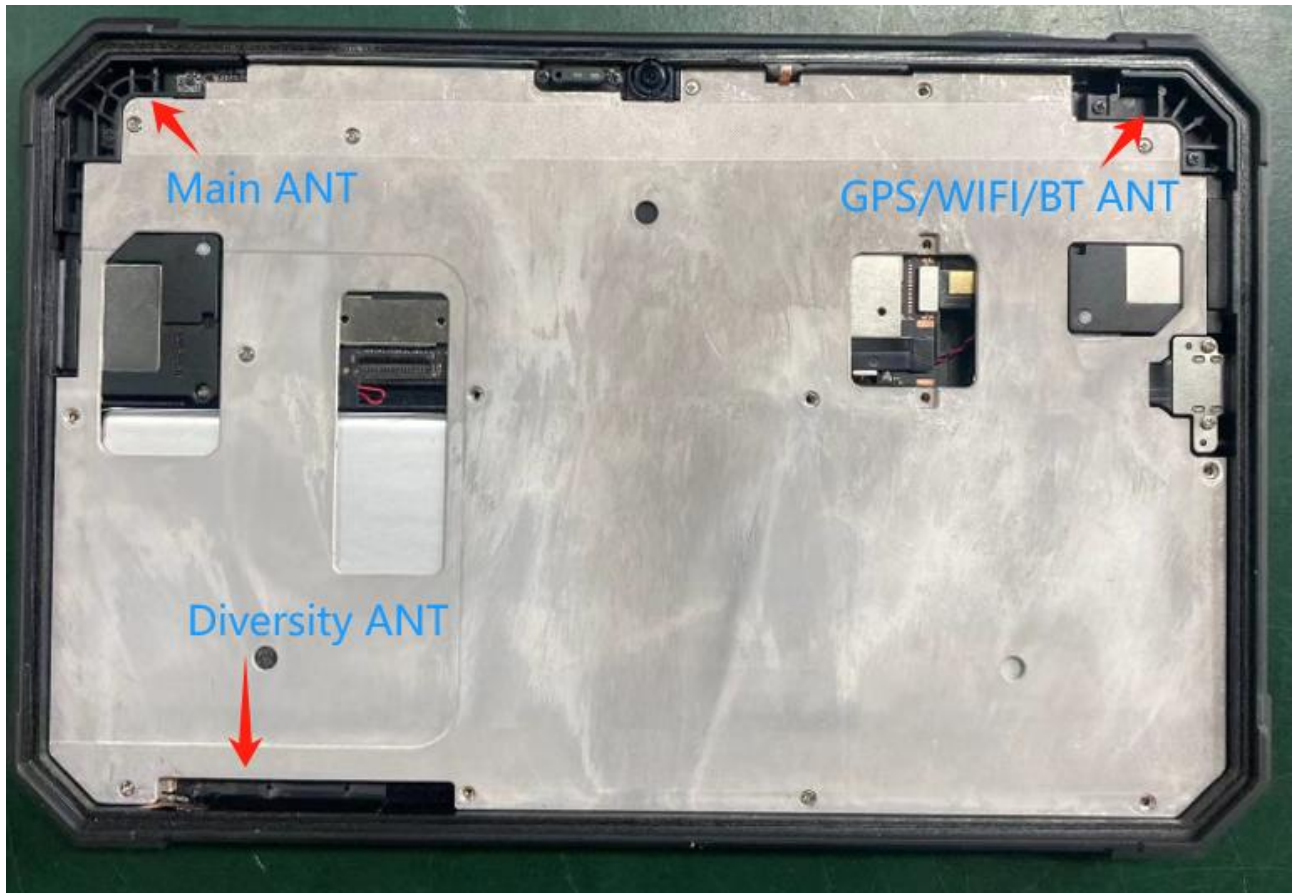

B.2 Test Configuration

