




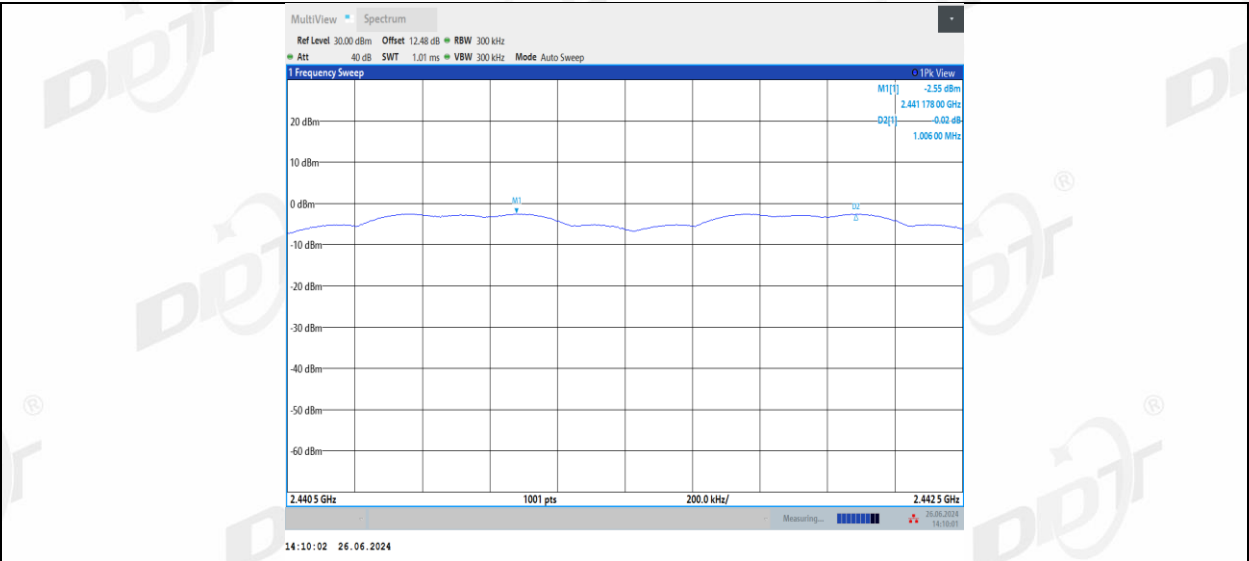

3DH5_Right side_Hop

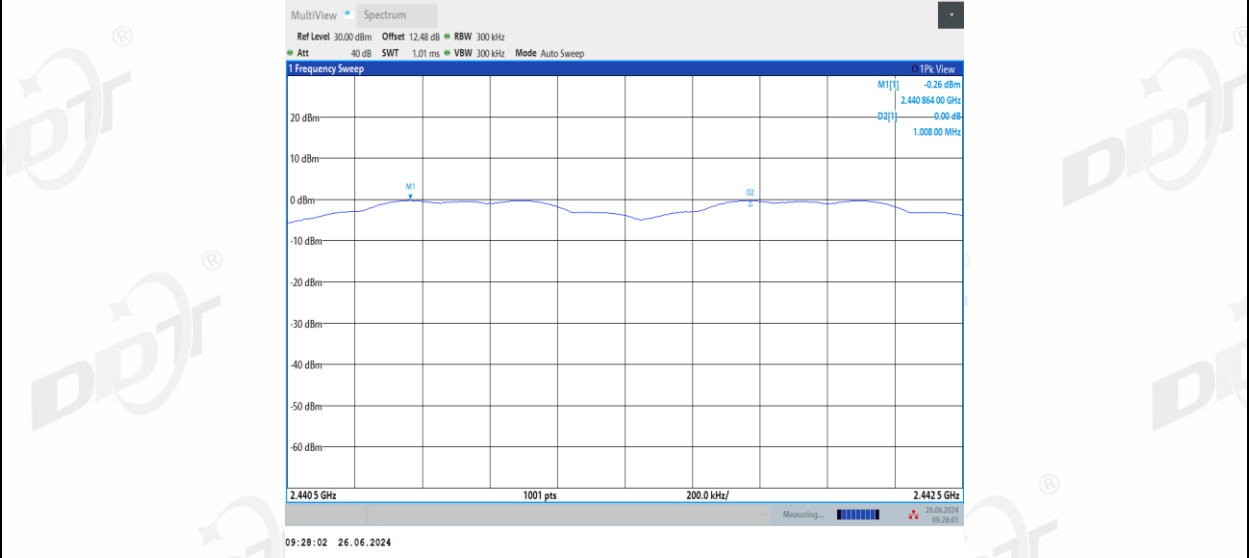


3DH5_Left side_Hop

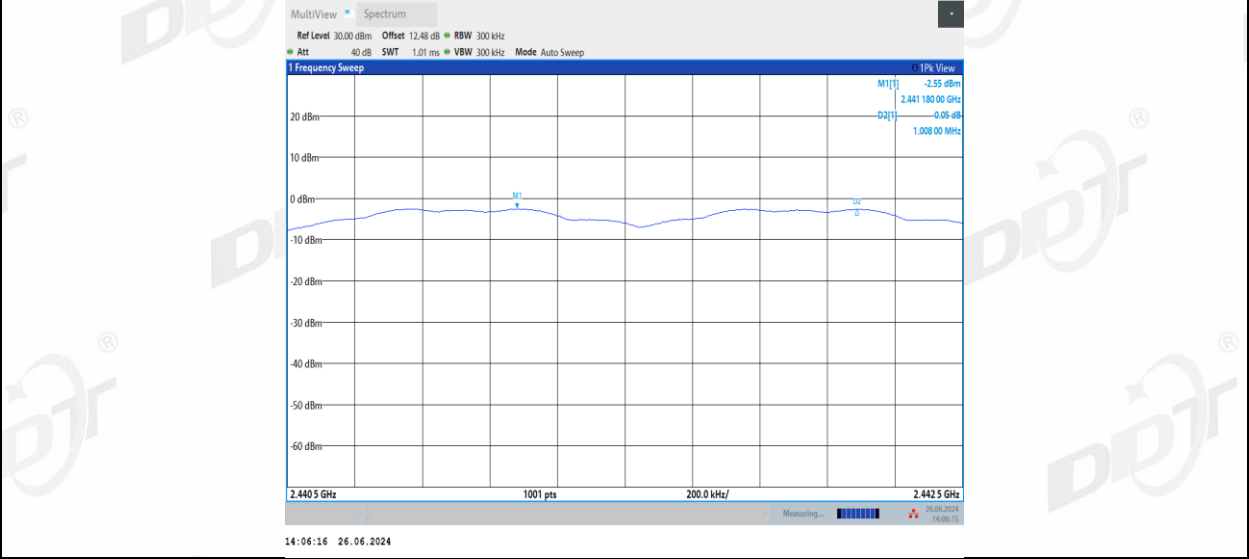

8. Dwell Time

8.1. Block diagram of test setup

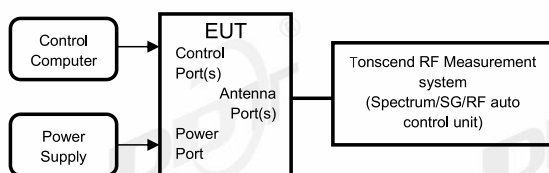

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	$\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.


8.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.6-26.1℃,41.8-45.3%RH	Test Date:	2024.06.25-2024.06.26
Test Power Supply:	Battery	Sample Number:	S24053007-001



Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Right side	Hop	0.370	193	0.071	≤0.4	PASS
	Left side	Hop	0.370	188	0.07	≤0.4	PASS
DH3	Right side	Hop	1.630	108	0.176	≤0.4	PASS
	Left side	Hop	1.630	108	0.176	≤0.4	PASS
DH5	Right side	Hop	2.870	75	0.215	≤0.4	PASS
	Left side	Hop	2.880	75	0.216	≤0.4	PASS
2DH1	Right side	Hop	0.370	186	0.069	≤0.4	PASS
	Left side	Hop	0.370	228	0.084	≤0.4	PASS
2DH3	Right side	Hop	1.620	106	0.172	≤0.4	PASS
	Left side	Hop	1.620	109	0.177	≤0.4	PASS
2DH5	Right side	Hop	2.880	76	0.219	≤0.4	PASS
	Left side	Hop	2.870	75	0.215	≤0.4	PASS
3DH1	Right side	Hop	0.370	187	0.069	≤0.4	PASS
	Left side	Hop	0.370	220	0.081	≤0.4	PASS
3DH3	Right side	Hop	1.620	107	0.173	≤0.4	PASS
	Left side	Hop	1.620	109	0.177	≤0.4	PASS
3DH5	Right side	Hop	2.880	78	0.225	≤0.4	PASS
	Left side	Hop	2.870	82	0.235	≤0.4	PASS

8.5. Test graphs

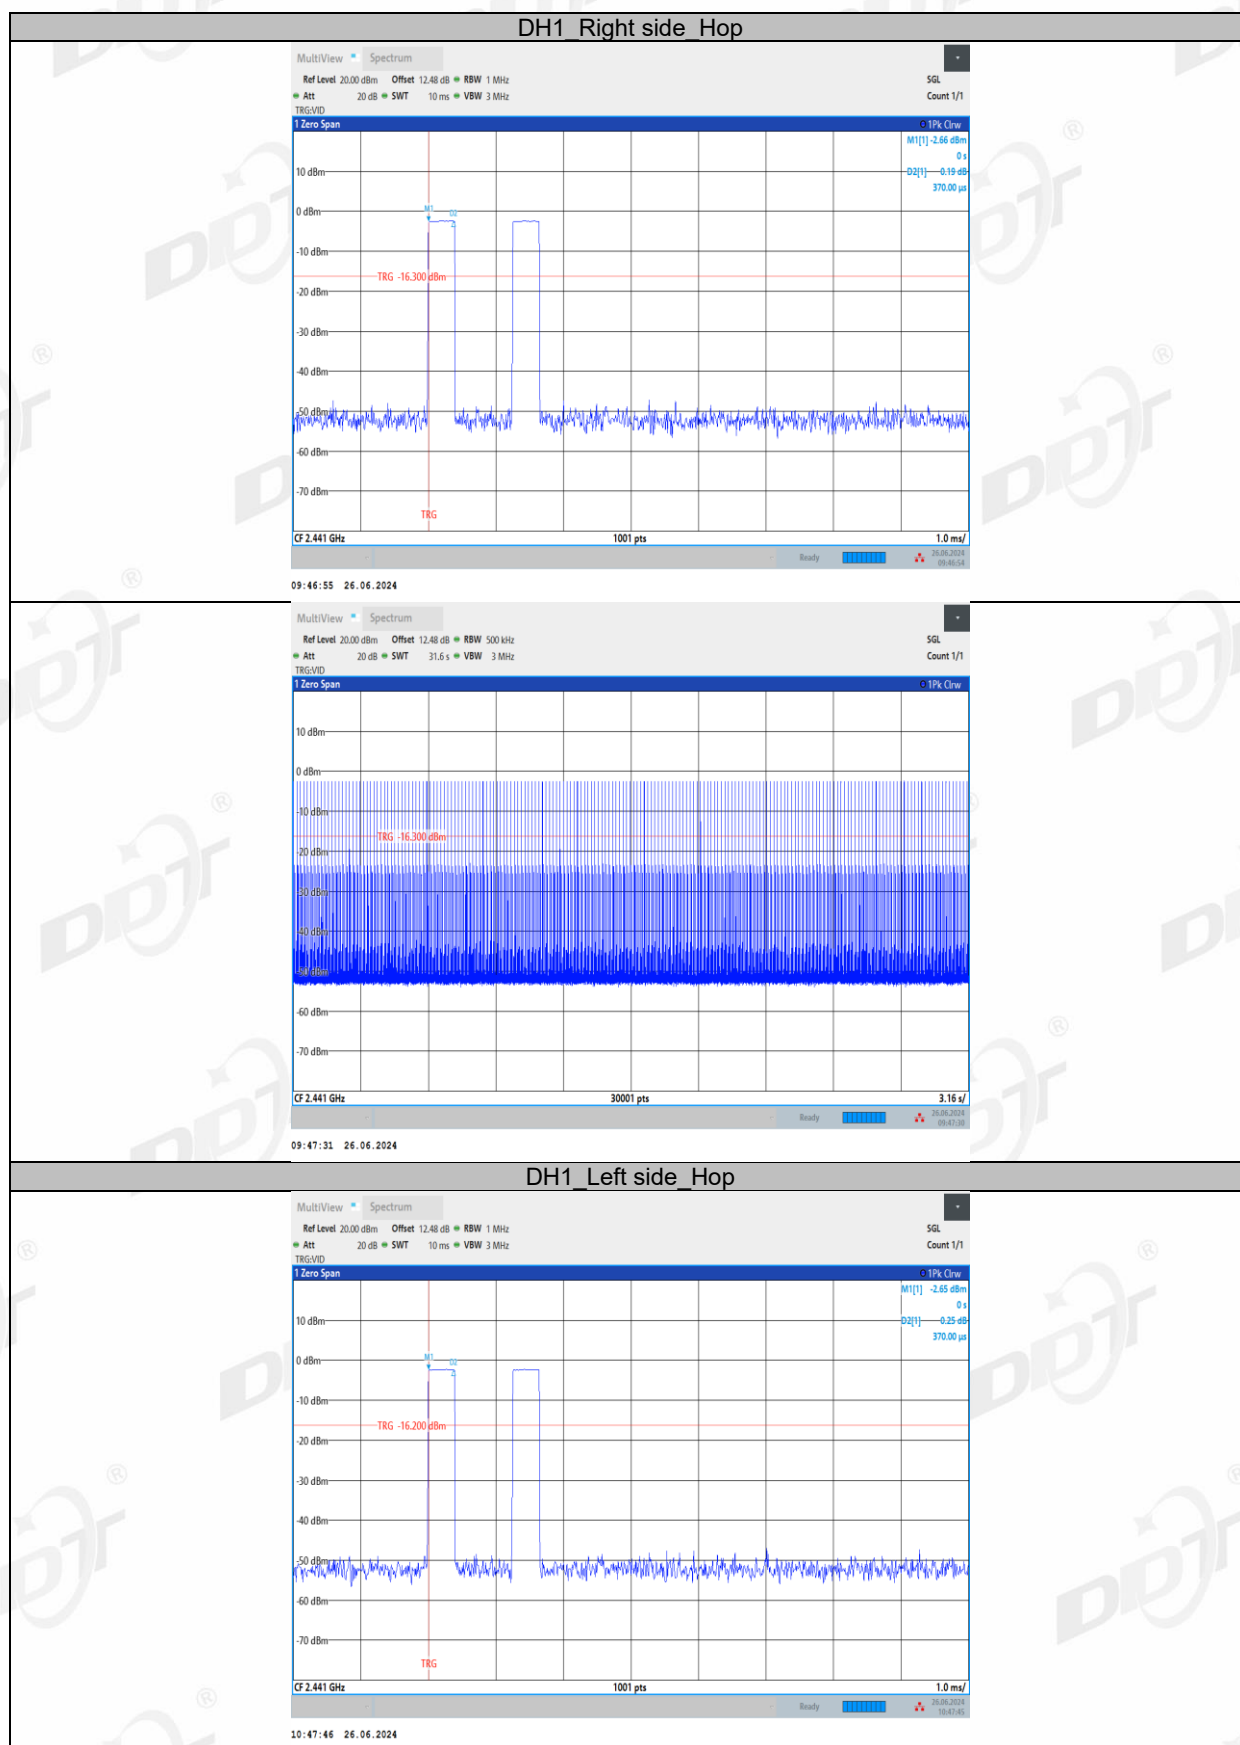


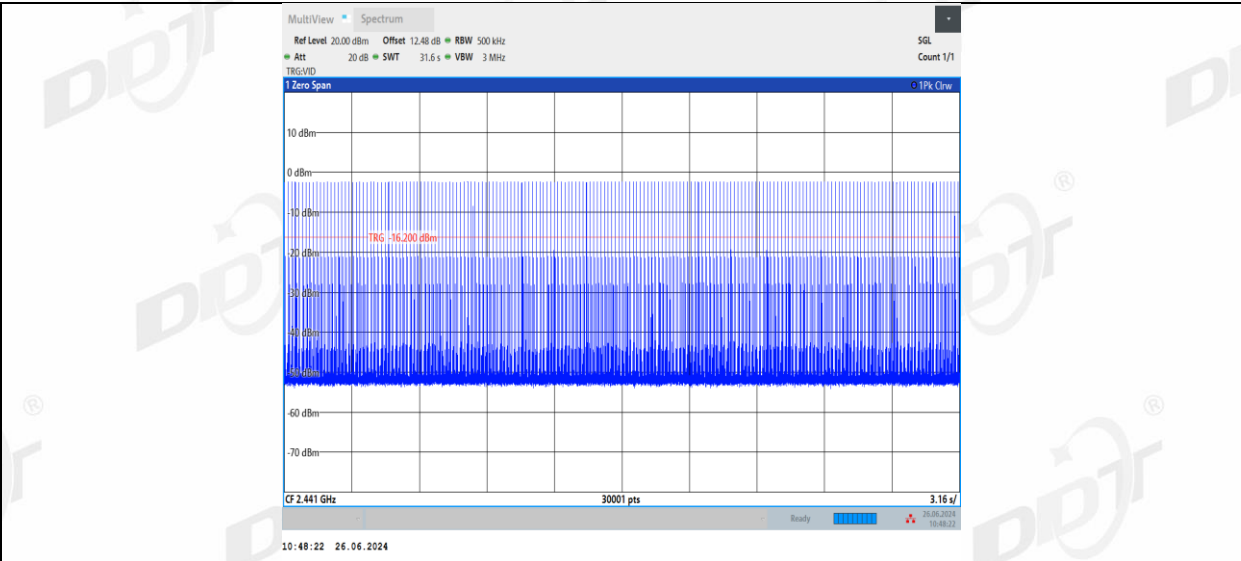


DH3_Right side_Hop

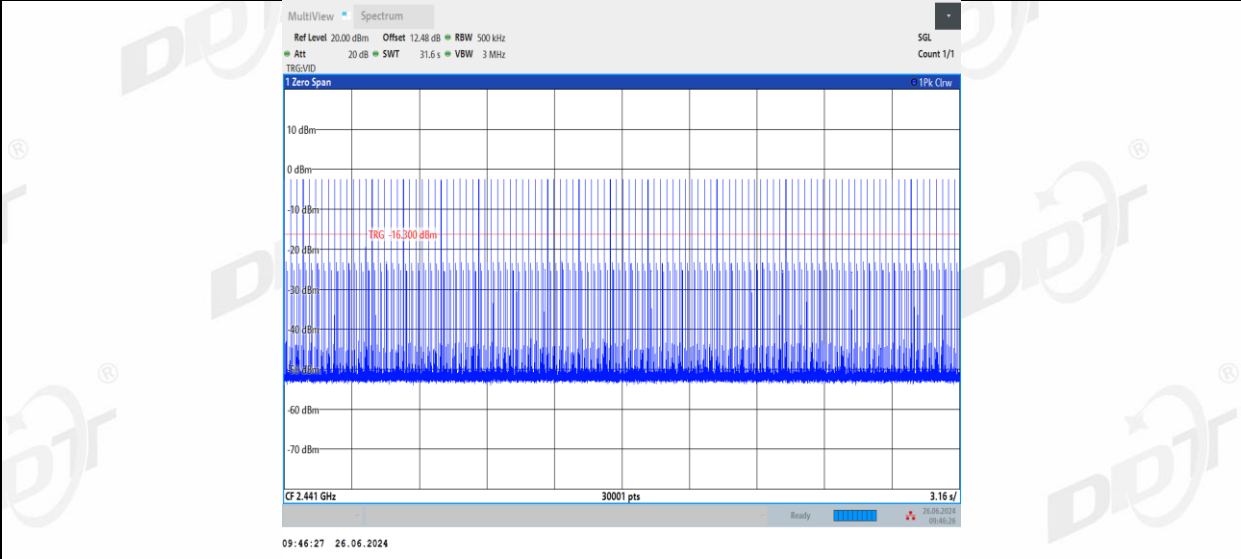
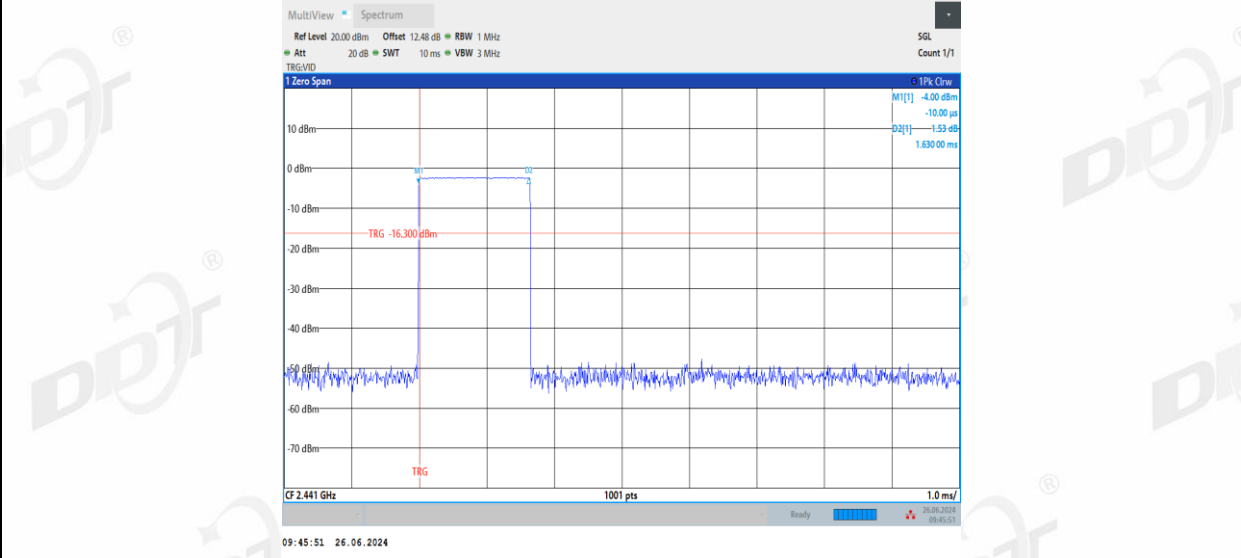


DH3_Left side_Hop

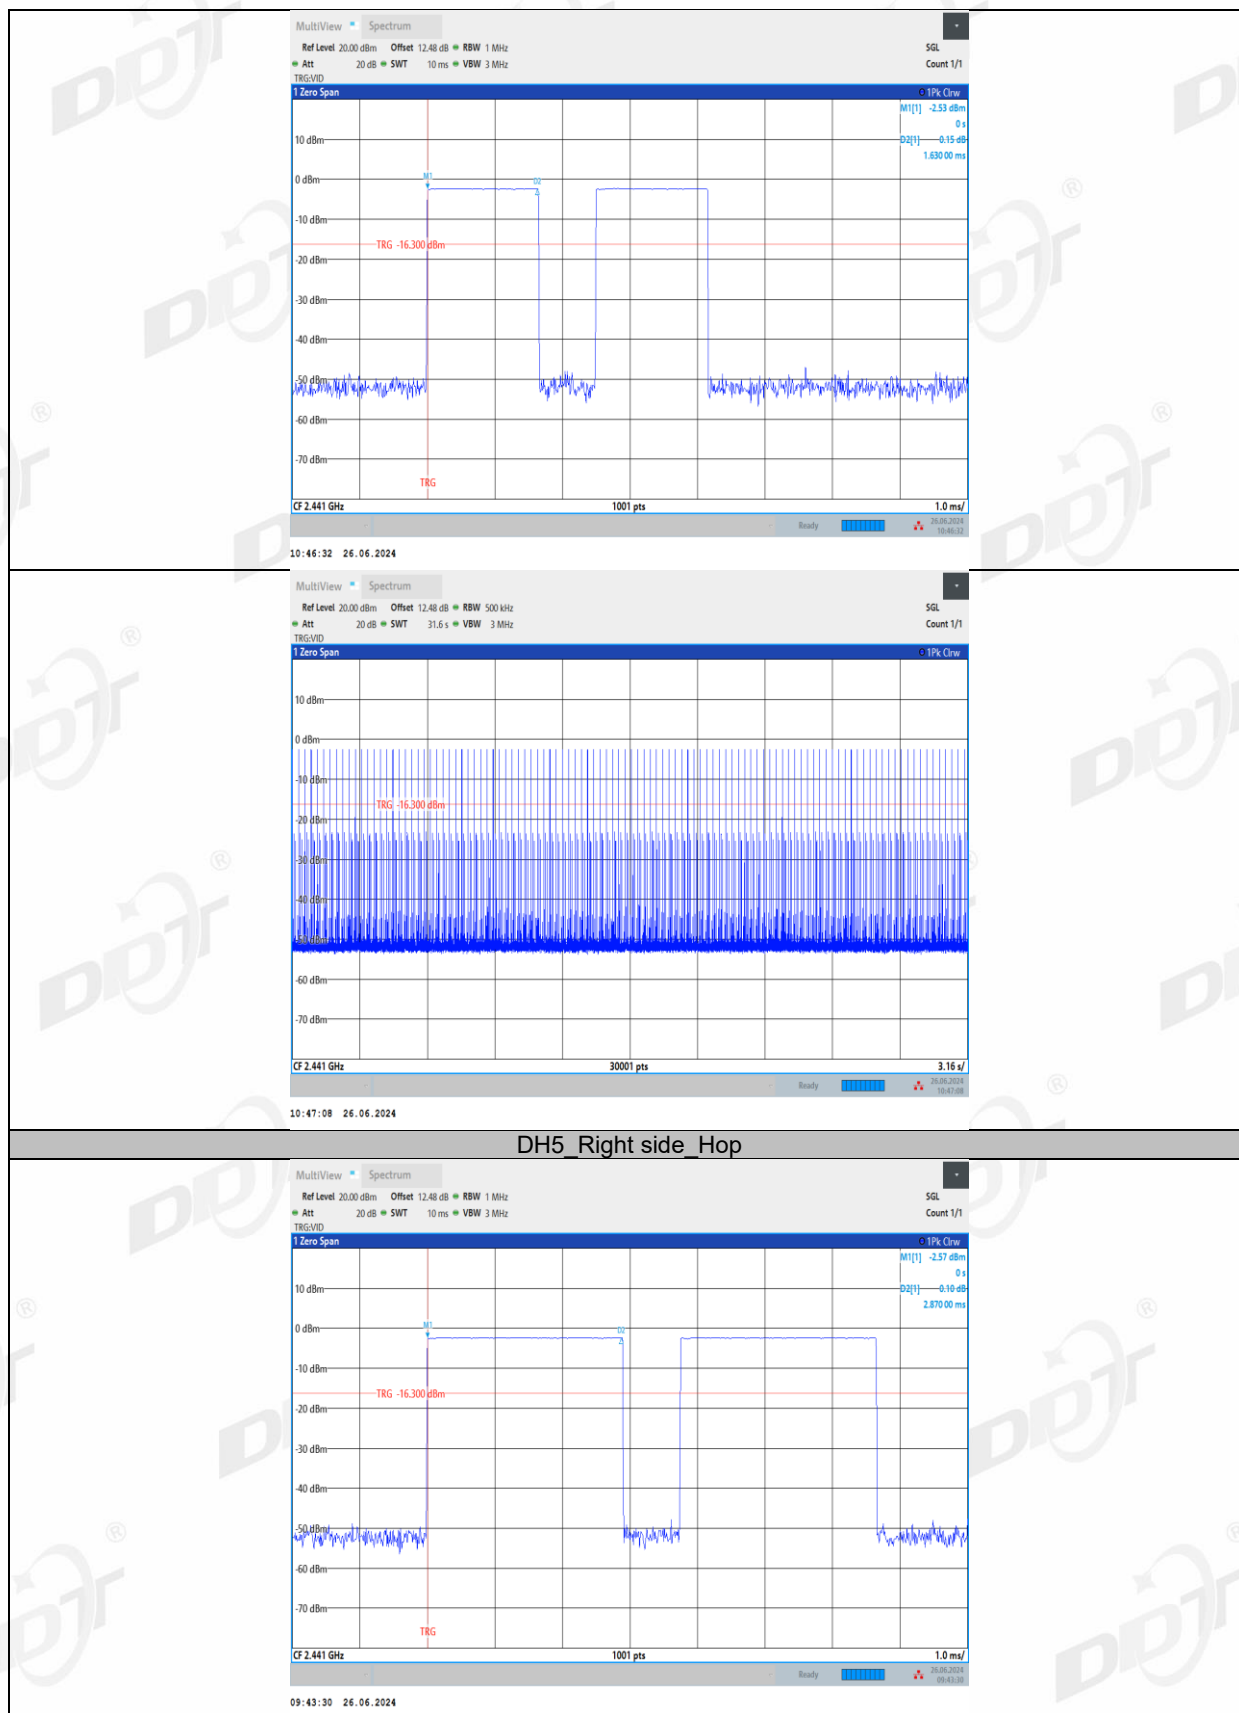


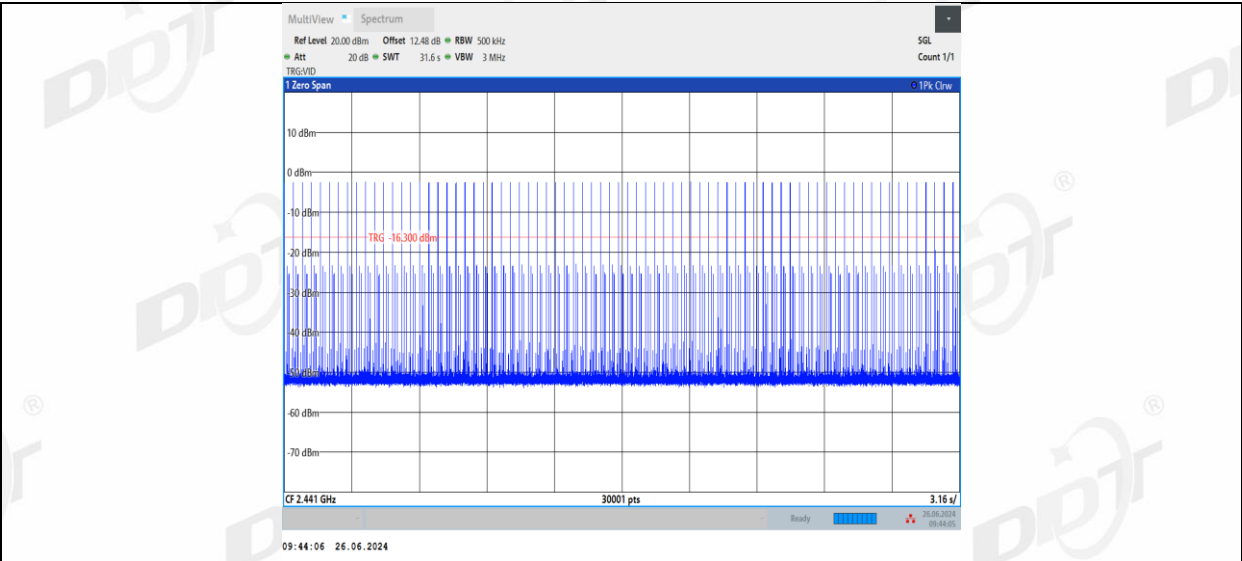


DH5_Left side_Hop

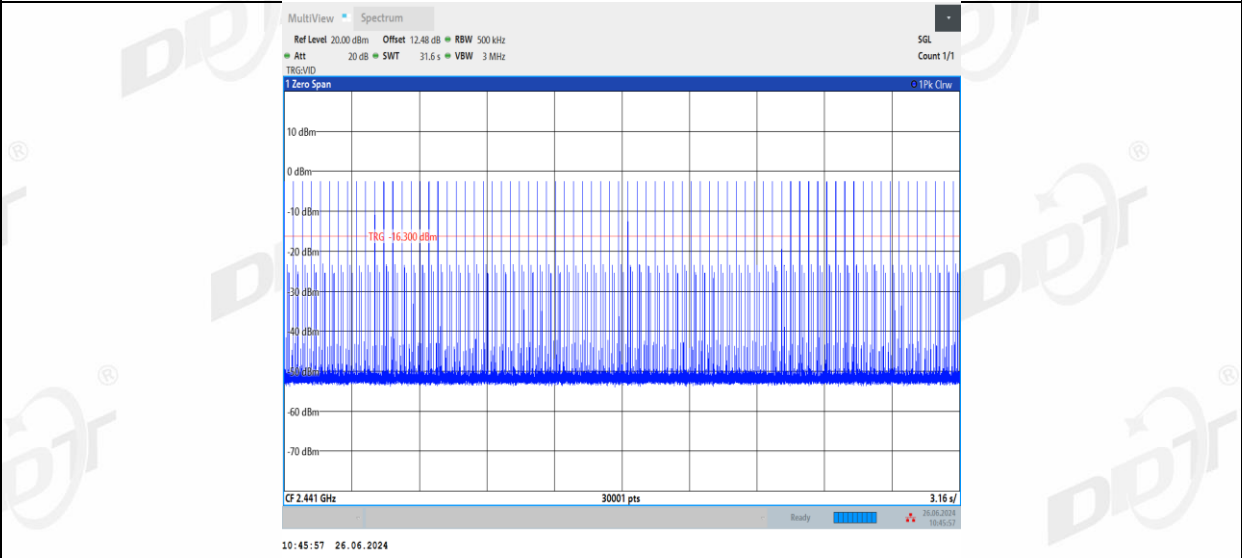
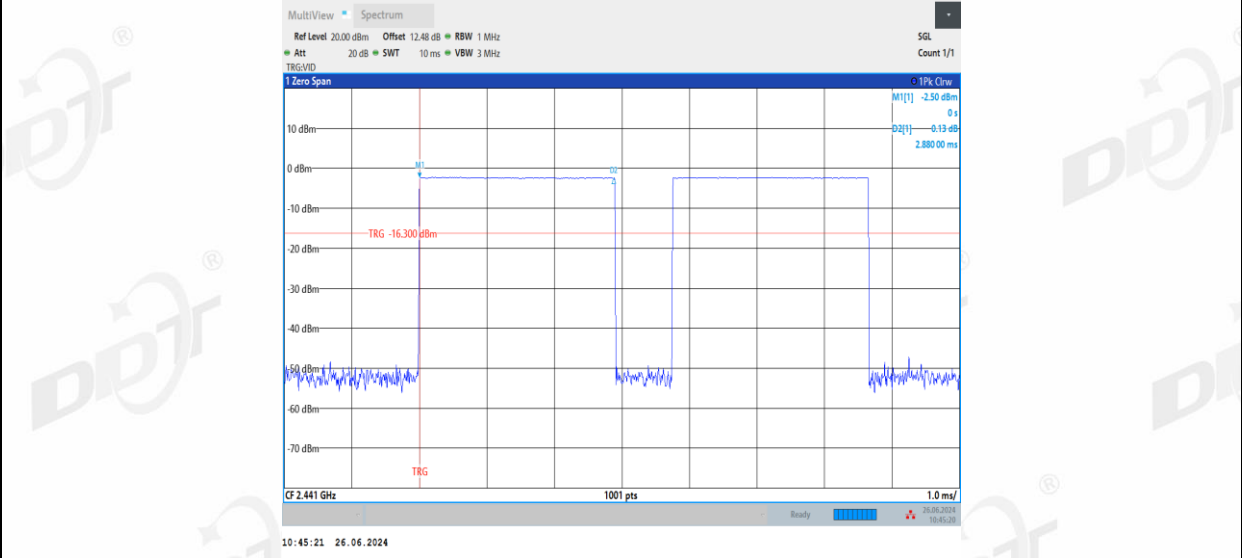


2DH1_Right side_Hop

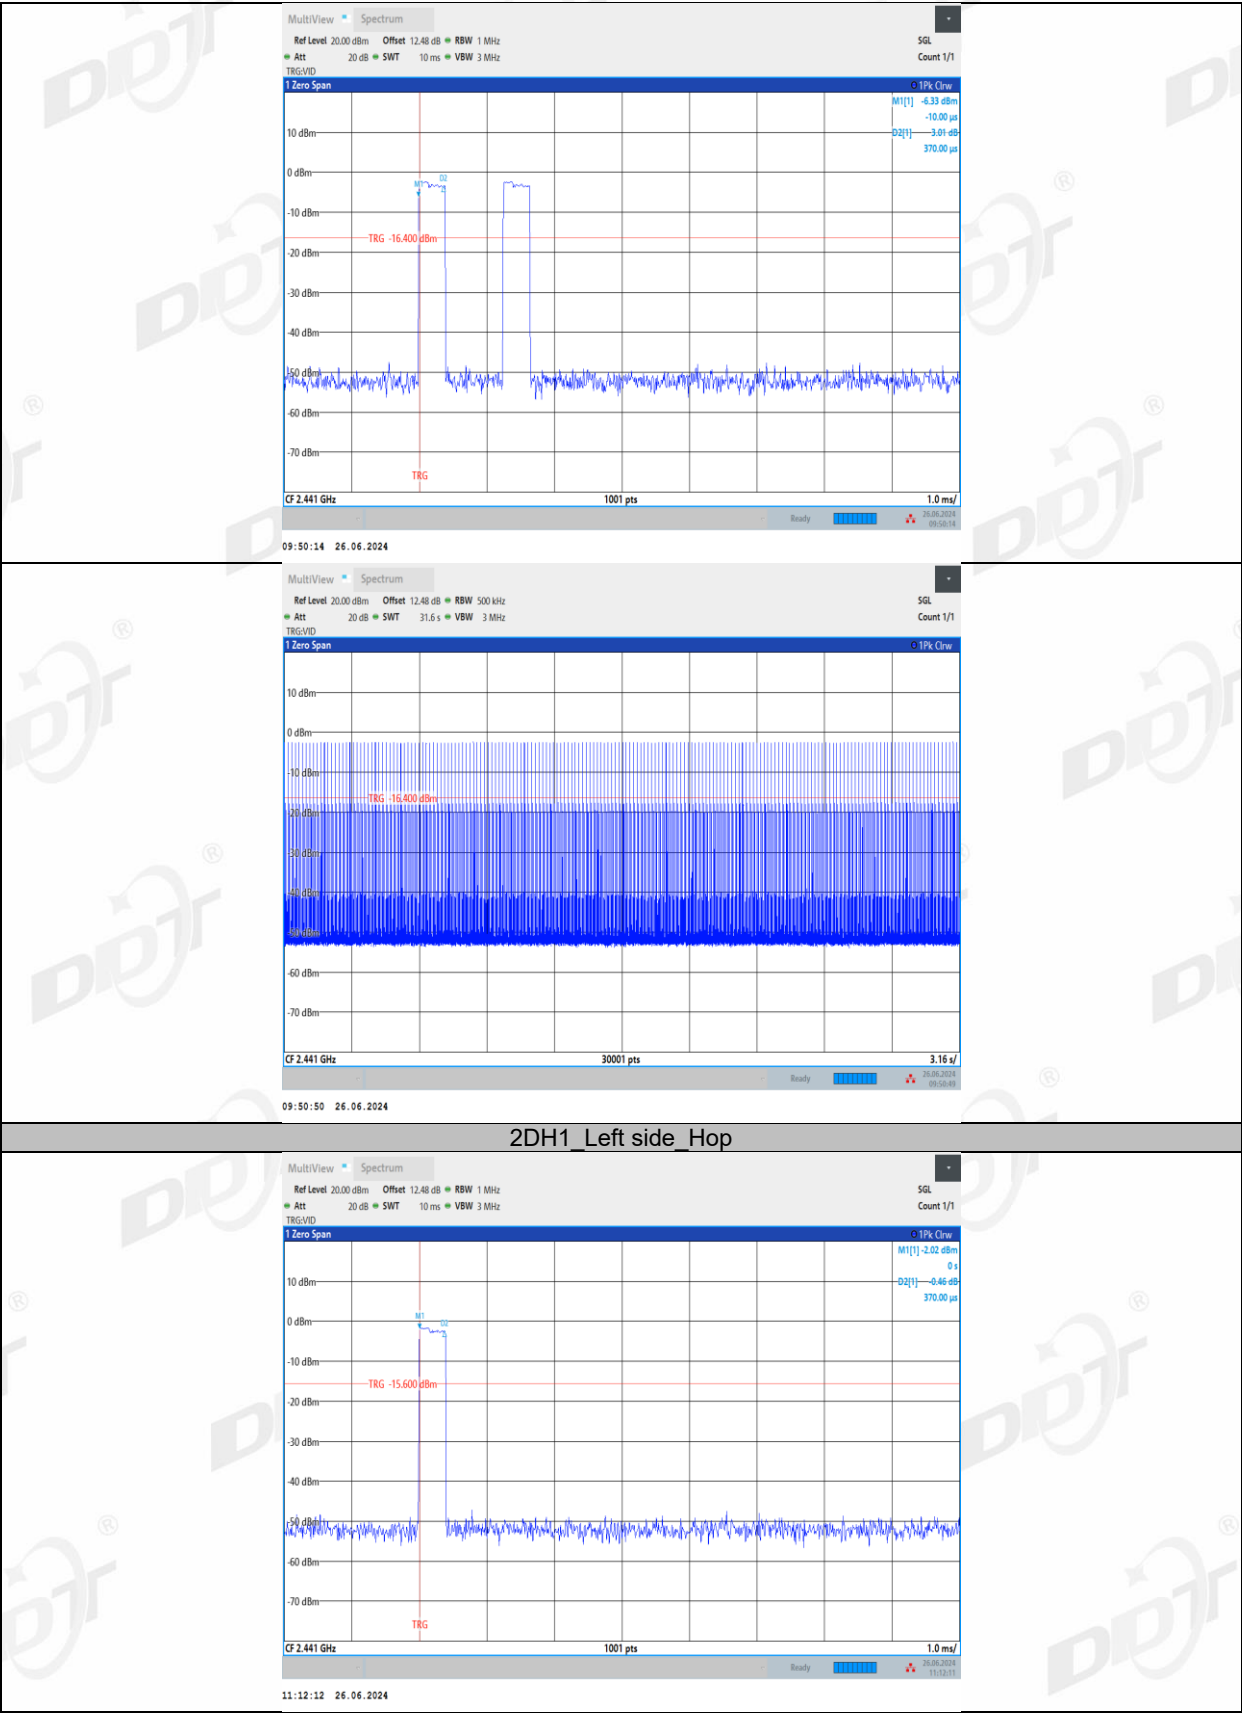


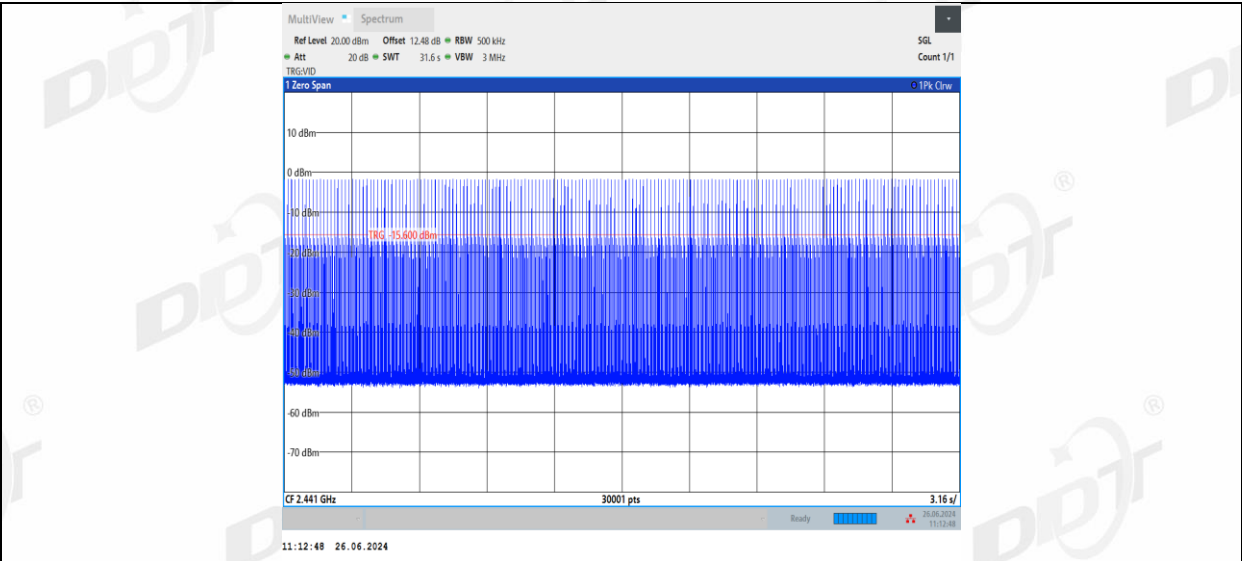


2DH3_Right side_Hop

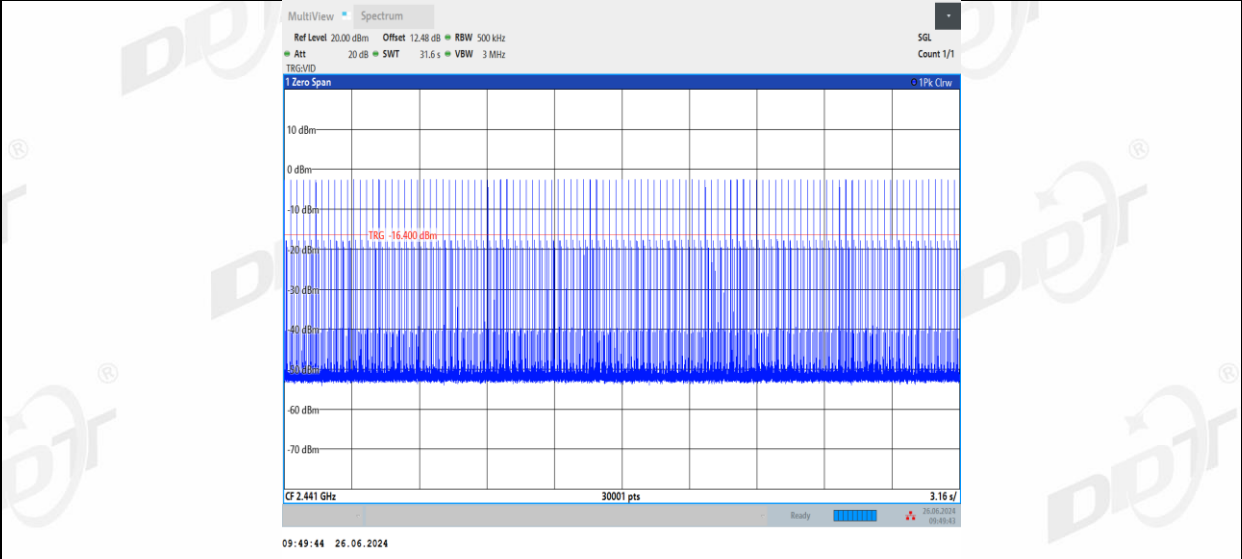
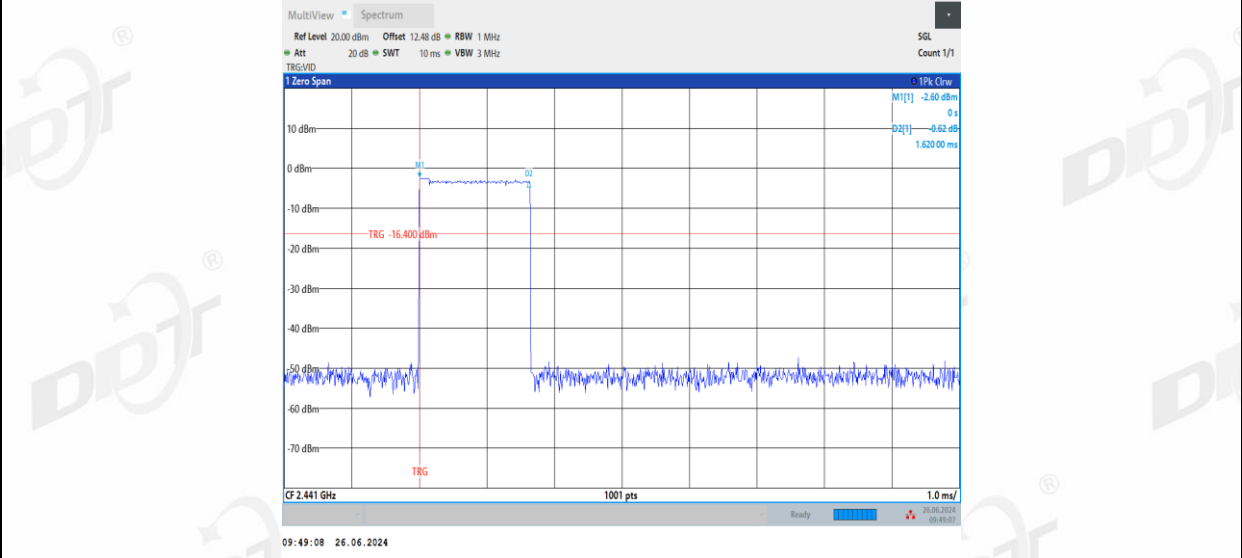


2DH3_Left side_Hop

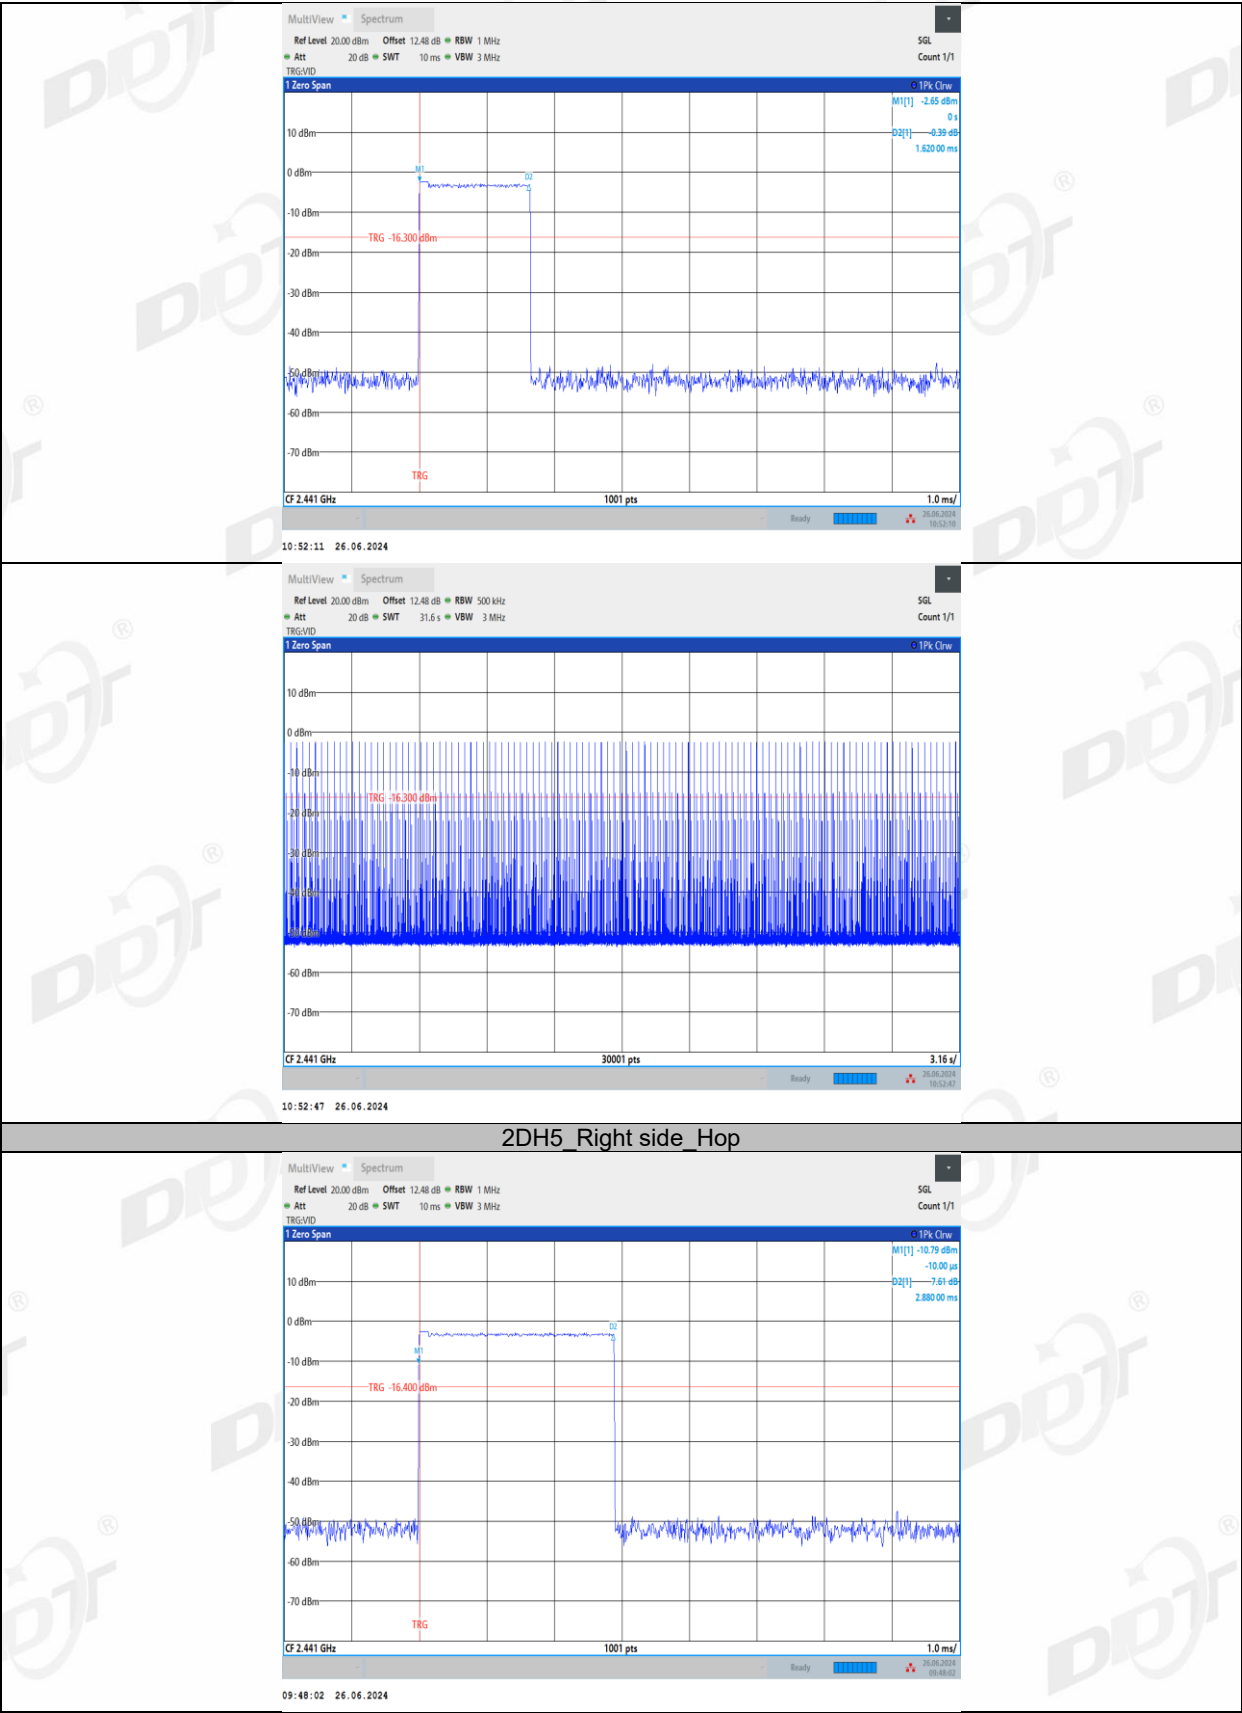


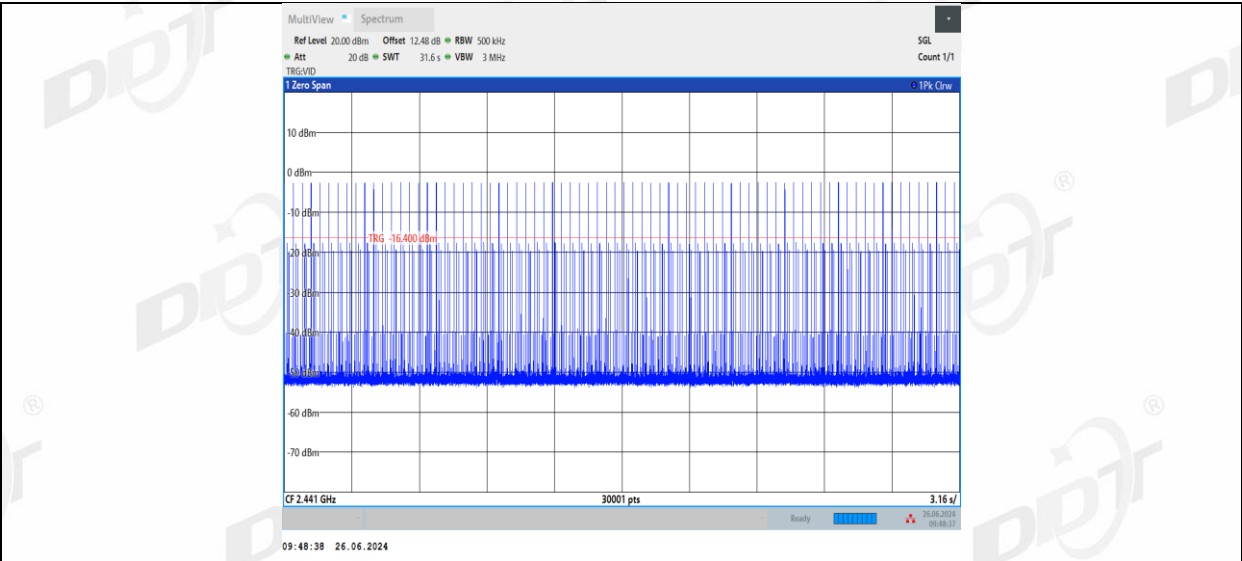


2DH5_Left side_Hop

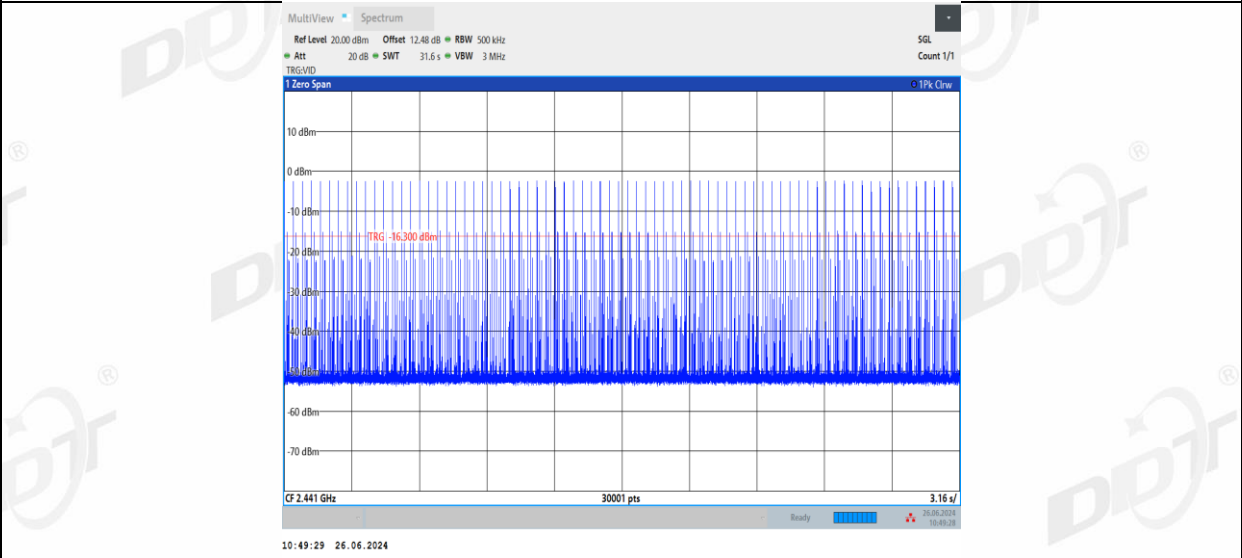
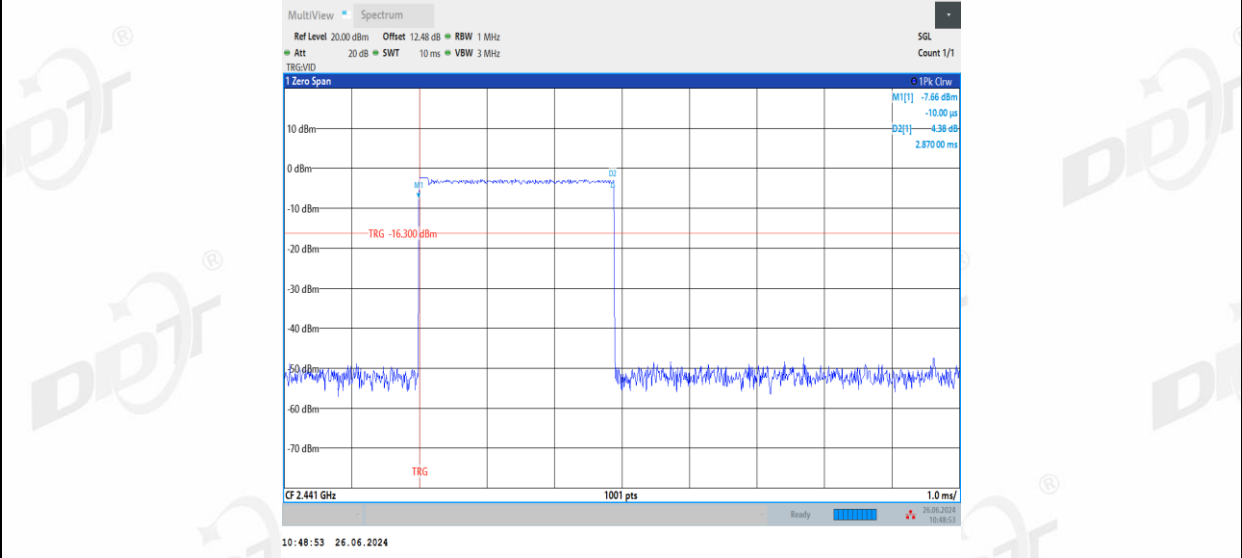


3DH1_Right side_Hop

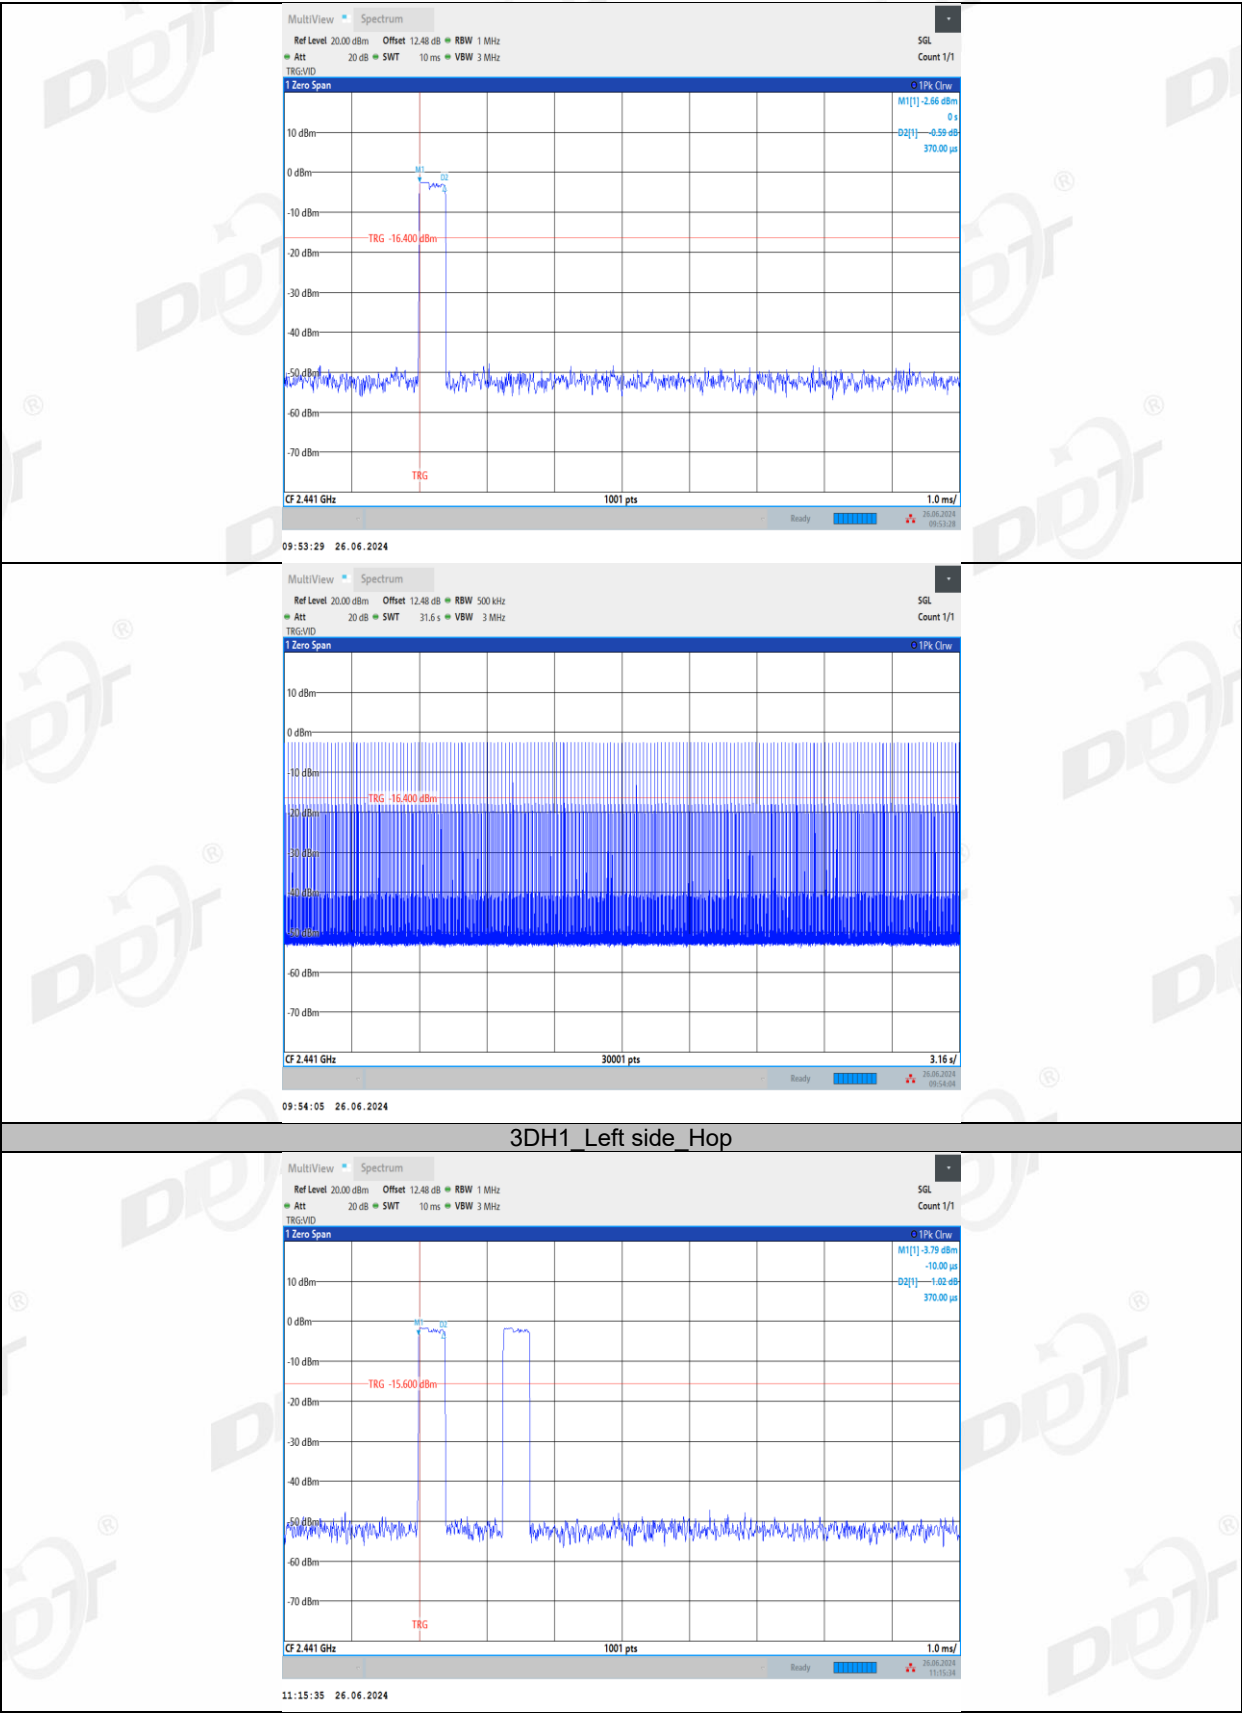


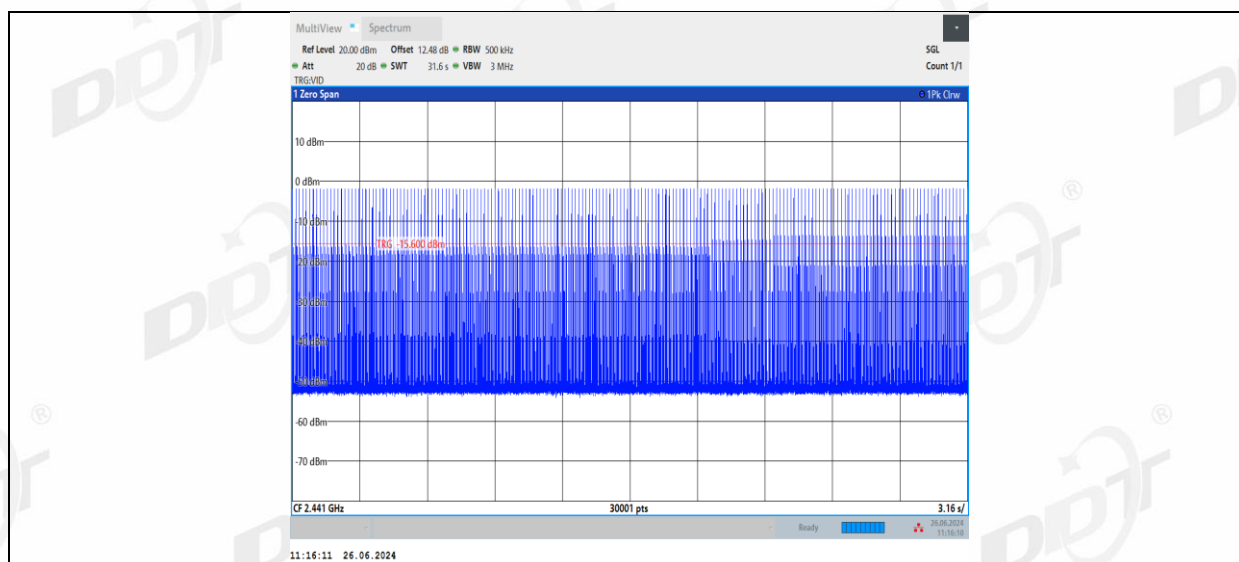


3DH3_Right side_Hop

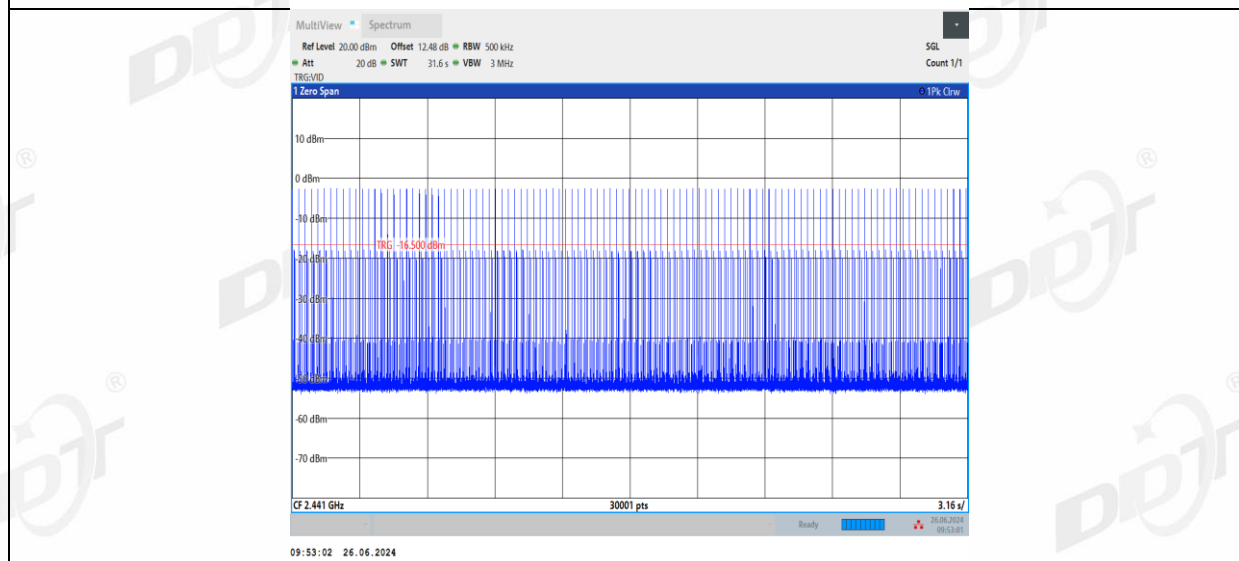
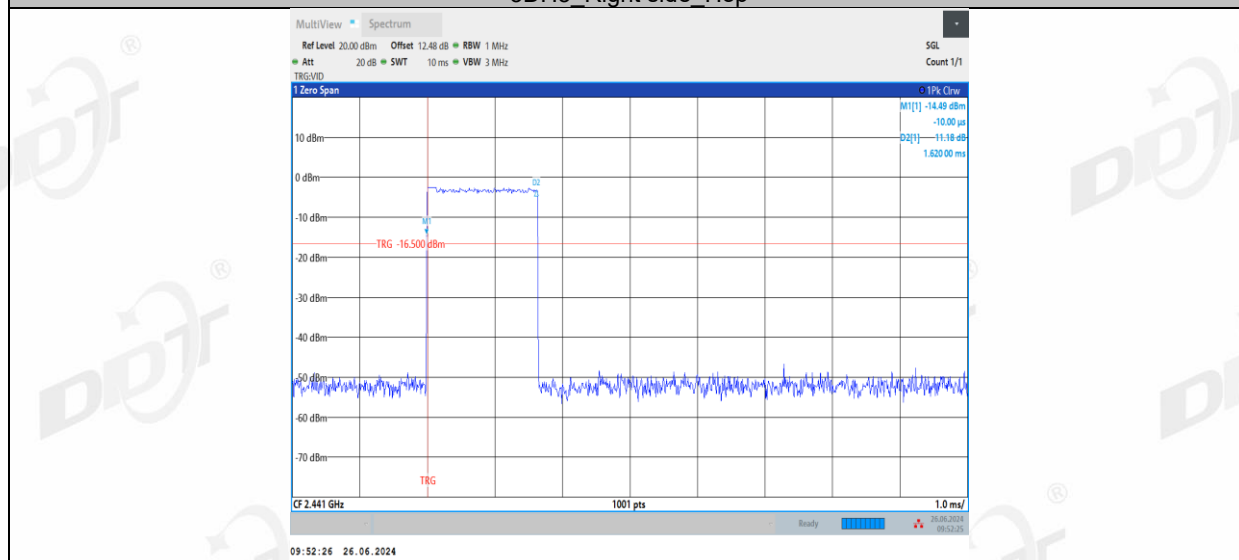


3DH3_Left side_Hop

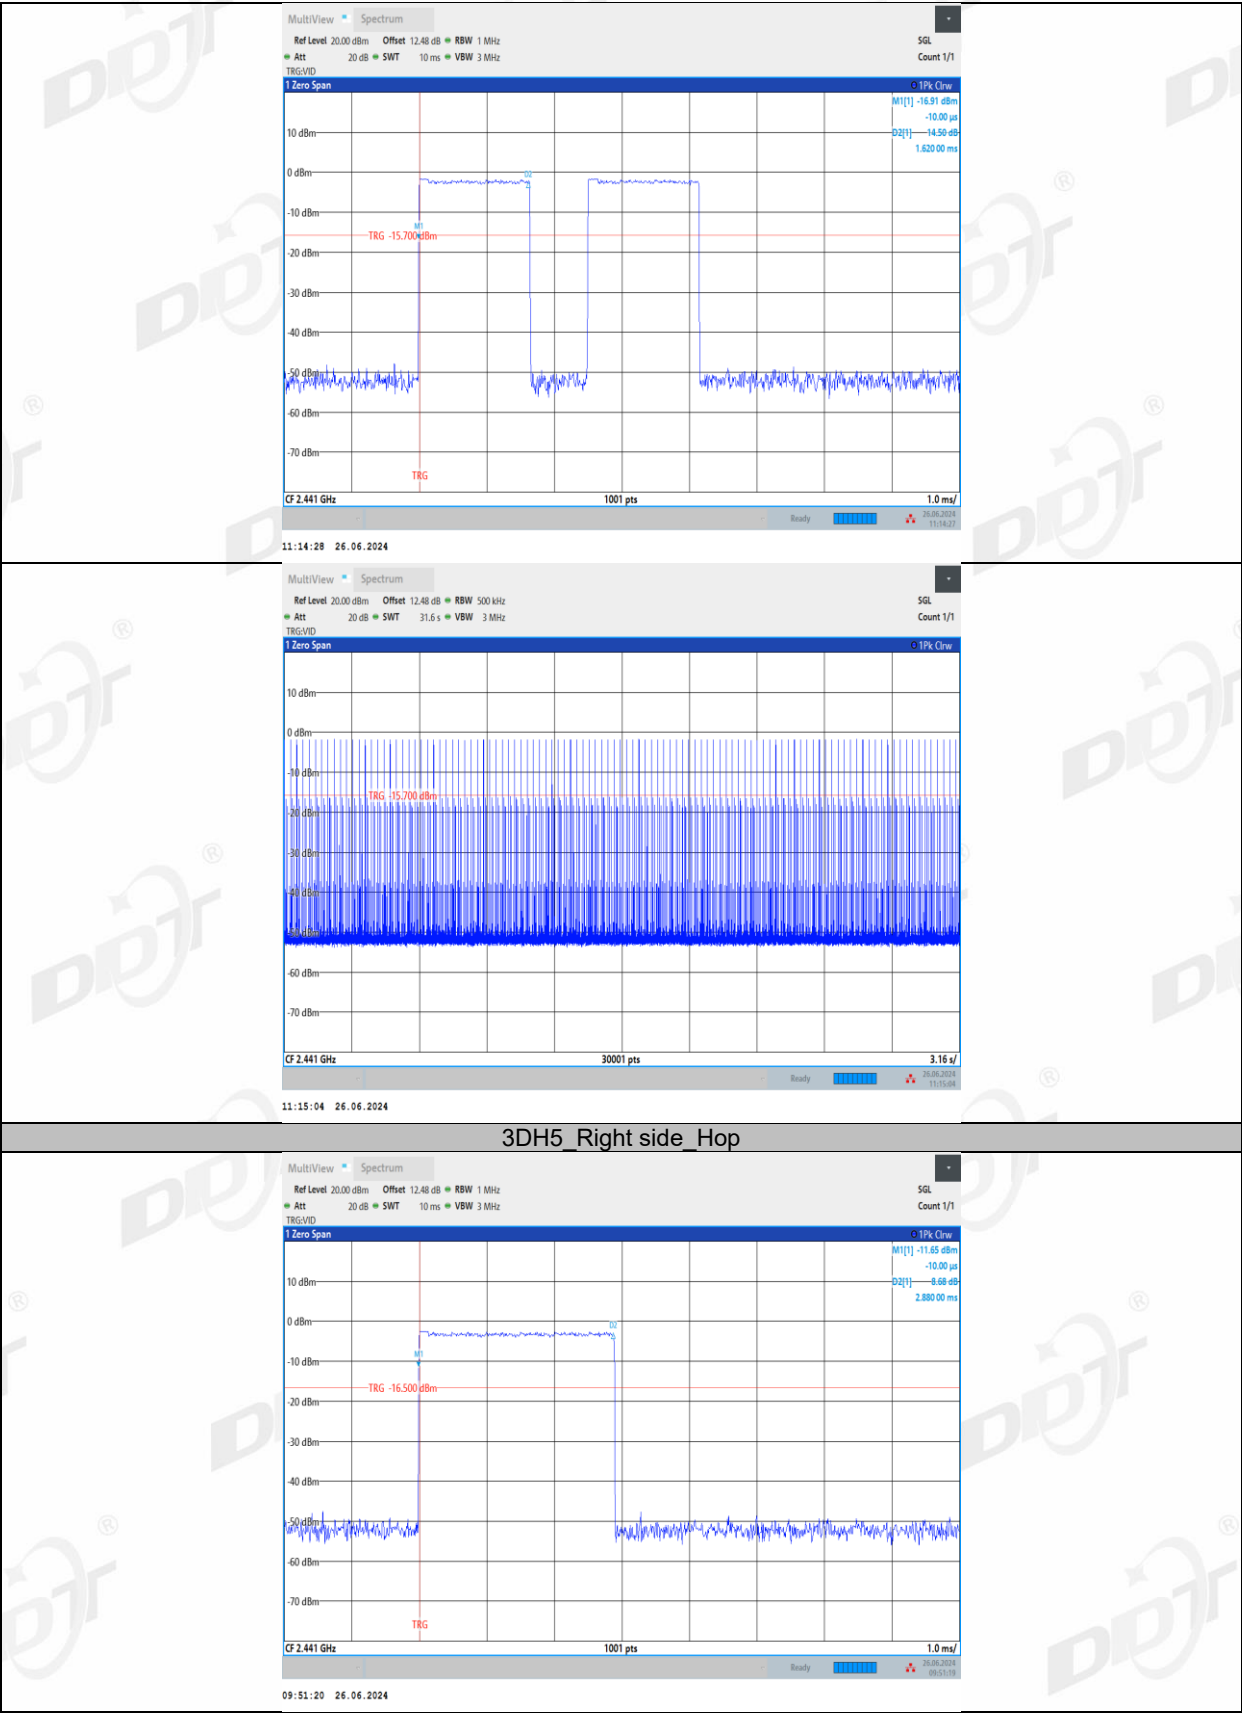

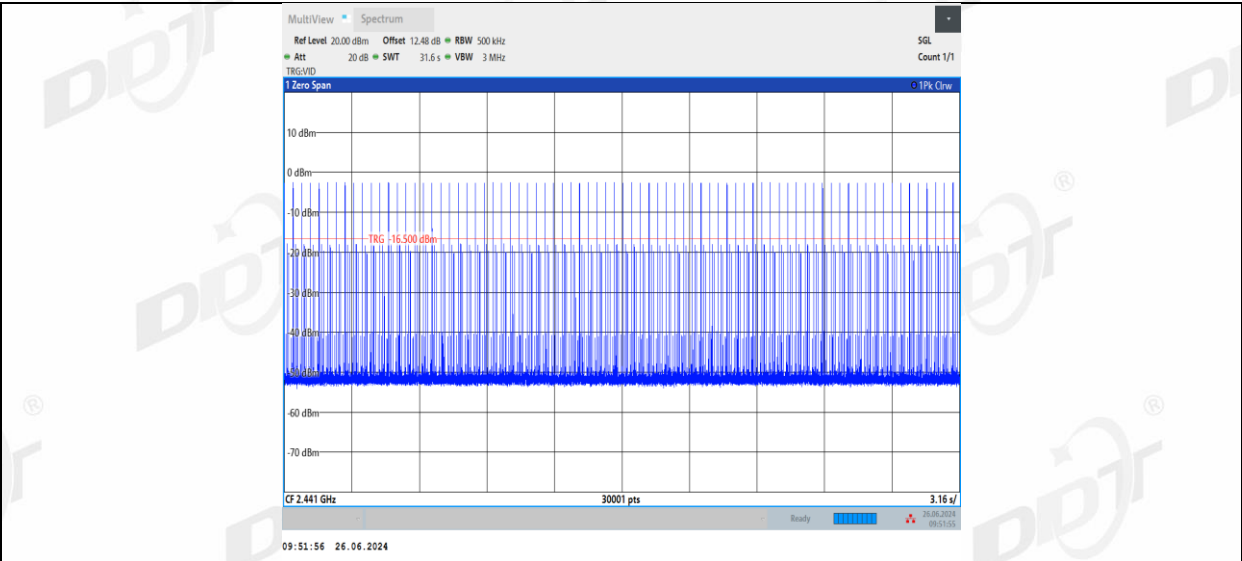


3DH5_Left side_Hop

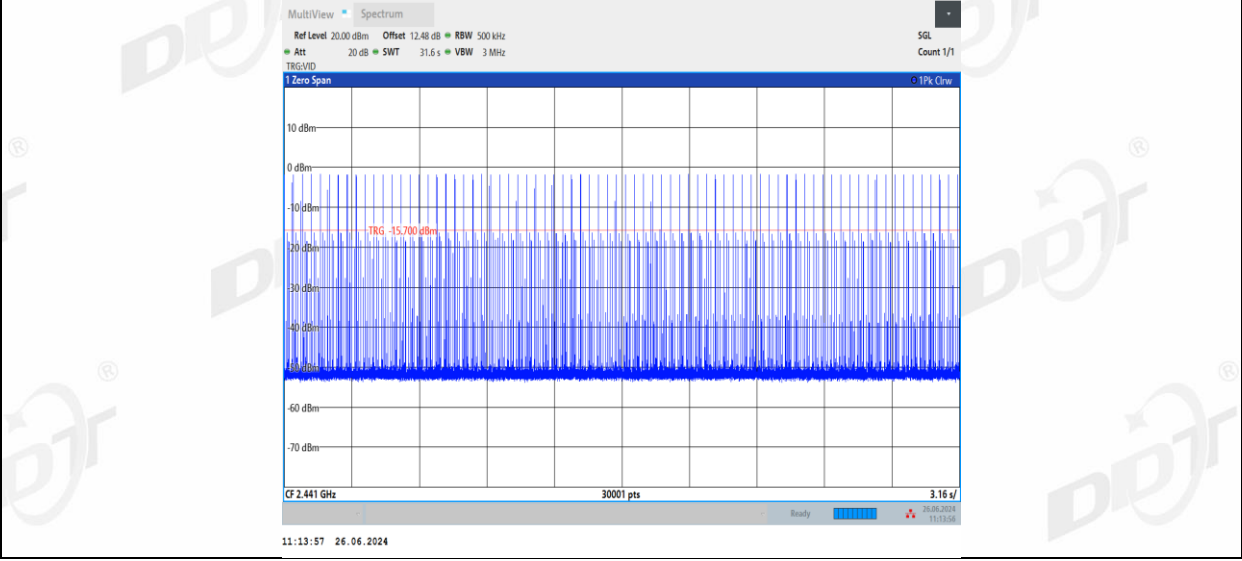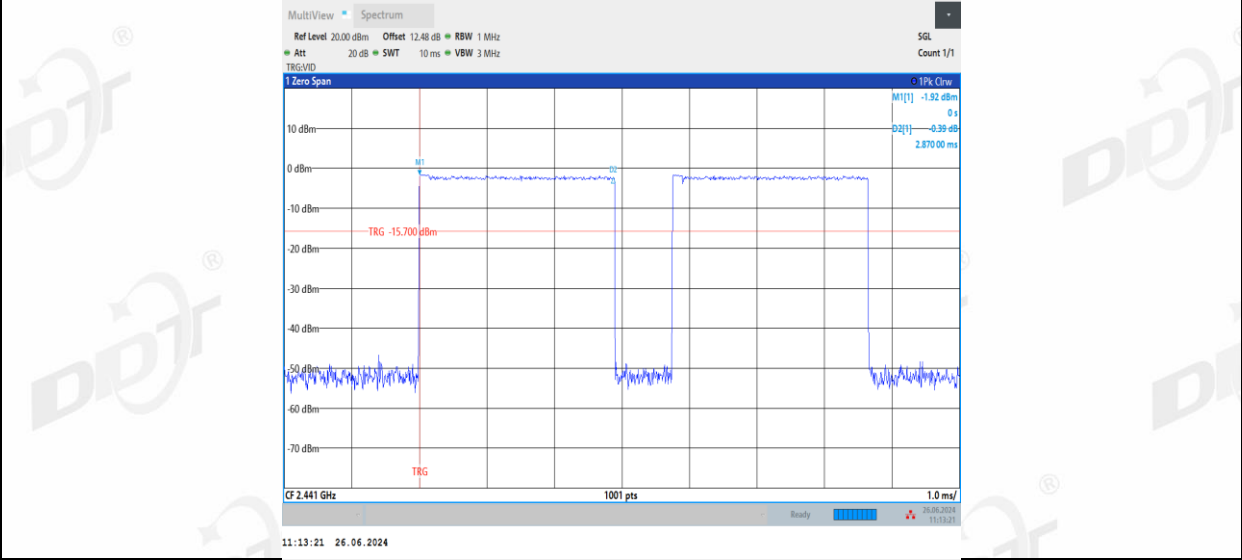

9. Number of Hopping Channel

9.1. Block diagram of test setup

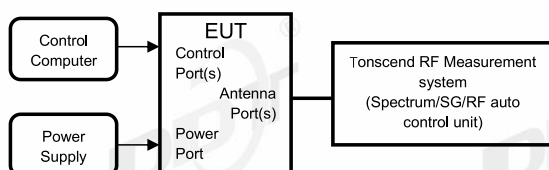

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	$VBW \geq RBW$.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.


9.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.6-26.1℃,41.8-45.3%RH	Test Date:	2024.06.25-2024.06.26
Test Power Supply:	Battery	Sample Number:	S24053007-001


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Right side	Hop	79	≥15	PASS
	Left side	Hop	79	≥15	PASS
2DH5	Right side	Hop	79	≥15	PASS
	Left side	Hop	79	≥15	PASS
3DH5	Right side	Hop	79	≥15	PASS
	Left side	Hop	79	≥15	PASS

9.5. Test graphs

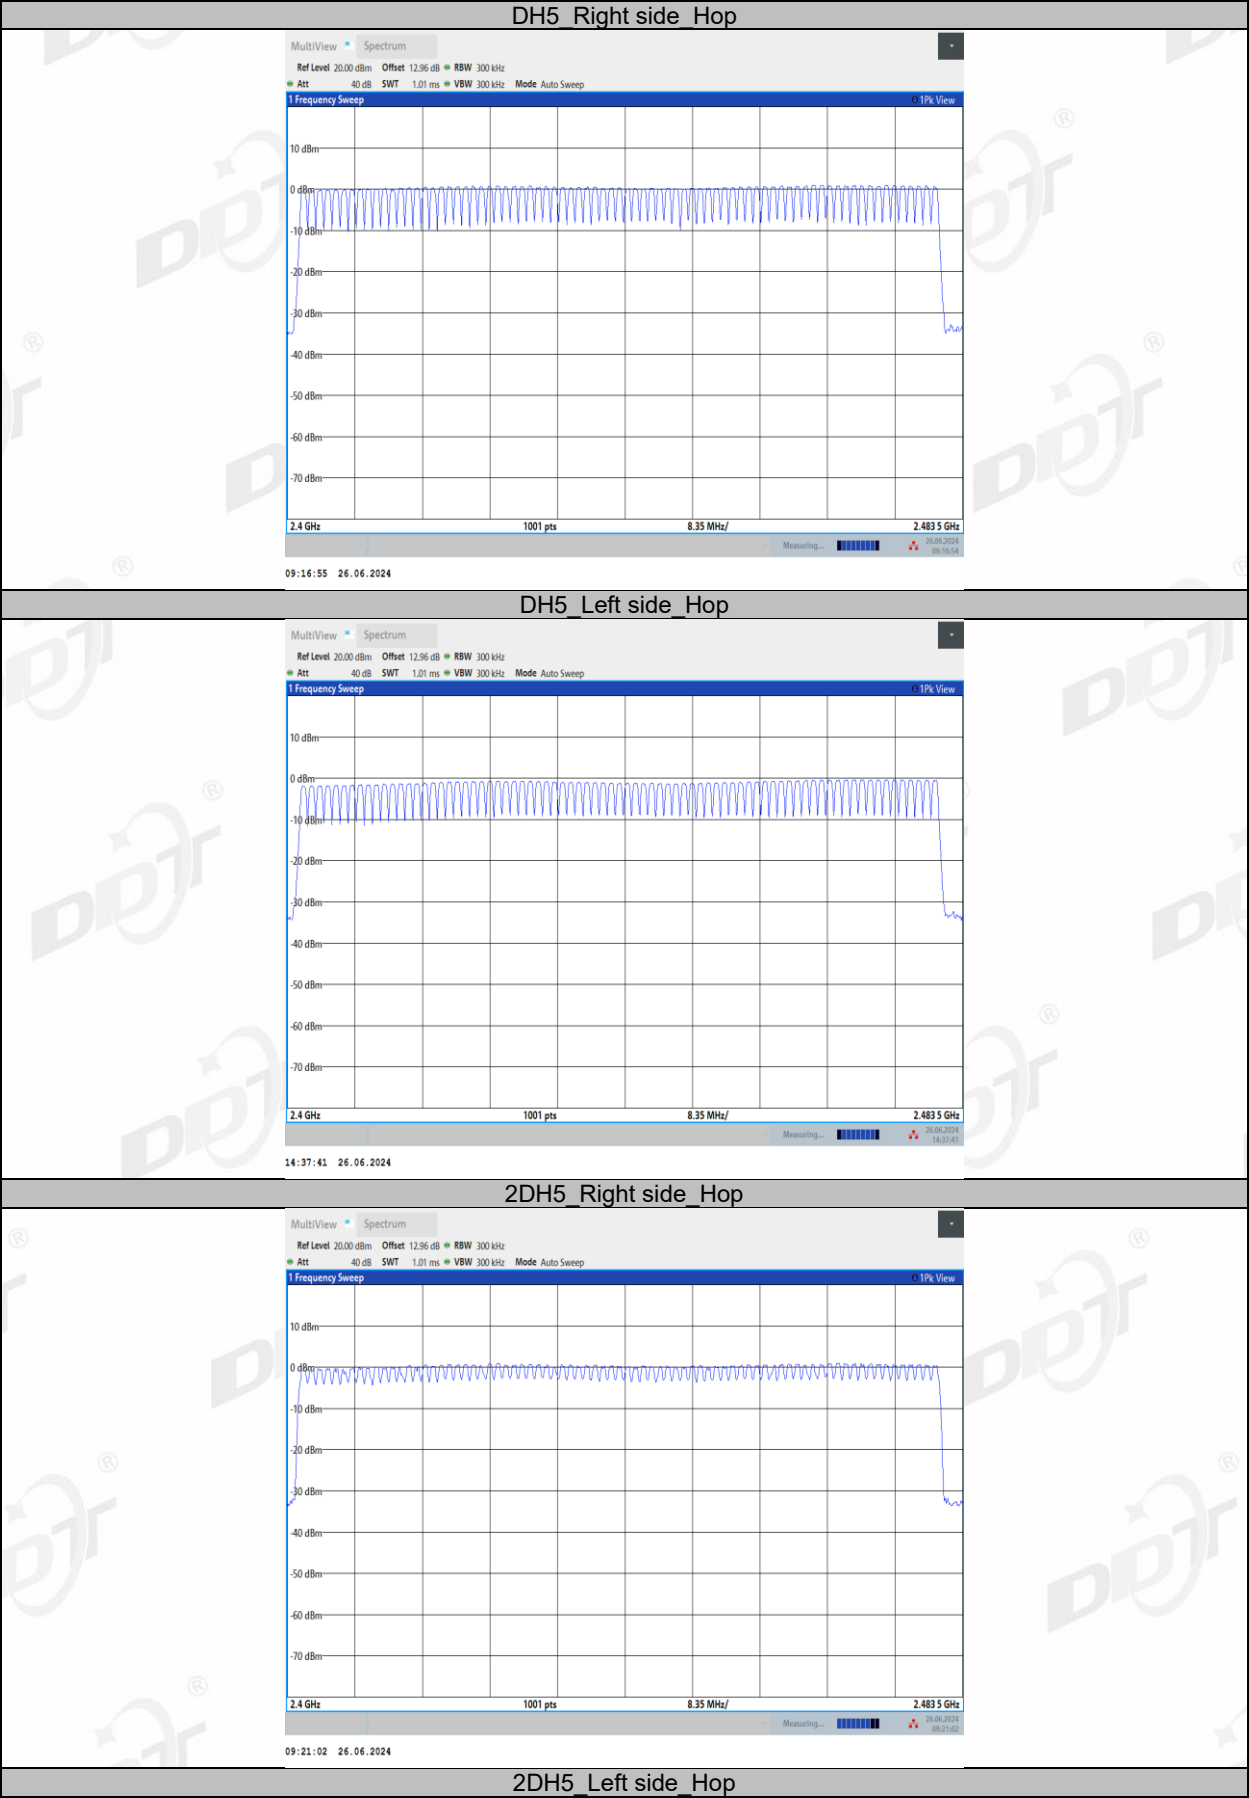


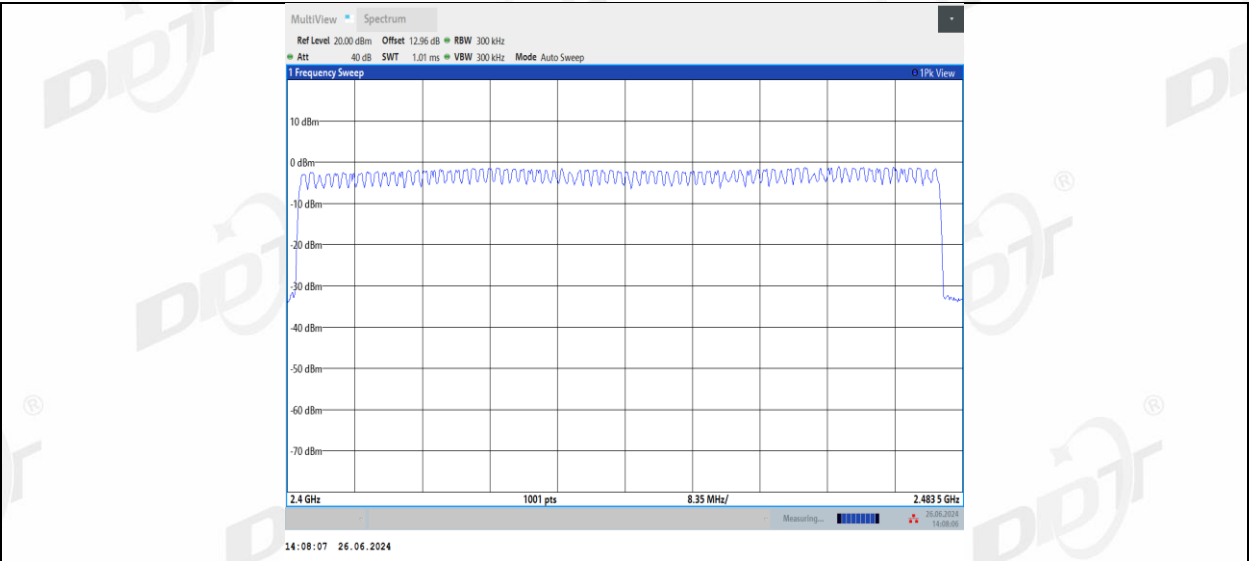

3DH5_Right side_Hop

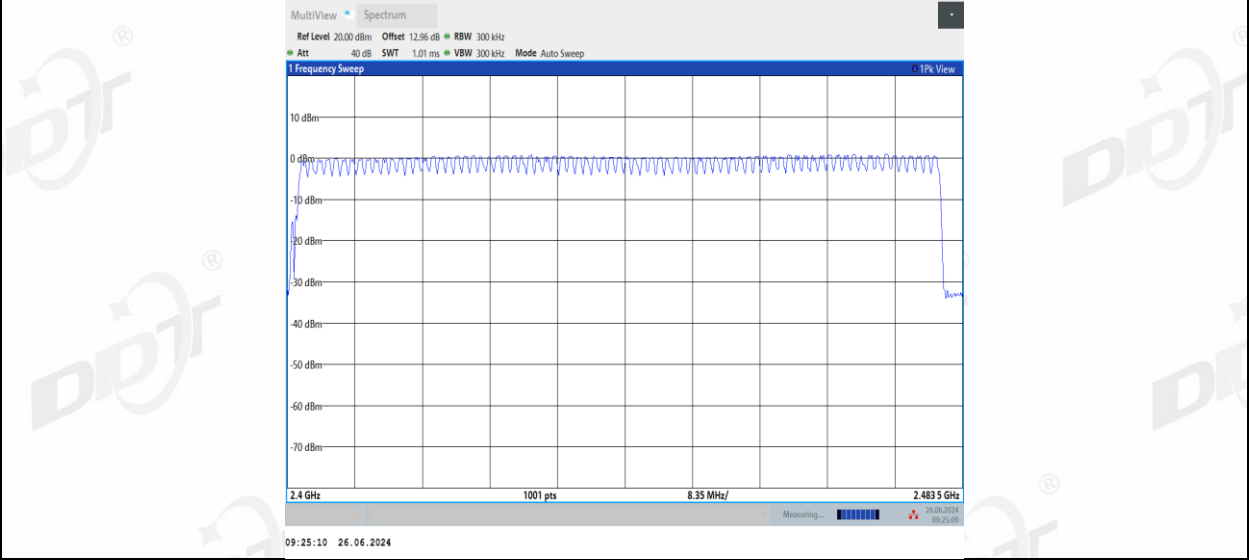


3DH5_Left side_Hop

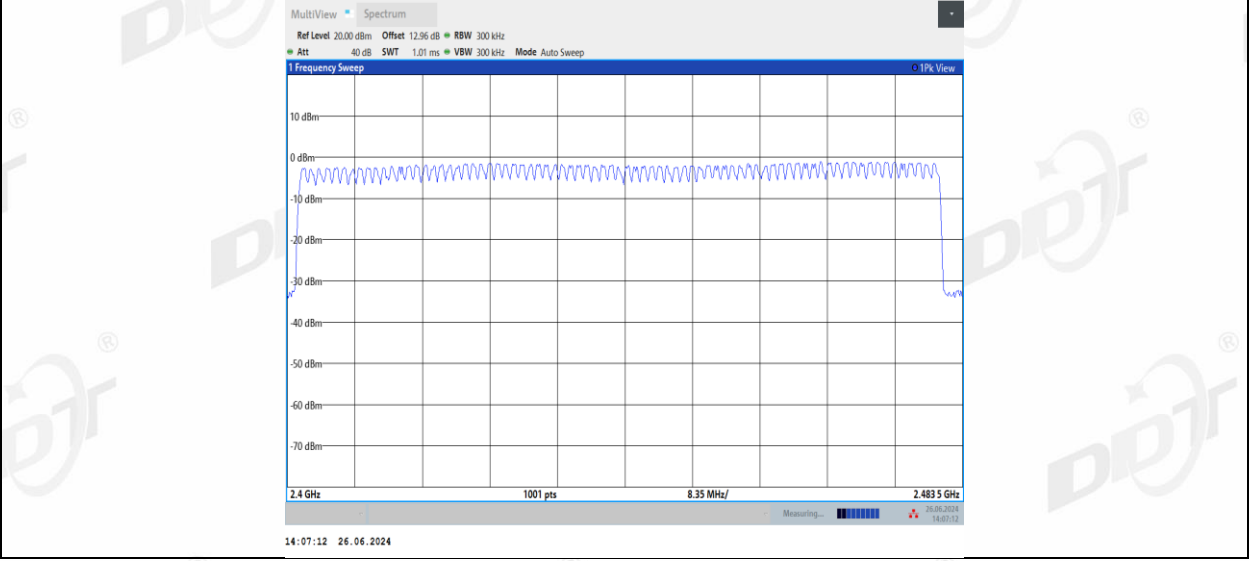

10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

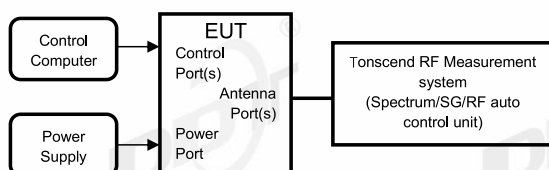

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


10.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.6-26.1℃,41.8-45.3%RH	Test Date:	2024.06.25-2024.06.26
Test Power Supply:	Battery	Sample Number:	S24053007-001


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs




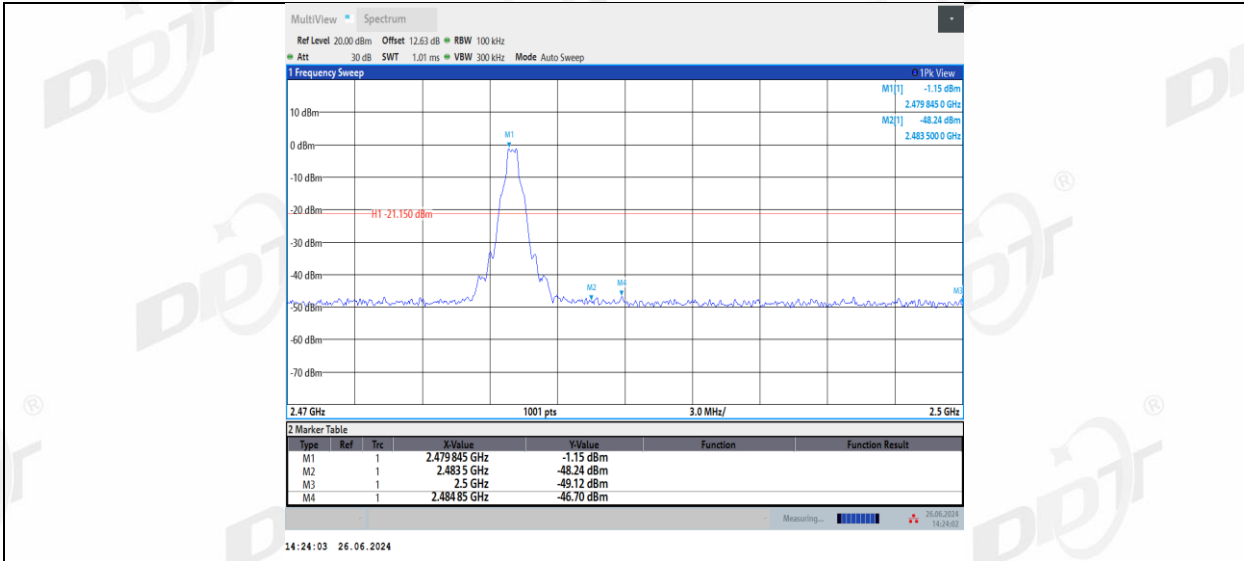


DH5_Right side_Low_Hop_2402

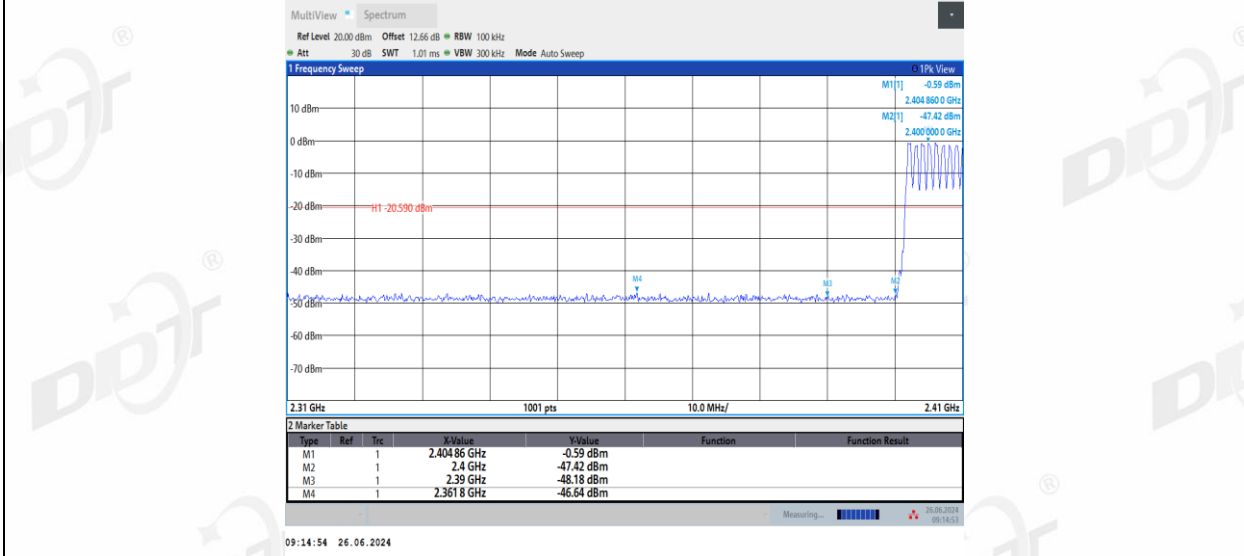


DH5_Left side_Low_Hop_2402

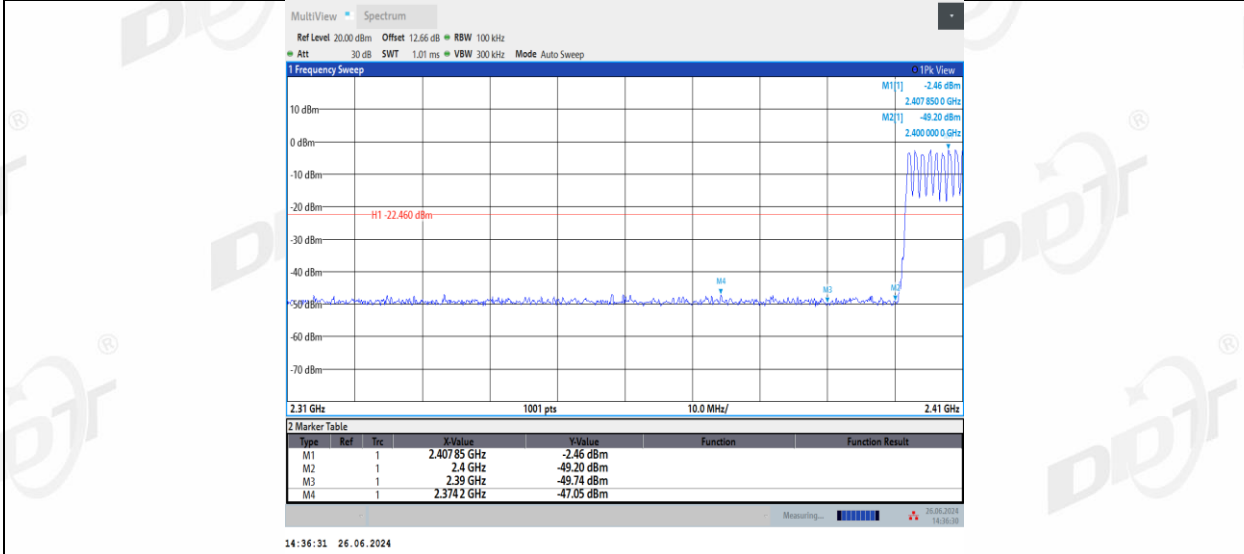


DH5_Right side_High_Hop_2480

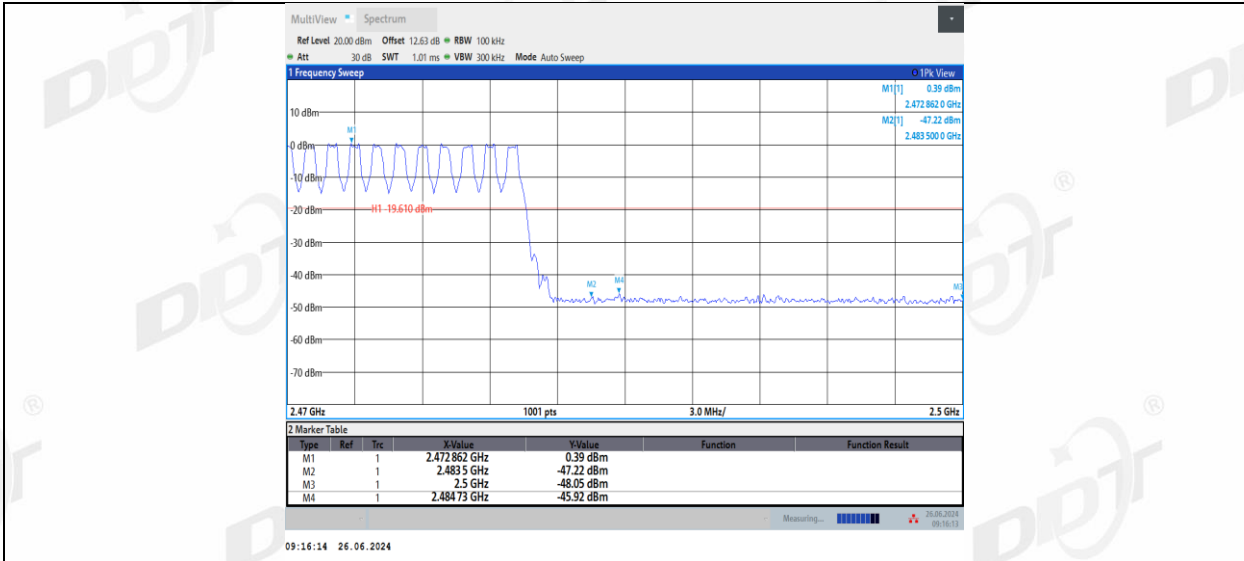


DH5 Left side High Hop 2480

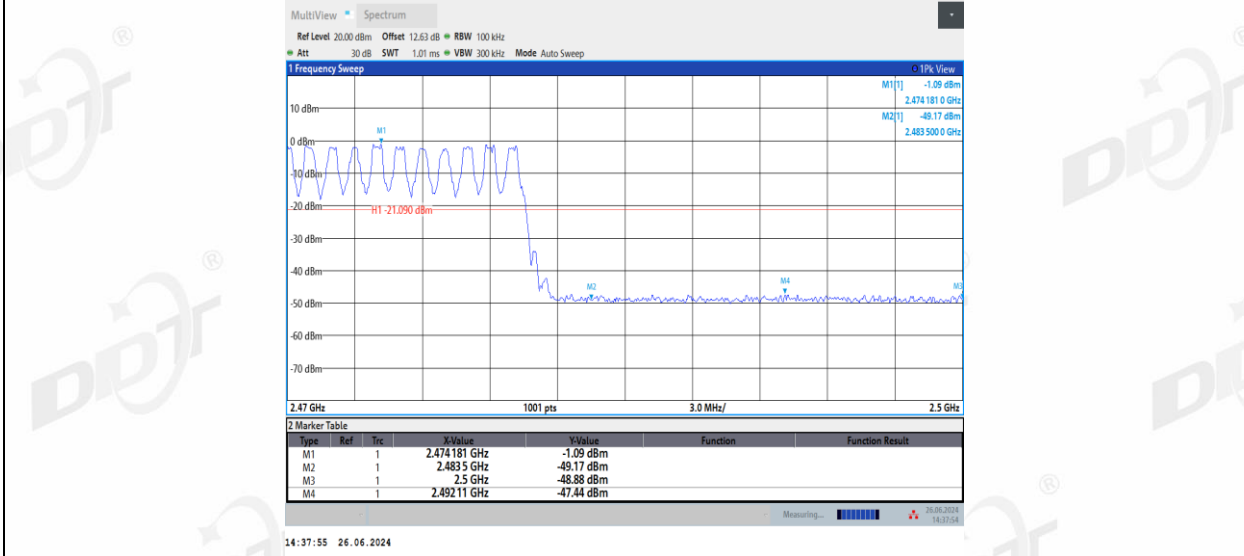


2DH5 Right side Low 2402

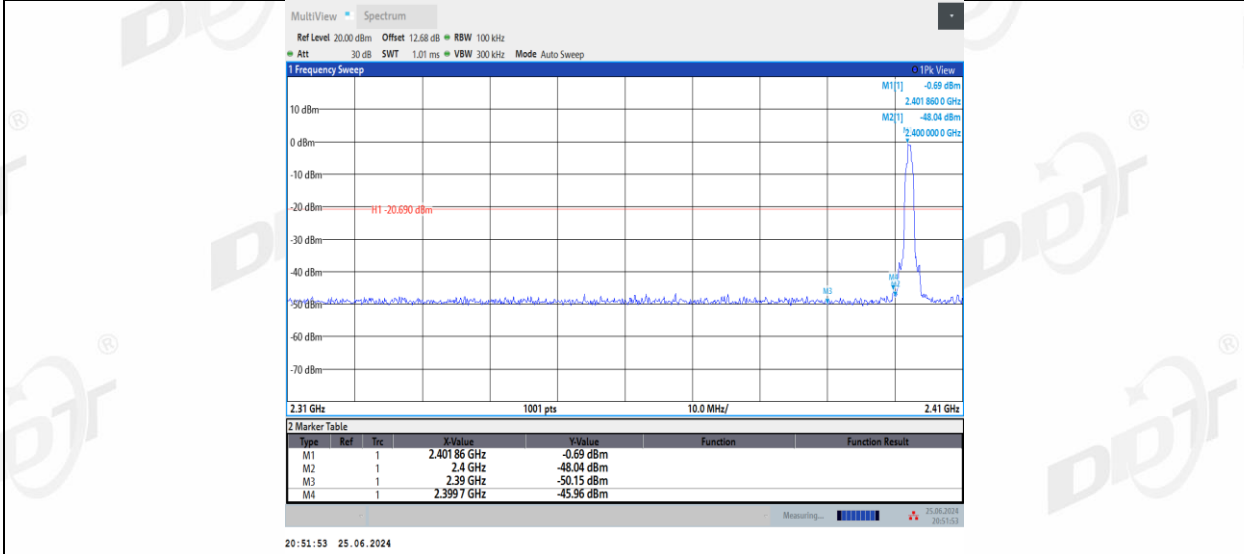


2DH5 Left side Low 2402

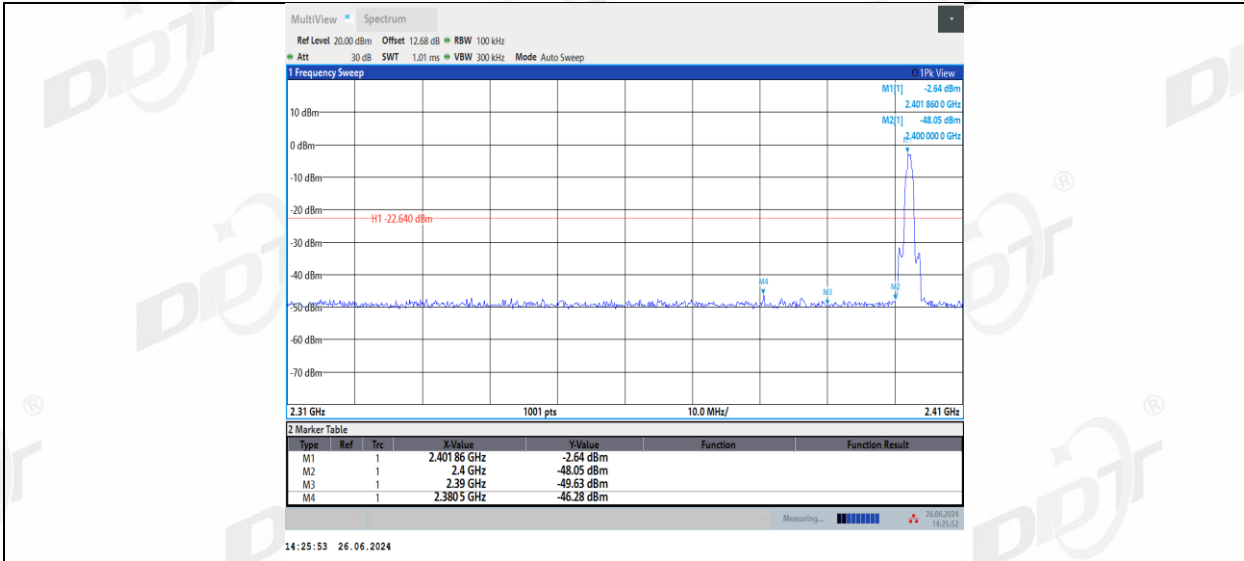


2DH5_Right side_High_2480

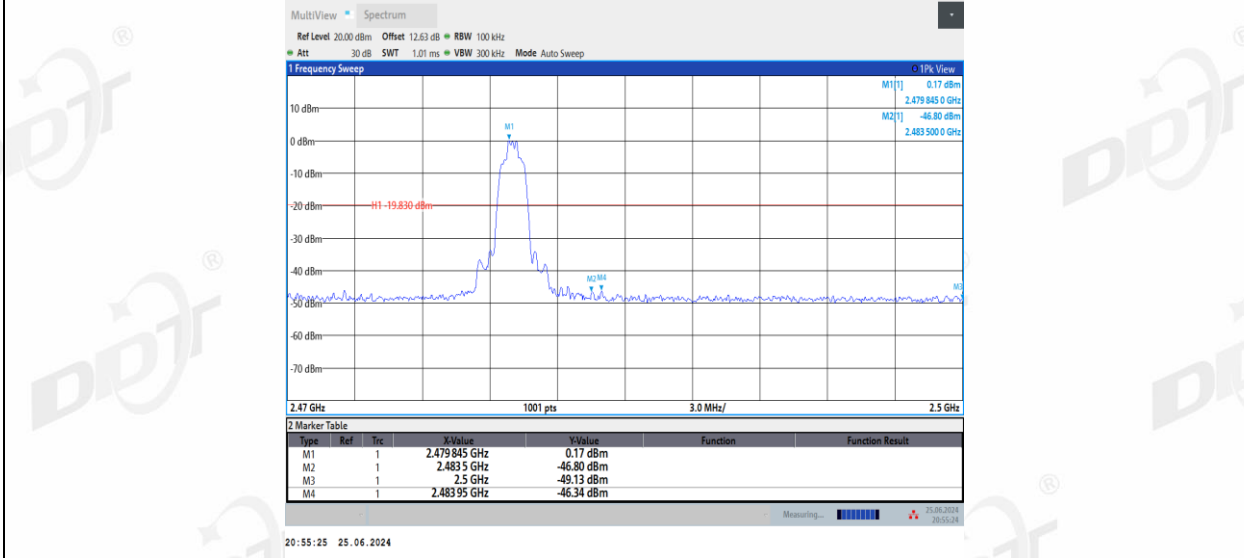


2DH5_Left side_High_2480

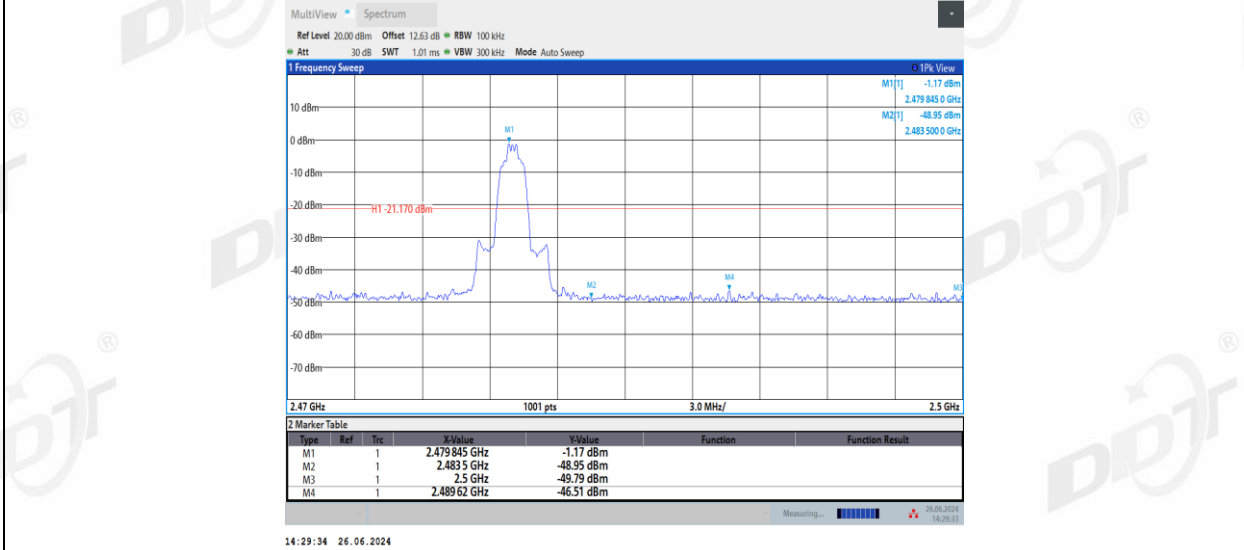


2DH5_Right side_Low_Hop_2402

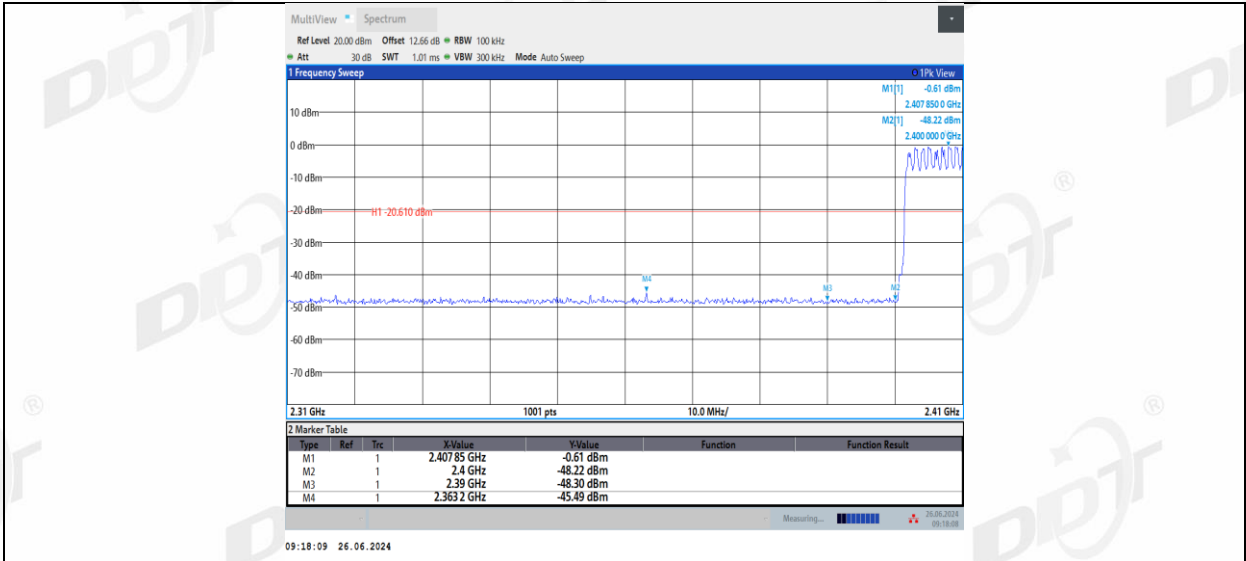


2DH5_Left side_Low_Hop_2402

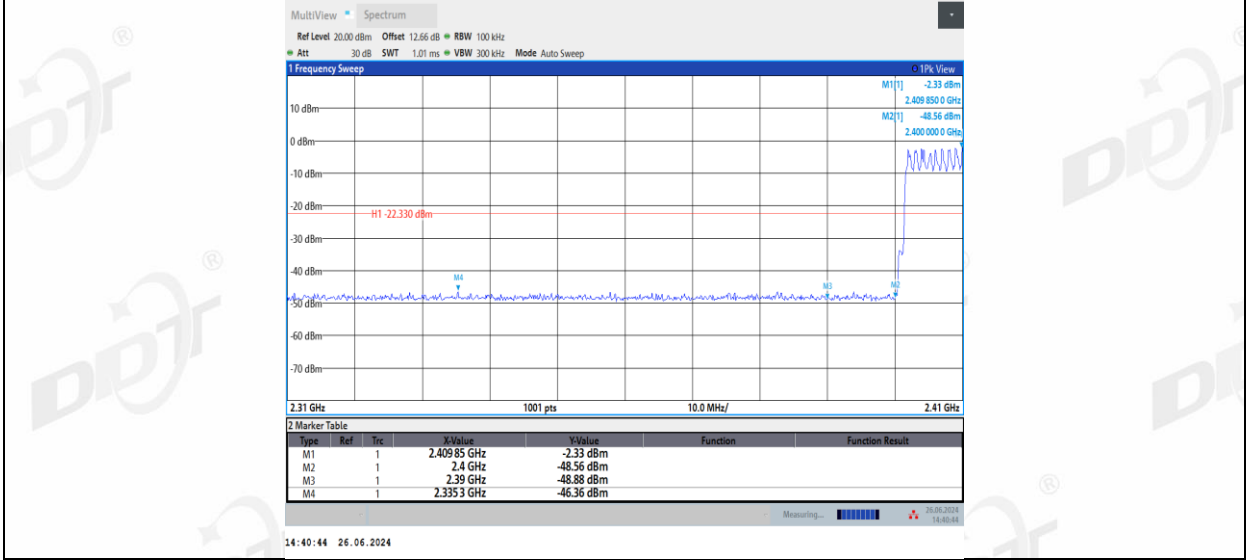


2DH5_Right side_High_Hop_2480

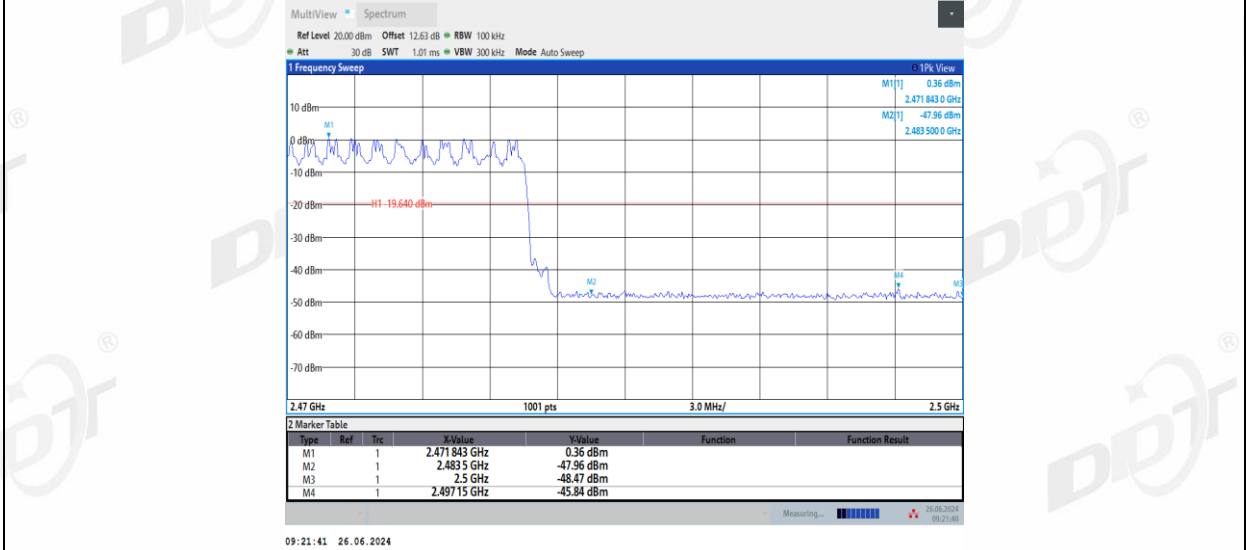


2DH5_Left side_High_Hop_2480

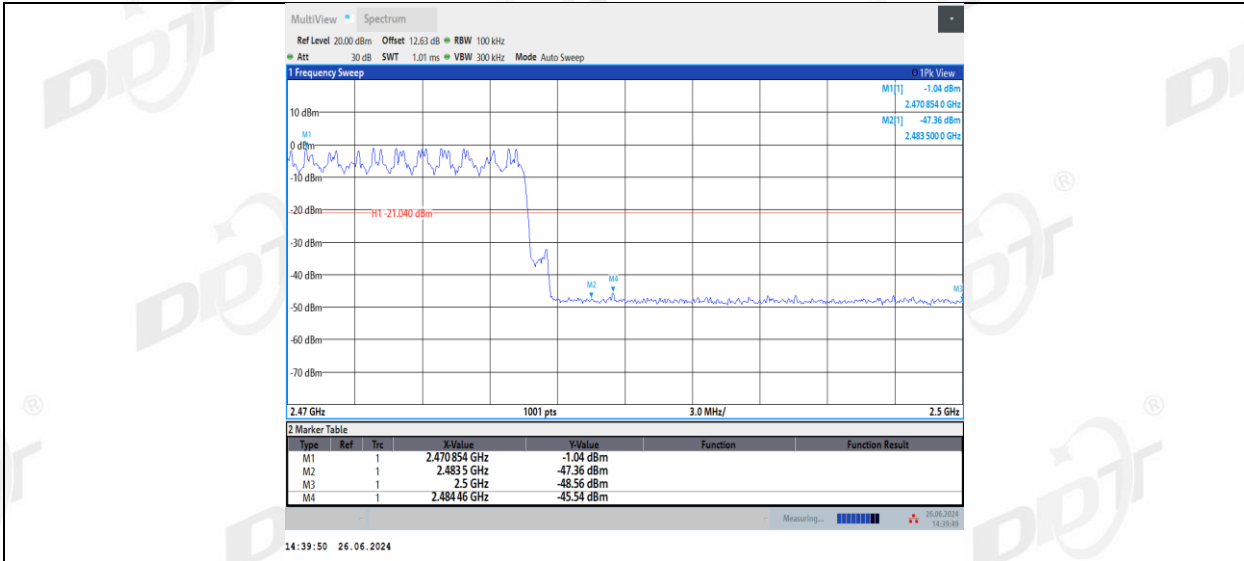


3DH5_Right side_Low_2402

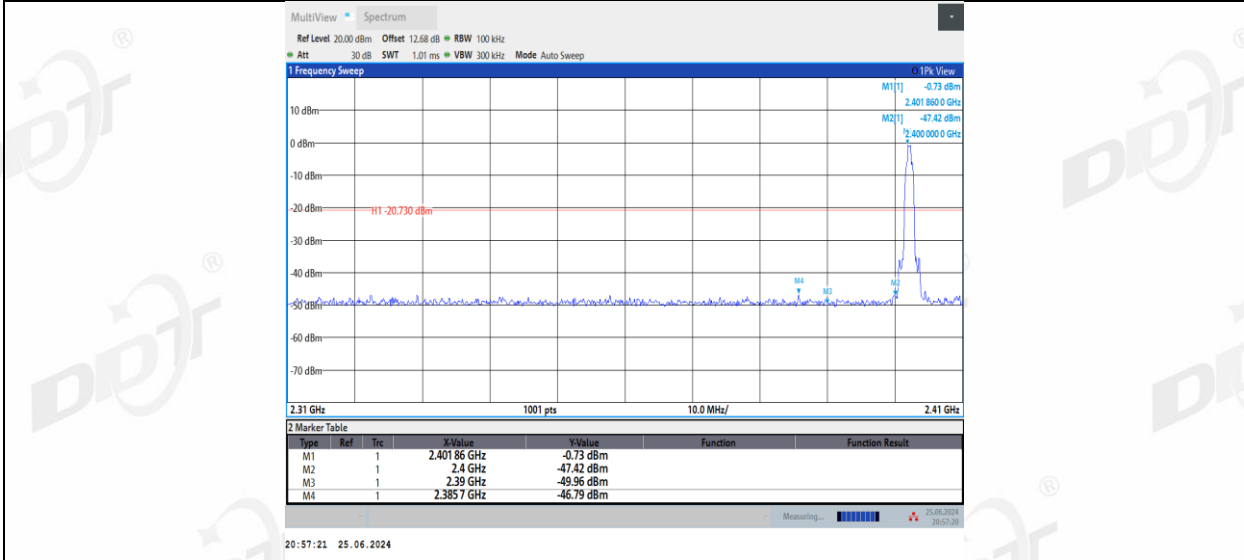


3DH5_Left side_Low_2402

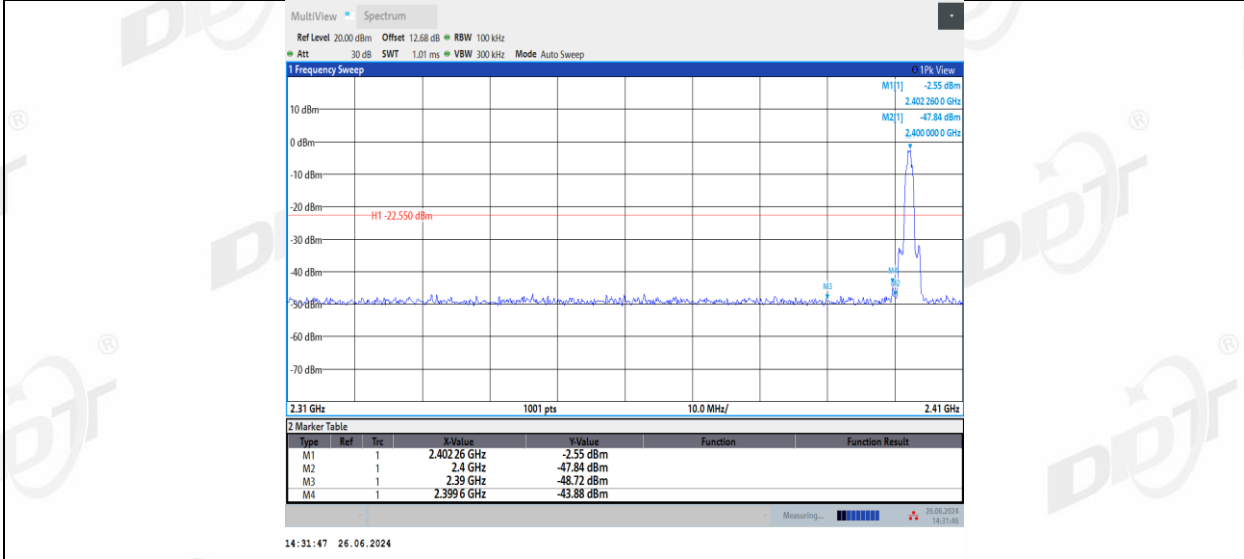


3DH5_Right side_High_2480

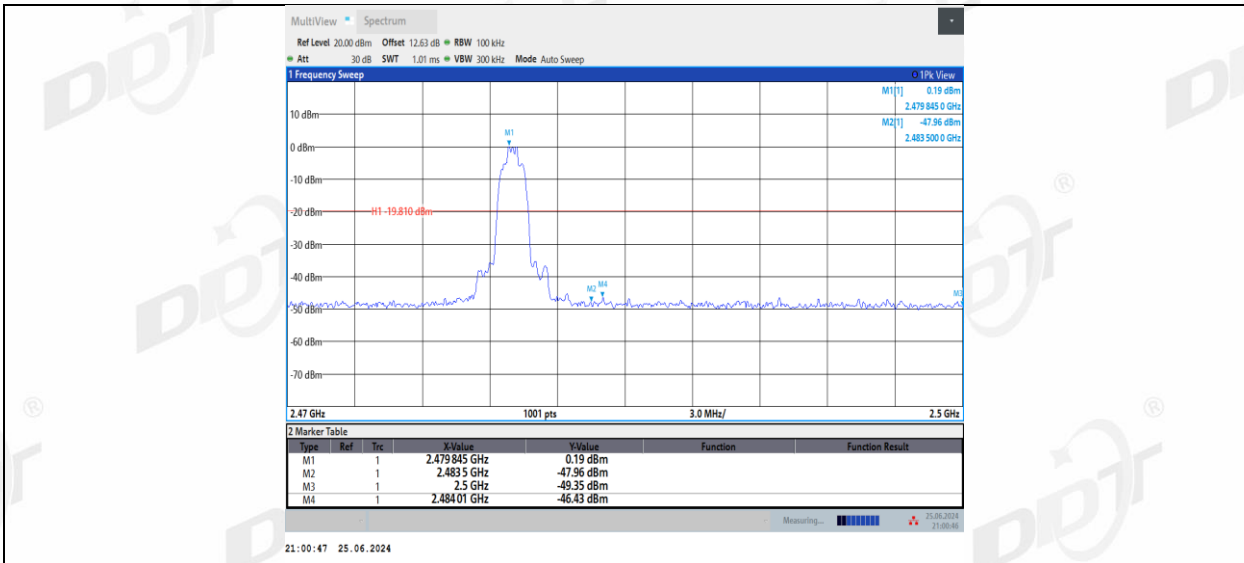


3DH5 Left side High 2480

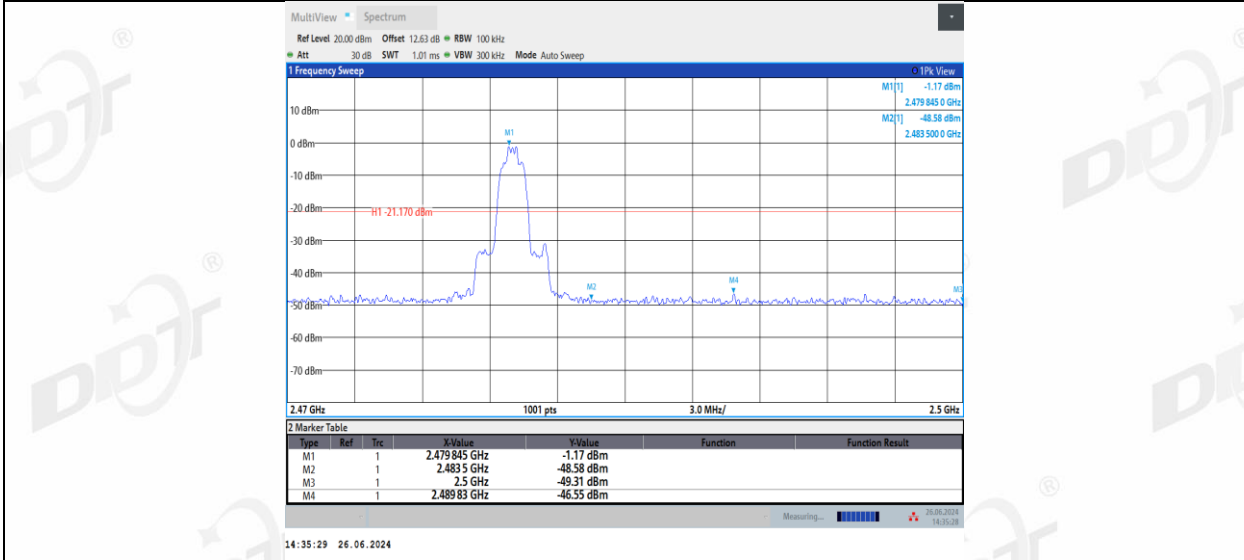

3DH5 Right side Low Hop 2402

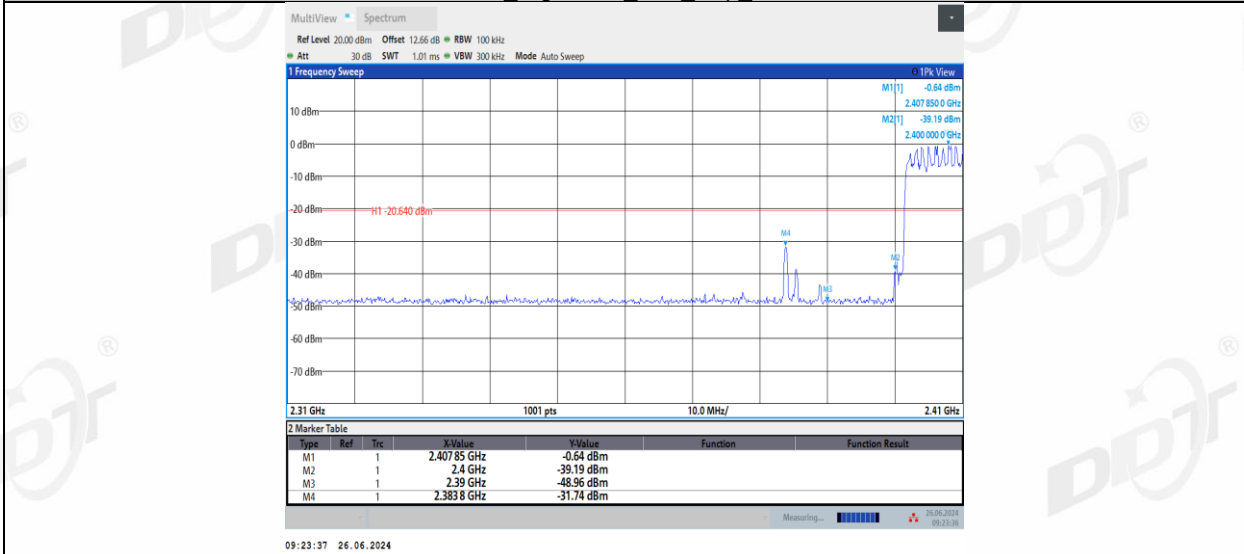


3DH5 Left side Low Hop 2402

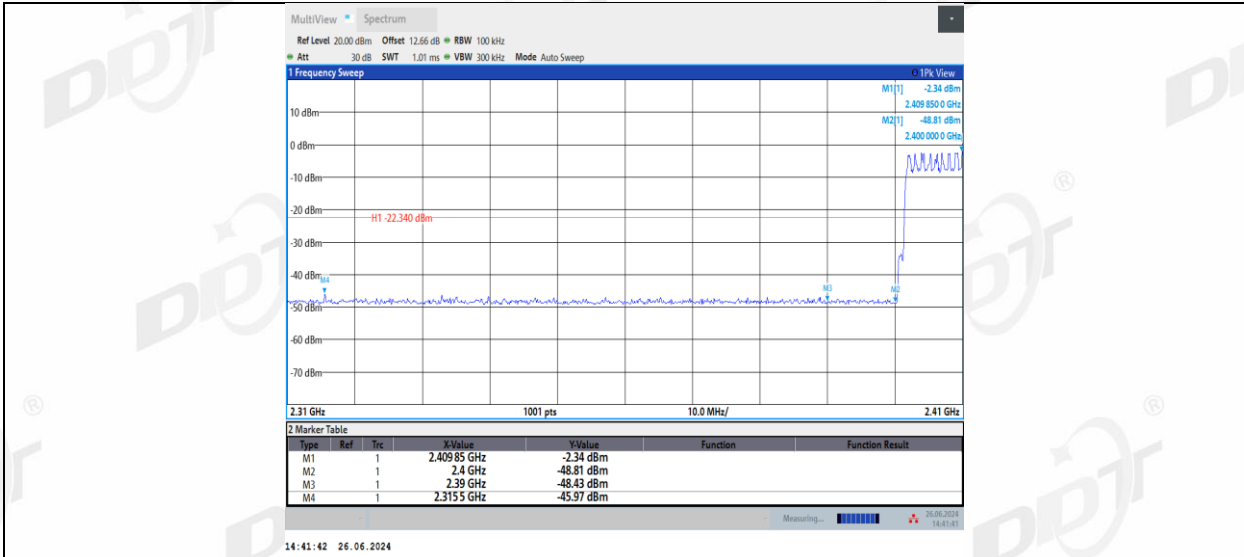

3DH5_Right side_High_Hop_2480




3DH5_Left side_High_Hop_2480

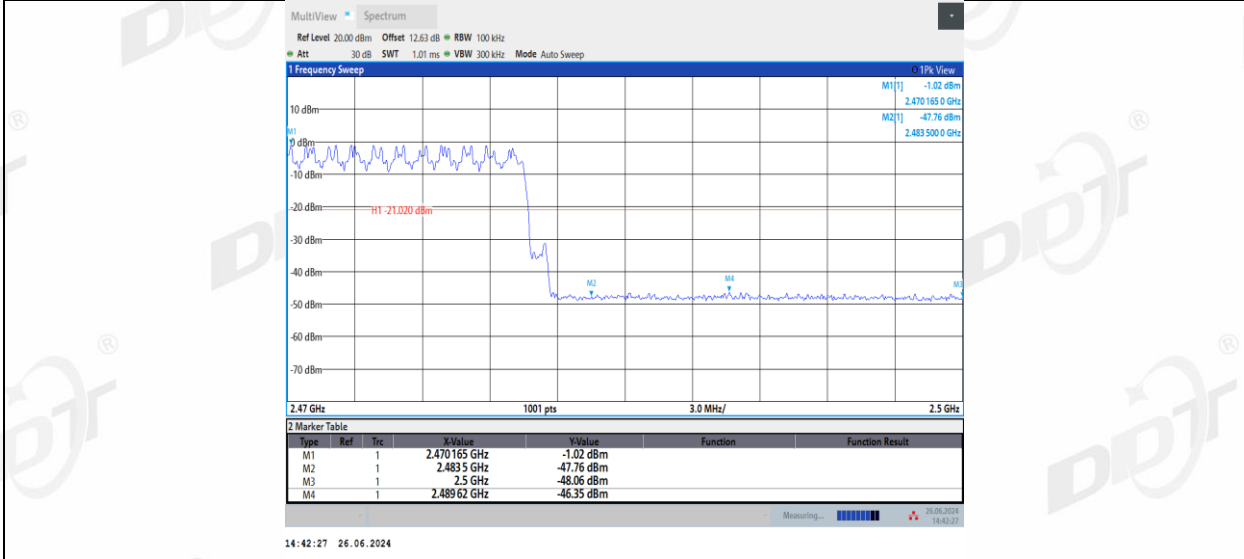

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

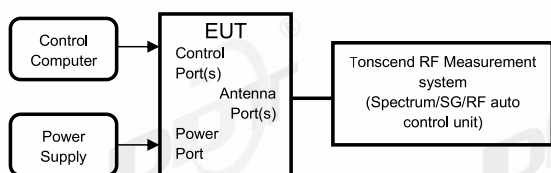

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


11.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 4#
Ambient Condition:	25.6-26.1℃,41.8-45.3%RH	Test Date:	2024.06.25-2024.06.26
Test Power Supply:	Battery	Sample Number:	S24053007-001


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
π /4-DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Test graphs

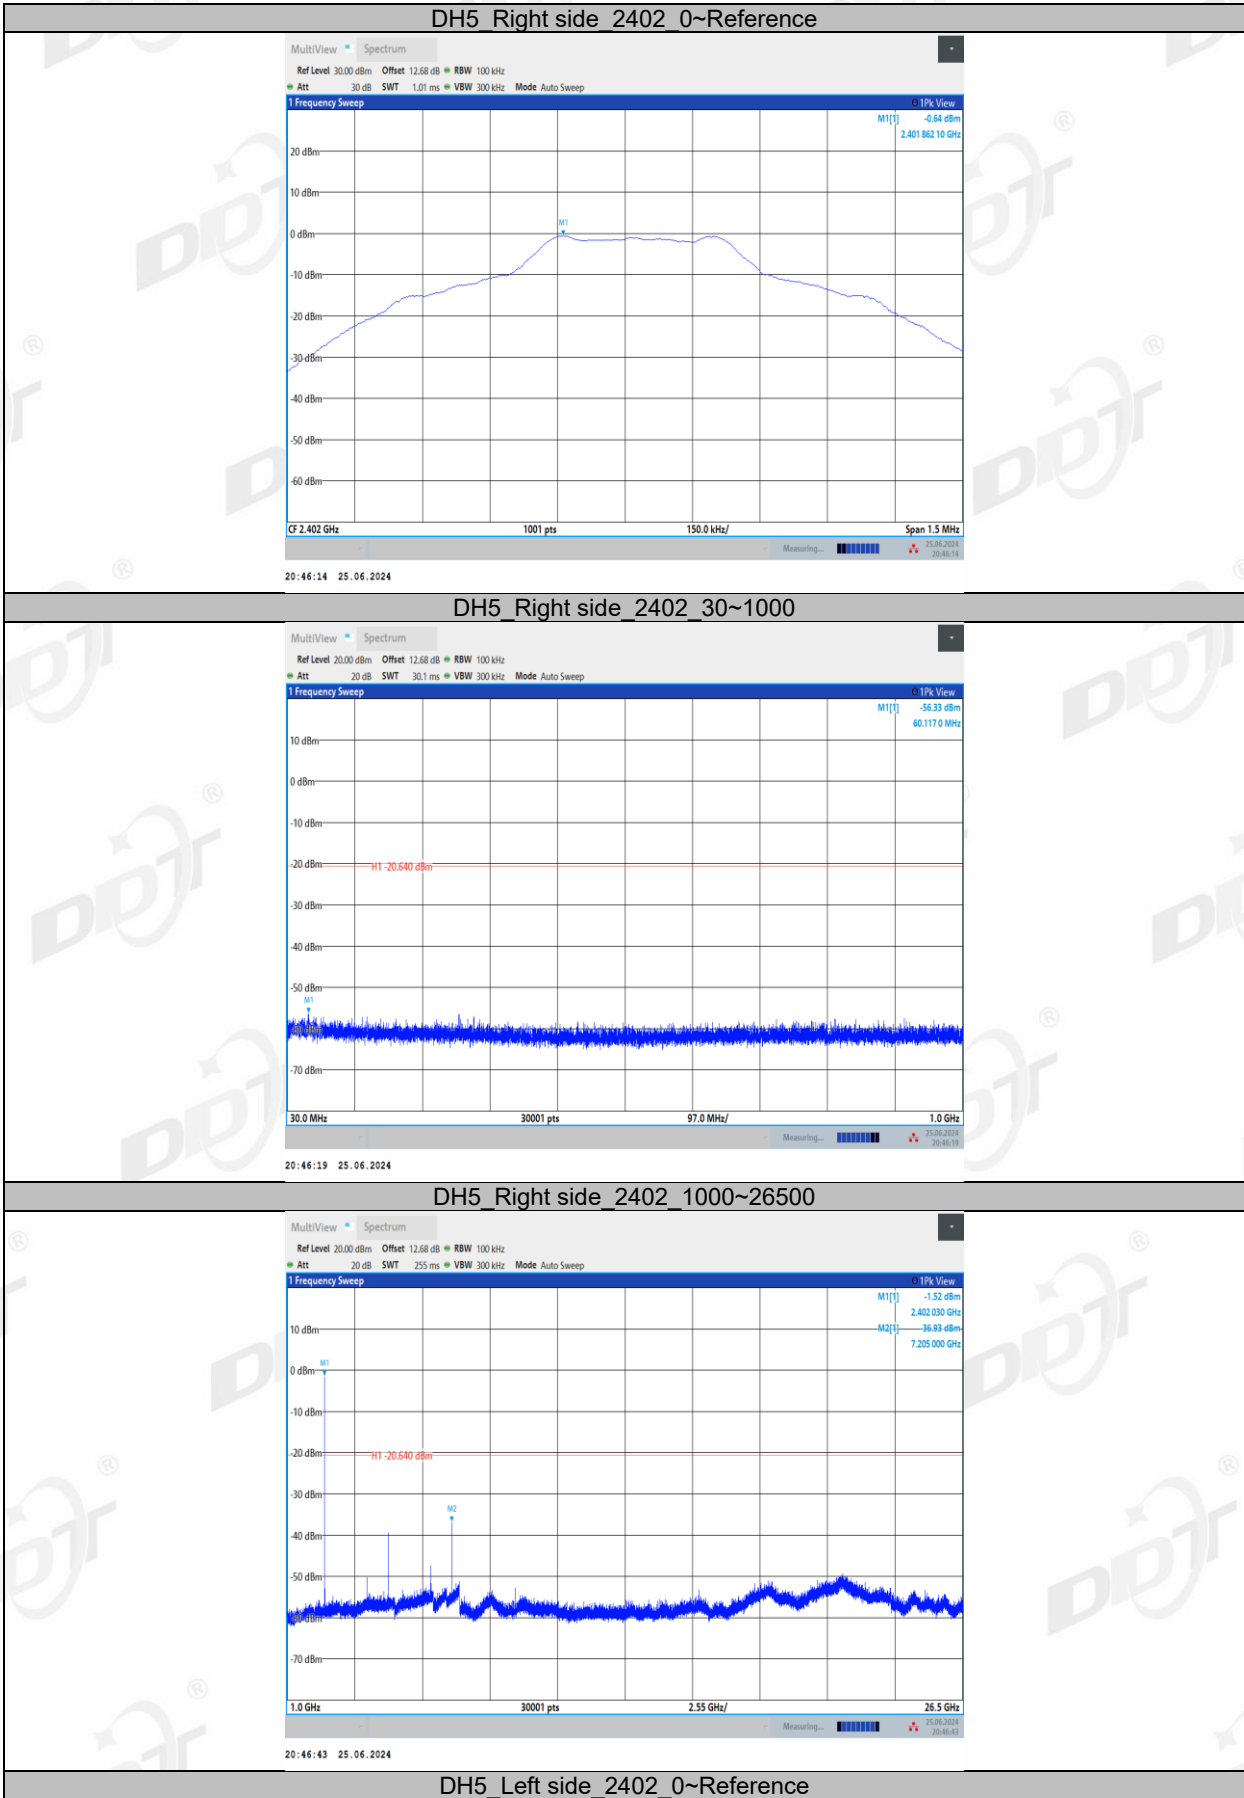


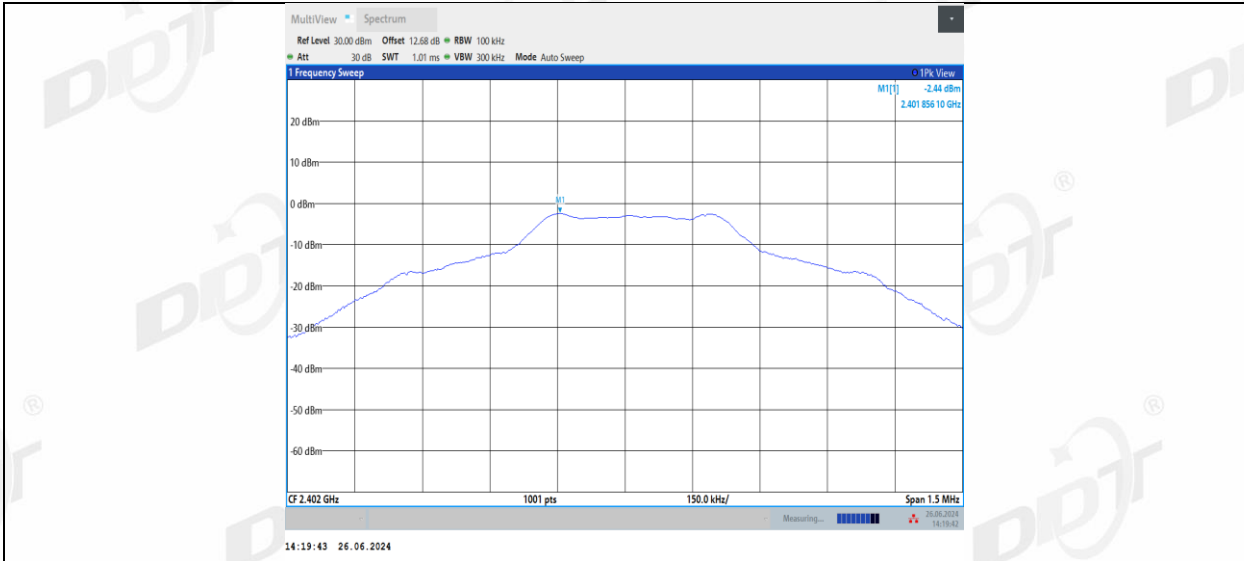


DH5_Left side_2402_30~1000

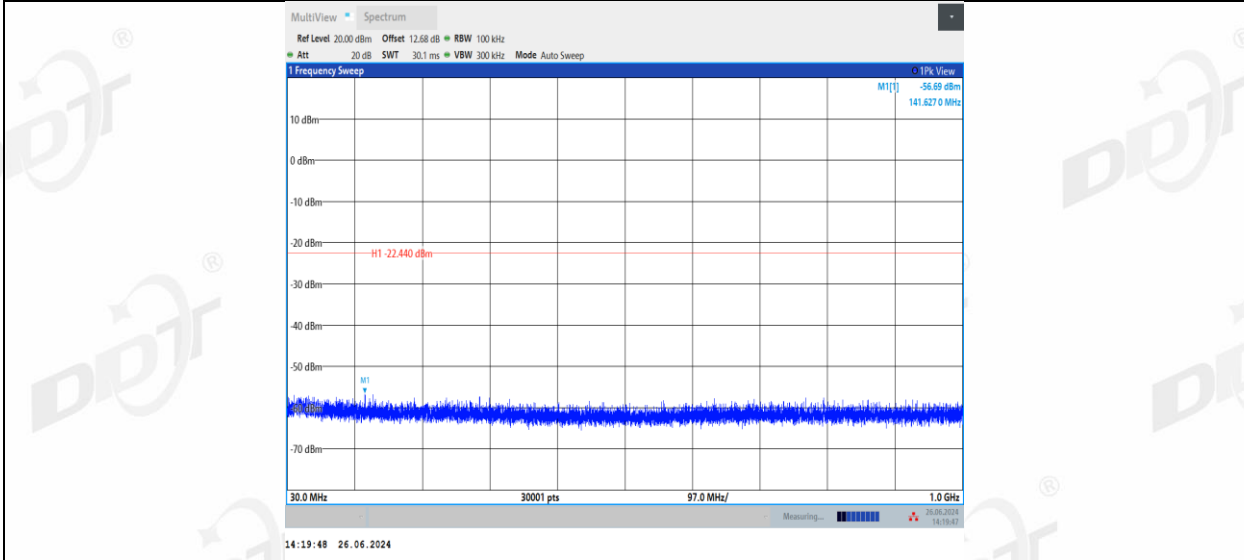


DH5_Left side_2402_1000~26500

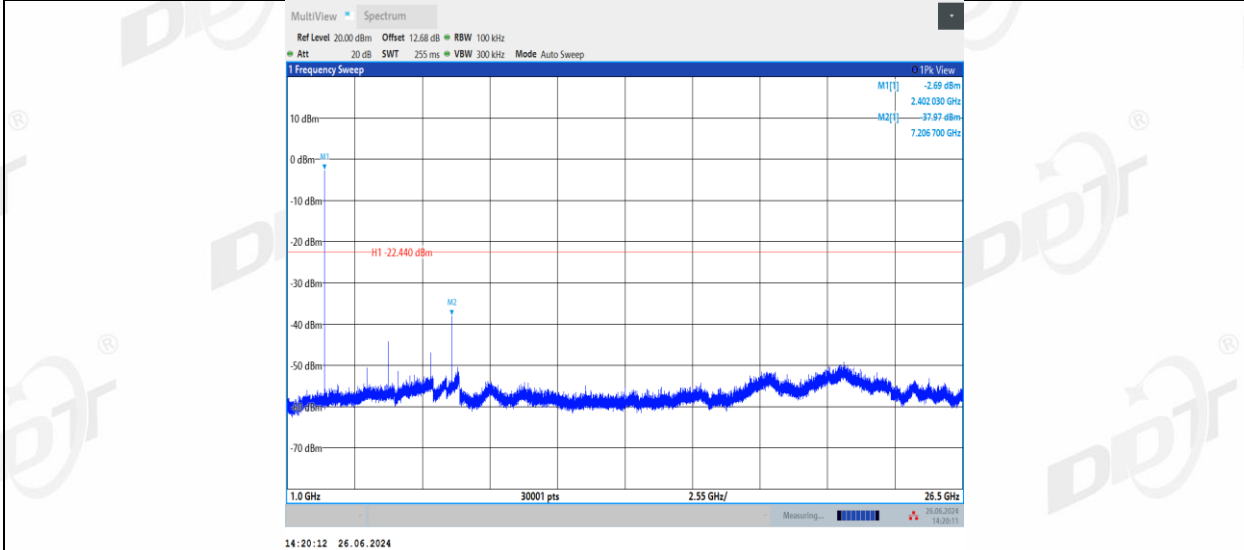


DH5_Right side_2441_0~Reference

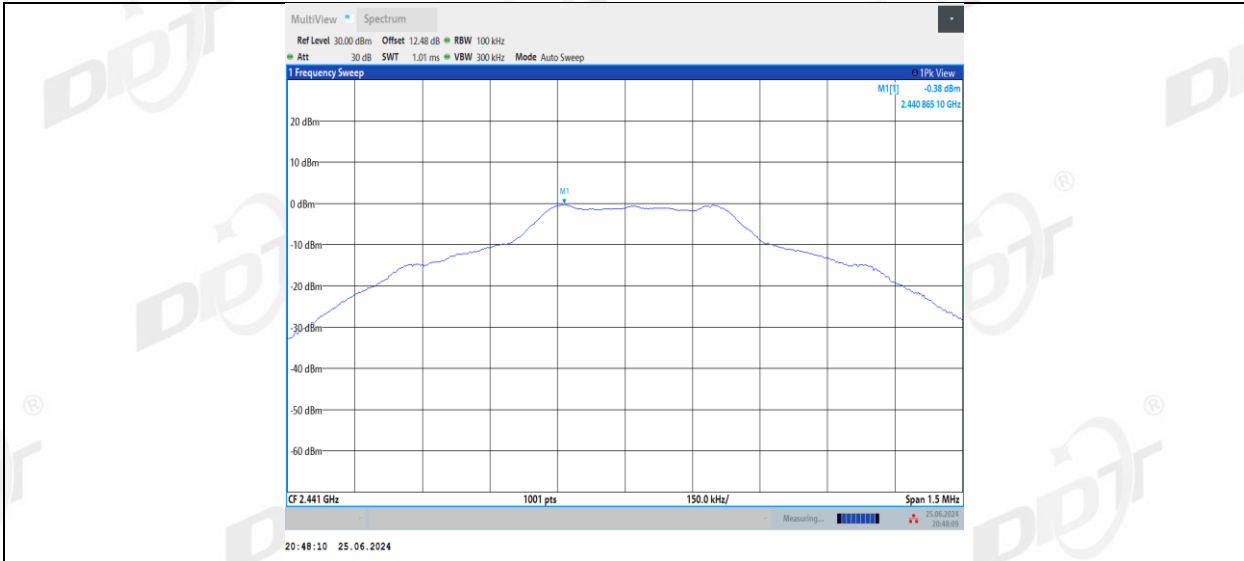


DH5_Right side_2441_30~1000

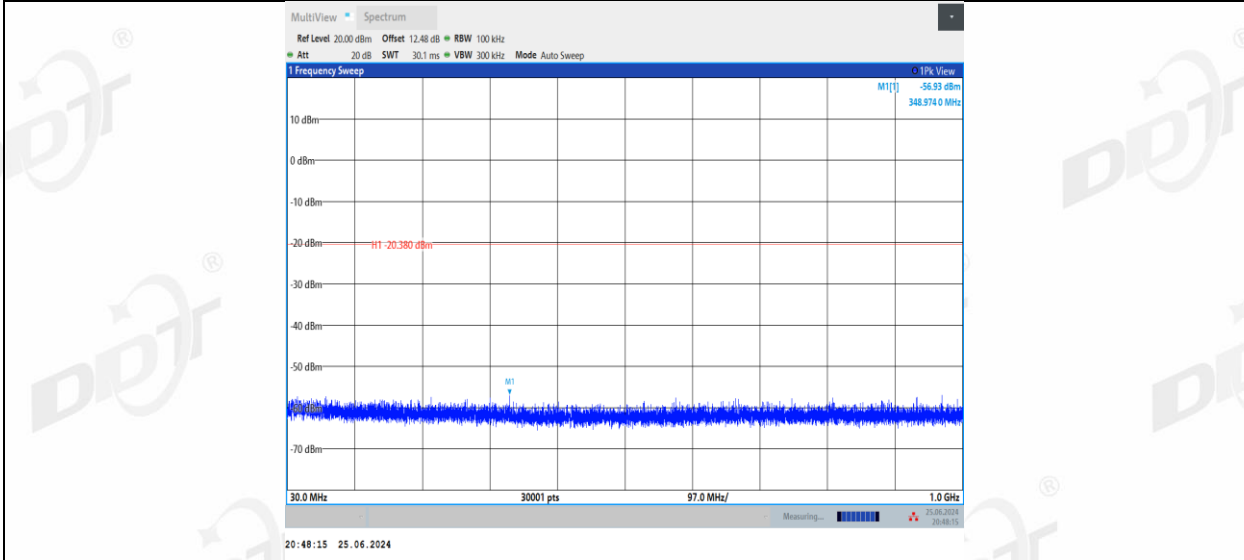


DH5_Right side_2441_1000~26500

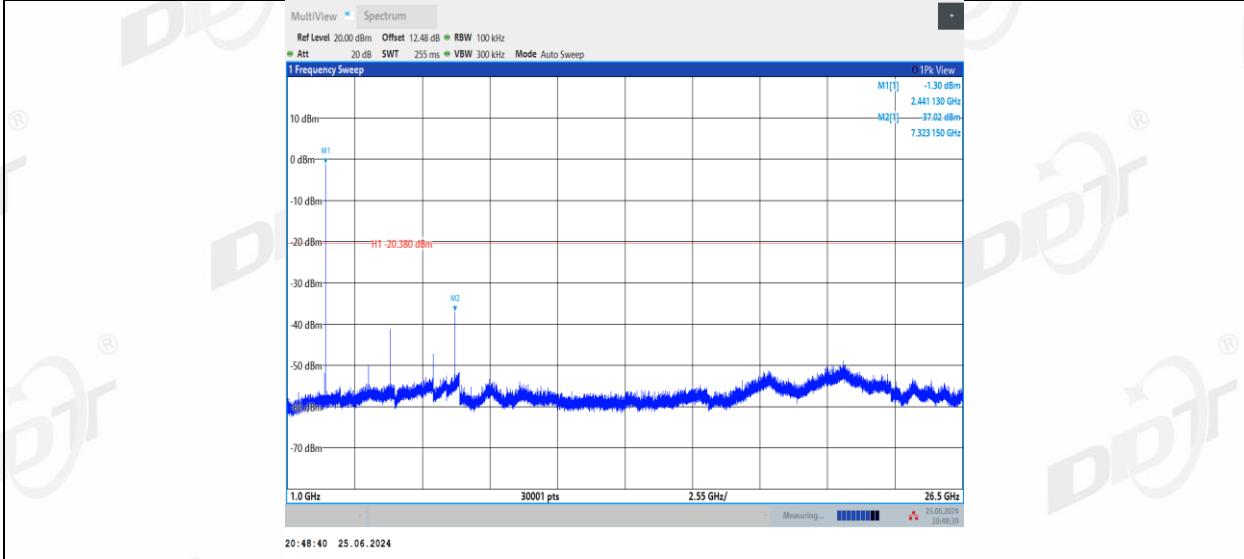


DH5_Left side_2441_0~Reference

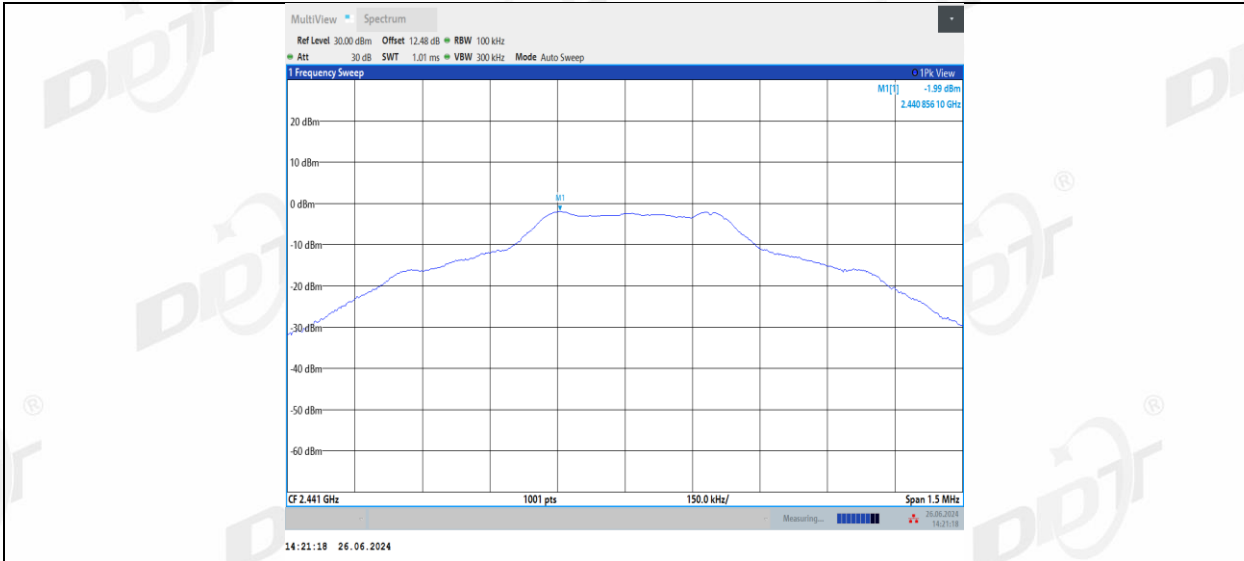


DH5_Left side_2441_30~1000

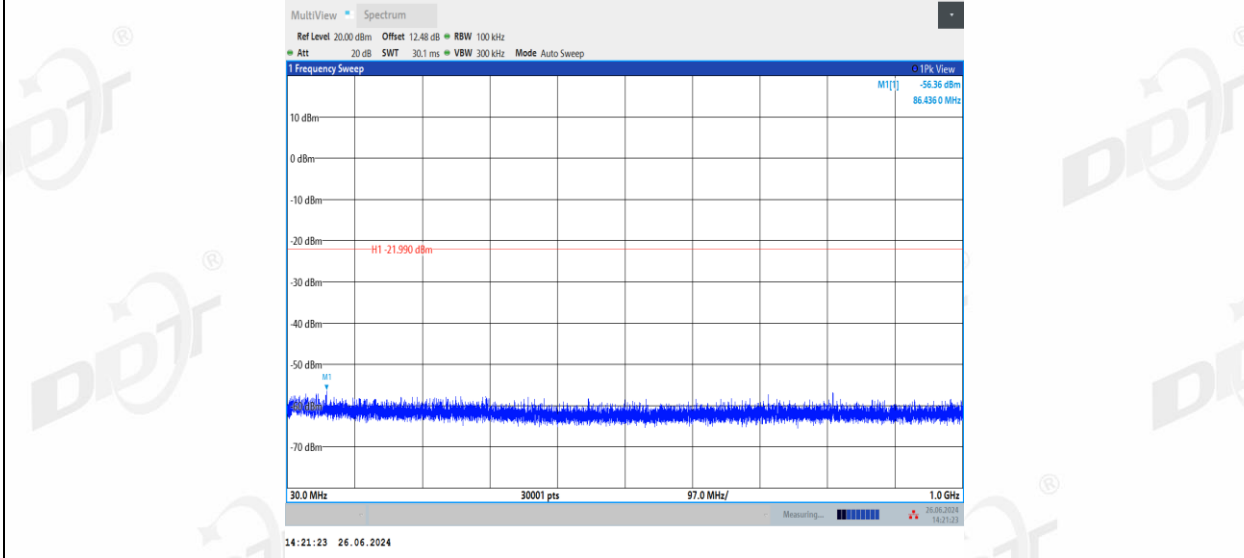


DH5_Left side_2441_1000~26500

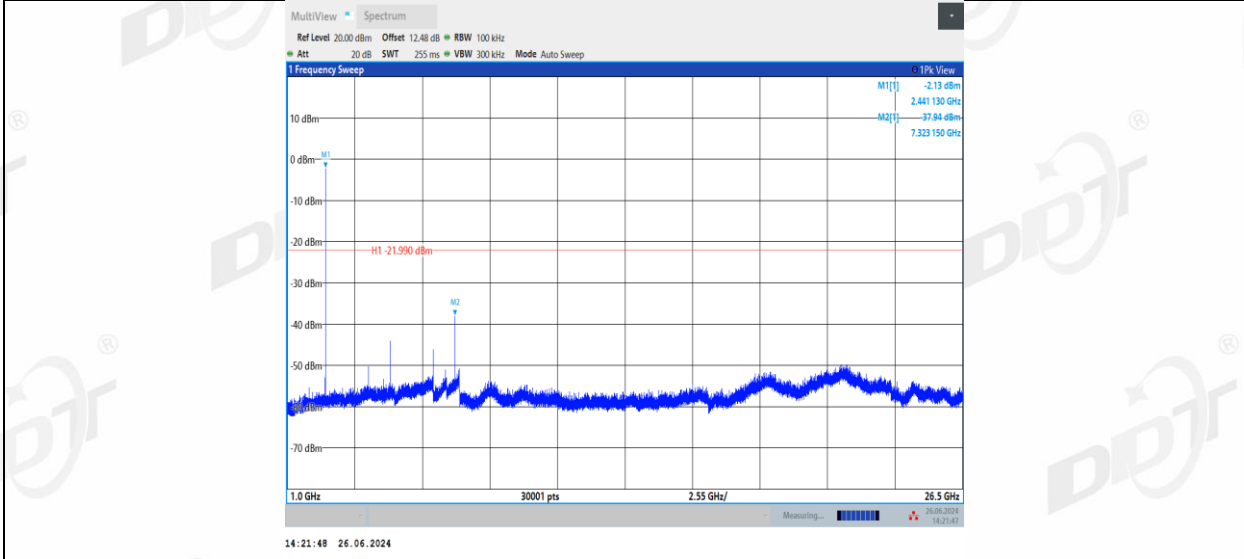


DH5_Right side_2480_0~Reference

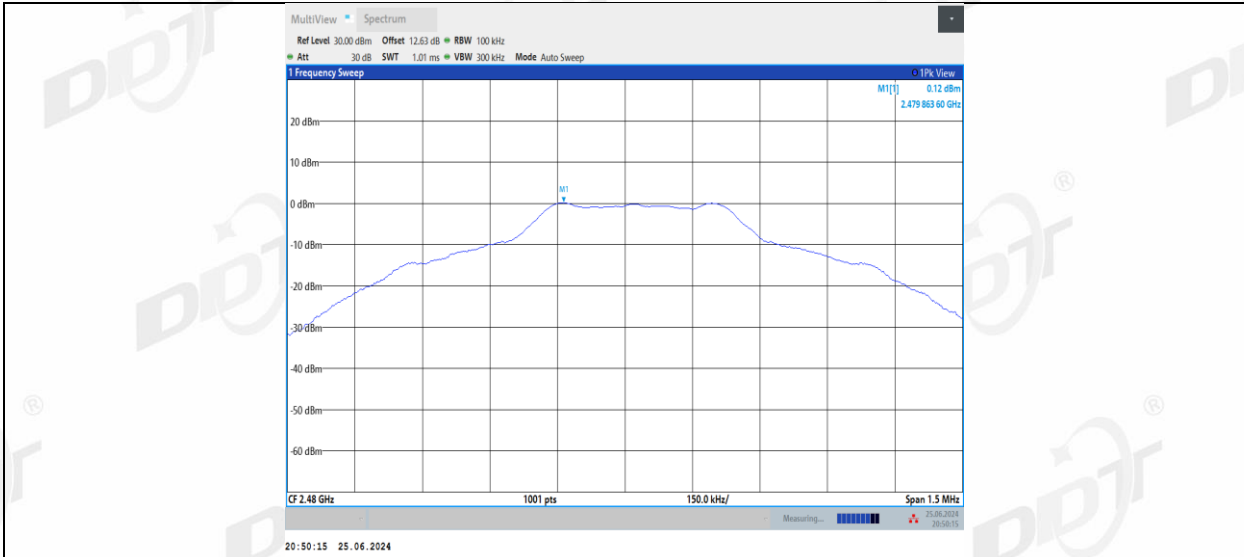


DH5_Right side_2480_30~1000

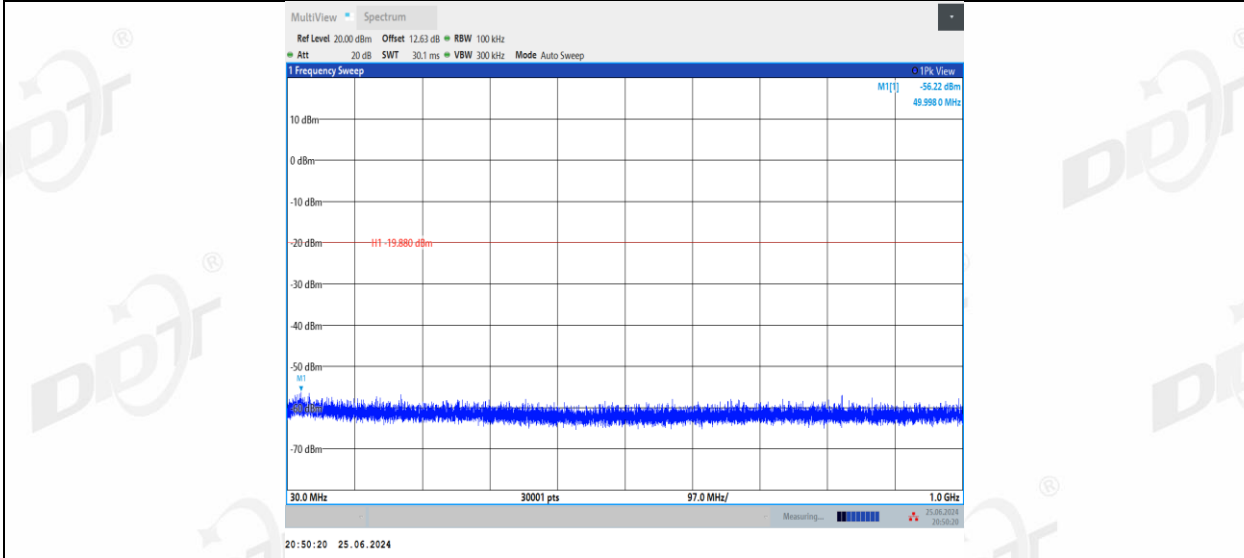


DH5_Right side_2480_1000~26500

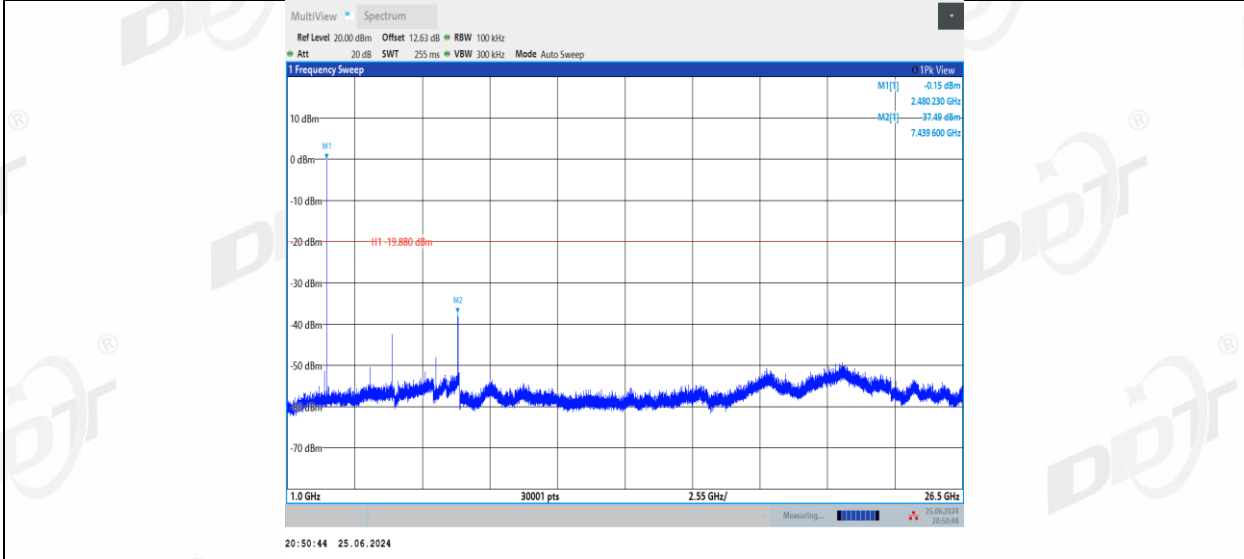


DH5_Left side_2480_0~Reference

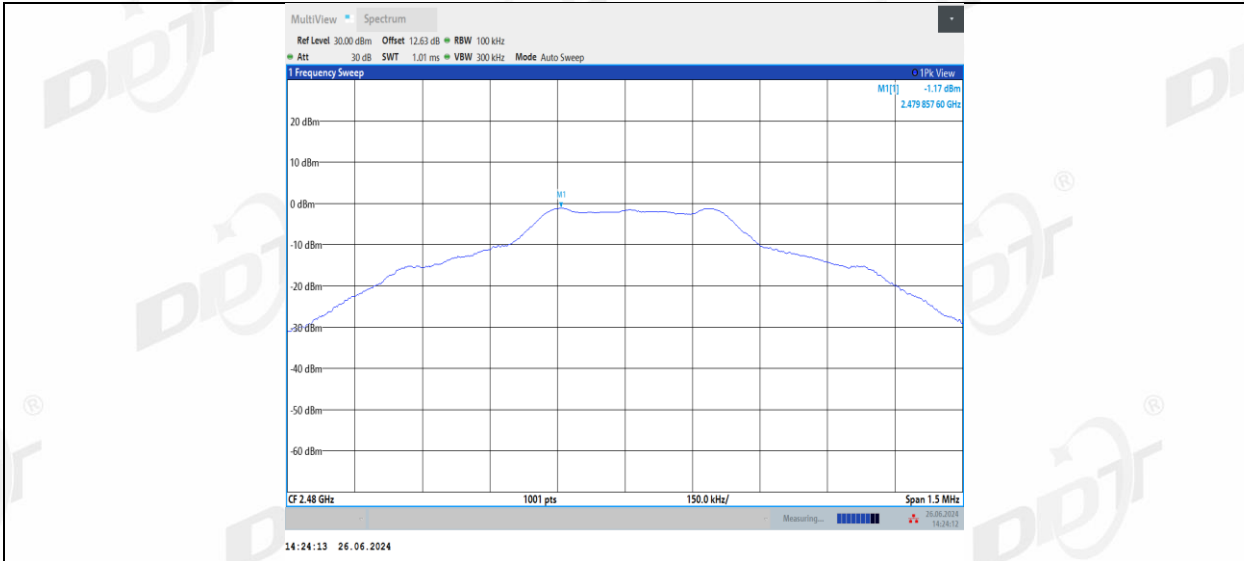


DH5 Left side 2480 30~1000

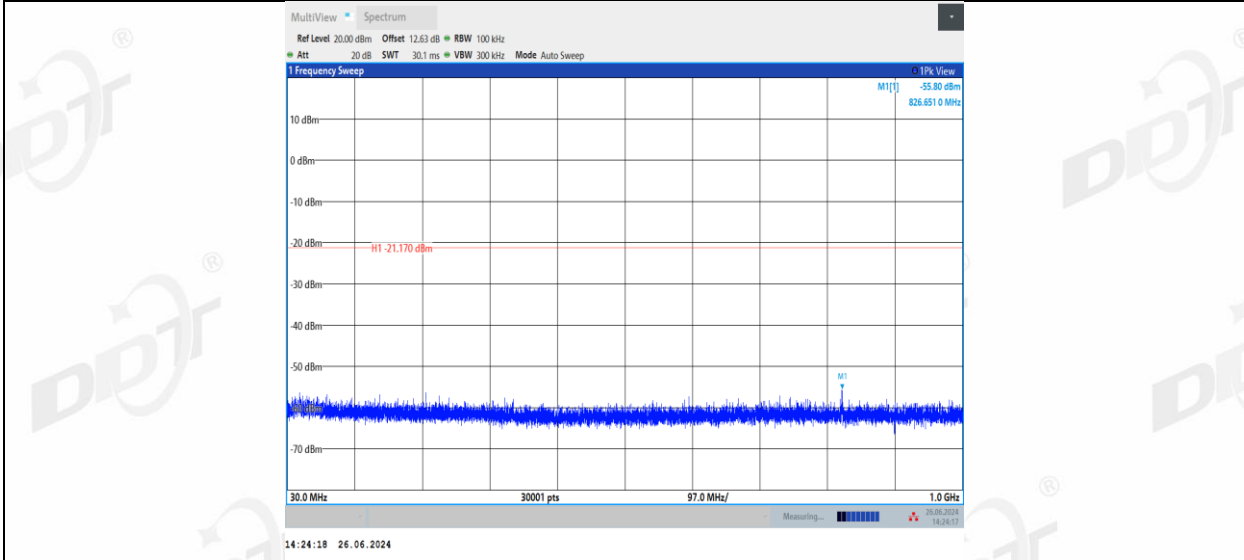


DH5 Left side 2480 1000~26500

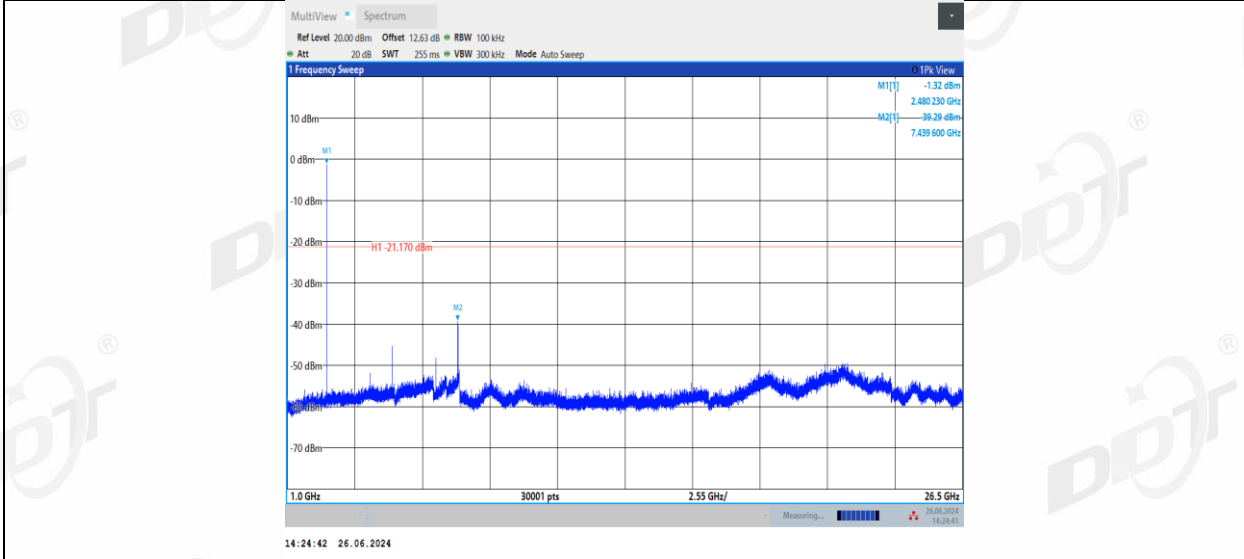


2DH5 Right side 2402 0~Reference

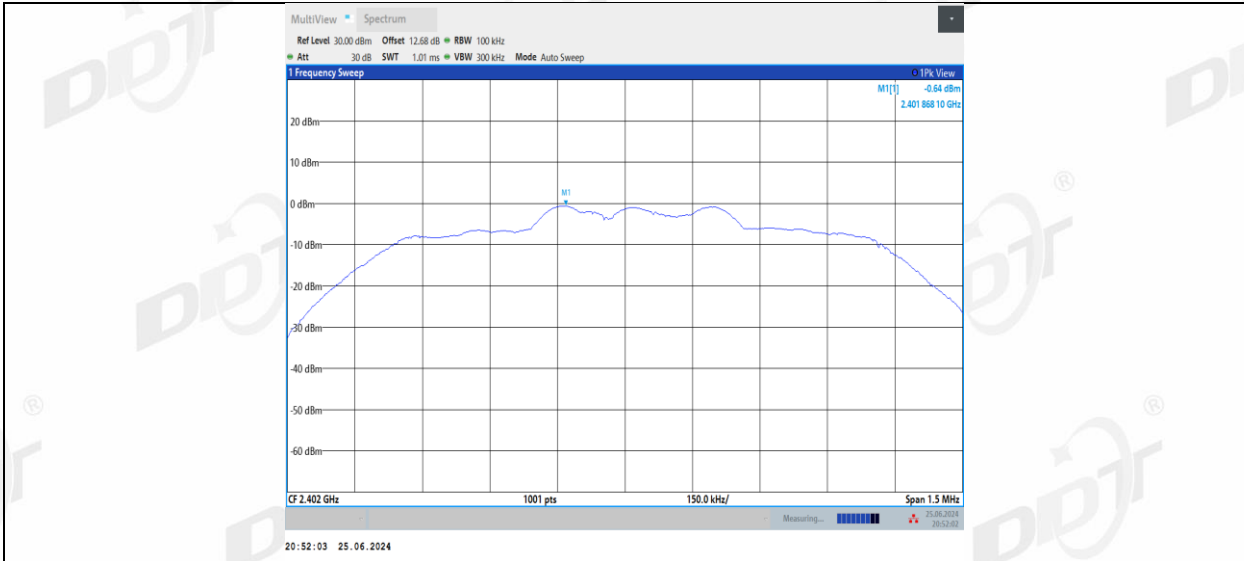


2DH5_Right side_2402_30~1000

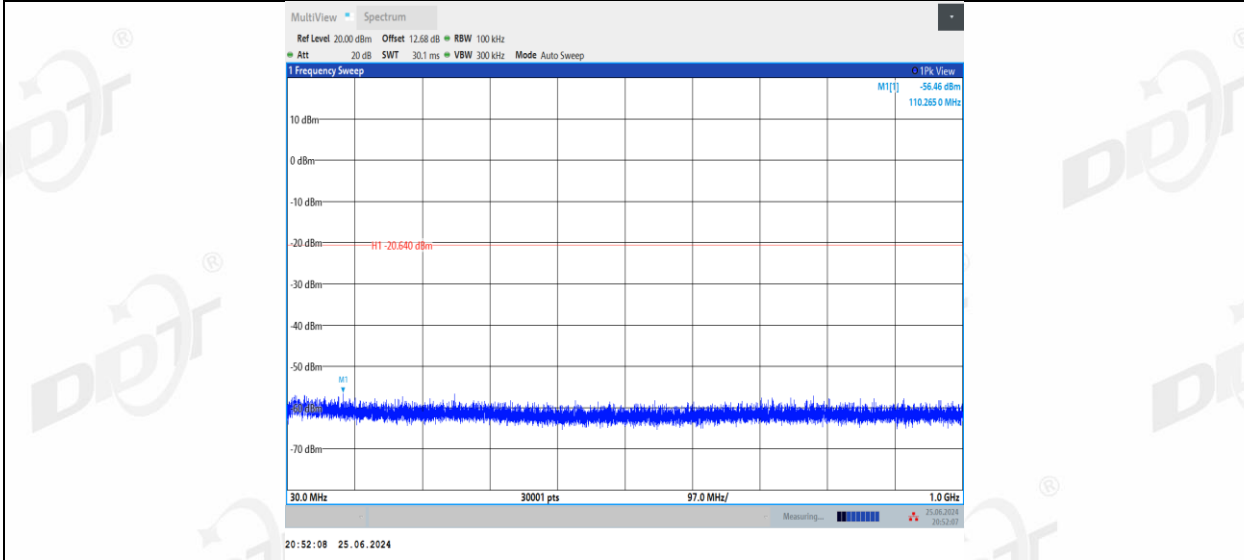


2DH5_Right side_2402_1000~26500

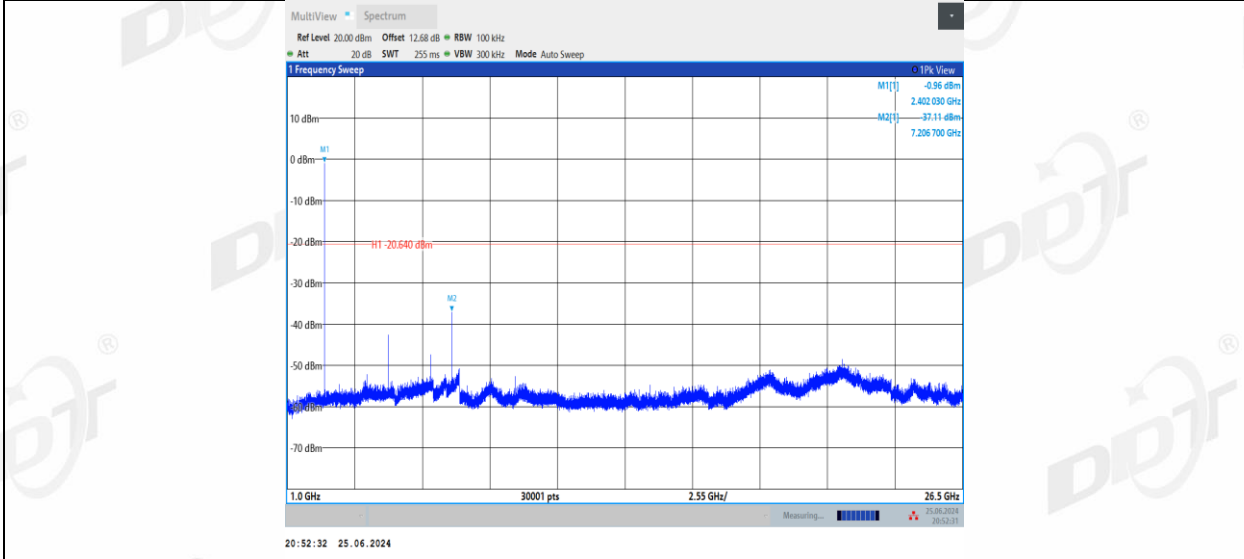


2DH5_Left side_2402_0~Reference

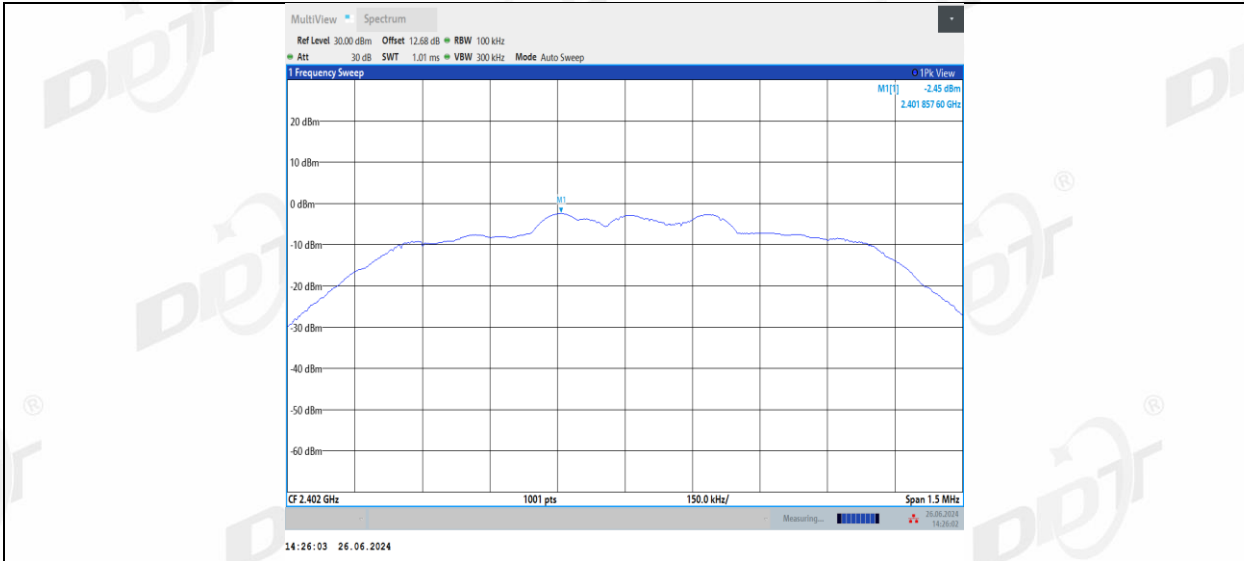


2DH5_Left side_2402_30~1000

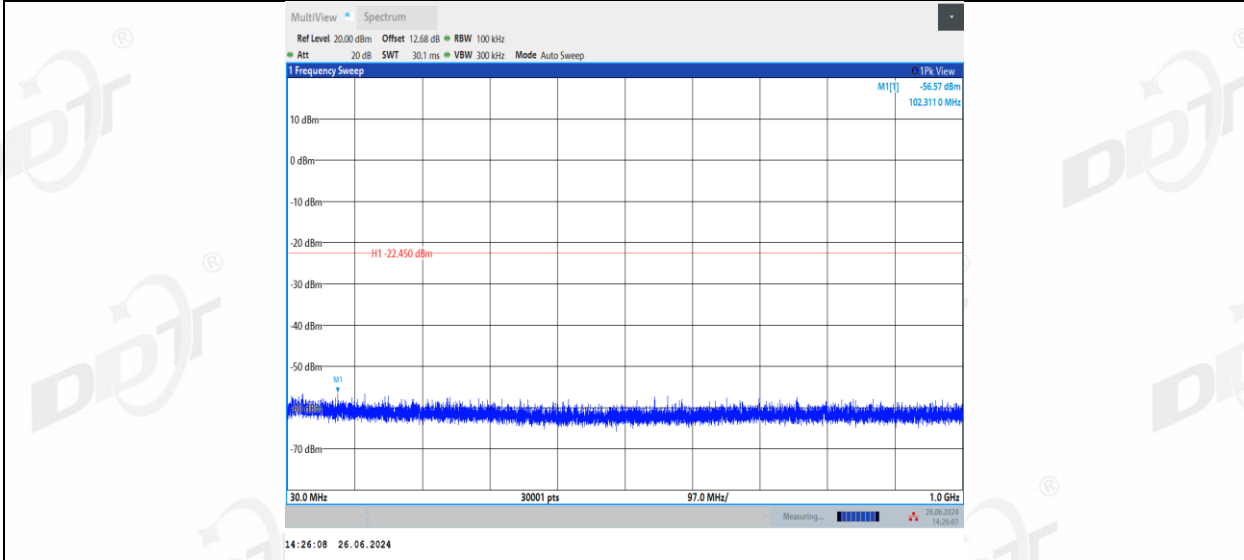


2DH5_Left side_2402_1000~26500

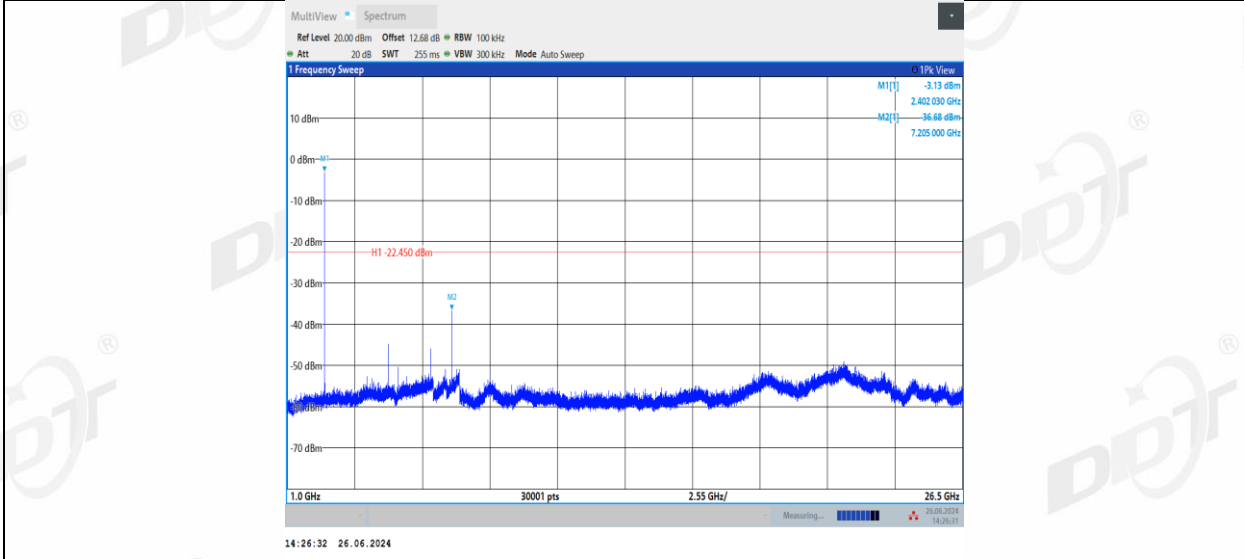


2DH5_Right side_2441_0~Reference

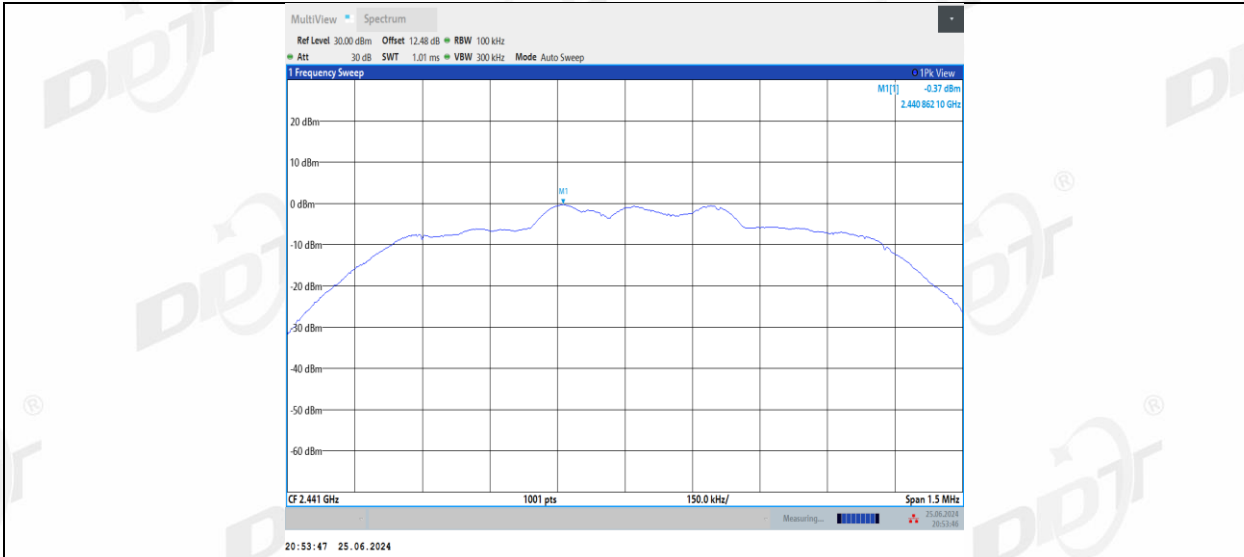

2DH5_Right side_2441_30~1000

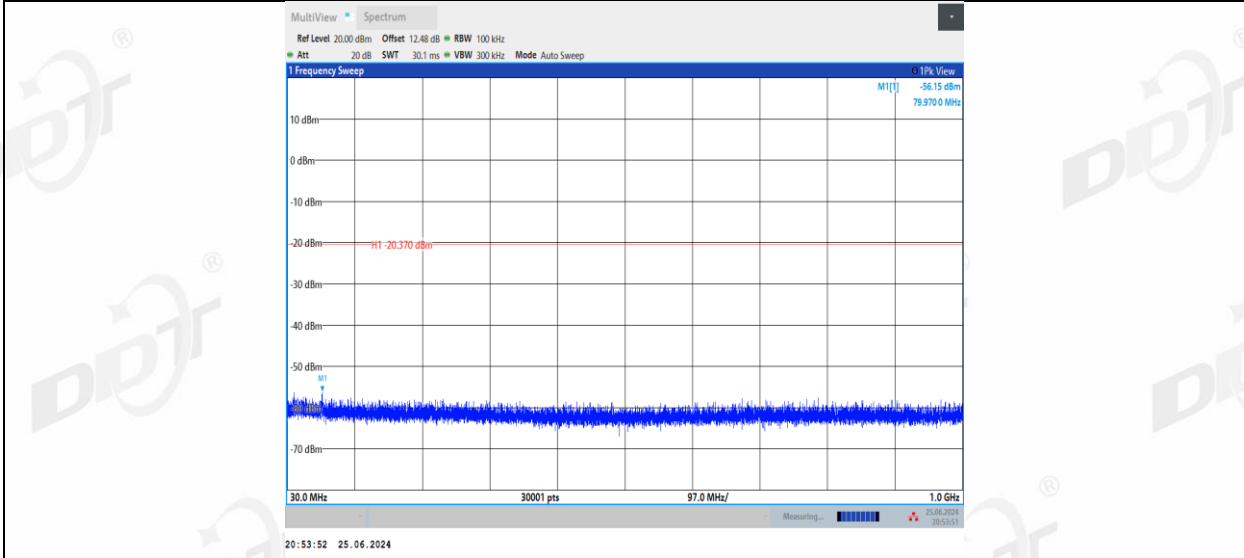

2DH5_Right side_2441_1000~26500

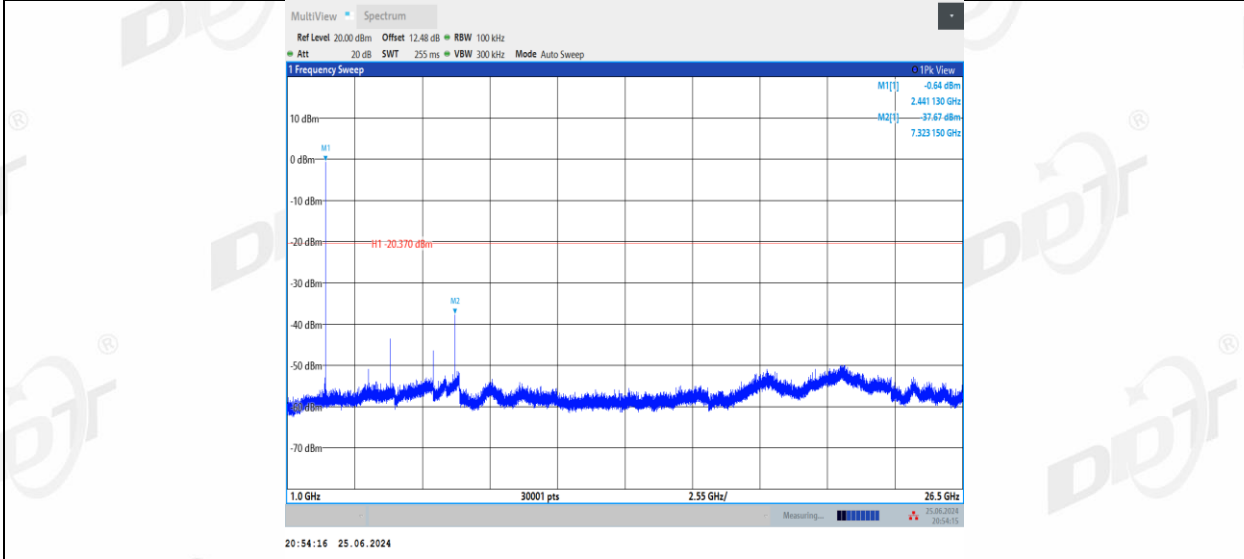

2DH5_Left side_2441_0~Reference