

FCC TEST REPORT

FCC ID: 2AI3Z-C7028A

On Behalf of

Video Plus Print Company Ltd.

Video Brochure

Model No.: C7028, C7014, C7021, C7006

Prepared for : Video Plus Print Company Ltd.

Address

#1005, 10/F1, Hermes Commercial Centre, 4-4A Hillwood

Road, TST, Kowloon, HongKong

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.

Address Building B, East Area of Nanchang Second Industrial Zone,

Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China

Report Number : T1861450 01
Date of Receipt : July 25, 2016
Date of Test : July 25-27, 2016
Date of Report : July 28, 2016

Version Number : REV0

Report No.: T1861450 01

TABLE OF CONTENTS

<u>De</u>	escript	tion	Page
1.	Sumi	mary of standards and results	4
_,		Description of Standards and Results	
2.		ERAL INFORMATION	
	2.1.	Description of Device (EUT)	
	2.2.	Tested Supporting System Details	
	2.3.	Block Diagram of connection between EUT and simulators	
	2.4.	Test mode Description	
	2.5.	Test Facility	7
	2.6.	Measurement Uncertainty	7
3.	POW	VER LINE CONDUCTED Emission test	
	3.1.	Test Equipment	8
	3.2.	Block Diagram of Test Setup	8
	3.3.	Power Line Conducted Emission Test Limits	8
	3.4.	Configuration of EUT on Test	9
	3.5.	Operating Condition of EUT	9
	3.6.	Test Procedure	9
	3.7.	Conducted Disturbance at Mains Terminals Test Results	10
4.	Radi	ated emission Test	13
	4.1.	Test Equipment	13
	4.2.	Block Diagram of Test Setup	13
	4.3.	Radiated Emission Limit	14
	4.4.	Configuration of EUT on Test	15
	4.5.	Operating Condition of EUT	15
	4.6.	Test Procedure	15
	4.7.	Radiated Disturbance Test Results	16
5.	Photo	ograph	21
	5.1.	Photos of Radiated Emission Test (In Semi Anechoic Chamber)	21
	5.2.	Photos of Power Line Conducted Emission Test	22
6.	Photo	os of the EUT	23

TEST REPORT DECLARATION

Applicant : Video Plus Print Company Ltd.

Manufacturer : Video Plus Print Company Ltd.

EUT Description : Video Brochure

(A) Model No. : C7028, C7014, C7021, C7006

(B) Trademark : N/A

(C) Ratings Supply: Charge: DC 5V, Work: DC 3.7V

(D) Test Voltage : DC 5V from USB port, DC 3.7V from battery

Report No.: T1861450 01

Reak Yang

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart B Class B 2016, ANSI C63.4:2014

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature)..... Reak Yang
Test Engineer

Approved by (name + signature).....: Simple Guan
Project Manager

Date of issue...... July 28, 2016

1. SUMMARY OF STANDARDS AND RESULTS

1.1.Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

EMISSION						
Description of Test Item	Standard Limits		Results			
Power Line Conducted	FCC Part 15:2016	Class B	D			
Emission Test	ANSI C63.4:2014	Class B	ı			
Dadistal Essissian Tast	FCC Part 15:2016	Class D	P			
Radiated Emission Test	ANSI C63.4:2014	Class B	r			

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

2. GENERAL INFORMATION

2.1.Description of Device (EUT)

Description : Video Brochure

Model Number : C7028, C7014, C7021, C7006

Diff

There is no difference between all the models, except the appearance

color and model name, so this report performs the model C7028

Test Voltage : DC 5V from USB port, DC 3.7V from battery

Input: AC 100-240V, 50/60Hz, 0.2A

AC Adapter : Output: DC 5V, 1000mA

Model: ZAU-F050100A-01

Highest frequency: 369MHz

Software version : 1.11.7.20160505_release

Hardware version : ATJ2273_For_Disney_V3_20160523

Trademark : N/A

Applicant : Video Plus Print Company Ltd.

Address #1005, 10/F1, Hermes Commercial Centre, 4-4A Hillwood Road, TST,

. Kowloon, HongKong

Manufacturer : Video Plus Print Company Ltd.

Address #1005, 10/F1, Hermes Commercial Centre, 4-4A Hillwood Road, TST,


Kowloon, HongKong

Sample Type : Prototype production

2.2.Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1	Personal Computer	DELL	D11M	CN-0LV772-C088 7-378-H8UR	DOC
2	Monitor	DELL	E2014Hf	CN-011HFV-7287 2-397-CHEM	DOC
3	USB Keyboard	ACER	SK-9625	KBUSB15805000 37E0100	DOC
4	USB Mouse	ACER	MS.11200.014	M-UAY-ACR2	DOC
5.	Printer	HP	HP1020	CNCJ410726	DOC

2.3.Block Diagram of connection between EUT and simulators

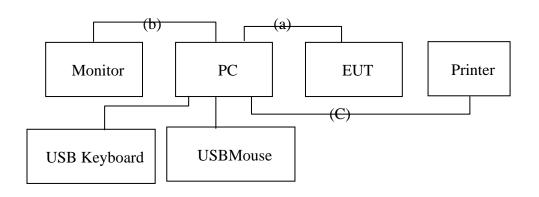

	Signal Cable Description of the above Support Units										
No.	Port Name Cable Length Shielded (Yes or No)		Detachable (Yes or No)								
(a)	USB Port	USB Cable	20CM	Yes(Shielding and foil shields)	Yes						
(b)	VGA Port	VGA Cable	120CM	Yes(Shielding)	Yes						
(C)	Serial Port	Serial Cable	150CM	Yes(Shielding)	Yes						

EUT: Video Brochure

2.4.Test mode Description

No.	Test Mode						
※ 1.	Exchange data with PC						
2.	Charging						
3.	Playing						
Note: * is worst case mode for, so this report only reflected the							
	worst mode.						

2.5.Test Facility

Shenzhen Alpha Product Testing Co., Ltd. Building B, East Area of Nanchang Second, Industrial Zone, Gushu 2nd Road, Bao'an, Shenzhen, China

March 25, 2015 File on Federal Communication Commission

Registration Number: 203110

July 18, 2014 Certificated by IC Registration Number: 12135A

2.6. Measurement Uncertainty

(95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission	2.71dB
test	2.7 TuD
	3.90 dB (Distance:
Uncertainty for Radiation Emission test	3m Polarize: V)
(<1G)	3.92 dB (Distance:
	3m Polarize: H)
	4.26 dB (Distance:
Uncertainty for Radiation Emission test	3m Polarize: V)
(>1G)	4.28 dB (Distance:
	3m Polarize: H)

3. POWER LINE CONDUCTED EMISSION TEST

3.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	101165	2016.01.17	1 Year
2.	L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2016.01.17	1 Year
3.	L.I.S.N.#2	ROHDE&SCH WARZ	ENV216	101043	2016.01.17	1 Year
4.	Pulse Limiter	Schwarzbeck	9516F	9618	2016.01.17	1 Year
5	Cable	Resenberger	SUCOFLEX 104	MY6562/4	2016.01.17	1 Year

3.2.Block Diagram of Test Setup

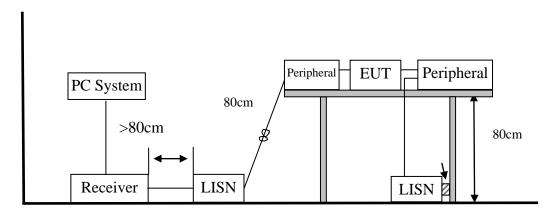

3.3. Power Line Conducted Emission Test Limits

	Maximum RF Line Voltage			
Frequency	Quasi-Peak Level	Average Level		
	$dB(\mu V)$	dB(µV)		
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*		
500kHz ~ 5MHz	56	46		
5MHz ~ 30MHz	60	50		

Notes:

- 1. Emission level=Read level + LISN factor-Preamp factor + Cable loss
- 2. * Decreasing linearly with logarithm of frequency.
- 3. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.5. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 3.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

3.6.Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on conducted Emission test.
- (2) The frequency range from 150kHz to 30MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 9kHz.
- (3) The frequency range from 30MHz to 1000MHz was pre-scanned with a Peak detector and all final readings of measurement from Test Receiver are Quasi-Peak and Average values.
- (4) The test results are reported on Section 3.7.

3.7. Conducted Disturbance at Mains Terminals Test Results

EUT	:	Video Brochure	Test Date	:	2016.07.26
M/N	:	C7028	Temperature	:	25℃
Test Engineer	:	Reak Yang	Humidity	:	51%
Test Mode	:	Exchange data with PC			
		7 .00			

Test Results : **PASS**

Note: 1. The test results are listed in next pages.

- 2. This mode is worst case mode, so this report only reflected the worst mode.
- 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.
- 4. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.




3 0.796 33.84

4 0.853 33.68

6 2.650 33.94

5 1.388 35.90

Shenzhen Alpha Product Testing Co., Ltd. Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China Website: http://www.a-lab.cn Email: service@a-lab.cn

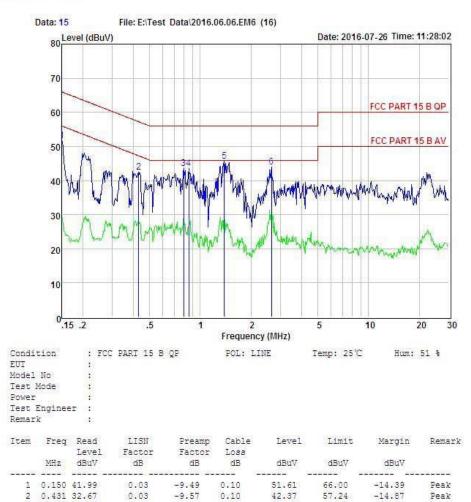

-9.76 Remark: Level = Read Level + LISN Factor - Preamp Factor + Cable Loss

-9.60

-9.66

-9.62

0.10

0.10

0.10

0.11

43.54

43.44

45.71

43.87

56.00

56.00

56.00

56.00

-12.46

-12.56

-10.29

-12.13

Peak

Peak

Peak

Peak


0.00

0.04

0.05

0.06



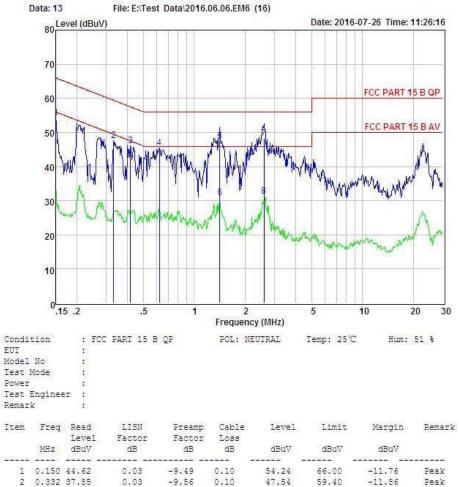

-	oem.	TTCH	Level	Factor	Factor	Loss	DEVEL	TITILLO	nargin	Remark
		MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
-										
	1	0.150	44.62	0.03	-9.49	0.10	54.24	66.00	-11.76	Peak
	2	0.332	37.85	0.03	-9.56	0.10	47.54	59.40	-11.86	Peak
	3	0.417	36.52	0.03	-9.57	0.10	46.22	57.51	-11.29	Peak
	4	0.621	35.81	0.03	-9.59	0.10	45.53	56.00	-10.47	Peak
	5	1.418	37.63	0.05	-9.66	0.10	47.44	56.00	-8.56	QP
	6	1.418	20.98	0.05	-9.66	0.10	30.79	46.00	-15,21	Average
	7	2.594	38.25	0.06	-9.76	0.11	48.18	56.00	-7.82	QP
	8	2.594	21.40	0.06	-9.76	0.11	31.33	46.00	-14.67	Average

Remark: Level = Read Level + LISN Factor - Preamp Factor + Cable Loss

4. RADIATED EMISSION TEST


4.1.Test Equipment


For fr	For frequency range 30MHz~1GHz (At Semi Anechoic Chamber)									
Item	Equipment	Manufacturer	Model No. Serial No.		Last Cal.	Cal. Interval				
1	Test Receiver	Rohde&Schwarz	ESCI	101165	2016.01.17	1 Year				
2	Amplifier	HP	HP8347A	2834A00455	2016.01.19	1 Year				
3	Bilog Antenna	Schwarzbeck	VULB 9168	9168-438	2016.01.19	2 Year				
4	Cable	Resenberger	SUCOFLEX 104	309972/4	2016.01.17	1 Year				

For fr	For frequency range above 1GHz (At Semi Anechoic Chamber (3m))									
Item	Equipment	Manufacturer	Model No. Serial No.		Last Cal.	Cal. Interval				
1	Spectrum Analyzer	Agilent	E4407B	MY49510055	2016.01.17	1 Year				
2	Horn Antenna	Schwarzbeck	BBHA 9120 D	BBHA 9120 D(1201)	2016.01.21	1 Year				
3	Amplifier	Agilent	8449B	3008A02664	2016.01.19	1 Year				
4	Cable	Resenberger	SUCOFLEX 104	329112/4	2016.01.17	1 Year				

4.2.Block Diagram of Test Setup

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

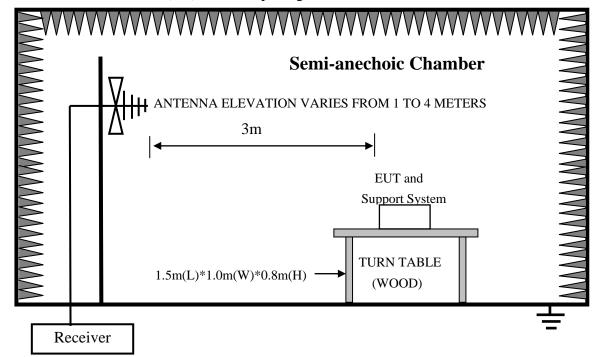

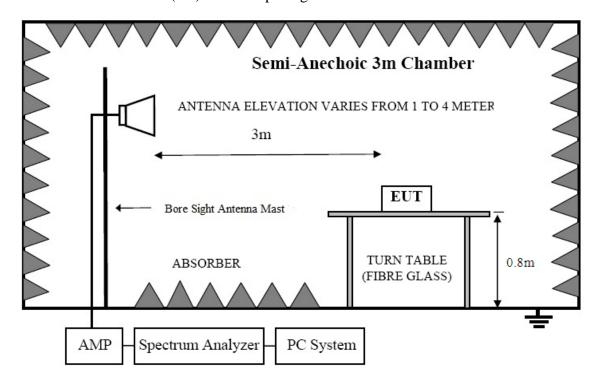

4.3. Radiated Emission Limit

Frequency	Distance	Field Strengths Limits		
MHz	(Meters)	$dB(\mu V)/m$		
30 ~ 88	3	40.0		
88 ~ 216	3	43.5		
216 ~ 960	3	46.0		
960 ~ 1000	3	54.0		
Above 1GHz	3	74(Peak) 54(Average)		

Notes:

- 1. Emission level = Read level + Antenna Factor Preamp Factor + Cable Loss
- 2. The smaller limit shall apply at the cross point between two frequency bands.
- 3. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
- 4. Frequency range of radiated measurements:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

4.4.Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

4.5. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 4.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

4.6.Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:
 - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) The frequency range from 30MHz to 1000MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 120kHz.
- (4) The frequency range from above 1GHz is checked, the bandwidth of spectrum analyzer (Analyzer Spectrum Analyzer E4407B) is set at 1MHz.
- (5) The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values, the frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (6) The test results are reported on Section 4.7.

4.7. Radiated Disturbance Test Results

Frequency Range	:	30MHz~1000MHz			
EUT	:	Video Brochure	Test Date	:	2016.07.26
M/N	:	C7028	Temperature	:	23℃
Test Engineer	:	Reak Yang	Humidity	:	56%
Test Mode	:	Exchange data with PC			
Test Results	:	PASS			

Note: 1. The test results are listed in next pages.


- 2. This mode is worst case mode, so this report only reflected the worst mode.
- 3. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.

Frequency Range	:	Above 1GHz			
EUT	:	Video Brochure	Test Date	:	2016.07.25
M/N	:	C7028	Temperature	:	24.2℃
Test Engineer	:	Reak Yang	Humidity	:	54%
Test Mode	:	Exchange data with PC			
Test Results	:	PASS			

Note: 1. The test results are listed in next pages.

- 2. This mode is worst case mode, so this report only reflected the worst mode.
- 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.



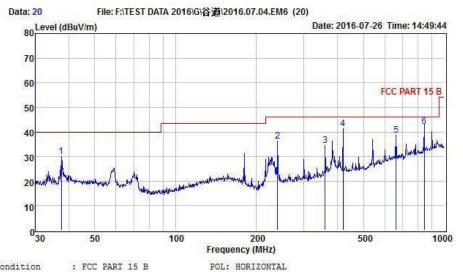

Page 17 of 32

: FCC PART 15 B Condition


EUT Model No Test Mode : Power Test Engineer : Remark

: 23C Temp Hum : 56%

Item	Freq	Read Level	Antenna Factor	Preamp Factor		Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
-		Value of		120.00		50.5	1924 (202)		
1	37.55	47.00	13.73	30.83	0.08	29.98	40.00	-10.02	Peak
2	239.99	52.45	11.45	28.25	0.53	36.18	46.00	-9.82	Peak
3	360.45	47.59	14.03	27.65	0.66	34.63	46.00	-11.37	Peak
4	420.58	52.32	15.23	27.12	0.81	41.24	46.00	-4.76	Peak
5	661.15	44.11	19.23	25.60	0.91	38.65	46.00	-7.35	Peak
6	842.13	44.37	20.98	24.84	1.69	42,20	46.00	-3.80	QP

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



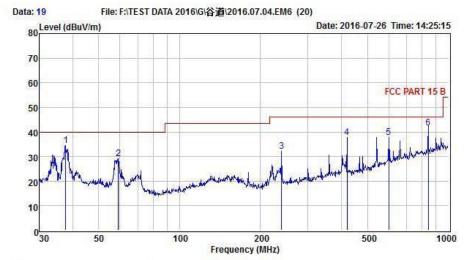

POL: VERTICAL

Condition : FCC PART 15 B

: 56%

18.36

20.98

EUT :
Model No :
Test Mode :
Power :
Test Engineer :
Remark :
Temp : 23C

5 601.43 44.24

6 842.13 43.95

Hum

Item Freq Read Antenna Preamp Cable Level Limit Margin Remark Factor Factor Loss MHz dBuV dB dB dB dBuV dBuV dBuV 1 37.68 51.42 13.73 30.83 0.08 34.40 40.00 -5.60 Peak 59.23 46.95 12.75 30.89 0.32 29.13 40.00 -10.87 Peak 3 239.99 48.45 11.45 28.25 0.53 32.18 46.00 -13.82 Peak 27.12 4 420.58 48.97 37.89 46.00 15.23 0.81 -8.11 Peak

1.07

1.69

37.78

41.78

46.00

46.00

-8.22

-4.22

Peak


Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

25.89

24.84



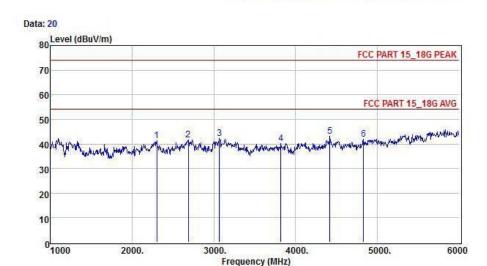

Condition : FCC PART 15_18G PEAK POL: HORIZONTAL


EUT :
Model No :
Test Mode :
Power :
Test Engineer :
Remark :

Temp : 24.2 °C Hum : 54 %

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
				Table 184					
12	305.00	44.73	27.77	34.96	3.87	41.41	74.00	-32.59	Peak
22	690.00	44.58	27.86	34.98	4.18	41.64	74.00	-32.36	Peak
33	070.00	44.23	28.34	34.97	4.49	42.09	74.00	-31.91	Peak
43	820.00	40.81	29.12	34.79	5.07	40.21	74.00	-33.79	Peak
54	420.00	41.76	30.42	34.49	5.45	43.14	74.00	-30.86	Peak
64	830.00	39.05	31.29	34.19	5.71	41.86	74.00	-32.14	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



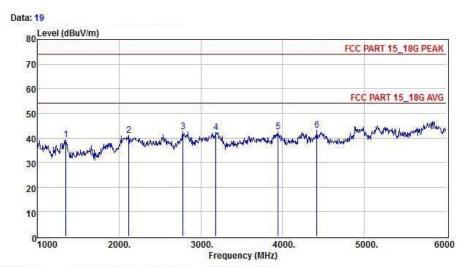

Condition : FCC PART 15_18G PEAK POL: VERTICAL


EUT :
Model No :
Test Mode :
Power :
Test Engineer :
Remark :
Temp : 24.2 °C
Hum : 54 %

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
				EMPS SO					
113	50.00	46.32	25.08	34.84	2.58	39.14	74.00	-34.86	Peak
221	20.00	45.17	27.25	34.95	3.70	41.17	74.00	-32.83	Peak
327	80.00	45.36	27.90	34.98	4.25	42.53	74.00	-31.47	Peak
431	85.00	44.33	28.21	34.95	4.58	42.17	74.00	-31.83	Peak
539	45.00	42.57	29.49	34.73	5.15	42.48	74.00	-31.52	Peak
644	20.00	41.76	30.42	34.49	5.45	43,14	74.00	-30.86	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

5. PHOTOGRAPH

5.1.Photos of Radiated Emission Test (In Semi Anechoic Chamber)

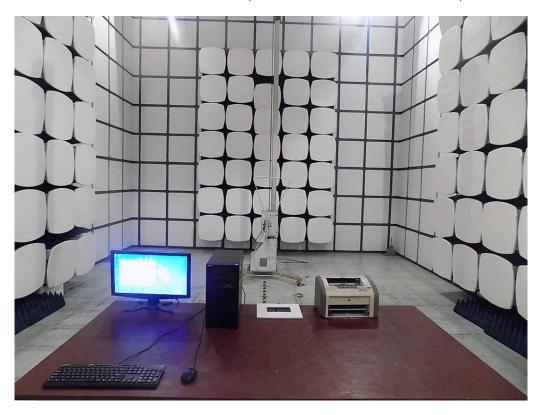





5.2.Photos of Power Line Conducted Emission Test




6. PHOTOS OF THE EUT

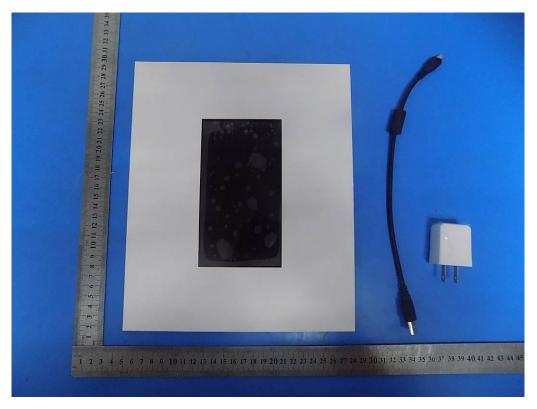


EUT View

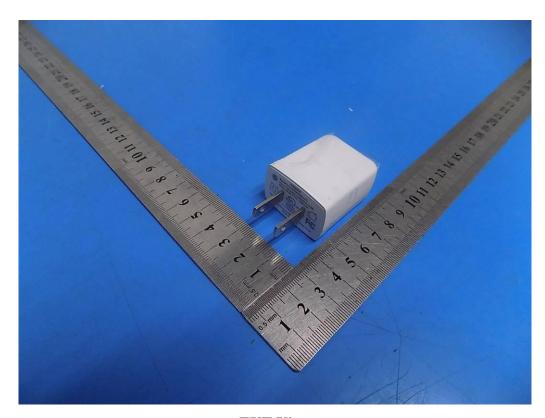


EUT View

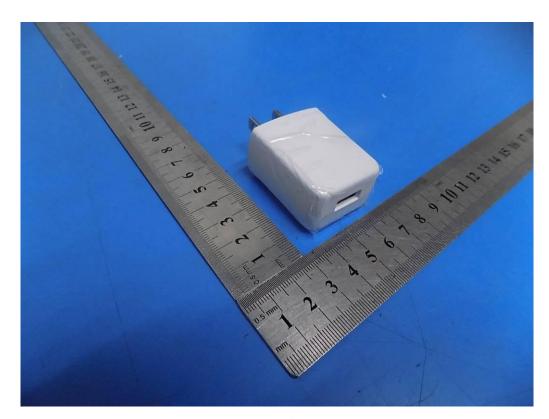


EUT View

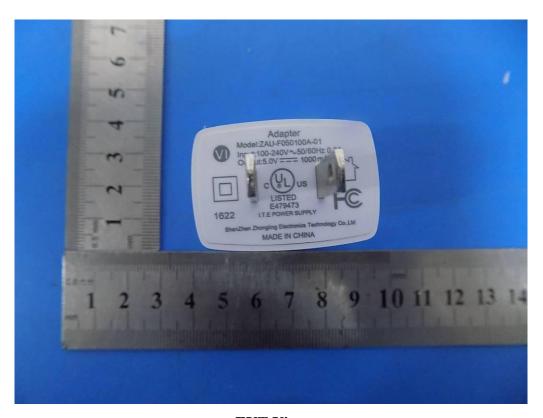


EUT View

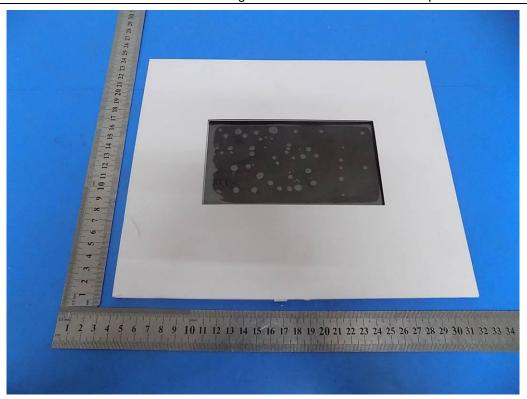


EUT View

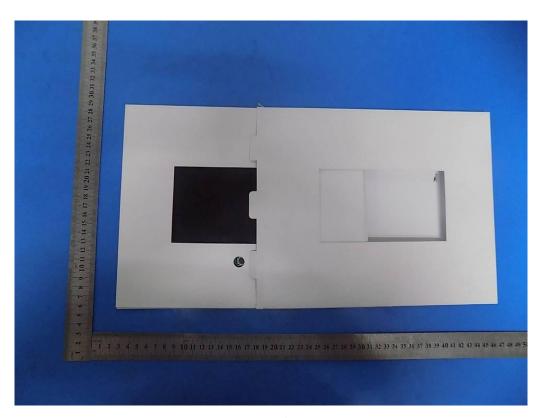


EUT View

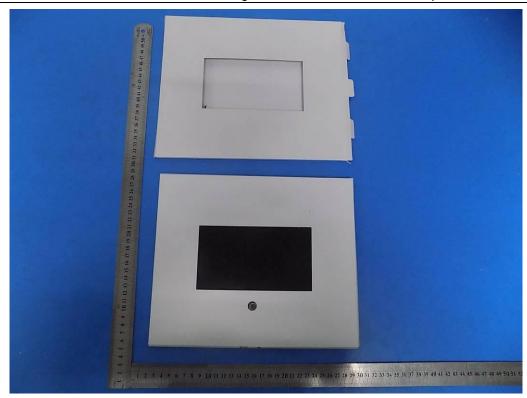


EUT View

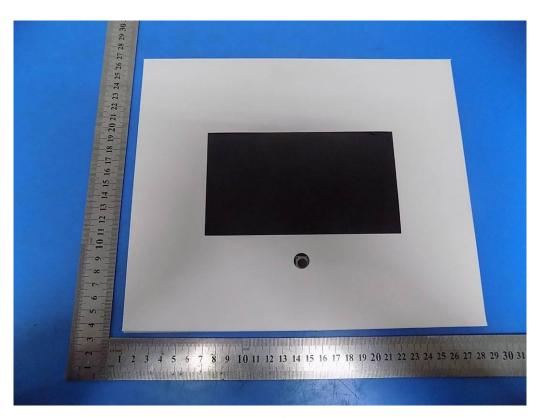


EUT View

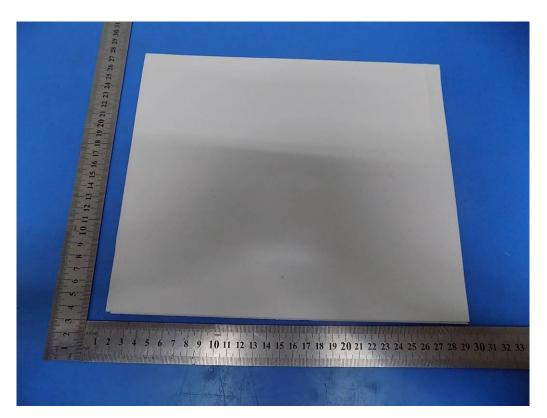


EUT View

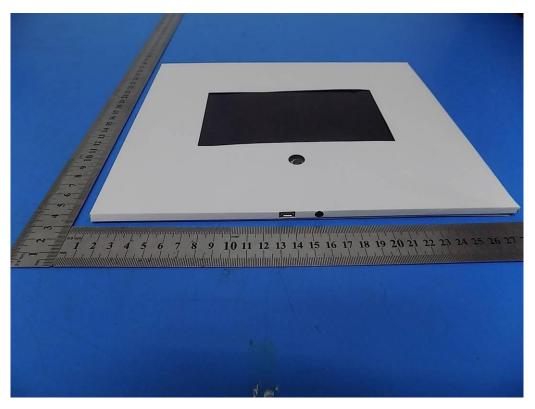


EUT View

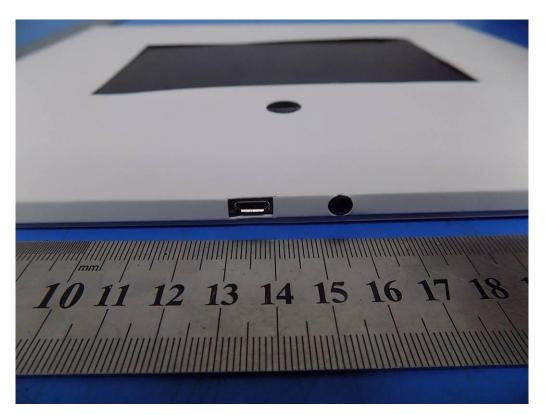


EUT View

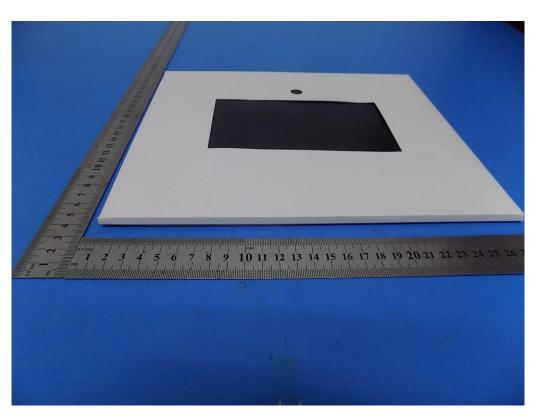


EUT View

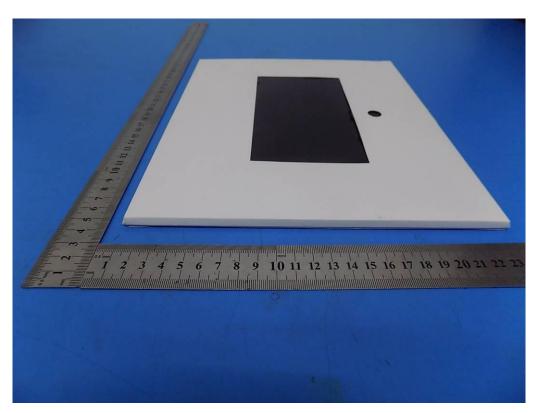


EUT View

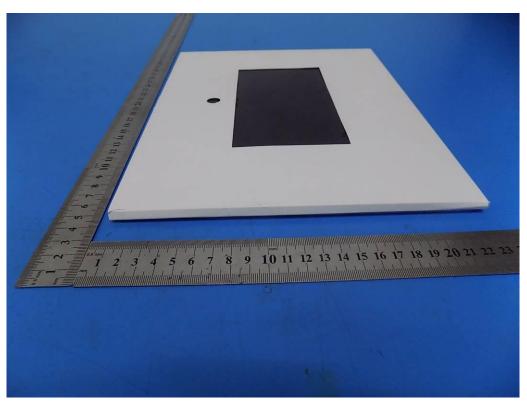


EUT View

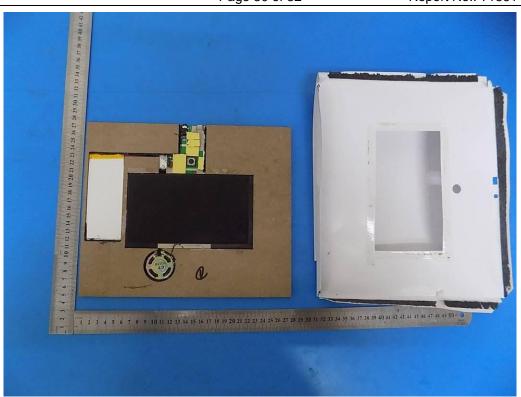


EUT View

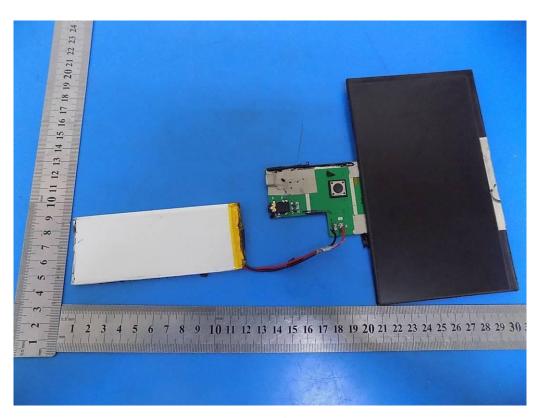


EUT View

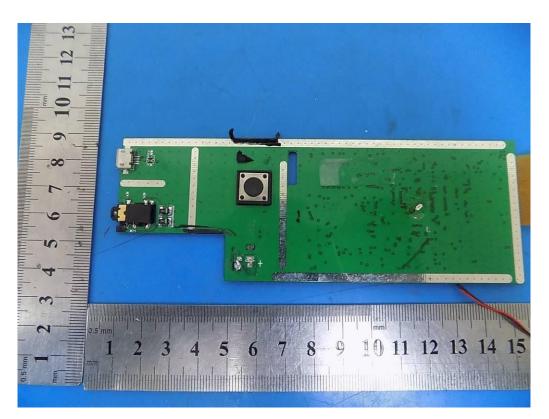


EUT View

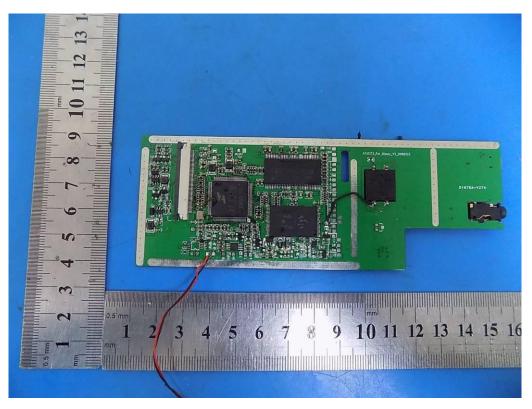

EUT View

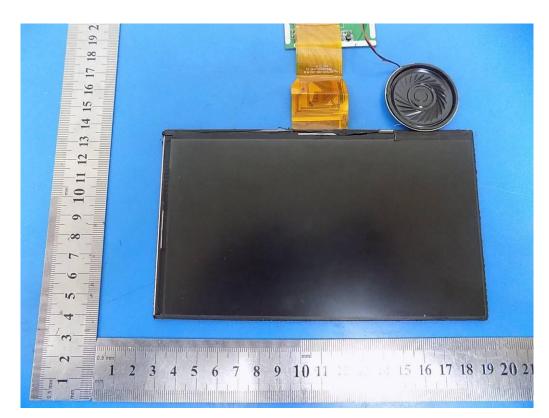

EUT View

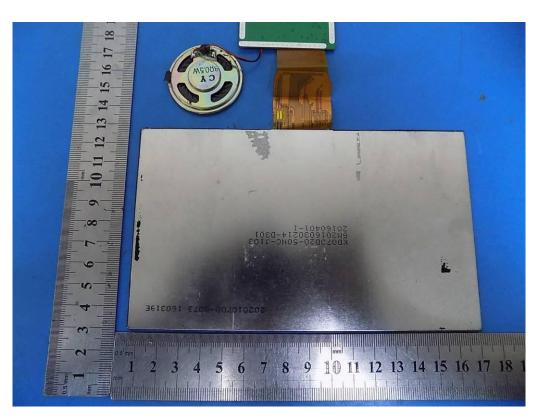

EUT View
----END OF REPORT----