

TEST REPORT

Applicant: LLW Enterprise LLC

Address of Applicant: 15486 N Nebraska Ave, Lutz, Florida 33549, United States

Manufacturer/Factory: Foshan Sang Tian Light Electric Appliance Co.,Ltd

Address of Manufacturer/Factory: Unit 3, 4th Floor, Building 3, Zone A, Hantian Science and Technology City, No.17, Shenhai Road, Guicheng Subdistrict, Nanhai District, Foshan City, China

Equipment Under Test (EUT)

Product Name: Serviceable Rotatable RF RGBCW Hardscape Light

Model No.: See section 5.1

Trade Mark: 

FCC ID: 2A14G-HS-68XX-RF

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: April 15, 2025

Date of Test: April 15, 2025-May 30, 2025

Date of report issued: May 30, 2025

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:


Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	May 30, 2025	Original

Prepared By:




Date:

May 30, 2025

Project Engineer

Check By:



Date:

May 30, 2025

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 DESCRIPTION OF SUPPORT UNITS	6
5.4 DEVIATION FROM STANDARDS.....	6
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
5.6 TEST FACILITY.....	6
5.7 TEST LOCATION	6
5.8 ADDITIONAL INSTRUCTIONS.....	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 RADIATED EMISSION METHOD	23
7.3.1 Field Strength of The Fundamental Signal	25
7.3.2 Spurious emissions.....	27
7.3.3 Bandedge emissions.....	45
7.4 20dB OCCUPY BANDWIDTH	49
8 TEST SETUP PHOTO.....	51
9 EUT CONSTRUCTIONAL DETAILS	51

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Remarks:

1. Test according to ANSI C63.10:2013.
2. Pass: The EUT complies with the essential requirements in the standard.
3. N/A: not applicable

4.1 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
		$\pm 3.30\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

5 General Information

5.1 General Description of EUT

Product Name:	Serviceable Rotatable RF RGBCW Hardscape Light
Model No.:	VHS-6812-RGBCW-25-BBZ, VHS-6803-RGBCW-25-BBZ, VHS-6803-CW-25-BBZ, VHS-6806-RGBCW-25-BBZ, VHS-6806-CW-25-BBZ, VHS-6812-CW-25-BBZ, AHS-6812-RGBCW-25-B-BZ, ZHS-6812-RGBCW-XX-YZZ-R#, ZHS-6812-RGBCW-XX-Y-ZZ-R#, ZHS-6803-RGBCW-XX-YZZ-R#, ZHS-6803-RGBCW-XX-Y-ZZ-R#, ZHS-6806-RGBCW-XX-YZZ-R#, ZHS-6806-RGBCW-XX-Y-ZZ-R#, AHS-6812-CW-25-B-BZ, ZHS-6812-CW-XX-YZZ-R#, ZHS-6812-CW-XX-Y-ZZ-R#, ZHS-6803-CW-XX-YZZ-R#, ZHS-6803-CW-XX-Y-ZZ-R#, ZHS-6806-CW-XX-YZZ-R#, ZHS-6806-CW-XX-Y-ZZ-R# "Z" can be any alphanumeric character or blank for commercial purpose; "XX" can be any digit or blank for wire length (e.g. 8=8 feet or 25=25 feet); "Y" can be any alphanumeric character or blank for product material (e.g. B= Brass, A= Aluminum or S= Steel); "ZZ" can be any alphanumeric character or blank for product colour (e.g. BZ= Bronze, WH= White or BK= Black, RB=Raw brass, etc.); "-R#" can be any alphanumeric character or blank for internal code.
Test Model No.:	VHS-6812-RGBCW-25-BBZ, VHS-6803-RGBCW-25-BBZ, VHS-6806-RGBCW-25-BBZ, VHS-6803-CW-25-BBZ, VHS-6806-CW-25-BBZ, VHS-6812-CW-25-BBZ
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color, size, power and model name for commercial purpose.	
Serial No.:	HS-6812-RGBCW-0001
Test sample(s) ID:	GTS2025040338-1
Sample(s) Status	Engineered sample
Operation Frequency:	2405MHz~2480MHz
Channel Numbers:	3
Modulation Technology:	GFSK
Antenna Type:	Wire Antenna
Antenna Gain:	1.77dBi(declare by applicant)
Power supply:	AC 12V/60Hz

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.

The test frequencies are below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report (Only show the worst case:Y axis) and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	105.24	106.77	104.46

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Orientronic Manufacturing Ltd.	AC power supply	N/A	N/A
Shenzhen Publise Technology Co., Ltd.	Remote control	N/A	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● ISED—Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).
--

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Apr. 11, 2025	Apr. 10, 2026
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 12, 2025	Apr. 11, 2026
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Apr. 12, 2025	Apr. 11, 2026
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Jul. 02, 2024	Jul. 01, 2025
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.16, 2024	Nov.15, 2025
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 11, 2025	Apr. 10, 2026
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 11, 2025	Apr. 10, 2026
10	Horn Antenna (18GH-40GHz)	Schwarzbeck	BBHA 9170	GTS691	Apr. 11, 2025	Apr. 10, 2026
11	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 11, 2025	Mar. 10, 2026
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 11, 2025	Apr. 10, 2026
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 13, 2024	Nov. 12, 2025
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 11, 2025	Apr. 10, 2026
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 15, 2025	Apr. 14, 2026
16	RE cable 1	GTS	N/A	GTS675	Jul. 02, 2024	Jul. 01, 2025
17	RE cable 2	GTS	N/A	GTS676	Jul. 02, 2024	Jul. 01, 2025
18	RE cable 3	GTS	N/A	GTS677	Jul. 02, 2024	Jul. 01, 2025
19	RE cable 4	GTS	N/A	GTS678	Jul. 02, 2024	Jul. 01, 2025
20	RE cable 5	GTS	N/A	GTS679	Jul. 02, 2024	Jul. 01, 2025
21	RE cable 6	GTS	N/A	GTS680	Jul. 02, 2024	Jul. 01, 2025
22	RE cable 7	GTS	N/A	GTS681	Jul. 05, 2024	Jul. 04, 2025
23	RE cable 8	GTS	N/A	GTS682	Jul. 05, 2024	Jul. 04, 2025
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Jul. 12, 2022	Jul. 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	Apr. 11, 2025	Apr. 10, 2026
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	Thermo meter	JINCHUANG	GSP-8A	GTS642	Apr. 15, 2025	Apr. 14, 2026
6	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	Apr. 12, 2025	Apr. 11, 2026
7	ISN	SCHWARZBECK	NTFM 8158	GTS565	Apr. 11, 2025	Apr. 10, 2026
8	High voltage probe	SCHWARZBECK	TK9420	GTS537	Apr. 11, 2025	Apr. 10, 2026
9	Antenna end assembly	Weinschel	1870A	GTS560	Apr. 11, 2025	Apr. 10, 2026
10	EMI Test Software	AUDIX	E3-6.100622	GTS726	N/A	N/A
11	Current probe	CYBERTEK	EM5011	GTS698	Jan. 13, 2025	Jan. 12, 2026

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 11, 2025	Apr. 10, 2026
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 11, 2025	Apr. 10, 2026
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 11, 2025	Apr. 10, 2026
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Power Meter	Keysight	N1924A	GTS673	Apr. 11, 2025	Apr. 10, 2026
7	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 11, 2025	Apr. 10, 2026
8	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 11, 2025	Apr. 10, 2026
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 11, 2025	Apr. 10, 2026
10	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 15, 2025	Apr. 14, 2026
11	EXA Signal Analyzer	Keysight	N9010B	MY60241168	Nov. 02, 2024	Nov. 01, 2025


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Aug. 17, 2024	Aug. 16, 2025

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is wire antenna, reference to the appendix II for details.	

7.2 Conducted Emissions

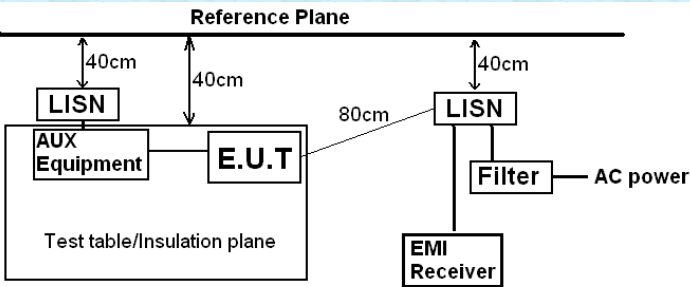
Test Requirement:	FCC Part15 C Section 15.207						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane  Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar	
Test voltage:	AC120V 60Hz						
Test results:	Pass						

Measurement data

Pre-scan all test modes, found worst case at 2405MHz, and so only show the test result of it.


Model No.: VHS-6812-RGBCW-25-BBZ

Line:

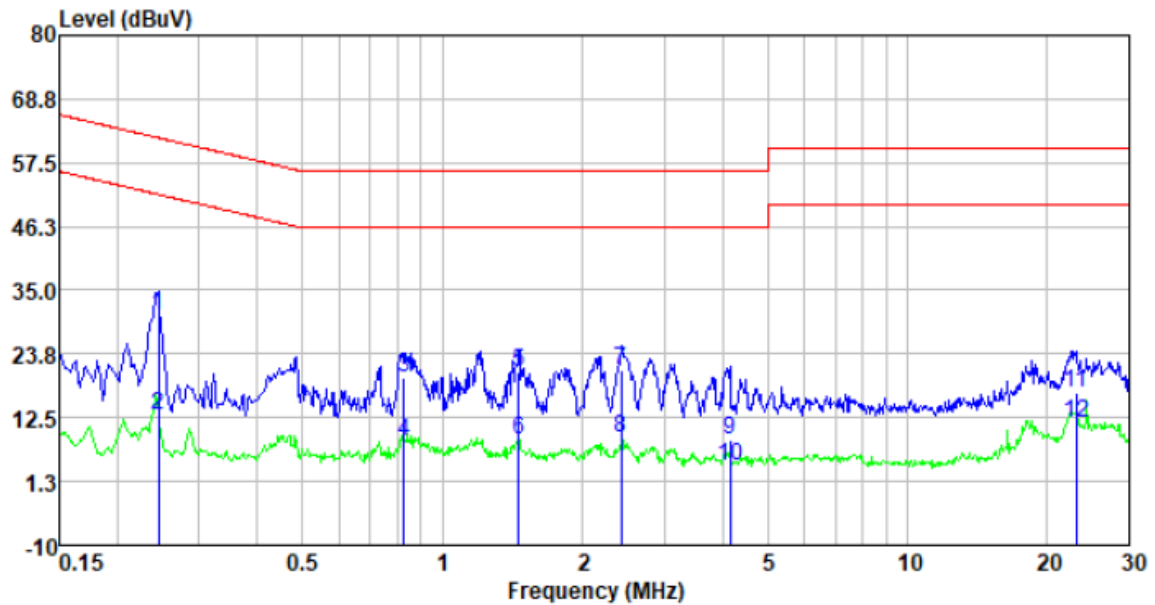

Freq	Reading	LISN/ISN	Cable		Limit	Over	
	level	factor	loss	Level	level	limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.25	10.91	9.59	0.01	30.51	61.91	-31.40	QP
0.25	-6.79	9.59	0.01	12.81	51.91	-39.10	Average
0.83	-0.16	9.75	0.03	19.62	56.00	-36.38	QP
0.83	-11.50	9.75	0.03	8.28	46.00	-37.72	Average
1.46	0.95	9.43	0.04	20.42	56.00	-35.58	QP
1.46	-10.96	9.43	0.04	8.51	46.00	-37.49	Average
2.42	1.06	9.68	0.05	20.79	56.00	-35.21	QP
2.42	-10.79	9.68	0.05	8.94	46.00	-37.06	Average
4.16	-10.79	9.46	0.06	8.73	56.00	-47.27	QP
4.16	-15.49	9.46	0.06	4.03	46.00	-41.97	Average
23.02	-3.13	9.91	0.19	16.97	60.00	-43.03	QP
23.02	-8.64	9.91	0.19	11.46	50.00	-38.54	Average


Neutral:

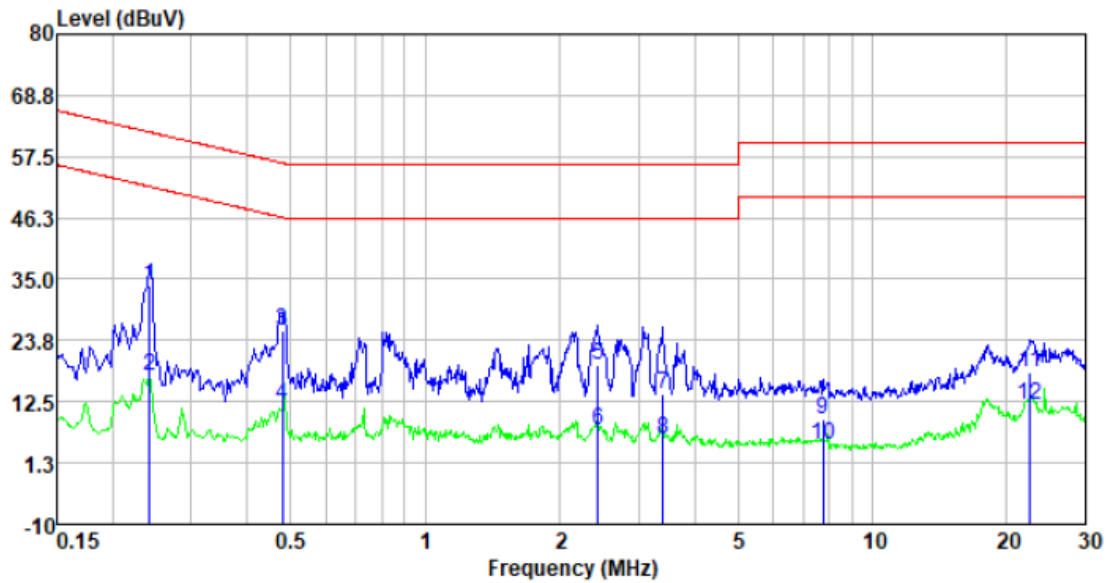

Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	factor	loss	dBuV	dBuV	dB	
0.24	13.87	9.88	0.01	33.76	62.04	-28.28	QP
0.24	-2.68	9.88	0.01	17.21	52.04	-34.83	Average
0.48	5.87	9.74	0.01	25.62	56.36	-30.74	QP
0.48	-7.70	9.74	0.01	12.05	46.36	-34.31	Average
2.43	-0.28	9.61	0.05	19.38	56.00	-36.62	QP
2.43	-12.33	9.61	0.05	7.33	46.00	-38.67	Average
3.40	-5.98	9.78	0.06	13.86	56.00	-42.14	QP
3.40	-14.15	9.78	0.06	5.69	46.00	-40.31	Average
7.77	-10.39	9.63	0.09	9.33	60.00	-50.67	QP
7.77	-15.00	9.63	0.09	4.72	50.00	-45.28	Average
22.54	-2.32	9.87	0.19	17.74	60.00	-42.26	QP
22.54	-8.08	9.87	0.19	11.98	50.00	-38.02	Average


Model No.: VHS-6803-RGBCW-25-BBZ

Line:

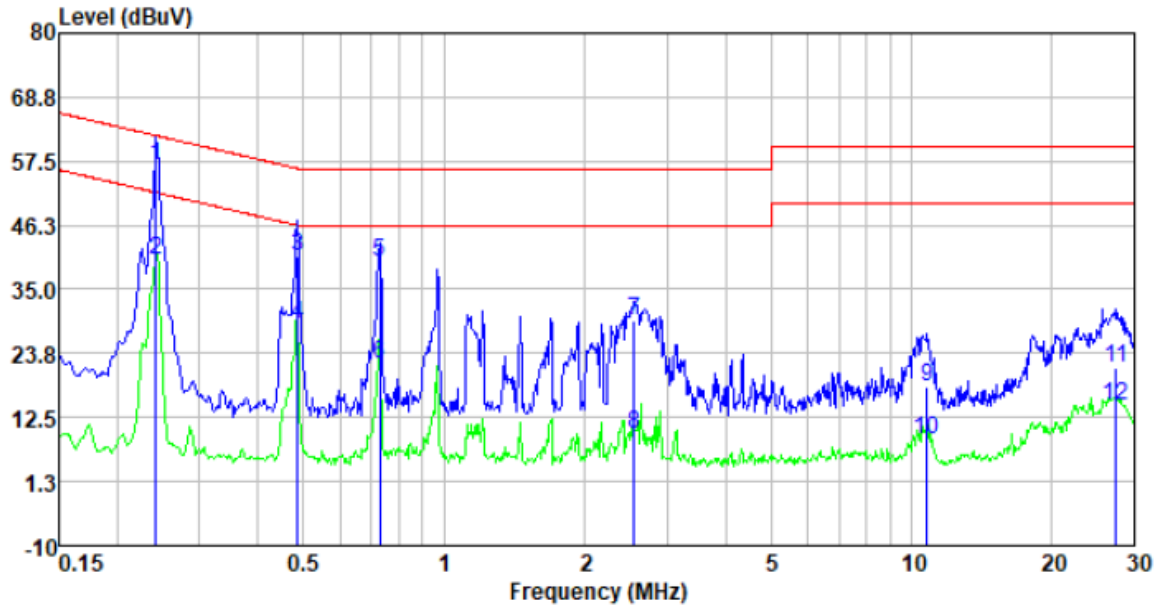

Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.24	37.20	9.58	0.01	56.79	62.04	-5.25	QP
0.24	20.54	9.58	0.01	40.13	52.04	-11.91	Average
0.49	21.09	9.84	0.01	40.94	56.23	-15.29	QP
0.49	8.91	9.84	0.01	28.76	46.23	-17.47	Average
0.73	19.97	9.76	0.02	39.75	56.00	-16.25	QP
0.73	2.08	9.76	0.02	21.86	46.00	-24.14	Average
2.55	9.99	9.63	0.05	29.67	56.00	-26.33	QP
2.55	-10.17	9.63	0.05	9.51	46.00	-36.49	Average
10.79	-2.13	9.75	0.12	17.74	60.00	-42.26	QP
10.79	-11.34	9.75	0.12	8.53	50.00	-41.47	Average
27.42	0.78	10.09	0.20	21.07	60.00	-38.93	QP
27.42	-5.69	10.09	0.20	14.60	50.00	-35.40	Average


Neutral:

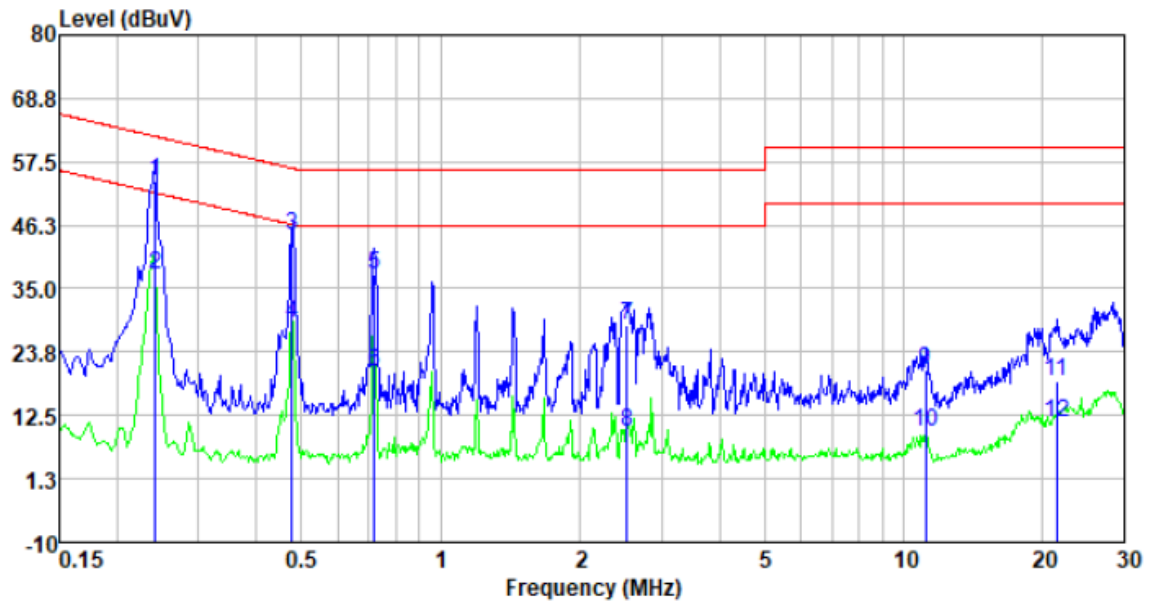

Freq	Reading level	LISN/ISN factor	Cable loss	Level	Limit level	Over limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.24	34.24	9.88	0.01	54.13	62.04	-7.91	QP
0.24	17.44	9.88	0.01	37.33	52.04	-14.71	Average
0.48	24.87	9.74	0.01	44.62	56.38	-11.76	QP
0.48	9.19	9.74	0.01	28.94	46.38	-17.44	Average
0.72	17.59	9.87	0.02	37.48	56.00	-18.52	QP
0.72	0.25	9.87	0.02	20.14	46.00	-25.86	Average
2.53	8.87	9.59	0.05	28.51	56.00	-27.49	QP
2.53	-10.08	9.59	0.05	9.56	46.00	-36.44	Average
11.14	0.76	9.69	0.12	20.57	60.00	-39.43	QP
11.14	-10.32	9.69	0.12	9.49	50.00	-40.51	Average
21.37	-1.44	9.85	0.19	18.60	60.00	-41.40	QP
21.37	-8.91	9.85	0.19	11.13	50.00	-38.87	Average


Model No.: VHS-6806-RGBCW-25-BBZ

Line:

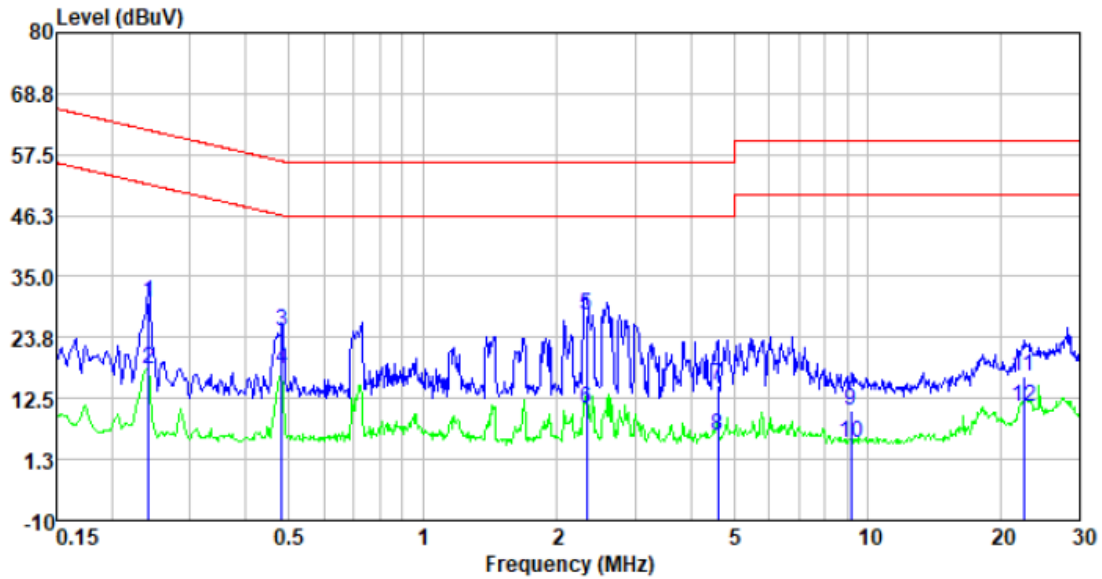

Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.24	10.58	9.58	0.01	30.17	62.04	-31.87	QP
0.24	-1.86	9.58	0.01	17.73	52.04	-34.31	Average
0.48	5.12	9.83	0.01	24.96	56.32	-31.36	QP
0.48	-2.06	9.83	0.01	17.78	46.32	-28.54	Average
2.33	8.05	9.71	0.05	27.81	56.00	-28.19	QP
2.33	-9.21	9.71	0.05	10.55	46.00	-35.45	Average
4.60	-4.65	9.65	0.06	15.06	56.00	-40.94	QP
4.60	-14.24	9.65	0.06	5.47	46.00	-40.53	Average
9.16	-9.73	9.76	0.10	10.13	60.00	-49.87	QP
9.16	-15.56	9.76	0.10	4.30	50.00	-45.70	Average
22.42	-3.60	9.88	0.19	16.47	60.00	-43.53	QP
22.42	-9.10	9.88	0.19	10.97	50.00	-39.03	Average


Neutral:

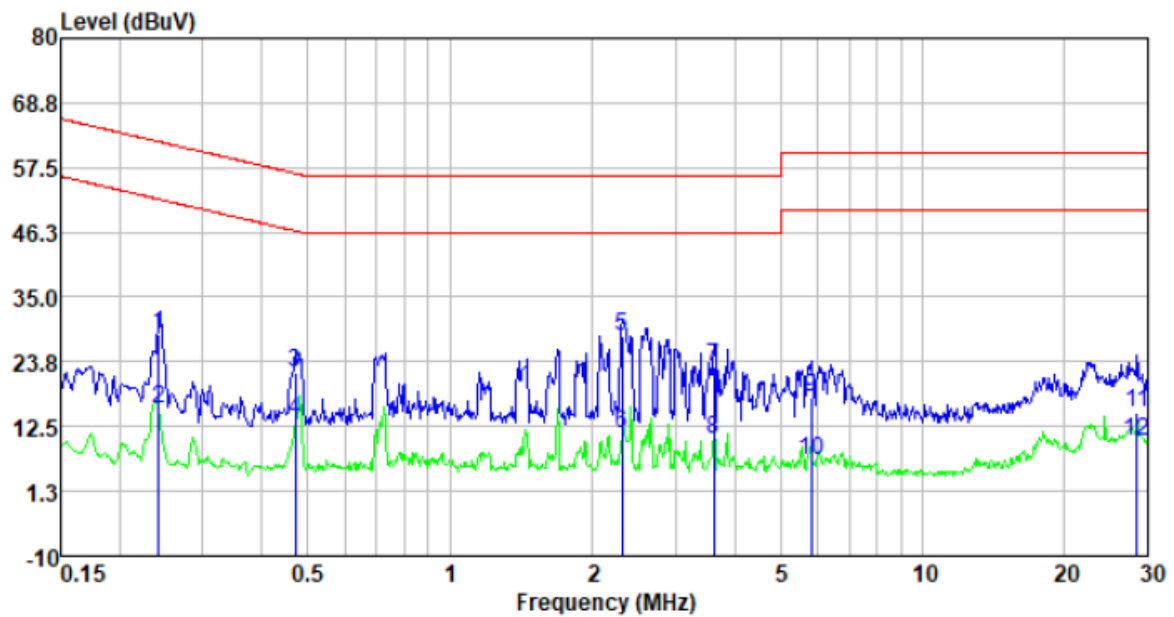

Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.24	8.66	9.88	0.01	28.55	62.04	-33.49	QP
0.24	-4.17	9.88	0.01	15.72	52.04	-36.32	Average
0.47	1.98	9.73	0.01	21.72	56.49	-34.77	QP
0.47	-6.16	9.73	0.01	13.58	46.49	-32.91	Average
2.31	8.47	9.67	0.05	28.19	56.00	-27.81	QP
2.31	-8.55	9.67	0.05	11.17	46.00	-34.83	Average
3.62	3.13	9.75	0.06	22.94	56.00	-33.06	QP
3.62	-9.56	9.75	0.06	10.25	46.00	-35.75	Average
5.80	-2.14	9.71	0.07	17.64	60.00	-42.36	QP
5.80	-13.05	9.71	0.07	6.73	50.00	-43.27	Average
28.45	-5.19	10.00	0.20	15.01	60.00	-44.99	QP
28.45	-10.40	10.00	0.20	9.80	50.00	-40.20	Average


Model No.: VHS-6803-CW-25-BBZ

Line:

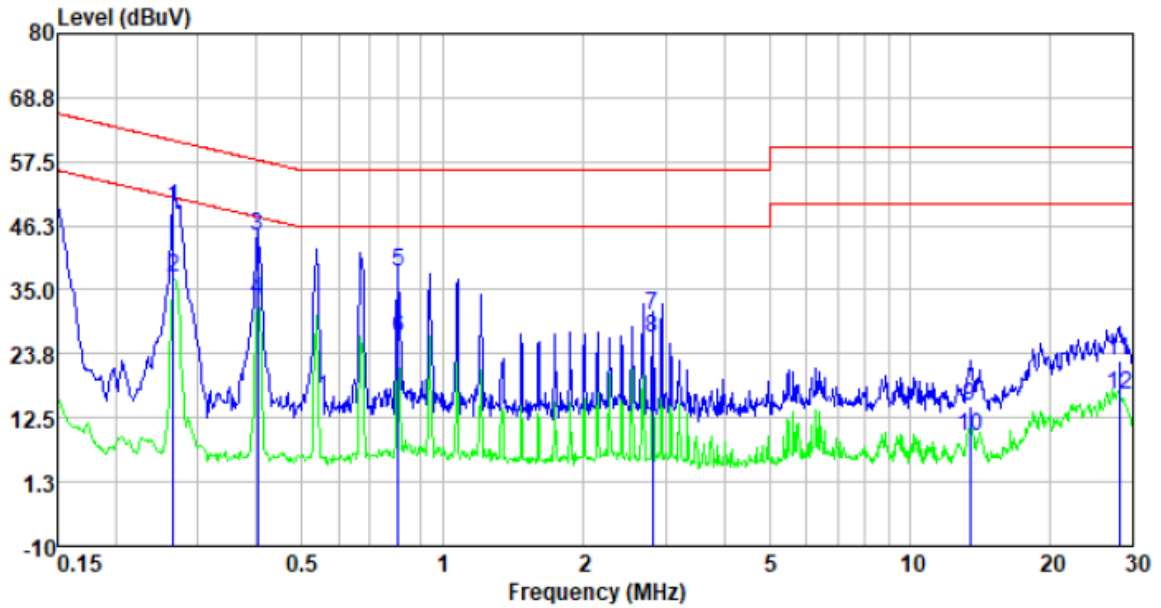

Freq	Reading level	LISN/ISN factor	Cable loss	Level	Limit level	Over limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.27	29.88	9.62	0.01	49.51	61.25	-11.74	QP
0.27	17.50	9.62	0.01	37.13	51.25	-14.12	Average
0.40	24.85	9.63	0.01	44.49	57.81	-13.32	QP
0.40	13.56	9.63	0.01	33.20	47.81	-14.61	Average
0.80	18.23	9.77	0.02	38.02	56.00	-17.98	QP
0.80	6.84	9.77	0.02	26.63	46.00	-19.37	Average
2.81	11.02	9.54	0.05	30.61	56.00	-25.39	QP
2.81	6.90	9.54	0.05	26.49	46.00	-19.51	Average
13.41	-5.28	9.66	0.15	14.53	60.00	-45.47	QP
13.41	-10.39	9.66	0.15	9.42	50.00	-40.58	Average
28.00	2.11	10.12	0.20	22.43	60.00	-37.57	QP
28.00	-3.90	10.12	0.20	16.42	50.00	-33.58	Average


Neutral:

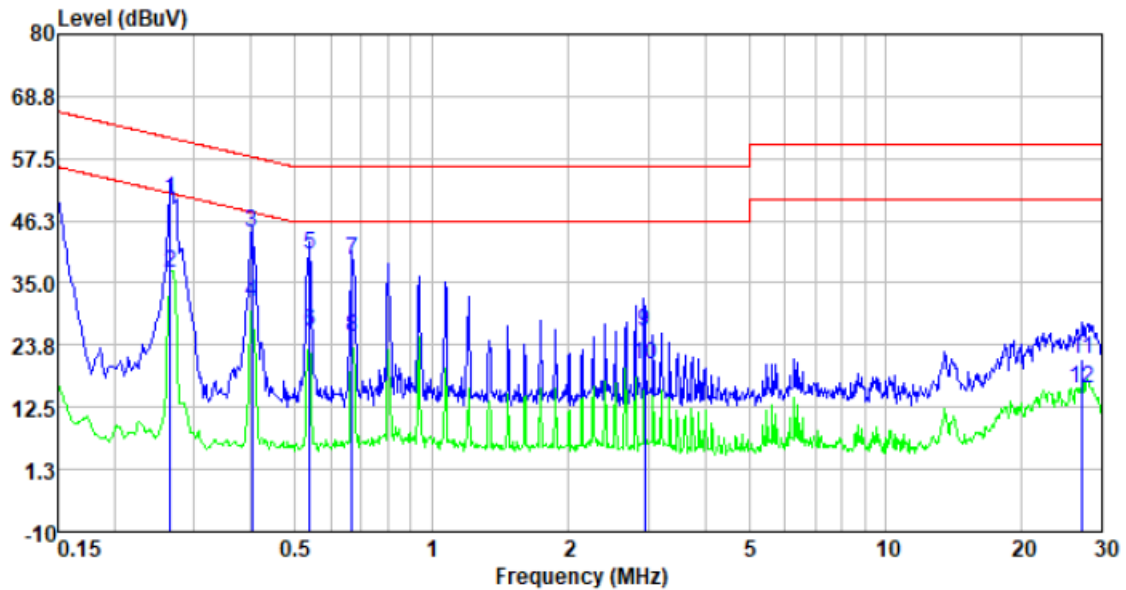

Freq	Reading level	LISN/ISN factor	Cable loss	Level	Limit level	Over limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.27	30.17	9.86	0.01	50.04	61.25	-11.21	QP
0.27	17.10	9.86	0.01	36.97	51.25	-14.28	Average
0.40	24.49	9.64	0.01	44.14	57.81	-13.67	QP
0.40	11.72	9.64	0.01	31.37	47.81	-16.44	Average
0.54	20.17	9.80	0.01	39.98	56.00	-16.02	QP
0.54	6.29	9.80	0.01	26.10	46.00	-19.90	Average
0.67	19.22	9.85	0.02	39.09	56.00	-16.91	QP
0.67	5.34	9.85	0.02	25.21	46.00	-20.79	Average
2.95	6.29	9.80	0.05	26.14	56.00	-29.86	QP
2.95	0.21	9.80	0.05	20.06	46.00	-25.94	Average
27.13	1.16	9.98	0.20	21.34	60.00	-38.66	QP
27.13	-4.30	9.98	0.20	15.88	50.00	-34.12	Average


Model No.: VHS-6806-CW-25-BBZ

Line:

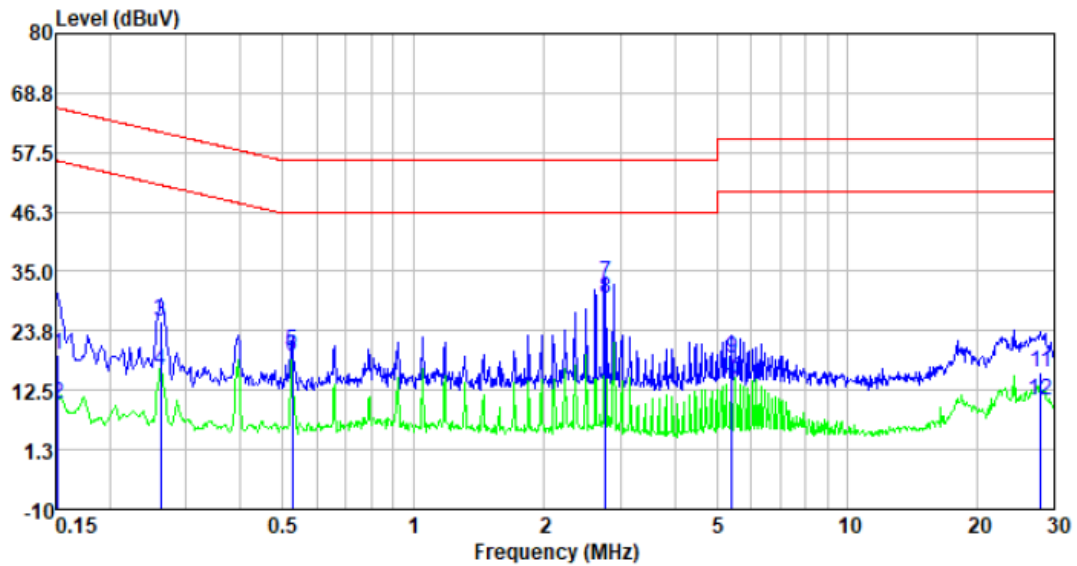

Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	factor	loss	dBuV	dBuV	limit	
0.15	-0.75	10.04	0.01	19.30	65.91	-46.61	QP
0.15	-10.05	10.04	0.01	10.00	55.91	-45.91	Average
0.26	5.84	9.61	0.01	25.46	61.38	-35.92	QP
0.26	-3.42	9.61	0.01	16.20	51.38	-35.18	Average
0.53	0.17	9.79	0.01	19.97	56.00	-36.03	QP
0.53	-0.84	9.79	0.01	18.96	46.00	-27.04	Average
2.77	13.33	9.56	0.05	32.94	56.00	-23.06	QP
2.77	10.24	9.56	0.05	29.85	46.00	-16.15	Average
5.41	-1.35	9.78	0.07	18.50	60.00	-41.50	QP
5.41	-5.41	9.78	0.07	14.44	50.00	-35.56	Average
27.86	-4.36	10.11	0.20	15.95	60.00	-44.05	QP
27.86	-9.60	10.11	0.20	10.71	50.00	-39.29	Average


Neutral:

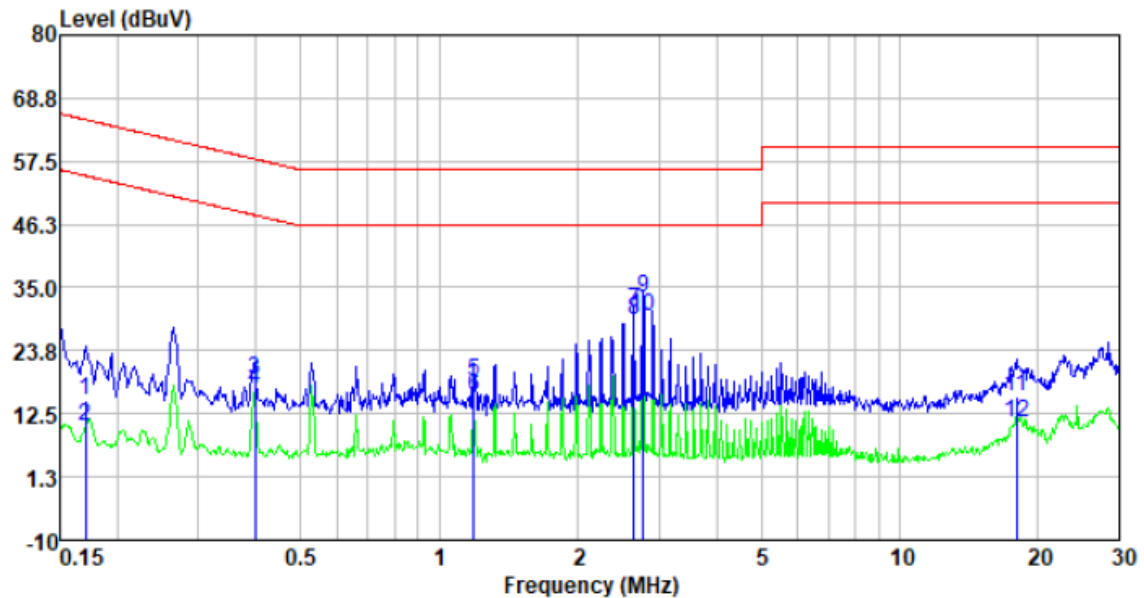

Freq	Reading level	LISN/ISN factor	Cable loss	Level	Limit level	Over limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.17	-5.03	9.97	0.01	14.95	64.94	-49.99	QP
0.17	-9.62	9.97	0.01	10.36	54.94	-44.58	Average
0.40	-1.05	9.65	0.01	18.61	57.90	-39.29	QP
0.40	-2.87	9.65	0.01	16.79	47.90	-31.11	Average
1.19	-1.49	9.60	0.03	18.14	56.00	-37.86	QP
1.19	-3.97	9.60	0.03	15.66	46.00	-30.34	Average
2.64	11.29	9.65	0.05	30.99	56.00	-25.01	QP
2.64	9.47	9.65	0.05	29.17	46.00	-16.83	Average
2.78	13.34	9.72	0.05	33.11	56.00	-22.89	QP
2.78	10.08	9.72	0.05	29.85	46.00	-16.15	Average
17.94	-4.43	9.92	0.18	15.67	60.00	-44.33	QP
17.94	-9.34	9.92	0.18	10.76	50.00	-39.24	Average


Model No.: VHS-6812-CW-25-BBZ

Line:

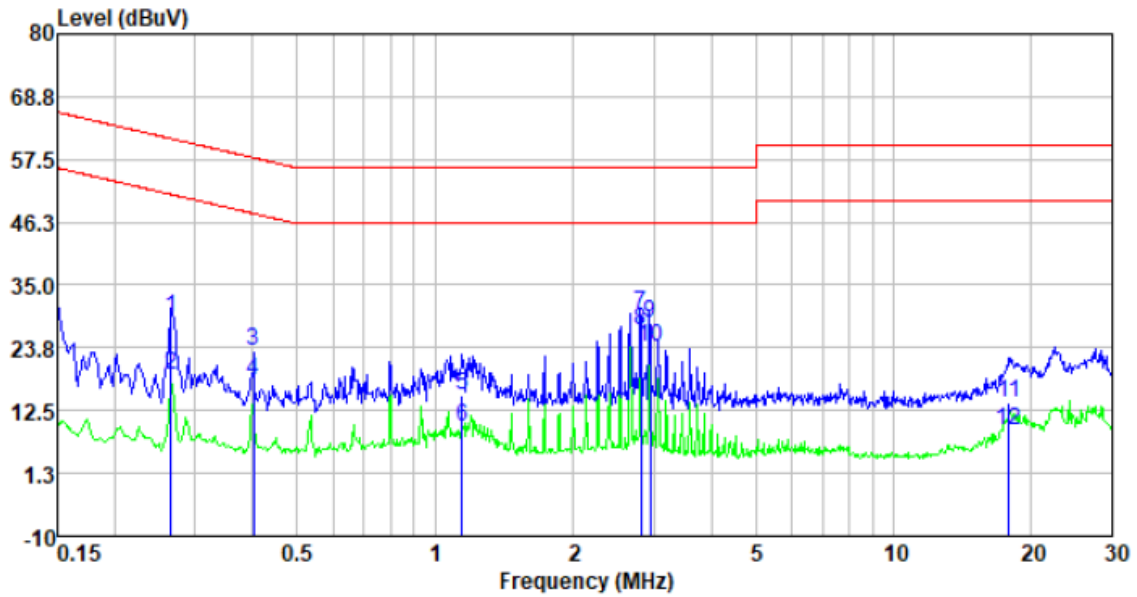

Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	loss	dBuV	dBuV	dB	
0.27	9.69	9.62	0.01	29.32	61.25	-31.93	QP
0.27	-0.83	9.62	0.01	18.80	51.25	-32.45	Average
0.40	3.53	9.62	0.01	23.16	57.84	-34.68	QP
0.40	-1.57	9.62	0.01	18.06	47.84	-29.78	Average
1.15	-4.78	9.87	0.03	15.12	56.00	-40.88	QP
1.15	-10.41	9.87	0.03	9.49	46.00	-36.51	Average
2.81	10.15	9.54	0.05	29.74	56.00	-26.26	QP
2.81	7.16	9.54	0.05	26.75	46.00	-19.25	Average
2.94	8.52	9.50	0.05	28.07	56.00	-27.93	QP
2.94	4.17	9.50	0.05	23.72	46.00	-22.28	Average
17.85	-5.94	9.70	0.18	13.94	60.00	-46.06	QP
17.85	-10.90	9.70	0.18	8.98	50.00	-41.02	Average

Neutral:

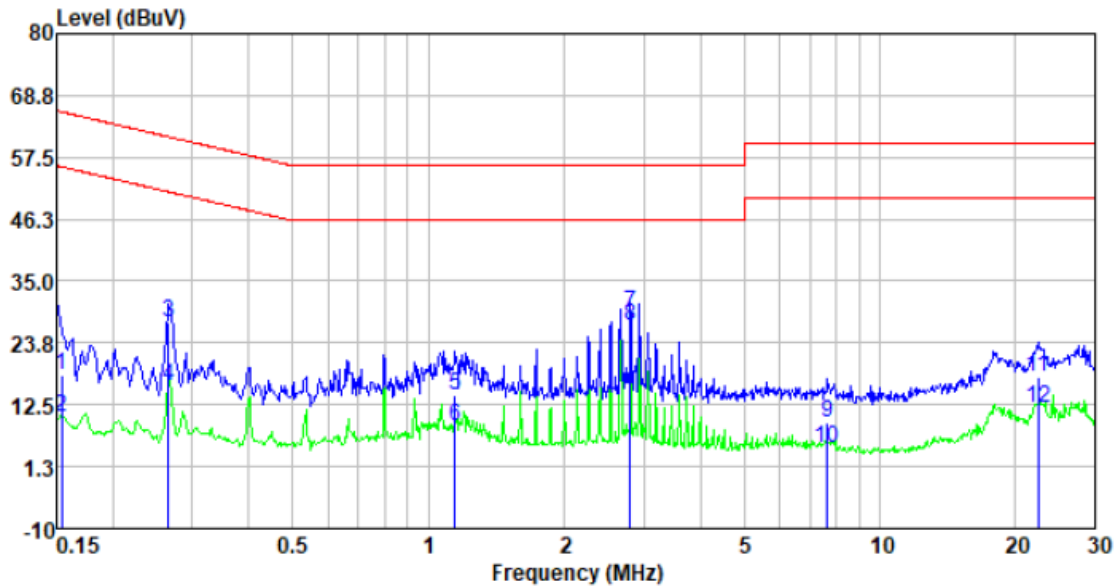




Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	loss	dBuV	dBuV	dB	
0.15	-1.95	9.88	0.01	17.94	65.78	-47.84	QP
0.15	-9.75	9.88	0.01	10.14	55.78	-45.64	Average
0.27	7.72	9.86	0.01	27.59	61.25	-33.66	QP
0.27	-3.93	9.86	0.01	15.94	51.25	-35.31	Average
1.15	-5.58	9.67	0.03	14.12	56.00	-41.88	QP
1.15	-11.17	9.67	0.03	8.53	46.00	-37.47	Average
2.80	9.36	9.73	0.05	29.14	56.00	-26.86	QP
2.80	6.92	9.73	0.05	26.70	46.00	-19.30	Average
7.65	-10.39	9.64	0.09	9.34	60.00	-50.66	QP
7.65	-15.01	9.64	0.09	4.72	50.00	-45.28	Average
22.42	-2.59	9.87	0.19	17.47	60.00	-42.53	QP
22.42	-8.23	9.87	0.19	11.83	50.00	-38.17	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

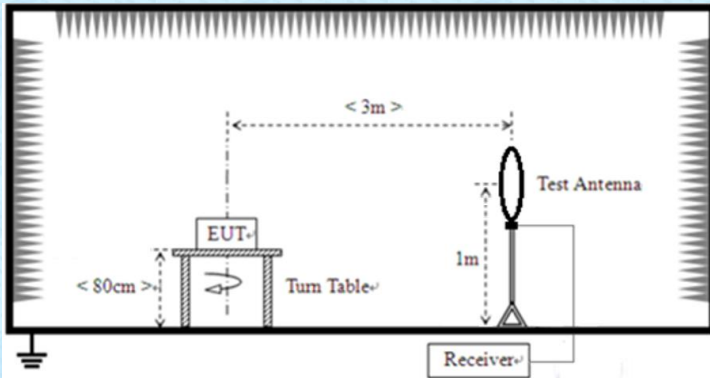Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Remark
	0.009MHz-0.490MHz		2400/F(kHz) @300m		Quasi-peak Value
	0.490MHz-1.705MHz		24000/F(kHz) @30m		Quasi-peak Value
	1.705MHz-30.0MHz		30 @30m		Quasi-peak Value
	30MHz-88MHz		100 @3m		Quasi-peak Value
	88MHz-216MHz		150 @3m		Quasi-peak Value
	216MHz-960MHz		200 @3m		Quasi-peak Value
	960MHz-1GHz		500 @3m		Quasi-peak Value
	Above 1GHz		500 @3m		Average Value
5000 @3m			Peak Value		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to1GHz				

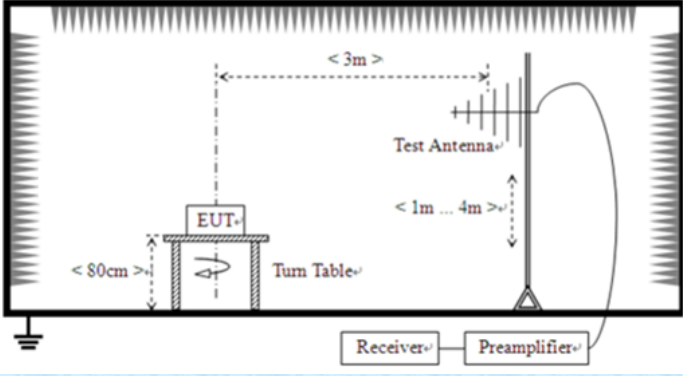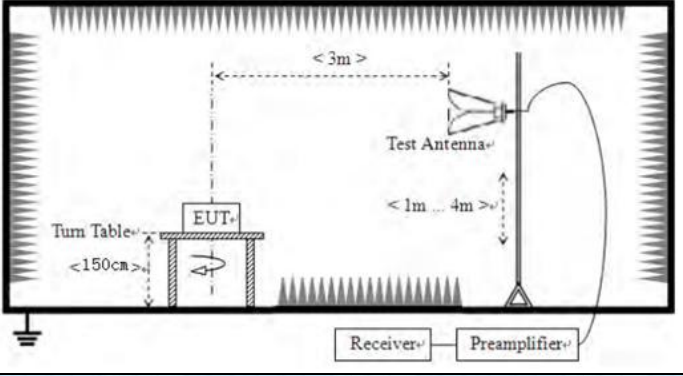	 For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1012mbar
Test voltage:	AC120V 60Hz
Test results:	Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Model No.: VHS-6812-RGBCW-25-BBZ

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2405	106.73	27.14	4.16	39.4	98.63	114.00	-15.37	Vertical
2405	110.52	27.14	4.16	39.4	102.42	114.00	-11.58	Horizontal
2441	107.6	27.18	4.13	39.46	99.45	114.00	-14.55	Vertical
2441	111.44	27.18	4.13	39.46	103.29	114.00	-10.71	Horizontal
2480	106.59	27.22	4.11	39.51	98.41	114.00	-15.59	Vertical
2480	114.95	27.22	4.11	39.51	106.77	114.00	-7.23	Horizontal


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2405	95.46	27.14	4.16	39.4	87.36	94.00	-6.64	Vertical
2405	97.12	27.14	4.16	39.4	89.02	94.00	-4.98	Horizontal
2441	97.6	27.18	4.13	39.46	89.45	94.00	-4.55	Vertical
2441	98.95	27.18	4.13	39.46	90.8	94.00	-3.20	Horizontal
2480	96.49	27.22	4.11	39.51	88.31	94.00	-5.69	Vertical
2480	98.92	27.22	4.11	39.51	90.74	94.00	-3.26	Horizontal


Note: For fundamental frequency , RBW>20dB BW, VBW>=RBW, PK detector for PK value, RMS detector for AV value

Test plot as follows:

Only show the worst case: 2441MHz, Vertical

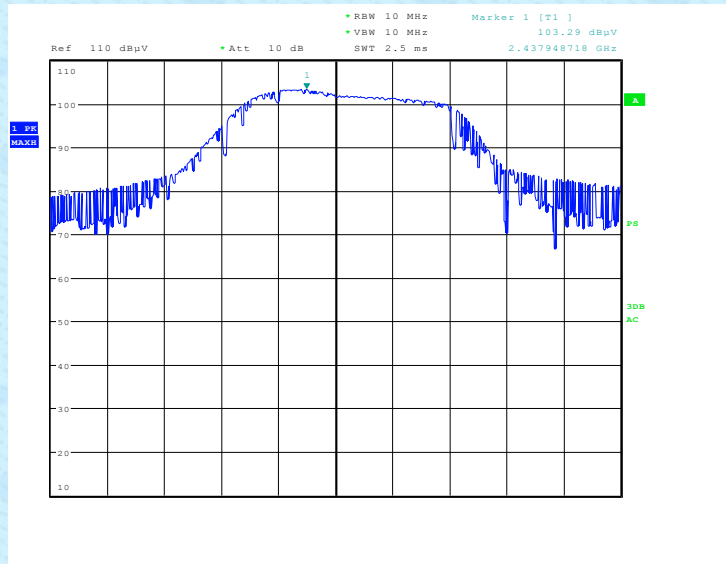

PK detector is for PK value

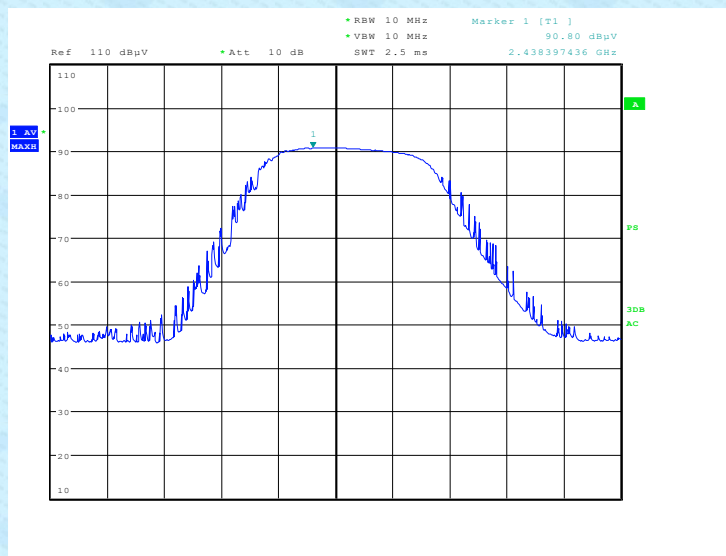

RMS detector is for AV value

7.3.2 Spurious emissions

■ Below 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

■ Below 1GHz


Pre-scan all test modes, found worst case at 2405MHz, and so only show the test result of it

Model No.: VHS-6812-RGBCW-25-BBZ

Horizontal

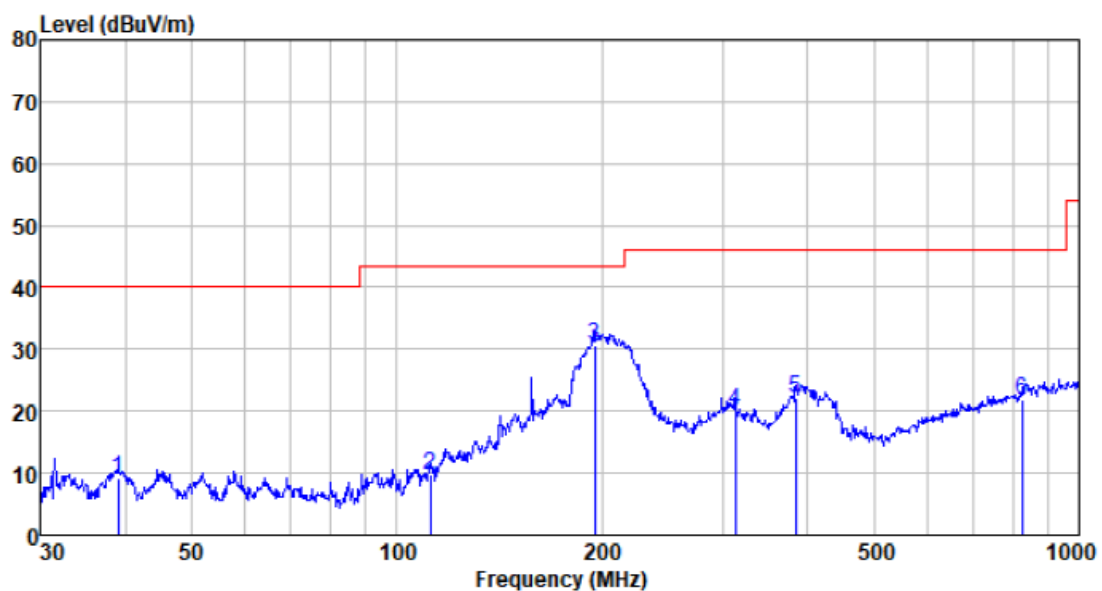


Vertical

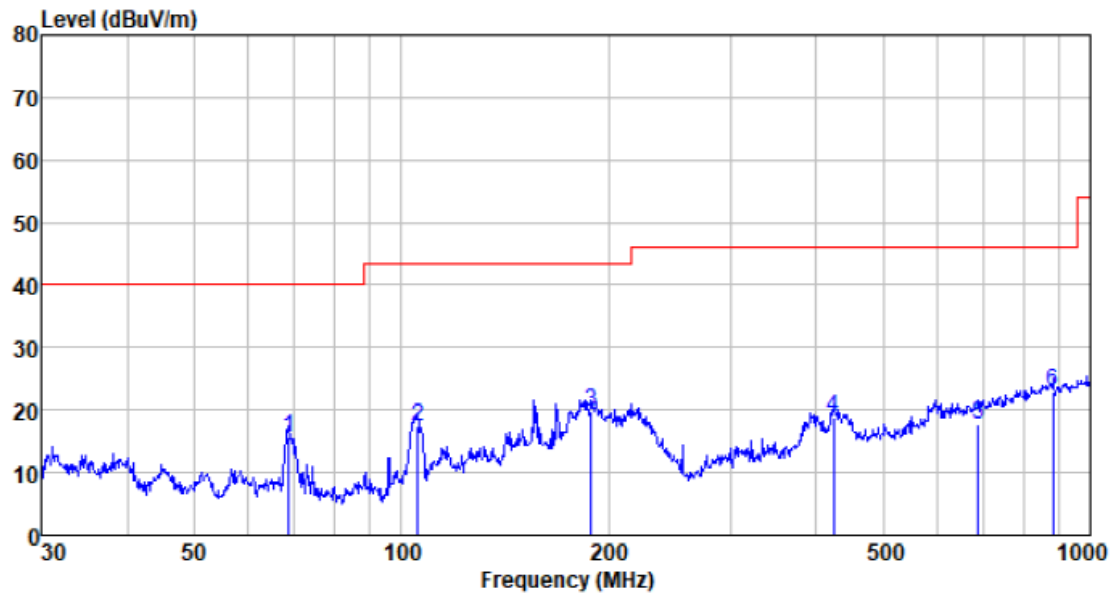

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
68.631	35.35	10.94	1.63	32.37	15.55	40.00	-24.45	QP
105.642	37.48	10.56	2.00	32.49	17.55	43.50	-25.95	QP
188.413	38.52	10.76	2.77	32.41	19.64	43.50	-23.86	QP
423.540	31.73	15.37	3.96	32.24	18.82	46.00	-27.18	QP
687.151	23.84	20.34	5.03	31.51	17.70	46.00	-28.30	QP
881.407	25.67	22.90	5.68	31.10	23.15	46.00	-22.85	QP


Model No.: VHS-6803-RGBCW-25-BBZ

Horizontal

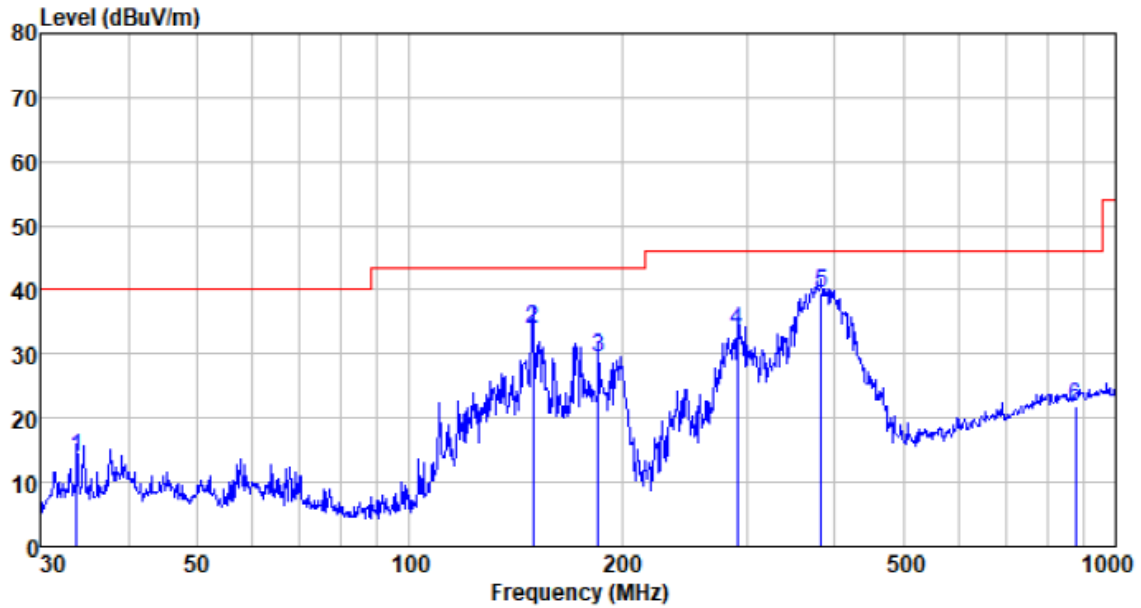

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
33.799	32.21	12.76	1.17	32.30	13.84	40.00	-26.16	QP
149.486	49.43	14.65	2.46	32.45	34.09	43.50	-9.41	QP
185.138	48.01	11.26	2.75	32.41	29.61	43.50	-13.89	QP
291.036	50.57	12.14	3.38	32.31	33.78	46.00	-12.22	QP
382.588	53.62	14.35	3.81	32.26	39.52	46.00	-6.48	QP
878.322	24.37	22.87	5.68	31.10	21.82	46.00	-24.18	QP


Vertical

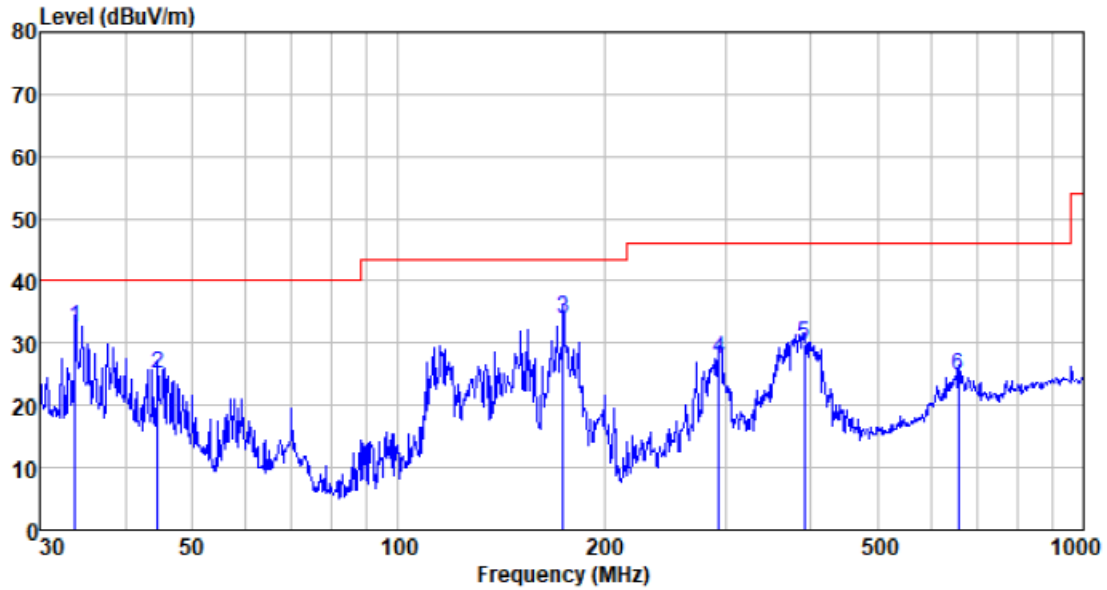

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
33.799	50.81	12.76	1.17	32.30	32.44	40.00	-7.56	QP
44.587	42.62	13.38	1.32	32.30	25.02	40.00	-14.98	QP
173.814	50.75	13.04	2.66	32.43	34.02	43.50	-9.48	QP
294.114	44.13	12.26	3.39	32.31	27.47	46.00	-18.53	QP
390.723	43.59	14.53	3.84	32.25	29.71	46.00	-16.29	QP
656.530	31.43	20.00	4.89	31.63	24.69	46.00	-21.31	QP


Model No.: VHS-6806-RGBCW-25-BBZ

Horizontal

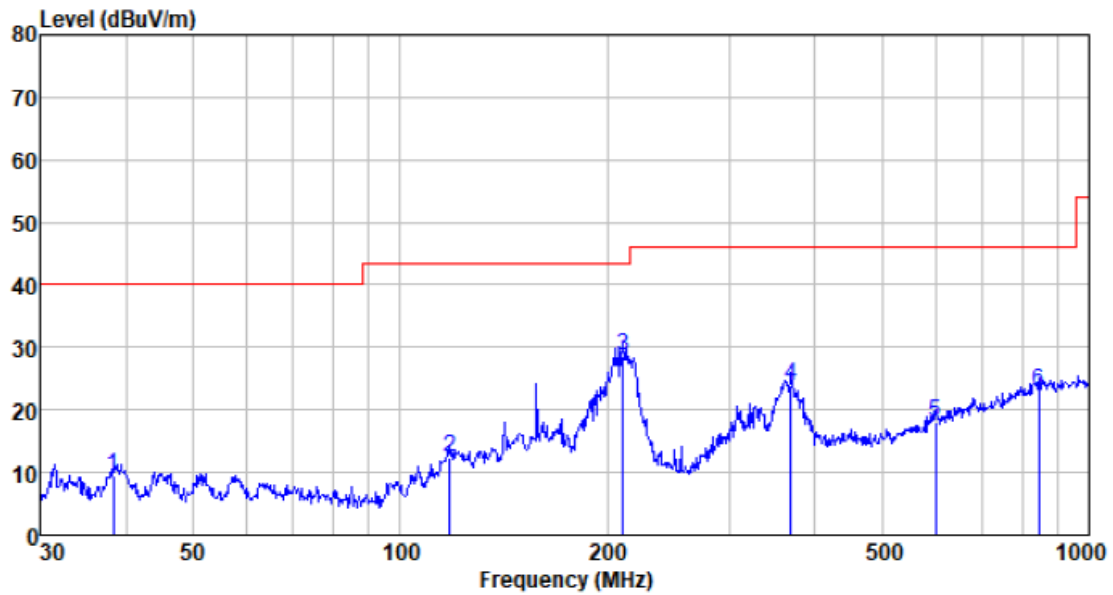

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
38.346	26.50	14.00	1.24	32.30	9.44	40.00	-30.56	QP
118.186	30.18	12.42	2.15	32.48	12.27	43.50	-31.23	QP
210.786	48.19	9.88	2.92	32.39	28.60	43.50	-14.90	QP
369.405	38.32	14.08	3.75	32.27	23.88	46.00	-22.12	QP
599.321	26.25	18.97	4.63	31.84	18.01	46.00	-27.99	QP
845.088	26.06	22.50	5.59	31.10	23.05	46.00	-22.95	QP


Vertical

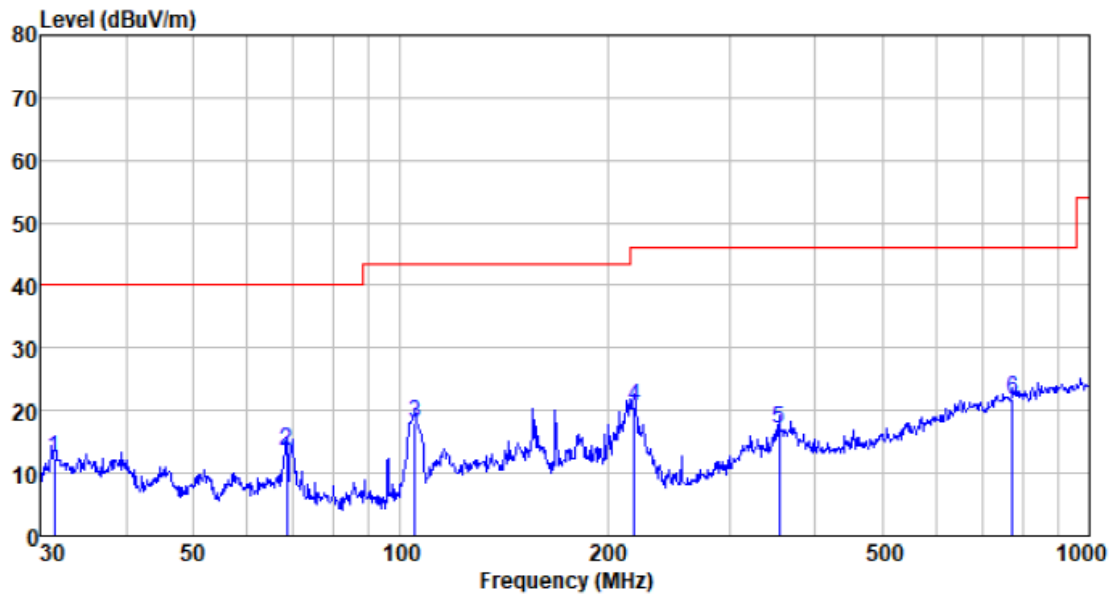

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.510	31.10	12.50	1.13	32.30	12.43	40.00	-27.57	QP
68.391	33.40	10.96	1.62	32.37	13.61	40.00	-26.39	QP
104.903	38.05	10.47	1.99	32.50	18.01	43.50	-25.49	QP
218.309	40.52	9.67	2.97	32.38	20.78	46.00	-25.22	QP
354.183	31.98	13.68	3.69	32.27	17.08	46.00	-28.92	QP
774.158	25.94	21.58	5.37	31.19	21.70	46.00	-24.30	QP


Model No.: VHS-6803-CW-25-BBZ

Horizontal

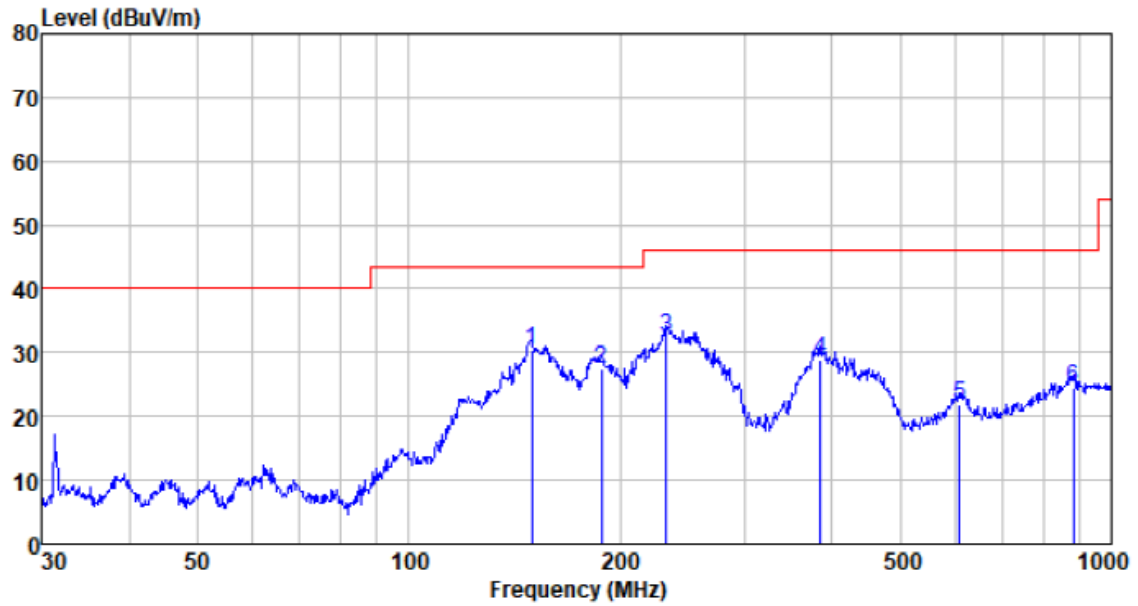

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
149.486	45.61	14.65	2.46	32.45	30.27	43.50	-13.23	QP
187.753	46.25	10.82	2.77	32.41	27.43	43.50	-16.07	QP
232.532	51.96	9.70	3.06	32.37	32.35	46.00	-13.65	QP
385.281	43.05	14.41	3.82	32.26	29.02	46.00	-16.98	QP
607.787	29.72	19.16	4.67	31.80	21.75	46.00	-24.25	QP
881.407	27.01	22.90	5.68	31.10	24.49	46.00	-21.51	QP


Vertical

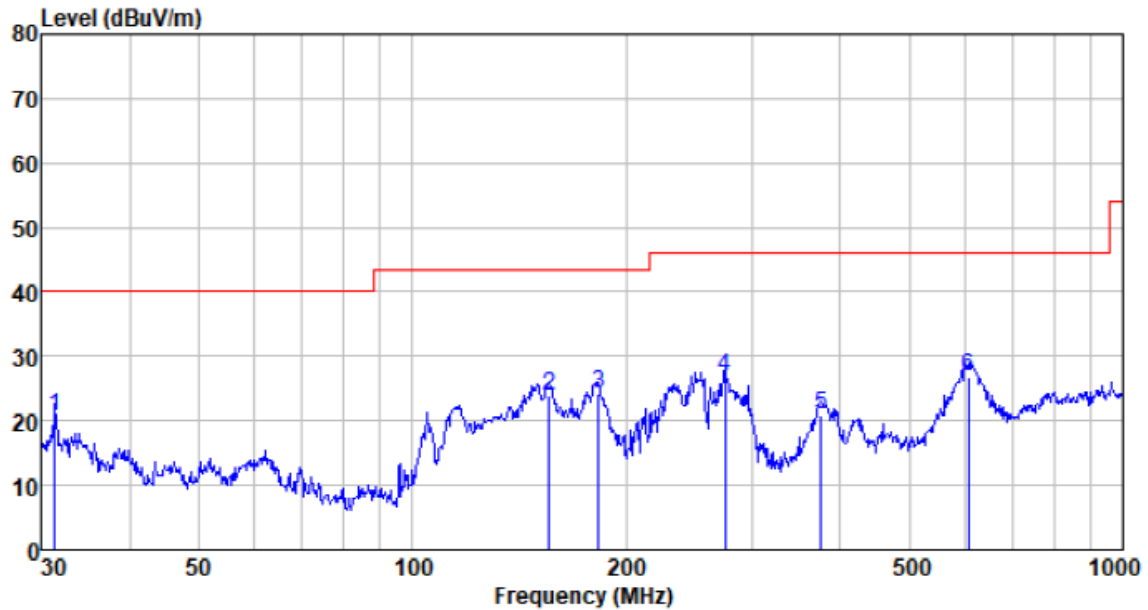

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.399	39.32	12.50	1.13	32.30	20.65	40.00	-19.35	QP
155.910	39.13	14.80	2.52	32.44	24.01	43.50	-19.49	QP
182.559	42.17	11.63	2.73	32.42	24.11	43.50	-19.39	QP
275.157	44.16	11.61	3.30	32.32	26.75	46.00	-19.25	QP
375.939	35.36	14.22	3.78	32.26	21.10	46.00	-24.90	QP
605.659	34.94	19.11	4.66	31.81	26.90	46.00	-19.10	QP


Model No.: VHS-6806-CW-25-BBZ

Horizontal

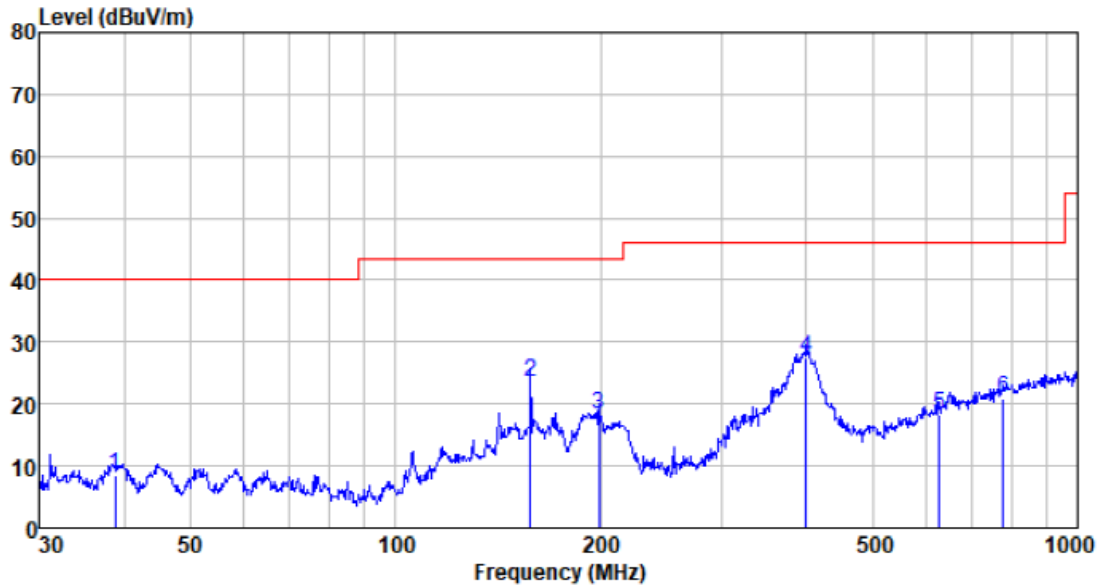

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
38.752	25.64	14.13	1.24	32.30	8.71	40.00	-31.29	QP
157.559	38.75	14.74	2.53	32.44	23.58	43.50	-19.92	QP
198.588	37.36	10.40	2.84	32.40	18.20	43.50	-25.30	QP
400.432	41.01	14.81	3.88	32.25	27.45	46.00	-18.55	QP
627.274	25.67	19.65	4.76	31.73	18.35	46.00	-27.65	QP
776.878	25.16	21.64	5.38	31.18	21.00	46.00	-25.00	QP


Vertical

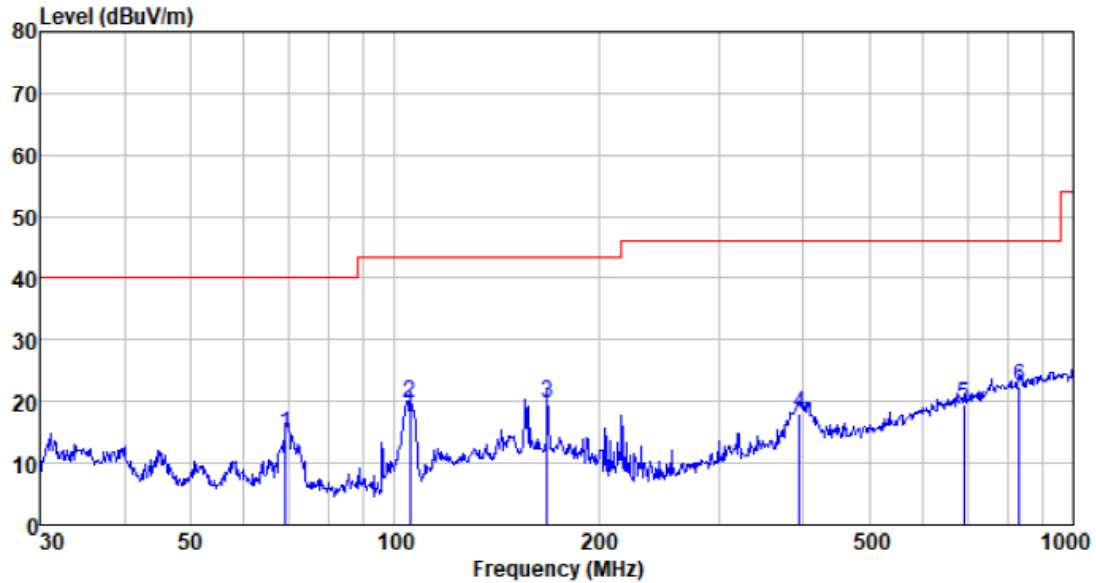

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
69.114	34.50	10.89	1.64	32.38	14.65	40.00	-25.35	QP
105.272	39.64	10.53	2.00	32.49	19.68	43.50	-23.82	QP
167.824	35.96	13.62	2.62	32.43	19.77	43.50	-23.73	QP
394.855	31.77	14.69	3.86	32.25	18.07	46.00	-27.93	QP
689.565	25.45	20.39	5.04	31.50	19.38	46.00	-26.62	QP
833.317	25.61	22.40	5.56	31.10	22.47	46.00	-23.53	QP


Model No.: VHS-6812-CW-25-BBZ

Horizontal

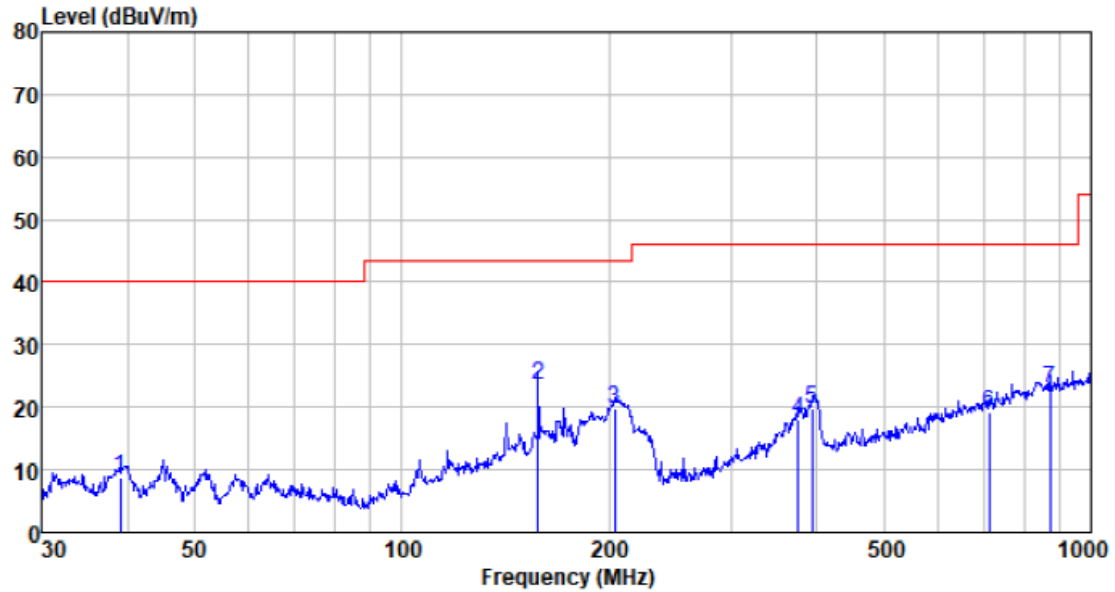

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
39.024	25.76	14.20	1.25	32.30	8.91	40.00	-31.09	QP
157.559	38.74	14.74	2.53	32.44	23.57	43.50	-19.93	QP
203.523	38.87	10.30	2.87	32.40	19.64	43.50	-23.86	QP
375.939	32.31	14.22	3.78	32.26	18.05	46.00	-27.95	QP
393.472	33.55	14.64	3.85	32.25	19.79	46.00	-26.21	QP
711.674	24.74	20.70	5.13	31.42	19.15	46.00	-26.85	QP
872.183	25.74	22.80	5.66	31.10	23.10	46.00	-22.90	QP

Vertical

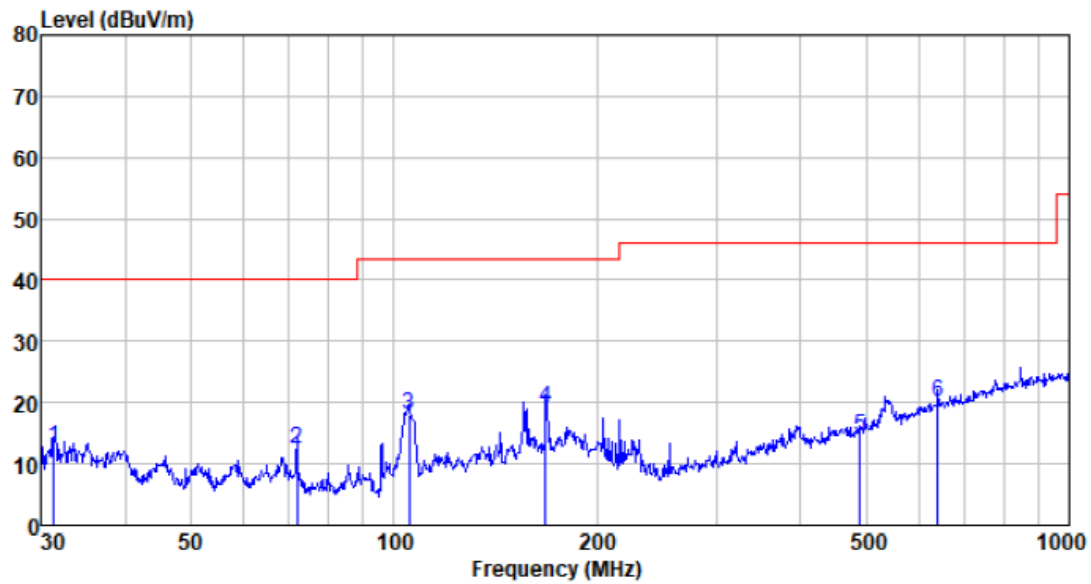


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.399	31.24	12.50	1.13	32.30	12.57	40.00	-27.43	QP
71.832	32.60	10.62	1.65	32.39	12.48	40.00	-27.52	QP
105.272	37.83	10.53	2.00	32.49	17.87	43.50	-25.63	QP
167.824	35.36	13.62	2.62	32.43	19.17	43.50	-24.33	QP
490.745	25.78	16.61	4.16	32.20	14.35	46.00	-31.65	QP
638.369	27.32	19.77	4.81	31.69	20.21	46.00	-25.79	QP

Model No.: VHS-6812-RGBCW-25-BBZ


■ Above 1GHz

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

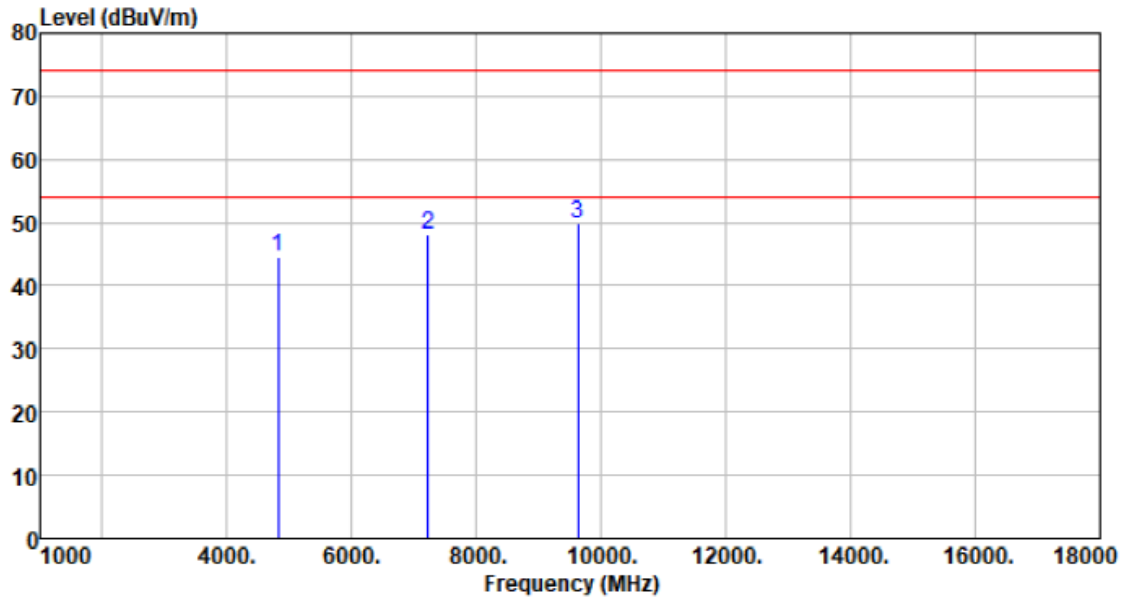


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4810.000	44.96	32.02	6.01	38.54	44.45	74.00	-29.55	Peak
7215.000	43.24	36.23	7.93	39.15	48.25	74.00	-25.75	Peak
9620.000	37.41	38.20	14.60	40.22	49.99	74.00	-24.01	Peak

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

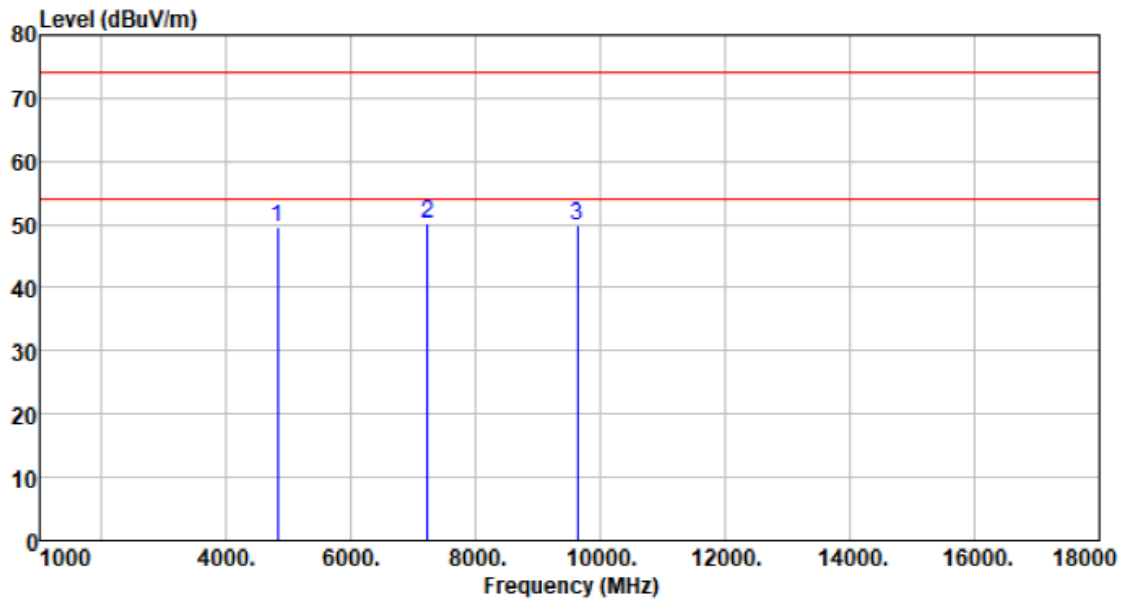


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4810.000	49.96	32.02	6.01	38.54	49.45	74.00	-24.55	Peak
7215.000	45.23	36.23	7.93	39.15	50.24	74.00	-23.76	Peak
9620.000	37.38	38.20	14.60	40.22	49.96	74.00	-24.04	Peak

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

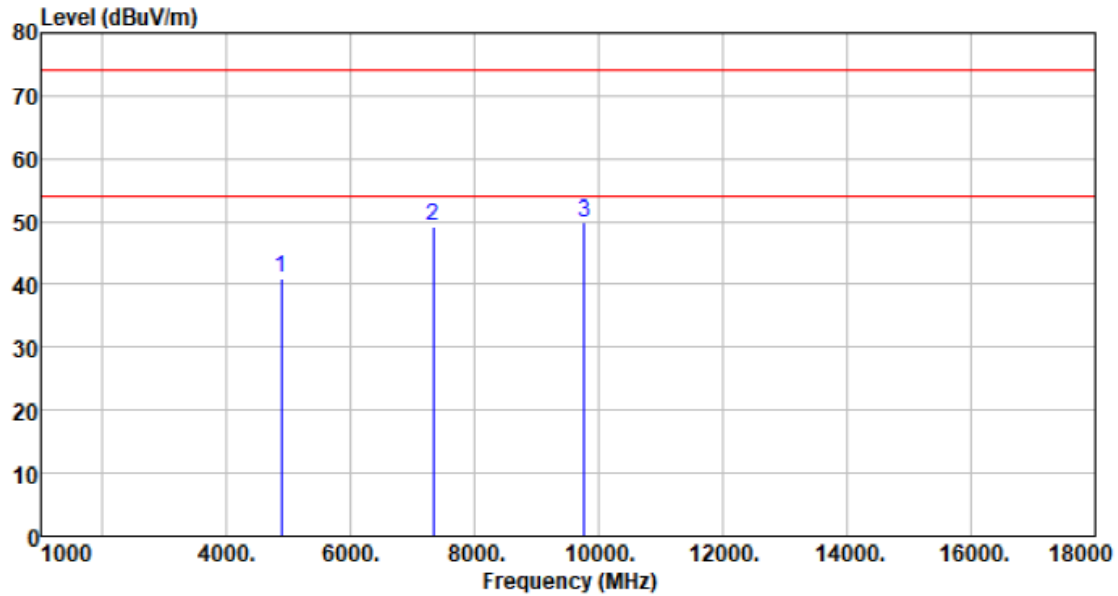


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	41.30	32.10	6.03	38.52	40.91	74.00	-33.09	Peak
7320.000	44.27	36.30	8.04	39.22	49.39	74.00	-24.61	Peak
9760.000	40.64	38.20	11.35	40.25	49.94	74.00	-24.06	Peak

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

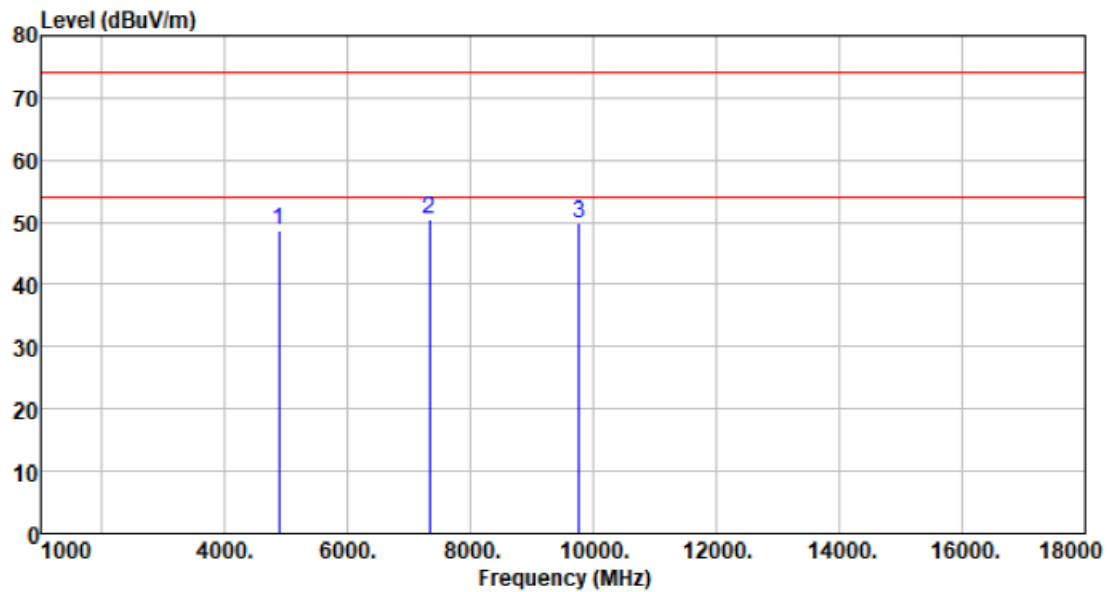


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	49.17	32.10	6.03	38.52	48.78	74.00	-25.22	Peak
7320.000	45.28	36.30	8.04	39.22	50.40	74.00	-23.60	Peak
9760.000	40.54	38.20	11.35	40.25	49.84	74.00	-24.16	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

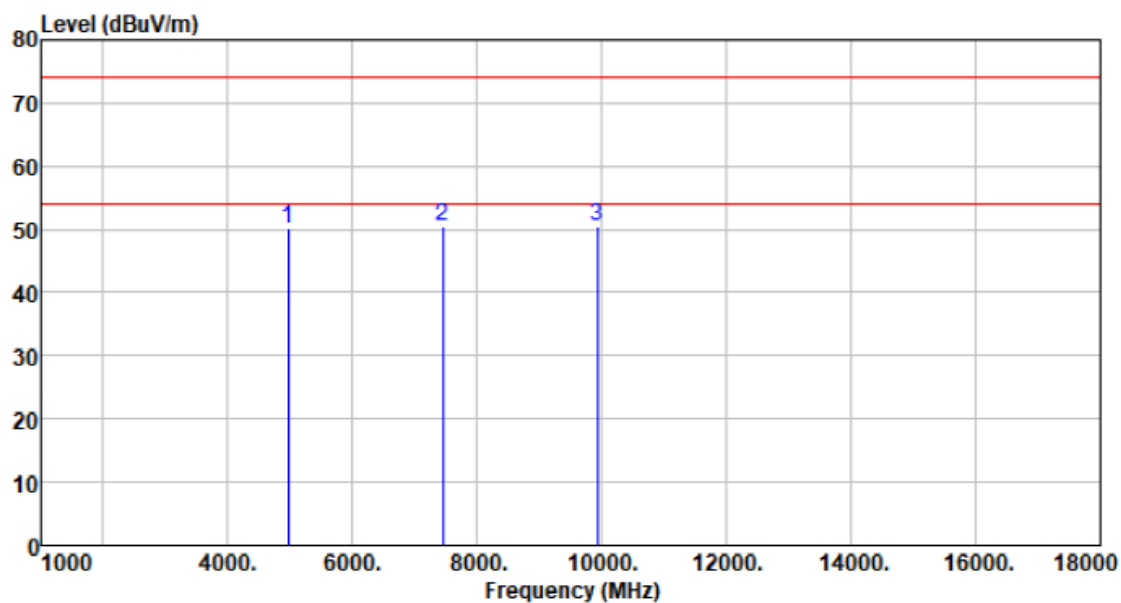

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	50.32	32.20	6.05	38.51	50.06	74.00	-23.94	Peak
7440.000	45.28	36.30	8.16	39.31	50.43	74.00	-23.57	Peak
9920.000	41.72	38.24	10.76	40.28	50.44	74.00	-23.56	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

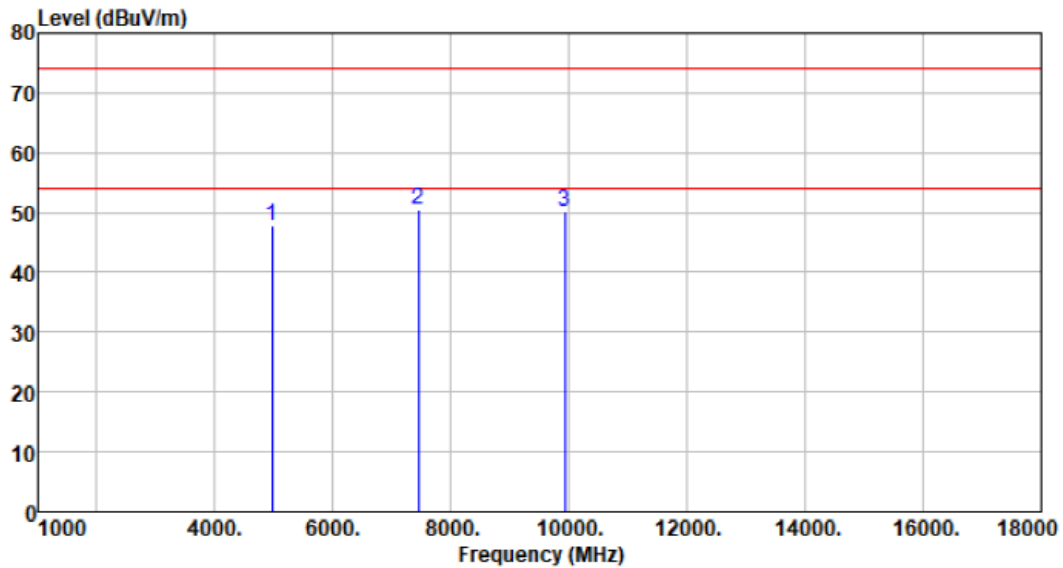

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	48.05	32.20	6.05	38.51	47.79	74.00	-26.21	Peak
7440.000	45.38	36.30	8.16	39.31	50.53	74.00	-23.47	Peak
9920.000	41.59	38.24	10.76	40.28	50.31	74.00	-23.69	Peak

Remarks:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. For above 18GHz, no emission found.
4. If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.


Model No.: VHS-6812-RGBCW-25-BBZ

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

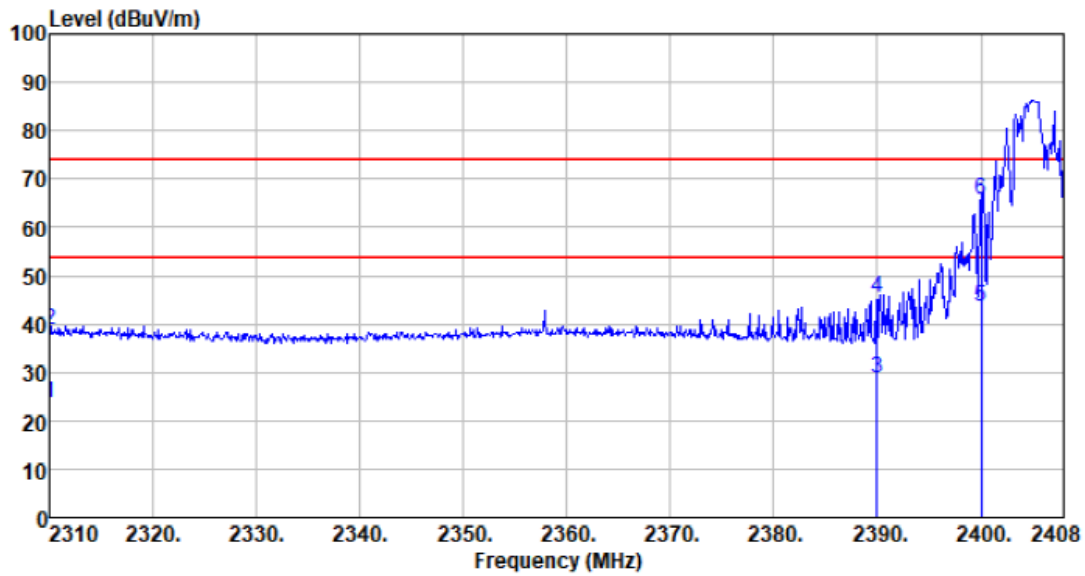


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	31.51	27.00	4.13	39.14	23.50	54.00	-30.50	Average
2310.000	46.72	27.00	4.13	39.14	38.71	74.00	-35.29	Peak
2390.000	36.75	27.08	4.17	39.34	28.66	54.00	-25.34	Average
2390.000	53.58	27.08	4.17	39.34	45.49	74.00	-28.51	Peak
2400.000	51.54	27.10	4.18	39.36	43.46	54.00	-10.54	Average
2400.000	73.62	27.10	4.18	39.36	65.54	74.00	-8.46	Peak

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

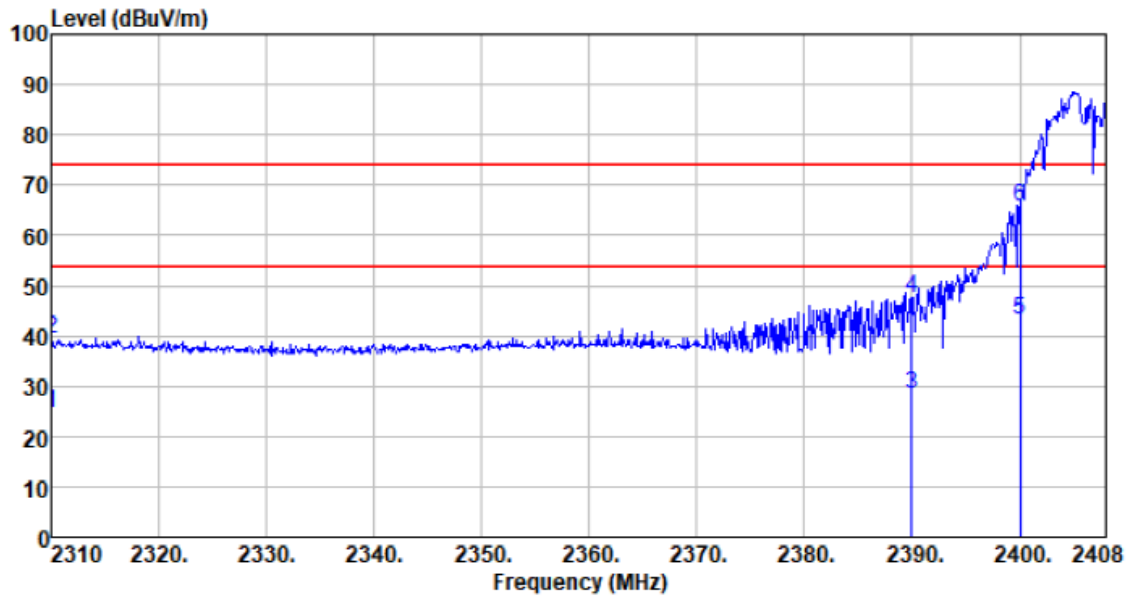


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	32.78	27.00	4.13	39.14	24.77	54.00	-29.23	Average
2310.000	47.56	27.00	4.13	39.14	39.55	74.00	-34.45	Peak
2390.000	36.43	27.08	4.17	39.34	28.34	54.00	-25.66	Average
2390.000	55.51	27.08	4.17	39.34	47.42	74.00	-26.58	Peak
2400.000	51.43	27.10	4.18	39.36	43.35	54.00	-10.65	Average
2400.000	73.66	27.10	4.18	39.36	65.58	74.00	-8.42	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

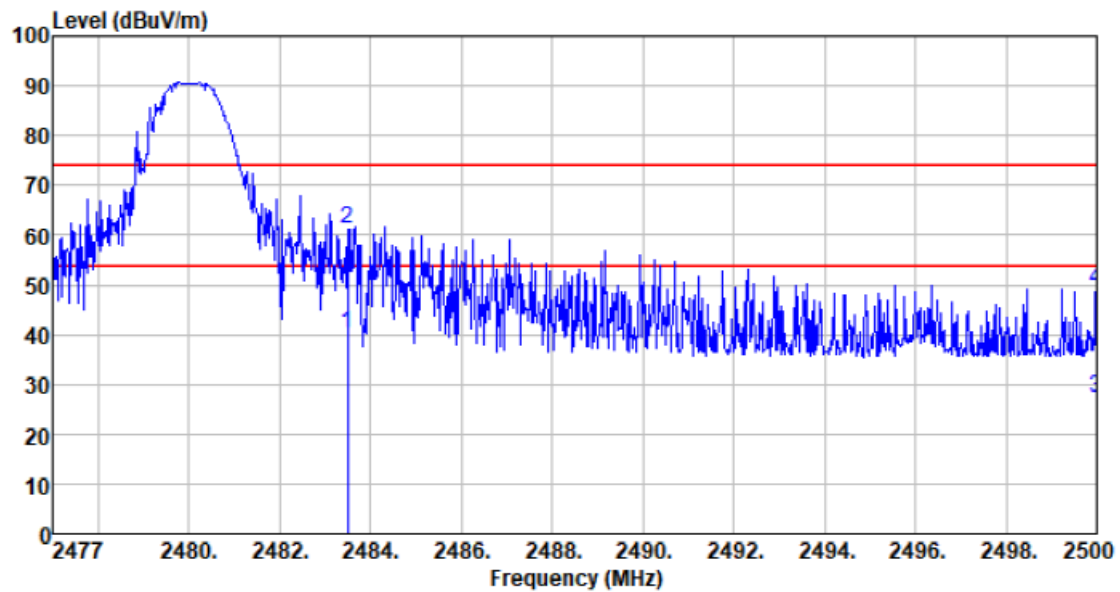

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	48.48	27.27	4.08	39.56	40.27	54.00	-13.73	Average
2483.500	69.31	27.27	4.08	39.56	61.10	74.00	-12.90	Peak
2500.000	35.47	27.30	4.06	39.60	27.23	54.00	-26.77	Average
2500.000	57.25	27.30	4.06	39.60	49.01	74.00	-24.99	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

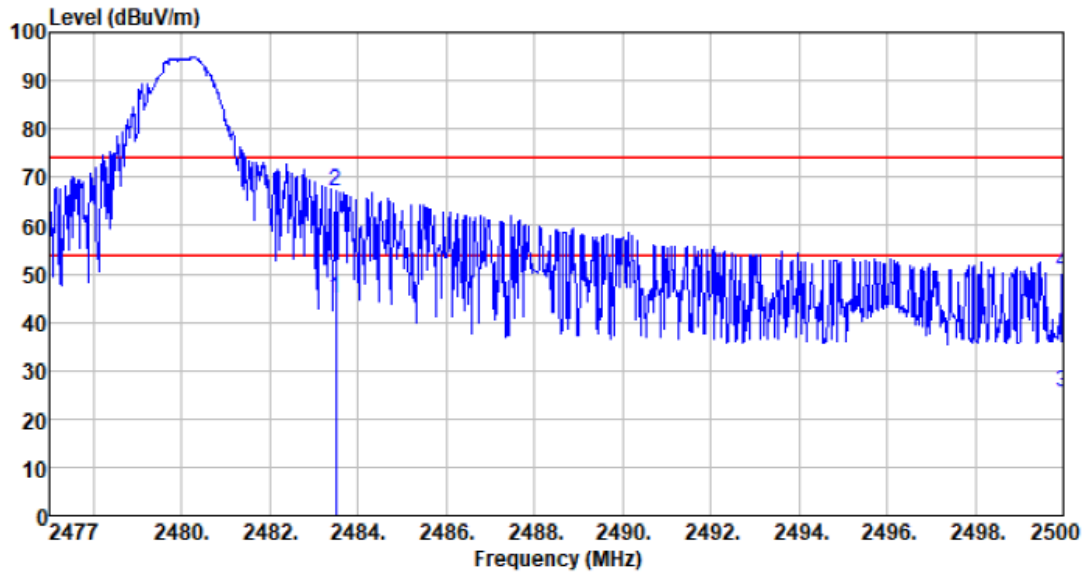


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	53.17	27.27	4.08	39.56	44.96	54.00	-9.04	Average
2483.500	75.30	27.27	4.08	39.56	67.09	74.00	-6.91	Peak
2500.000	33.77	27.30	4.06	39.60	25.53	54.00	-28.47	Average
2500.000	58.50	27.30	4.06	39.60	50.26	74.00	-23.74	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. For above 18GHz, no emission found

7.4 20dB Occupy Bandwidth

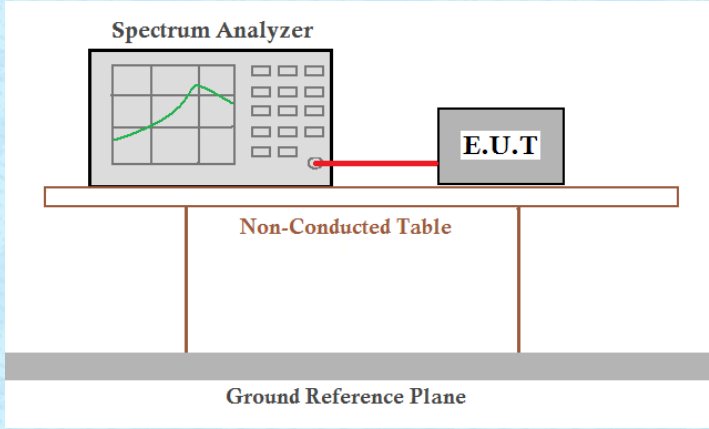
Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Model No.: VHS-6812-RGBCW-25-BBZ

Test channel	20dB bandwidth(MHz)	Result
Lowest	7.631	Pass
Middle	6.045	Pass
Highest	4.550	Pass


Test plot as follows:

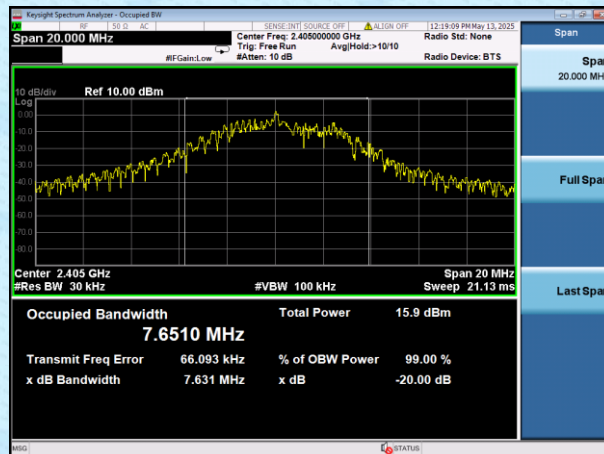

Lowest channel

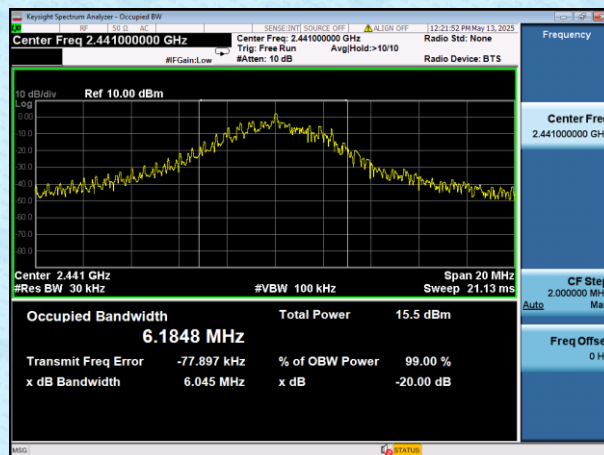

Middle channel

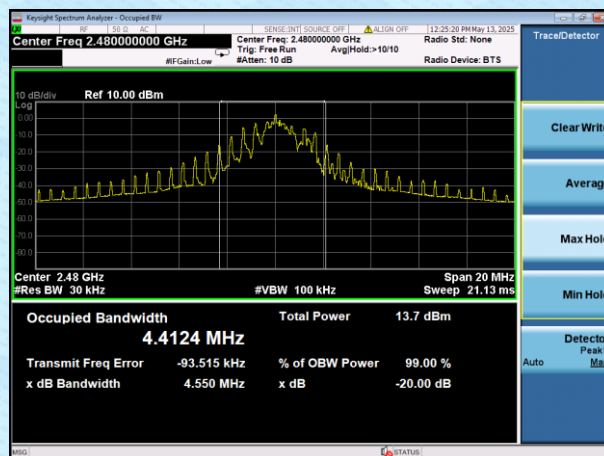

Highest channel

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----