



Bluetooth Radio FCC Test Report

Equipment : Norton Core Secure WiFi Router
Brand Name : Norton Core
Model No. : 517
FCC ID : 2AI6F-517
Standard : 47 CFR FCC Part 15.247
Frequency : 2400 MHz – 2483.5 MHz
Function : Point-to-multipoint; Point-to-point
Applicant : Symantec Corporation
350 Ellis Street Mountain View, CA 94043 United States
Manufacturer : CyberTAN Technology Inc.
No. 99, Park Avenue III, Science-based Industrial Park, Hsinchu, 308 Taiwan

The product sample received on Aug. 18, 2016 and completely tested on Mar. 14, 2017. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONALINC., the test report shall not be reproduced except in full.


Cliff Chang
SPORTON INTERNATIONAL INC.





Table of Contents

| | | |
|----------|---|-----------|
| 1 | GENERAL DESCRIPTION | 5 |
| 1.1 | Information..... | 5 |
| 1.2 | Testing Applied Standards | 7 |
| 1.3 | Testing Location Information | 7 |
| 1.4 | Measurement Uncertainty | 8 |
| 2 | TEST CONFIGURATION OF EUT | 9 |
| 2.1 | Test Channel Mode | 9 |
| 2.2 | The Worst Case Measurement Configuration..... | 10 |
| 2.3 | EUT Operation during Test | 10 |
| 2.4 | Accessories | 11 |
| 2.5 | Support Equipment..... | 11 |
| 2.6 | Test Setup Diagram | 12 |
| 3 | TRANSMITTER TEST RESULT | 15 |
| 3.1 | AC Power-line Conducted Emissions | 15 |
| 3.2 | DTS Bandwidth | 17 |
| 3.3 | Maximum Conducted Output Power | 18 |
| 3.4 | Power Spectral Density | 20 |
| 3.5 | Emissions in Non-restricted Frequency Bands | 22 |
| 3.6 | Emissions in Restricted Frequency Bands..... | 23 |
| 4 | TEST EQUIPMENT AND CALIBRATION DATA | 27 |

APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS**APPENDIX B. TEST RESULTS OF DTS BANDWIDTH****APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER****APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY****APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS****APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS****APPENDIX G. TEST RESULTS OF RADIATED EMISSION CO-LOCATION****APPENDIX H. TEST PHOTOS****PHOTOGRAPHS OF EUT V01**



Summary of Test Result

| Conformance Test Specifications | | | | |
|--|-------------------------|---|---|---------------|
| Report Clause | Ref. Std. Clause | Description | Limit | Result |
| 1.1.2 | 15.203 | Antenna Requirement | FCC 15.203 | Complied |
| 3.1 | 15.207 | AC Power-line Conducted Emissions | FCC 15.207 | Complied |
| 3.2 | 15.247(a) | DTS Bandwidth | $\geq 500\text{kHz}$ | Complied |
| 3.3 | 15.247(b) | Maximum Conducted Output Power | Power [dBm]:30 | Complied |
| 3.4 | 15.247(e) | Power Spectral Density | PSD [dBm/3kHz]:8 | Complied |
| 3.5 | 15.247(d) | Emissions in Non-restricted Frequency Bands | Non-Restricted Bands: $>30\text{ dBc}$ | Complied |
| 3.6 | 15.247(d) | Emissions in Restricted Frequency Bands | Restricted Bands: FCC 15.209 | Complied |



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

| Frequency Range (MHz) | Bluetooth Mode | Ch. Frequency (MHz) | Channel Number |
|-----------------------|----------------|---------------------|----------------|
| 2400-2483.5 | LE | 2402-2480 | 0-39 [40] |

| Band | Mode | BWch (MHz) | Nant |
|---------------|--------------|------------|------|
| 2.4-2.4835GHz | BT-LE(1Mbps) | 1 | 1 |

Note:

- 2.4G is the 2.4GHz Band (2.4-2.4835GHz).
- Bluetooth LE uses a GFSK (1Mbps) modulation for DSSS.
- BWch is the channel separation
- Nss-Min is the minimum number of spatial streams.
- Nant is the number of outputs. e.g., 2(2, 3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

| Ant. | Brand | Model Name P/N | Antenna Type | Connector | Gain (dBi) | | | |
|------|---------|------------------------|---------------------|-----------|------------|------------|------------|------|
| | | | | | 2.4GHz | 5GHz B1 | 5GHz B4 | BT |
| 1 | Airgain | M2410DCR-UV-G1XST125BU | Dual-band Dipole | I-PEX | 1.5 | 2.3 | 3.3 | - |
| 2 | Airgain | M2410DCR-UV-B1XST135BU | Dual-band Dipole | I-PEX | 1.5 | 2.3 | 3.3 | - |
| 3 | Airgain | M2410DCR-UV-A1XST115BU | Dual-band Dipole | I-PEX | 1.5 | 2.3 | 3.3 | - |
| 4 | Airgain | M2410DCR-UV-G1XST125BU | Dual-band Dipole | I-PEX | 1.5 | 2.3 | 3.3 | - |
| 5 | PSA | RFMTA271200NNAB003 | PIFA Anantnna | N/A | - | - | - | 2.54 |

Note: The EUT has five antennas.

Ant.1 = Chain 1(port 1), Ant.2 = Chain 2(port 2), Ant.3 = Chain 3(port 3), Ant.4 = Chain 4(port 4), Ant.5= Chain 5(port 1).

For WLAN function (4TX, 4RX):

Chain 1 ~ Chain 4 can be used as transmitting/receiving antenna.

Chain 1 ~ Chain 4 could transmit/receive simultaneously.

For Bluetooth function (1TX, 1RX):

Only Chain 5 can be used as transmitting/receiving functions.

**1.1.3 Mode Test Duty Cycle**

| Mode | DC | DCF(dB) |
|--------------|------|---------|
| BT-LE(1Mbps) | 0.62 | 2.076 |

1.1.4 EUT Operational Condition

| | |
|----------------|--------------------|
| EUT Power Type | From Power Adapter |
|----------------|--------------------|

1.1.5 Table for Multiple Listing

The EUT has two exterior which are identical to each other in all aspects except for the following table:

| Brand Name | Model Name | EUT | Color |
|-------------|------------|-----|---------------|
| Norton Core | 517 | 1 | Granite Gray |
| | | 2 | Titanium Gold |



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v03r05
- ♦ FCC KDB 412172 D01 v01r01

1.3 Testing Location Information

| Testing Location | | | | | |
|-------------------------------------|--------|--|----------------------|----------------------|--|
| <input type="checkbox"/> | HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. | TEL : 886-3-327-3456 | FAX : 886-3-318-0055 | |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. | TEL : 886-3-656-9065 | FAX : 886-3-656-9085 | |

| Test Condition | Test Site No. | Test Engineer | Test Environment | Test Date |
|----------------|---------------|---------------------------------------|------------------|-------------------------------------|
| RF Conducted | TH01-CB | Serway Li | 20°C / 60% | Mar. 07, 2017 Mar. 08, 2017 |
| Radiated | 03CH01-CB | Zero Chen, Nyle, Chang, Justin Lin | 22°C / 54% | Dec. 26, 2016 Mar. 14, 2017 |
| AC Conduction | CO01-CB | Ryo Fan | 23°C / 61% | Dec. 28, 2016 |

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

| Test Items | Uncertainty | Remark |
|--------------------------------------|-----------------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz) | 3.2 dB | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 3.6 dB | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz) | 3.7 dB | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz) | 3.5 dB | Confidence levels of 95% |
| Conducted Emission | 1.7 dB | Confidence levels of 95% |
| Output Power Measurement | 1.33 dB | Confidence levels of 95% |
| Power Density Measurement | 1.27 dB | Confidence levels of 95% |
| Bandwidth Measurement | 9.74×10^{-8} | Confidence levels of 95% |



2 Test Configuration of EUT

2.1 Test Channel Mode

| Mode | Power Setting |
|--------------|----------------------|
| BT-LE(1Mbps) | - |
| 2402MHz | 0 |
| 2440MHz | 0 |
| 2480MHz | 0 |



2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | AC power-line conducted emissions |
| Condition | AC power-line conducted measurement for line and neutral |
| Operating Mode | Normal Link |

| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands |
| Test Condition | Conducted measurement at transmit chains |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | Emissions in Restricted Frequency Bands |
| Test Condition | Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| Operating Mode < 1GHz | Normal Link |
| Operating Mode > 1GHz | CTX |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation |
| Operating Mode | |
| 1 | Bluetooth+WLAN 2.4GHz +WLAN 5GHz |

Refer to Sporton Test Report No.: FA681620 for Co-location RF Exposure Evaluation.

Note: 1. The EUT can only be used at Z axis position.

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.



2.4 Accessories

| Accessories | | | | |
|----------------------------------|------------|---------------|--|--|
| Equipment Name | Brand Name | Model Name | Rating | |
| Adapter | Delta | ADP-360DW B2A | Input: 100-120V ~ 60Hz 0.9A Output: 12V, 3.0A | |
| RJ-45 cable*1: Non-shielded 1.8m | | | | |

2.5 Support Equipment

For Test Site No: CO01-CB

| Support Equipment | | | | |
|-------------------|-----------------|------------|------------|------------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| 1 | NB*4 | DELL | E6430 | DoC |
| 2 | iPhone 4 | Apple | A1332 | BCG-E2380a |
| 3 | Flash Disk3.0*2 | ADATA | C103 | DoC |

For Test Site No: 03CH01-CB (below 1GHz)

| Support Equipment | | | | |
|-------------------|-----------------|---------------|------------|------------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| 1 | NB*2 | DELL | E4300 | DoC |
| 2 | NB*2 | Apple | Mac Book | DoC |
| 3 | iPhone 4 | Apple | A1332 | BCG-E2380a |
| 4 | Flash Disk3.0*2 | Silicon Power | B06 | DoC |


For Test Site No: 03CH01-CB (above 1GHz)


| Support Equipment | | | | |
|-------------------|-----------|------------|------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| 1 | NB | DELL | E4300 | DoC |

For Test Site No: TH01-CB


| Support Equipment | | | | |
|-------------------|-----------|------------|------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| 1 | NB | DELL | E4300 | DoC |

2.6 Test Setup Diagram

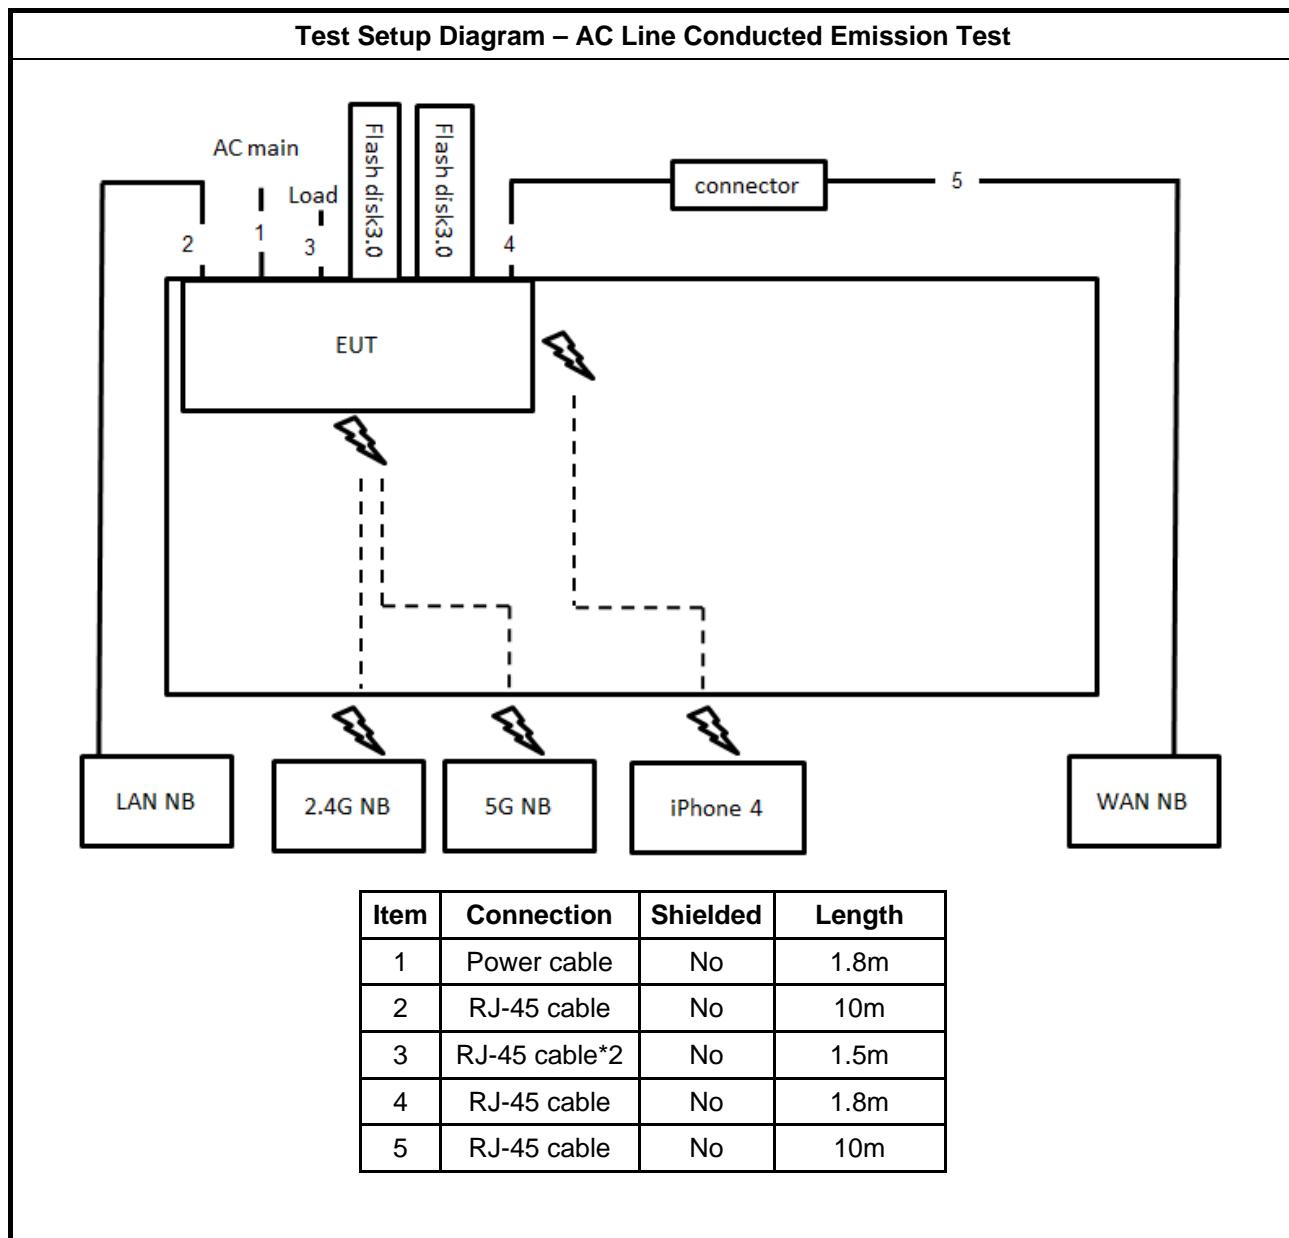

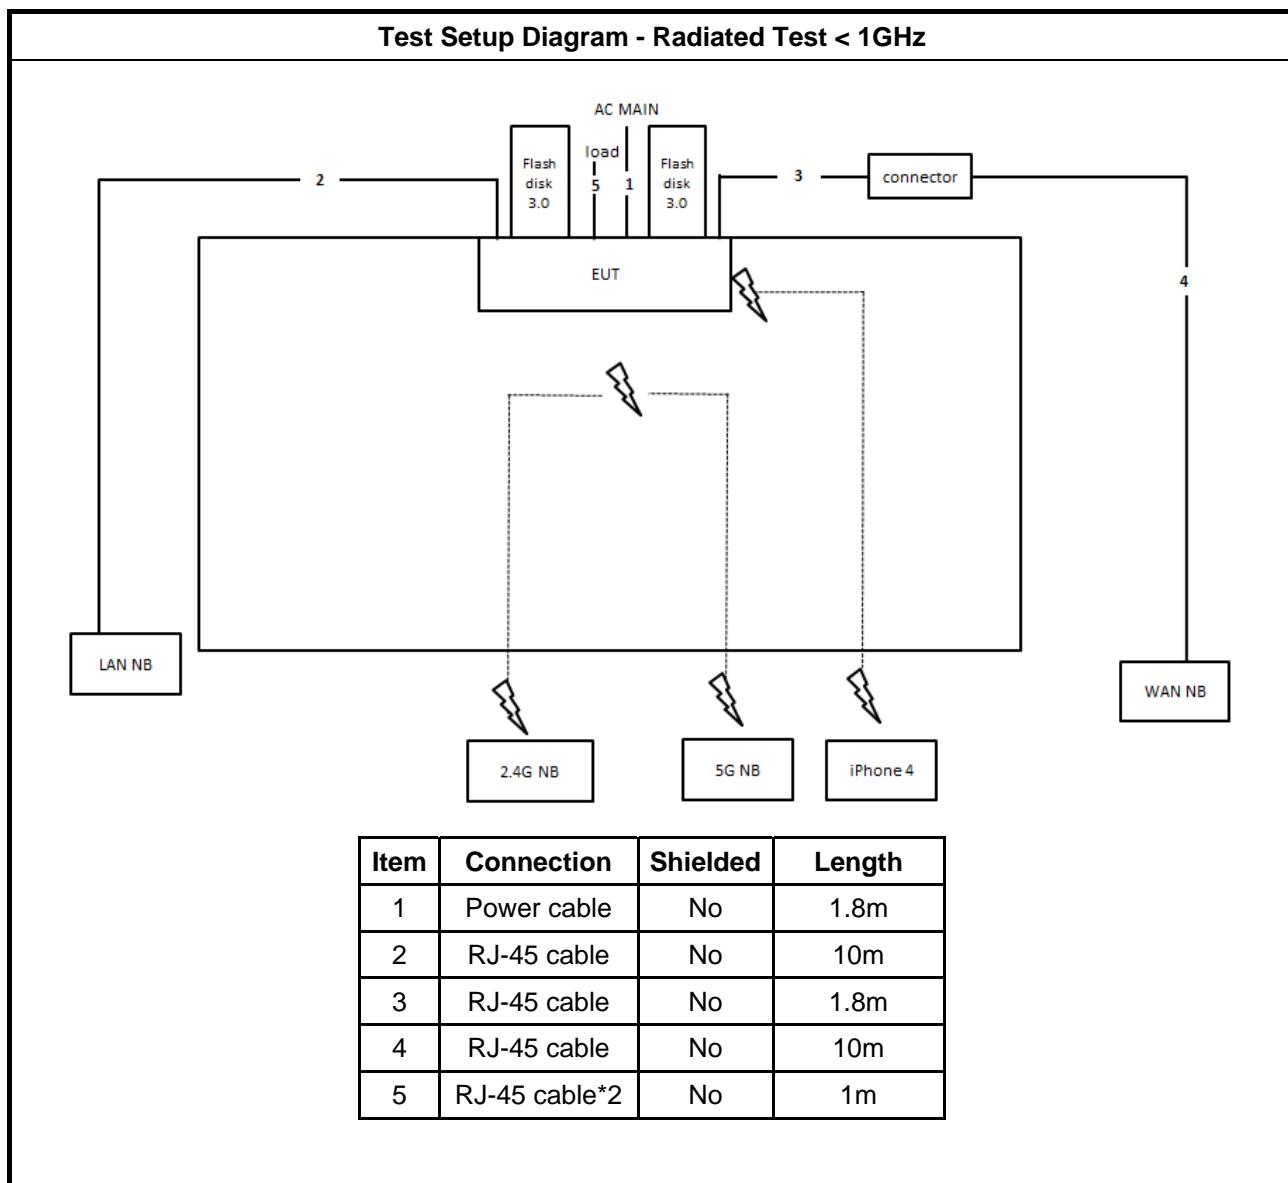

Test Setup Diagram - Radiated Test > 1GHz

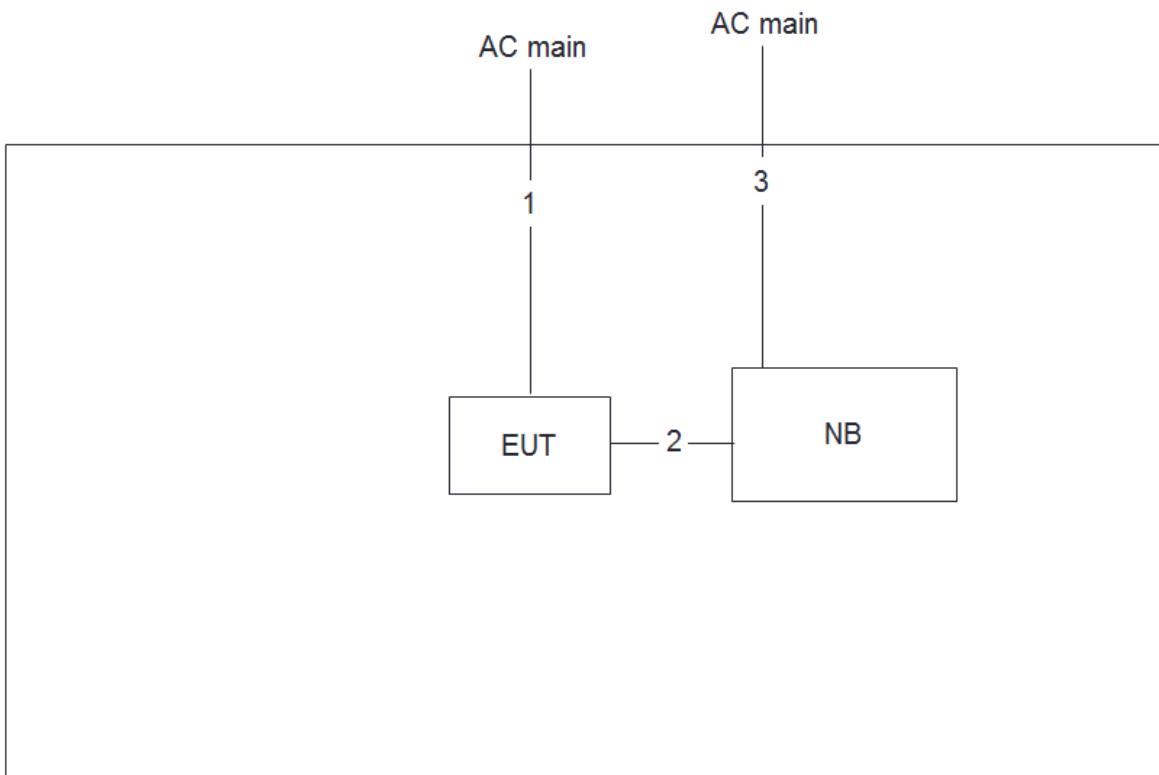

| Item | Connection | Shielded | Length |
|------|---------------|----------|--------|
| 1 | Power cable | No | 1.8m |
| 2 | Console Cable | No | 1.97m |
| 3 | Power cable | No | 2.6m |

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit | | |
|---|------------|-----------|
| Frequency Emission (MHz) | Quasi-Peak | Average |
| 0.15-0.5 | 66 - 56 * | 56 - 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

| Test Method |
|---|
| ▪ Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions. |

3.1.4 Test Setup

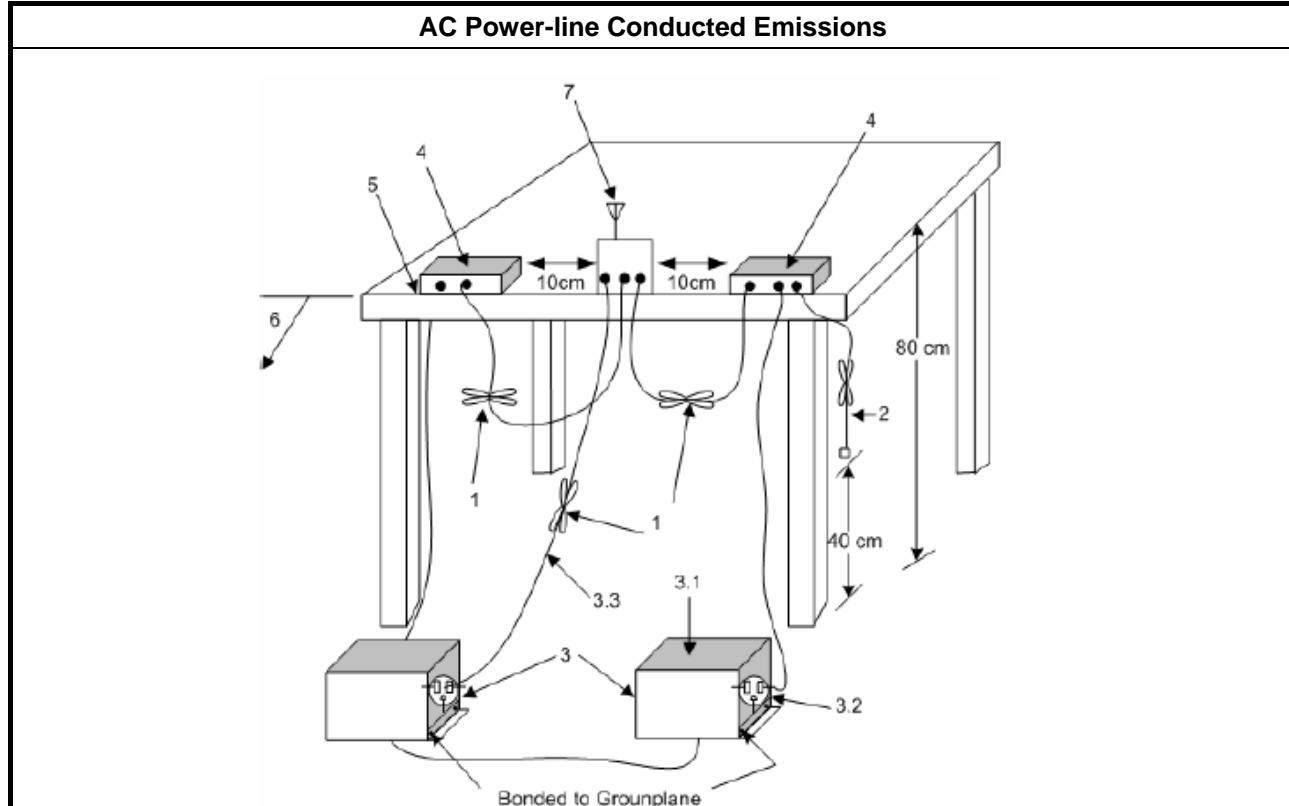



3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

| 6dB Bandwidth Limit |
|---|
| Systems using digital modulation techniques: |
| ▪ 6 dB bandwidth \geq 500 kHz. |


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

| Test Method |
|--|
| ▪ For the emission bandwidth shall be measured using one of the options below: |
| <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement. |
| <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement. |
| <input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing. |

3.2.4 Test Setup

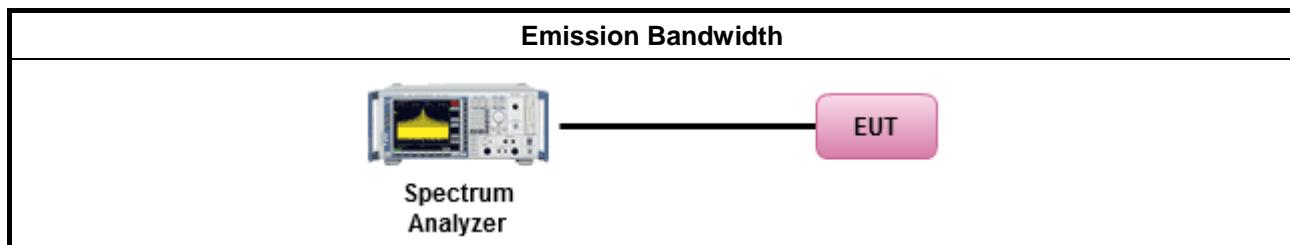

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

| Maximum Conducted Output Power Limit | |
|---|---|
| | <ul style="list-style-type: none">▪ If $G_{TX} \leq 6 \text{ dBi}$, then $P_{Out} \leq 30 \text{ dBm}$ (1 W) |
| | <ul style="list-style-type: none">▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6) \text{ dBm}$ |
| | <ul style="list-style-type: none">▪ Point-to-point systems (P2P): If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)/3 \text{ dBm}$ |
| | <ul style="list-style-type: none">▪ Smart antenna system (SAS):<ul style="list-style-type: none">- Single beam: If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)/3 \text{ dBm}$- Overlap beam: If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)/3 \text{ dBm}$- Aggregate power on all beams: If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8 \text{ dB dBm}$ |
| <p>P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.</p> | |


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

| Test Method | |
|---------------------------------------|---|
| ▪ Maximum Peak Conducted Output Power | <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW \geq EBW method). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.2 Option 2 (peak power meter for VBW \geq DTS BW) |
| ▪ Maximum Conducted Output Power | <p>[duty cycle \geq 98% or external video / power trigger]</p> <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed) <p>duty cycle < 98% and average over on/off periods with duty factor</p> <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed) <p>RF power meter and average over on/off periods with duty factor or gated trigger</p> <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM-G (using an RF average power meter). |
| ▪ For conducted measurement. | <ul style="list-style-type: none">If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ |

3.3.4 Test Setup

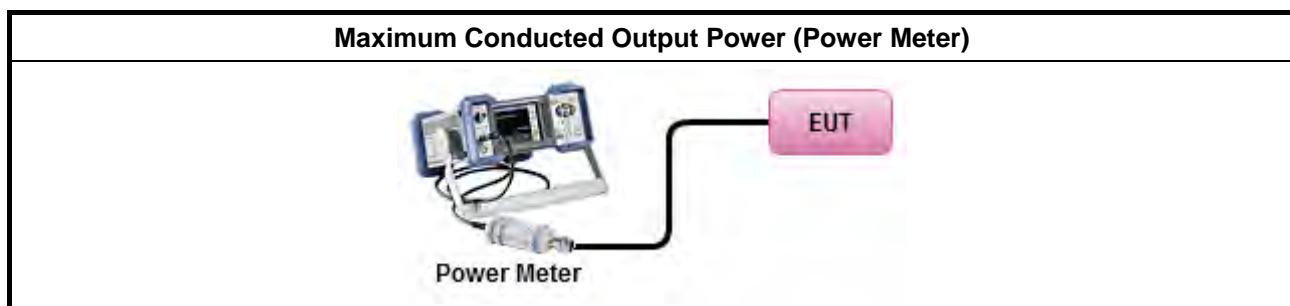

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

| Power Spectral Density Limit |
|---|
| ▪ Power Spectral Density (PSD)≤8 dBm/3kHz |


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

| Test Method |
|--|
| ▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option). |
| <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak). [duty cycle ≥ 98% or external video / power trigger] |
| <input type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging). |
| <input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-2 (slow sweep speed) |
| duty cycle < 98% and average over on/off periods with duty factor |
| <input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-1 Alt (spectral trace averaging). |
| <input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed) |
| ▪ For conducted measurement. |
| ▪ If The EUT supports multiple transmit chains using options given below: |
| <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. |
| <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, |
| <input type="checkbox"/> Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit. |

3.4.4 Test Setup

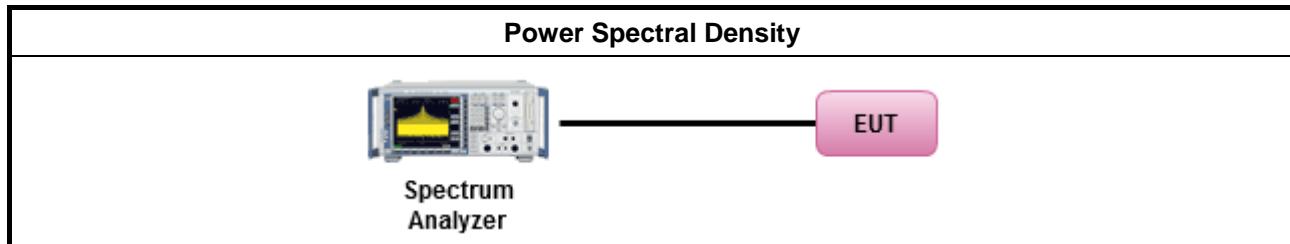

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

| Un-restricted Band Emissions Limit | |
|------------------------------------|------------|
| RF output power procedure | Limit (dB) |
| Peak output power procedure | 20 |
| Average output power procedure | 30 |

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

| Test Method |
|--|
| ▪ Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands. |

3.5.4 Test Setup

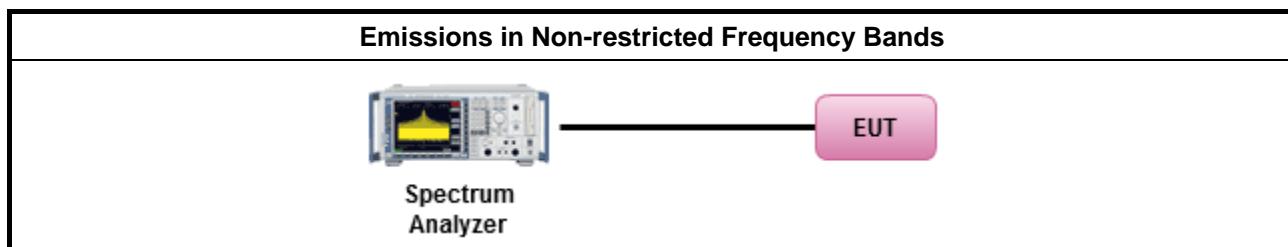

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

| Restricted Band Emissions Limit | | | |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490 | 2400/F(kHz) | 48.5 - 13.8 | 300 |
| 0.490~1.705 | 24000/F(kHz) | 33.8 - 23 | 30 |
| 1.705~30.0 | 30 | 29 | 30 |
| 30~88 | 100 | 40 | 3 |
| 88~216 | 150 | 43.5 | 3 |
| 216~960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

| Test Method | |
|--|--|
| ▪ The average emission levels shall be measured in [duty cycle \geq 98 or duty factor]. | |
| ▪ Refer as ANSI C63.10, clause 6.9.2.2 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. | |
| ▪ For the transmitter unwanted emissions shall be measured using following options below: | |
| | ▪ Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands. |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%) |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor). |
| | <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced $VBW \geq 1/T$). |
| | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$, where T is pulse time. |
| | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. |
| | <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.4 measurement procedure peak limit. |
| ▪ For the transmitter band-edge emissions shall be measured using following options below: | |
| | ▪ Refer as FCC KDB 558074 clause 13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below. |
| | ▪ Refer as FCC KDB 558074, clause 13.2 (ANSI C63.10, clause 6.9.3) for marker-delta method for band-edge measurements. |
| | ▪ Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz). |
| ▪ For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2. | |
| | ▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add $10 \log(N)$ dB |
| | ▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred. |

3.6.4 Test Setup

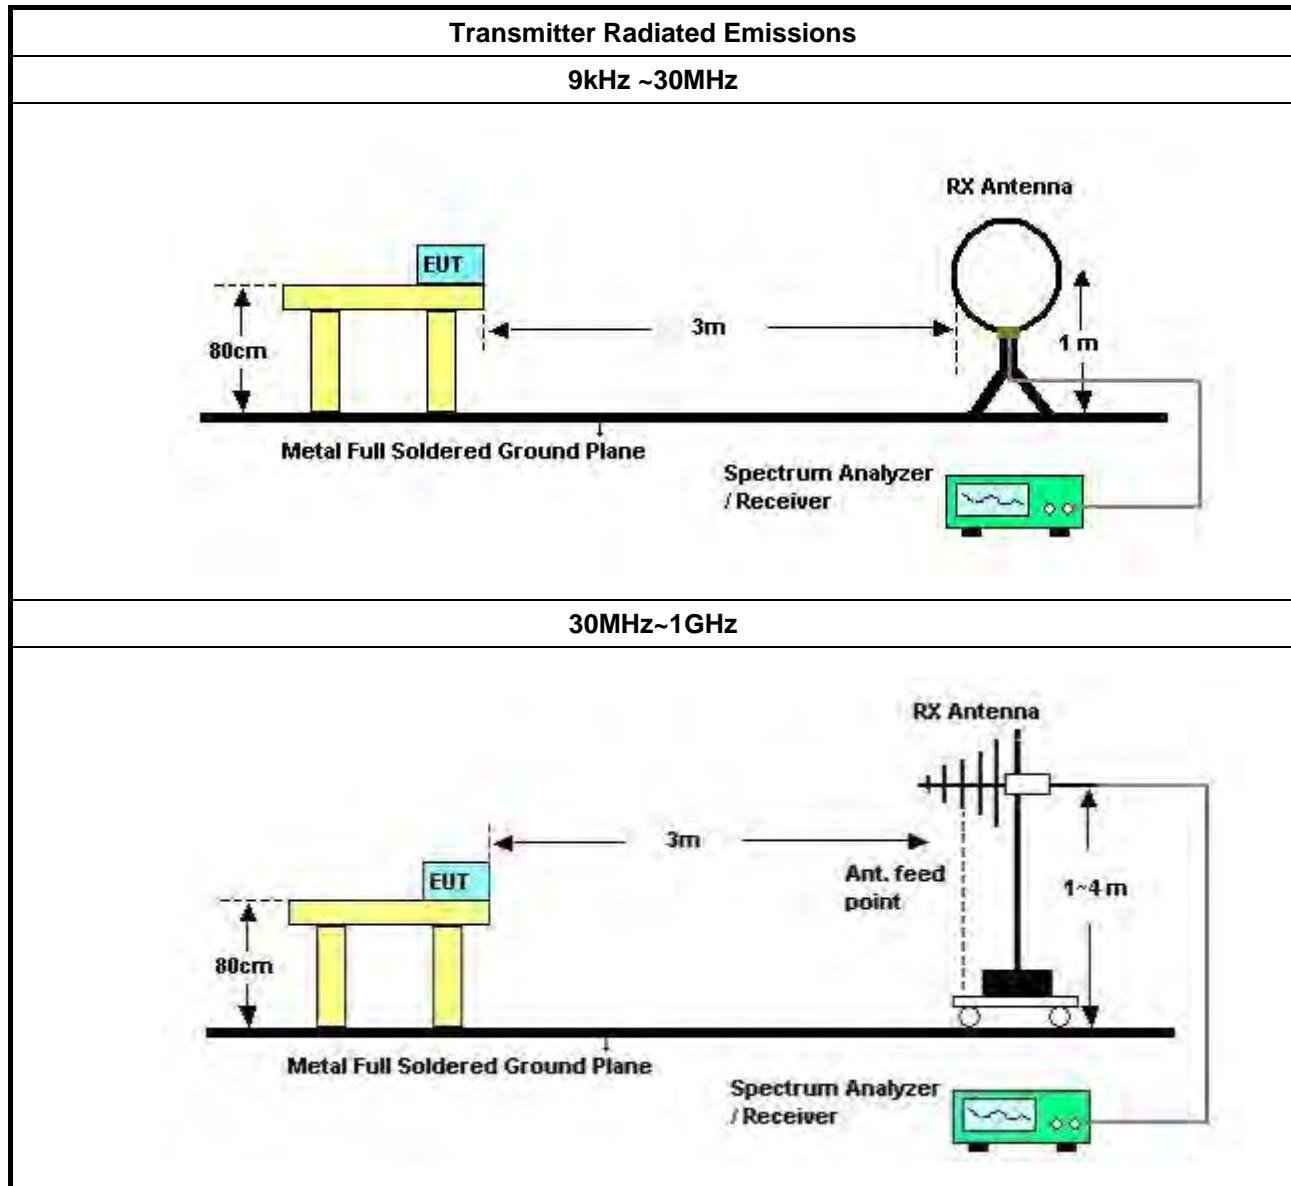

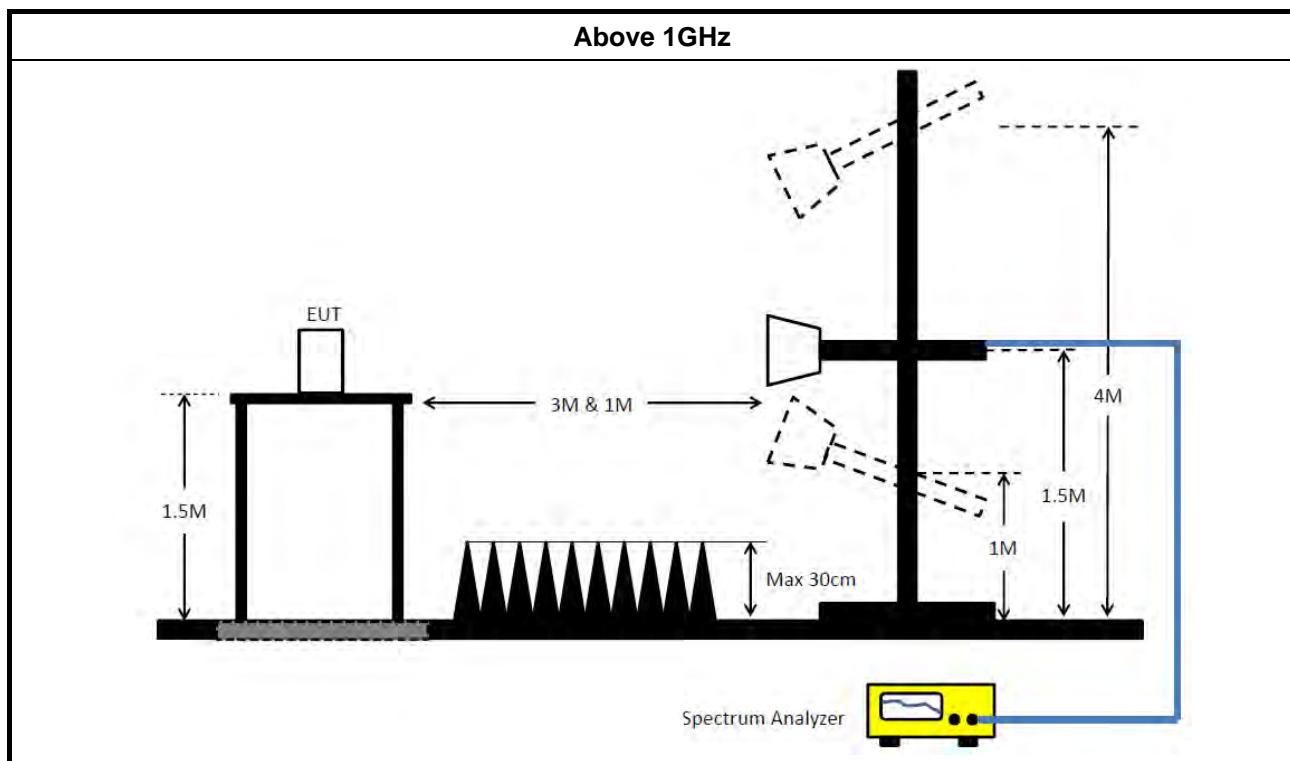

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Transmitter Radiated Unwanted Emissions

Refer as Appendix F



4 Test Equipment and Calibration Data

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-----------------------------------|--------------|-------------------|------------------|-----------------|------------------|-----------------------|
| EMI Receiver | Agilent | N9038A | My52260123 | 9kHz ~ 8.45GHz | Jan. 27, 2016 | Conduction (CO01-CB) |
| LISN | F.C.C. | FCC-LISN-50-16-2 | 04083 | 150kHz ~ 100MHz | Dec. 14, 2016 | Conduction (CO01-CB) |
| LISN | Schwarzbeck | NSLK 8127 | 8127647 | 9kHz ~ 30MHz | Dec. 21, 2016 | Conduction (CO01-CB) |
| COND Cable | Woken | Cable | 01 | 150kHz ~ 30MHz | May 24, 2016 | Conduction (CO01-CB) |
| Software | Audix | E3 | 6.120210n | - | N.C.R. | Conduction (CO01-CB) |
| BILOG ANTENNA with 6dB Attenuator | TESEQ & EMCI | CBL6112D & N-6-06 | 37880 & AT-N0609 | 20MHz ~ 2GHz | Aug. 30, 2016 | Radiation (03CH01-CB) |
| Horn Antenna | EMCO | 3115 | 00075790 | 750MHz ~ 18GHz | Nov. 10, 2016 | Radiation (03CH01-CB) |
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170252 | 15GHz ~ 40GHz | Jul. 25, 2016 | Radiation (03CH01-CB) |
| Pre-Amplifier | Agilent | 8447D | 2944A10991 | 0.1MHz ~ 1.3GHz | Mar. 15, 2016 | Radiation (03CH01-CB) |
| Pre-Amplifier | Agilent | 8449B | 3008A02310 | 1GHz ~ 26.5GHz | Jan. 18, 2016 | Radiation (03CH01-CB) |
| Pre-Amplifier | Agilent | 8449B | 3008A02310 | 1GHz ~ 26.5GHz | Jan. 16, 2017 | Radiation (03CH01-CB) |
| Pre-Amplifier | MITEQ | TTA1840-35-HG | 1864479 | 18GHz ~ 40GHz | Jun. 28, 2016 | Radiation (03CH01-CB) |
| Spectrum Analyzer | R&S | FSP40 | 100056 | 9kHz ~ 40GHz | Nov. 21, 2016 | Radiation (03CH01-CB) |
| EMI Test | R&S | ESCS | 100355 | 9kHz ~ 2.75GHz | May 16, 2016 | Radiation (03CH01-CB) |
| RF Cable-low | Woken | Low Cable-16+17 | N/A | 30 MHz ~ 1 GHz | Oct. 24, 2016 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-16 | N/A | 1 GHz ~ 18 GHz | Oct. 24, 2016 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-16+17 | N/A | 1 GHz ~ 18 GHz | Oct. 24, 2016 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-40G#1 | N/A | 18GHz ~ 40 GHz | Oct. 24, 2016 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-40G#2 | N/A | 18GHz ~ 40 GHz | Oct. 24, 2016 | Radiation (03CH01-CB) |
| Test Software | Audix | E3 | 6.2009-I0-7 | N/A | N/A | Radiation (03CH01-CB) |
| Loop Antenna | Teseq | HLA 6120 | 24155 | 9kHz - 30 MHz | Mar. 16, 2016* | Radiation (03CH01-CB) |
| Spectrum analyzer | R&S | FSV40 | 100979 | 9kHz~40GHz | Dec. 26, 2016 | Conducted (TH01-CB) |



| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|---------------|--------------|-----------|---------------|------------------|------------------|---------------------|
| RF Cable-high | Woken | RG402 | High Cable-6 | 1 GHz – 26.5 GHz | Oct. 24, 2016 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-7 | 1 GHz –26.5 GHz | Oct. 24, 2016 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-8 | 1 GHz –26.5 GHz | Oct. 24, 2016 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-9 | 1 GHz –26.5 GHz | Oct. 24, 2016 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-10 | 1 GHz –26.5 GHz | Oct. 24, 2016 | Conducted (TH01-CB) |
| Power Sensor | Agilent | U2021XA | MY53410001 | 50MHz~18GHz | Nov. 22, 2016 | Conducted (TH01-CB) |
| Power Sensor | Agilent | U2021XA | MY53410002 | 50MHz~18GHz | Nov. 22, 2016 | Conducted (TH01-CB) |
| Power Sensor | Agilent | U2021XA | MY54320014 | 50MHz~18GHz | Apr. 20, 2016 | Conducted (TH01-CB) |
| Power Sensor | Agilent | U2021XA | MY54320015 | 50MHz~18GHz | Apr. 20, 2016 | Conducted (TH01-CB) |

Note: Calibration Interval of instruments listed above is one year.


“*” Calibration Interval of instruments listed above is two years.

N.C.R means Non-Calibration required.



AC Power-line Conducted Emissions Result


Appendix A

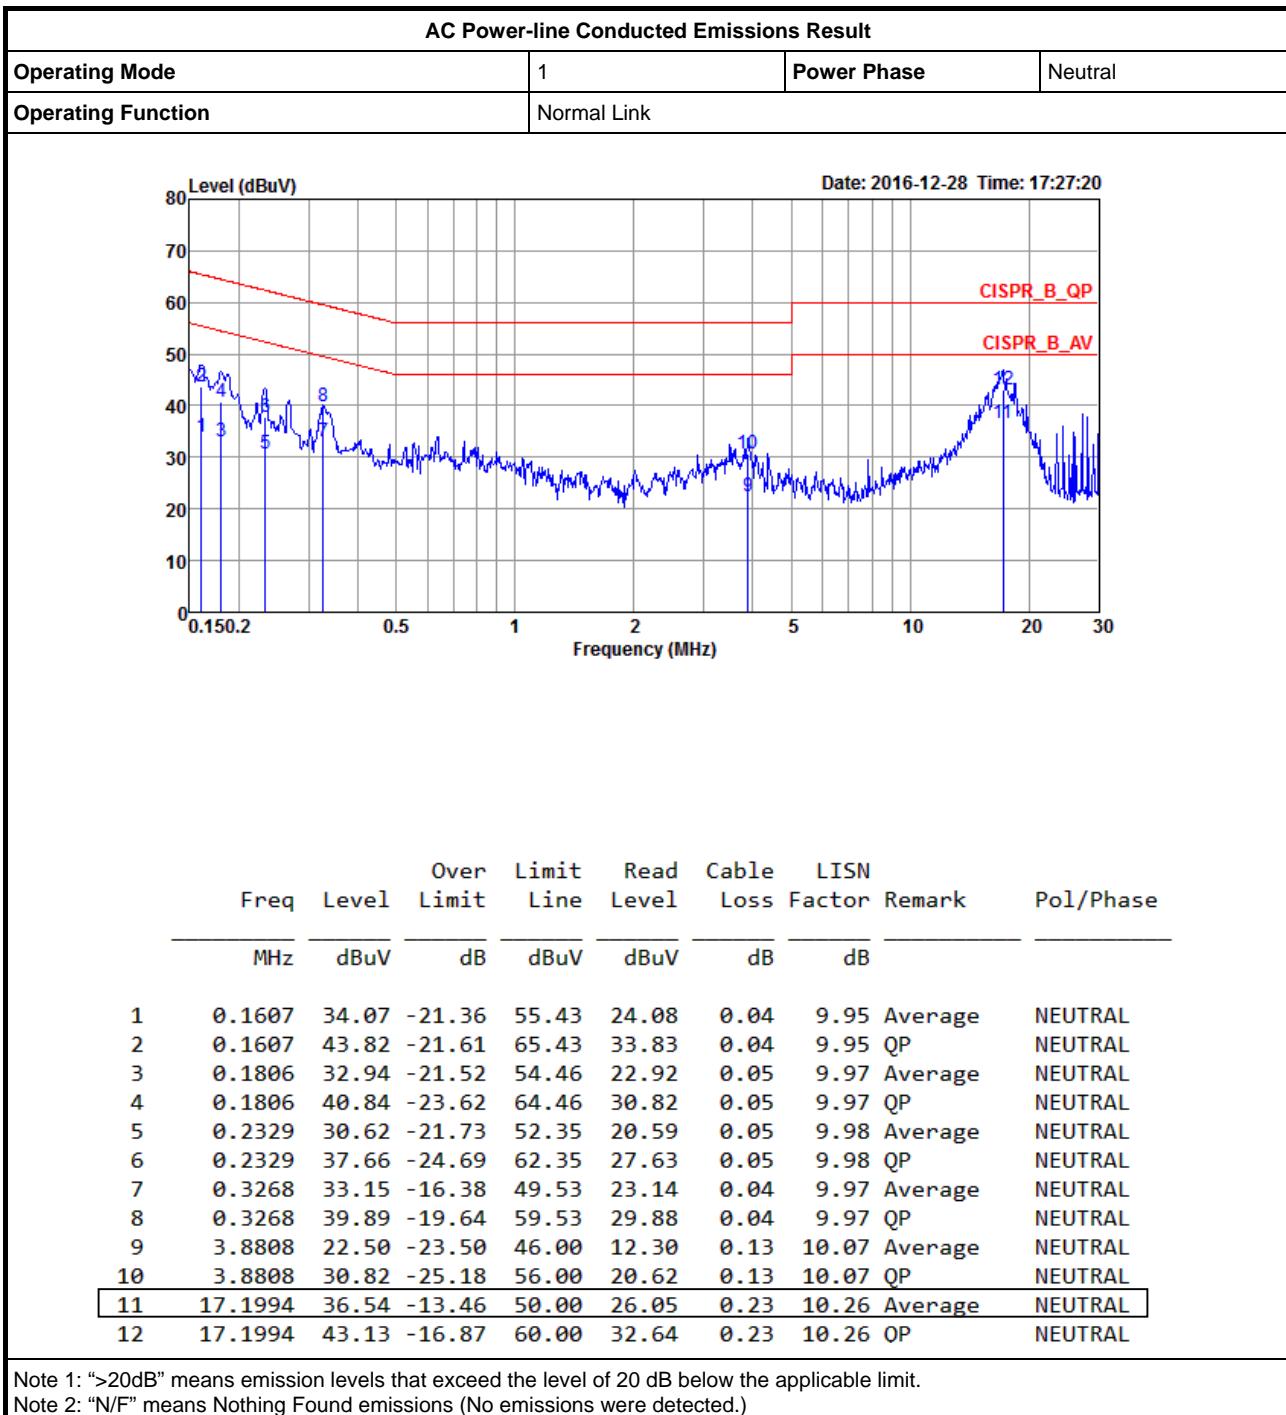



AC Power-line Conducted Emissions Result

Appendix A

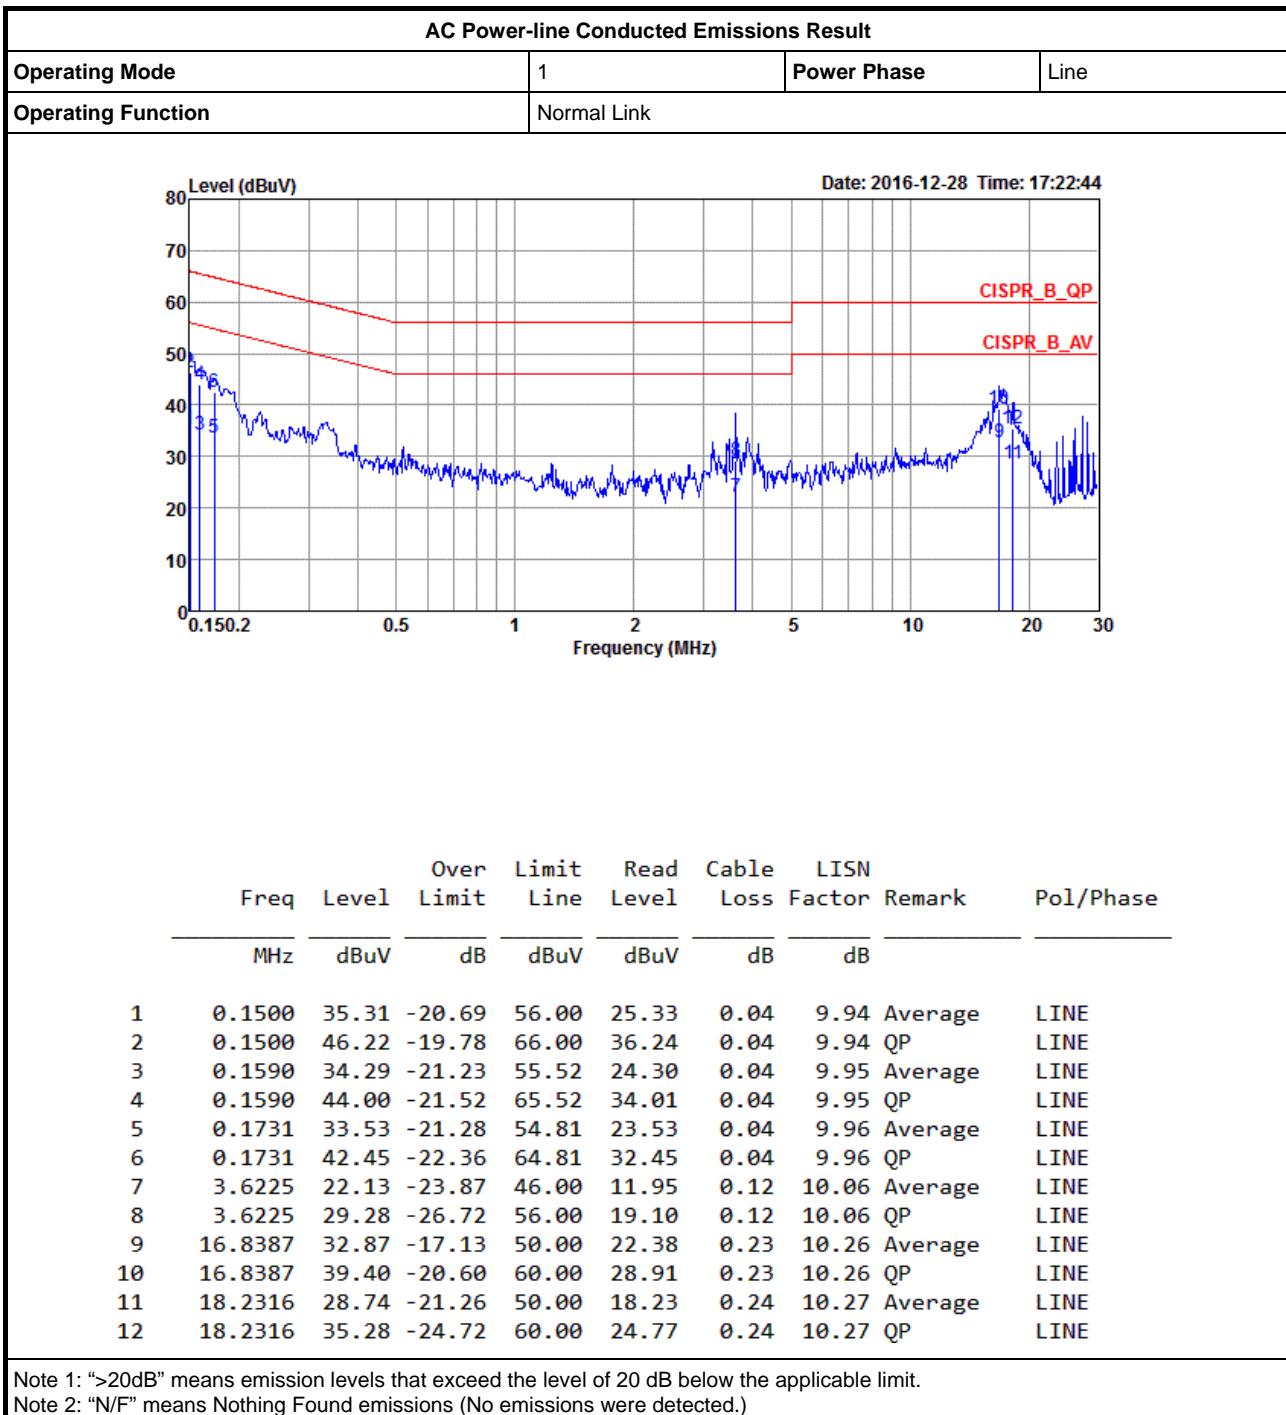




**Summary**

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|---------------|------------------|-----------------|----------|------------------|-----------------|
| BT-LE(1Mbps) | - | - | - | - | - |
| 2.4-2.4835GHz | 707.5k | 1.036M | 1M04F1D | 693.75k | 1.03M |

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;**Result**

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) |
|--------------|--------|---------------|---------------------|--------------------|
| BT-LE(1Mbps) | - | - | - | - |
| 2402MHz | Pass | 500k | 693.75k | 1.036M |
| 2440MHz | Pass | 500k | 702.5k | 1.03M |
| 2480MHz | Pass | 500k | 707.5k | 1.033M |

Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

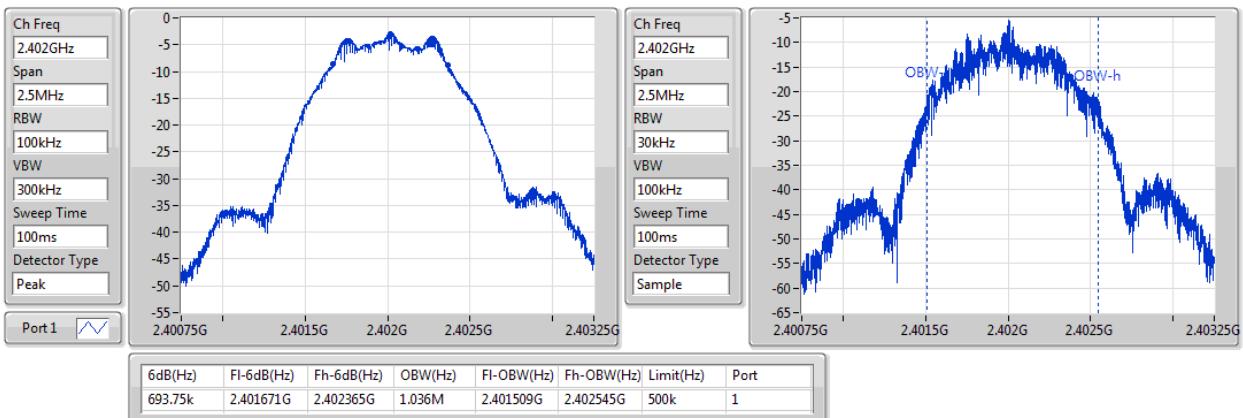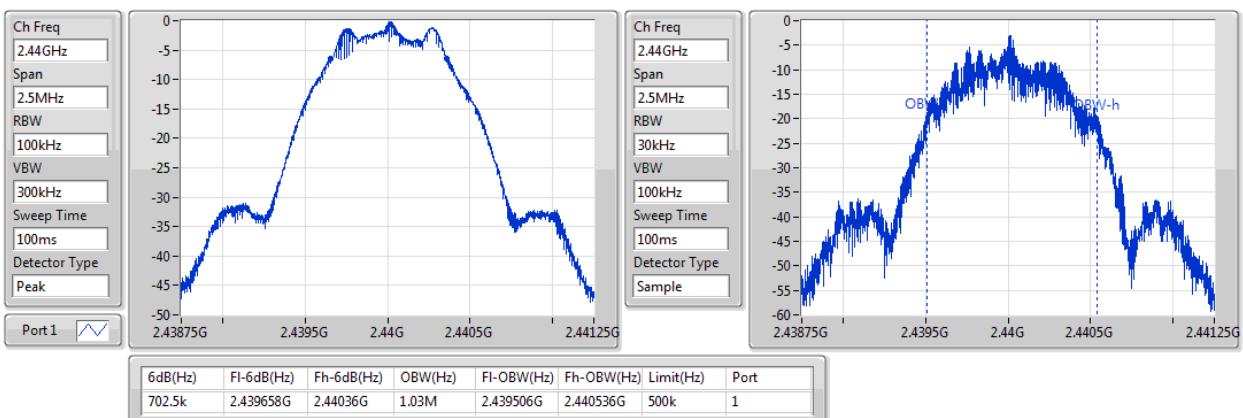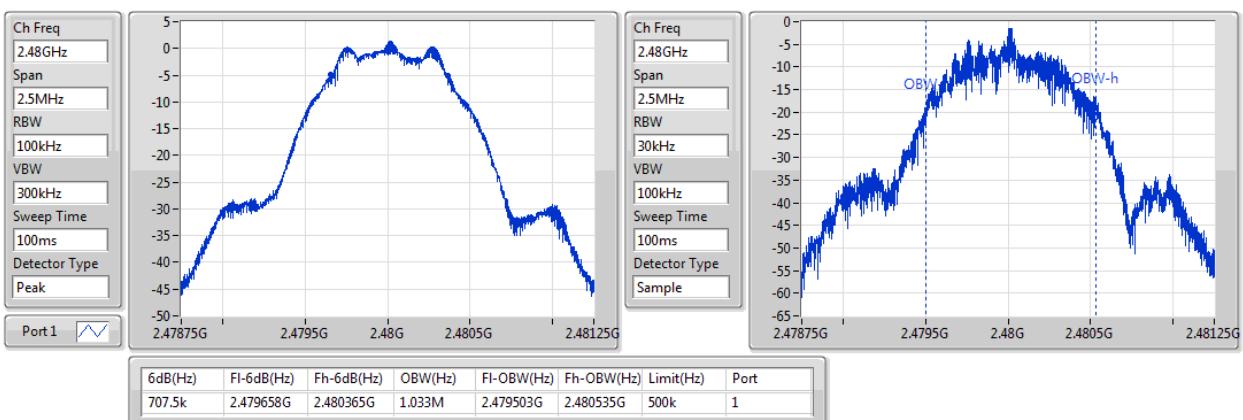BT-LE(1Mbps)
2402MHz

EBW
BT-LE(1Mbps)
2440MHz

EBW
BT-LE(1Mbps)
2480MHz

EBW

**Summary**

| Mode | Power (dBm) | Power (W) |
|---------------|----------------|--------------|
| BT-LE(1Mbps) | - | - |
| 2.4-2.4835GHz | 7.23 | 0.00528 |

Result

| Mode | Result | Gain (dBi) | Power (dBm) | Power Limit (dBm) |
|--------------|--------|---------------|----------------|----------------------|
| BT-LE(1Mbps) | - | - | - | - |
| 2402MHz | Pass | 2.54 | 3.19 | 30.00 |
| 2440MHz | Pass | 2.54 | 5.46 | 30.00 |
| 2480MHz | Pass | 2.54 | 7.23 | 30.00 |

**Summary**

| Mode | PD (dBm/RBW) |
|---------------|-----------------|
| BT-LE(1Mbps) | - |
| 2.4-2.4835GHz | -6.72 |

RBW=3kHz.


Result

| Mode | Result | Gain (dBi) | PD (dBm/RBW) | PD Limit (dBm/RBW) |
|--------------|--------|---------------|-----------------|-----------------------|
| BT-LE(1Mbps) | - | - | - | - |
| 2402MHz | Pass | 2.54 | -10.67 | 8.00 |
| 2440MHz | Pass | 2.54 | -8.47 | 8.00 |
| 2480MHz | Pass | 2.54 | -6.72 | 8.00 |


RBW=3kHz.

BT-LE(1Mbps)
2402MHz


| | |
|---------------|----------|
| Ch Freq | 2.402GHz |
| Span | 1.5MHz |
| RBW | 3kHz |
| VBW | 10kHz |
| Sweep Time | 500ms |
| Detector Type | Peak |

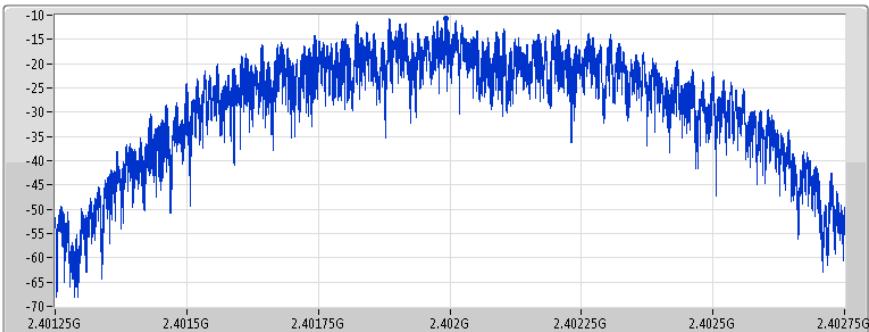
PSD
BT-LE(1Mbps)
2440MHz

| | |
|---------------|---------|
| Ch Freq | 2.44GHz |
| Span | 1.5MHz |
| RBW | 3kHz |
| VBW | 10kHz |
| Sweep Time | 500ms |
| Detector Type | Peak |

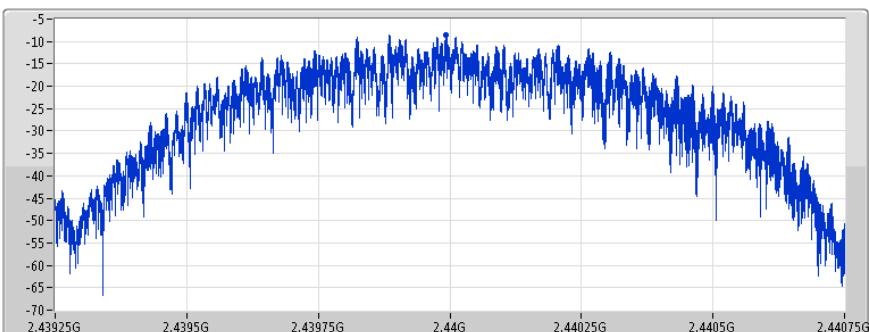
PSD
BT-LE(1Mbps)
2480MHz

| | |
|---------------|---------|
| Ch Freq | 2.48GHz |
| Span | 1.5MHz |
| RBW | 3kHz |
| VBW | 10kHz |
| Sweep Time | 500ms |
| Detector Type | Peak |

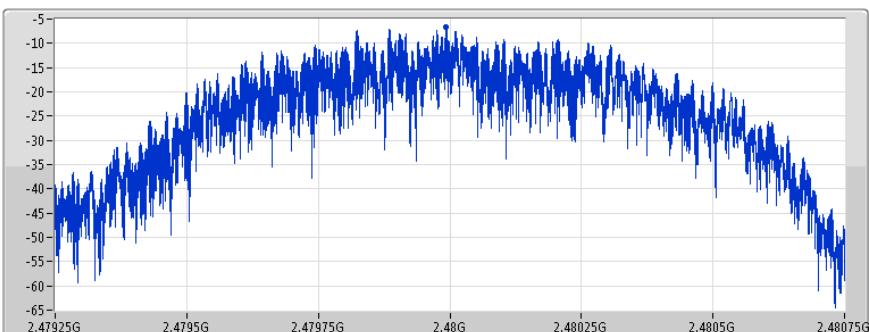

PSD

**Summary**

| Mode | Result | Ref (Hz) | Ref (dBm) | Limit (dBm) | Freq (Hz) | Level (dBm) | Port |
|---------------|--------|-----------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|------|
| BT-LE(1Mbps) | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 2.4-2.4835GHz | Pass | 2.402171G | 1.94 | -28.06 | 67.888M | -54.89 | 2.399224G | -45.71 | 2.48544G | -57.32 | 2.555858G | -48.00 | 1 |

Result


| Mode | Result | Ref (Hz) | Ref (dBm) | Limit (dBm) | Freq (Hz) | Level (dBm) | Port |
|--------------|--------|-----------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|------|
| BT-LE(1Mbps) | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | 2.402171G | 1.94 | -28.06 | 67.888M | -54.89 | 2.399224G | -45.71 | 2.48544G | -57.32 | 2.555858G | -48.00 | 1 |
| 2440MHz | Pass | 2.44008G | 4.68 | -25.32 | 921.552M | -59.02 | 2.39812G | -57.28 | 2.484728G | -55.92 | 2.595258G | -49.59 | 1 |
| 2480MHz | Pass | 2.48016G | 6.86 | -23.14 | 71.44M | -52.91 | 2.3992G | -58.44 | 2.485372G | -54.46 | 2.584001G | -50.99 | 1 |

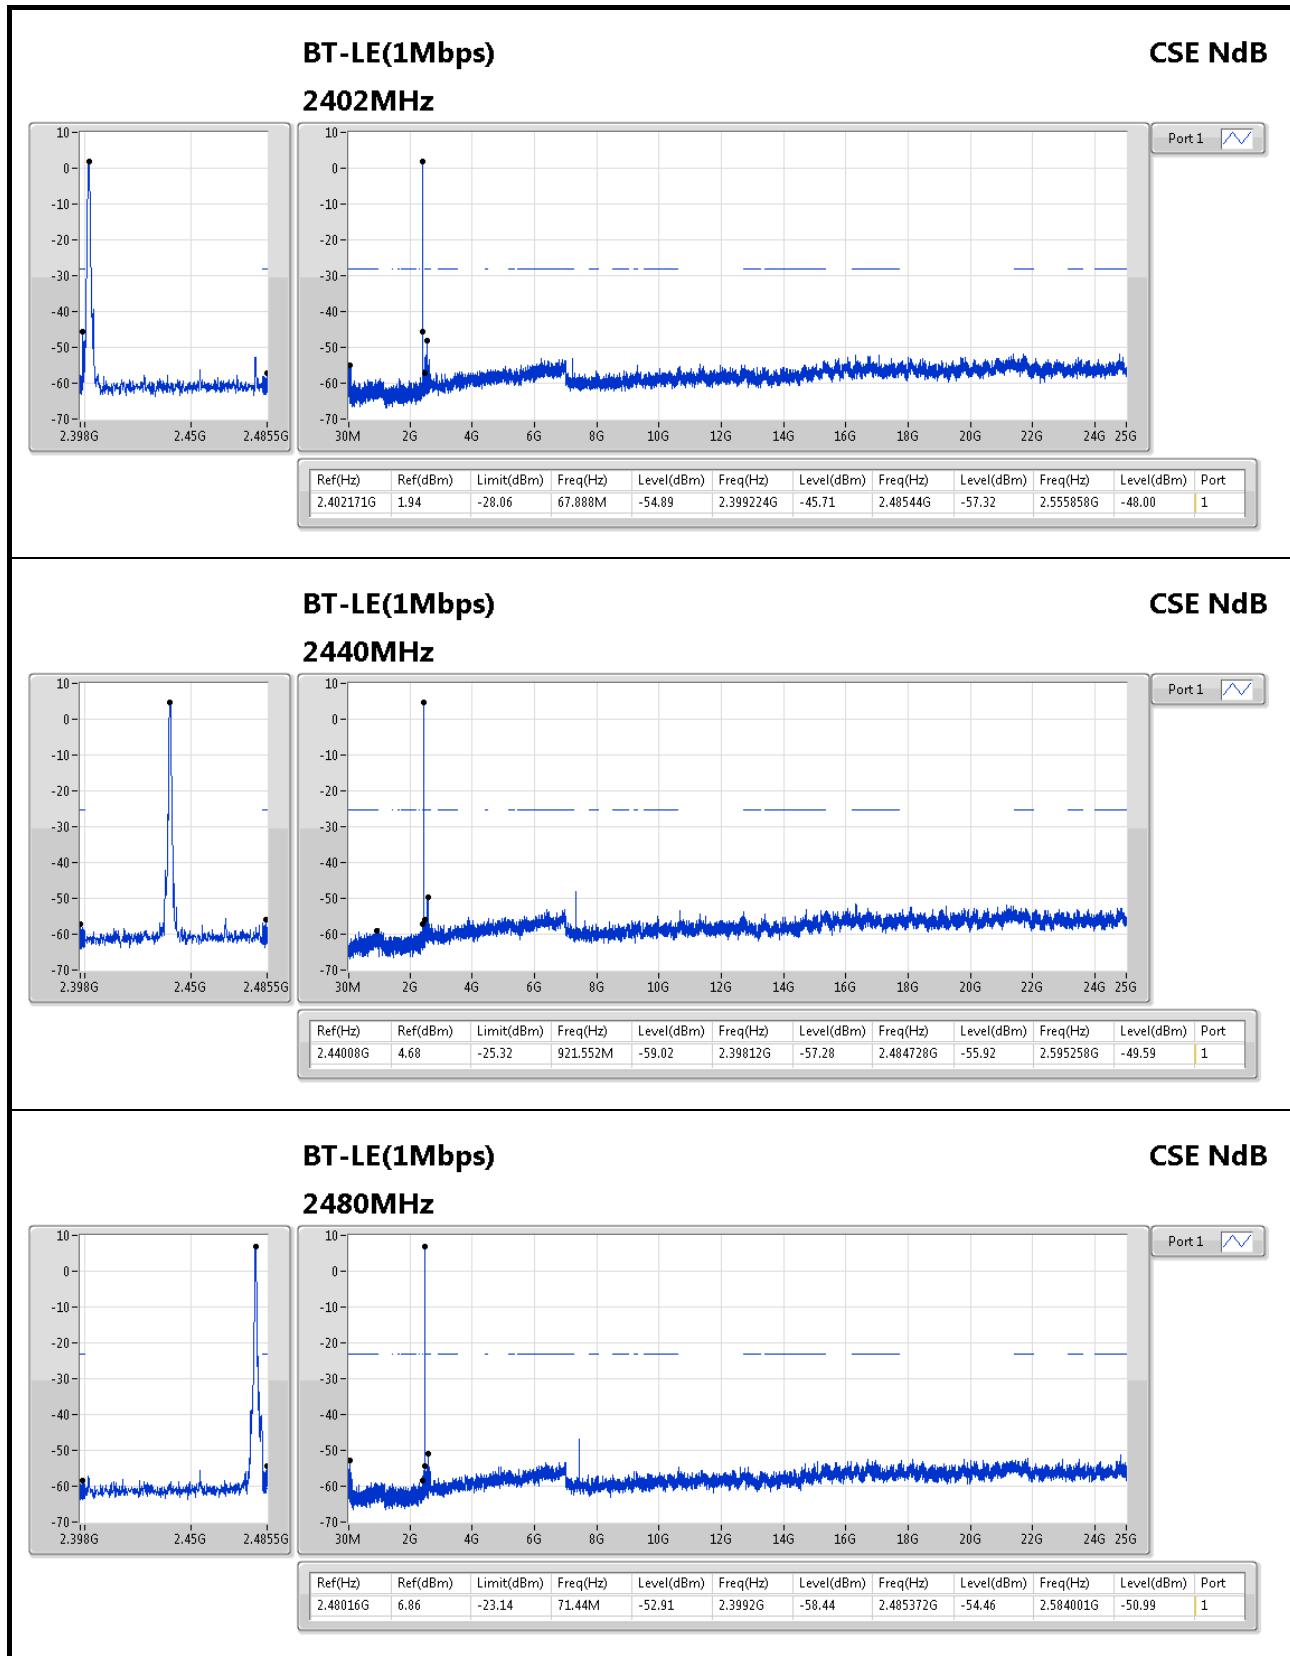



RSE below 1GHz Result


Appendix F.1

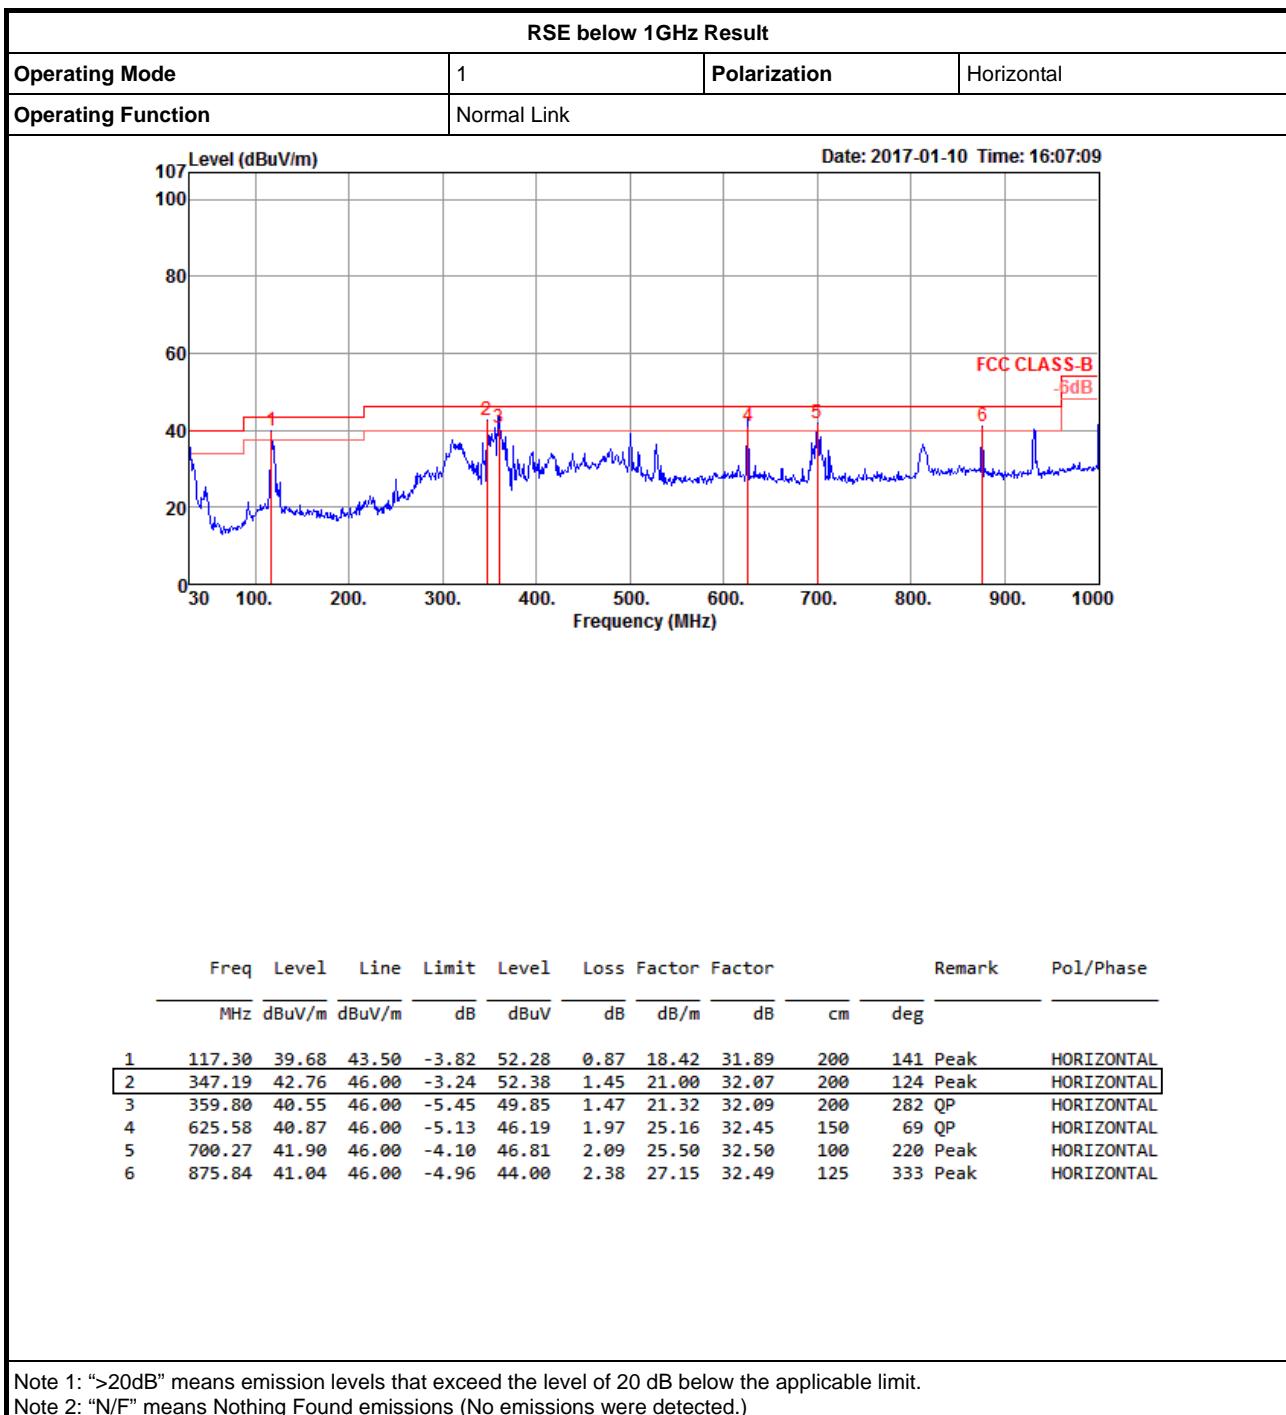



RSE below 1GHz Result

Appendix F.1

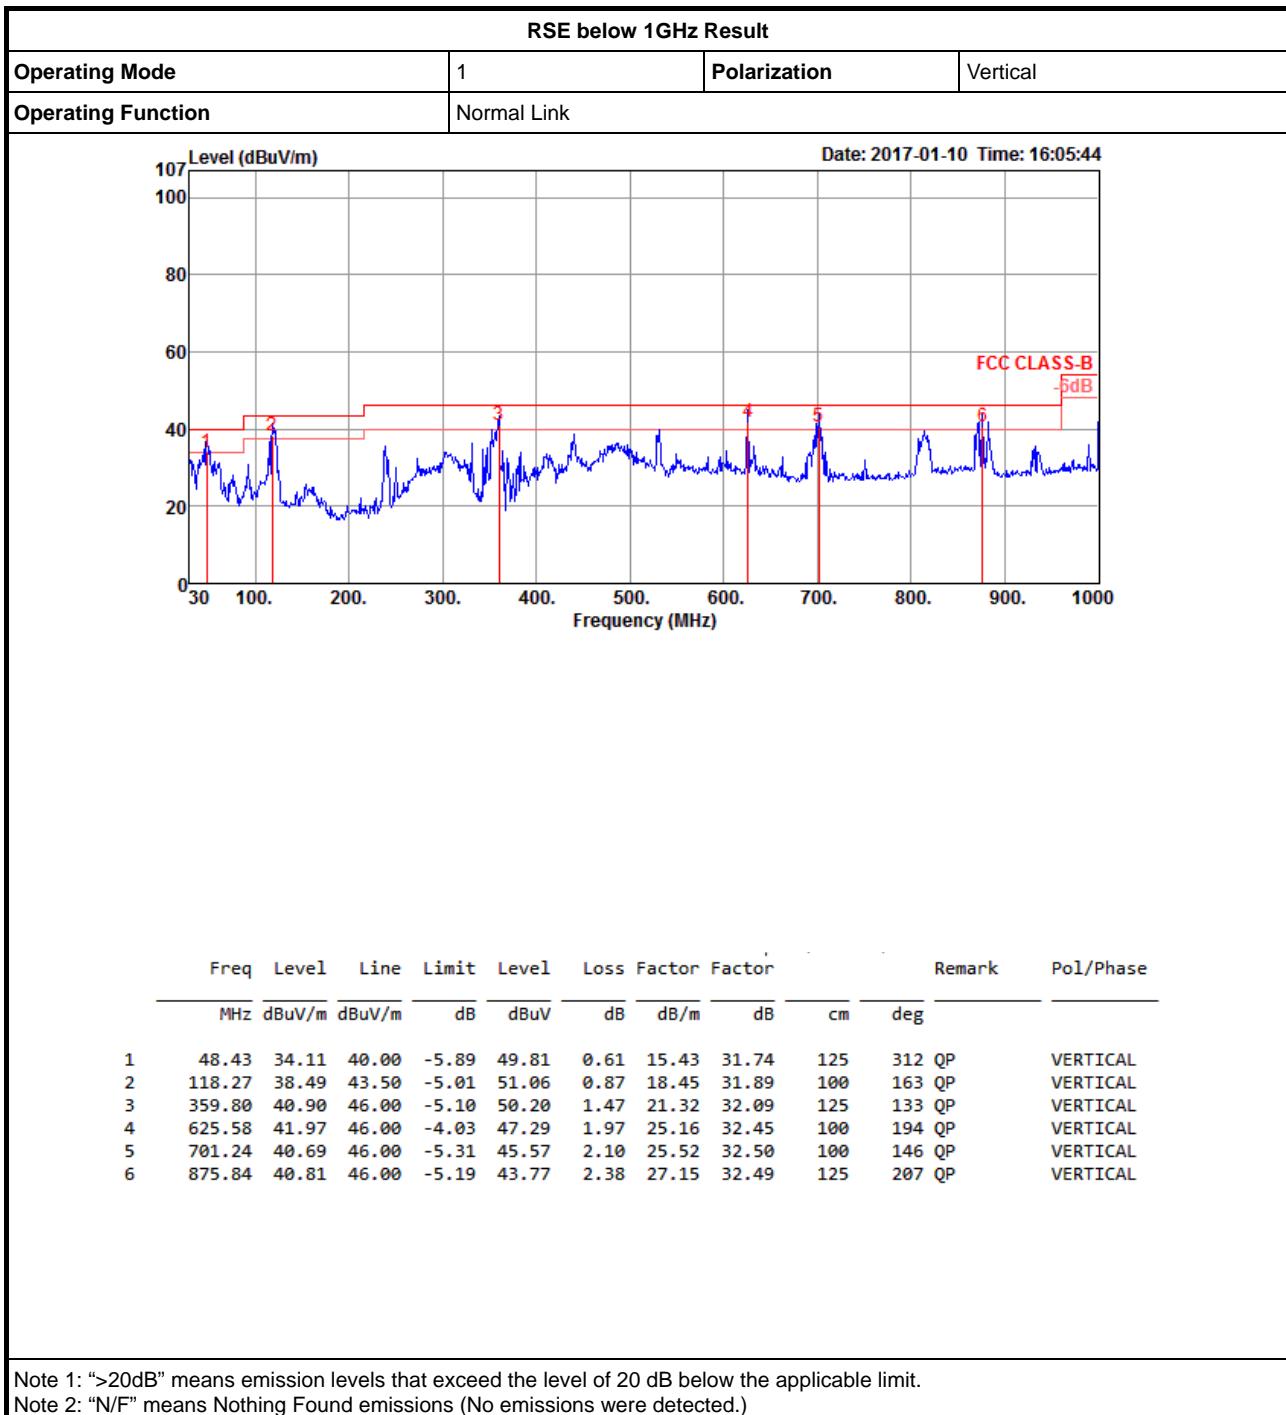

**Radiated Emissions (1GHz~10th Harmonic)**

| Configurations | | GFSK CH 0 / Chain 5 | | | | | | | | | | | |
|----------------|--|---------------------|--|--|--|--|--|--|--|--|--|--|--|
|----------------|--|---------------------|--|--|--|--|--|--|--|--|--|--|--|

Horizontal

| Freq | Level | Limit | | Over Limit | Read Level | Cable | | | Antenna Factor | Preamp Factor | A/Pos | T/Pos | Remark | Pol/Phase |
|------|---------|-------|--------|------------|------------|-------|-------|-------|----------------|---------------|-------|-------|---------|------------|
| | | Line | dBuV/m | | | dB | dBuV | dB | | | | | | |
| 1 | 4803.92 | 40.70 | 54.00 | -13.30 | 37.39 | 5.22 | 32.62 | 34.53 | | | 106 | 190 | Average | HORIZONTAL |
| 2 | 4803.92 | 48.68 | 74.00 | -25.32 | 45.37 | 5.22 | 32.62 | 34.53 | | | 106 | 190 | Peak | HORIZONTAL |

Vertical

| Freq | Level | Limit | | Over Limit | Read Level | Cable | | | Antenna Factor | Preamp Factor | A/Pos | T/Pos | Remark | Pol/Phase |
|------|---------|-------|--------|------------|------------|-------|-------|-------|----------------|---------------|-------|-------|---------|-----------|
| | | Line | dBuV/m | | | dB | dBuV | dB | | | | | | |
| 1 | 4804.02 | 42.51 | 54.00 | -11.49 | 39.20 | 5.22 | 32.62 | 34.53 | | | 108 | 232 | Average | VERTICAL |
| 2 | 4804.64 | 51.50 | 74.00 | -22.50 | 48.19 | 5.22 | 32.62 | 34.53 | | | 108 | 232 | Peak | VERTICAL |

| Configurations | | GFSK CH 19 / Chain 5 | | | | | | | | | | | |
|----------------|--|----------------------|--|--|--|--|--|--|--|--|--|--|--|
|----------------|--|----------------------|--|--|--|--|--|--|--|--|--|--|--|

Horizontal

| Freq | Level | Limit | | Over Limit | Read Level | Cable | | | Antenna Factor | Preamp Factor | A/Pos | T/Pos | Remark | Pol/Phase |
|------|---------|-------|--------|------------|------------|-------|-------|-------|----------------|---------------|-------|-------|---------|------------|
| | | Line | dBuV/m | | | dB | dBuV | dB | | | | | | |
| 1 | 4879.96 | 39.83 | 54.00 | -14.17 | 36.29 | 5.28 | 32.76 | 34.50 | | | 118 | 62 | Average | HORIZONTAL |
| 2 | 4879.96 | 49.12 | 74.00 | -24.88 | 45.58 | 5.28 | 32.76 | 34.50 | | | 118 | 62 | Peak | HORIZONTAL |

Vertical

| Freq | Level | Limit | | Over Limit | Read Level | Cable | | | Antenna Factor | Preamp Factor | A/Pos | T/Pos | Remark | Pol/Phase |
|------|---------|-------|--------|------------|------------|-------|-------|-------|----------------|---------------|-------|-------|---------|-----------|
| | | Line | dBuV/m | | | dB | dBuV | dB | | | | | | |
| 1 | 4879.96 | 42.85 | 54.00 | -11.15 | 39.31 | 5.28 | 32.76 | 34.50 | | | 126 | 246 | Average | VERTICAL |
| 2 | 4879.96 | 50.44 | 74.00 | -23.56 | 46.90 | 5.28 | 32.76 | 34.50 | | | 126 | 246 | Peak | VERTICAL |



| | |
|-----------------------|----------------------|
| Configurations | GFSK CH 39 / Chain 5 |
|-----------------------|----------------------|

Horizontal

| Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase |
|------|---------|--------|-------|--------|-------|---------|--------|-------|-------|------------|------------|
| | | Line | Limit | Level | Loss | Factor | Factor | cm | deg | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | | |
| 1 | 4959.96 | 39.62 | 54.00 | -14.38 | 35.83 | 5.35 | 32.92 | 34.48 | 260 | 84 Average | HORIZONTAL |
| 2 | 4959.98 | 48.71 | 74.00 | -25.29 | 44.92 | 5.35 | 32.92 | 34.48 | 260 | 84 Peak | HORIZONTAL |

Vertical

| Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase |
|------|---------|--------|-------|--------|-------|---------|--------|-------|-------|-------------|-----------|
| | | Line | Limit | Level | Loss | Factor | Factor | cm | deg | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | | |
| 1 | 4960.02 | 40.60 | 54.00 | -13.40 | 36.81 | 5.35 | 32.92 | 34.48 | 116 | 182 Average | VERTICAL |
| 2 | 4960.50 | 49.89 | 74.00 | -24.11 | 46.10 | 5.35 | 32.92 | 34.48 | 116 | 182 Peak | VERTICAL |

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**Band Edge Emissions**


| | |
|-----------------------|-----------------------------|
| Configurations | GFSK CH 0, 19, 39 / Chain 5 |
|-----------------------|-----------------------------|

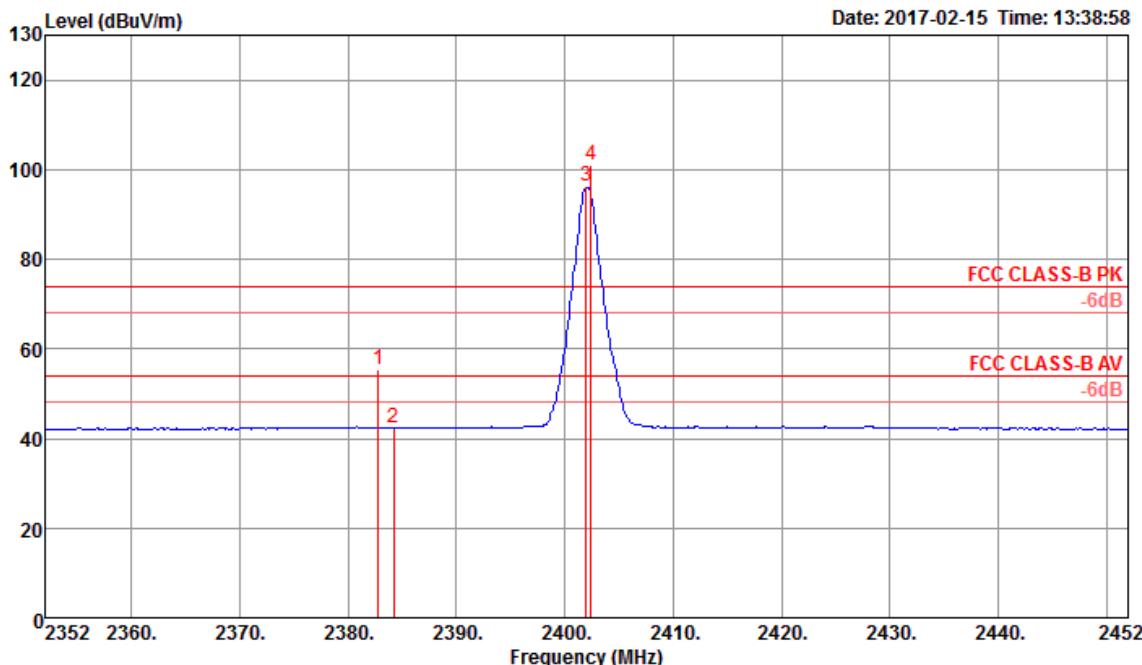Channel 0

| Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase |
|-------------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
| | | Line | Limit | Level | Loss | Factor | Factor | dB | cm | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | | |
| 1 2382.80 | 55.50 | 74.00 | -18.50 | 24.45 | 3.03 | 28.02 | 0.00 | 280 | 266 | Peak | VERTICAL |
| 2 2384.20 | 42.51 | 54.00 | -11.49 | 11.47 | 3.03 | 28.01 | 0.00 | 280 | 266 | Average | VERTICAL |
| 3 @ 2402.00 | 96.14 | | | 65.12 | 3.04 | 27.98 | 0.00 | 280 | 266 | Average | VERTICAL |
| 4 @ 2402.40 | 101.17 | | | 70.15 | 3.04 | 27.98 | 0.00 | 280 | 266 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2402 MHz.


Channel 19

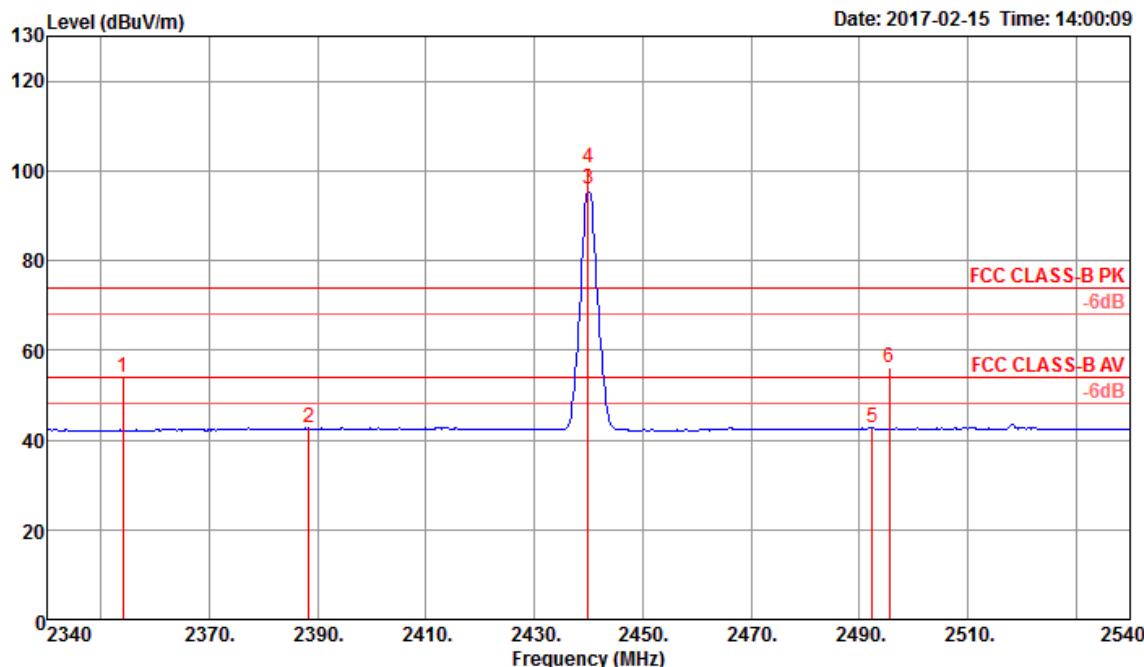

| Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase |
|-------------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
| | | Line | Limit | Level | Loss | Factor | Factor | cm | deg | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | | | |
| 1 2354.00 | 54.01 | 74.00 | -19.99 | 22.93 | 3.01 | 28.07 | 0.00 | 276 | 246 | Peak | HORIZONTAL |
| 2 2388.40 | 42.57 | 54.00 | -11.43 | 11.53 | 3.03 | 28.01 | 0.00 | 276 | 246 | Average | HORIZONTAL |
| 3 @ 2440.00 | 95.79 | | | 64.82 | 3.07 | 27.90 | 0.00 | 276 | 246 | Average | HORIZONTAL |
| 4 @ 2440.00 | 100.68 | | | 69.71 | 3.07 | 27.90 | 0.00 | 276 | 246 | Peak | HORIZONTAL |
| 5 2492.40 | 42.66 | 54.00 | -11.34 | 11.75 | 3.10 | 27.81 | 0.00 | 276 | 246 | Average | HORIZONTAL |
| 6 2495.60 | 56.01 | 74.00 | -17.99 | 25.10 | 3.10 | 27.81 | 0.00 | 276 | 246 | Peak | HORIZONTAL |

Item 3, 4 are the fundamental frequency at 2440 MHz.

Channel 39

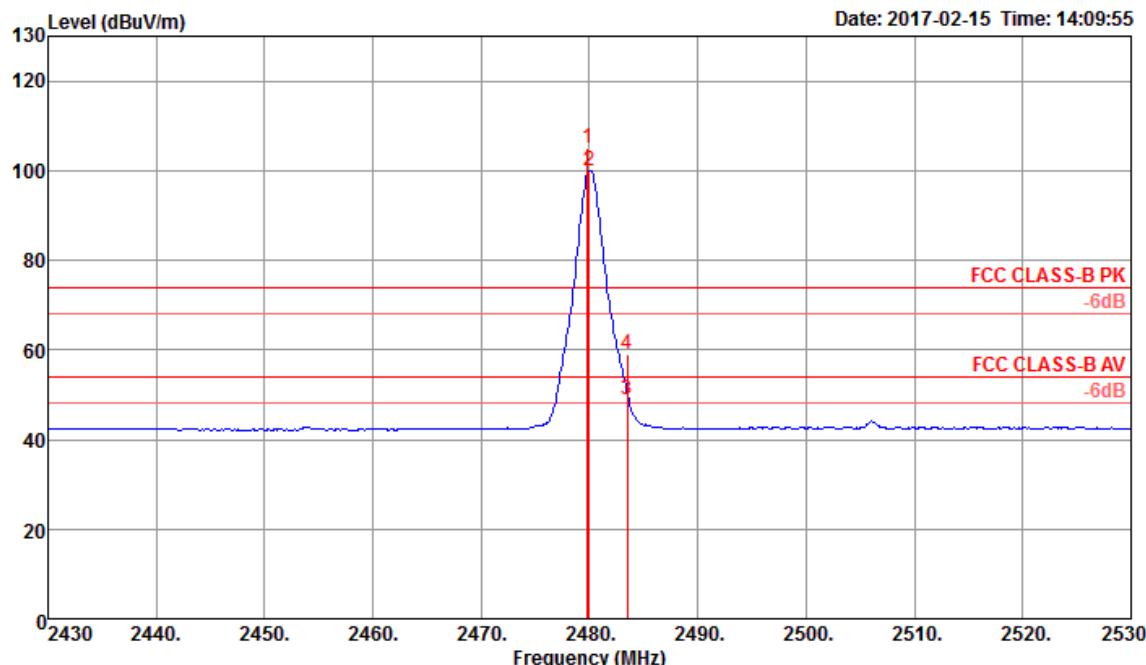

| Freq | Level | Limit | Over | Read | Cable | | | Antenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase |
|-------------|--------|--------|--------|-------|-------|-------|-------|---------|--------|---------|-------|----------|-----------|
| | | | | | Line | Limit | Level | | | | | | |
| MHz | dBuV/m | dBuV/m | | dB | dBuV | | dB | dB/m | dB | cm | deg | | |
| 1 @ 2479.80 | 105.03 | | | | | 74.10 | 3.09 | 27.84 | 0.00 | 267 | 278 | Peak | VERTICAL |
| 2 @ 2480.00 | 99.99 | | | | | 69.06 | 3.09 | 27.84 | 0.00 | 267 | 278 | Average | VERTICAL |
| 3 2483.50 | 48.84 | 54.00 | -5.16 | 17.92 | 3.09 | 27.83 | 0.00 | 267 | 278 | Average | | VERTICAL | |
| 4 2483.50 | 59.05 | 74.00 | -14.95 | 28.13 | 3.09 | 27.83 | 0.00 | 267 | 278 | Peak | | VERTICAL | |

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



RSE Co-location Result

Appendix G

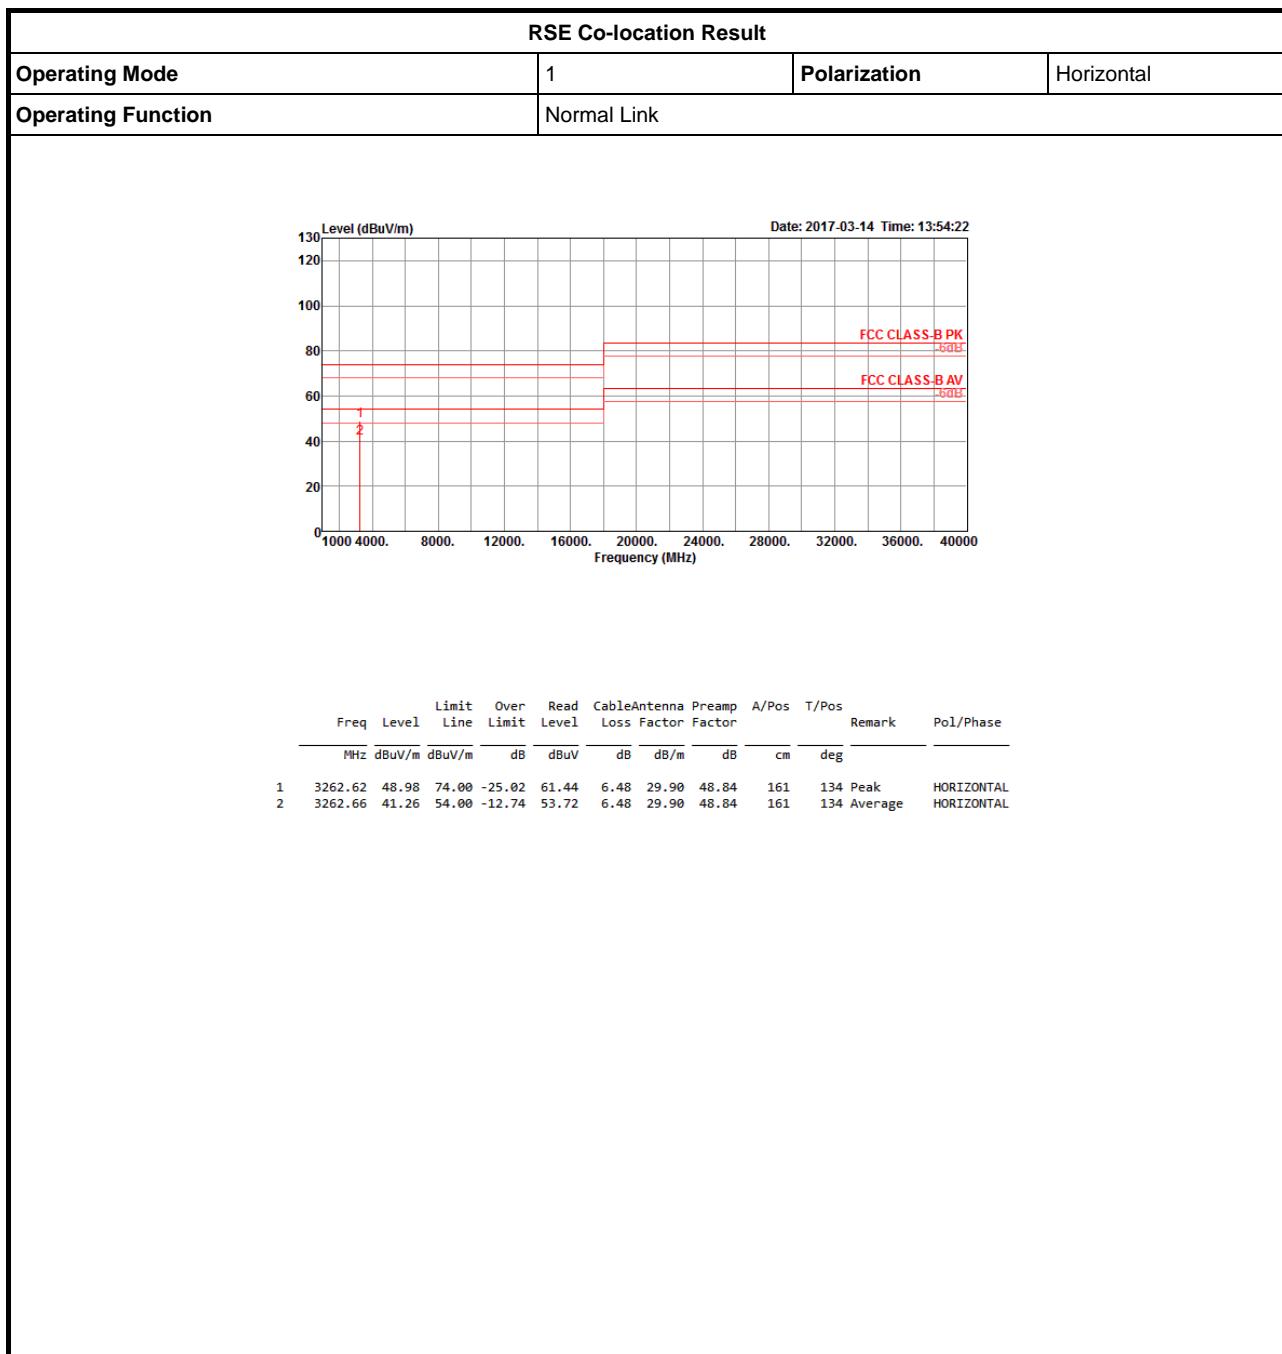



RSE Co-location Result

Appendix G

