

# TEST REPORT

Report No.: **BCTC2110628554-1E**

---

Applicant: **GUANGZHOU HAVIT TECHNOLOGY CO., LTD**

---

Product Name: **Projector**

---

Model/Type  
reference: **PJ202**

---

Tested Date: **2021-10-21 to 2021-11-10**

---

Issued Date: **2021-11-10**

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID:2AI6I-PJ202

Product Name: Projector  
Trademark: HAVIT  
Model/Type Ref.: PJ202  
Prepared For: GUANGZHOU HAVIT TECHNOLOGY CO., LTD  
Address: ROOM 1307,13F,PHASE 2 B,C BUILDING OF POLY WORLD TRADE CENTER,NO.1000,XINGANG EAST ROAD,HAIZHU, GUANGDONG, China  
Manufacturer: GUANGZHOU HAVIT TECHNOLOGY CO., LTD  
Address: ROOM 1307,13F,PHASE 2 B,C BUILDING OF POLY WORLD TRADE CENTER,NO.1000,XINGANG EAST ROAD,HAIZHU, GUANGDONG, China  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2021-10-21  
Sample tested Date: 2021-10-21 to 2021-11-10  
Issue Date: 2021-11-10  
Report No.: BCTC2110628554-1E  
Test Standards: FCC Part15.247  
ANSI C63.10-2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Kelsey Tan/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

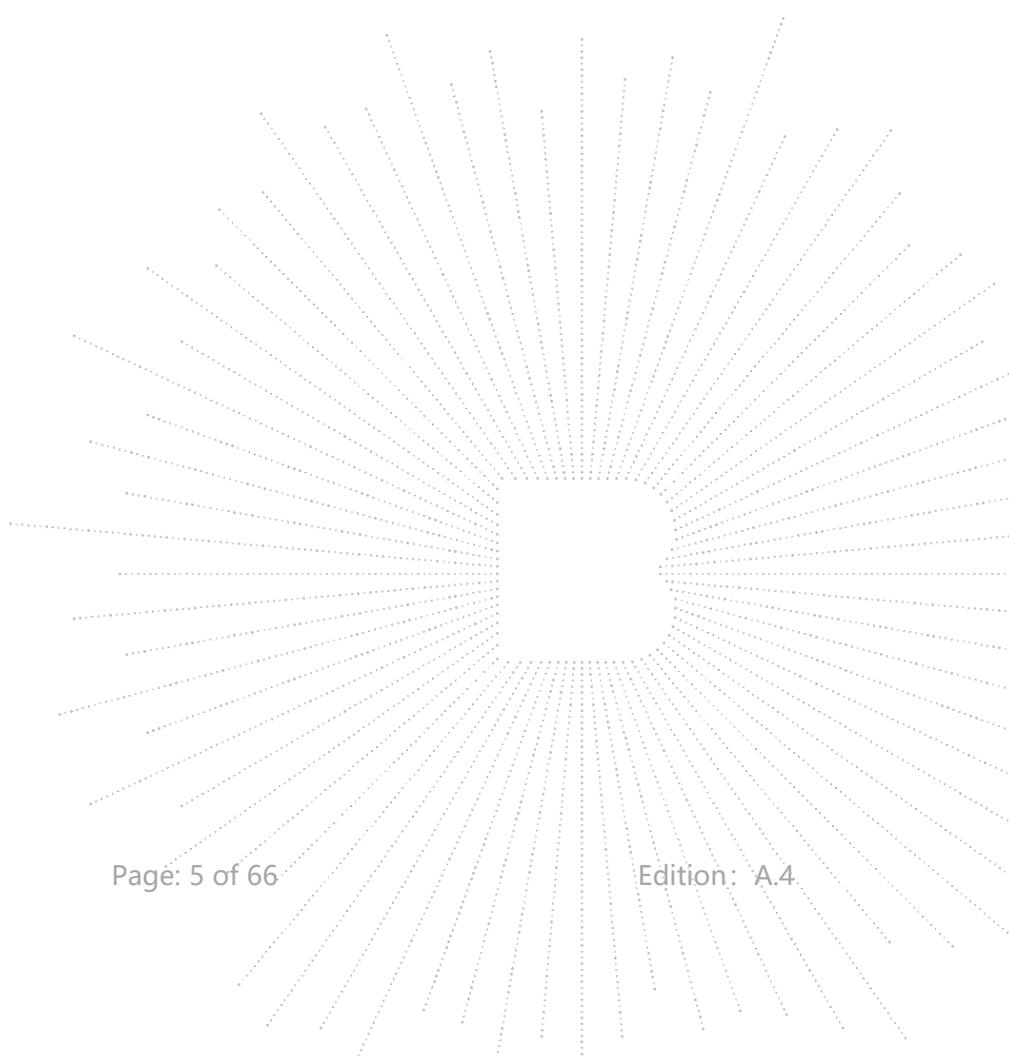
	Page
Test Report Declaration	1
1. Version.....	5
2. Test Summary.....	6
3. Measurement Uncertainty.....	7
4. Product Information And Test Setup.....	8
4.1 Product Information.....	8
4.2 Test Setup Configuration.....	9
4.3 Support Equipment.....	9
4.4 Channel List.....	10
4.5 Test Mode.....	10
4.6 Table Of Parameters Of Text Software Setting.....	11
5. Test Facility And Test Instrument Used.....	12
5.1 Test Facility.....	12
5.2 Test Instrument Used.....	12
6. Conducted Emissions.....	14
6.1 Block Diagram Of Test Setup.....	14
6.2 Limit.....	14
6.3 Test procedure.....	14
6.4 EUT operating Conditions.....	14
6.5 Test Result.....	15
7. Radiated Emissions.....	17
7.1 Block Diagram Of Test Setup.....	17
7.2 Limit.....	18
7.3 Test procedure.....	19
7.4 EUT Operating Conditions.....	20
7.5 Test Result.....	21
8. Radiated Band Emission Measurement And Restricted Bands Of Operation.....	28
8.1 Block Diagram Of Test Setup.....	28
8.2 Limit.....	28
8.3 Test procedure.....	29
8.4 EUT Operating Conditions.....	29
8.5 Test Result.....	30
9. Power Spectral Density Test.....	32
9.1 Block Diagram Of Test Setup.....	32
9.2 Limit.....	32
9.3 Test procedure.....	32
9.4 EUT Operating Conditions.....	32
9.5 Test Result.....	33
10. Bandwidth Test.....	40
10.1 Block Diagram Of Test Setup.....	40
10.2 Limit.....	40
10.3 Test procedure.....	40
10.4 EUT Operating Conditions.....	40
10.5 Test Result.....	41
11. Peak Output Power Test.....	48
11.1 Block Diagram Of Test Setup.....	48
11.2 Limit.....	48

11.3	Test Procedure.....	48
11.4	EUT Operating Conditions.....	48
11.5	Test Result.....	49
12.	100 kHz Bandwidth Of Frequency Band Edge.....	50
12.1	Block Diagram Of Test Setup.....	50
12.2	Limit.....	50
12.3	Test Procedure.....	50
12.4	EUT Operating Conditions.....	50
12.5	Test Result.....	51
13.	Duty Cycle Of Test Signal.....	59
13.1	Standard Requirement.....	59
13.2	Formula.....	59
13.3	Test Procedure.....	59
13.4	Test Result.....	59
14.	Antenna Requirement.....	62
14.1	Limit.....	62
14.1	Test Result.....	62
15.	EUT Photographs.....	63
16.	EUT Test Setup Photographs.....	64

(Note: N/A Means Not Applicable)

## 1. Version

Report No.	Issue Date	Description	Approved
BCTC2110628554-1E	2021-11-10	Original	Valid



## 2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=4.3\text{dB}$
2	3m chamber Radiated spurious emission(9KHz-30MHz)	$U=3.7\text{dB}$
3	3m chamber Radiated spurious emission(1GHz-18GHz)	$U=4.5\text{dB}$
4	3m chamber Radiated spurious emission(18GHz-40GHz)	$U=3.34\text{dB}$
5	Conducted Emission (150kHz-30MHz)	$U=3.20\text{dB}$
6	Conducted Adjacent channel power	$U=1.38\text{dB}$
7	Conducted output power uncertainty Above 1G	$U=1.576\text{dB}$
8	Conducted output power uncertainty below 1G	$U=1.28\text{dB}$
9	humidity uncertainty	$U=5.3\%$
10	Temperature uncertainty	$U=0.59\text{ }^\circ\text{C}$

## 4. Product Information And Test Setup


### 4.1 Product Information

Model/Type reference: PJ202  
Model differences: N/A  
Operation Frequency: 802.11b/g/n20MHz:2412~2462 MHz  
802.11n40MHz:2422~2452 MHz  
Bit Rate of Transmitter: 802.11b:11/5.5/2/1 Mbps  
802.11g:54/48/36/24/18/12/9/6Mbps  
802.11n Up to 150Mbps  
Type of Modulation: WIFI: OFDM/DSSS  
Number Of Channel: 802.11b/g/n20MHz:11 CH  
802.11n40MHz: 7 CH  
Antenna installation: Internal antenna  
Antenna Gain: 1dBi  
Ratings: AC 120V/60Hz


## 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



## 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Projector	HAVIT	PJ202	N/A	EUT

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

Channel List for 802.11b/g/n(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n(40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

#### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 01	802.11b
Mode 2	CH 06	
Mode 3	CH 11	
Mode 4	CH 01	
Mode 5	CH 06	802.11g
Mode 6	CH 11	
Mode 7	CH 01	
Mode 8	CH 06	
Mode 9	CH 11	802.11n20
Mode 10	CH 03	
Mode 11	CH 06	
Mode 12	CH 09	
Mode 13	Link mode (Conducted emission and Radiated emission)	802.11n40

Notes:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
3. According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 11Mbps for 802.11b, 6Mbps for 802.11g, 13Mbps for 802.11n(H20), 54Mbps for 802.11n(H40)

#### 4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

<b>Test software Version</b>	<b>SecureCRT</b>		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF
Frequency	2422MHz	2437MHz	2452MHz
Parameters	DEF	DEF	DEF

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

### 5.2 Test Instrument Used

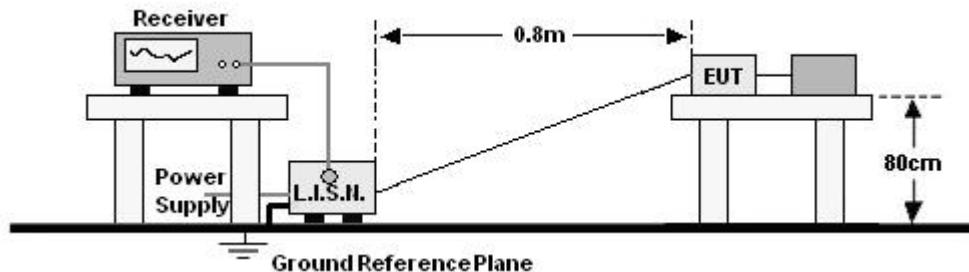
<b>Conducted Emissions Test</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model#</b>	<b>Serial#</b>	<b>Last Cal.</b>	<b>Next Cal.</b>
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
LISN	R&S	ENV216	101375	May 28, 2021	May 27, 2022
ISN	HPX	ISN T800	S1509001	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

<b>RF Conducted Test</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model#</b>	<b>Serial#</b>	<b>Last Cal.</b>	<b>Next Cal.</b>
Power Metter	Keysight	E4419	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 28, 2021	May 27, 2022

Radiated Emissions Test (966 Chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	Jun. 01, 2021	May 31, 2022
Horn Antenna	Schwarzbeck	BBHA9120D	1541	Jun. 02, 2021	Jun. 01, 2022
Horn Antenna (18GHz-40GHz z)	Schwarzbeck	BBHA9170	00822	Jun. 15, 2021	Jun. 14, 2022
Amplifier (18GHz-40GHz z)	MITEQ	TTA1840-35- HG	2034381	May 28, 2021	May 27, 2022
Loop Antenna (9KHz-30MHz )	Schwarzbeck	FMZB1519B	00014	Jun. 02, 2021	Jun. 01, 2022
RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-000 8	May 28, 2021	May 27, 2022
RF cables2 (30MHz-1GHz )	Huber+Suhnar	30MHz-1GHz	1486150	May 28, 2021	May 27, 2022
RF cables3 (1GHz-40GHz )	Huber+Suhnar	1GHz-40GHz	1607106	May 28, 2021	May 27, 2022
Power Meter	Keysight	E4419	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5G Hz	Keysight	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup



### 6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

1. \*Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

### 6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

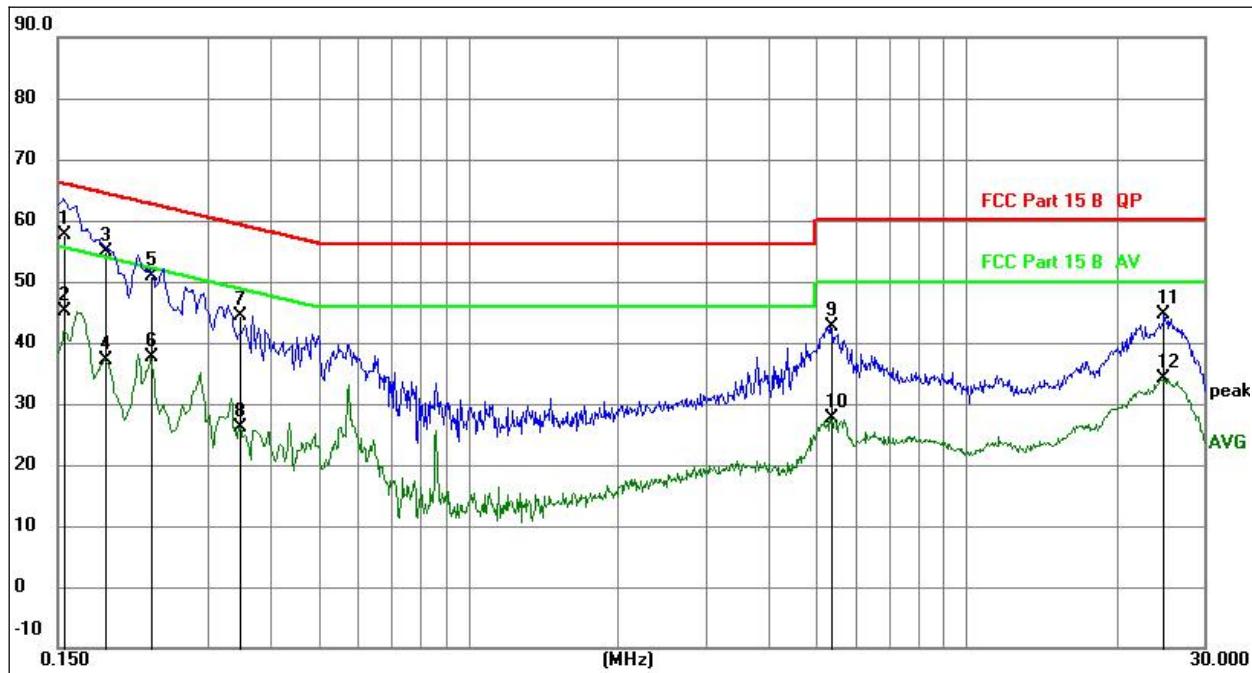
- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	L

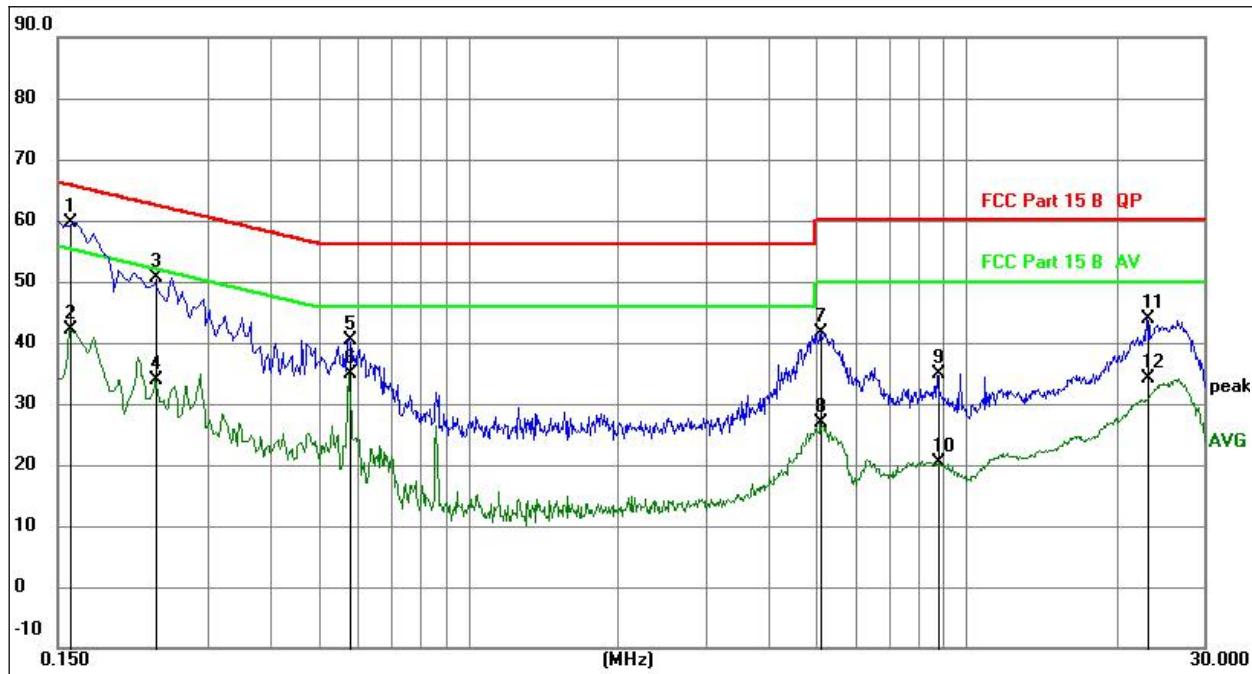


### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dB	dB	dBuV	dBuV	dB	
1	*	0.1545	38.05	19.61	57.66	65.75	-8.09	QP
2		0.1545	25.46	19.61	45.07	55.75	-10.68	AVG
3		0.1864	35.35	19.61	54.96	64.20	-9.24	QP
4		0.1864	17.57	19.61	37.18	54.20	-17.02	AVG
5		0.2304	31.15	19.61	50.76	62.44	-11.68	QP
6		0.2304	17.99	19.61	37.60	52.44	-14.84	AVG
7		0.3465	24.67	19.61	44.28	59.05	-14.77	QP
8		0.3465	6.58	19.61	26.19	49.05	-22.86	AVG
9		5.3332	22.83	19.71	42.54	60.00	-17.46	QP
10		5.3332	7.85	19.71	27.56	50.00	-22.44	AVG
11		24.9221	24.93	19.74	44.67	60.00	-15.33	QP
12		24.9221	14.31	19.74	34.05	50.00	-15.95	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	N


**Remark:**

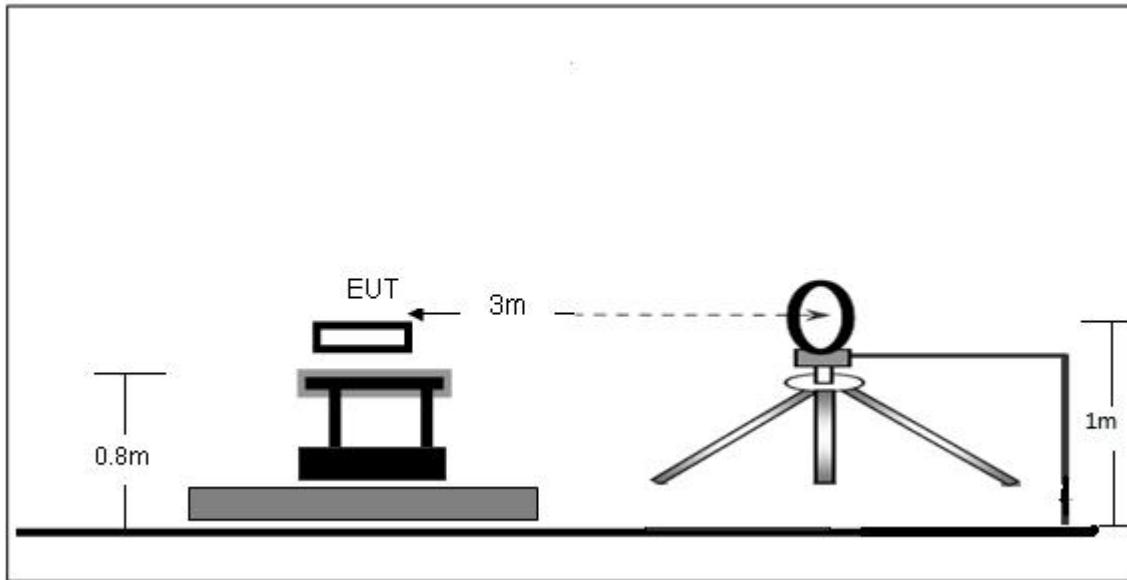
1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
1	*	0.1590	40.05	19.61	59.66	65.52	-5.86	QP
2		0.1590	22.42	19.61	42.03	55.52	-13.49	AVG
3		0.2355	31.14	19.61	50.75	62.25	-11.50	QP
4		0.2355	14.26	19.61	33.87	52.25	-18.38	AVG
5		0.5774	20.72	19.62	40.34	56.00	-15.66	QP
6		0.5774	15.24	19.62	34.86	46.00	-11.14	AVG
7		5.0865	21.97	19.71	41.68	60.00	-18.32	QP
8		5.0865	7.11	19.71	26.82	50.00	-23.18	AVG
9		8.7855	14.98	19.78	34.76	60.00	-25.24	QP
10		8.7855	0.69	19.78	20.47	50.00	-29.53	AVG
11		23.1090	24.25	19.74	43.99	60.00	-16.01	QP
12		23.1090	14.34	19.74	34.08	50.00	-15.92	AVG

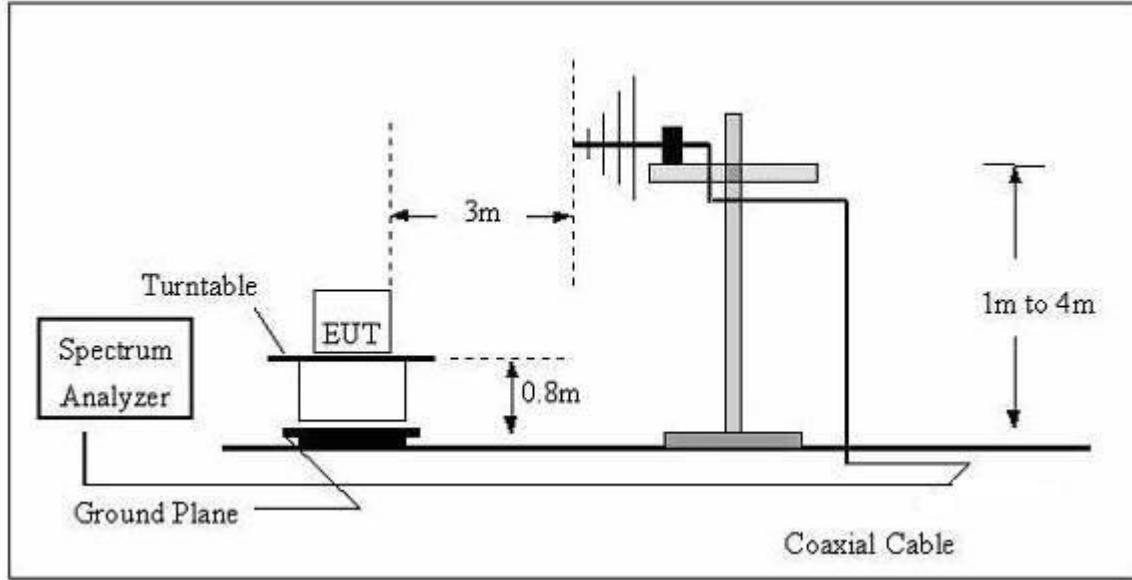
## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup

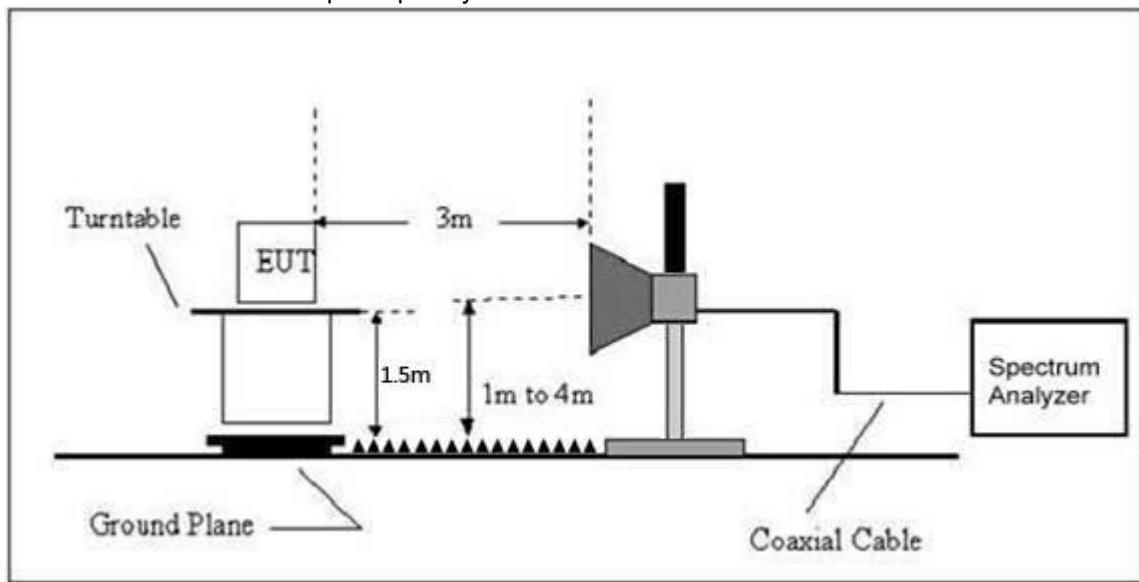
(A) Radiated Emission Test-Up Frequency Below 30MHz



(B) Radiated Emission Test-Up Frequency 30MHz~1GHz



## (C) Radiated Emission Test-Up Frequency Above 1GHz



## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### FREQUENCY RANGE OF RADIATED MEASUREMENT

##### (a) For an intentional radiator

the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

### 7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

#### 7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	---

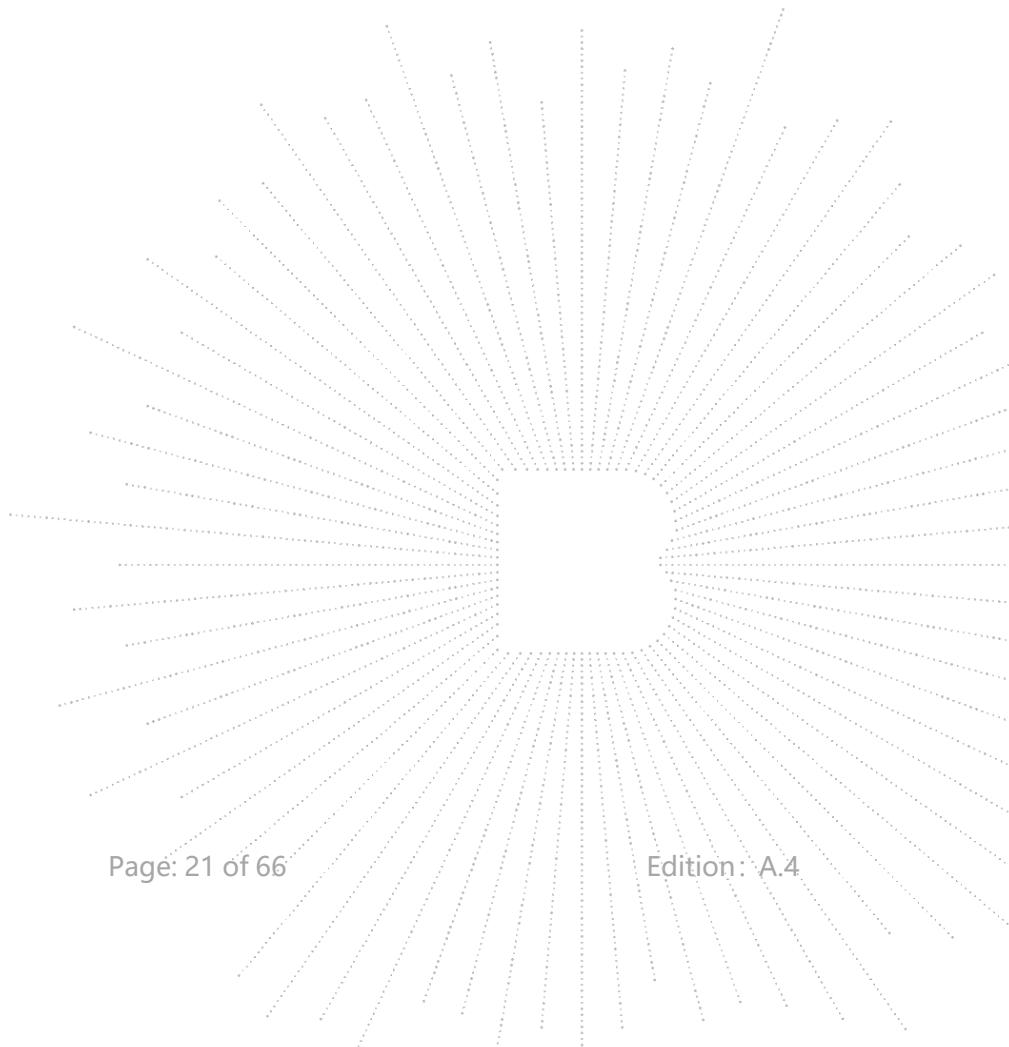
Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS

Note:

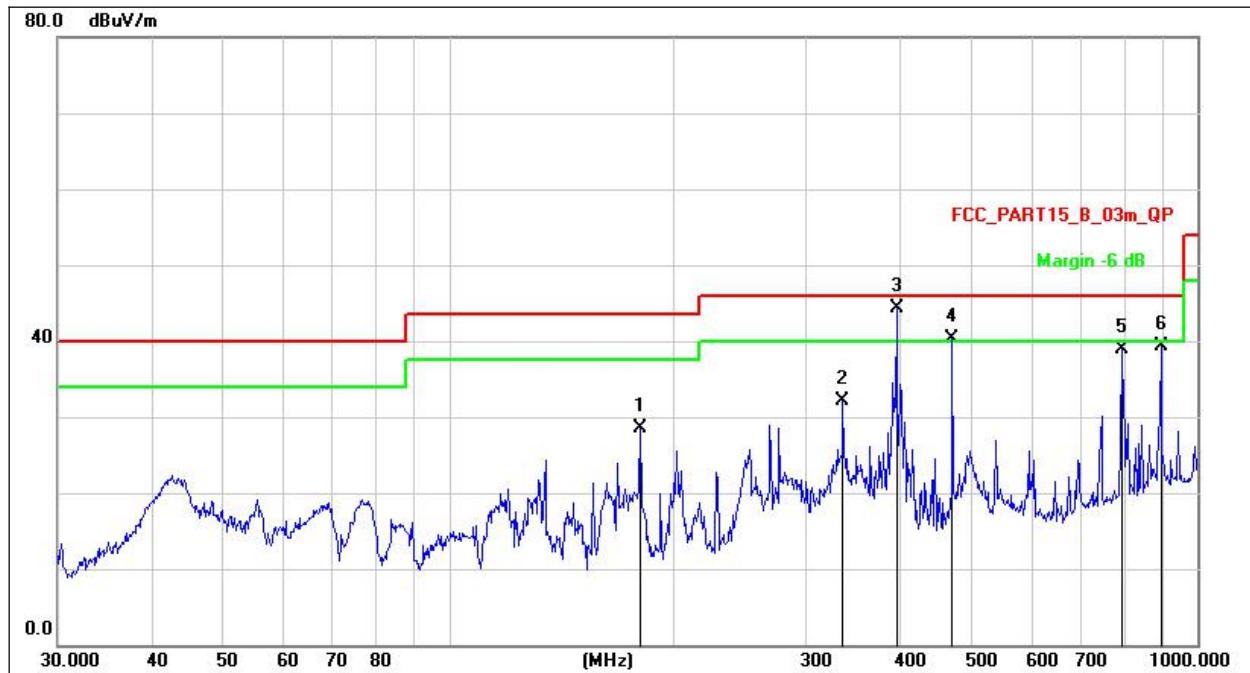
The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits(dBuV) + distance extrapolation factor.



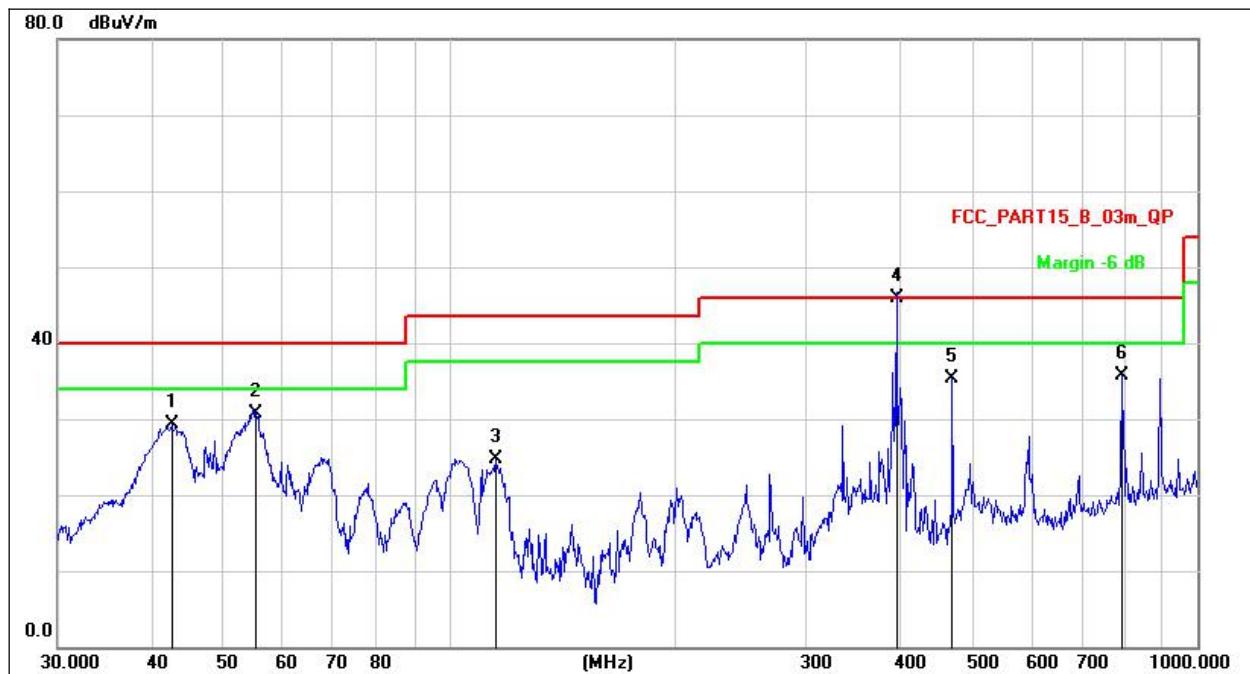
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	Horizontal


**Remark:**

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		180.0165	46.17	-17.58	28.59	43.50	-14.91	QP
2		336.0352	44.68	-12.61	32.07	46.00	-13.93	QP
3	*	396.2415	55.42	-11.18	44.24	46.00	-1.76	QP
4	!	470.5232	49.82	-9.55	40.27	46.00	-5.73	QP
5		793.3960	42.69	-3.73	38.96	46.00	-7.04	QP
6		893.8567	41.01	-1.63	39.38	46.00	-6.62	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	Vertical



Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		42.6000	44.48	-15.26	29.22	40.00	-10.78	QP
2		55.2207	46.16	-15.40	30.76	40.00	-9.24	QP
3		115.3205	41.88	-17.27	24.61	43.50	-18.89	QP
4	*	396.0015	57.09	-11.18	45.91	46.00	-0.09	QP
5		470.5232	44.91	-9.55	35.36	46.00	-10.64	QP
6		793.3960	39.40	-3.73	35.67	46.00	-10.33	QP

**Between 1GHz – 25GHz**
**802.11b**

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
<b>Low channel:2412MHz</b>							
V	4824.00	52.96	-0.43	52.53	74.00	-21.47	PK
V	4824.00	42.91	-0.43	42.48	54.00	-11.52	AV
V	7236.00	43.98	8.31	52.29	74.00	-21.71	PK
V	7236.00	34.72	8.31	43.03	54.00	-10.97	AV
H	4824.00	49.70	-0.43	49.27	74.00	-24.73	PK
H	4824.00	38.80	-0.43	38.37	54.00	-15.63	AV
H	7236.00	42.96	8.31	51.27	74.00	-22.73	PK
H	7236.00	34.00	8.31	42.31	54.00	-11.69	AV
<b>Middle channel:2437MHz</b>							
V	4874.00	51.78	-0.38	51.40	74.00	-22.60	PK
V	4874.00	45.57	-0.38	45.19	54.00	-8.81	AV
V	7311.00	41.12	8.83	49.95	74.00	-24.05	PK
V	7311.00	32.19	8.83	41.02	54.00	-12.98	AV
H	4874.00	47.62	-0.38	47.24	74.00	-26.76	PK
H	4874.00	38.38	-0.38	38.00	54.00	-16.00	AV
H	7311.00	39.06	8.83	47.89	74.00	-26.11	PK
H	7311.00	30.23	8.83	39.06	54.00	-14.94	AV
<b>High channel:2462MHz</b>							
V	4924.00	54.20	-0.32	53.88	74.00	-20.12	PK
V	4924.00	43.62	-0.32	43.30	54.00	-10.70	AV
V	7386.00	46.05	9.35	55.40	74.00	-18.60	PK
V	7386.00	36.62	9.35	45.97	54.00	-8.03	AV
H	4924.00	52.67	-0.32	52.35	74.00	-21.65	PK
H	4924.00	42.75	-0.32	42.43	54.00	-11.57	AV
H	7386.00	44.14	9.35	53.49	74.00	-20.51	PK
H	7386.00	36.66	9.35	46.01	54.00	-7.99	AV

**Remark:**

1. Emission Level = Meter Reading + Factor,  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Over= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**802.11g**

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
<b>Low channel:2412MHz</b>							
V	4824.00	52.50	-0.43	52.07	74.00	-21.93	PK
V	4824.00	44.13	-0.43	43.70	54.00	-10.30	AV
V	7236.00	42.94	8.31	51.25	74.00	-22.75	PK
V	7236.00	32.00	8.31	40.31	54.00	-13.69	AV
H	4824.00	51.28	-0.43	50.85	74.00	-23.15	PK
H	4824.00	41.78	-0.43	41.35	54.00	-12.65	AV
H	7236.00	41.17	8.31	49.48	74.00	-24.52	PK
H	7236.00	32.56	8.31	40.87	54.00	-13.13	AV
<b>Middle channel:2437MHz</b>							
V	4874.00	50.76	-0.38	50.38	74.00	-23.62	PK
V	4874.00	43.83	-0.38	43.45	54.00	-10.55	AV
V	7311.00	42.90	8.83	51.73	74.00	-22.27	PK
V	7311.00	33.22	8.83	42.05	54.00	-11.95	AV
H	4874.00	49.48	-0.38	49.10	74.00	-24.90	PK
H	4874.00	38.59	-0.38	38.21	54.00	-15.79	AV
H	7311.00	40.71	8.83	49.54	74.00	-24.46	PK
H	7311.00	32.12	8.83	40.95	54.00	-13.05	AV
<b>High channel:2462MHz</b>							
V	4924.00	51.91	-0.32	51.59	74.00	-22.41	PK
V	4924.00	40.99	-0.32	40.67	54.00	-13.33	AV
V	7386.00	45.32	9.35	54.67	74.00	-19.33	PK
V	7386.00	35.96	9.35	45.31	54.00	-8.69	AV
H	4924.00	49.44	-0.32	49.12	74.00	-24.88	PK
H	4924.00	38.66	-0.32	38.34	54.00	-15.66	AV
H	7386.00	43.86	9.35	53.21	74.00	-20.79	PK
H	7386.00	36.58	9.35	45.93	54.00	-8.07	AV

## Remark:

1. Emission Level = Meter Reading + Factor,  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Over= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
<b>Low channel:2412MHz</b>							
V	4824.00	52.19	-0.43	51.76	74.00	-22.24	PK
V	4824.00	41.35	-0.43	40.92	54.00	-13.08	AV
V	7236.00	41.21	8.31	49.52	74.00	-24.48	PK
V	7236.00	31.64	8.31	39.95	54.00	-14.05	AV
H	4824.00	48.05	-0.43	47.62	74.00	-26.38	PK
H	4824.00	38.23	-0.43	37.80	54.00	-16.20	AV
H	7236.00	39.48	8.31	47.79	74.00	-26.21	PK
H	7236.00	31.98	8.31	40.29	54.00	-13.71	AV
<b>Middle channel:2437MHz</b>							
V	4874.00	48.72	-0.38	48.34	74.00	-25.66	PK
V	4874.00	41.46	-0.38	41.08	54.00	-12.92	AV
V	7311.00	39.61	8.83	48.44	74.00	-25.56	PK
V	7311.00	30.06	8.83	38.89	54.00	-15.11	AV
H	4874.00	45.53	-0.38	45.15	74.00	-28.85	PK
H	4874.00	34.70	-0.38	34.32	54.00	-19.68	AV
H	7311.00	36.74	8.83	45.57	74.00	-28.43	PK
H	7311.00	29.29	8.83	38.12	54.00	-15.88	AV
<b>High channel:2462MHz</b>							
V	4924.00	50.62	-0.32	50.30	74.00	-23.70	PK
V	4924.00	41.04	-0.32	40.72	54.00	-13.28	AV
V	7386.00	41.80	9.35	51.15	74.00	-22.85	PK
V	7386.00	32.73	9.35	42.08	54.00	-11.92	AV
H	4924.00	47.79	-0.32	47.47	74.00	-26.53	PK
H	4924.00	38.57	-0.32	38.25	54.00	-15.75	AV
H	7386.00	40.73	9.35	50.08	74.00	-23.92	PK
H	7386.00	31.90	9.35	41.25	54.00	-12.75	AV

## Remark:

1. Emission Level = Meter Reading + Factor,  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Over= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
<b>Low channel:2422MHz</b>							
V	4844.00	53.09	-0.43	52.66	74.00	-21.34	PK
V	4844.00	42.81	-0.43	42.38	54.00	-11.62	AV
V	7266.00	42.98	8.31	51.29	74.00	-22.71	PK
V	7266.00	32.55	8.31	40.86	54.00	-13.14	AV
H	4844.00	48.59	-0.43	48.16	74.00	-25.84	PK
H	4844.00	39.23	-0.43	38.80	54.00	-15.20	AV
H	7266.00	40.17	8.31	48.48	74.00	-25.52	PK
H	7266.00	31.85	8.31	40.16	54.00	-13.84	AV
<b>Middle channel:2437MHz</b>							
V	4874.00	50.47	-0.38	50.09	74.00	-23.91	PK
V	4874.00	41.91	-0.38	41.53	54.00	-12.47	AV
V	7311.00	42.98	8.83	51.81	74.00	-22.19	PK
V	7311.00	34.14	8.83	42.97	54.00	-11.03	AV
H	4874.00	46.01	-0.38	45.63	74.00	-28.37	PK
H	4874.00	36.85	-0.38	36.47	54.00	-17.53	AV
H	7311.00	40.10	8.83	48.93	74.00	-25.07	PK
H	7311.00	32.45	8.83	41.28	54.00	-12.72	AV
<b>High channel:2452MHz</b>							
V	4904.00	53.45	-0.32	53.13	74.00	-20.87	PK
V	4904.00	43.87	-0.32	43.55	54.00	-10.45	AV
V	7356.00	45.82	9.35	55.17	74.00	-18.83	PK
V	7356.00	36.05	9.35	45.40	54.00	-8.60	AV
H	4904.00	52.43	-0.32	52.11	74.00	-21.89	PK
H	4904.00	42.32	-0.32	42.00	54.00	-12.00	AV
H	7356.00	44.13	9.35	53.48	74.00	-20.52	PK
H	7356.00	35.99	9.35	45.34	54.00	-8.66	AV

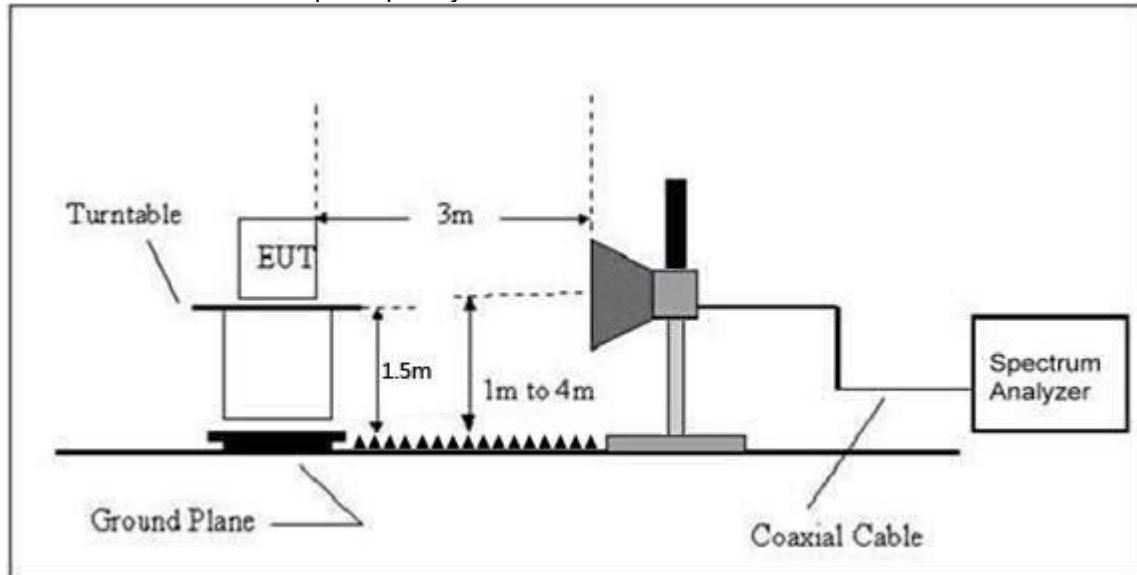
## Remark:

1. Emission Level = Meter Reading + Factor,  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Over= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 8. Radiated Band Emission Measurement And Restricted Bands Of Operation

### 8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz



### 8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

**LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)**

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

**Notes:**

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

### 8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

**Note:**

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
<b>Low Channel 2412MHz</b>								
802.11b	H	2390.00	56.27	-6.70	49.57	74.00	54.00	PASS
	H	2400.00	48.24	-6.71	41.53	74.00	54.00	PASS
	V	2390.00	57.04	-6.70	50.34	74.00	54.00	PASS
	V	2400.00	49.56	-6.71	42.85	74.00	54.00	PASS
<b>High Channel 2462MHz</b>								
802.11g	H	2483.50	54.47	-6.79	47.68	74.00	54.00	PASS
	H	2485.00	48.71	-6.81	41.90	74.00	54.00	PASS
	V	2483.50	56.08	-6.79	49.29	74.00	54.00	PASS
	V	2485.00	48.75	-6.81	41.94	74.00	54.00	PASS
<b>Low Channel 2412MHz</b>								
802.11g	H	2390.00	57.57	-6.70	50.87	74.00	54.00	PASS
	H	2400.00	48.95	-6.71	42.24	74.00	54.00	PASS
	V	2390.00	57.77	-6.70	51.07	74.00	54.00	PASS
	V	2400.00	50.03	-6.71	43.32	74.00	54.00	PASS
<b>High Channel 2462MHz</b>								
802.11g	H	2483.50	56.34	-6.79	49.55	74.00	54.00	PASS
	H	2485.00	50.02	-6.81	43.21	74.00	54.00	PASS
	V	2483.50	57.76	-6.79	50.97	74.00	54.00	PASS
	V	2485.00	49.74	-6.81	42.93	74.00	54.00	PASS
<b>Remark:</b>								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier.								
Over= Emission Level - Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
						PK	PK	
<b>Low Channel 2412MHz</b>								
802.11n20	H	2390.00	56.96	-6.70	50.26	74.00	54.00	PASS
	H	2400.00	49.70	-6.71	42.99	74.00	54.00	PASS
	V	2390.00	57.74	-6.70	51.04	74.00	54.00	PASS
	V	2400.00	49.70	-6.71	42.99	74.00	54.00	PASS
	<b>High Channel 2462MHz</b>							
	H	2483.50	55.71	-6.79	48.92	74.00	54.00	PASS
	H	2500.00	48.64	-6.81	41.83	74.00	54.00	PASS
	V	2483.50	56.50	-6.79	49.71	74.00	54.00	PASS
	V	2500.00	48.11	-6.81	41.30	74.00	54.00	PASS
<b>Low Channel 2422MHz</b>								
802.11n40	H	2390.00	57.39	-6.70	50.69	74.00	54.00	PASS
	H	2400.00	49.13	-6.71	42.42	74.00	54.00	PASS
	V	2390.00	57.67	-6.70	50.97	74.00	54.00	PASS
	V	2400.00	50.28	-6.71	43.57	74.00	54.00	PASS
	<b>High Channel 2452MHz</b>							
	H	2483.50	56.96	-6.79	50.17	74.00	54.00	PASS
	H	2500.00	48.75	-6.81	41.94	74.00	54.00	PASS
	V	2483.50	56.13	-6.79	49.34	74.00	54.00	PASS
	V	2500.00	48.88	-6.81	42.07	74.00	54.00	PASS
<b>Remark:</b>								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier.								
Over= Emission Level - Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

## 9. Power Spectral Density Test

### 9.1 Block Diagram Of Test Setup



### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

### 9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

## 9.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz

Test Mode	Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-11.579	8	PASS
	2437 MHz	-9.466	8	PASS
	2462 MHz	-10.540	8	PASS
TX g Mode	2412 MHz	-18.867	8	PASS
	2437 MHz	-17.397	8	PASS
	2462 MHz	-17.249	8	PASS
TX n Mode(20M)	2412 MHz	-18.293	8	PASS
	2437 MHz	-17.918	8	PASS
	2462 MHz	-17.087	8	PASS
TX n Mode(40M)	2422 MHz	-20.361	8	PASS
	2437 MHz	-17.977	8	PASS
	2452 MHz	-19.600	8	PASS

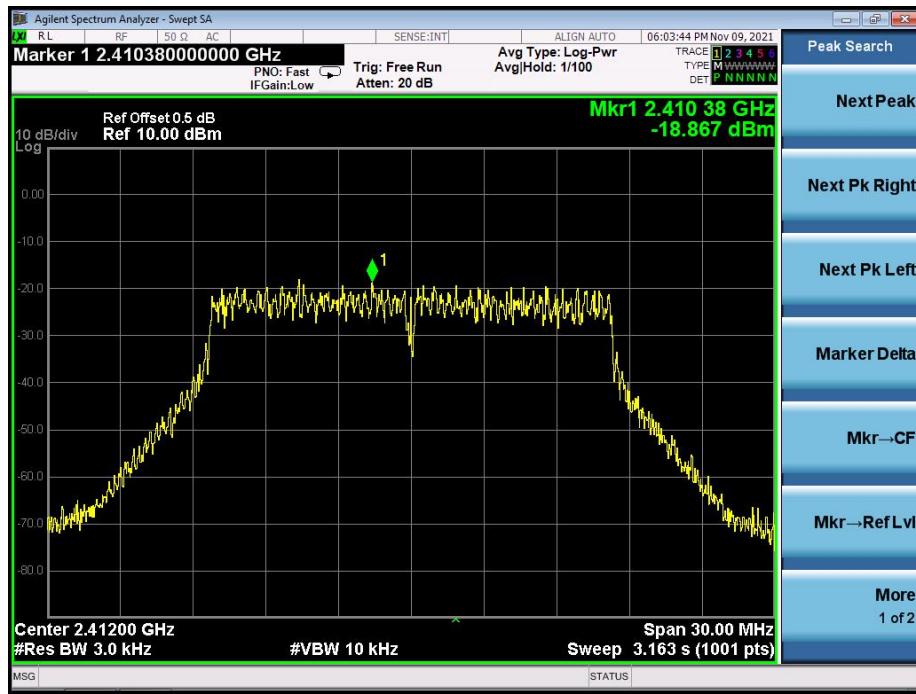
TX b CH01

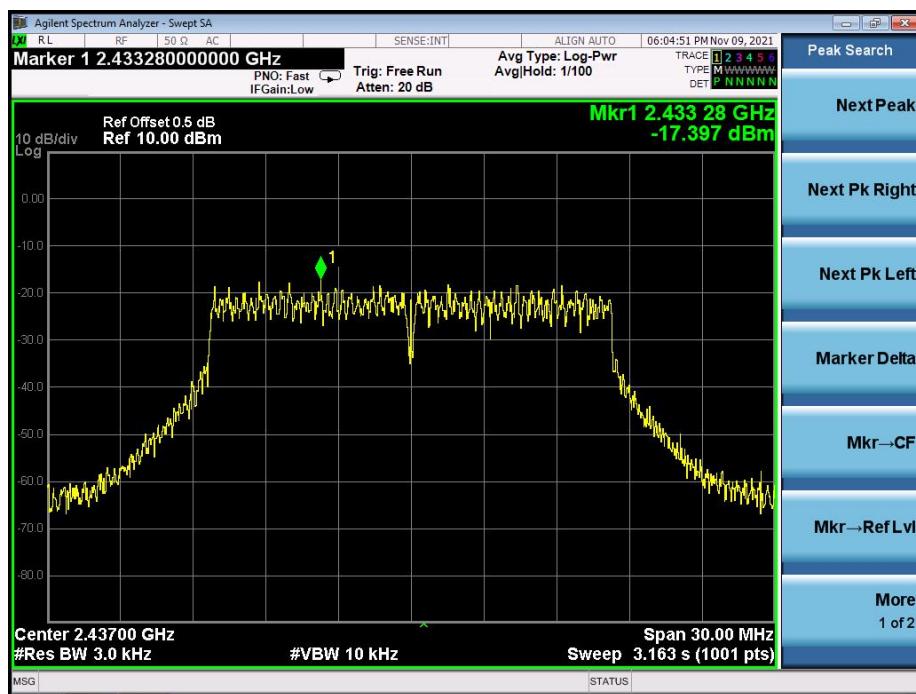
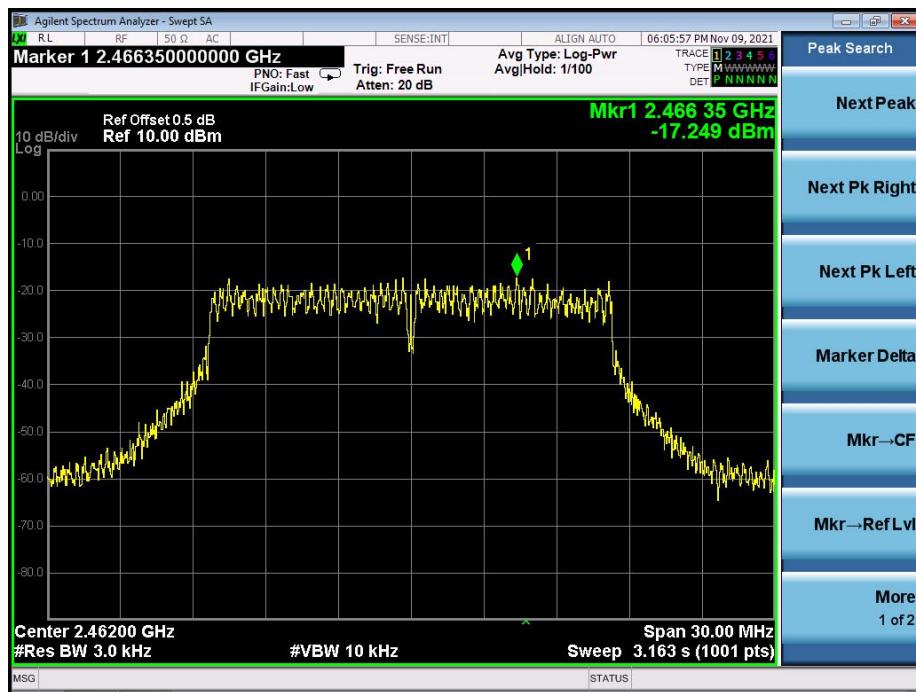


TX b CH06

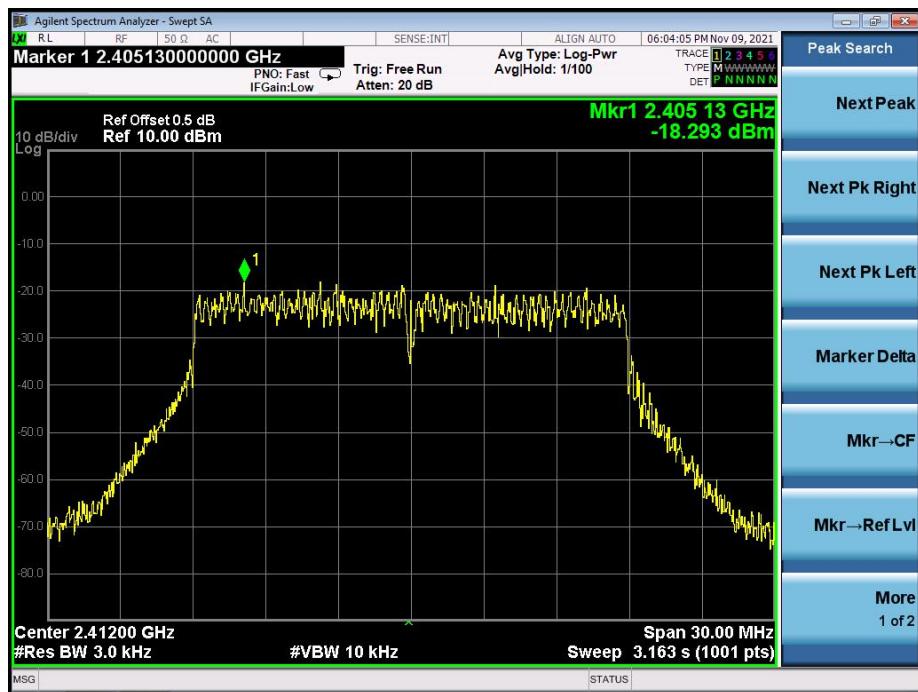


**TX b CH11**

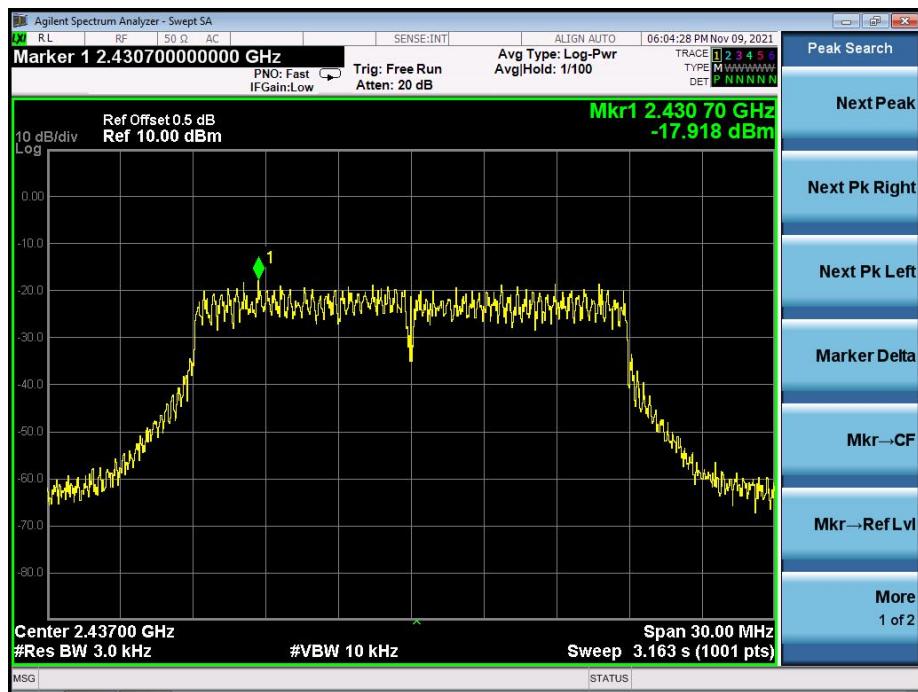
**TX g CH01**


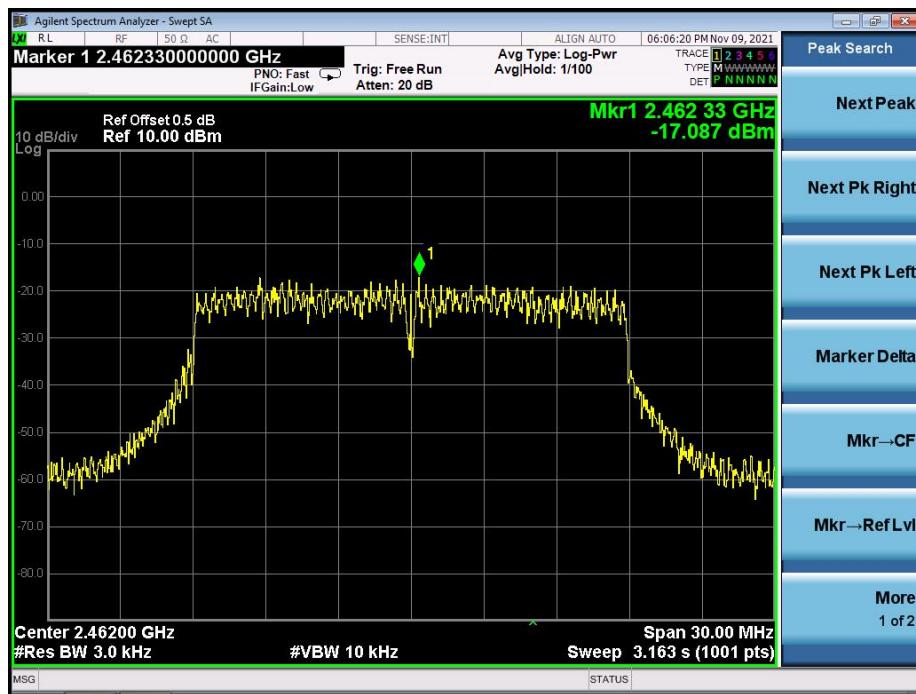
**TX g CH06**

**TX g CH11**


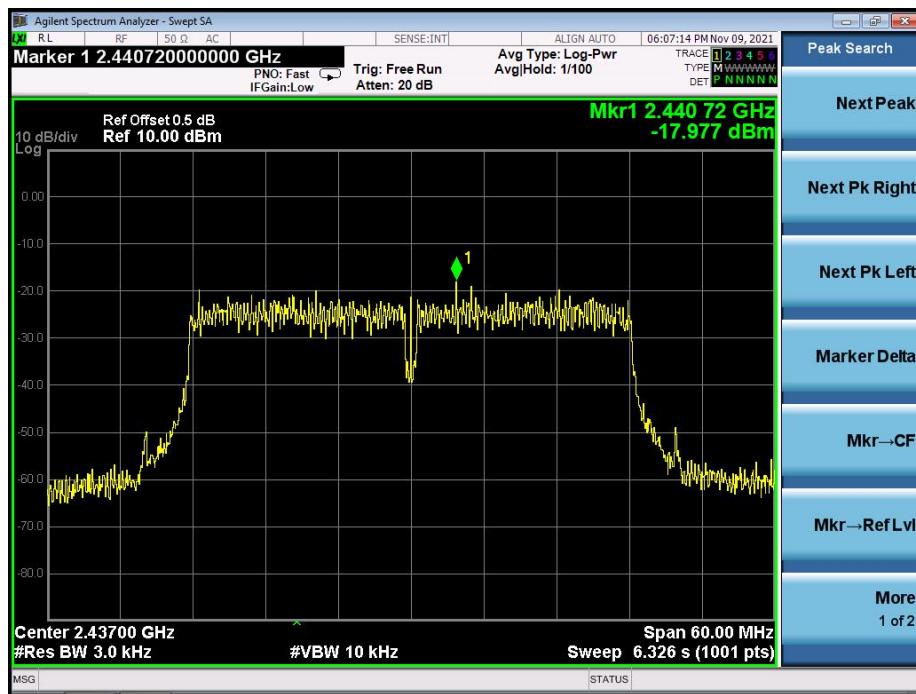
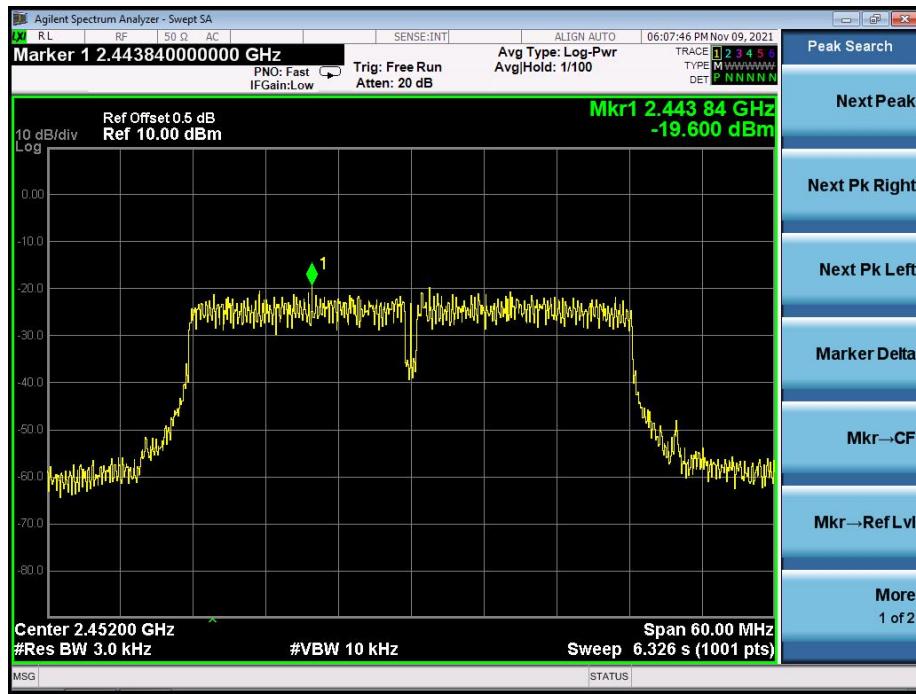
TX n20 CH01



TX n20 CH06



**TX n20 CH11**

**TX n40 CH03**


**TX n40 CH06**

**TX n40 CH09**


## 10. Bandwidth Test

### 10.1 Block Diagram Of Test Setup



### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 EUT Operating Conditions

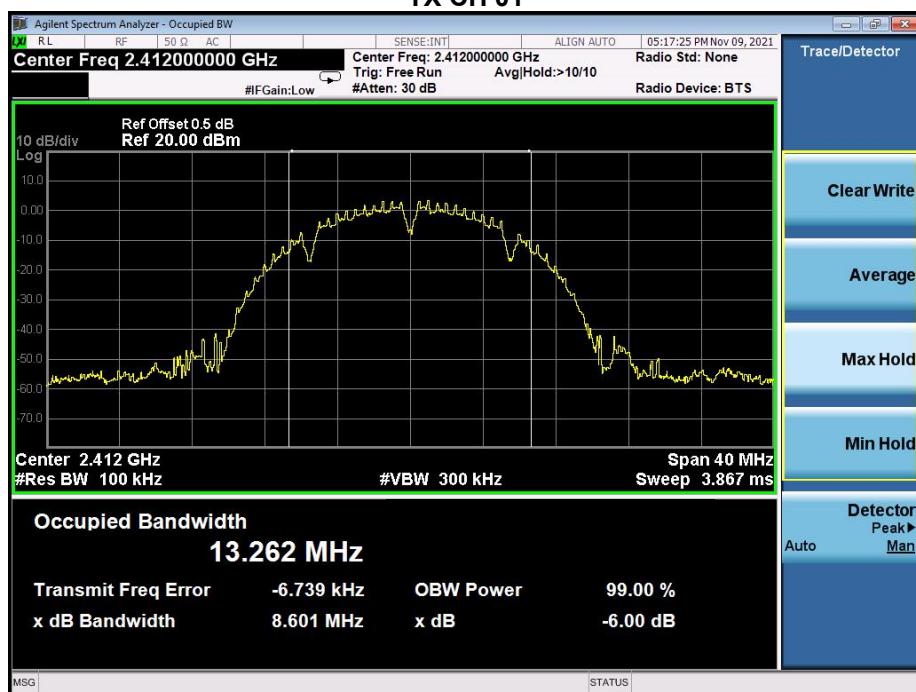
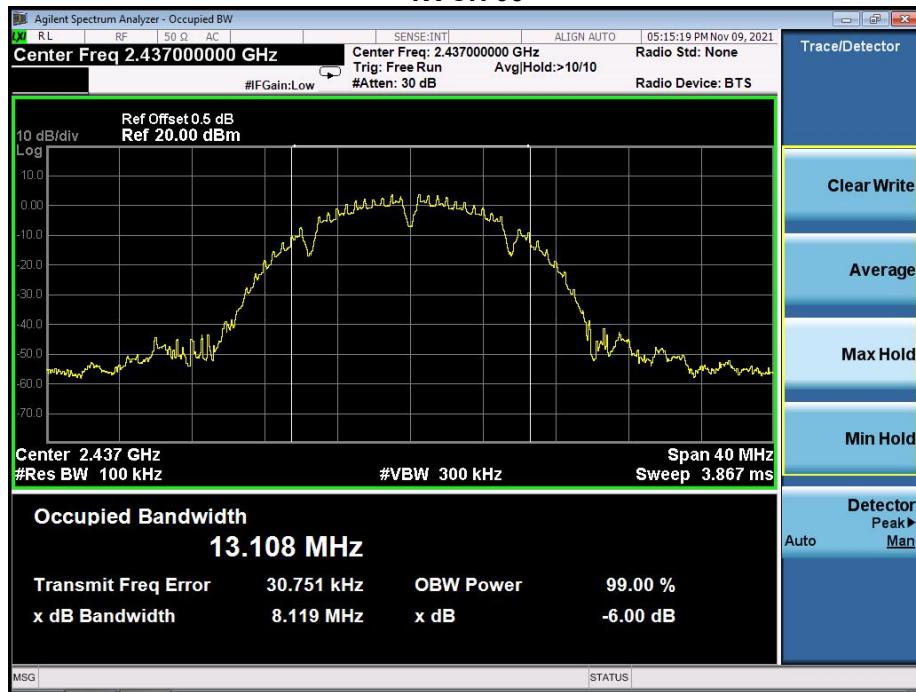
The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

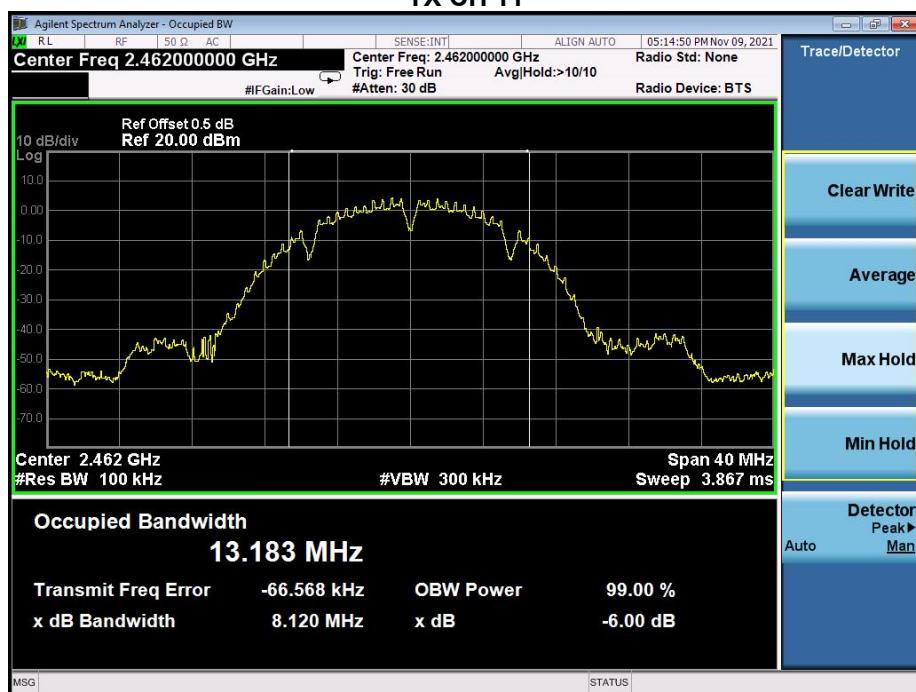
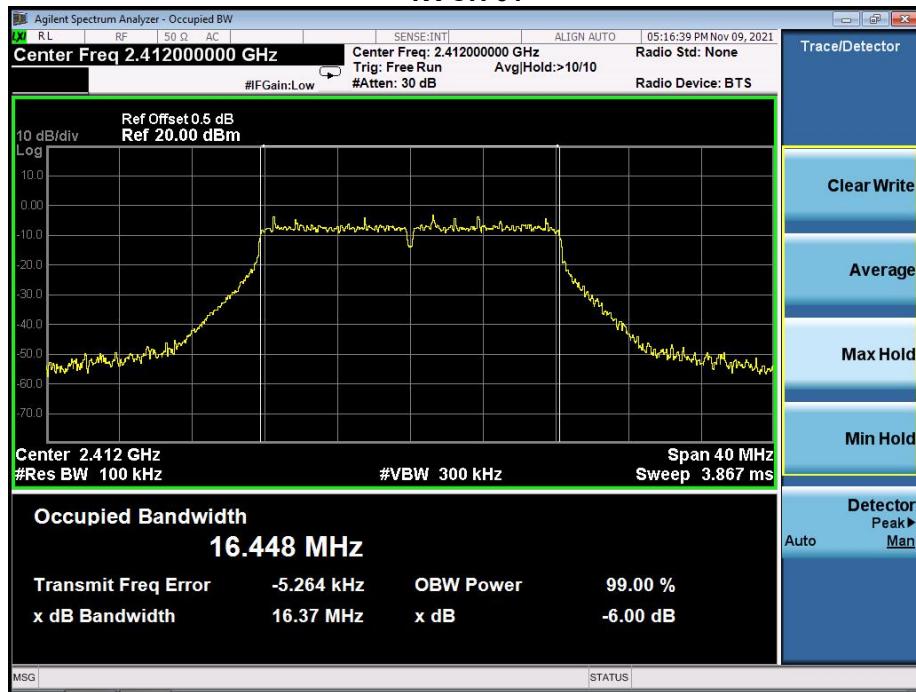
Note: Power Spectral Density(dBm)=Reading+Cable Loss

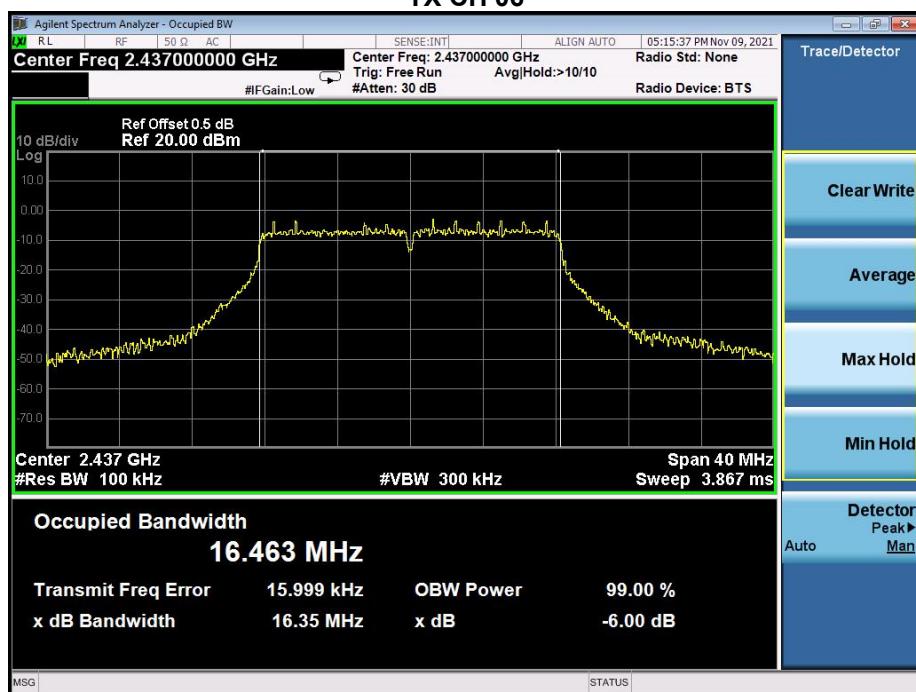
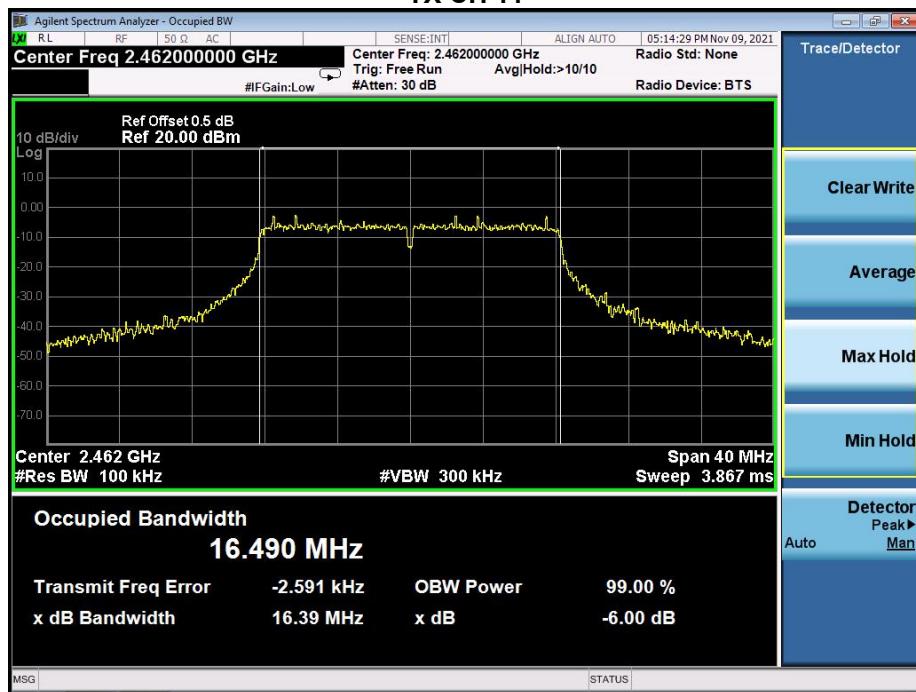
## 10.5 Test Result

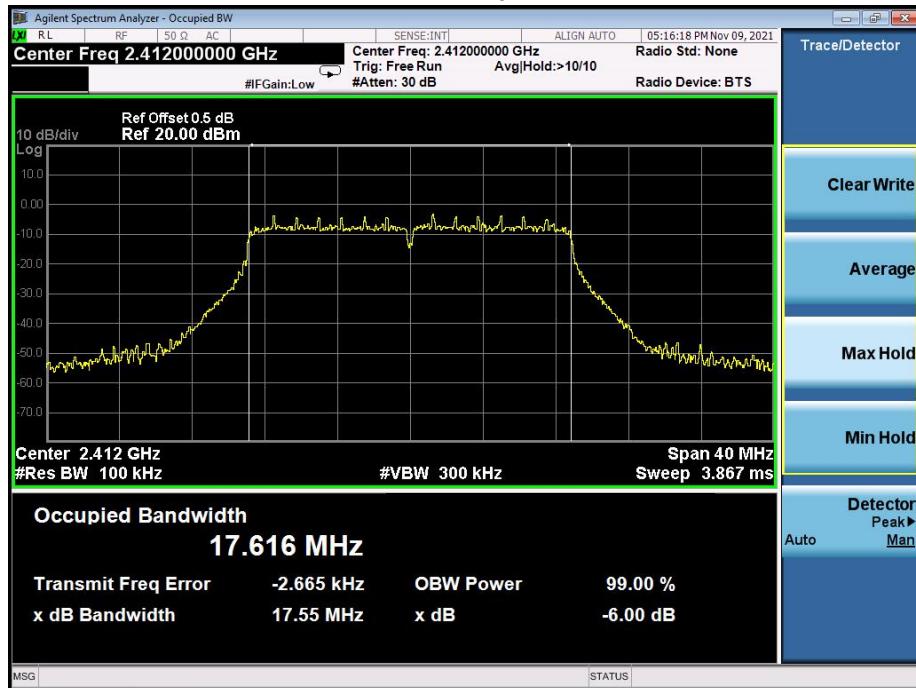
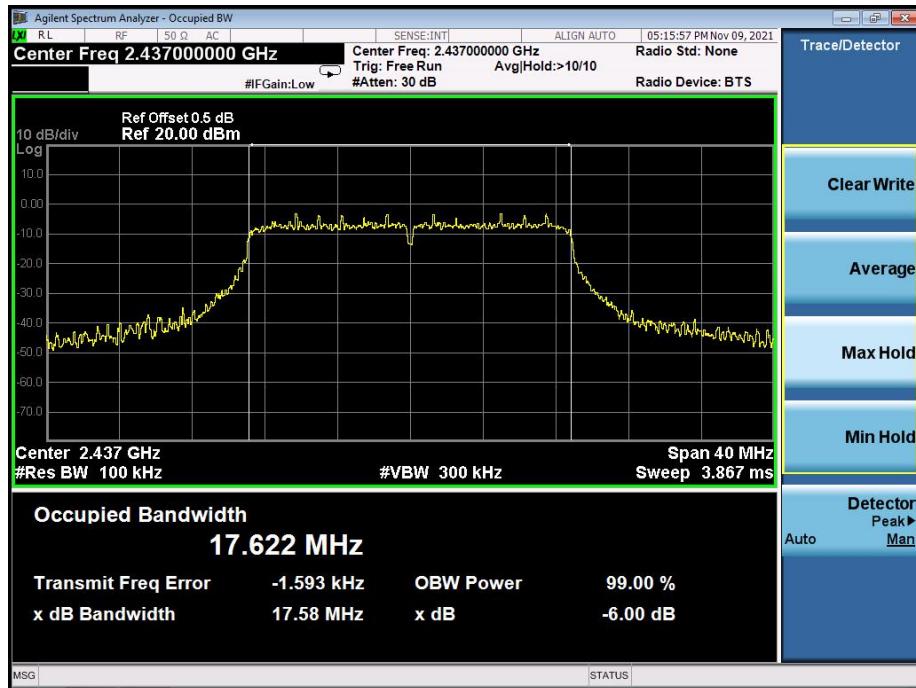
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

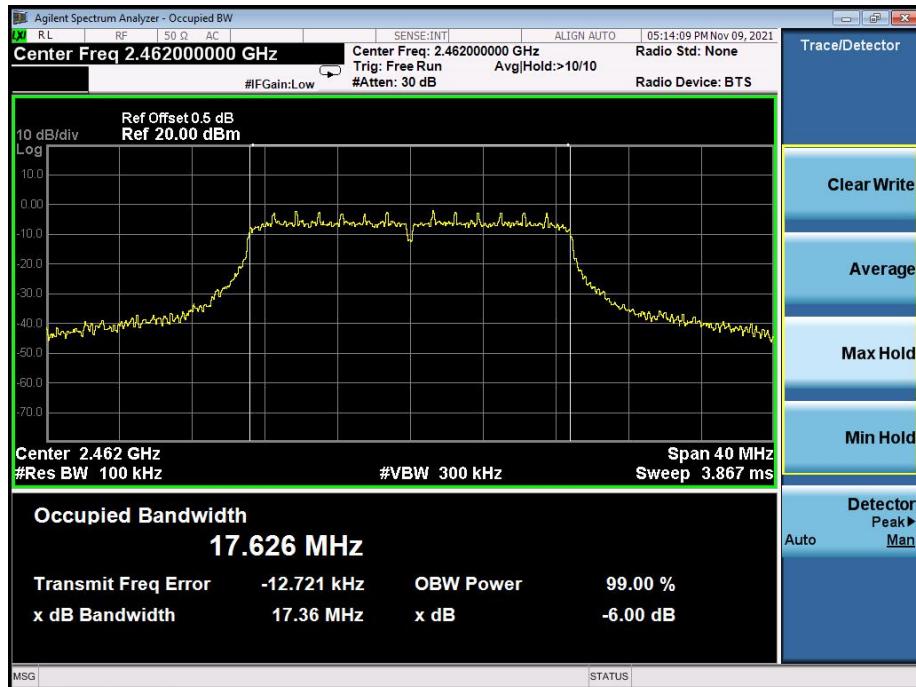
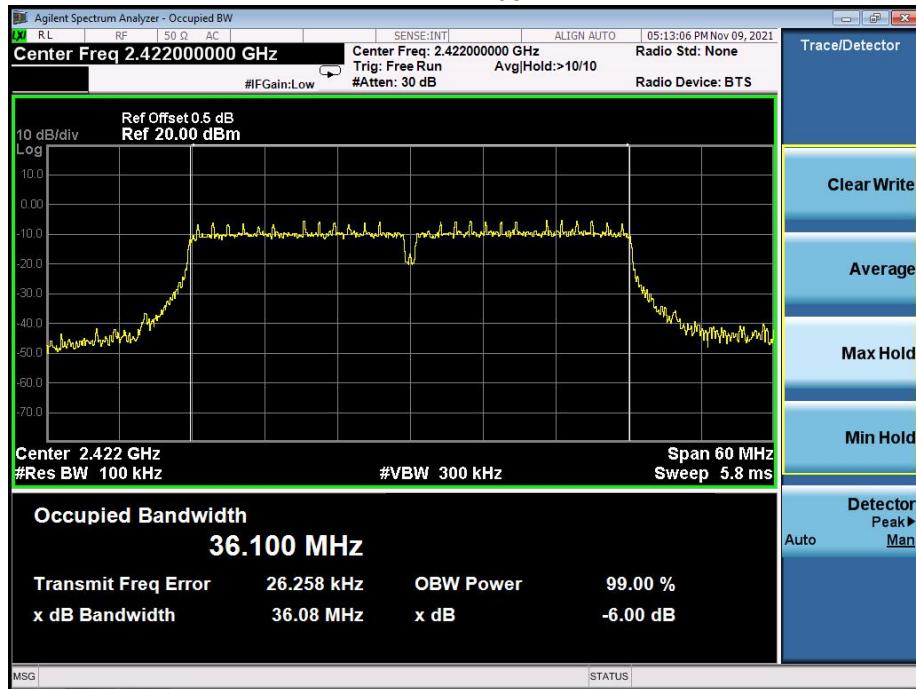
Test Mode	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
TX b Mode	2412	8.60	500	Pass
	2437	8.12	500	Pass
	2462	8.12	500	Pass
TX g Mode	2412	16.37	500	Pass
	2437	16.35	500	Pass
	2462	16.39	500	Pass
TX n Mode(20M)	2412	17.55	500	Pass
	2437	17.58	500	Pass
	2462	17.36	500	Pass
TX n Mode(40M)	2422	36.08	500	Pass
	2437	35.81	500	Pass
	2452	36.06	500	Pass

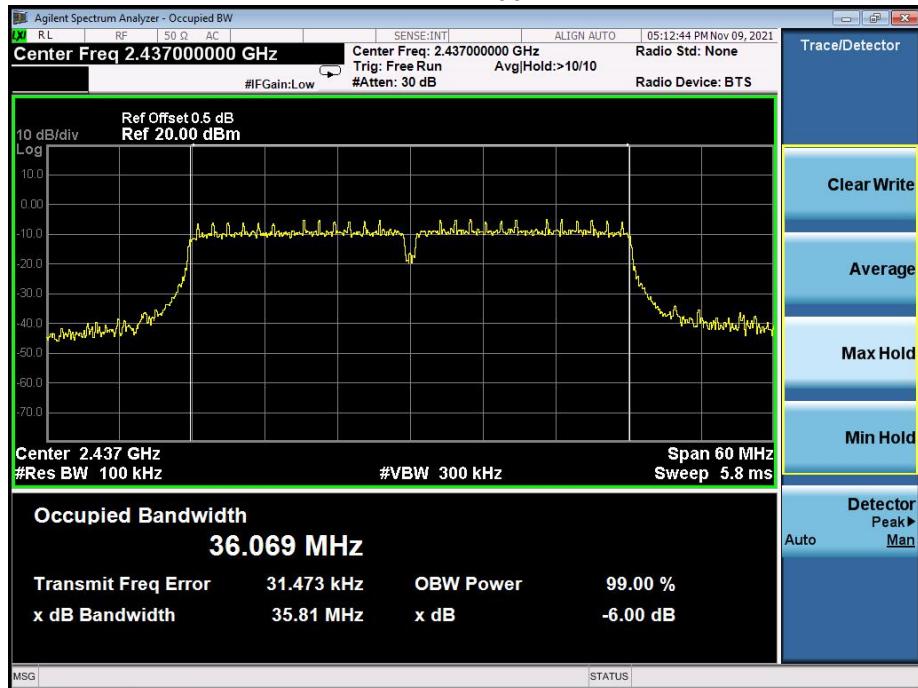
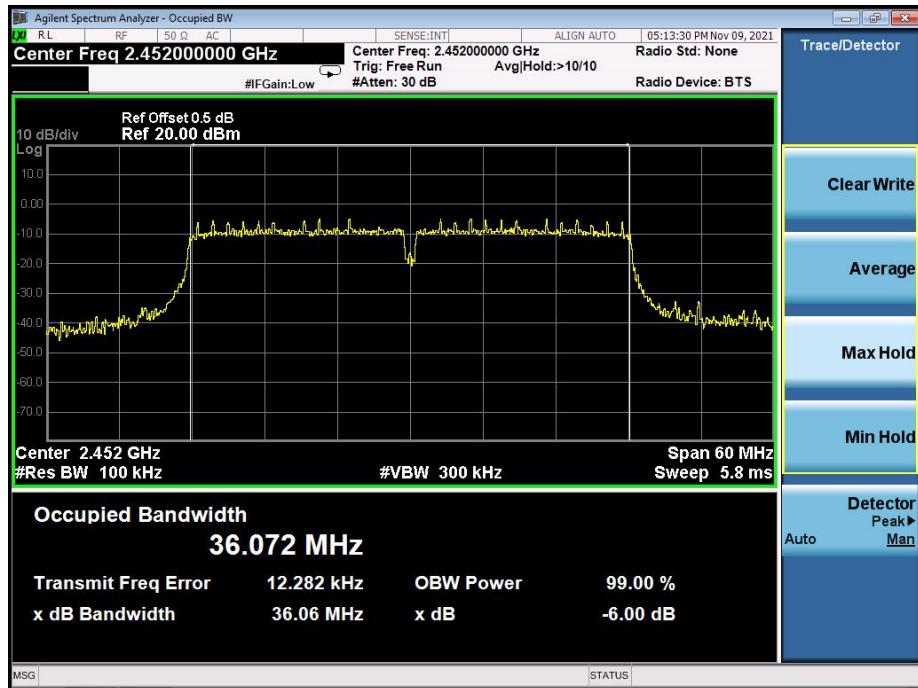
**TX CH 01**

**TX CH 06**


**TX CH 11**

**TX CH 01**


**TX CH 06**

**TX CH 11**


**TX CH 01**

**TX CH 06**


**TX CH 11**

**TX CH 03**


**TX CH 06**

**TX CH 09**


## 11. Peak Output Power Test

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 11.3 Test Procedure

- The EUT was directly connected to the Power meter

### 11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

## 11.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Test Mode	Frequency(MHz)	Maximum Conducted Output Power(PK) ANTA(dBm)	LIMIT (dBm)
802.11b	2412	13.562	30
	2437	13.355	30
	2462	13.939	30
802.11g	2412	12.144	30
	2437	12.280	30
	2462	12.584	30
802.11n20	2412	11.018	30
	2437	11.710	30
	2462	12.286	30
802.11n40	2422	9.079	30
	2437	9.403	30
	2452	9.489	30

## 12. 100 kHz Bandwidth Of Frequency Band Edge

### 12.1 Block Diagram Of Test Setup



### 12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 12.3 Test Procedure

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize..

### 12.4 EUT Operating Conditions

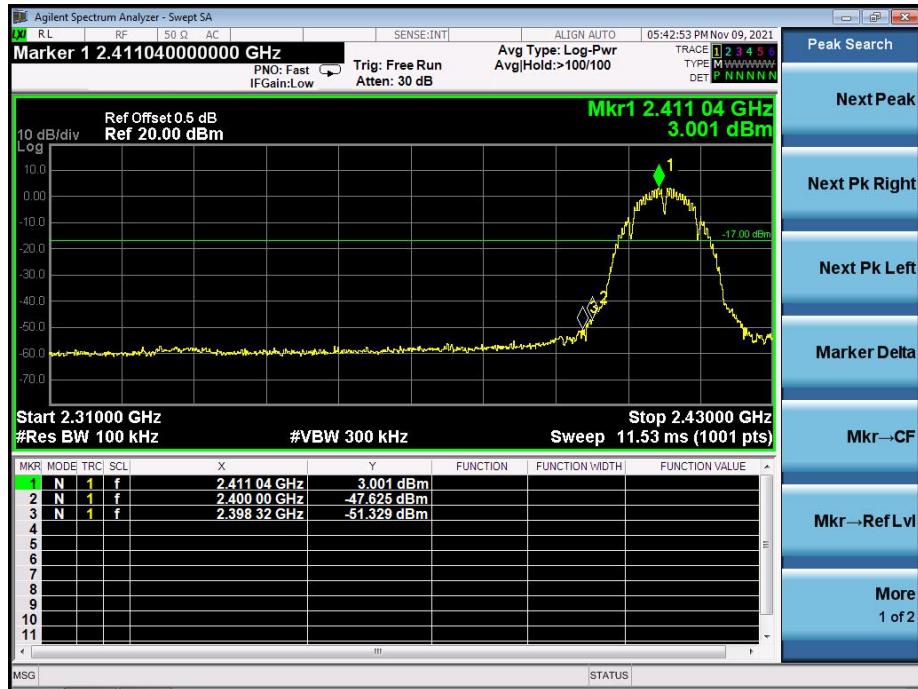
The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

## 12.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	AC120V/60Hz

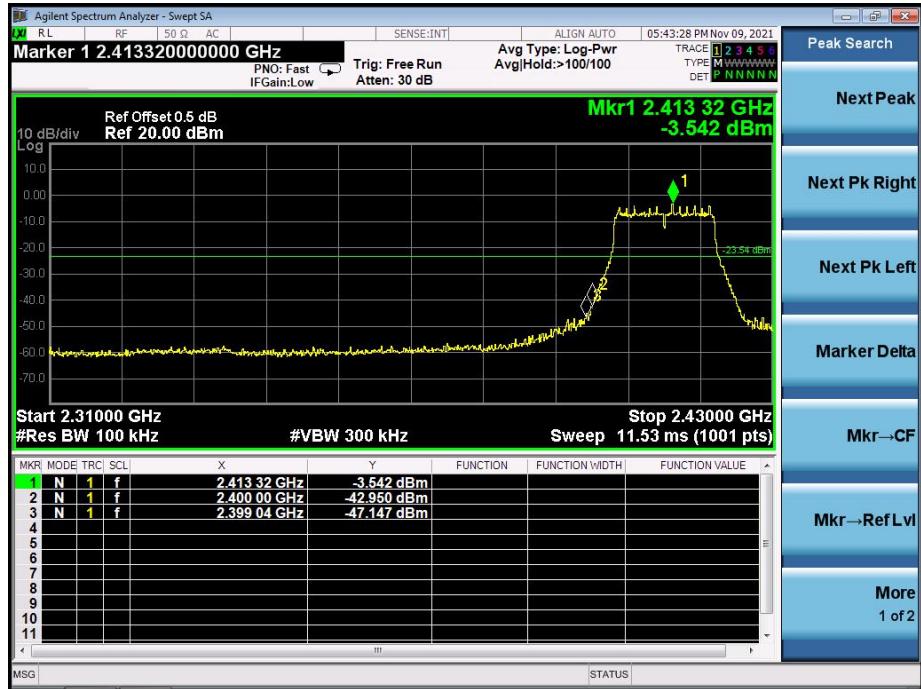
802.11b: Band Edge, Left Side



802.11b: Band Edge, Right Side



## 802.11g: Band Edge, Left Side



## 802.11g: Band Edge, Right Side

