



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2018-07-06

中国认可
国际互认
检测
TESTING
CNAS L5785

Test Report

Report No.: CQASZ20241202598E-04
Applicant: Guangzhou Havit Technology Co.,LTD
Address of Applicant: ROOM 1307,13F,PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU, GUANGDONG, China
Equipment Under Test (EUT):
Product: SMART PROJECTOR
Model No.: PJ209A PRO
Teat Model No.: PJ209A PRO
Brand Name: HAVIT
FCC ID: 2AI6I-PJ209APRO
Standards: 47 CFR Part 15, Subpart E
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Date of Receipt: 2024-12-06
Date of Test: 2024-12-06 to 2024-12-17
Date of Issue: 2024-12-27
Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above.

Tested By: Lewis Zhou

(Lewis Zhou)

Reviewed By: Timo Lei

(Timo Lei)

Approved By: Jack Ai

(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20241202598E-04	Rev.01	Initial report	2024-12-27

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013; KDB789033	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.207	ANSI C63.10-2013; KDB789033	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.407 (a)	ANSI C63.10-2013; KDB789033	PASS
Emission Bandwidth	47 CFR Part 15 Subpart C Section 15.407 (a)(e)	ANSI C63.10-2013; KDB789033	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	ANSI C63.10-2013; KDB789033	PASS
Band Edge Measurements	47 CFR Part 15 Subpart C Section 15.209 &15.407(b)	ANSI C63.10-2013; KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	ANSI C63.10-2013; KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	ANSI C63.10-2013; KDB789033	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application


3 Content

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENT	4
4 TEST REQUIREMENT	5
4.1 TEST SETUP	5
4.1.1 For Conducted test setup	5
4.1.2 For Radiated Emissions test setup	5
4.1.3 For Conducted Emissions test setup	6
4.2 TEST ENVIRONMENT	6
4.3 TEST CONDITION	7
5 GENERAL INFORMATION	9
5.1 CLIENT INFORMATION	9
5.2 GENERAL DESCRIPTION OF EUT	9
5.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	10
5.4 DESCRIPTION OF SUPPORT UNITS	11
5.5 TEST LOCATION	12
5.6 TEST FACILITY	12
5.7 DEVIATION FROM STANDARDS	12
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	12
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	12
5.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	12
6 EQUIPMENT LIST	13
7 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): Emission Bandwidth	15
Appendix B): Maximum Conduct Output Power	36
Appendix C): Maximum Power Spectral Density	50
Appendix D): Band Edge Measurements	65
7.1.1 Test Result B1/2/3	67
7.1.2 Test Result B4	67
7.1.3 Test Graphs B1/2/3	69
7.1.4 Test Graphs B4	74
Appendix E): Frequency Stability	79
Appendix F): Antenna Requirement	81
Appendix G): Operation in the absence of information to the transmit	82
Appendix H): AC Power Line Conducted Emission	83
Appendix I): Restricted bands around fundamental frequency (Radiated Emission)	86
Appendix J): Radiated Spurious Emissions	92
8 PHOTOGRAPHS - EUT TEST SETUP	99
8.1 RADIATED SPURIOUS EMISSION	99
8.2 CONDUCTED EMISSION	100
9 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	101

4 Test Requirement

4.1 Test setup

4.1.1 For Conducted test setup

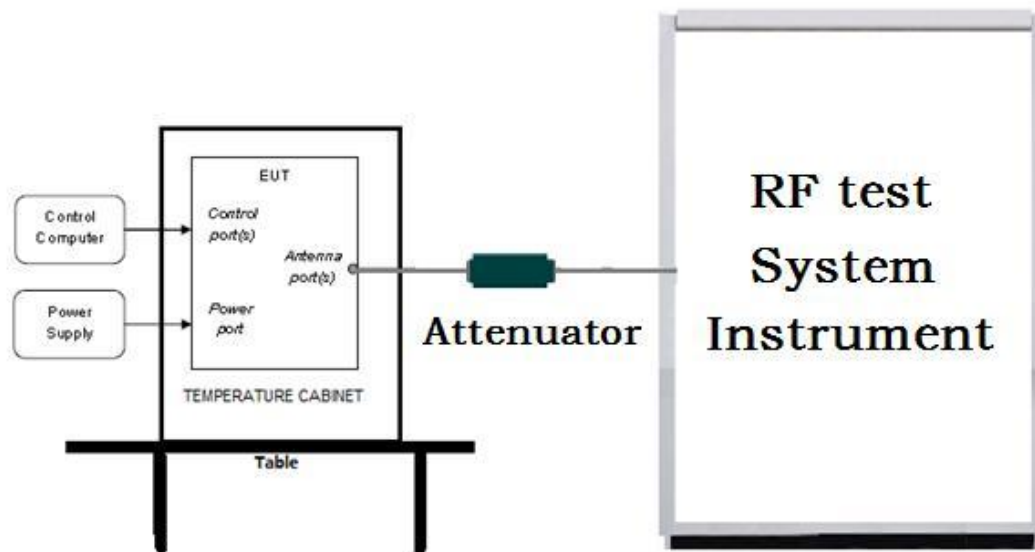

4.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

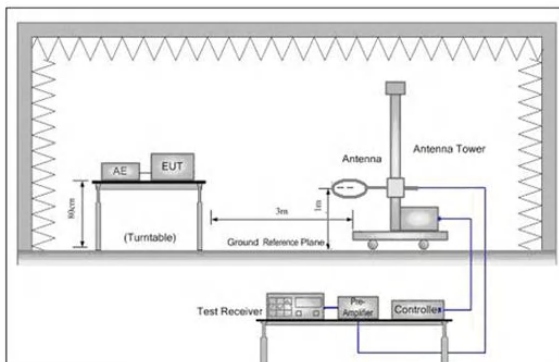


Figure 1. Below 30MHz

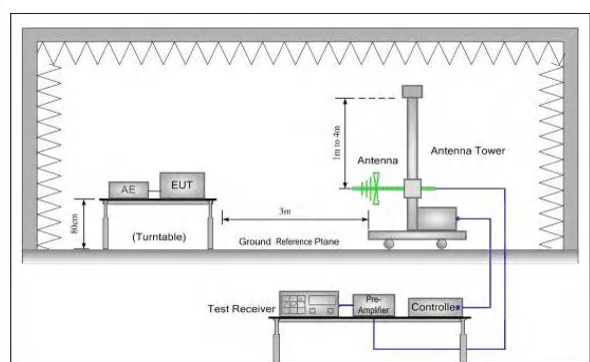


Figure 2. 30MHz to 1GHz


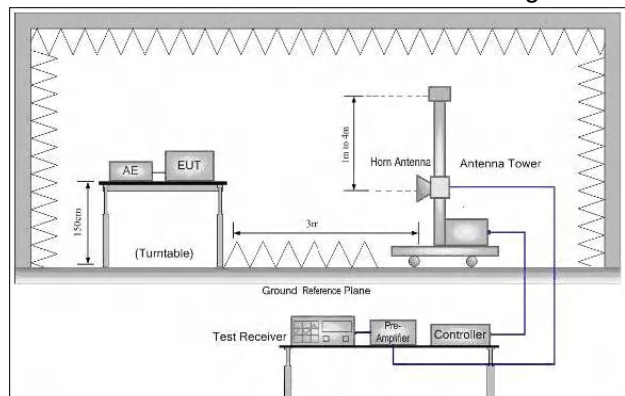


Figure 3. Above 1GHz

4.1.3 For Conducted Emissions test setup

Conducted Emissions setup

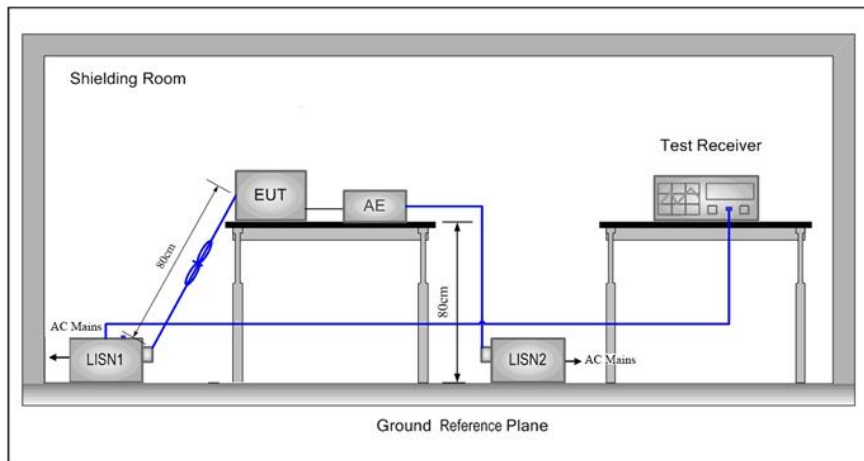

4.2 Test Environment

Operating Environment:		
Conducted Emissions:		
Temperature:	25.6 °C	
Humidity:	60 % RH	
Atmospheric Pressure:	1009 mbar	
Radiated Emissions:		
Temperature:	25.5 °C	
Humidity:	54 % RH	
Atmospheric Pressure:	1009mbar	
Radio conducted item test (RF Conducted test room):		
Temperature:	25.3 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1009 mbar	
Test Condition	Temperature (°C)	Voltage (V)
TN/VN	+15 to +35	7.6
TL/VL	0	6.84
TH/VL	50	6.84
TL/VH	0	8.36
TH/VH	50	8.36
Remark:		
1)The EUT just work in such extreme temperature of 0 °C to 50 °C and the extreme voltage of 6.84V to 8.36V, so here the EUT is tested in the temperature of 0 °C to 50 °C and the voltage of 6.84V to 8.36V.		
2)VN: Normal Voltage; TN: Normal Temperature;		
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;		
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.		

4.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac(40M)	5150MHz ~5250 MHz	Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11ac(80M)	5150MHz ~5250 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac(20M)	5725MHz ~5850 MHz	Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac(40M)	5725MHz ~5850 MHz	Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11ac(80M)	5725MHz ~5850 MHz	N/A	Channel 155	N/A
		N/A	5775MHz	N/A

Pre-scan under all rate at lowest channel for Ant1

Page:8 of 101

5 General Information

5.1 Client Information

Applicant:	Guangzhou Havit Technology Co.,LTD
Address of Applicant:	ROOM 1307,13F,PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU, GUANGDONG, China
Manufacturer:	Guangzhou Havit Technology Co.,LTD
Address of Manufacturer:	ROOM 1307,13F,PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU, GUANGDONG, China
Factory:	Guangzhou Havit Technology Co.,LTD
Address of Factory:	ROOM 1307,13F,PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU, GUANGDONG, China

5.2 General Description of EUT

Product Name:	SMART PROJECTOR
Model No.:	PJ209A PRO
Test Model No.:	PJ209A PRO
Trade Mark:	HAVIT
Software Version:	V1.0
Hardware Version:	V1.0
EUT Power Supply:	Power supply AC120V
EUT Supports Radios application:	5GHz: Wi-Fi: U-NII-1: 5.15-5.25GHz; U-NII-3: 5.725-5.850GHz
EUT Type:	Client devices

5.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250 MHz IEEE802.11n/ac(40M): 5150MHz ~5250 MHz IEEE802.11ac(80M): 5150MHz ~5250 MHz IEEE 802.11a/n/ac(20M): 5725MHz ~5850 MHz IEEE802.11n/ac(40M): 5725MHz ~5850 MHz IEEE802.11ac(80M): 5725MHz ~5850 MHz
Channel Numbers:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Type of Modulation:	OFDM
Sample Type:	☒ Mobile ☐ Portable
Test Software of EUT:	RF Test
Antenna Type:	FPC antenna
Antenna gain:	2.82dBi@5GHz: Wi-Fi: U-NII-1, 4.63dBi@5GHz: Wi-Fi: U-NII-3
Cable loss:	1.0 dB

Operation Frequency each of channel

For 802.11a/n/ac(20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac(20M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
For 802.11n/ac(40M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

For 802.11ac(80M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
42	5210MHz	NA	NA
For 802.11ac(80M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
155	5775MHz	NA	NA

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Certification	Supplied by

5.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

5.6 Test Facility

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

5.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	3×10^{-8}
2	RF power, conducted	0.86dB
3	Radiated Spurious emission test	5.12dB (Below 1GHz)
		4.6dB (Above 1GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.8°C
6	Humidity test	2.0%
7	DC power voltages	0.5%

6 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU40	CQA-075	2024/9/2	2025/9/1
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2	2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2	2025/9/1
Preamplifier	EMCI	EMC184055SE	CQA-089	2024/9/2	2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2024/9/2	2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2024/9/2	2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2	2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2	2025/9/1
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2024/9/2	2025/9/1
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2024/9/2	2025/9/1
Power meter	R&S	NRVD	CQA-029	2024/9/2	2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2	2025/9/1
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
LISN	R&S	ENV216	CQA-003	2024/9/2	2025/9/1
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2	2025/9/1
DC power	KEYSIGHT	E3631A	CQA-028	2024/9/2	2025/9/1

Test software:

	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

7 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15E	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
4	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

Appendix A): Emission Bandwidth

26dB Emission bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II C 1

6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)


Test Method: KDB 789033 D02 II C 2

Limit: ≥ 500 kHz

Test Procedure:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Test Setup Diagram

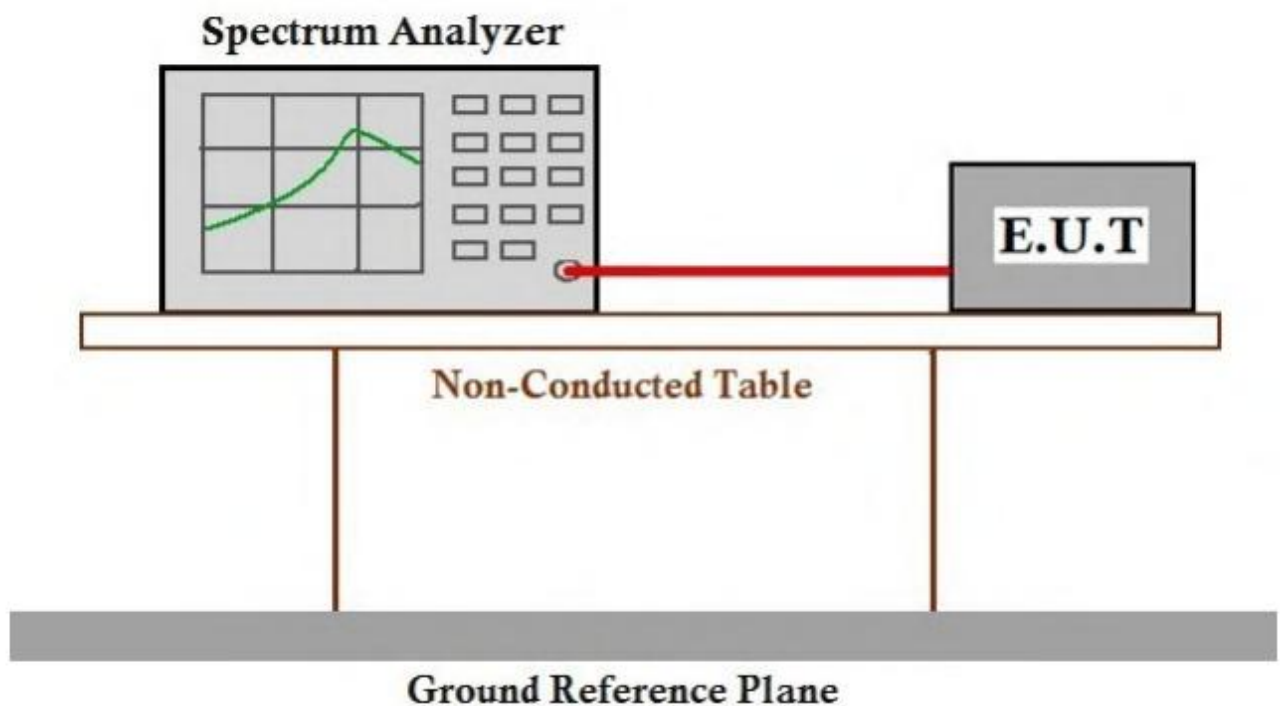


Result Table

TestMode	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	5180	19.40	5170.36	5189.76
	5200	19.32	5190.24	5209.56
	5240	19.36	5230.40	5249.76
	5745	23.12	5731.32	5754.44
	5785	19.20	5775.52	5794.72
	5825	19.64	5815.20	5834.84
11N20SISO	5180	19.40	5170.36	5189.76
	5200	19.28	5194.96	5214.22
	5240	19.36	5230.44	5249.80
	5745	19.28	5735.08	5754.36
	5785	19.12	5775.60	5794.72
	5825	19.64	5815.16	5834.80
11N40SISO	5190	40.24	5169.76	5210.00
	5230	42.32	5208.88	5251.20
	5755	42.72	5732.76	5775.48
	5795	39.12	5775.32	5814.44
11AC20SISO	5180	19.36	5170.40	5189.76
	5200	19.48	5190.12	5209.60
	5240	19.20	5230.48	5249.68
	5745	19.28	5735.08	5754.36
	5785	19.16	5775.56	5794.72
	5825	19.64	5815.12	5834.76
11AC40SISO	5190	40.48	5169.60	5210.08
	5230	41.76	5209.44	5251.20
	5755	42.16	5733.32	5775.48
	5795	39.76	5775.00	5814.76
11AC80SISO	5210	80.16	5170.00	5250.16
	5775	80.48	5734.20	5814.68

TestMode	Freq(MHz)	6db EBW [MHz]	Limit[MHz]	Verdict
11A	5745	16.32	0.5	PASS
	5785	15.08	0.5	PASS
	5825	17.60	0.5	PASS
11N20SISO	5745	16.32	0.5	PASS
	5785	10.12	0.5	PASS
	5825	17.60	0.5	PASS
11N40SISO	5755	26.96	0.5	PASS
	5795	23.84	0.5	PASS
11AC20SISO	5745	16.32	0.5	PASS
	5785	10.12	0.5	PASS
	5825	17.56	0.5	PASS
11AC40SISO	5755	35.75	0.5	PASS
	5795	23.84	0.5	PASS
11AC80SISO	5775	61.28	0.5	PASS


Test Graph

11A_Ant1_5180

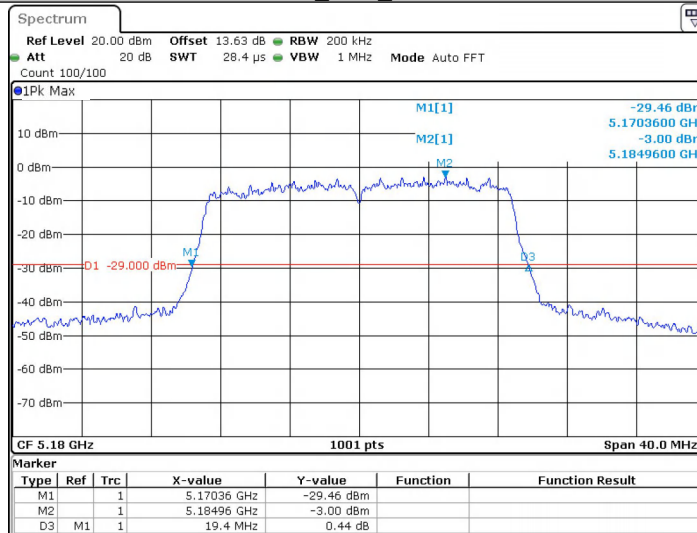


Date: 13 DEC 2024 18:22:11

11A_Ant1_5200

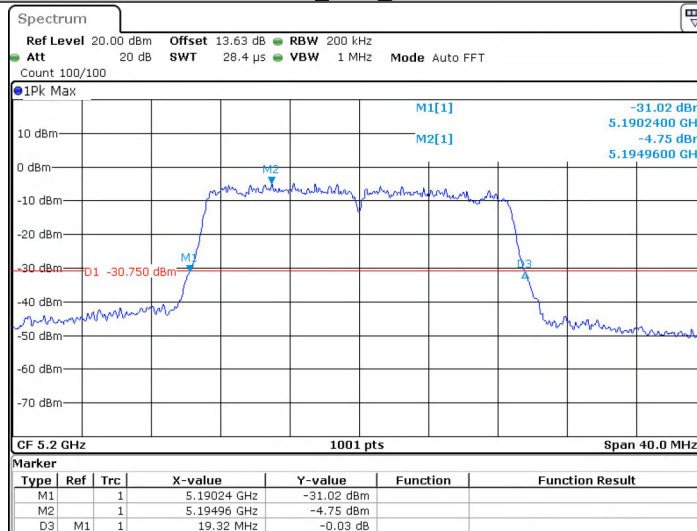


Date: 13 DEC 2024 18:25:17

11A_Ant1_5240

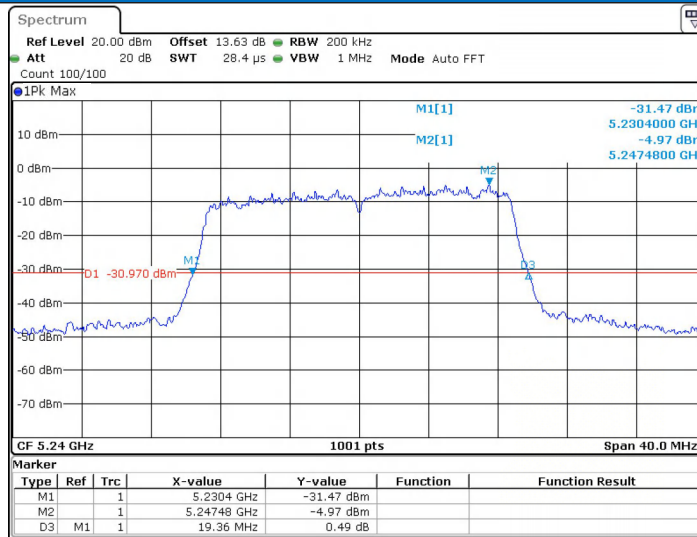


Date: 13 DEC.2024 18:27:05

11A_Ant1_5745

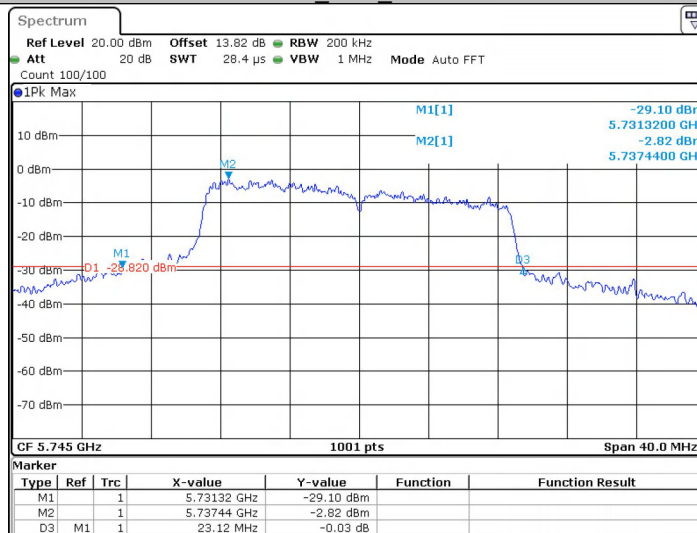


Date: 13 DEC.2024 18:43:54

11A_Ant1_5785

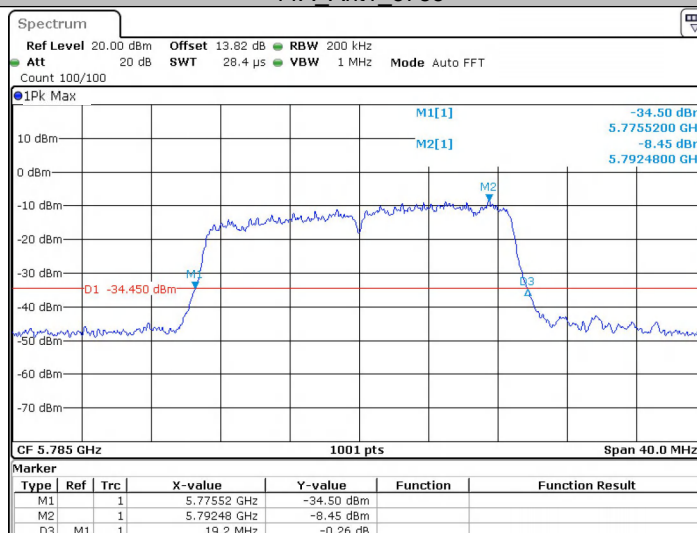


Date: 13 DEC.2024 18:32:33

11A_Ant1_5825

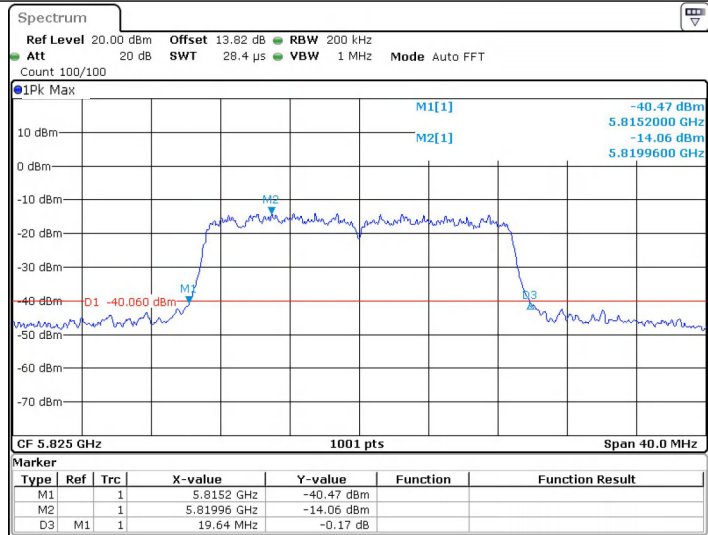


Date: 13 DEC 2024 18:34:31

11N20SISO_Ant1_5180

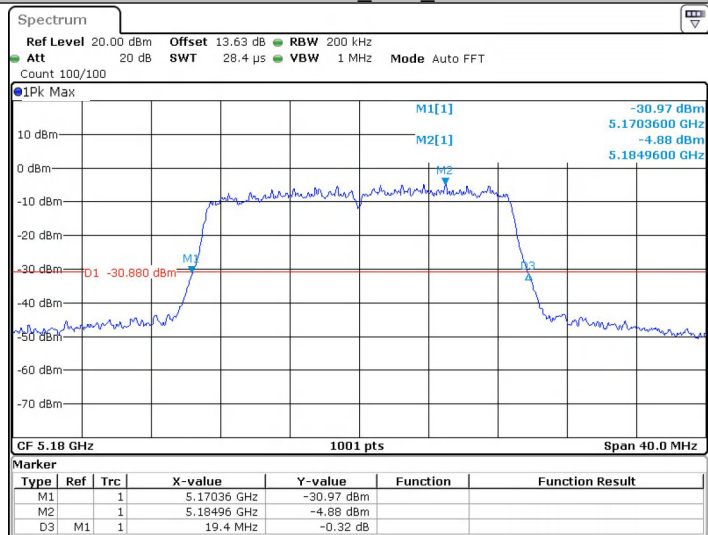


Date: 13 DEC 2024 18:38:30

11N20SISO_Ant1_5200

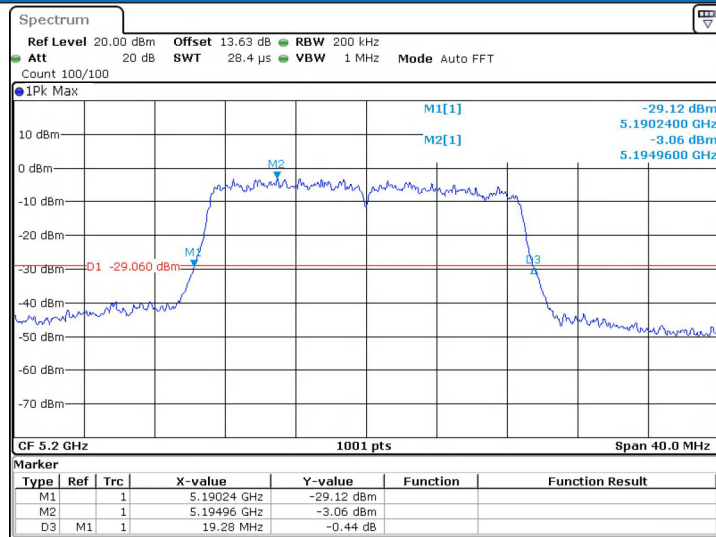


Date: 17.DEC.2024 09:07:46

11N20SISO Ant1_5240

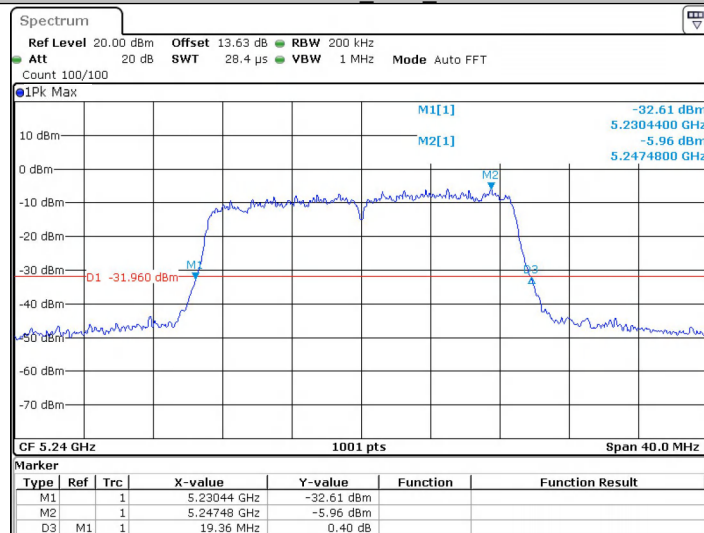


Date: 13.DEC.2024 18:45:15

11N20SISO Ant1_5745

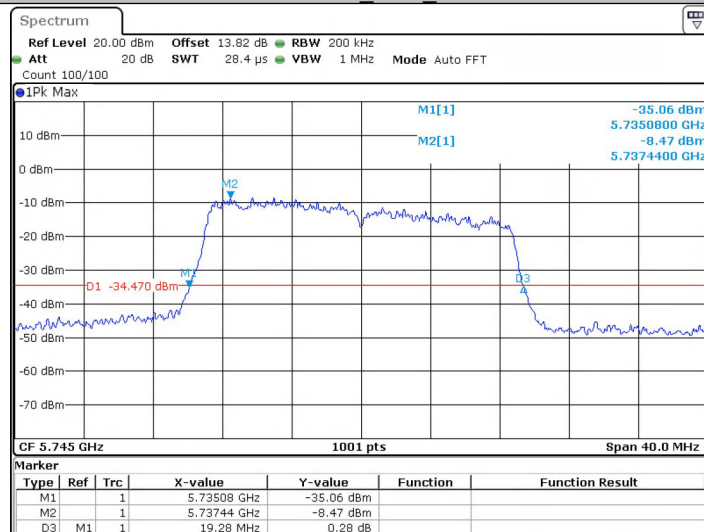


Date: 13.DEC.2024 18:47:45

11N20SISO_Ant1_5785

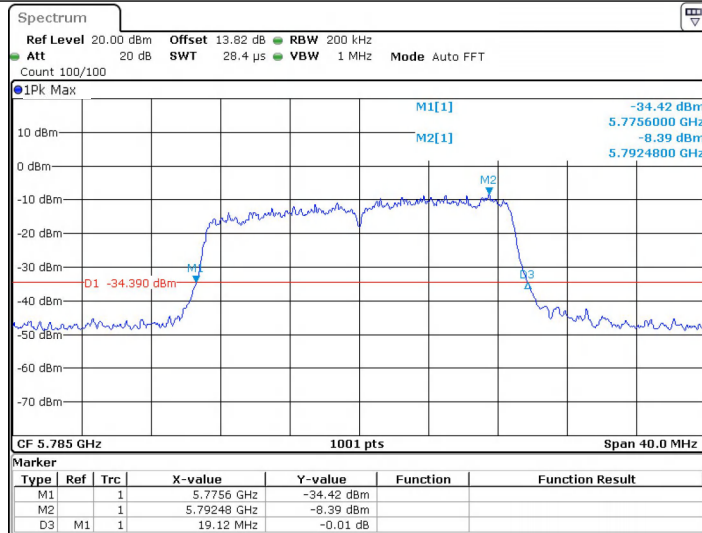


Date: 13 DEC 2024 18:50:52

11N20SISO_Ant1_5825

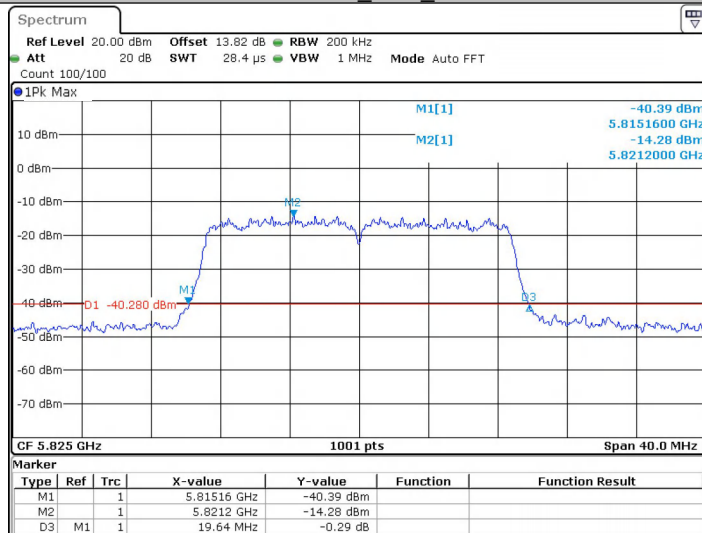


Date: 13 DEC 2024 18:53:00

11N40SISO_Ant1_5190

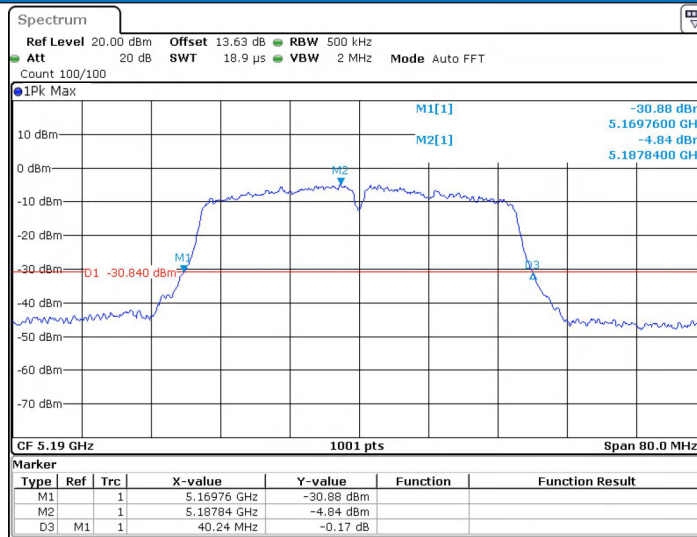


Date: 13 DEC 2024 18:56:23

11N40SISO_Ant1_5230

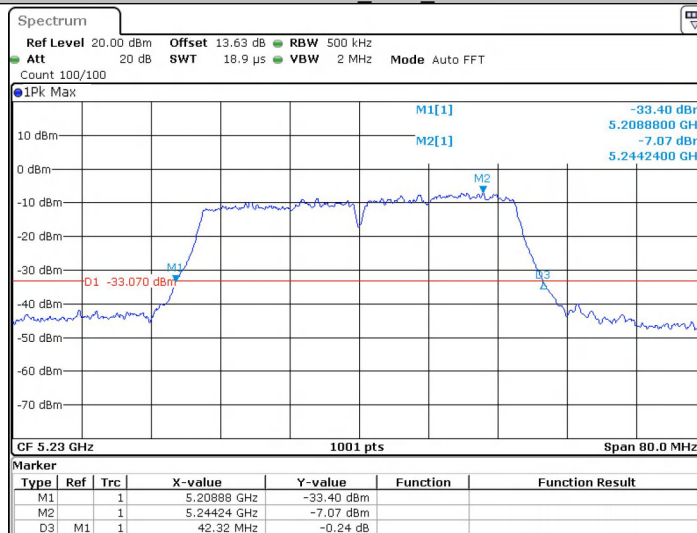


Date: 13 DEC 2024 18:59:46

11N40SISO_Ant1_5755

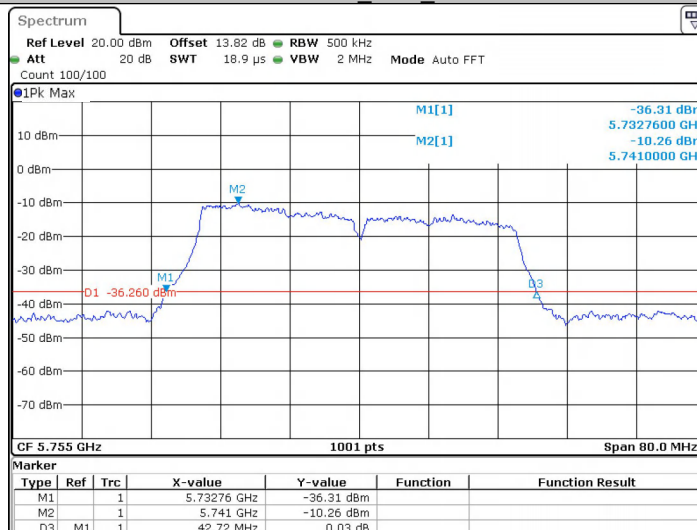


Date: 13 DEC 2024 19:02:29

11N40SISO_Ant1_5795

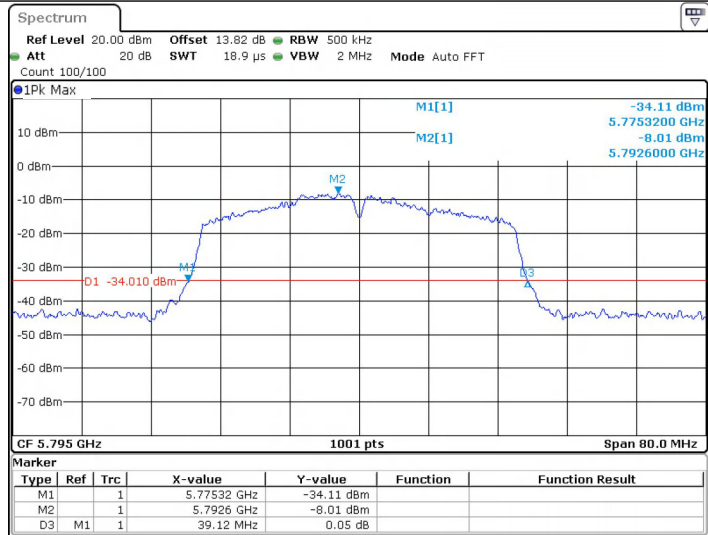


Date: 13 DEC 2024 19:05:48

11AC20SISO_Ant1_5180

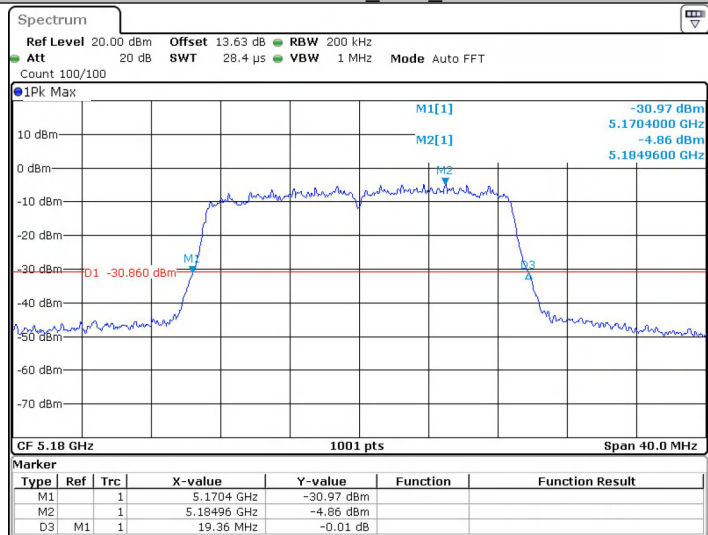


Date: 13 DEC 2024 19:09:15

11AC20SISO_Ant1_5200

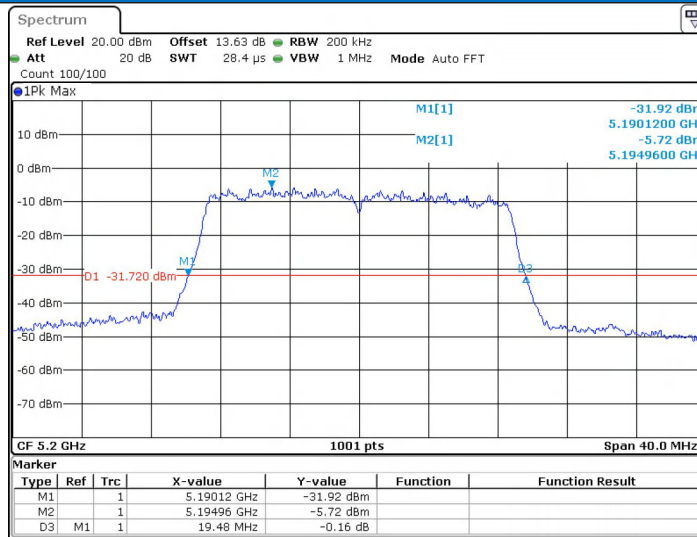


Date: 13.DEC.2024 19:14:27

11AC20SISO_Ant1_5240

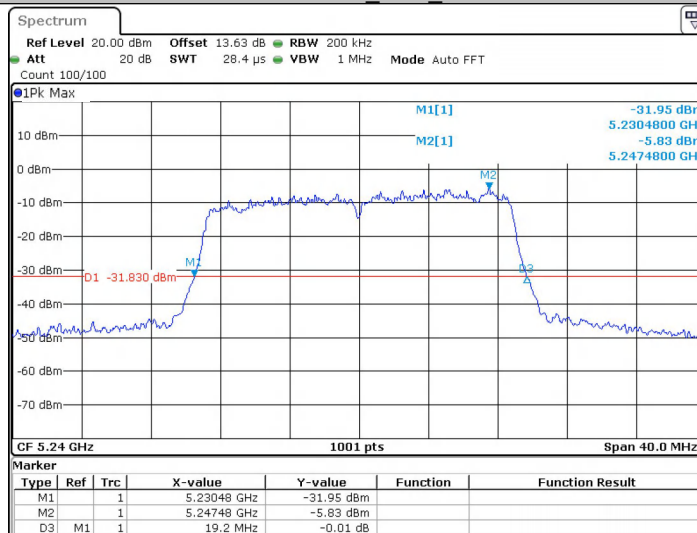


Date: 13.DEC.2024 19:16:04

11AC20SISO_Ant1_5745

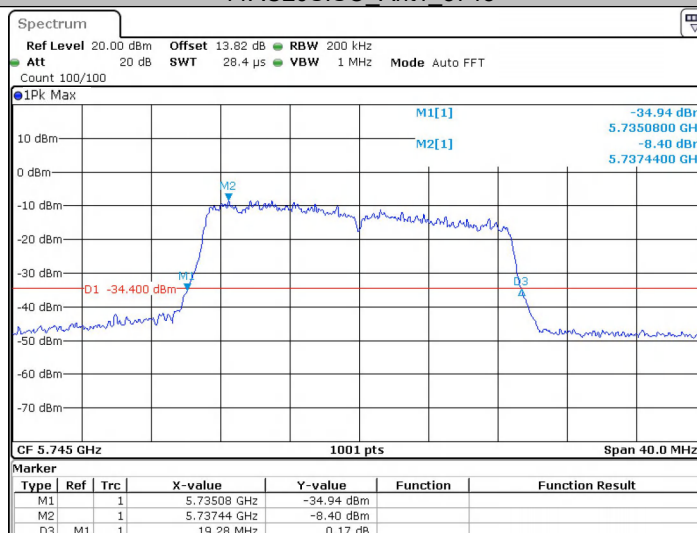


Date: 13.DEC.2024 19:25:20

11AC20SISO_Ant1_5785

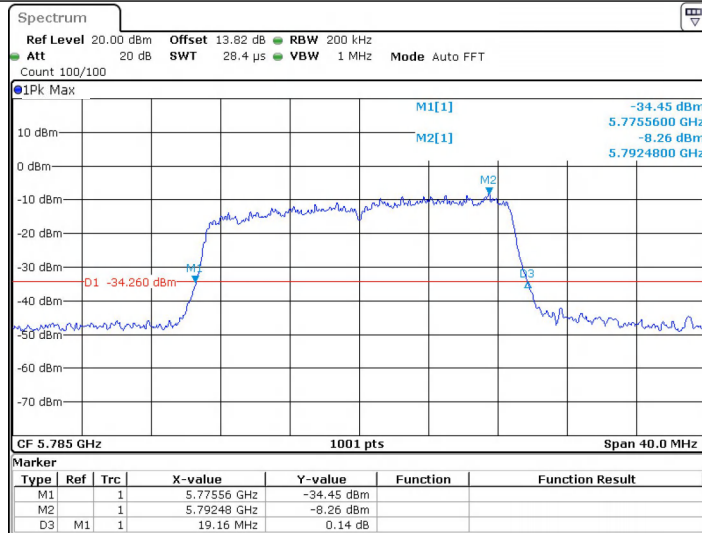


Date: 13 DEC 2024 19:28:46

11AC20SISO_Ant1_5825

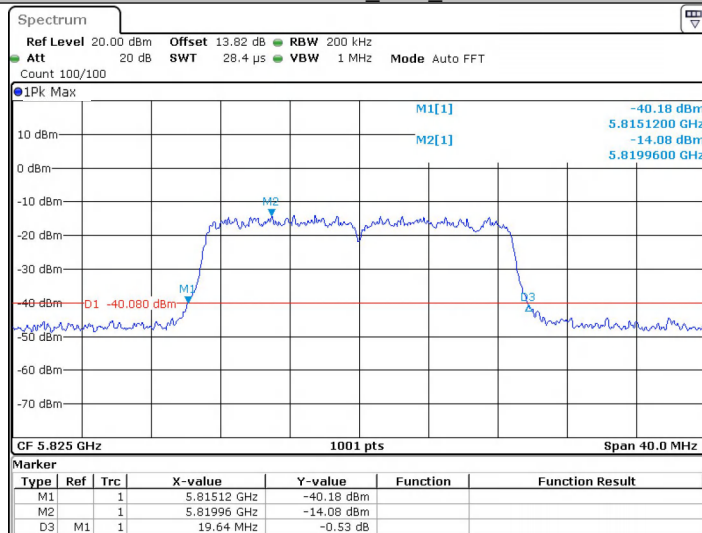


Date: 13 DEC 2024 19:30:29

11AC40SISO_Ant1_5190

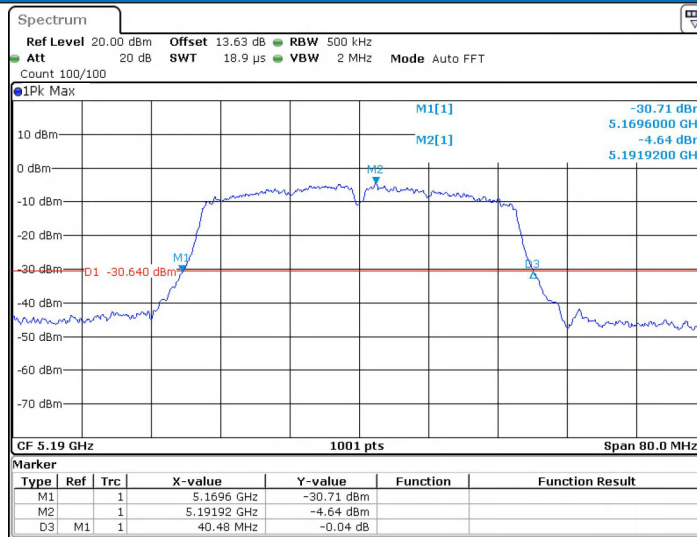


Date: 13 DEC 2024 19:33:45

11AC40SISO_Ant1_5230

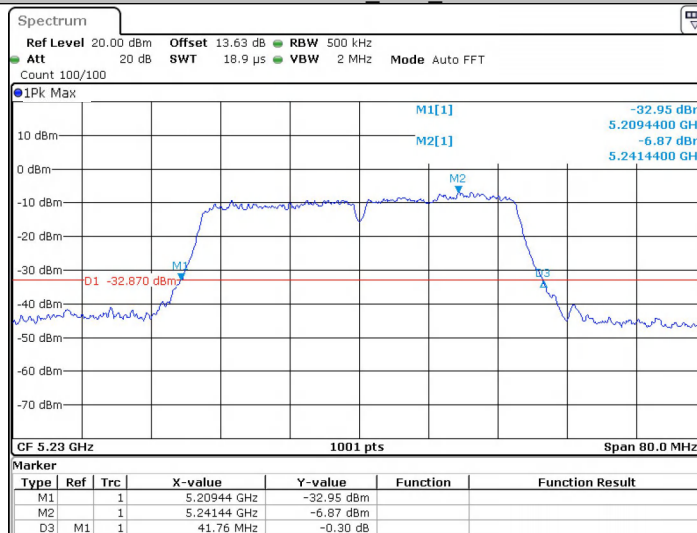


Date: 13 DEC 2024 19:37:39

11AC40SISO_Ant1_5755

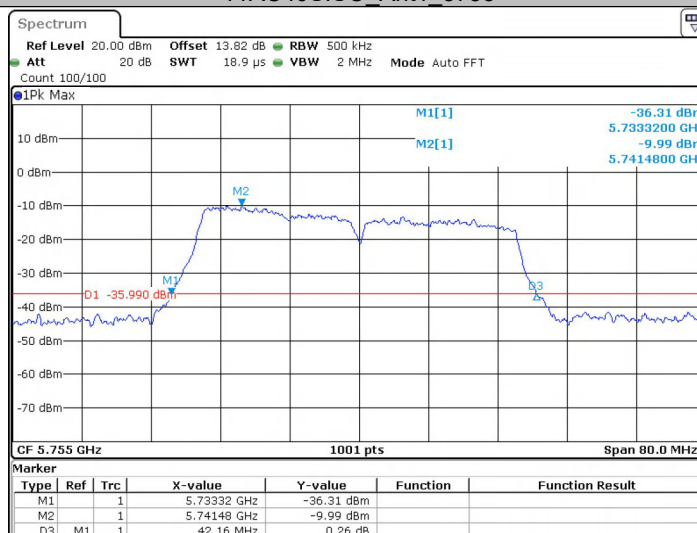


Date: 13 DEC 2024 19:40:02

11AC40SISO_Ant1_5795

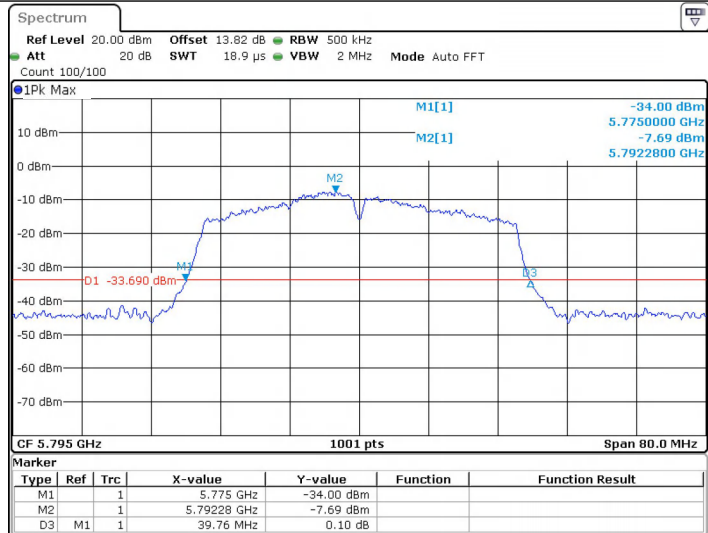


Date: 13 DEC 2024 19:43:05

11AC80SISO_Ant1_5210

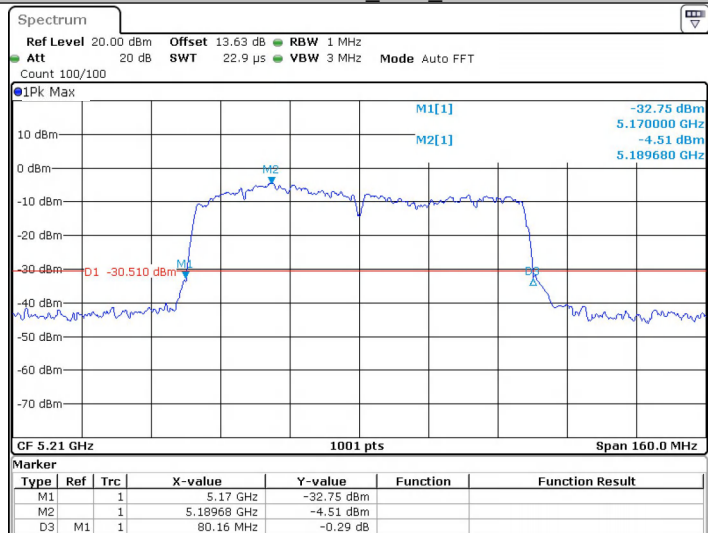


Date: 13 DEC 2024 19:46:07

11AC80SISO_Ant1_5290

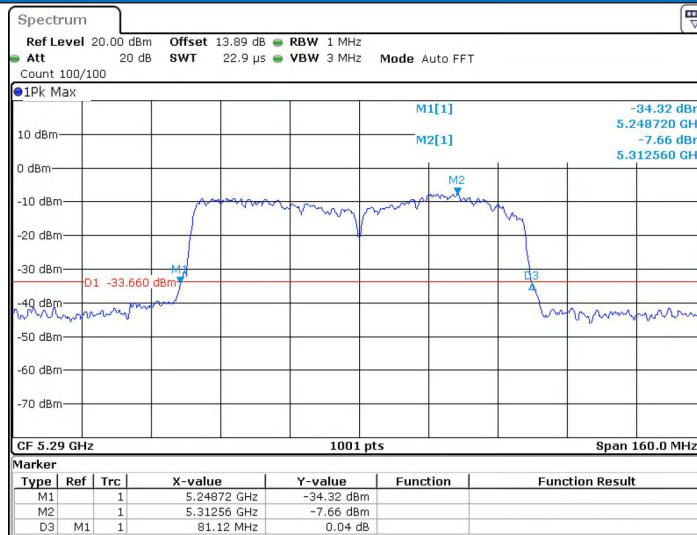


Date: 13.DEC.2024 19:49:40

11AC80SISO_Ant1_5690

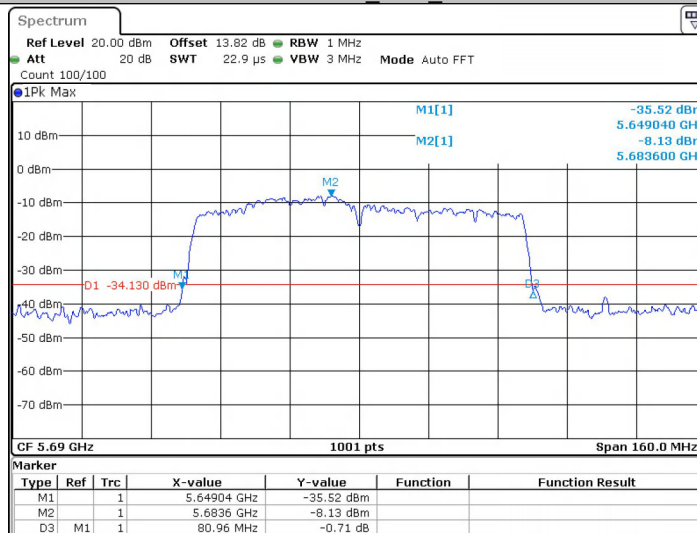


Date: 13.DEC.2024 19:52:52

11AC80SISO_Ant1_5775

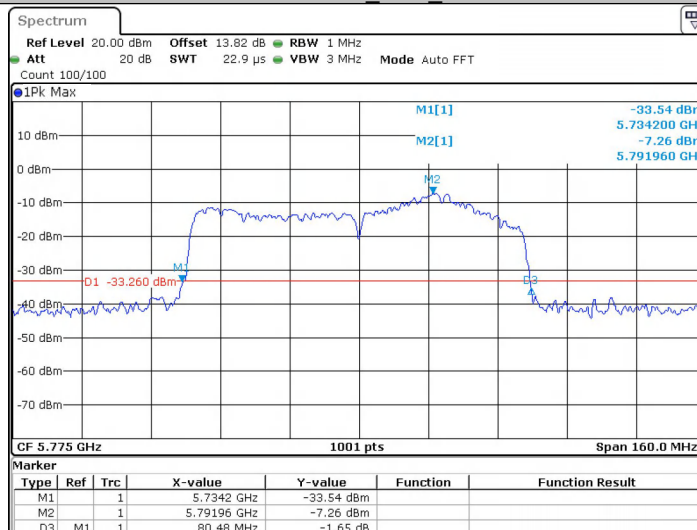


Date: 13.DEC.2024 19:57:16

11A_Ant1_5745

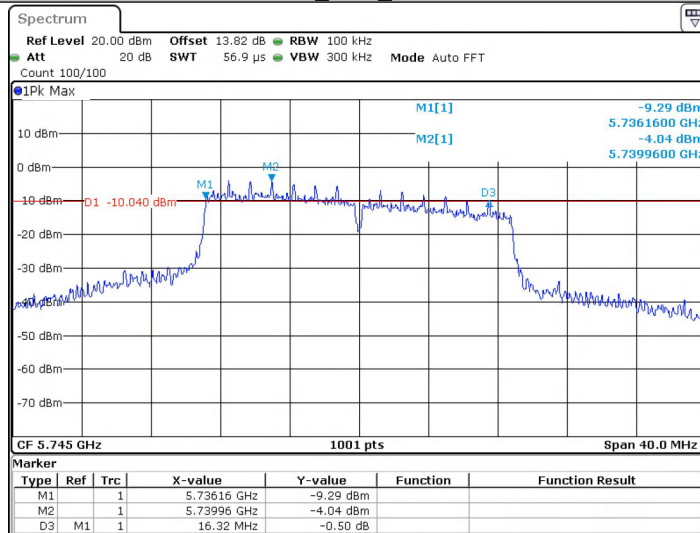


Date: 13 DEC 2024 18:44:01

11A_Ant1_5785

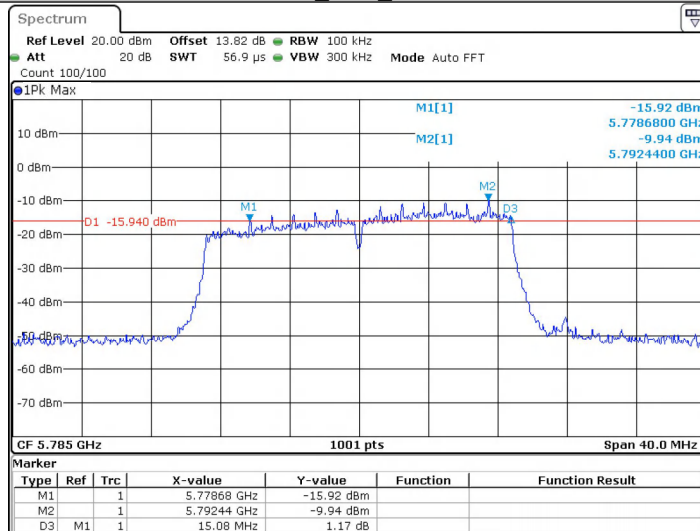


Date: 13 DEC 2024 18:32:40

11A_Ant1_5825

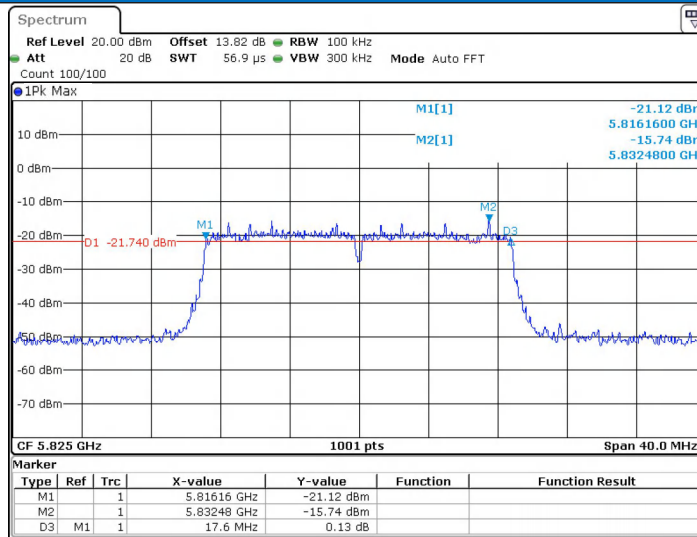


Date: 13 DEC 2024 18:34:39

11N20SISO_Ant1_5745

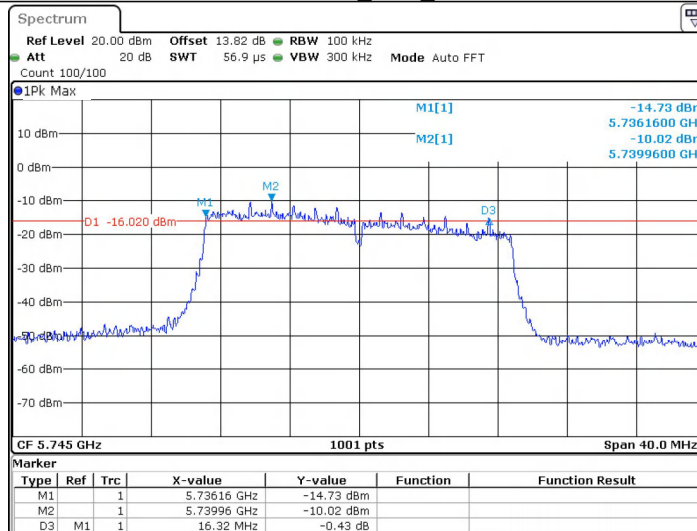


Date: 13 DEC 2024 18:47:52

11N20SISO_Ant1_5785

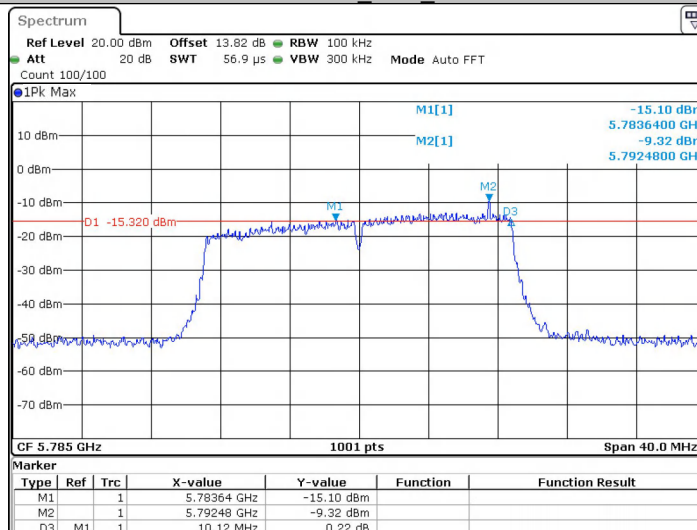


Date: 13 DEC 2024 18:50:59

11N20SISO_Ant1_5825

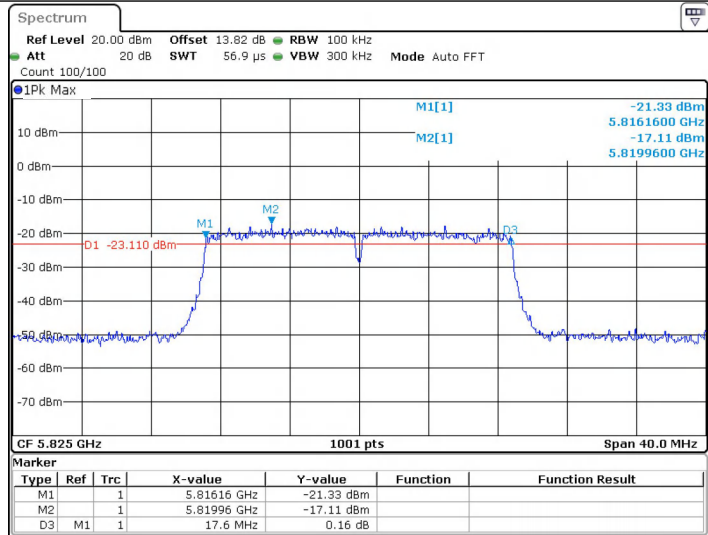


Date: 13 DEC 2024 18:53:08

11N40SISO_Ant1_5755

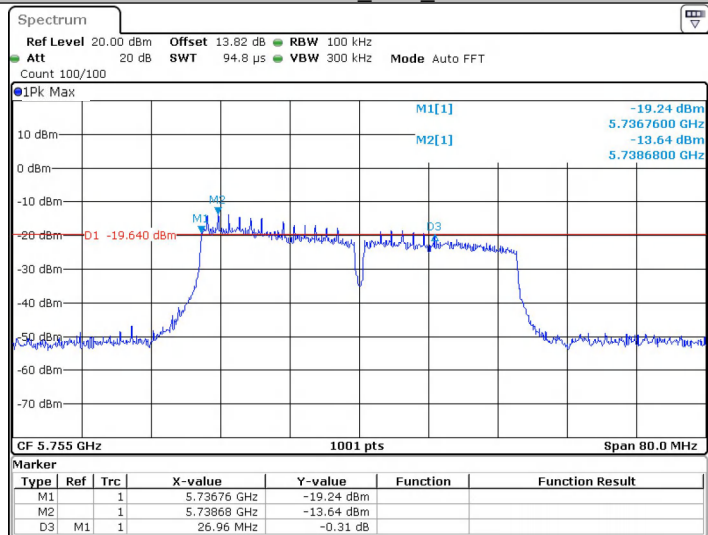


Date: 13 DEC 2024 19:02:37

11N40SISO_Ant1_5795

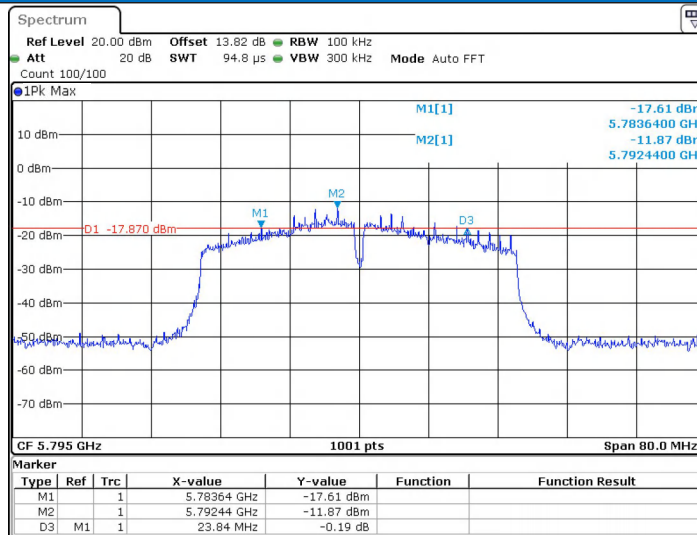


Date: 13 DEC 2024 19:05:55

11AC20SISO_Ant1_5745

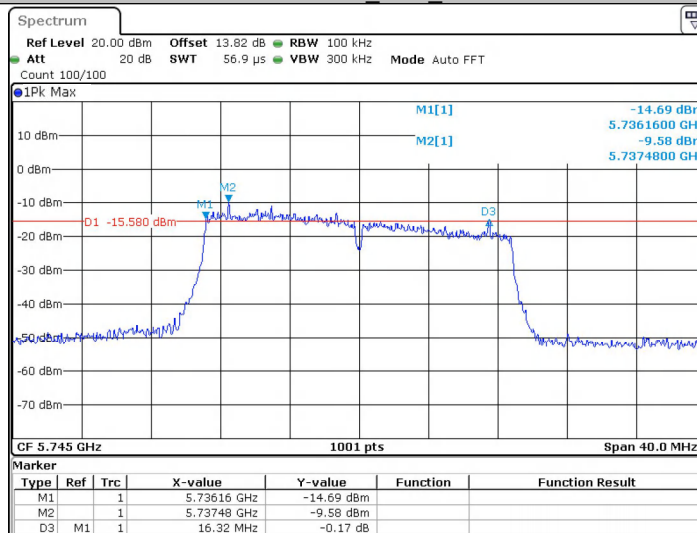


Date: 13 DEC 2024 19:25:27

11AC20SISO_Ant1_5785

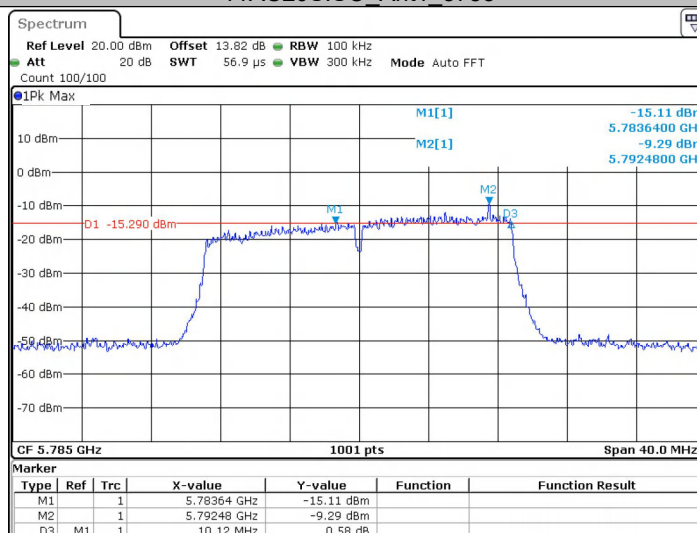


Date: 13 DEC 2024 19:28:54

11AC20SISO_Ant1_5825

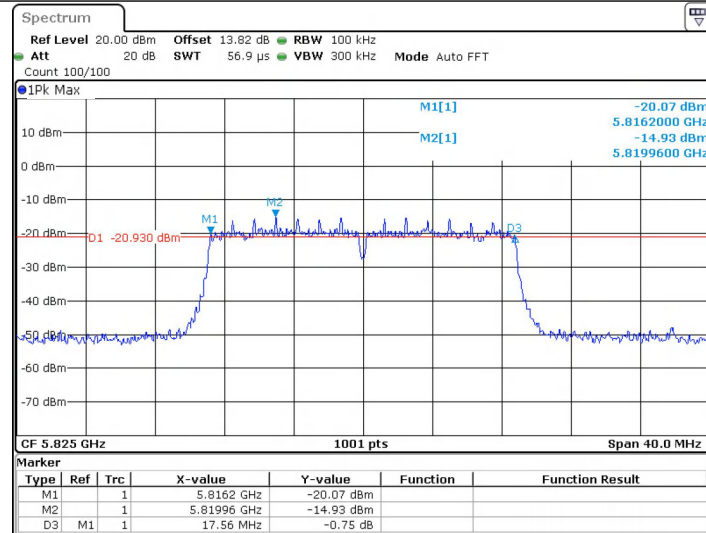


Date: 13 DEC 2024 19:30:37

11AC40SISO_Ant1_5755

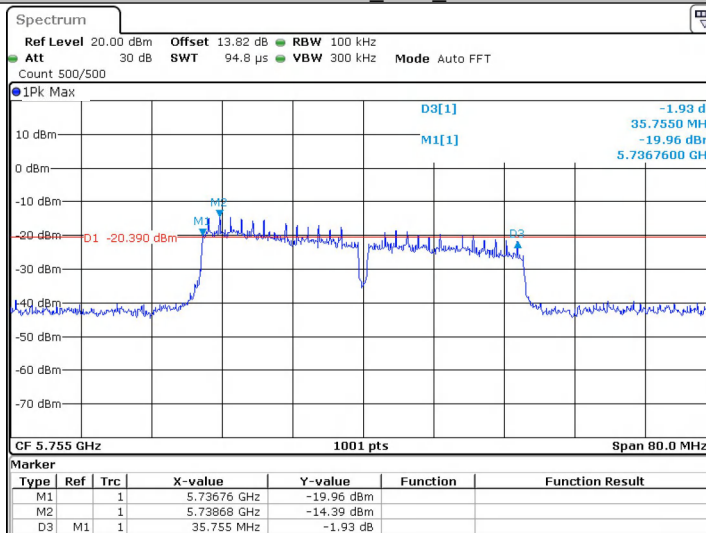


Date: 17 DEC 2024 16:21:29

11AC40SISO_Ant1_5795

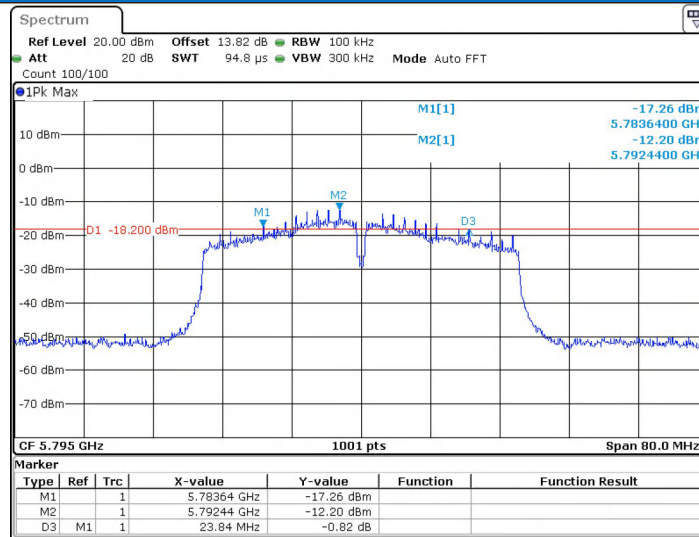

Date: 13 DEC 2024 19:43:13

11AC80SISO_Ant1_5775

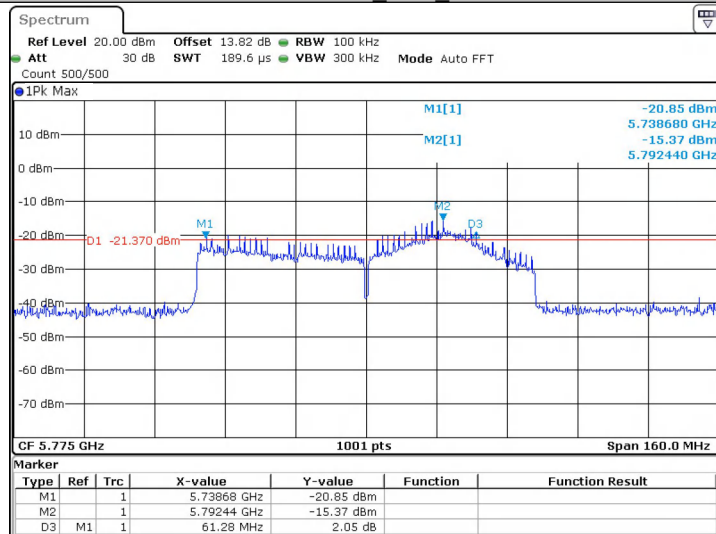

Date: 17 DEC 2024 16:29:42

Appendix B): Maximum Conduct Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:


Frequency band(MHz)	Limit
5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
	$\leq 250\text{mW}(24\text{dBm})$ for client device
5250-5350	$\leq 250\text{mW}(24\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
5470-5725	$\leq 250\text{mW}(24\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
5725-5850	$\leq 1\text{W}(30\text{dBm})$
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Procedure:

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- (1) Set RBW = 1 MHz.
- (2) Set VBW ≥ 3 MHz.
- (3) Detector = power average
- (4) Sweep time = auto.
- (5) Add duty cycle to the measured average power.

Test Setup Diagram

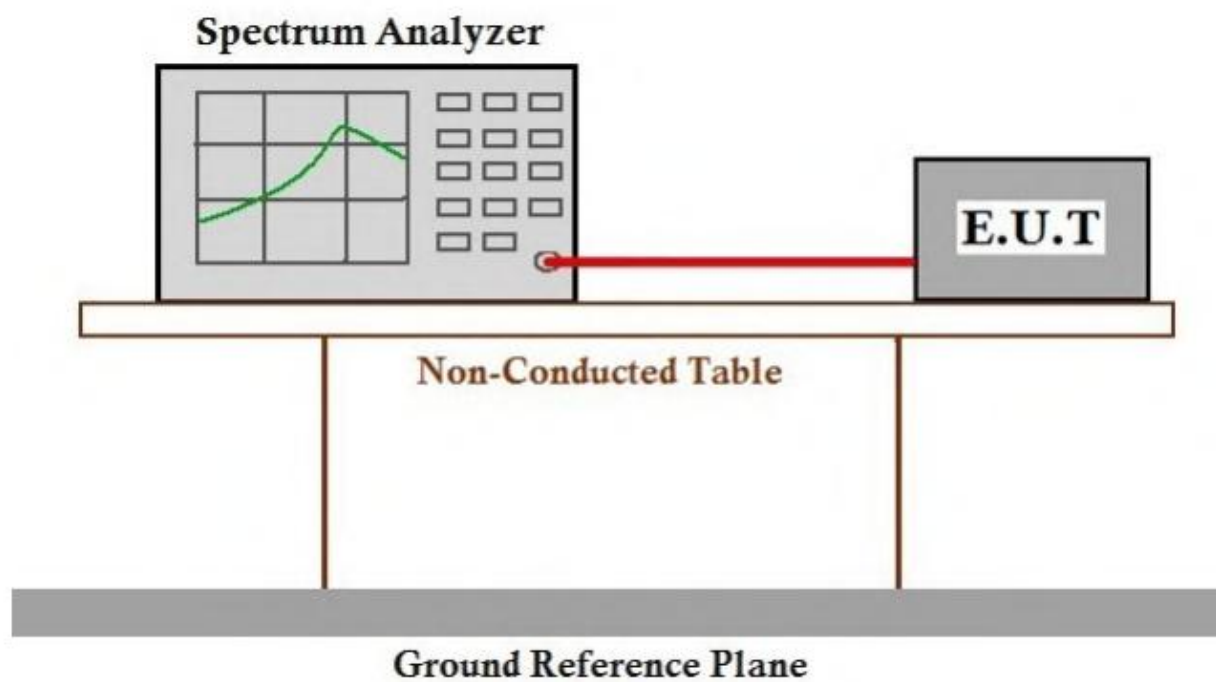


Measurement Data

Test Mode	Antenna	Freq(MHz)	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	6.12	≤23.98	PASS
		5200	5.05	≤23.98	PASS
		5240	4.51	≤23.98	PASS
		5745	0.19	≤30.00	PASS
		5785	0.64	≤30.00	PASS
		5825	-3.63	≤30.00	PASS
11N20SISO	Ant1	5180	4.81	≤23.98	PASS
		5200	7.17	≤23.98	PASS
		5240	3.69	≤23.98	PASS
		5745	0.33	≤30.00	PASS
		5785	0.60	≤30.00	PASS
		5825	-3.91	≤30.00	PASS
11N40SISO	Ant1	5190	4.13	≤23.98	PASS
		5230	2.12	≤23.98	PASS
		5755	-1.78	≤30.00	PASS
		5795	0.02	≤30.00	PASS
11AC20SISO	Ant1	5180	4.87	≤23.98	PASS
		5200	4.25	≤23.98	PASS
		5240	3.74	≤23.98	PASS
		5745	0.43	≤30.00	PASS
		5785	0.72	≤30.00	PASS
		5825	-3.78	≤30.00	PASS
11AC40SISO	Ant1	5190	4.32	≤23.98	PASS
		5230	2.35	≤23.98	PASS
		5755	-1.51	≤30.00	PASS
		5795	0.26	≤30.00	PASS
11AC80SISO	Ant1	5210	3.41	≤23.98	PASS
		5775	-0.46	≤30.00	PASS

Note: The Duty Cycle Factor is compensated in the graph.

11A_Ant1_5180

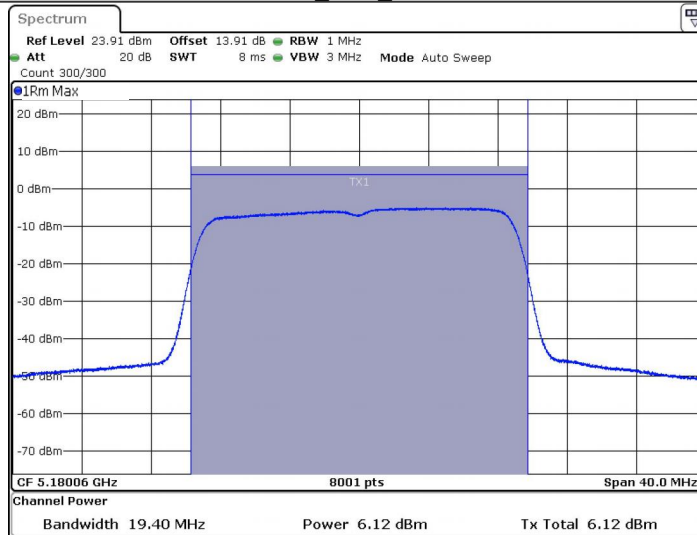


Date: 13.DEC.2024 18:22:54

11A_Ant1_5200




Date: 13.DEC.2024 18:26:00

11A_Ant1_5240

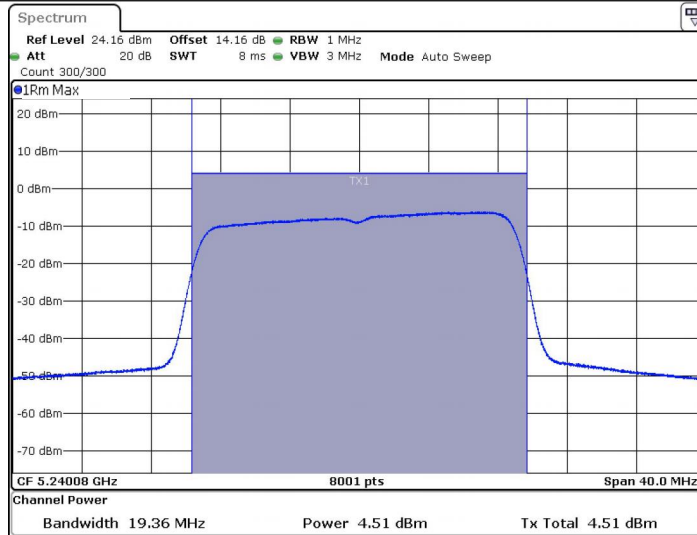

Date: 13 DEC 2024 18:27:40

11A_Ant1_5745

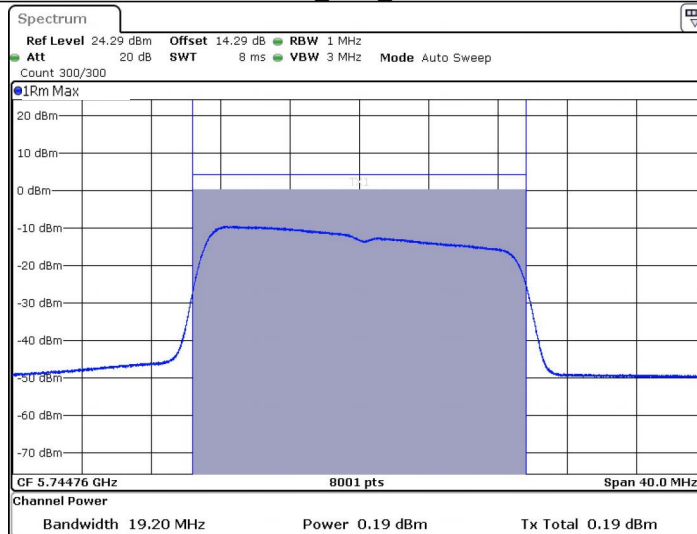

Date: 13 DEC 2024 18:30:25

11A_Ant1_5785



Date: 13 DEC 2024 18:33:17