

Test Report

Report No. : MTi250117022-0102E3
Date of issue : 2025-04-14
Applicant : Guangzhou Havit Technology Co., Ltd.
Product : Smart Projector
Model(s) : PJ600Plus
FCC ID : 2AI6I-PJ600PLUS

Shenzhen Microtest Co., Ltd.

TEST REPORT

Report No.: MTi250117022-0102E3

Table of contents

1	General Description.....	4
1.1	Description of the EUT.....	4
1.2	Description of test modes	4
1.3	Environmental Conditions	6
1.4	Description of support units	6
1.5	Measurement uncertainty	6
2	Summary of Test Result.....	7
3	Test Facilities and accreditations.....	8
3.1	Test laboratory	8
4	List of test equipment	9
5	Evaluation Results (Evaluation)	11
5.1	Antenna requirement	11
6	Radio Spectrum Matter Test Results (RF)	12
6.1	Conducted Emission at AC power line.....	12
6.2	6dB Bandwidth.....	15
6.3	Maximum Conducted Output Power	17
6.4	Power Spectral Density	18
6.5	RF conducted spurious emissions and band edge measurement	19
6.6	Band edge emissions (Radiated).....	20
6.7	Radiated emissions (below 1GHz).....	27
6.8	Radiated emissions (above 1GHz)	35
	Photographs of the test setup.....	45
	Photographs of the EUT.....	46
	Appendix A: DTS Bandwidth	48
	Appendix B: Maximum conducted output power	59
	Appendix C: Maximum power spectral density	60
	Appendix D: Band edge measurements	76
	Appendix E: Conducted Spurious Emission.....	86
	Appendix F: Duty Cycle	130

TEST REPORT

Report No.: MTi250117022-0102E3

Test Result Certification		
Applicant	Guangzhou Havit Technology Co., Ltd.	
Applicant Address	ROOM 1307, 13F, PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU GUANGDONG China	
Manufacturer	Guangzhou Havit Technology Co., Ltd.	
Manufacturer Address	ROOM 1307, 13F, PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU GUANGDONG China	
Product description		
Product name	Smart Projector	
Trademark	HAVIT	
Model name	PJ600Plus	
Series Model(s)	N/A	
Standards	47 CFR Part 15.247	
Test Method	KDB 558074 D01 15.247 Meas Guidance v05r02 KDB 662911 D01 Multiple Transmitter Output v02r01 ANSI C63.10-2020	
Testing Information		
Date of test	2025-03-31 to 2025-04-10	
Test result	Pass	
Prepared by:	Maleah Deng	<i>Maleah Deng</i>
Reviewed by:	David Lee	<i>David. Lee</i>
Approved by:	Lewis Lian	<i>Lewis Lian</i>

TEST REPORT

Report No.: MTi250117022-0102E3

1 General Description

1.1 Description of the EUT

Product name:	Smart Projector
Model name:	PJ600Plus
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Input: 20V=5A Battery: DC 10.95V 5000mAh, 54.75Wh
Accessories:	Adaptor: MODEL:PD100E-B1C0AVUC INPUT:100-240V ~ 50/60Hz, 1.5A OUTPUT: 5.0V=3.0A or 9.0V=3.0A or 15.0V=3.0A or 20.0V=5.0A Manufacturer: Mass Power Electronics Inc. Cable: USB-C to USB-C cable (1.5m)*1 Remote Control*1
Hardware version:	PH1020_MAIN_V1.1
Software version:	V11.1.0.2
Test sample(s) number:	MTi250117022-01-R001
RF specification	
Operating frequency range:	802.11b/g/n20:2412~2462 MHz 802.11n40:2422~2452 MHz
Channel number:	11
Modulation type:	IEEE 802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n (HT20/HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna(s) type:	FPC Antenna
Antenna(s) gain:	Ant1: 5.44dBi; Ant2: 4.36dBi; Directional gain: 7.93dBi, correlated antenna.

1.2 Description of test modes

No.	Emission test modes
Mode1	TX-802.11b
Mode2	TX-802.11g
Mode3	TX-802.11N20
Mode4	TX-802.11N40

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452

TEST REPORT

Report No.: MTi250117022-0102E3

2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Test Channel List

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	2412	2437	2462
40	2422	2437	2452

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:

For power setting, refer to below table.

SISO:

ANT1:

Test Software:	CMD		
Mode	2412MHz	2437MHz	2462MHz
802.11b	Default	Default	Default
802.11g	Default	Default	Default
802.11n(HT20)	Default	Default	Default
Mode	2422MHz	2437MHz	2452MHz
802.11n(HT40)	Default	Default	Default

ANT2:

Test Software:	CMD		
Mode	2412MHz	2437MHz	2462MHz
802.11b	Default	Default	Default
802.11g	Default	Default	Default
802.11n(HT20)	Default	Default	Default
Mode	2422MHz	2437MHz	2452MHz
802.11n(HT40)	Default	Default	Default

MIMO:

ANT1:

Test Software:	CMD		
Mode	2412MHz	2437MHz	2462MHz
802.11n(HT20)	Default	Default	Default

TEST REPORT

Report No.: MTi250117022-0102E3

Mode	2422MHz	2437MHz	2452MHz
802.11n(HT40)	Default	Default	Default

ANT2:

Test Software:	CMD		
Mode	2412MHz	2437MHz	2462MHz
802.11n(HT20)	Default	Default	Default
Mode	2422MHz	2437MHz	2452MHz
802.11n(HT40)	Default	Default	Default

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
/	/	/	/
Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TEST REPORT

Report No.: MTi250117022-0102E3

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
3	6dB Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
4	Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
5	Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
6	RF conducted spurious emissions and band edge measurement	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
7	Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated emissions (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
9	Radiated emissions (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass

TEST REPORT

Report No.: MTi250117022-0102E3

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

TEST REPORT

Report No.: MTi250117022-0102E3

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2025-03-14	2026-03-13
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2025-03-18	2026-03-17
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2025-03-18	2026-03-17
6dB Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in non-restricted frequency bands						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2025-03-18	2026-03-17
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2025-03-14	2026-03-13
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2025-03-14	2026-03-13
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2025-03-18	2026-03-17
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2025-03-18	2026-03-17
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2025-03-18	2026-03-17
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2025-03-18	2026-03-17
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2025-03-14	2026-03-13
9	DC Power Supply	Agilent	E3632A	MY40027695	2025-03-18	2026-03-17
Band edge emissions (Radiated) Emissions in frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2025-03-14	2026-03-13
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-06-17	2025-06-16
3	Amplifier	Agilent	8449B	3008A01120	2025-03-18	2026-03-17
4	MXA signal analyzer	Agilent	N9020A	MY54440859	2025-03-14	2026-03-13
5	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2025-03-14	2026-03-13
6	Horn antenna	Schwarzbeck	BBHA 9170	00987	2023-06-17	2025-06-16
7	Pre-amplifier	Space-Dtronics	EWLAN1840 G	210405001	2025-03-19	2026-03-18
Emissions in frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2025-03-14	2026-03-13
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03-23	2026-03-22

TEST REPORT

Report No.: MTi250117022-0102E3

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
4	Amplifier	Hewlett-Packard	8447F	3113A0618 4	2025-03- 18	2026-03- 17

TEST REPORT

Report No.: MTi250117022-0102E3

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

5.1.1 Conclusion:

The antenna of the EUT is permanently attached. The EUT complies with the requirement of FCC PART 15.203.
--

TEST REPORT

Report No.: MTi250117022-0102E3

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	ANSI C63.10-2020 section 6.2		
Procedure:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

6.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25.9 °C	Humidity:	44 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.1.2 Test Setup Diagram:

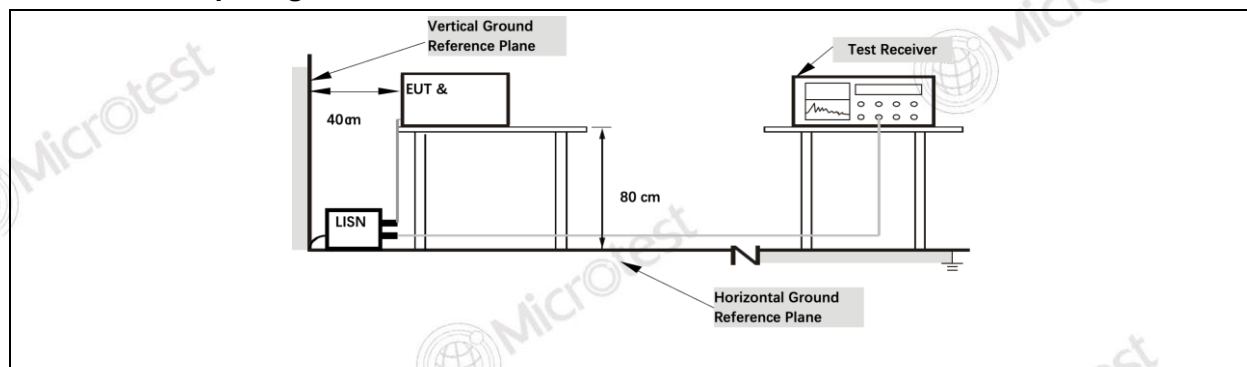


TEST REPORT

Report No.: MTi250117022-0102E3

6.1.3 Test Data:

Mode1 / Line: Line / CH: L

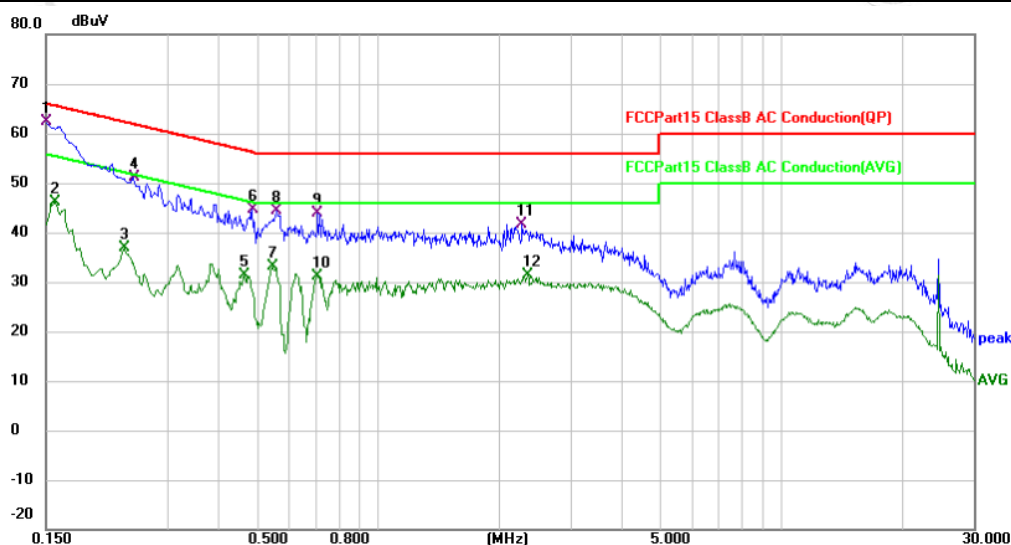


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1 *	0.1500	51.52	10.74	62.26	66.00	-3.74	QP	
2	0.1580	35.44	10.74	46.18	55.57	-9.39	AVG	
3	0.2340	26.26	10.74	37.00	52.31	-15.31	AVG	
4	0.2460	40.36	10.74	51.10	61.89	-10.79	QP	
5	0.4660	20.54	10.72	31.26	46.58	-15.32	AVG	
6	0.4860	33.88	10.72	44.60	56.24	-11.64	QP	
7	0.5460	22.32	10.72	33.04	46.00	-12.96	AVG	
8	0.5620	33.76	10.72	44.48	56.00	-11.52	QP	
9	0.7100	33.05	10.74	43.79	56.00	-12.21	QP	
10	0.7100	20.40	10.74	31.14	46.00	-14.86	AVG	
11	2.2740	30.73	10.78	41.51	56.00	-14.49	QP	
12	2.3540	20.54	10.78	31.32	46.00	-14.68	AVG	

TEST REPORT

Report No.: MTi250117022-0102E3

Mode1 / Line: Neutral / CH: L

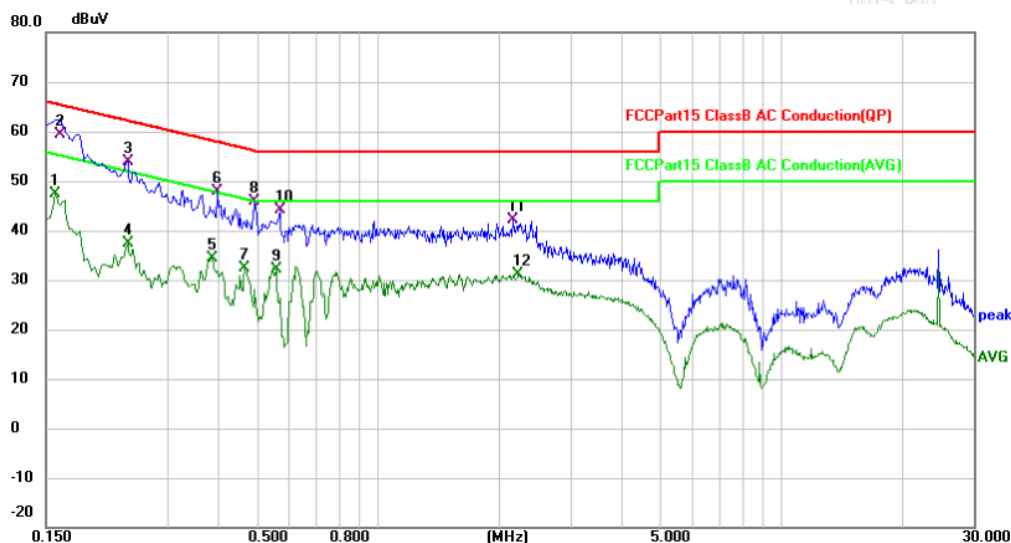

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	36.54	10.77	47.31	55.57	-8.26	AVG	
2	*	0.1620	48.51	10.76	59.27	65.36	-6.09	QP	
3		0.2380	43.22	10.76	53.98	62.17	-8.19	QP	
4		0.2380	26.52	10.76	37.28	52.17	-14.89	AVG	
5		0.3860	23.67	10.74	34.41	48.15	-13.74	AVG	
6		0.3980	37.12	10.74	47.86	57.90	-10.04	QP	
7		0.4660	21.70	10.74	32.44	46.58	-14.14	AVG	
8		0.4940	35.17	10.74	45.91	56.10	-10.19	QP	
9		0.5580	21.31	10.75	32.06	46.00	-13.94	AVG	
10		0.5700	33.37	10.75	44.12	56.00	-11.88	QP	
11		2.1660	31.24	10.78	42.02	56.00	-13.98	QP	
12		2.2340	20.37	10.78	31.15	46.00	-14.85	AVG	

TEST REPORT

Report No.: MTi250117022-0102E3

6.2 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.2.1 E.U.T. Operation:


Operating Environment:					
Temperature:	23.1 °C	Humidity:	43 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.2.2 Test Setup Diagram:

--

TEST REPORT

Report No.: MTi250117022-0102E3

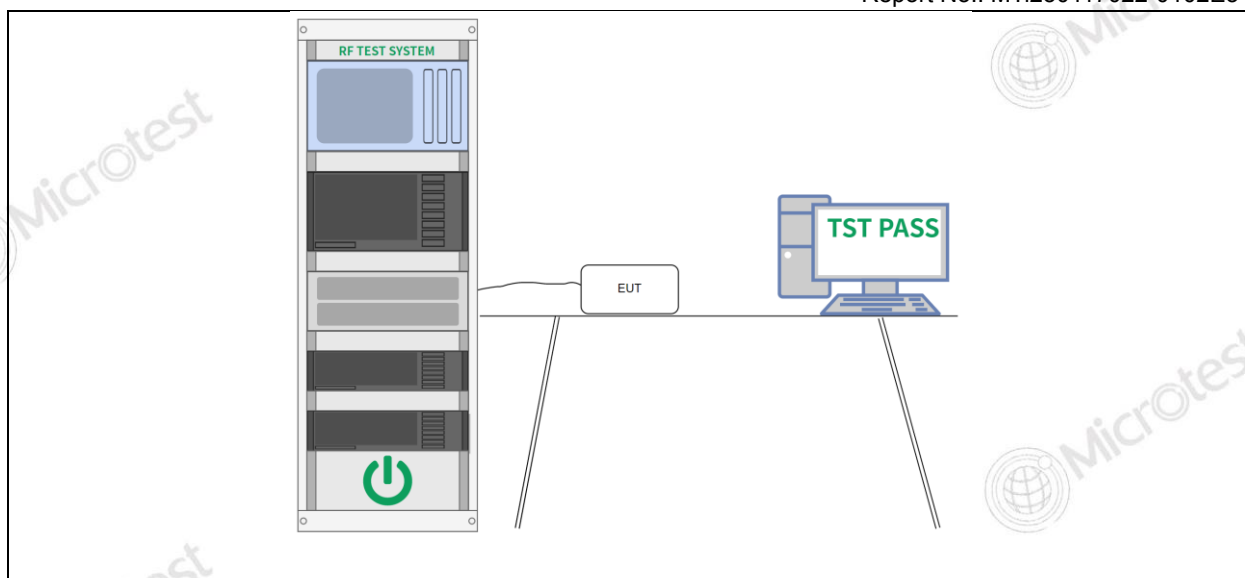

6.2.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi250117022-0102E3


6.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.9.1.3 Maximum peak conducted output power

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.1 °C	Humidity:	43 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.3.2 Test Setup Diagram:

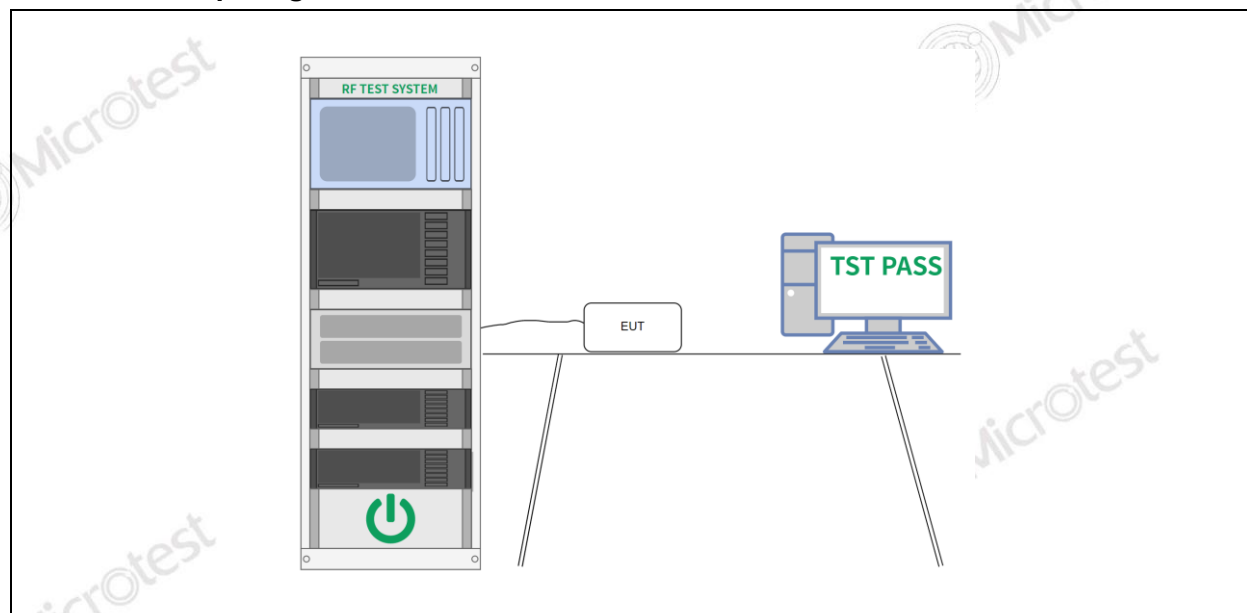

6.3.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi250117022-0102E3


6.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.10.2 Maximum power spectral density level in the fundamental emission

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.1 °C	Humidity:	43 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.4.2 Test Setup Diagram:

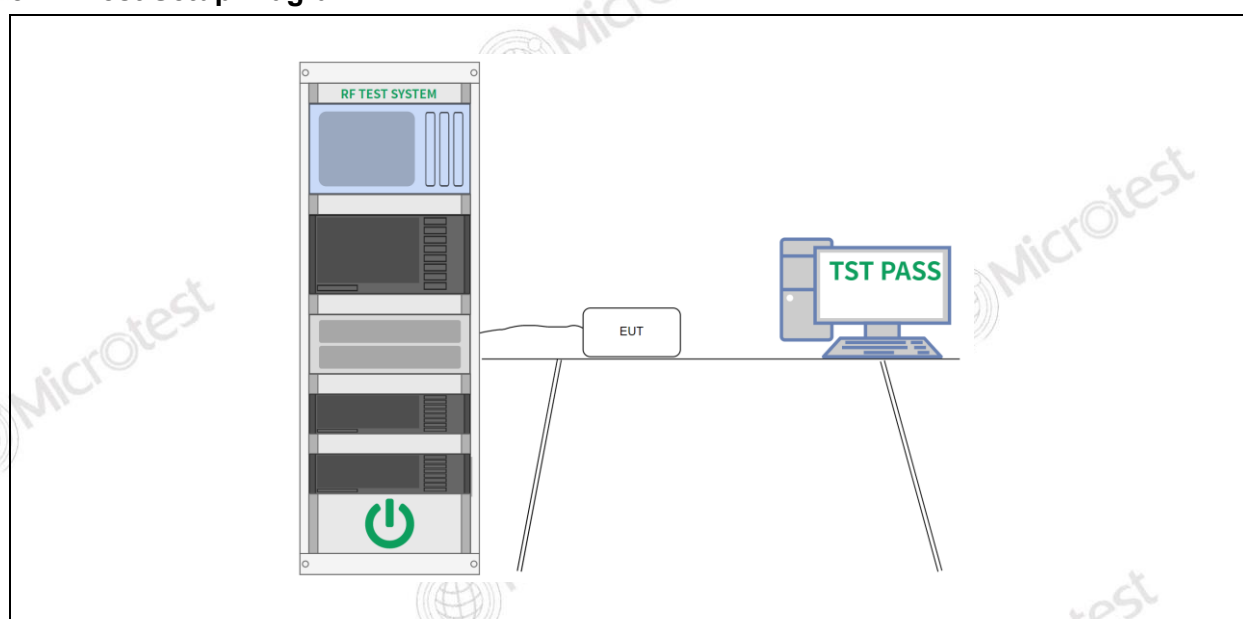

6.4.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi250117022-0102E3


6.5 RF conducted spurious emissions and band edge measurement

Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.1 °C	Humidity:	43 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.5.2 Test Setup Diagram:

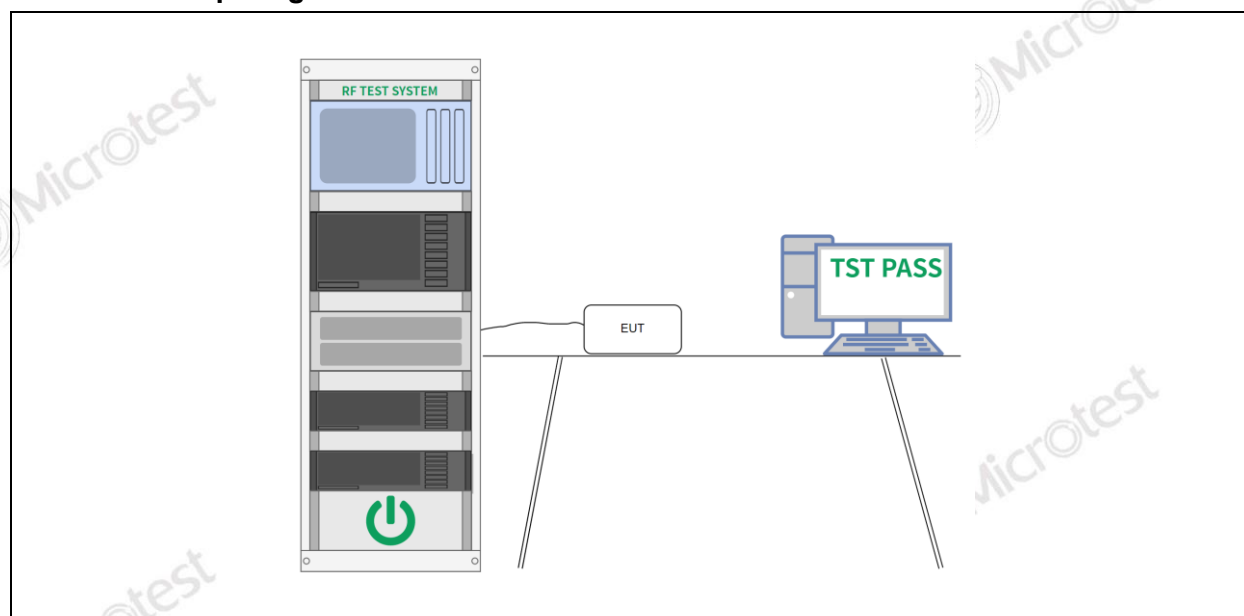

6.5.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi250117022-0102E3


6.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 section 6.10.5.2		

6.6.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24.5 °C	Humidity:	56 %	Atmospheric Pressure:	101 kPa
Pre test mode:		Mode1, Mode2, Mode3, Mode4			
Final test mode:		All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report			
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.					

6.6.2 Test Setup Diagram:

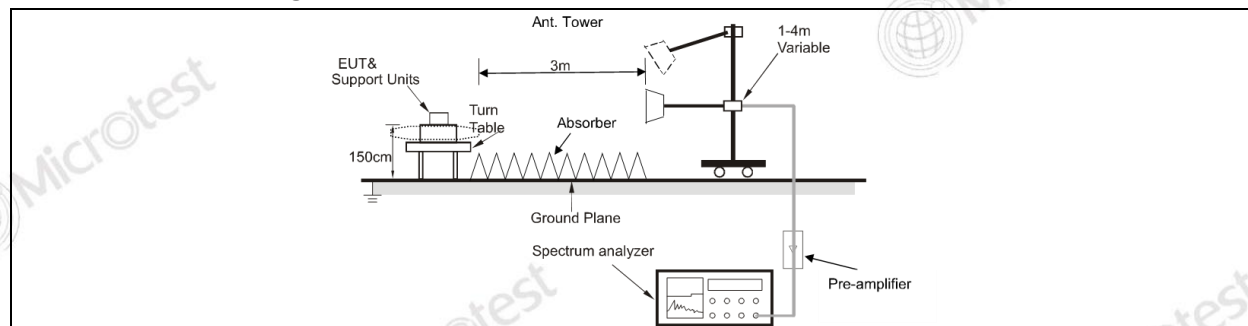

TEST REPORT

Report No.: MTi250117022-0102E3

6.6.3 Test Data:

Mode4(ANT 1) / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	47.85	-4.83	43.02	74.00	-30.98	peak
2		2310.000	39.47	-4.83	34.64	54.00	-19.36	AVG
3		2390.000	66.03	-4.31	61.72	74.00	-12.28	peak
4	*	2390.000	55.18	-4.31	50.87	54.00	-3.13	AVG

Mode4(ANT 1) / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	47.89	-4.83	43.06	74.00	-30.94	peak
2		2310.000	38.84	-4.83	34.01	54.00	-19.99	AVG
3		2390.000	58.04	-4.31	53.73	74.00	-20.27	peak
4	*	2390.000	48.55	-4.31	44.24	54.00	-9.76	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT 1) / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	57.50	-4.21	53.29	74.00	-20.71	peak
2	*	2483.500	46.57	-4.21	42.36	54.00	-11.64	AVG
3		2500.000	52.39	-4.10	48.29	74.00	-25.71	peak
4		2500.000	40.96	-4.10	36.86	54.00	-17.14	AVG

Mode4(ANT 1) / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	58.19	-4.21	53.98	74.00	-20.02	peak
2	*	2483.500	46.35	-4.21	42.14	54.00	-11.86	AVG
3		2500.000	51.63	-4.10	47.53	74.00	-26.47	peak
4		2500.000	41.72	-4.10	37.62	54.00	-16.38	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT 2) / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	47.94	-4.83	43.11	74.00	-30.89	peak
2		2310.000	38.59	-4.83	33.76	54.00	-20.24	AVG
3		2390.000	59.29	-4.31	54.98	74.00	-19.02	peak
4	*	2390.000	50.59	-4.31	46.28	54.00	-7.72	AVG

Mode4(ANT 2) / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	47.87	-4.83	43.04	74.00	-30.96	peak
2		2310.000	38.84	-4.83	34.01	54.00	-19.99	AVG
3		2390.000	57.11	-4.31	52.80	74.00	-21.20	peak
4	*	2390.000	48.13	-4.31	43.82	54.00	-10.18	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT 2) / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	58.09	-4.21	53.88	74.00	-20.12	peak
2	*	2483.500	49.51	-4.21	45.30	54.00	-8.70	AVG
3		2500.000	50.87	-4.10	46.77	74.00	-27.23	peak
4		2500.000	40.77	-4.10	36.67	54.00	-17.33	AVG

Mode4(ANT 2) / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	56.84	-4.21	52.63	74.00	-21.37	peak
2	*	2483.500	47.26	-4.21	43.05	54.00	-10.95	AVG
3		2500.000	53.59	-4.10	49.49	74.00	-24.51	peak
4		2500.000	41.76	-4.10	37.66	54.00	-16.34	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT 1+ANT 2) / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	48.48	-4.83	43.65	74.00	-30.35	peak
2		2310.000	39.46	-4.83	34.63	54.00	-19.37	AVG
3		2390.000	66.79	-4.31	62.48	74.00	-11.52	peak
4	*	2390.000	54.39	-4.31	50.08	54.00	-3.92	AVG

Mode4(ANT 1+ANT 2) / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	45.22	-4.83	40.39	74.00	-33.61	peak
2		2310.000	37.69	-4.83	32.86	54.00	-21.14	AVG
3		2390.000	60.67	-4.31	56.36	74.00	-17.64	peak
4	*	2390.000	48.96	-4.31	44.65	54.00	-9.35	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT 1+ANT 2) / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	65.86	-4.21	61.65	74.00	-12.35	peak
2	*	2483.500	51.91	-4.21	47.70	54.00	-6.30	AVG
3		2500.000	50.87	-4.10	46.77	74.00	-27.23	peak
4		2500.000	42.59	-4.10	38.49	54.00	-15.51	AVG

Mode4(ANT 1+ANT 2 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	60.76	-4.21	56.55	74.00	-17.45	peak
2	*	2483.500	51.29	-4.21	47.08	54.00	-6.92	AVG
3		2500.000	55.89	-4.10	51.79	74.00	-22.21	peak
4		2500.000	44.42	-4.10	40.32	54.00	-13.68	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

6.7 Radiated emissions (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 section 6.6.4		


6.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24.5 °C	Humidity:	56 %	Atmospheric Pressure:	101 kPa
Pre test mode:		Mode1, Mode2, Mode3, Mode4			
Final test mode:		All of the listed pre-test mode were tested, only the data of the worst mode (Mode1, Mode4) is recorded in the report			
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.					

TEST REPORT

Report No.: MTi250117022-0102E3

6.7.2 Test Setup Diagram:

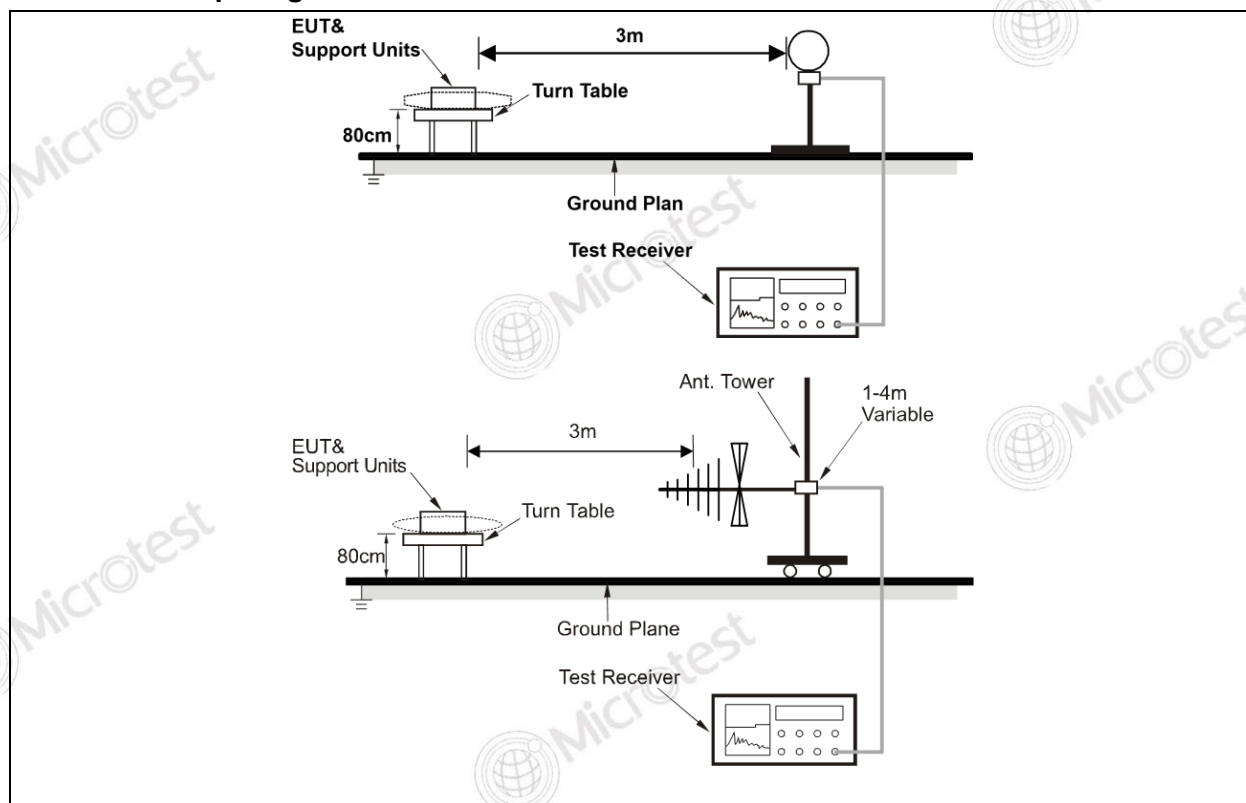


TEST REPORT

Report No.: MTi250117022-0102E3

6.7.3 Test Data:


Mode1(ANT1) / Polarization: Horizontal / CH: H

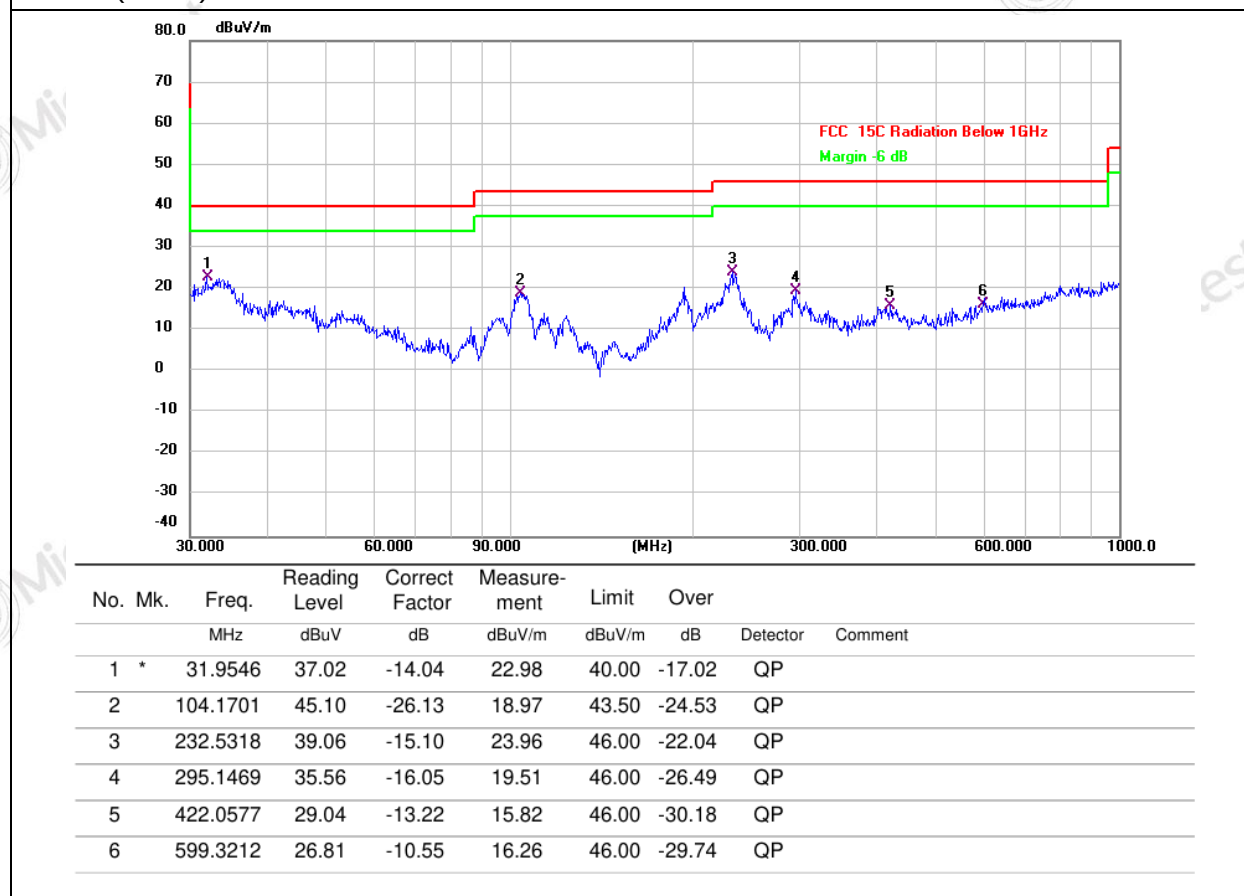

TEST REPORT

Report No.: MTi250117022-0102E3

Mode1(ANT1) / Polarization: Vertical / CH: H

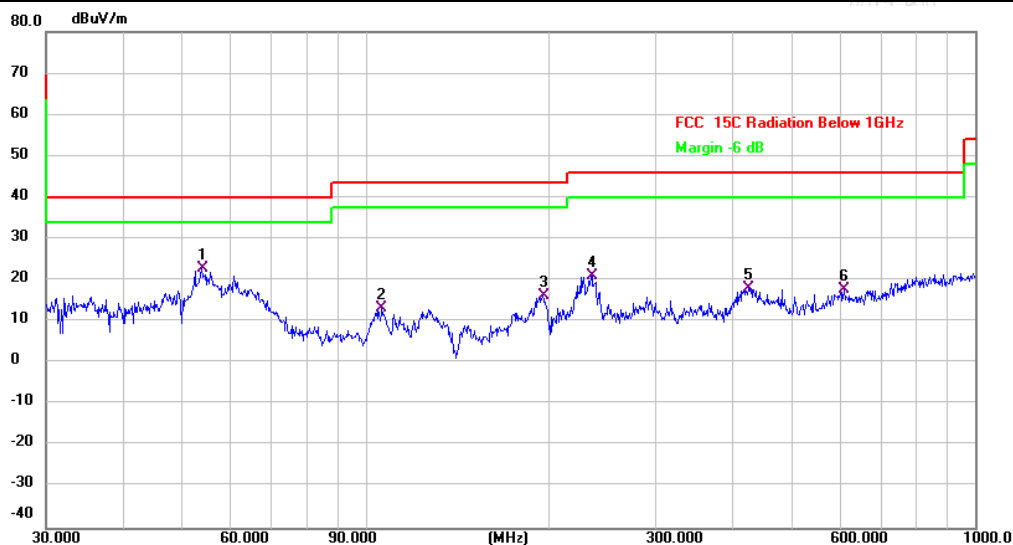


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	53.8818	44.84	-22.04	22.80	40.00	-17.20	QP	
2		106.3850	31.20	-18.02	13.18	43.50	-30.32	QP	
3		195.8220	37.12	-20.98	16.14	43.50	-27.36	QP	
4		235.8164	40.79	-19.67	21.12	46.00	-24.88	QP	
5		425.0280	32.58	-14.56	18.02	46.00	-27.98	QP	
6		609.9217	28.77	-11.05	17.72	46.00	-28.28	QP	

TEST REPORT

Report No.: MTi250117022-0102E3

Mode1(ANT2) / Polarization: Horizontal / CH: H

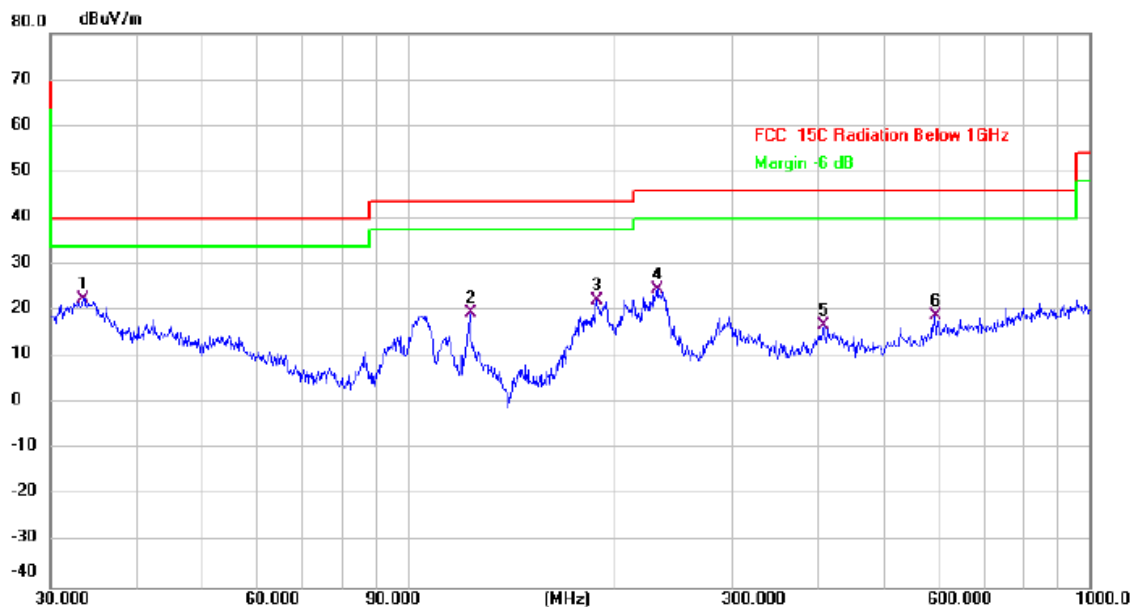


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	33.4449	36.89	-14.27	22.62	40.00	-17.38	QP	
2		123.6985	42.78	-23.28	19.50	43.50	-24.00	QP	
3		189.7385	41.63	-19.31	22.32	43.50	-21.18	QP	
4		232.5318	39.75	-15.10	24.65	46.00	-21.35	QP	
5		407.5145	30.24	-13.40	16.84	46.00	-29.16	QP	
6		593.0497	29.58	-10.68	18.90	46.00	-27.10	QP	

TEST REPORT

Report No.: MTi250117022-0102E3

Mode1(ANT2) / Polarization: Vertical / CH: H

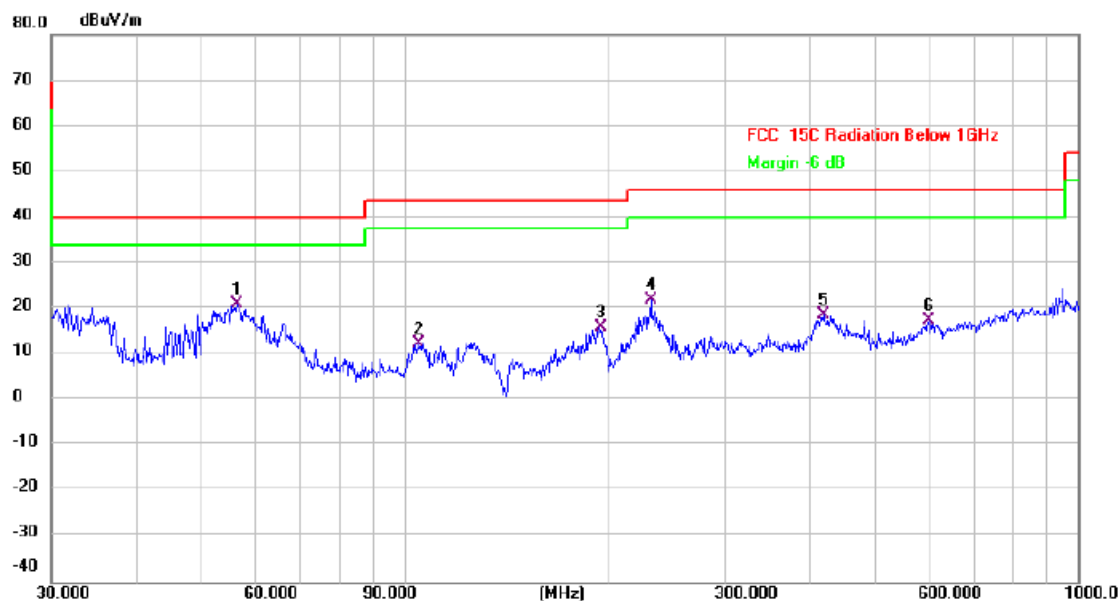


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	56.3948	42.64	-21.48	21.16	40.00	-18.84	QP	
2		104.9033	29.87	-17.38	12.49	43.50	-31.01	QP	
3		195.1365	36.55	-20.69	15.86	43.50	-27.64	QP	
4		232.5318	42.05	-20.12	21.93	46.00	-24.07	QP	
5		419.1081	32.93	-14.31	18.62	46.00	-27.38	QP	
6		601.4265	27.92	-10.44	17.48	46.00	-28.52	QP	

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT1+ ANT2) / Polarization: Horizontal / CH: H

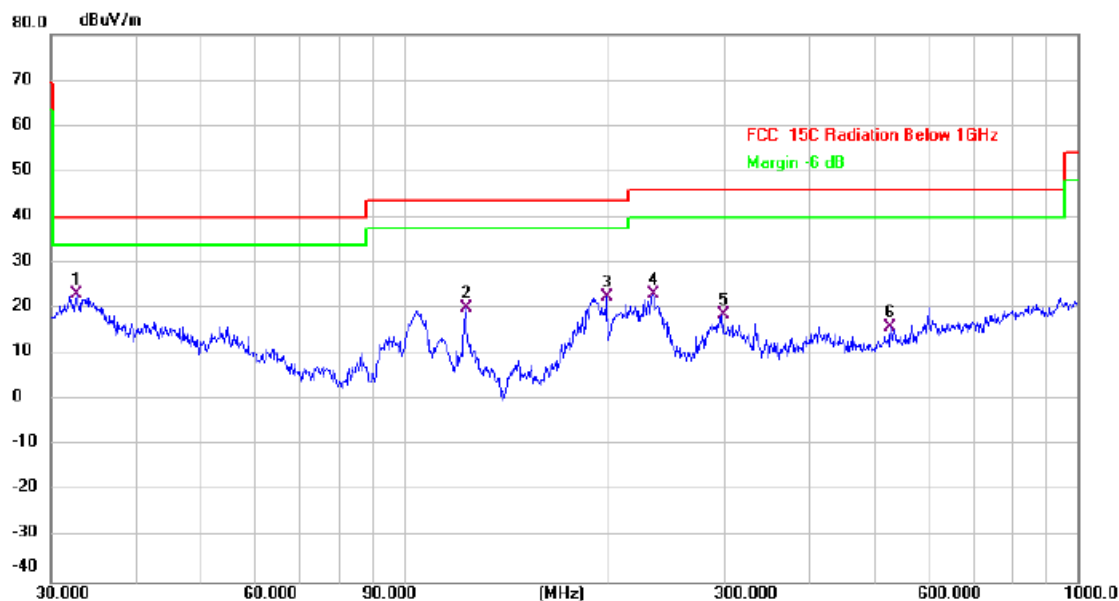


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	32.7486	37.52	-14.25	23.27	40.00	-16.73	QP	
2		123.6985	43.53	-23.28	20.25	43.50	-23.25	QP	
3		199.9856	46.76	-24.15	22.61	43.50	-20.89	QP	
4		234.1684	38.01	-14.75	23.26	46.00	-22.74	QP	
5		297.2241	34.78	-16.23	18.55	46.00	-27.45	QP	
6		528.2458	29.13	-13.12	16.01	46.00	-29.99	QP	

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT1+ ANT2) / Polarization: Vertical / CH: H

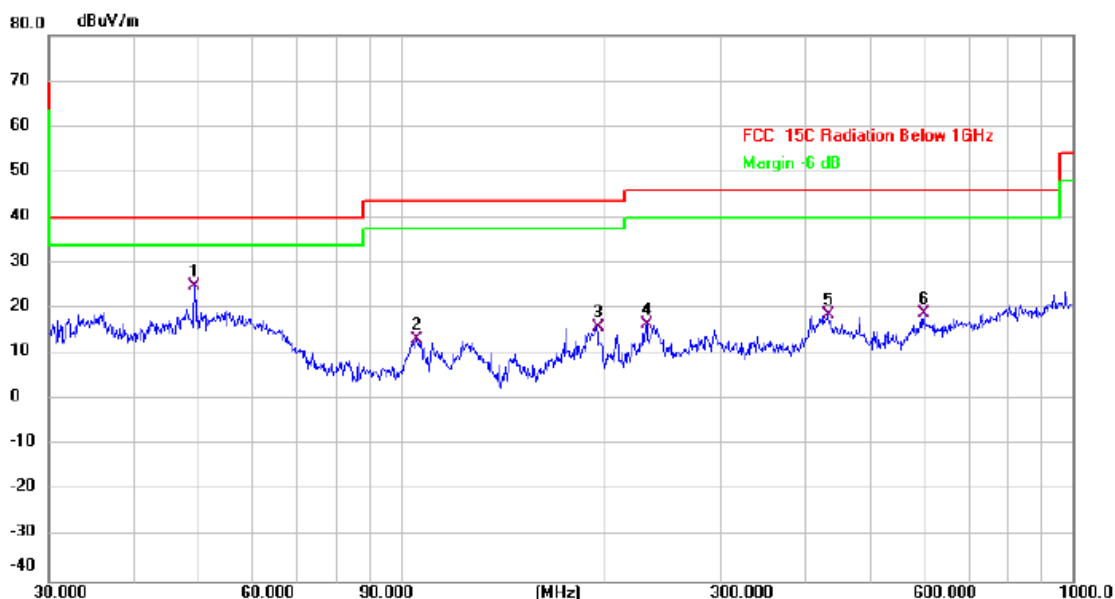

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	49.3594	47.42	-22.42	25.00	40.00	-15.00	QP	
2		105.6415	31.12	-17.74	13.38	43.50	-30.12	QP	
3		195.8220	36.86	-20.98	15.88	43.50	-27.62	QP	
4		232.5318	36.70	-20.12	16.58	46.00	-29.42	QP	
5		432.5457	33.44	-14.75	18.69	46.00	-27.31	QP	
6		601.4265	29.43	-10.44	18.99	46.00	-27.01	QP	

TEST REPORT

Report No.: MTi250117022-0102E3


6.8 Radiated emissions (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 section 6.6.4		

6.8.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24.5 °C	Humidity:	56 %	Atmospheric Pressure:	101 kPa
Pre test mode:		Mode1, Mode2, Mode3, Mode4			
Final test mode:		All of the listed pre-test mode were tested, only the data of the worst mode (Mode1, Mode4) is recorded in the report			
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.					

6.8.2 Test Setup Diagram:

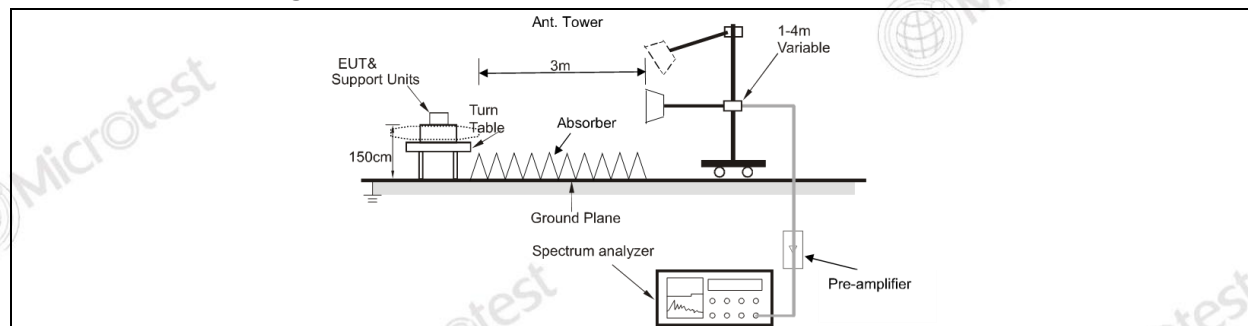

TEST REPORT

Report No.: MTi250117022-0102E3

6.8.3 Test Data:

Mode1(ANT1) / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	43.74	0.52	44.26	74.00	-29.74	peak
2		4824.000	37.71	0.52	38.23	54.00	-15.77	AVG
3		7236.000	43.39	7.63	51.02	74.00	-22.98	peak
4		7236.000	37.84	7.63	45.47	54.00	-8.53	AVG
5		9648.000	44.83	8.99	53.82	74.00	-20.18	peak
6	*	9648.000	38.57	8.99	47.56	54.00	-6.44	AVG

Mode1(ANT1) / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	43.30	0.52	43.82	74.00	-30.18	peak
2		4824.000	36.74	0.52	37.26	54.00	-16.74	AVG
3		7236.000	43.02	7.63	50.65	74.00	-23.35	peak
4		7236.000	36.69	7.63	44.32	54.00	-9.68	AVG
5		9648.000	44.43	8.99	53.42	74.00	-20.58	peak
6	*	9648.000	38.60	8.99	47.59	54.00	-6.41	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode1(ANT1) / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	43.41	0.55	43.96	74.00	-30.04	peak
2		4874.000	36.71	0.55	37.26	54.00	-16.74	AVG
3		7311.000	43.76	7.46	51.22	74.00	-22.78	peak
4		7311.000	37.95	7.46	45.41	54.00	-8.59	AVG
5		9748.000	44.37	9.32	53.69	74.00	-20.31	peak
6	*	9748.000	38.27	9.32	47.59	54.00	-6.41	AVG

Mode1(ANT1) / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	43.86	0.55	44.41	74.00	-29.59	peak
2		4874.000	37.71	0.55	38.26	54.00	-15.74	AVG
3		7311.000	43.54	7.46	51.00	74.00	-23.00	peak
4		7311.000	37.75	7.46	45.21	54.00	-8.79	AVG
5		9748.000	44.55	9.32	53.87	74.00	-20.13	peak
6	*	9748.000	38.30	9.32	47.62	54.00	-6.38	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode1(ANT1) / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	43.13	0.59	43.72	74.00	-30.28	peak
2		4924.000	36.67	0.59	37.26	54.00	-16.74	AVG
3		7386.000	43.60	7.93	51.53	74.00	-22.47	peak
4		7386.000	37.39	7.93	45.32	54.00	-8.68	AVG
5		9848.000	44.76	9.00	53.76	74.00	-20.24	peak
6	*	9848.000	38.59	9.00	47.59	54.00	-6.41	AVG

Mode1(ANT1) / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	43.55	0.59	44.14	74.00	-29.86	peak
2		4924.000	37.67	0.59	38.26	54.00	-15.74	AVG
3		7386.000	43.74	7.93	51.67	74.00	-22.33	peak
4		7386.000	37.56	7.93	45.49	54.00	-8.51	AVG
5		9848.000	44.43	9.00	53.43	74.00	-20.57	peak
6	*	9848.000	38.35	9.00	47.35	54.00	-6.65	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode1(ANT2) / Polarization: Horizontal / CH: L

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4824.000	47.68	0.52	48.20	74.00	-25.80	peak
2		4824.000	41.84	0.52	42.36	54.00	-11.64	AVG
3		7236.000	43.61	7.63	51.24	74.00	-22.76	peak
4		7236.000	37.51	7.63	45.14	54.00	-8.86	AVG
5		9648.000	45.18	8.99	54.17	74.00	-19.83	peak
6	*	9648.000	39.70	8.99	48.69	54.00	-5.31	AVG

Mode1(ANT2) / Polarization: Vertical / CH: L

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4824.000	45.68	0.52	46.20	74.00	-27.80	peak
2		4824.000	39.72	0.52	40.24	54.00	-13.76	AVG
3		7236.000	42.83	7.63	50.46	74.00	-23.54	peak
4		7236.000	37.02	7.63	44.65	54.00	-9.35	AVG
5		9648.000	45.39	8.99	54.38	74.00	-19.62	peak
6	*	9648.000	39.37	8.99	48.36	54.00	-5.64	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode1(ANT2) / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	45.90	0.55	46.45	74.00	-27.55	peak
2		4874.000	39.77	0.55	40.32	54.00	-13.68	AVG
3		7311.000	43.52	7.46	50.98	74.00	-23.02	peak
4		7311.000	37.13	7.46	44.59	54.00	-9.41	AVG
5		9748.000	44.12	9.32	53.44	74.00	-20.56	peak
6	*	9748.000	38.04	9.32	47.36	54.00	-6.64	AVG

Mode1(ANT2) / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	44.26	0.55	44.81	74.00	-29.19	peak
2		4874.000	37.71	0.55	38.26	54.00	-15.74	AVG
3		7311.000	43.03	7.46	50.49	74.00	-23.51	peak
4		7311.000	37.05	7.46	44.51	54.00	-9.49	AVG
5		9748.000	44.16	9.32	53.48	74.00	-20.52	peak
6	*	9748.000	38.04	9.32	47.36	54.00	-6.64	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode1(ANT2) / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	45.62	0.59	46.21	74.00	-27.79	peak
2		4924.000	39.73	0.59	40.32	54.00	-13.68	AVG
3		7386.000	44.02	7.93	51.95	74.00	-22.05	peak
4		7386.000	37.54	7.93	45.47	54.00	-8.53	AVG
5		9848.000	43.49	9.00	52.49	74.00	-21.51	peak
6	*	9848.000	37.59	9.00	46.59	54.00	-7.41	AVG

Mode1(ANT2) / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	43.34	0.59	43.93	74.00	-30.07	peak
2		4924.000	36.67	0.59	37.26	54.00	-16.74	AVG
3		7386.000	44.30	7.93	52.23	74.00	-21.77	peak
4	*	7386.000	38.66	7.93	46.59	54.00	-7.41	AVG
5		9848.000	43.83	9.00	52.83	74.00	-21.17	peak
6		9848.000	37.57	9.00	46.57	54.00	-7.43	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT1+ANT2) / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	46.38	0.52	46.90	74.00	-27.10	peak
2		4824.000	39.84	0.52	40.36	54.00	-13.64	AVG
3		7236.000	42.71	7.63	50.34	74.00	-23.66	peak
4		7236.000	36.94	7.63	44.57	54.00	-9.43	AVG
5		9648.000	44.23	8.99	53.22	74.00	-20.78	peak
6	*	9648.000	38.70	8.99	47.69	54.00	-6.31	AVG

Mode4(ANT1+ANT2) / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	45.64	0.52	46.16	74.00	-27.84	peak
2		4824.000	39.84	0.52	40.36	54.00	-13.64	AVG
3		7236.000	43.29	7.63	50.92	74.00	-23.08	peak
4		7236.000	37.02	7.63	44.65	54.00	-9.35	AVG
5		9648.000	44.44	8.99	53.43	74.00	-20.57	peak
6	*	9648.000	38.53	8.99	47.52	54.00	-6.48	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT1+ANT2 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	47.28	0.55	47.83	74.00	-26.17	peak
2		4874.000	40.77	0.55	41.32	54.00	-12.68	AVG
3		7311.000	43.02	7.46	50.48	74.00	-23.52	peak
4		7311.000	37.19	7.46	44.65	54.00	-9.35	AVG
5		9748.000	44.57	9.32	53.89	74.00	-20.11	peak
6	*	9748.000	38.22	9.32	47.54	54.00	-6.46	AVG

Mode4(ANT1+ANT2) / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	44.43	0.55	44.98	74.00	-29.02	peak
2		4874.000	37.71	0.55	38.26	54.00	-15.74	AVG
3		7311.000	43.49	7.46	50.95	74.00	-23.05	peak
4		7311.000	37.19	7.46	44.65	54.00	-9.35	AVG
5		9748.000	43.59	9.32	52.91	74.00	-21.09	peak
6	*	9748.000	37.17	9.32	46.49	54.00	-7.51	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Mode4(ANT1+ANT2) / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	46.76	0.59	47.35	74.00	-26.65	peak
2		4924.000	40.77	0.59	41.36	54.00	-12.64	AVG
3		7386.000	45.39	7.93	53.32	74.00	-20.68	peak
4	*	7386.000	39.72	7.93	47.65	54.00	-6.35	AVG
5		9848.000	43.73	9.00	52.73	74.00	-21.27	peak
6		9848.000	37.39	9.00	46.39	54.00	-7.61	AVG

Mode4(ANT1+ANT2) / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	42.64	0.59	43.23	74.00	-30.77	peak
2		4924.000	36.67	0.59	37.26	54.00	-16.74	AVG
3		7386.000	45.83	7.93	53.76	74.00	-20.24	peak
4	*	7386.000	39.66	7.93	47.59	54.00	-6.41	AVG
5		9848.000	43.81	9.00	52.81	74.00	-21.19	peak
6		9848.000	37.69	9.00	46.69	54.00	-7.31	AVG

TEST REPORT

Report No.: MTi250117022-0102E3

Photographs of the test setup

Refer to Appendix - Test Setup Photos

TEST REPORT

Report No.: MTi250117022-0102E3

Photographs of the EUT

Refer to Appendix - EUT Photos

Appendix

TEST REPORT

Report No.: MTi250117022-0102E3

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.040	0.5	PASS
	Ant2	2412	9.040	0.5	PASS
	Ant1	2437	9.000	0.5	PASS
	Ant2	2437	9.000	0.5	PASS
	Ant1	2462	9.040	0.5	PASS
	Ant2	2462	9.000	0.5	PASS
11G	Ant1	2412	13.240	0.5	PASS
	Ant2	2412	14.440	0.5	PASS
	Ant1	2437	15.040	0.5	PASS
	Ant2	2437	15.040	0.5	PASS
	Ant1	2462	15.040	0.5	PASS
	Ant2	2462	15.040	0.5	PASS
11N20SISO	Ant1	2412	13.840	0.5	PASS
	Ant2	2412	13.800	0.5	PASS
	Ant1	2437	15.080	0.5	PASS
	Ant2	2437	14.880	0.5	PASS
	Ant1	2462	15.080	0.5	PASS
	Ant2	2462	15.040	0.5	PASS
11N40SISO	Ant1	2422	34.960	0.5	PASS
	Ant2	2422	35.040	0.5	PASS
	Ant1	2437	34.960	0.5	PASS
	Ant2	2437	33.760	0.5	PASS
	Ant1	2452	33.840	0.5	PASS
	Ant2	2452	33.920	0.5	PASS

TEST REPORT


Report No.: MTi250117022-0102E3

Test Graphs



TEST REPORT

Report No.: MTi250117022-0102E3

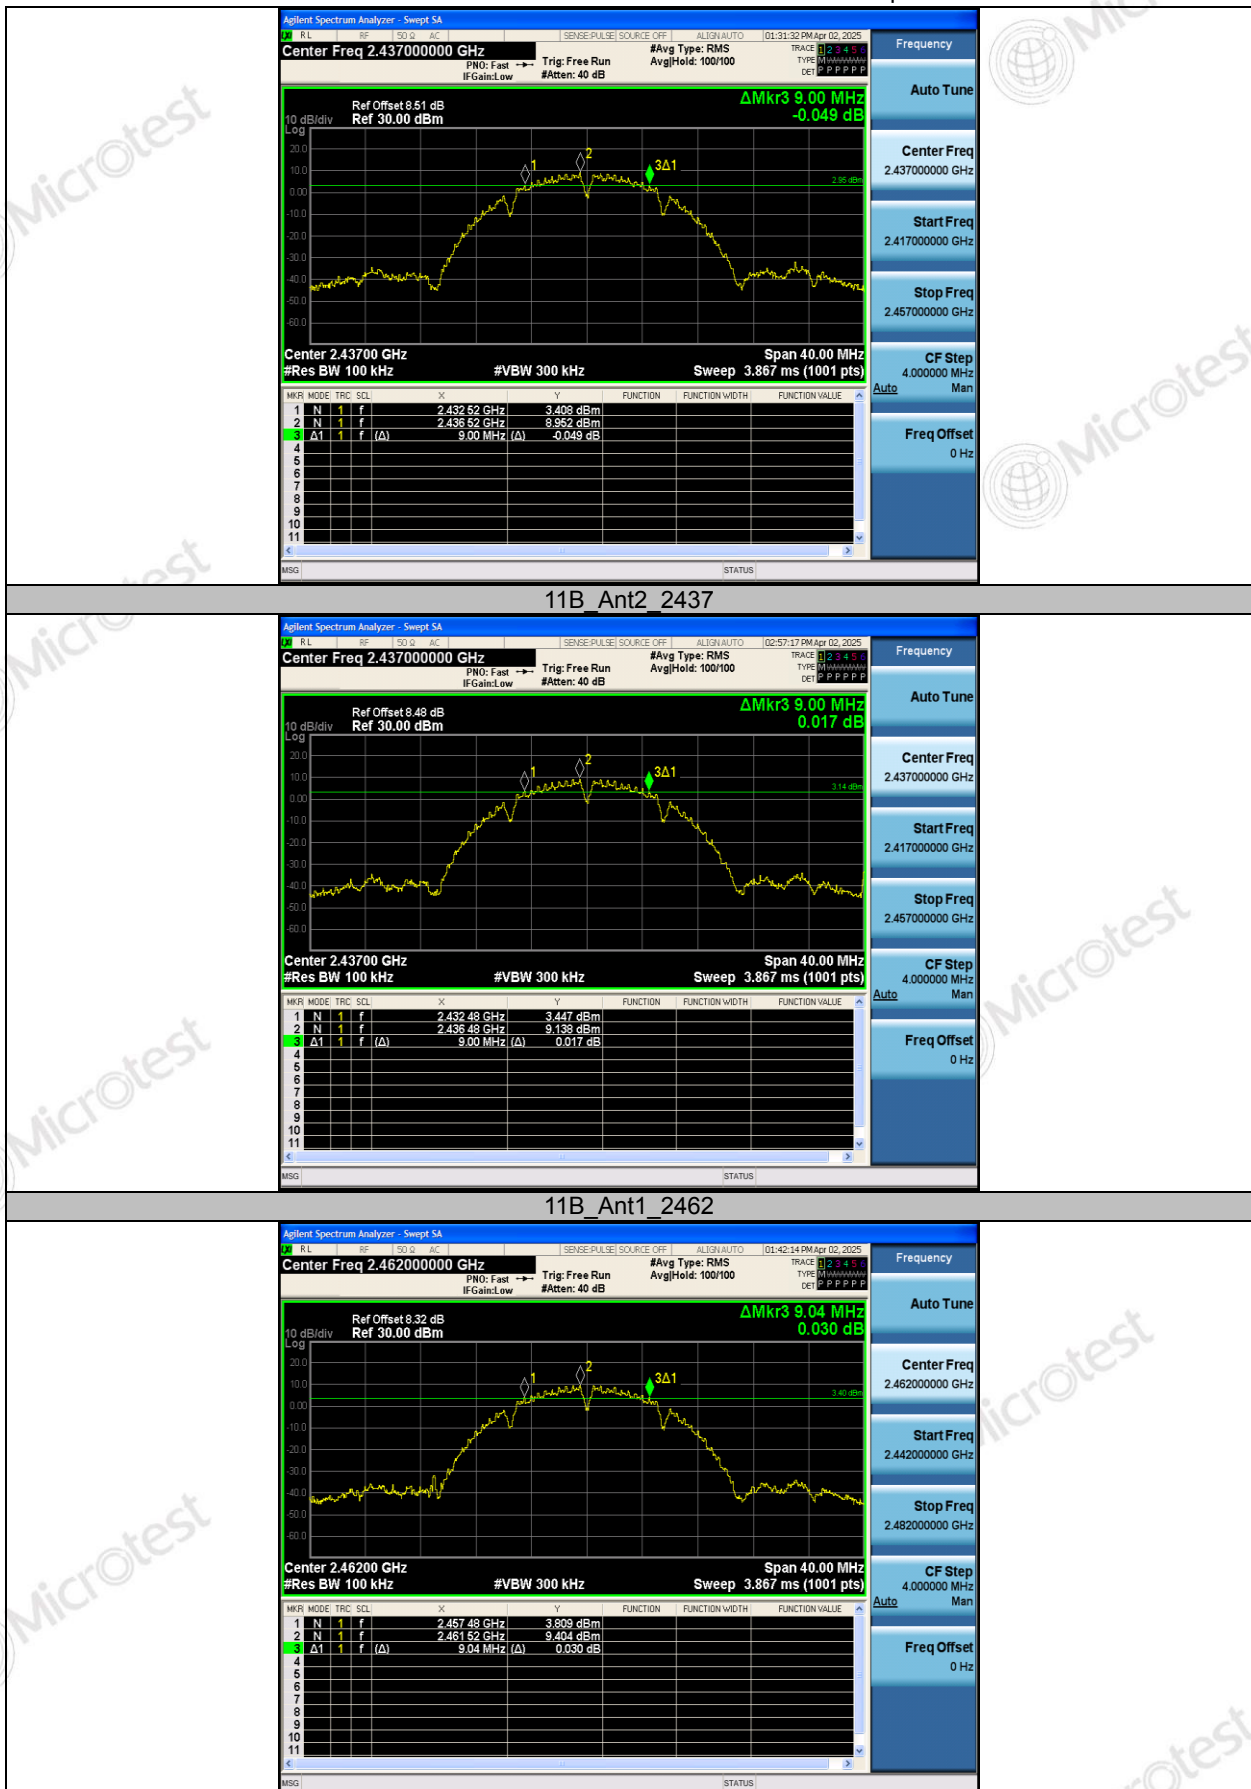


TEST REPORT

Report No.: MTi250117022-0102E3




TEST REPORT

Report No.: MTi250117022-0102E3

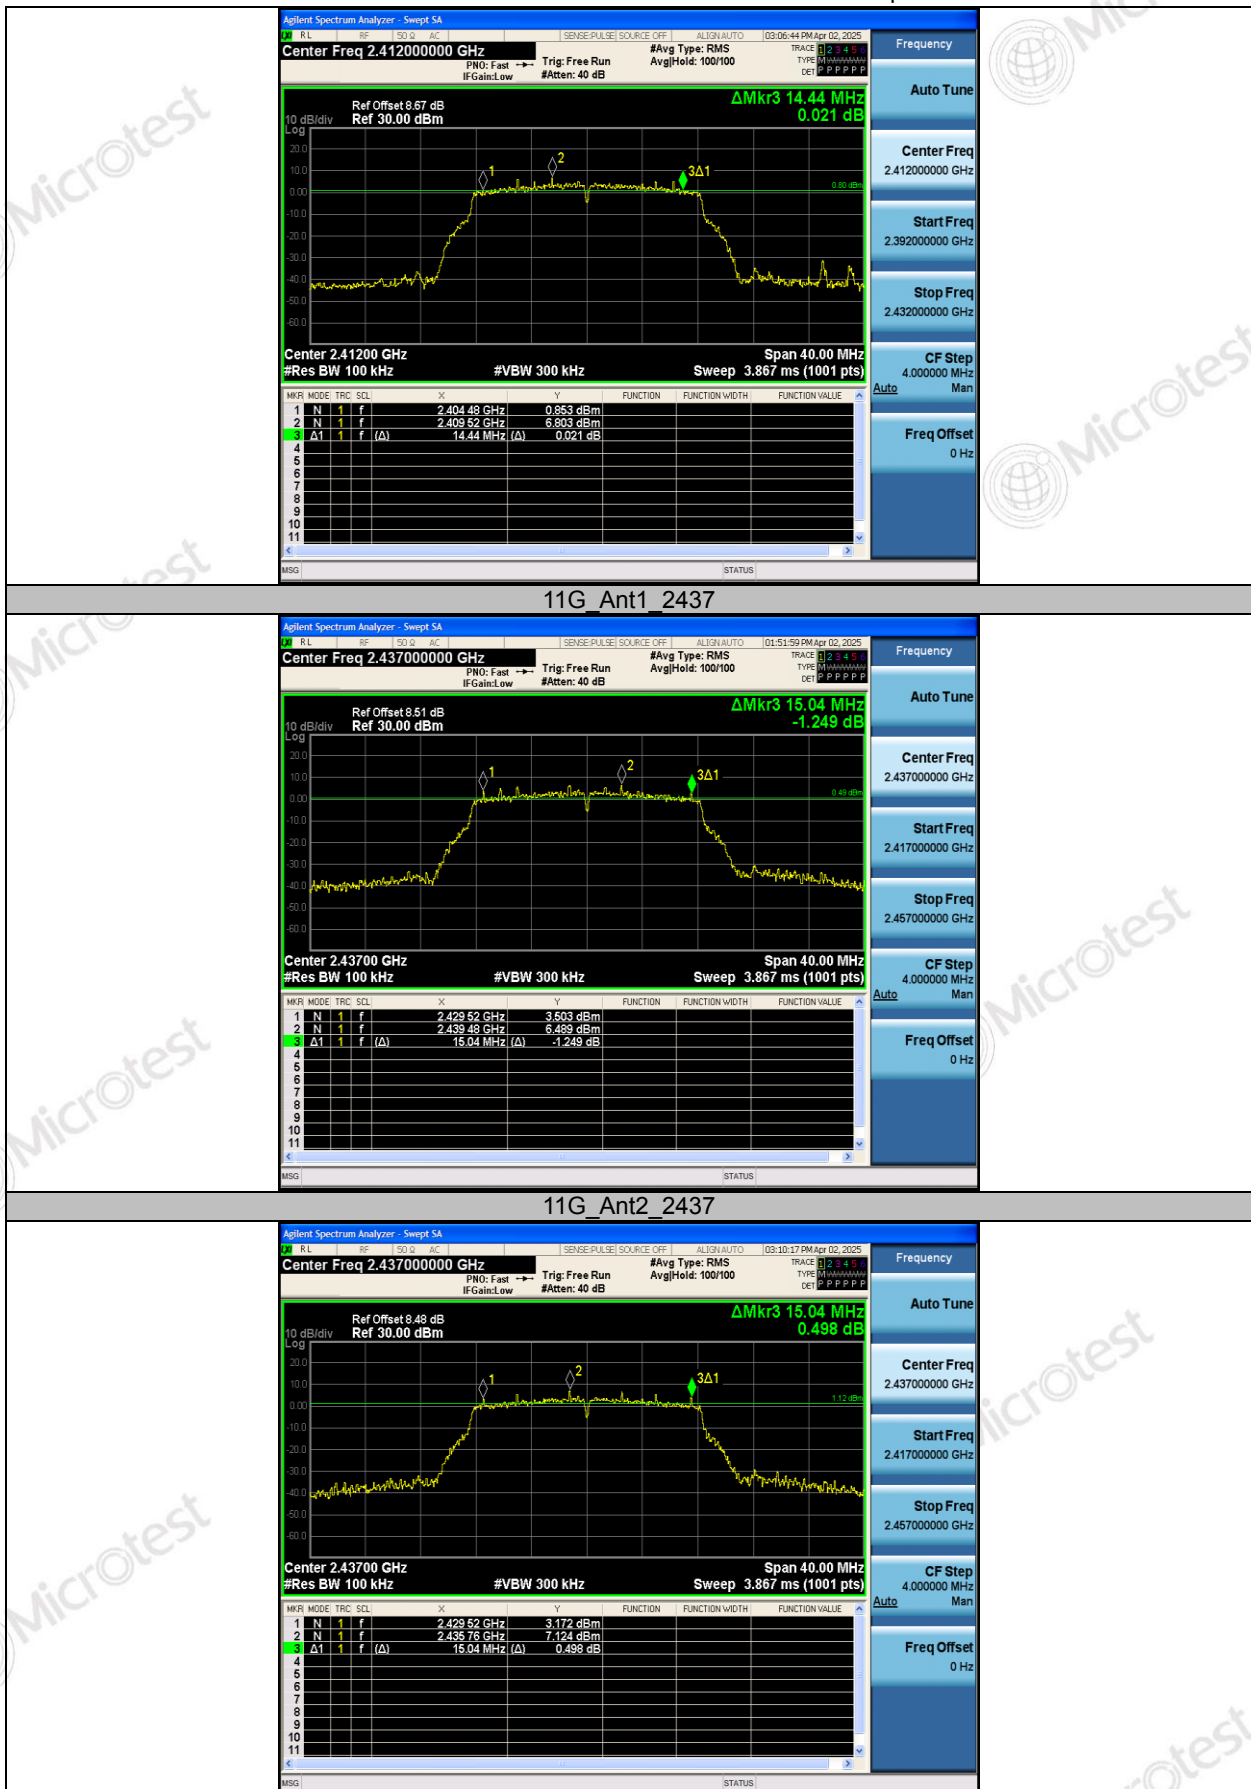


TEST REPORT

Report No.: MTi250117022-0102E3

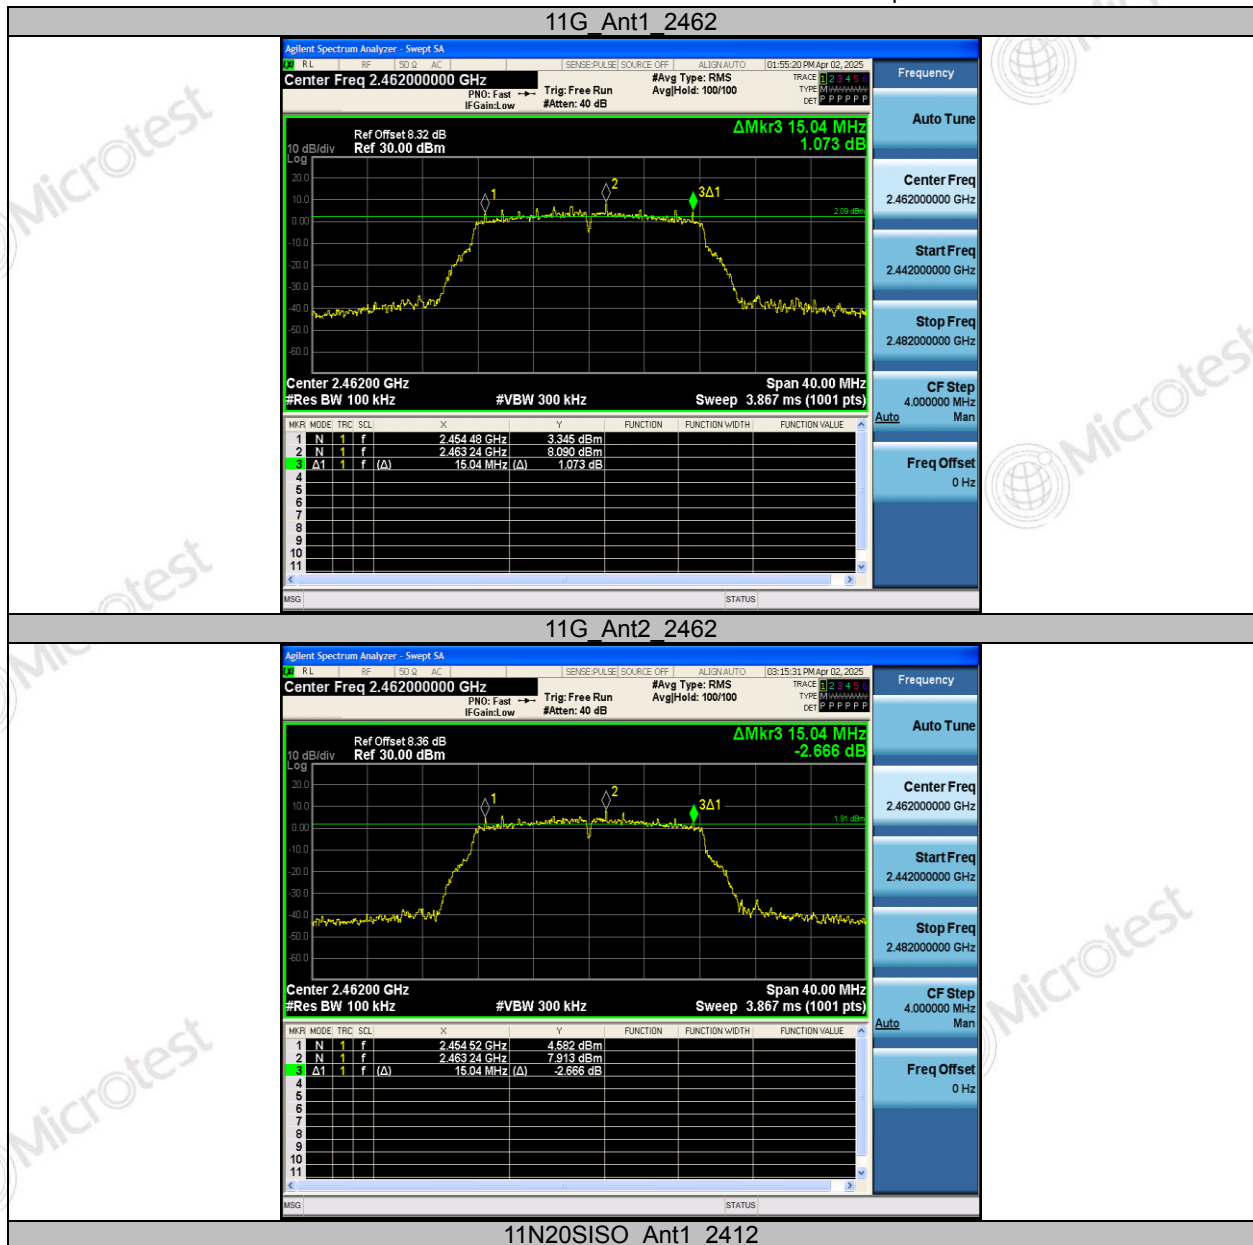


TEST REPORT

Report No.: MTi250117022-0102E3

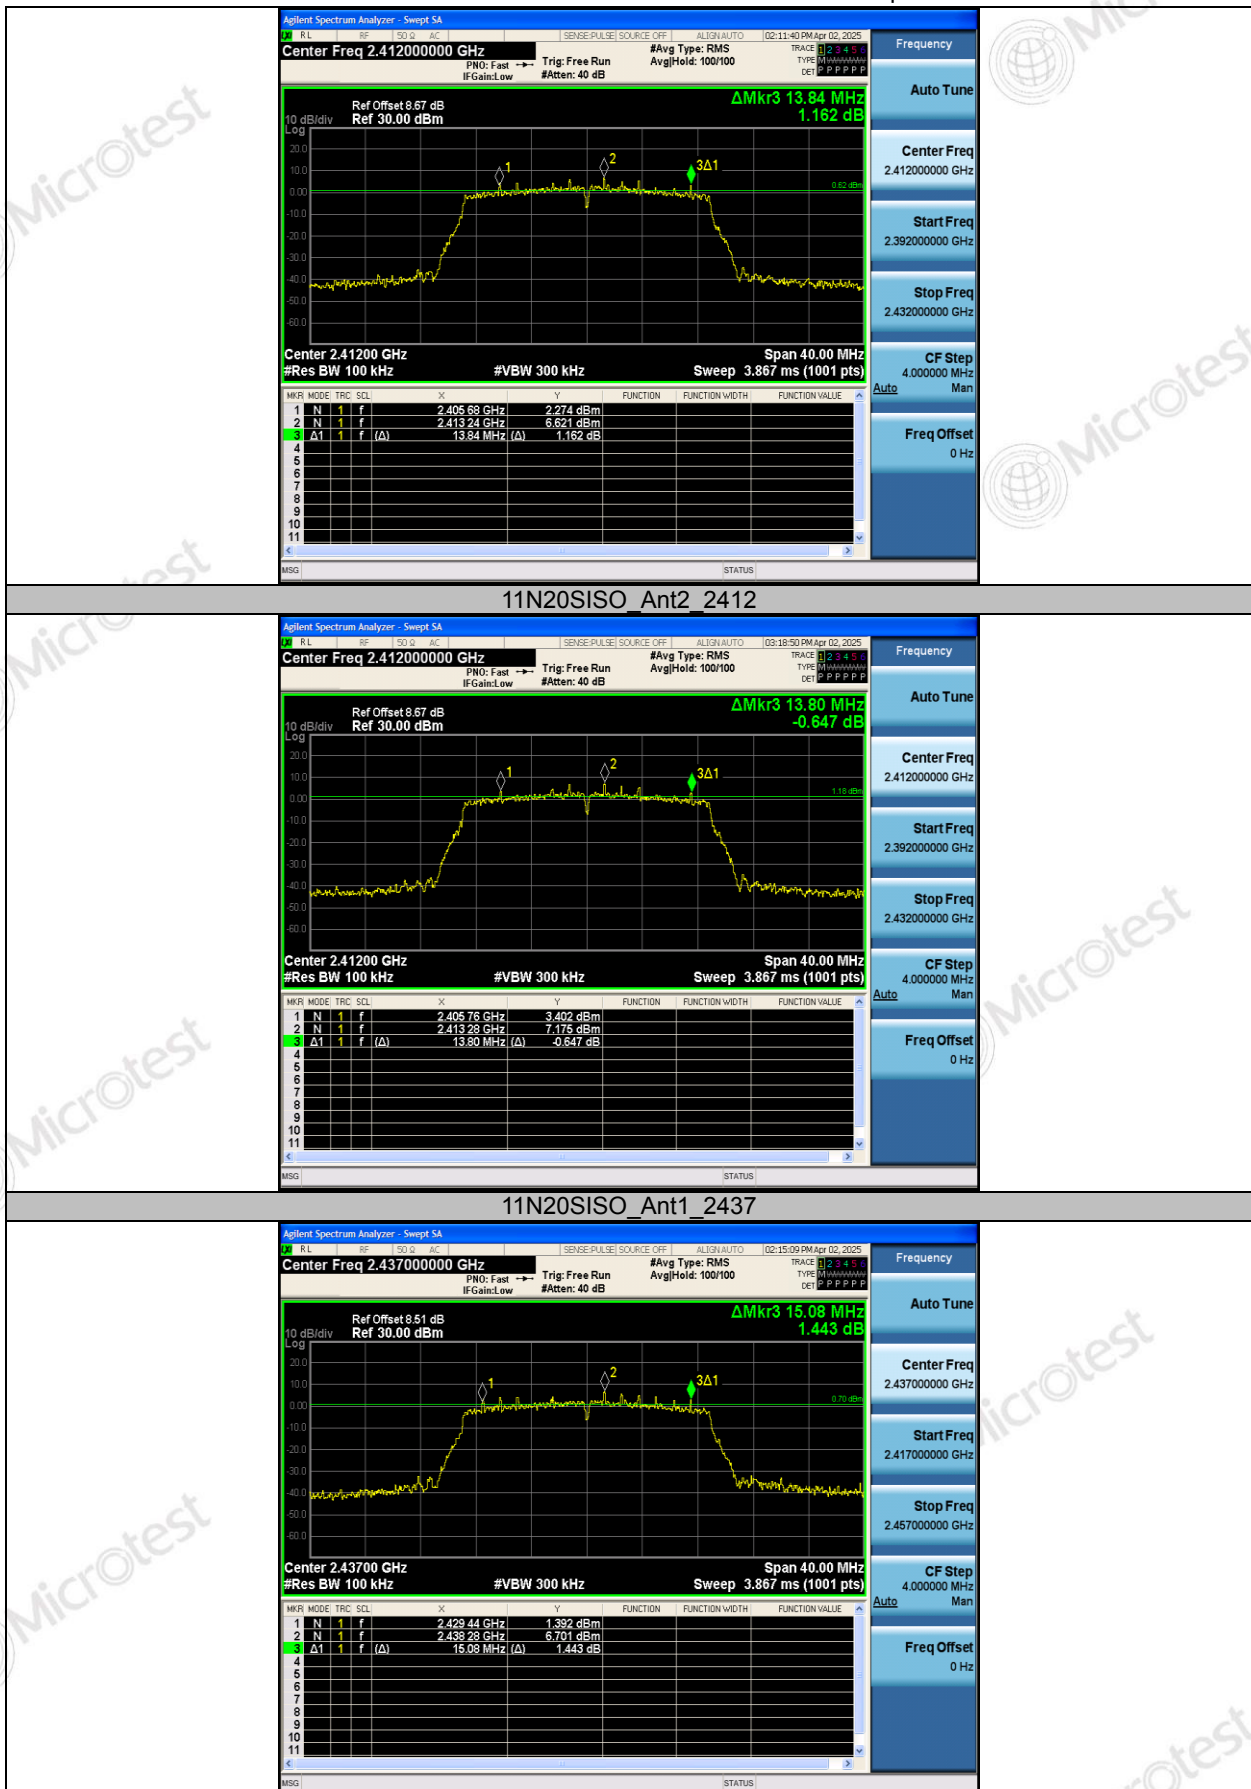


TEST REPORT

Report No.: MTi250117022-0102E3

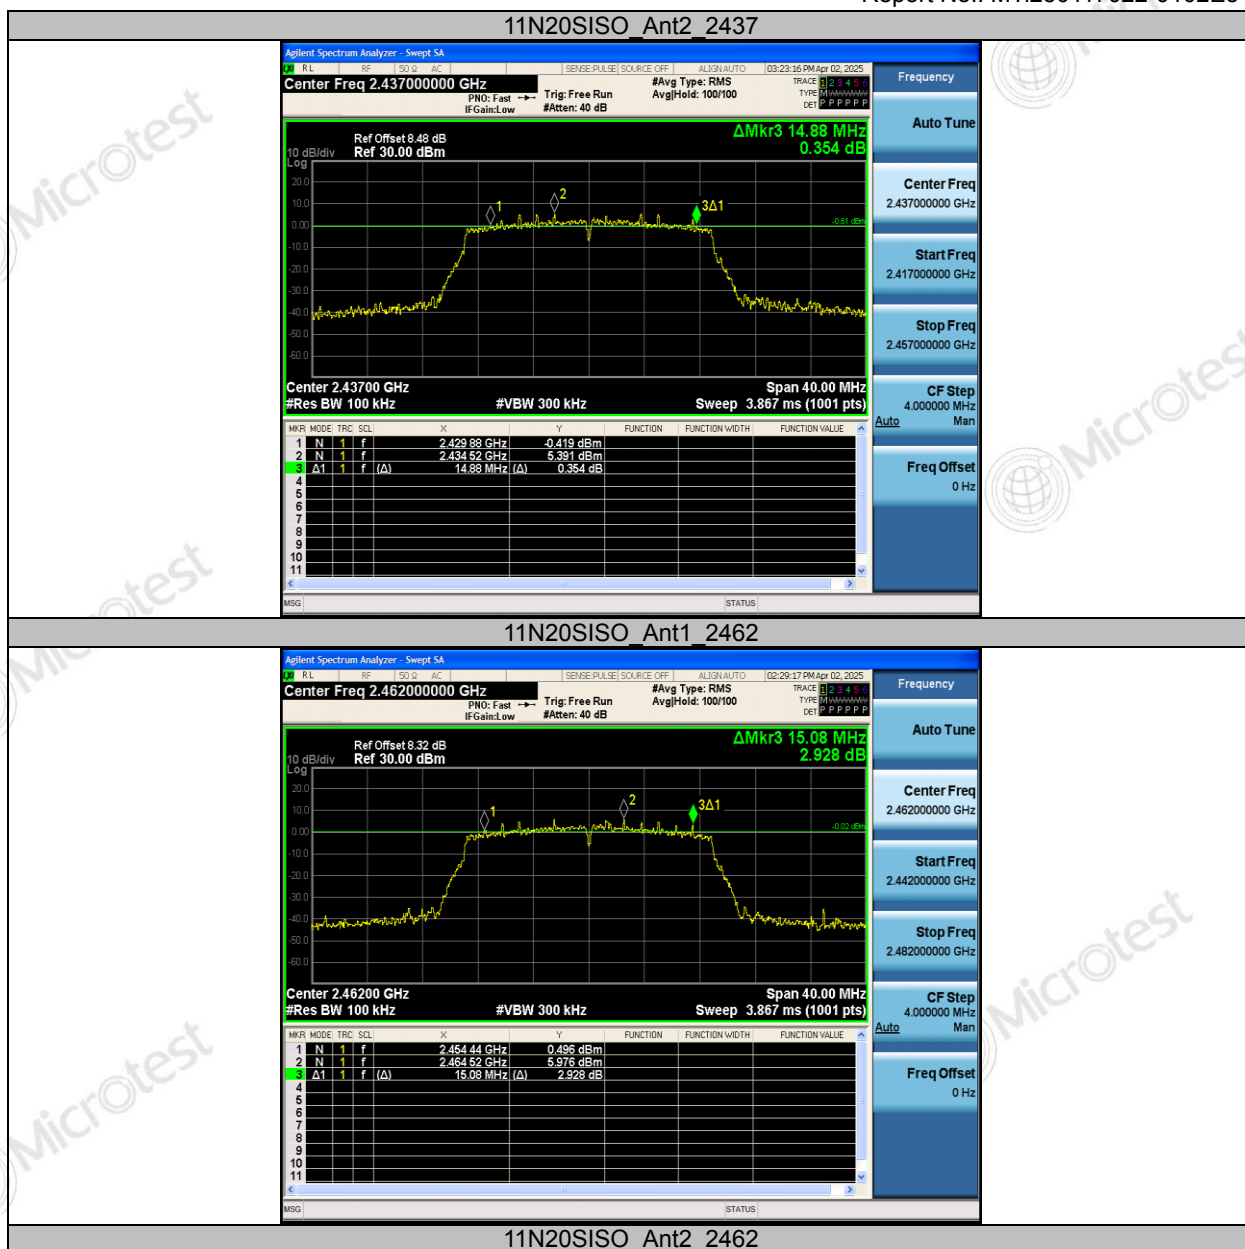


TEST REPORT

Report No.: MTi250117022-0102E3

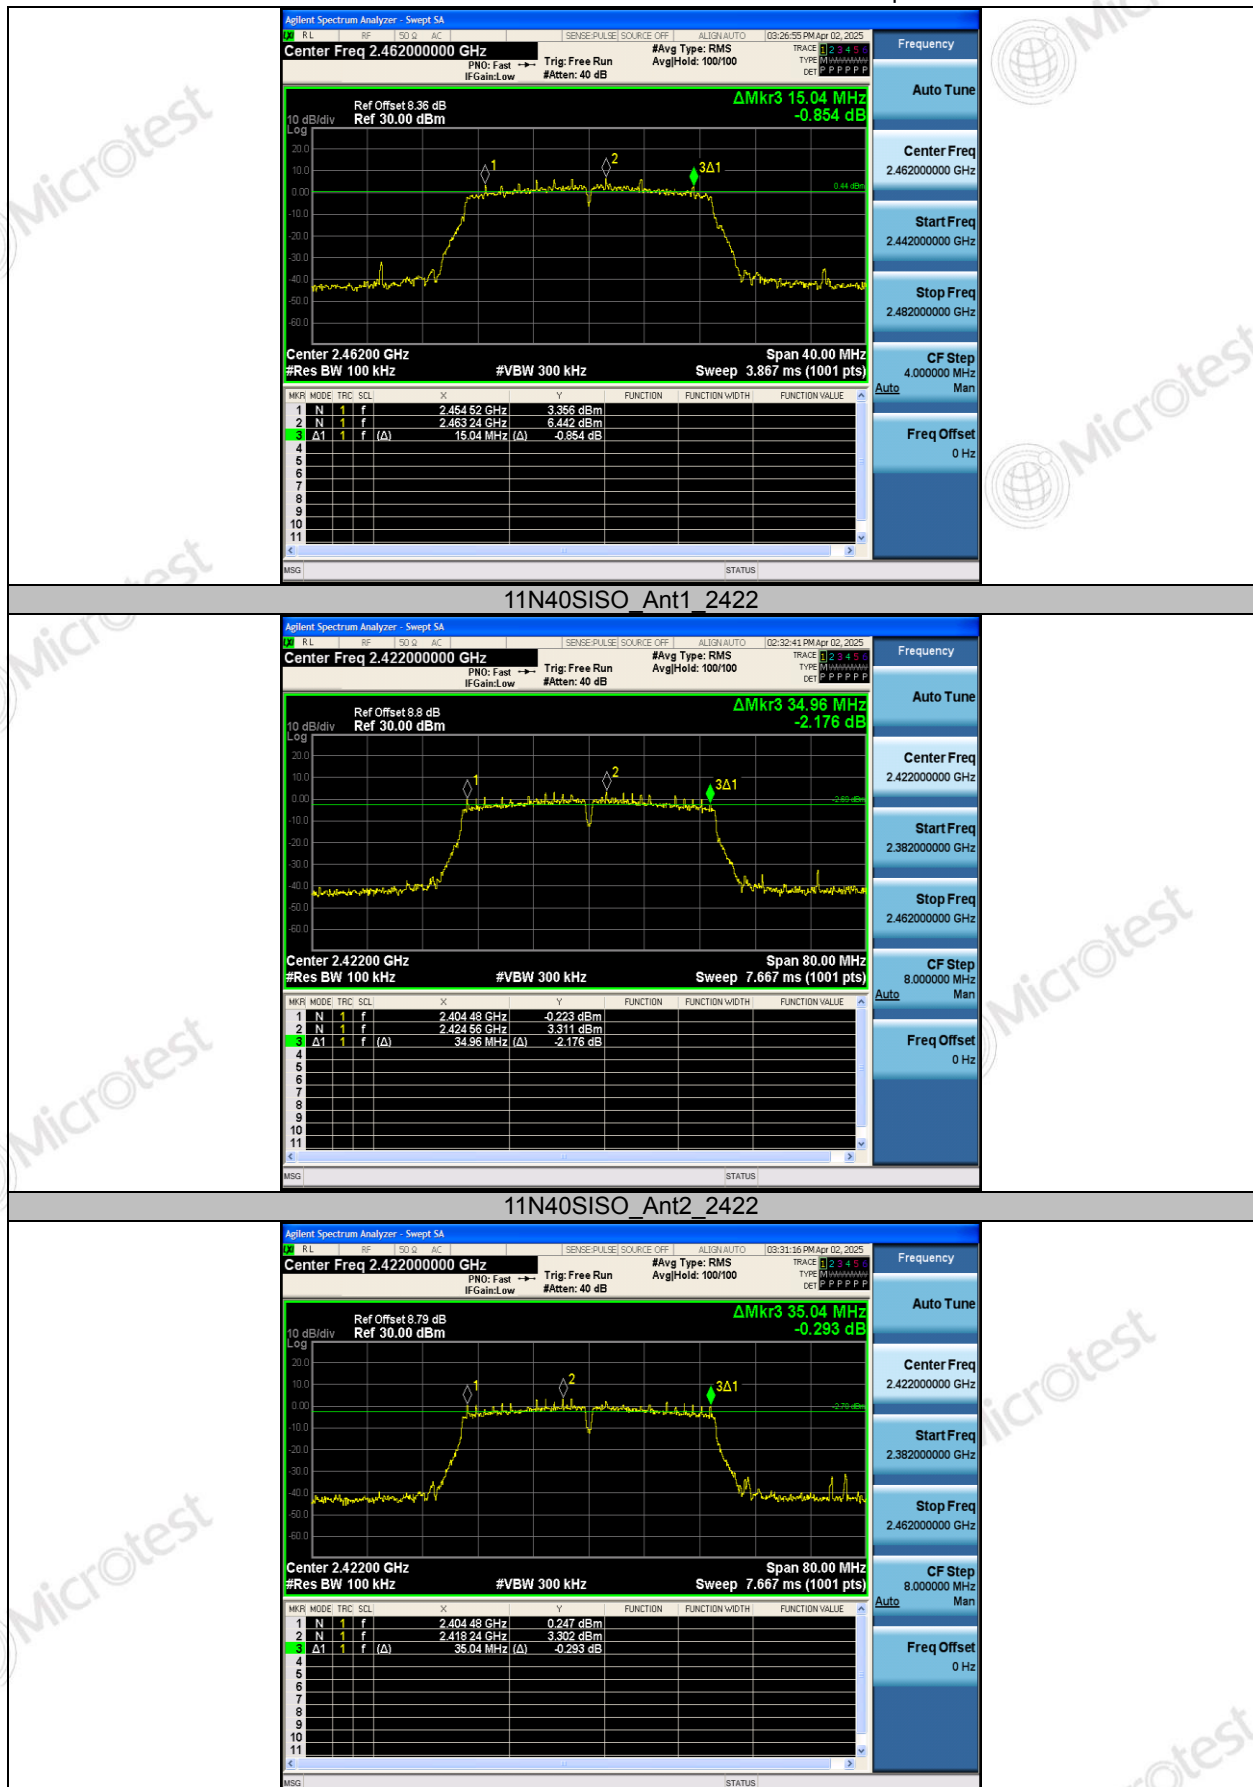


TEST REPORT

Report No.: MTi250117022-0102E3

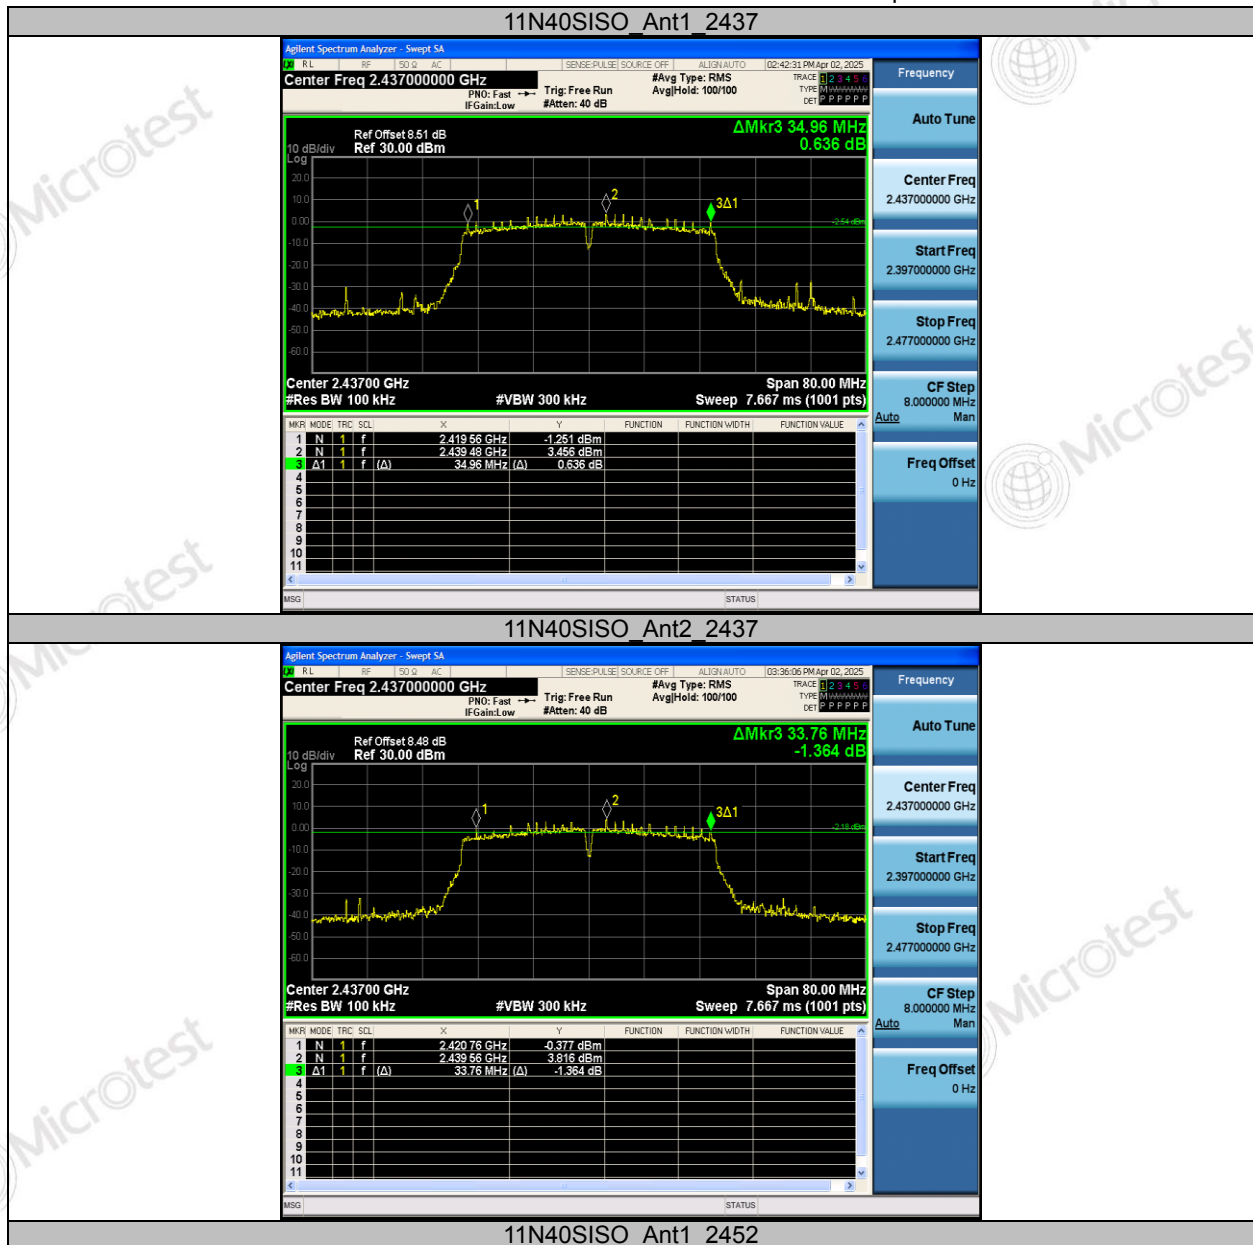

TEST REPORT

Report No.: MTi250117022-0102E3

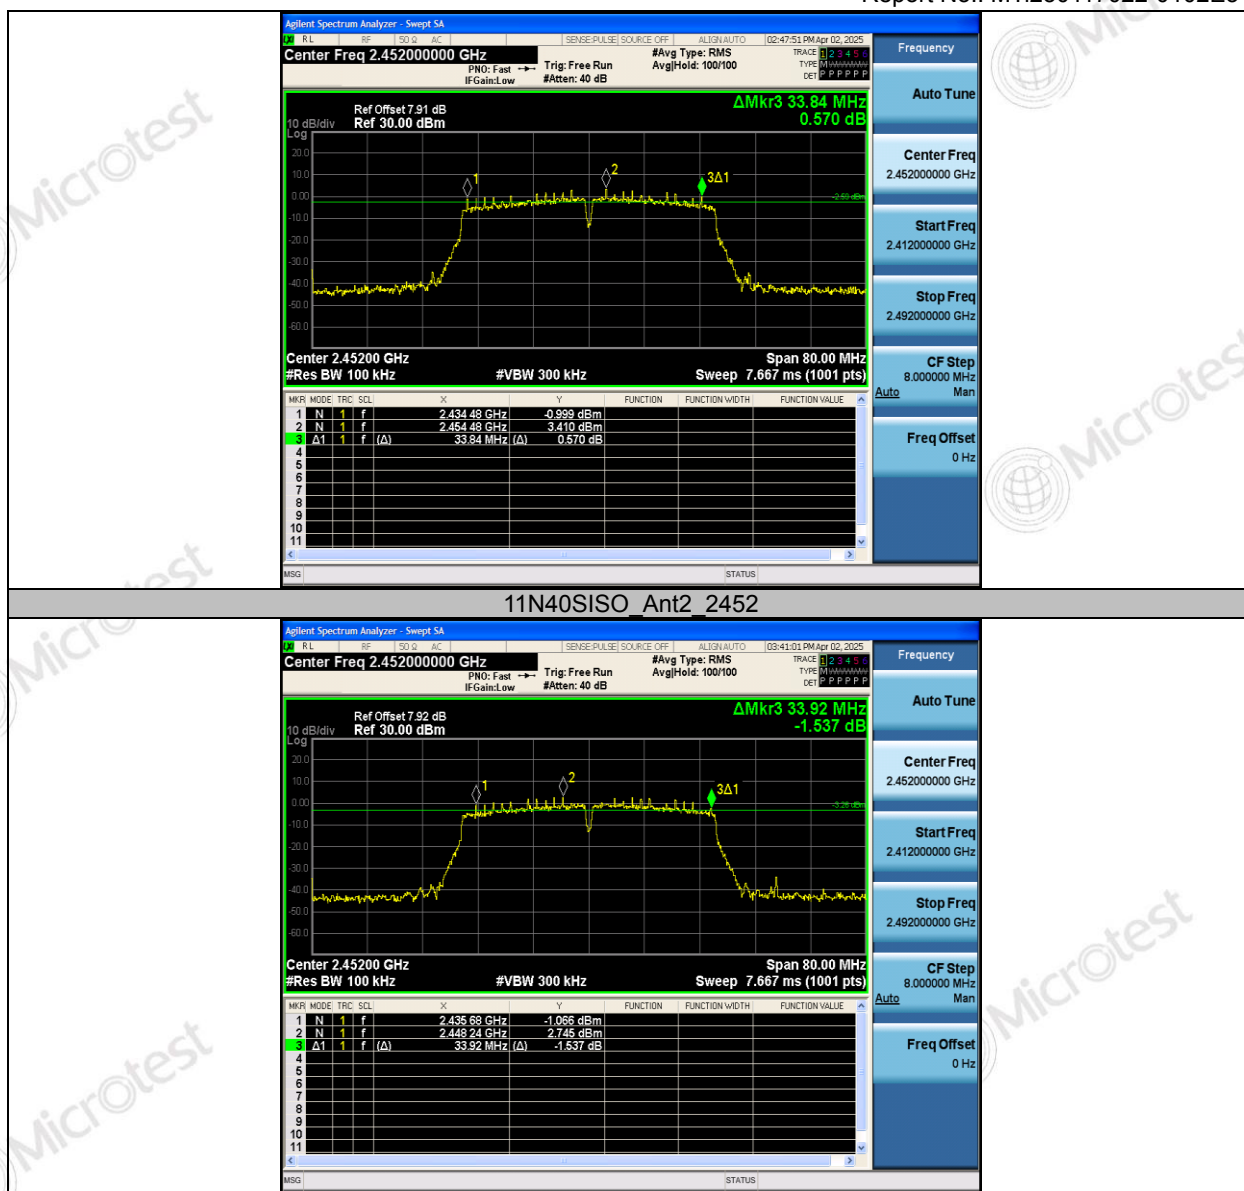

TEST REPORT

Report No.: MTi250117022-0102E3

Appendix B: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	20.94	≤30.00	PASS
	Ant2	2412	20.98	≤30.00	PASS
	Ant1	2437	20.78	≤30.00	PASS
	Ant2	2437	20.97	≤30.00	PASS
	Ant1	2462	21.32	≤30.00	PASS
	Ant2	2462	21.45	≤30.00	PASS
11G	Ant1	2412	24.42	≤30.00	PASS
	Ant2	2412	24.80	≤30.00	PASS
	Ant1	2437	24.13	≤30.00	PASS
	Ant2	2437	24.54	≤30.00	PASS
	Ant1	2462	24.82	≤30.00	PASS
	Ant2	2462	25.13	≤30.00	PASS
11N20SISO	Ant1	2412	23.30	≤30.00	PASS
	Ant2	2412	23.40	≤30.00	PASS
	Ant1	2437	23.11	≤30.00	PASS
	Ant2	2437	23.24	≤30.00	PASS
	Ant1	2462	23.68	≤30.00	PASS
	Ant2	2462	23.98	≤30.00	PASS
11N40SISO	Ant1	2422	23.75	≤30.00	PASS
	Ant2	2422	23.90	≤30.00	PASS
	Ant1	2437	23.46	≤30.00	PASS
	Ant2	2437	23.60	≤30.00	PASS
	Ant1	2452	23.14	≤30.00	PASS
	Ant2	2452	23.38	≤30.00	PASS
11N20MIMO	Ant1	2412	23.53	≤30.00	PASS
	Ant2	2412	24.08	≤30.00	PASS
	total	2412	26.82	≤28.07	PASS
	Ant1	2437	23.16	≤30.00	PASS
	Ant2	2437	23.56	≤30.00	PASS
	total	2437	26.37	≤28.07	PASS
	Ant1	2462	23.35	≤30.00	PASS
	Ant2	2462	24.34	≤30.00	PASS
	total	2462	26.88	≤28.07	PASS
11N40MIMO	Ant1	2422	23.77	≤30.00	PASS
	Ant2	2422	24.16	≤30.00	PASS
	total	2422	26.98	≤28.07	PASS
	Ant1	2437	23.44	≤30.00	PASS
	Ant2	2437	24.06	≤30.00	PASS
	total	2437	26.77	≤28.07	PASS
	Ant1	2452	23.21	≤30.00	PASS
	Ant2	2452	23.70	≤30.00	PASS
	total	2452	26.47	≤28.07	PASS

TEST REPORT

Report No.: MTi250117022-0102E3

Appendix C: Maximum power spectral density

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	6.94	≤8.00	PASS
	Ant2	2412	5.59	≤8.00	PASS
	Ant1	2437	7.65	≤8.00	PASS
	Ant2	2437	5.61	≤8.00	PASS
	Ant1	2462	7.69	≤8.00	PASS
	Ant2	2462	6.17	≤8.00	PASS
11G	Ant1	2412	-7.65	≤8.00	PASS
	Ant2	2412	-7.11	≤8.00	PASS
	Ant1	2437	-9.38	≤8.00	PASS
	Ant2	2437	-8.33	≤8.00	PASS
	Ant1	2462	-8.29	≤8.00	PASS
	Ant2	2462	-7.22	≤8.00	PASS
11N20SISO	Ant1	2412	-8.34	≤8.00	PASS
	Ant2	2412	-7.70	≤8.00	PASS
	Ant1	2437	-9.22	≤8.00	PASS
	Ant2	2437	-9.55	≤8.00	PASS
	Ant1	2462	-8.13	≤8.00	PASS
	Ant2	2462	-7.18	≤8.00	PASS
11N40SISO	Ant1	2422	-11.30	≤8.00	PASS
	Ant2	2422	-11.05	≤8.00	PASS
	Ant1	2437	-10.98	≤8.00	PASS
	Ant2	2437	-11.44	≤8.00	PASS
	Ant1	2452	-11.92	≤8.00	PASS
	Ant2	2452	-12.26	≤8.00	PASS
11N20MIMO	Ant1	2412	-9.25	≤8.00	PASS
	Ant2	2412	-8.03	≤8.00	PASS
	total	2412	-5.59	≤6.07	PASS
	Ant1	2437	-8.08	≤8.00	PASS
	Ant2	2437	-6.97	≤8.00	PASS
	total	2437	-4.48	≤6.07	PASS
	Ant1	2462	-8.36	≤8.00	PASS
	Ant2	2462	-7.89	≤8.00	PASS
	total	2462	-5.11	≤6.07	PASS
11N40MIMO	Ant1	2422	-12.01	≤8.00	PASS
	Ant2	2422	-11.01	≤8.00	PASS
	total	2422	-8.47	≤6.07	PASS
	Ant1	2437	-11.02	≤8.00	PASS
	Ant2	2437	-11.36	≤8.00	PASS
	total	2437	-8.18	≤6.07	PASS
	Ant1	2452	-11.80	≤8.00	PASS
	Ant2	2452	-11.63	≤8.00	PASS
	total	2452	-8.70	≤6.07	PASS

TEST REPORT

Report No.: MTi250117022-0102E3

Test Graphs

