



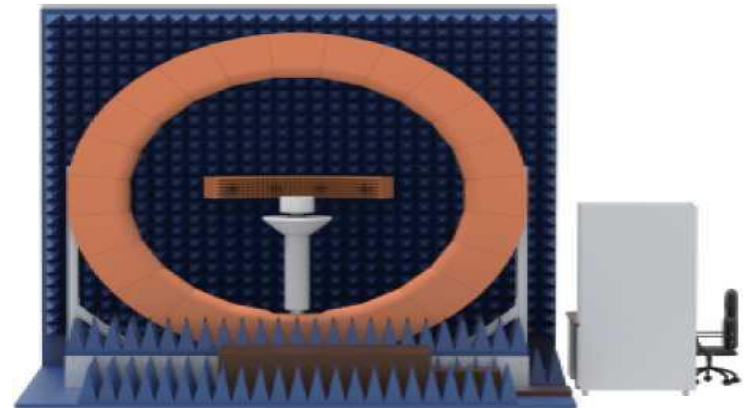

Customer	佳利得
Project	991
Antenna Revision	A0
Prepared by	18814303605
Checked by	
Date :	2025. 04. 15

2. Test System

Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5071B
OTA Test	TRP&TIS	Agilent 8960 & CMW500 STIMO
Gain & Efficiency	Gain & Efficiency	SATIMO Agilent 5071C

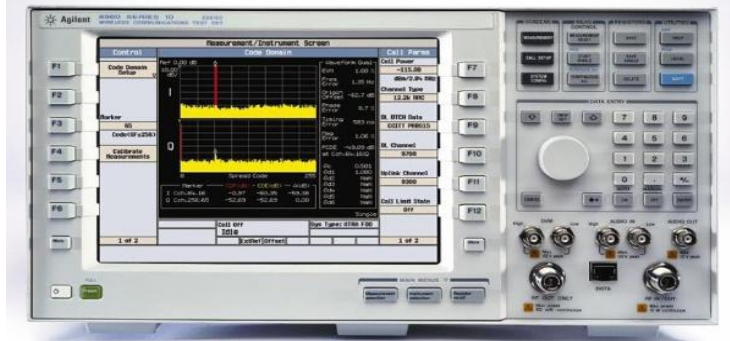

Purpose

This report is to measure the performance of antenna for 991 The antenna operating frequency at 2400MHz0-2500MHz 。 All test data are showed as below.

Content

1. Product Overview & Dimension
2. Test system
3. Test Result

3.1 S11 Parameter

3.2 Gain & Efficiency

3.3 2D Pattern

4. OTA


4.1 Test Result

4.2 2D Pattern




匹配图

L

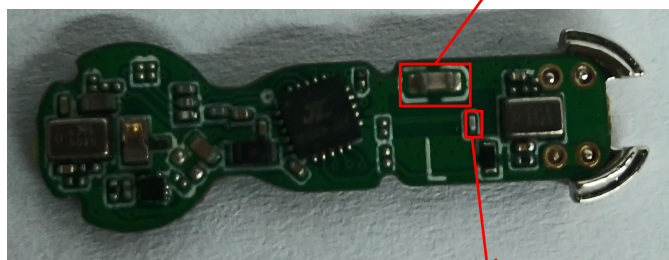

D06


1P

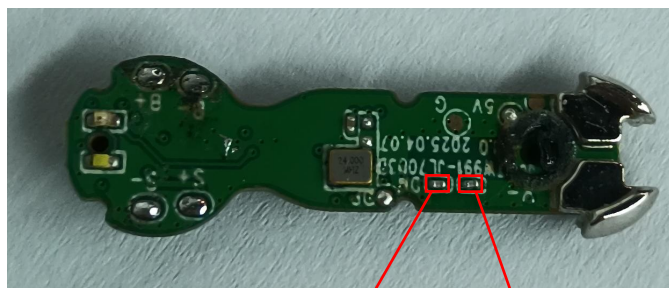

0.8P


1P

R

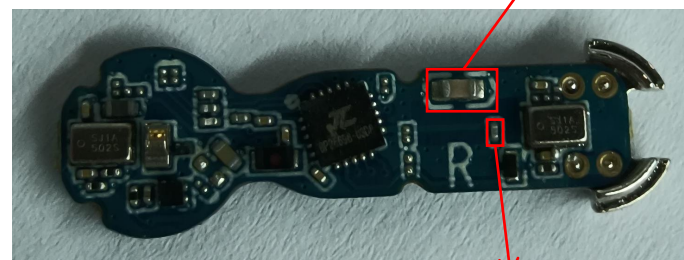

D06

1P

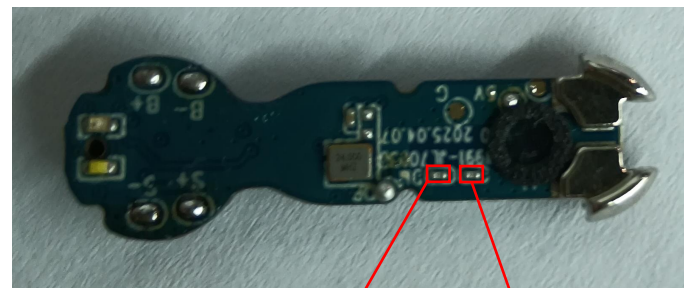


0.8P

1.2P

Antenna size diagram


产品规格 Product Specification

尺寸规格 (mm) Specification: Unit (mm)

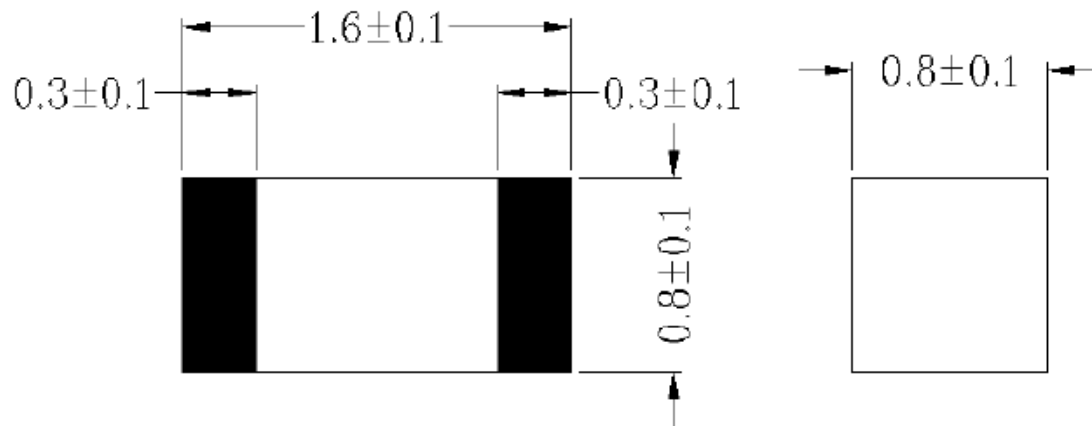

3.1 Test Result


1 .S11 Parameter-VSWR

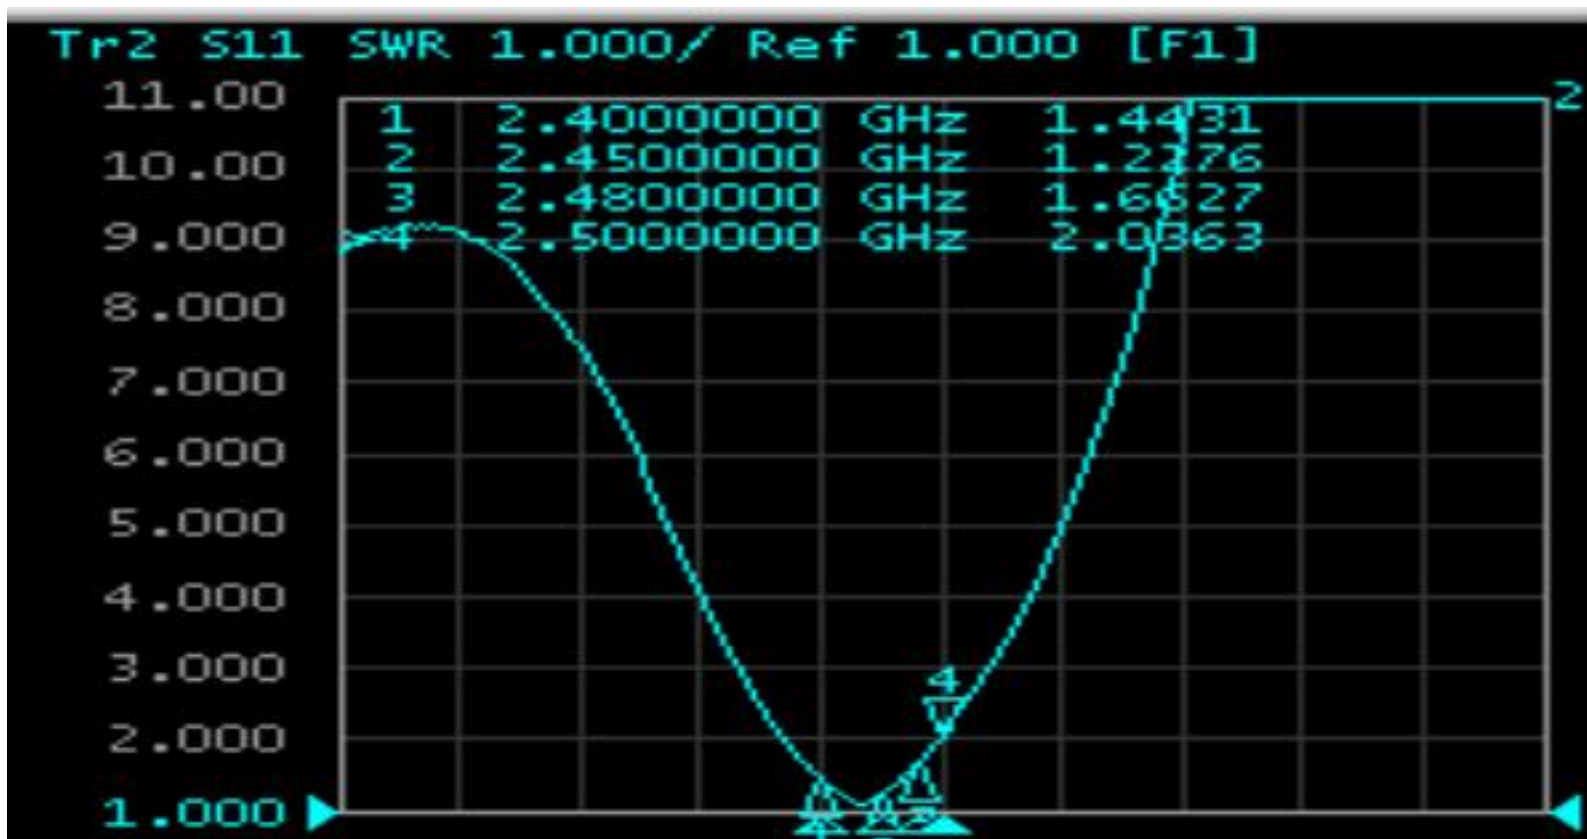

Frequency (MHz)	2400	2450	2480	2500
VSWR	1.44	1.22	1.66	2.03

3.1 Test Result


2. S11 Parameter-Log Mag

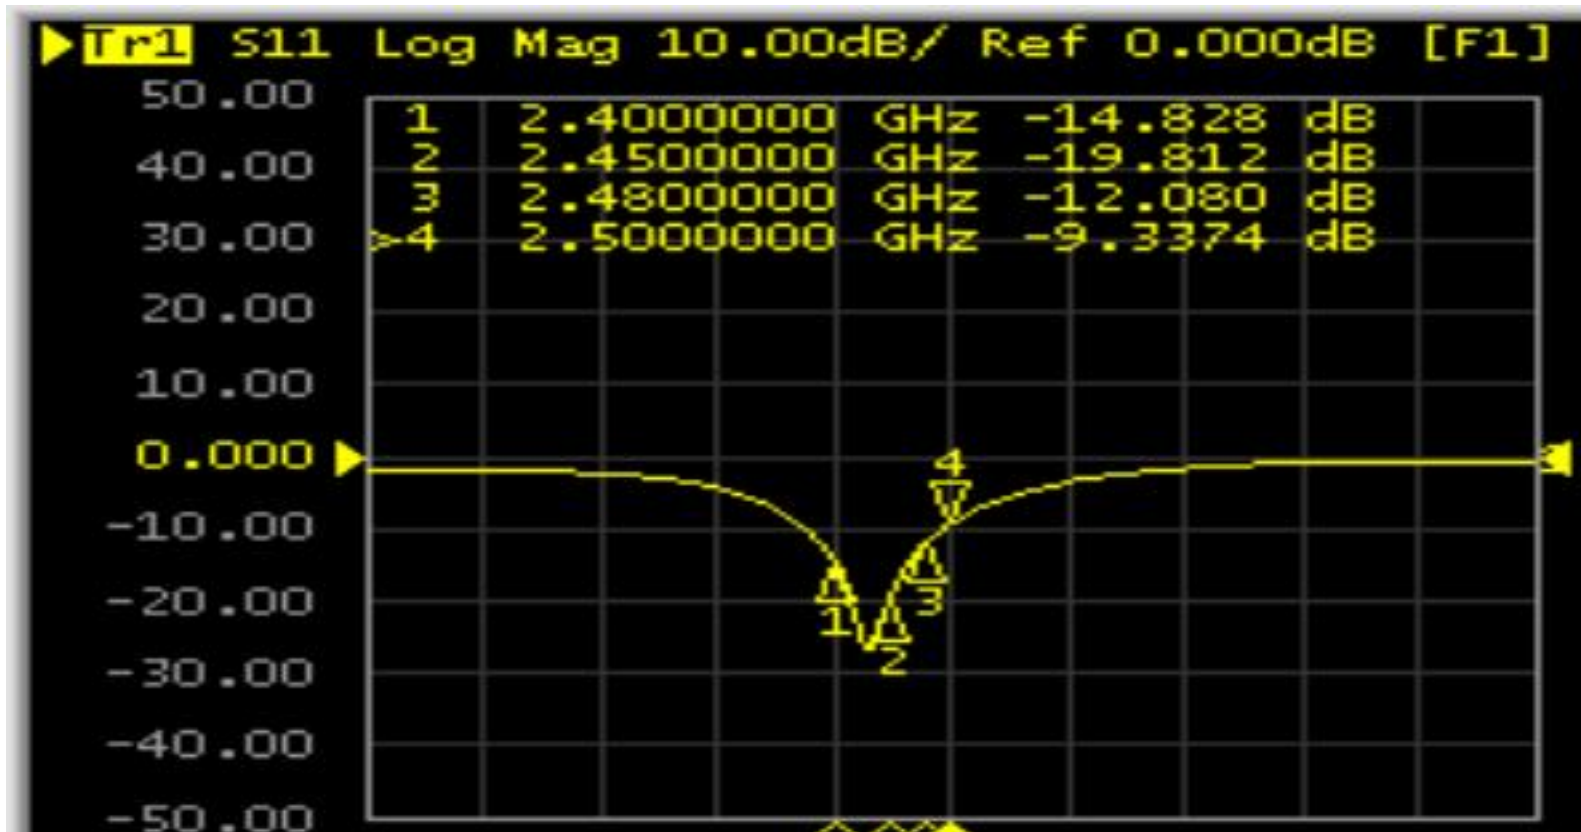

Frequency (MHz)	2400	2450	2480	2500
Log Mag	-14.82	-19.81	-12.08	-9.33

3.1 Test Result

3.S11 Parameter-Smith

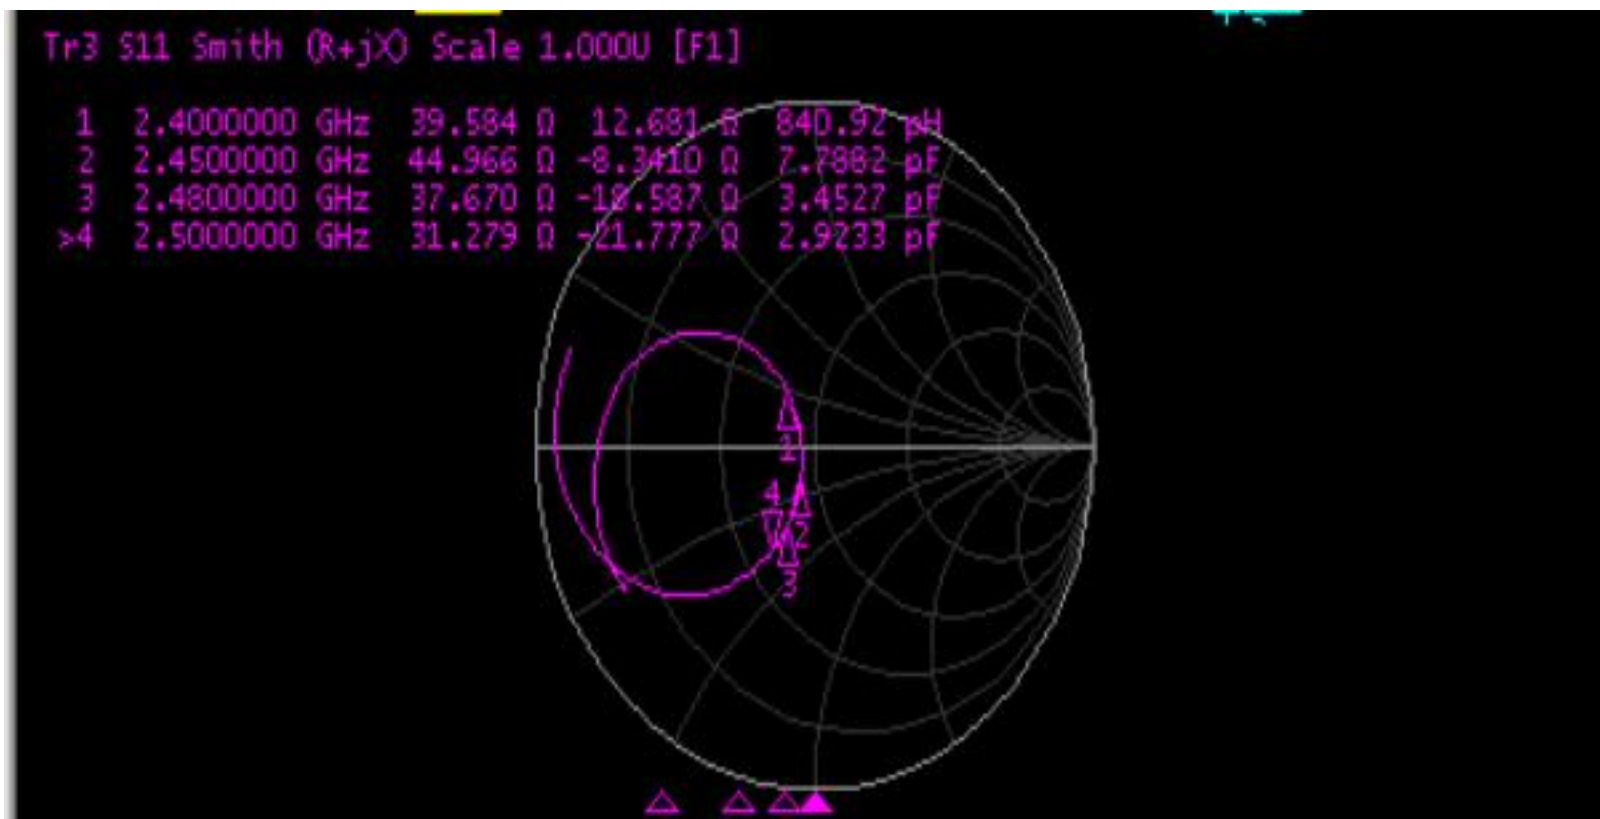

Frequency (MHz)	2400	2450	2480	2500
Smi th(Ω)	39.58	44.96	37.67	31.27

3.2 Test Result


1 Gain & Efficiency—**ANT**

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	45.51	2.61
2410	44.67	2.91
2420	43.93	3.17
2430	43.41	3.57
2440	42.97	3.98
2450	44.19	4.45
2460	43.80	4.67
2470	43.77	4.85
2480	43.33	4.88


3.3 Test Result

1 2D Pattern——BTANT


2400.0MHz Total, Eff: 45.5%

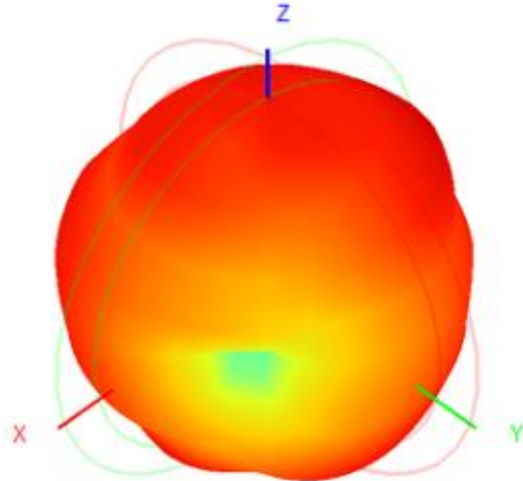

Back View

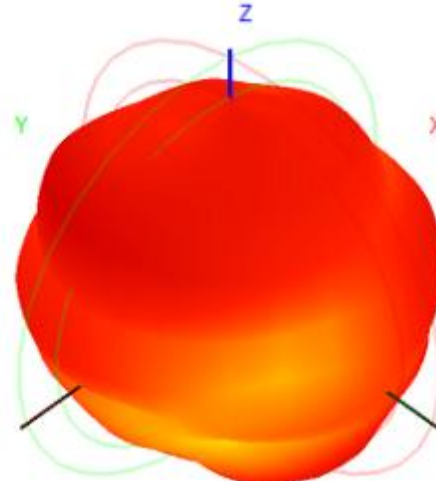


Unit:dBi

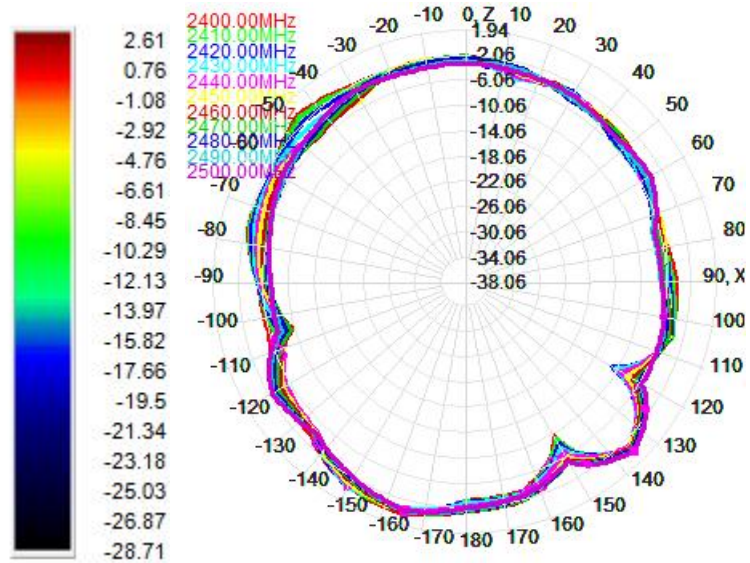



3.3 Test Result

2 2D Pattern—BTANT

2450.0MHz Total, Eff: 44.2%

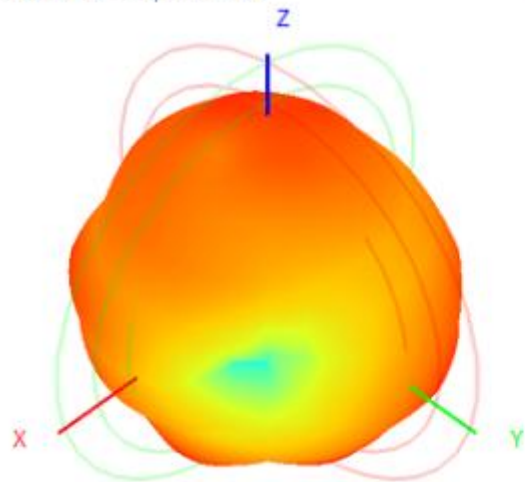


Back View

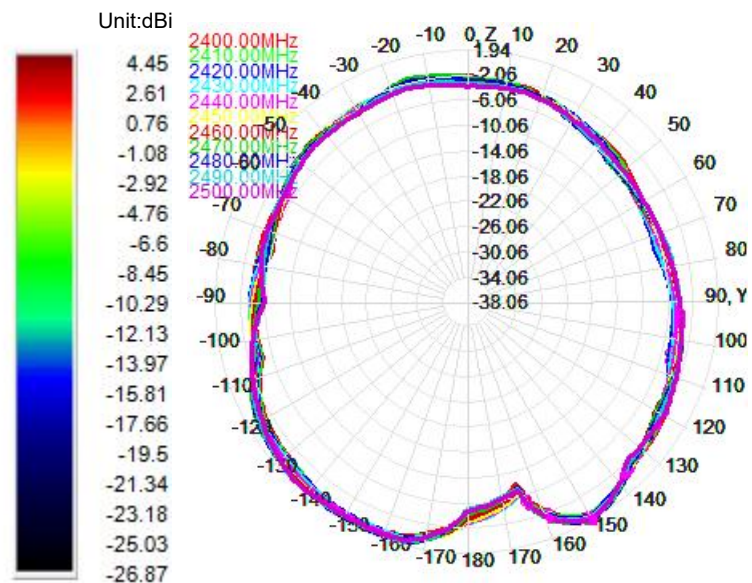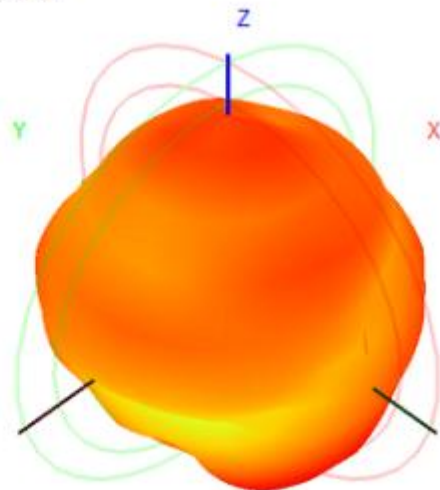



3.3 Test Result

3 2D Pattern——BTANT

2480.0MHz Total, Eff: 43.3%

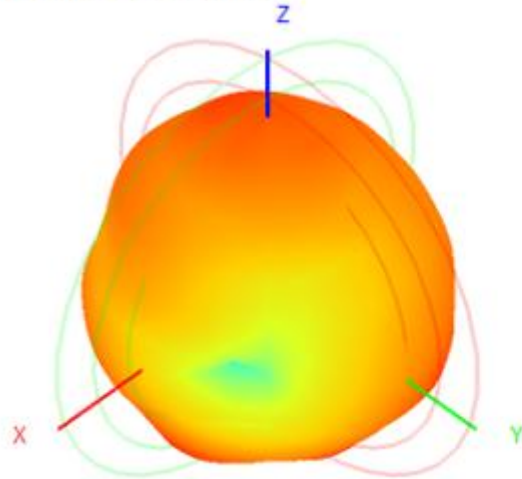

Back View

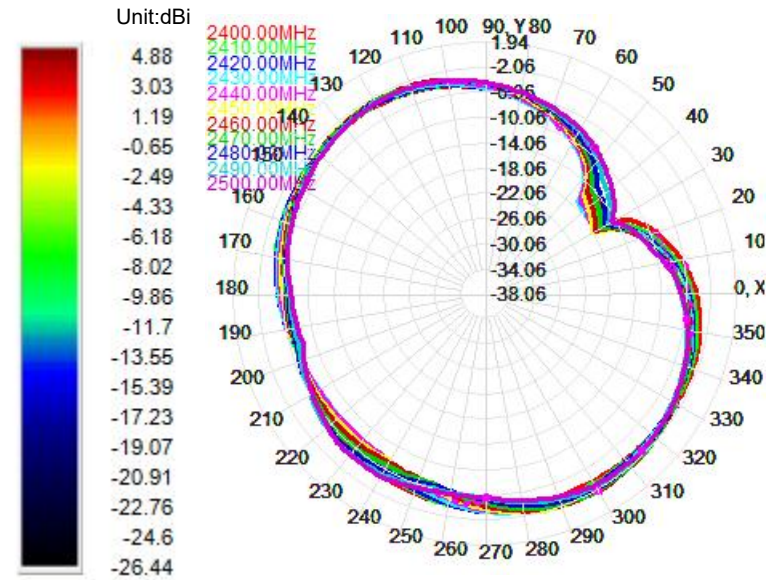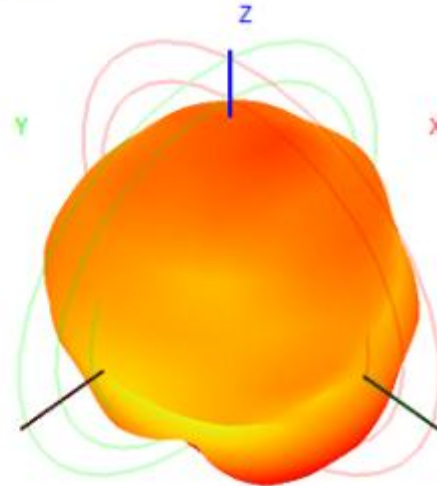







4.1 OTA Data

Test Equipment:	R&S CMW500		
Test Condition:	2 D chamber		
Band	Channel	TRP(dBm)	TIS(dBm)
BT-L	0	4.33	-92.92
	39	4.13	-91.65
	78	3.68	-91.10

4.2 Test Result

1 2D Pattern——**BTANT**







TRP

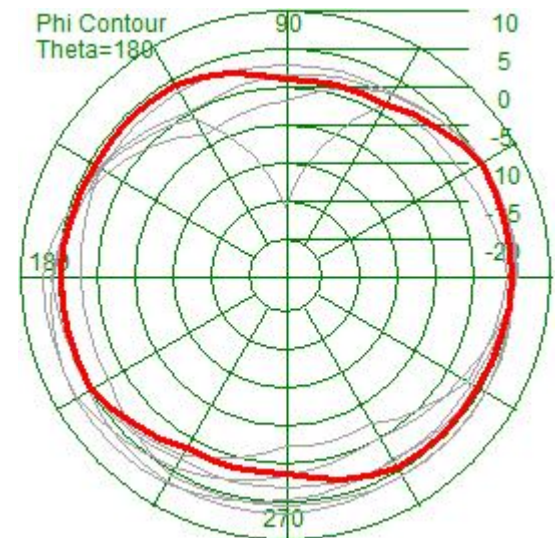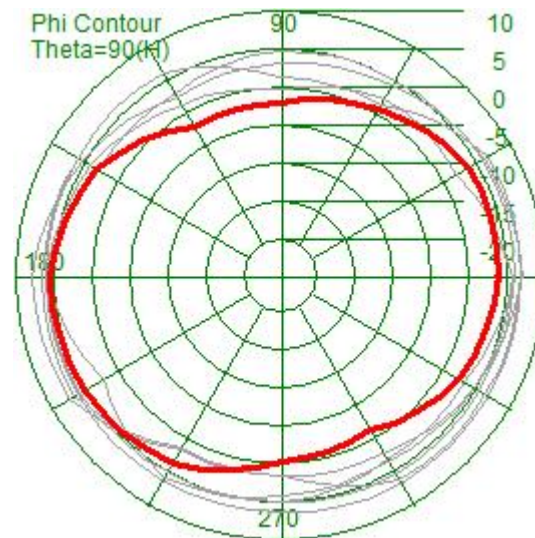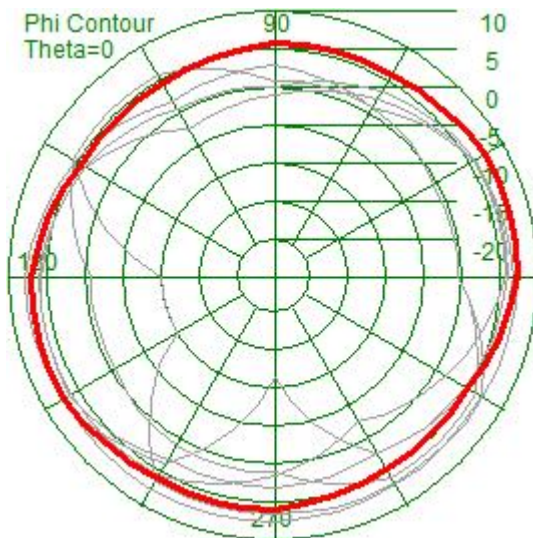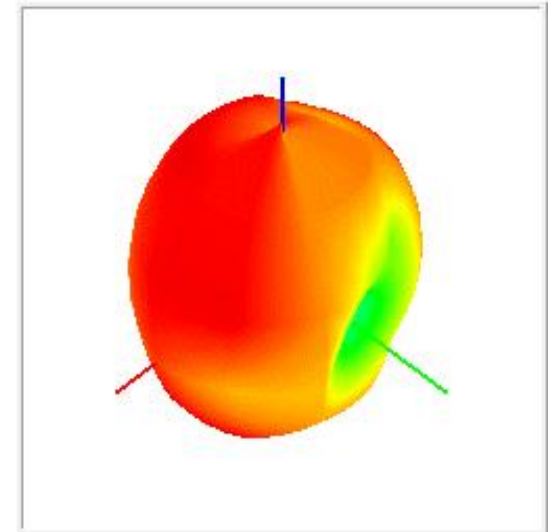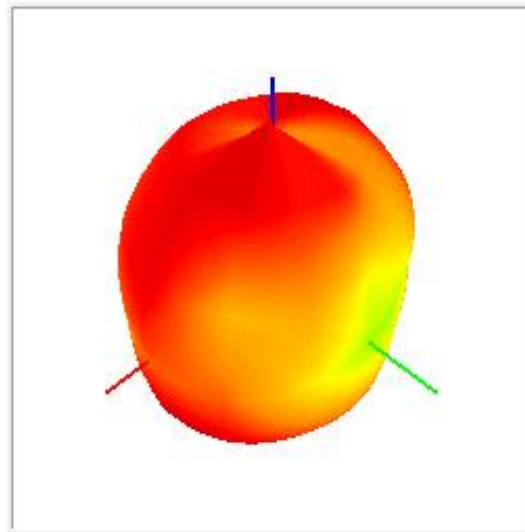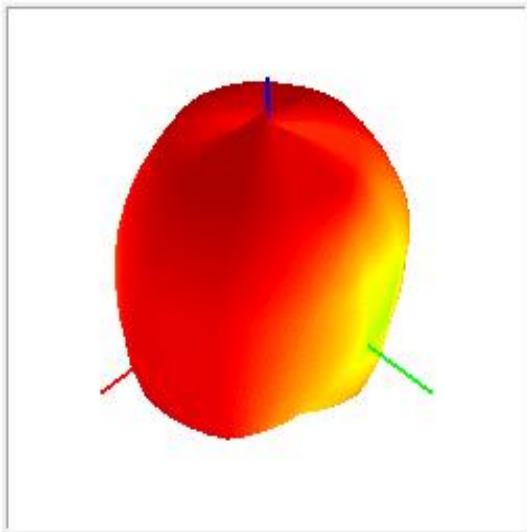

4.2 Test Result

2 2D Pattern——**BTANT**

TIS

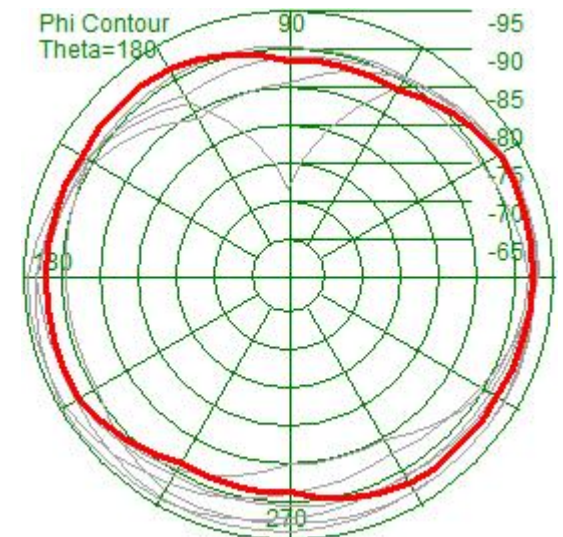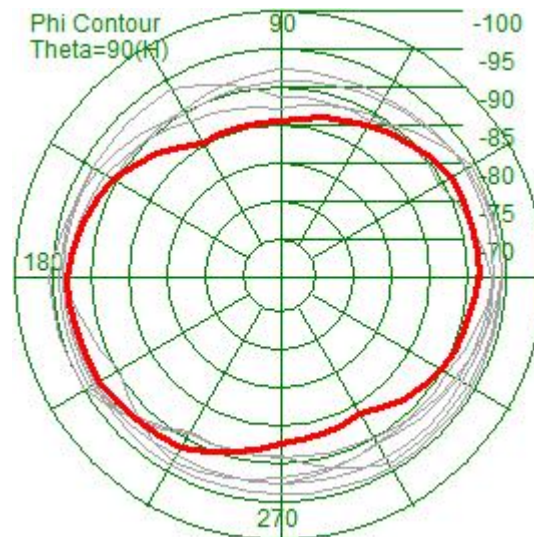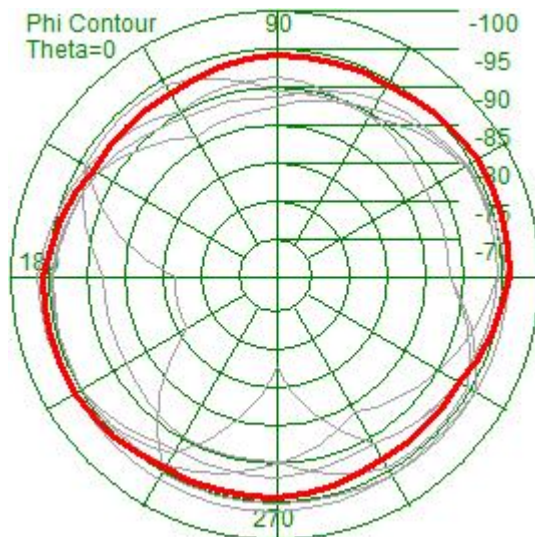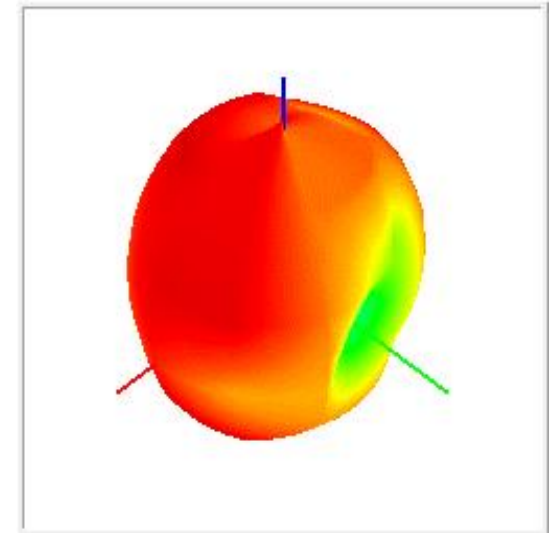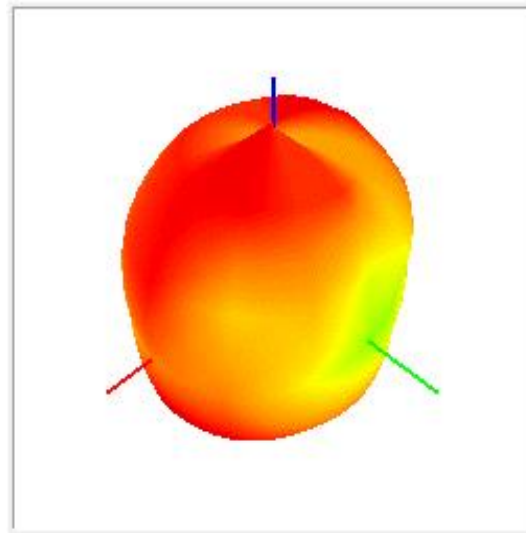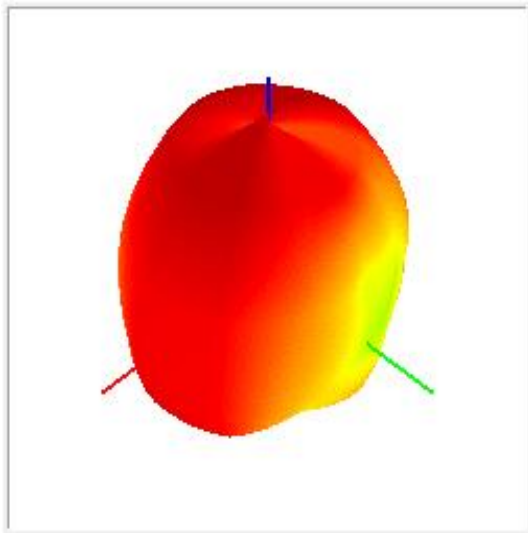

Thank you!