



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4031
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5240MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/08/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT20

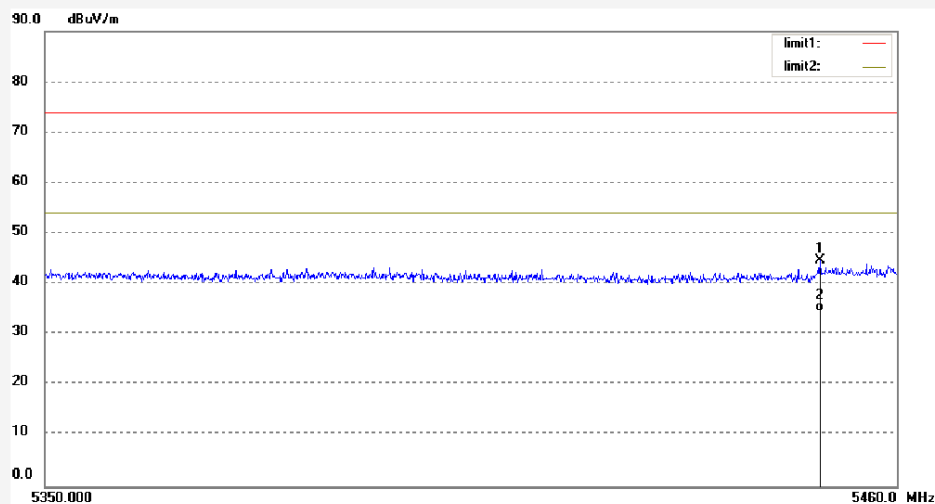

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5450.100	43.69	0.93	44.62	74.00	-29.38	peak			
2	5450.100	33.52	0.93	34.45	54.00	-19.55	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4032
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5240MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/08/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT20

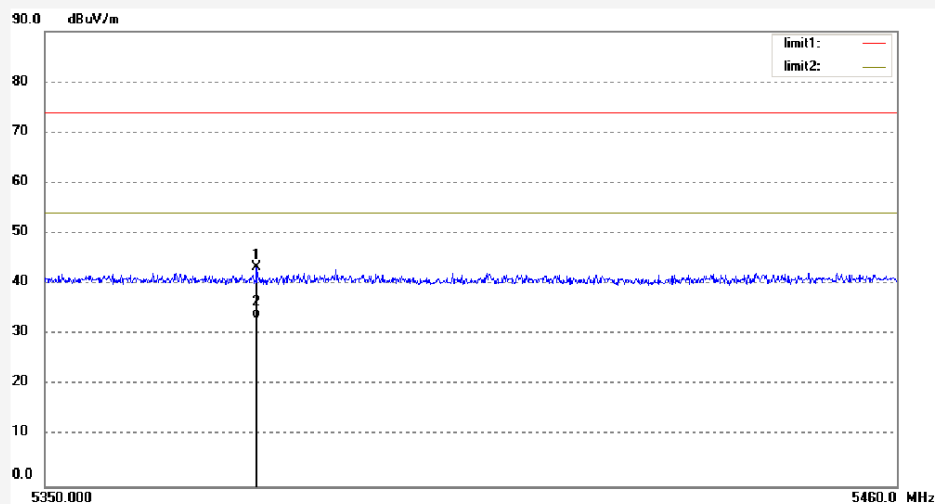

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5377.280	42.67	0.75	43.42	74.00	-30.58	peak			
2	5377.280	32.45	0.75	33.20	54.00	-20.80	AVG			

U-NII-3



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4033

Standard: Band Edge

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Media Player

Mode: TX 5745MHz

Model: P-PLA-103-YIT-02

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/11/08/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note: 802.11n HT20

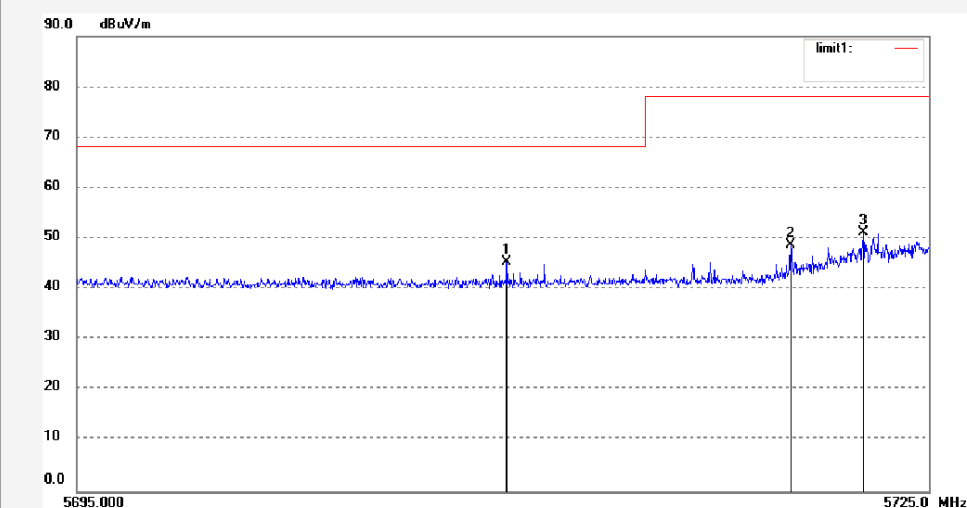

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5710.150	44.21	1.21	45.42	68.23	-22.81	peak			
2	5720.140	47.45	1.29	48.74	78.23	-29.49	peak			
3	5722.690	49.94	1.32	51.26	78.23	-26.97	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4034
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5745MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/08/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT20

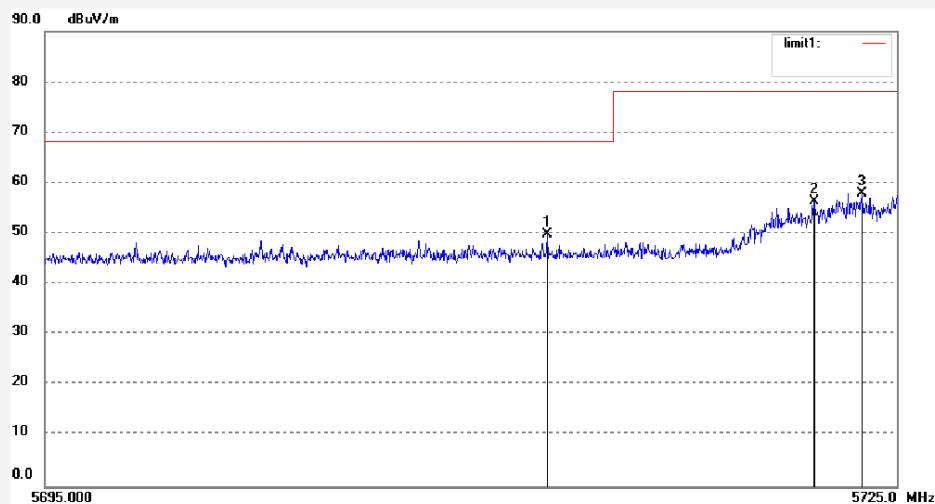

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5712.700	48.52	1.23	49.75	68.23	-18.48	peak			
2	5722.090	54.95	1.32	56.27	78.23	-21.96	peak			
3	5723.770	56.68	1.33	58.01	78.23	-20.22	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4035
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5825MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/08/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT20

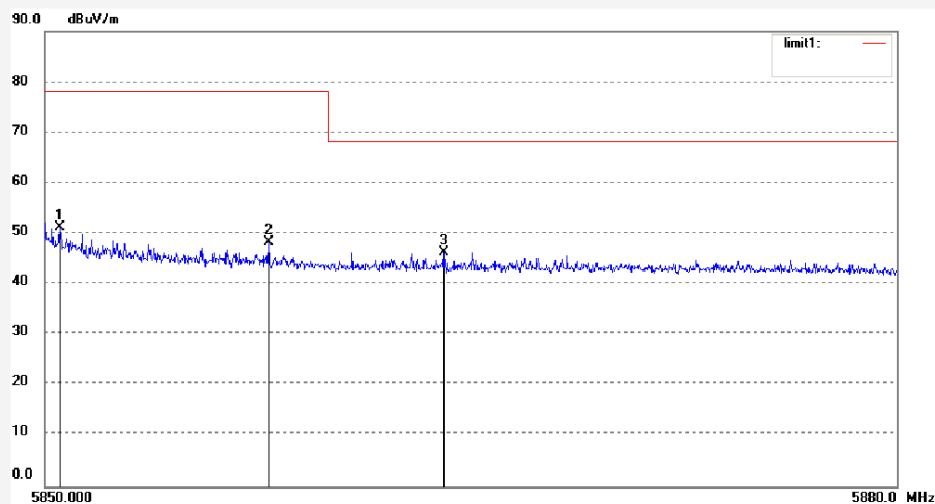

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.540	49.31	1.96	51.27	78.23	-26.96	peak			
2	5857.890	46.38	1.96	48.34	78.23	-29.89	peak			
3	5864.040	44.19	1.95	46.14	68.23	-22.09	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4036
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5825MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/08/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT20

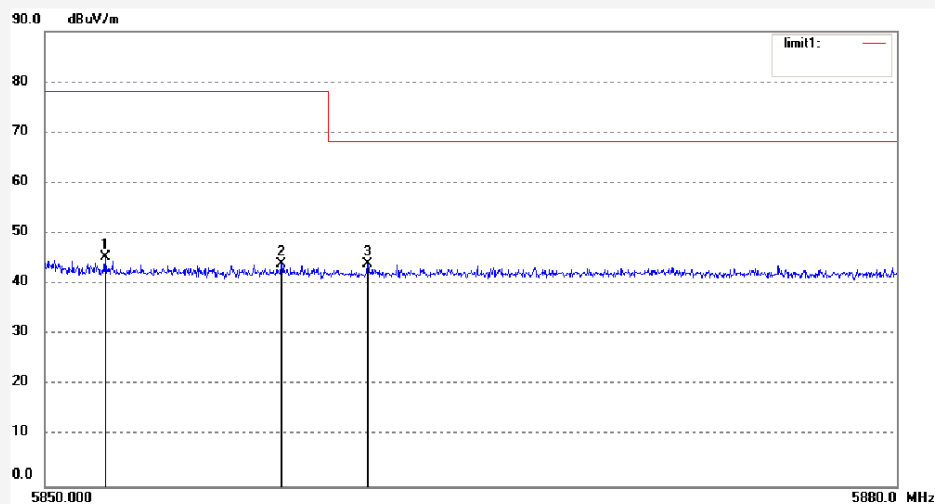

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5852.130	43.43	1.95	45.38	78.23	-32.85	peak			
2	5858.340	42.08	1.95	44.03	78.23	-34.20	peak			
3	5861.370	41.92	1.96	43.88	68.23	-24.35	peak			

**Wi-Fi 802.11 n(HT40) mode, MCS0 Mbps
U-NII-1**




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lgwade #4037
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5190MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT40

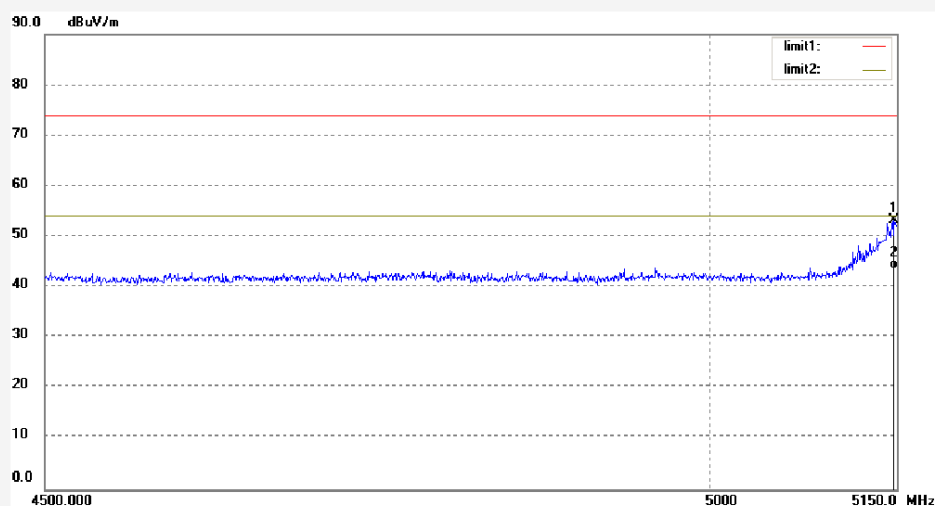

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5148.050	52.66	0.51	53.17	74.00	-20.83	peak			
2	5148.050	43.03	0.51	43.54	54.00	-10.46	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4038
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5190MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT40

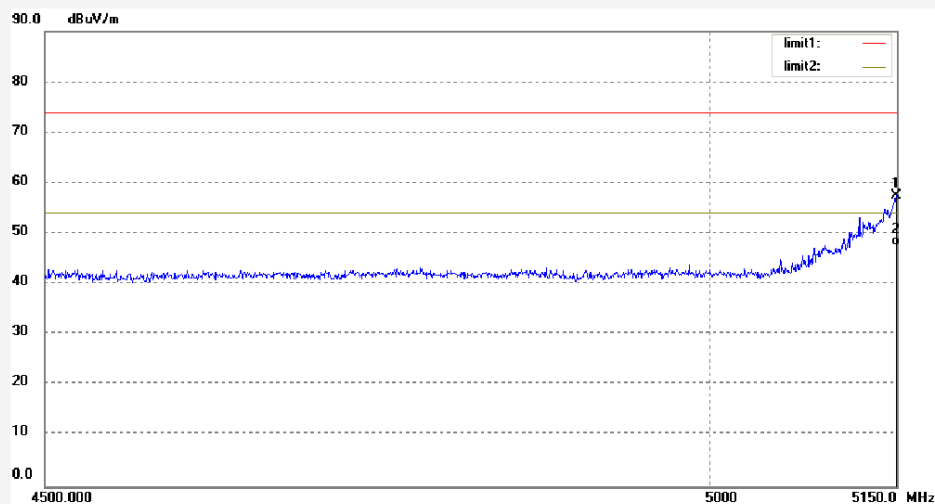

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5149.350	56.88	0.51	57.39	74.00	-16.61	peak			
2	5149.350	47.16	0.51	47.67	54.00	-6.33	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4039
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5230MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT40

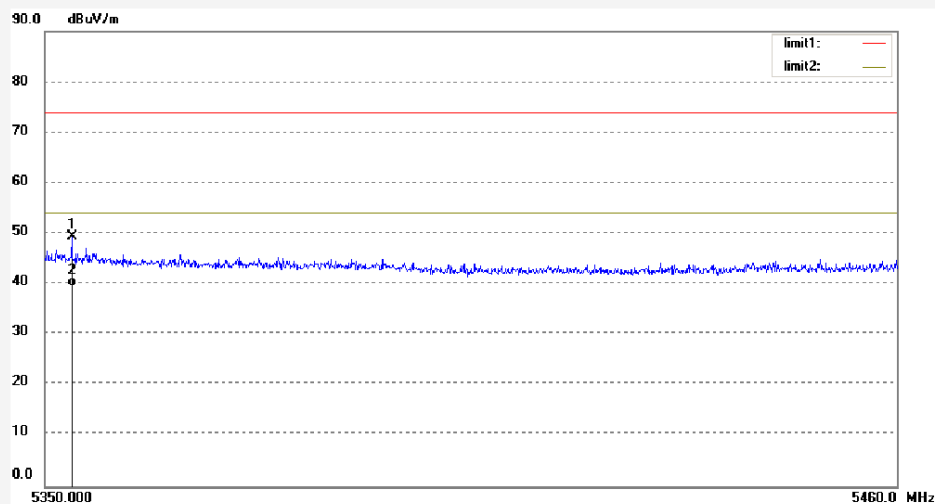

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5353.520	48.55	0.82	49.37	74.00	-24.63	peak			
2	5353.520	38.65	0.82	39.47	54.00	-14.53	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4040
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5230MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT40

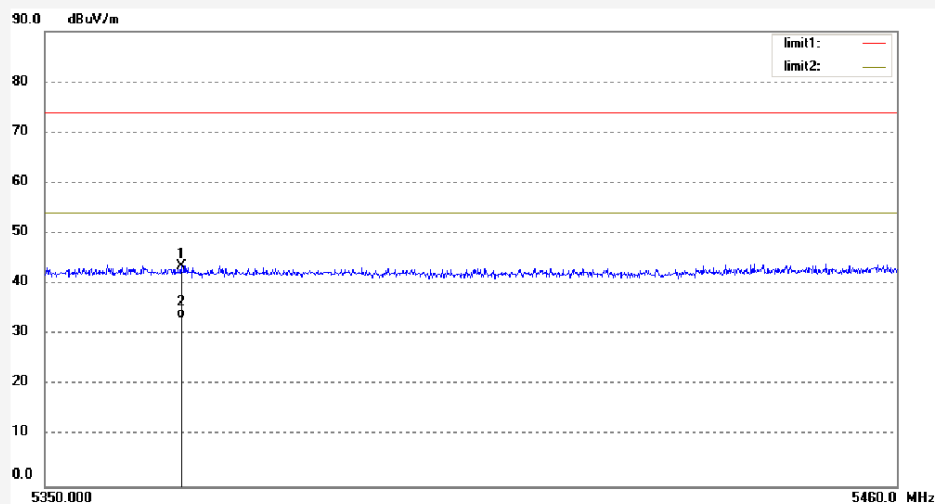

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5367.490	42.76	0.77	43.53	74.00	-30.47	peak			
2	5367.490	32.44	0.77	33.21	54.00	-20.79	AVG			

U-NII-3



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4041

Standard: Band Edge

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Media Player

Mode: TX 5755MHz

Model: P-PLA-103-YIT-02

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/11/09/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note: 802.11n HT40

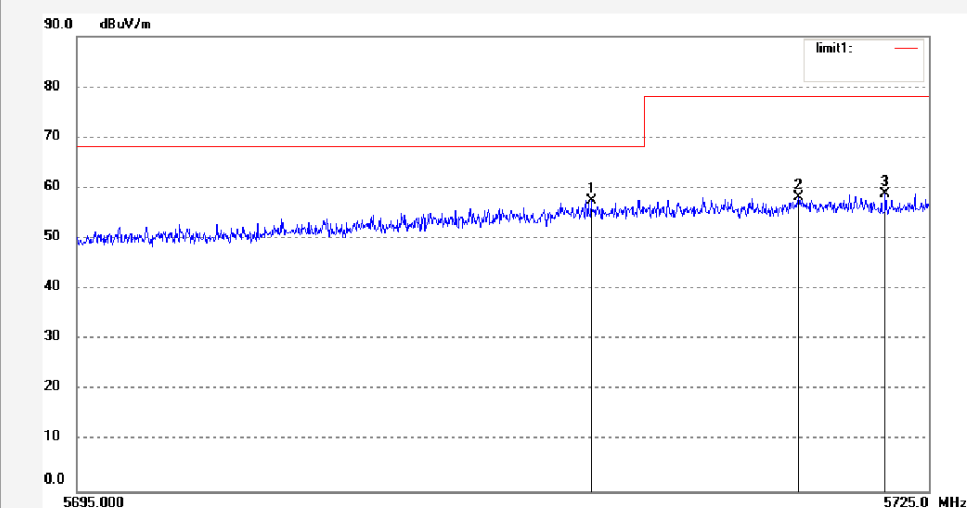

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5713.120	56.36	1.23	57.59	68.23	-10.64	peak			
2	5720.410	56.87	1.29	58.16	78.23	-20.07	peak			
3	5723.470	57.56	1.32	58.88	78.23	-19.35	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4042
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5755MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT40

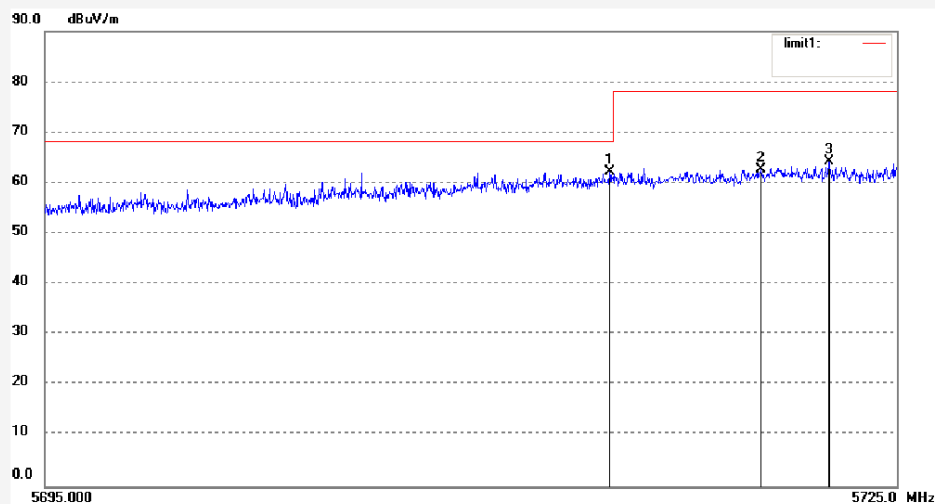

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5714.890	60.96	1.24	62.20	68.23	-6.03	peak			
2	5720.230	61.36	1.29	62.65	78.23	-15.58	peak			
3	5722.600	62.99	1.32	64.31	78.23	-13.92	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4043
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5795MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11n HT40

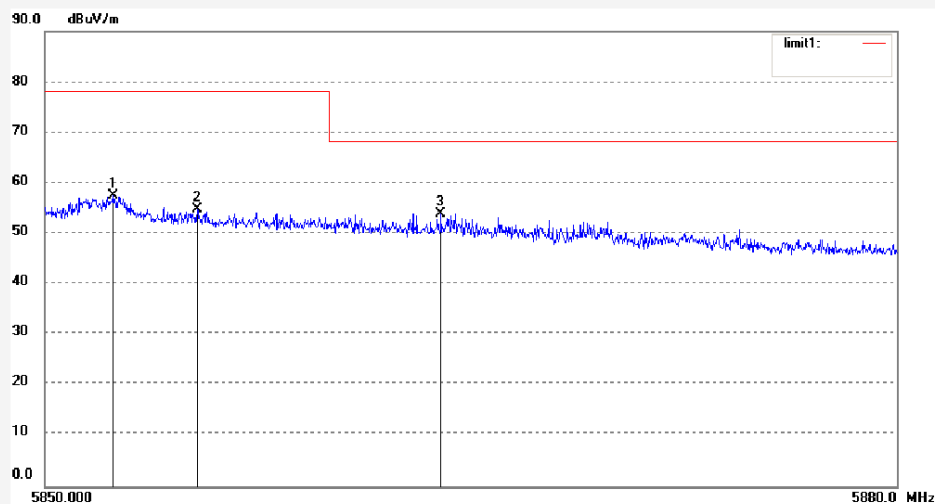

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5852.400	55.51	1.95	57.46	78.23	-20.77	peak			
2	5855.370	52.84	1.96	54.80	78.23	-23.43	peak			
3	5863.950	51.99	1.95	53.94	68.23	-14.29	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4044

Standard: Band Edge

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Media Player

Mode: TX 5795MHz

Model: P-PLA-103-YIT-02

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/11/09/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note: 802.11n HT40

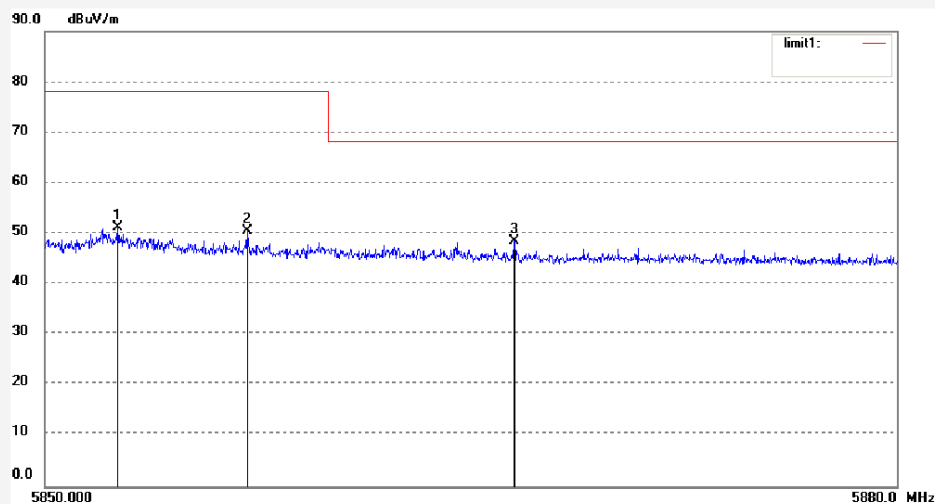

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5852.580	49.18	1.95	51.13	78.23	-27.10	peak			
2	5857.140	48.45	1.96	50.41	78.23	-27.82	peak			
3	5866.530	46.54	1.96	48.50	68.23	-19.73	peak			

**Wi-Fi 802.11 ac(HT20) mode, MCS0 Mbps
U-NII-1**



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4045

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Media Player

Mode: TX 5180MHz

Model: P-PLA-103-YIT-02

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/11/09/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note: 802.11ac VHT20

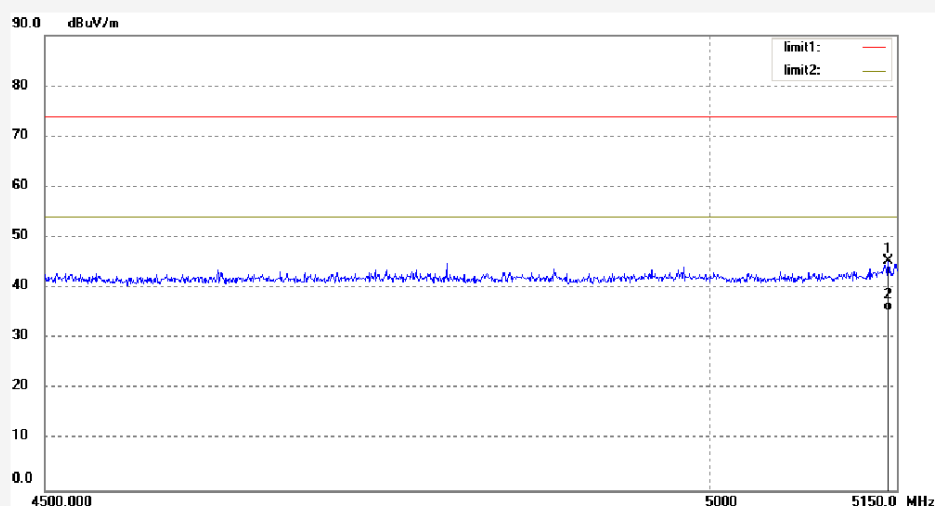

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5143.500	44.87	0.49	45.36	74.00	-28.64	peak			
2	5143.500	34.98	0.49	35.47	54.00	-18.53	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4046
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5180MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT20

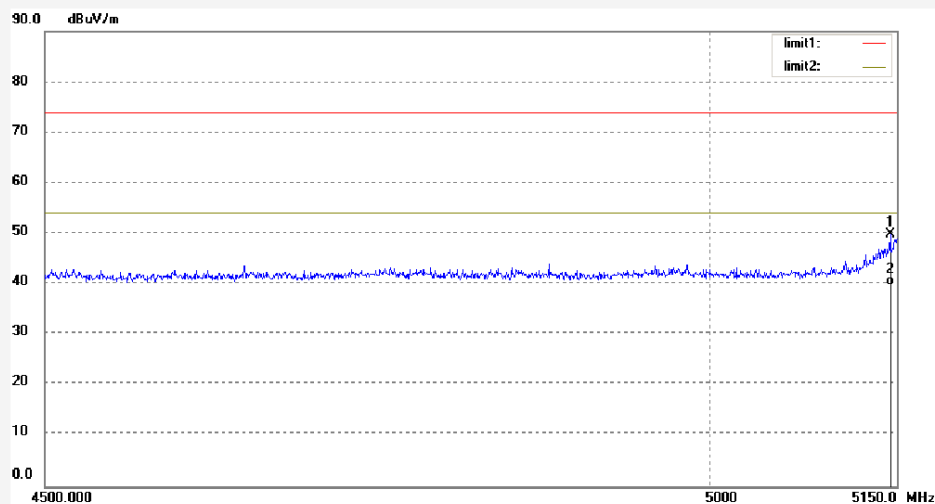

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5144.800	49.35	0.49	49.84	74.00	-24.16	peak			
2	5144.800	39.17	0.49	39.66	54.00	-14.34	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4047
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5240MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT20

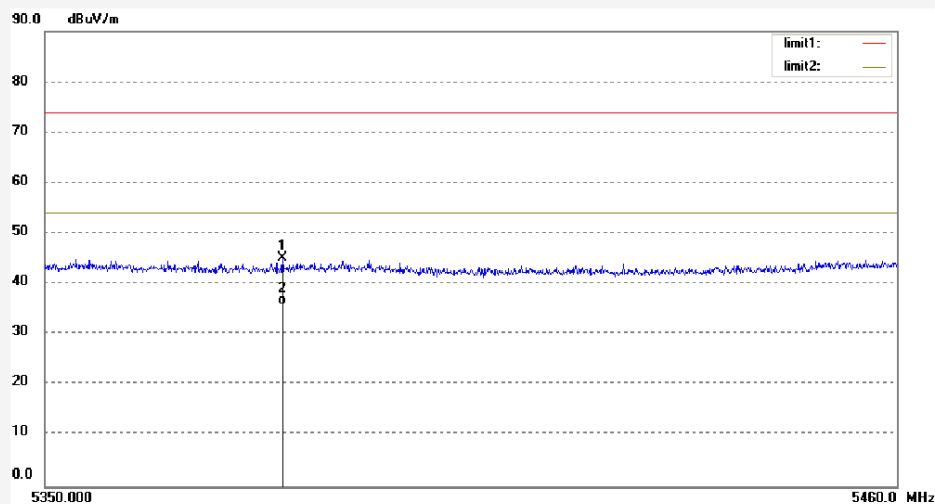

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5380.470	44.29	0.73	45.02	74.00	-28.98	peak			
2	5380.470	35.21	0.73	35.94	54.00	-18.06	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4048
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5240MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT20

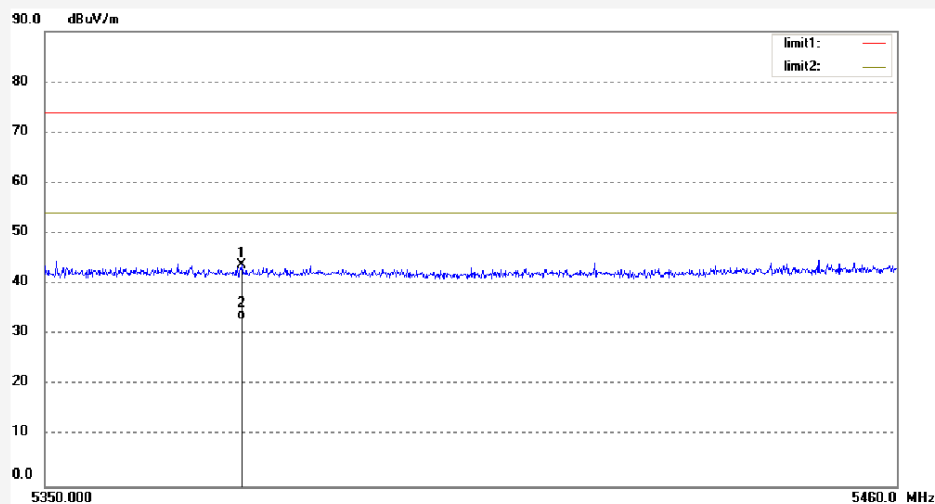

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5375.300	42.96	0.75	43.71	74.00	-30.29	peak			
2	5375.300	32.27	0.75	33.02	54.00	-20.98	AVG			

U-NII-3



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4049

Standard: Band Edge

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Media Player

Mode: TX 5745MHz

Model: P-PLA-103-YIT-02

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/11/09/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note: 802.11ac VHT20

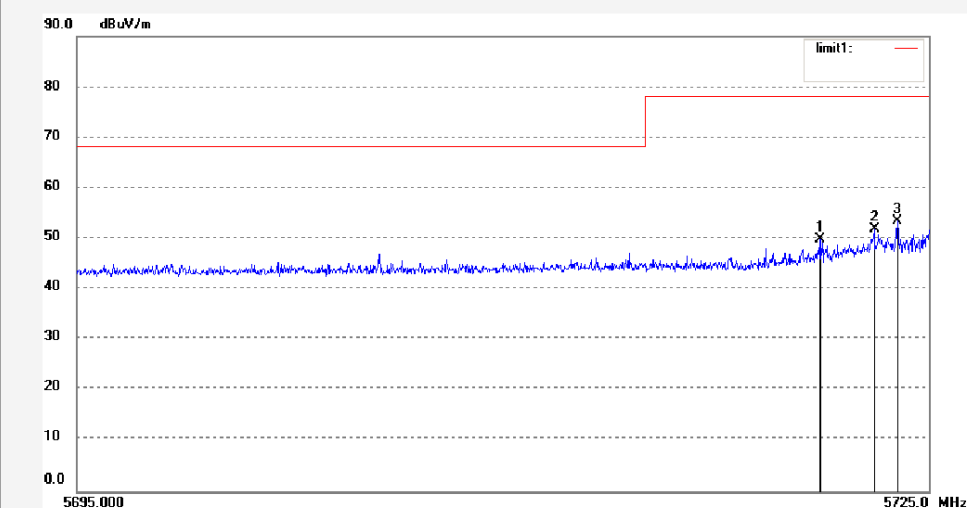

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5721.160	48.64	1.29	49.93	78.23	-28.30	peak			
2	5723.080	50.58	1.32	51.90	78.23	-26.33	peak			
3	5723.890	52.22	1.33	53.55	78.23	-24.68	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4050
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5745MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT20

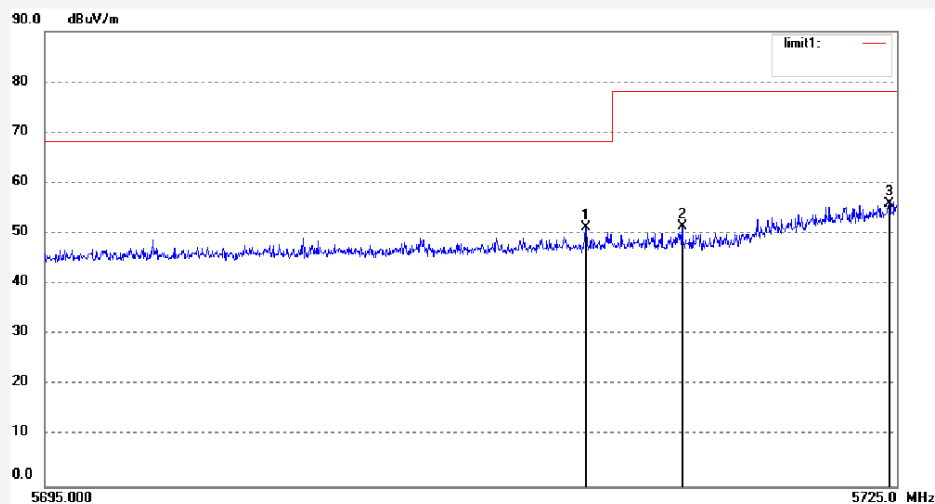

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5714.050	49.93	1.24	51.17	68.23	-17.06	peak			
2	5717.440	50.06	1.27	51.33	78.23	-26.90	peak			
3	5724.730	54.54	1.33	55.87	78.23	-22.36	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4051

Standard: Band Edge

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Media Player

Mode: TX 5825MHz

Model: P-PLA-103-YIT-02

Manufacturer: ContextMedia LLC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/11/09/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note: 802.11ac VHT20

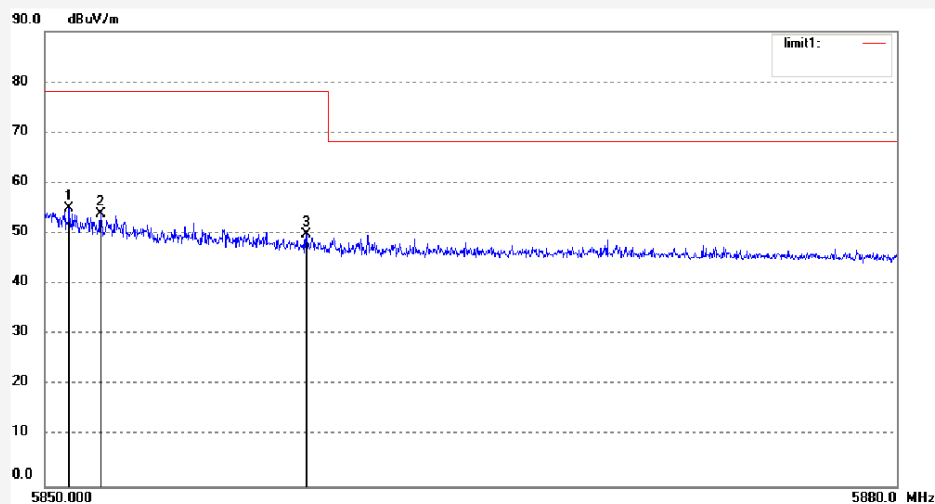

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.870	52.95	1.96	54.91	78.23	-23.32	peak			
2	5851.980	52.00	1.95	53.95	78.23	-24.28	peak			
3	5859.210	47.86	1.95	49.81	78.23	-28.42	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4052
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5825MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT20

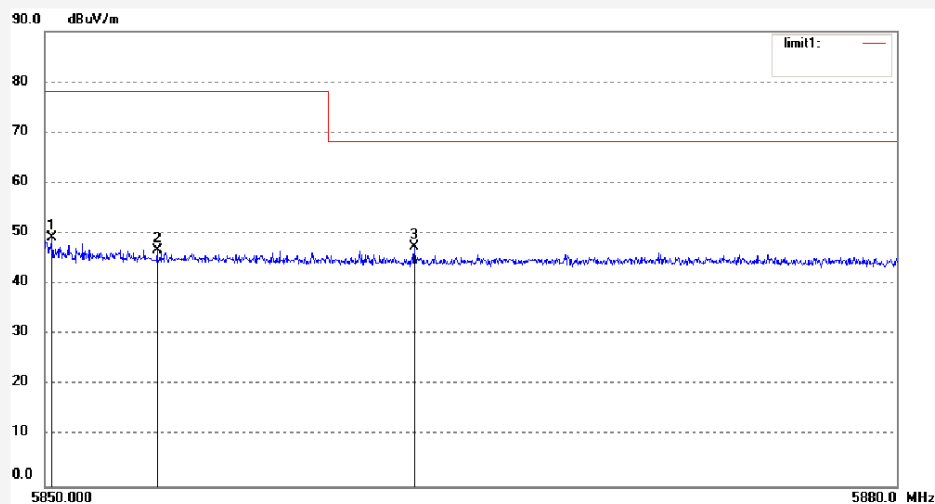

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.240	47.30	1.96	49.26	78.23	-28.97	peak			
2	5853.960	44.83	1.96	46.79	78.23	-31.44	peak			
3	5863.020	45.47	1.95	47.42	68.23	-20.81	peak			

**Wi-Fi 802.11 ac(HT40) mode, MCS0 Mbps
U-NII-1**




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lgwade #4053
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5190MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT40

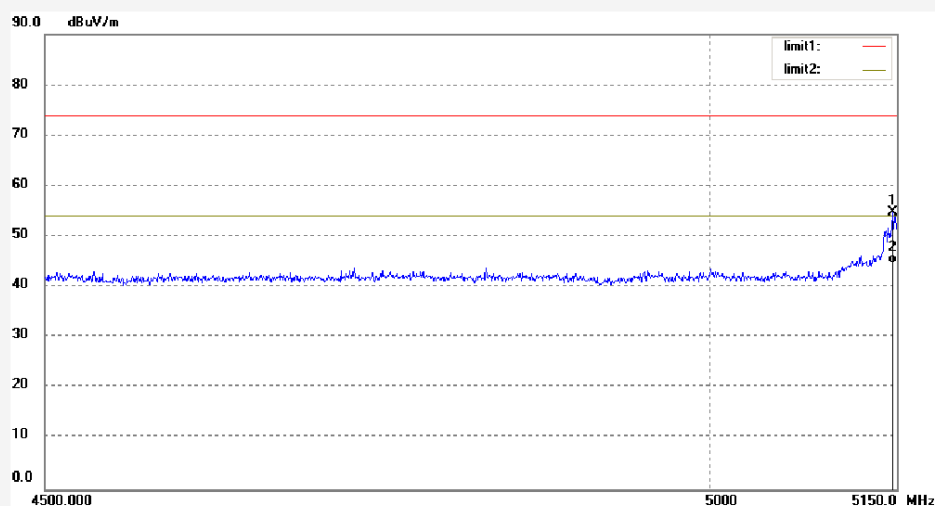

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5146.750	54.36	0.50	54.86	74.00	-19.14	peak			
2	5146.750	44.13	0.50	44.63	54.00	-9.37	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4054
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5190MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT40

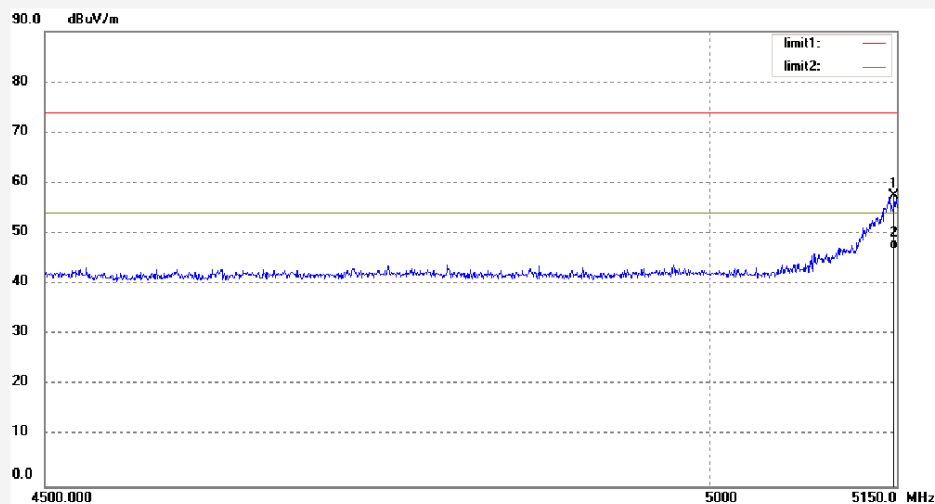

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5148.050	56.93	0.51	57.44	74.00	-16.56	peak			
2	5148.050	46.49	0.51	47.00	54.00	-7.00	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4055

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Media Player

Mode: TX 5230MHz

Model: P-PLA-103-YIT-02

Manufacturer: ContextMedia LLC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/11/09/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note: 802.11ac VHT40

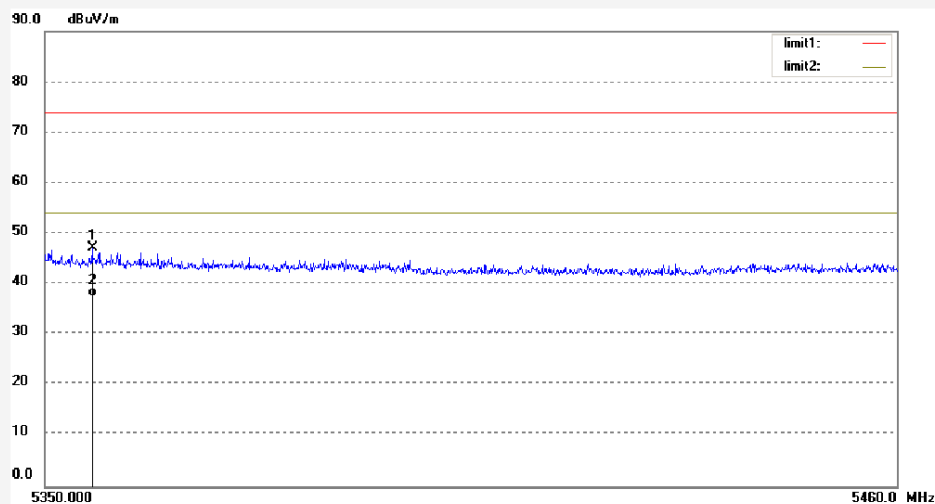

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5356.160	46.25	0.82	47.07	74.00	-26.93	peak			
2	5356.160	36.74	0.82	37.56	54.00	-16.44	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4056
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5230MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT40

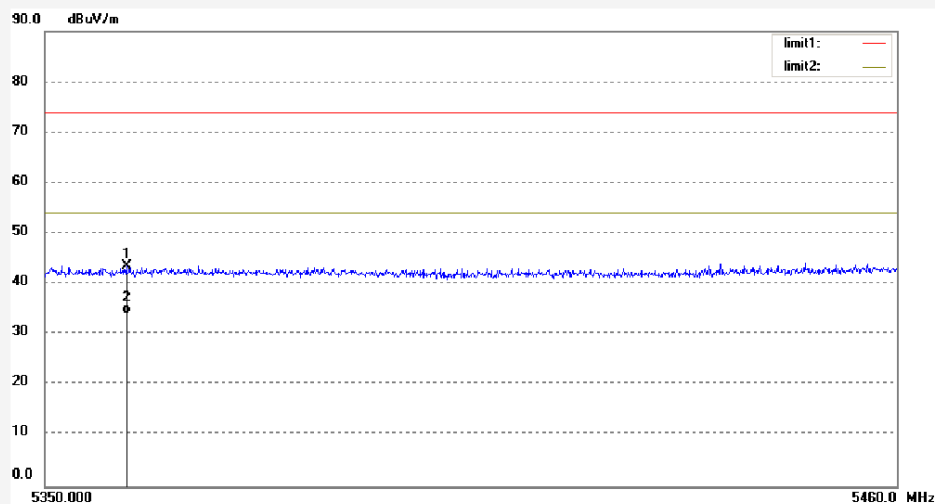

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5360.560	42.72	0.80	43.52	74.00	-30.48	peak			
2	5360.560	33.18	0.80	33.98	54.00	-20.02	AVG			

U-NII-3



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lgwade #4057
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5755MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT40

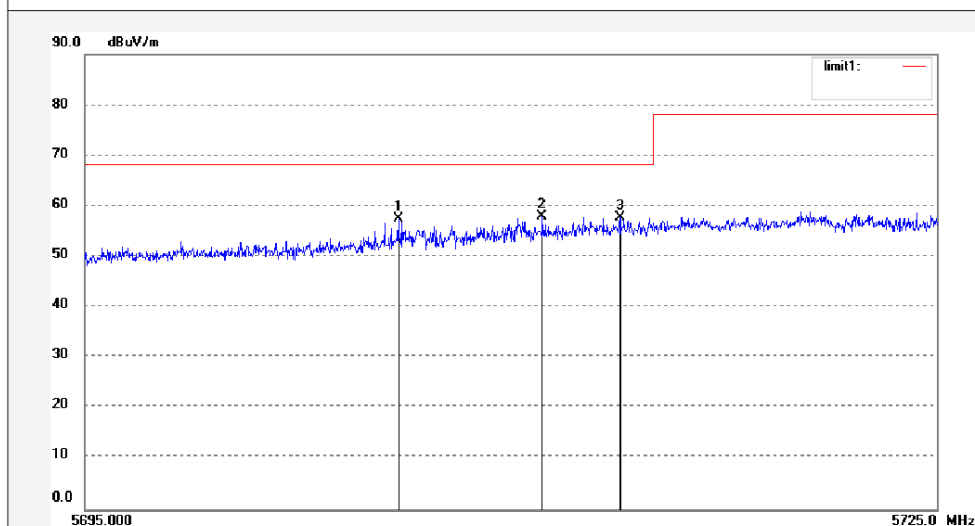

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5706.040	56.31	1.17	57.48	68.23	-10.75	peak			
2	5711.110	56.78	1.21	57.99	68.23	-10.24	peak			
3	5713.840	56.40	1.24	57.64	68.23	-10.59	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4058
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5755MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT40

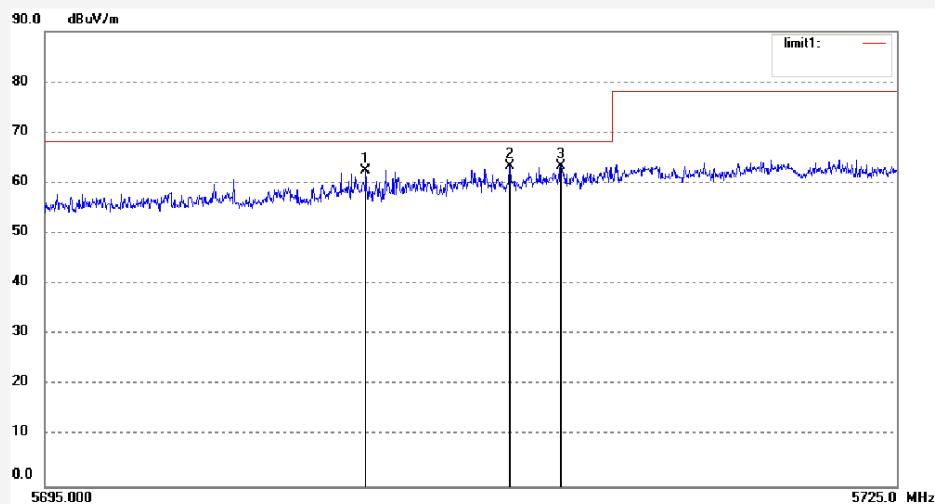

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5706.310	61.31	1.18	62.49	68.23	-5.74	peak			
2	5711.380	62.05	1.22	63.27	68.23	-4.96	peak			
3	5713.180	62.02	1.23	63.25	68.23	-4.98	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4059
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5795MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT40

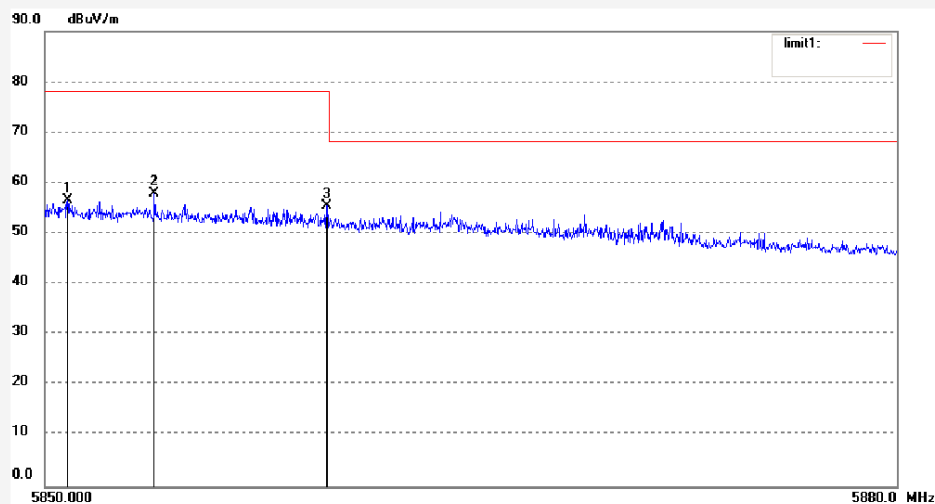

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.810	54.61	1.96	56.57	78.23	-21.66	peak			
2	5853.870	55.88	1.96	57.84	78.23	-20.39	peak			
3	5859.930	53.45	1.96	55.41	78.23	-22.82	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4060

Standard: Band Edge

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Media Player

Mode: TX 5795MHz

Model: P-PLA-103-YIT-02

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/11/09/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note: 802.11ac VHT40

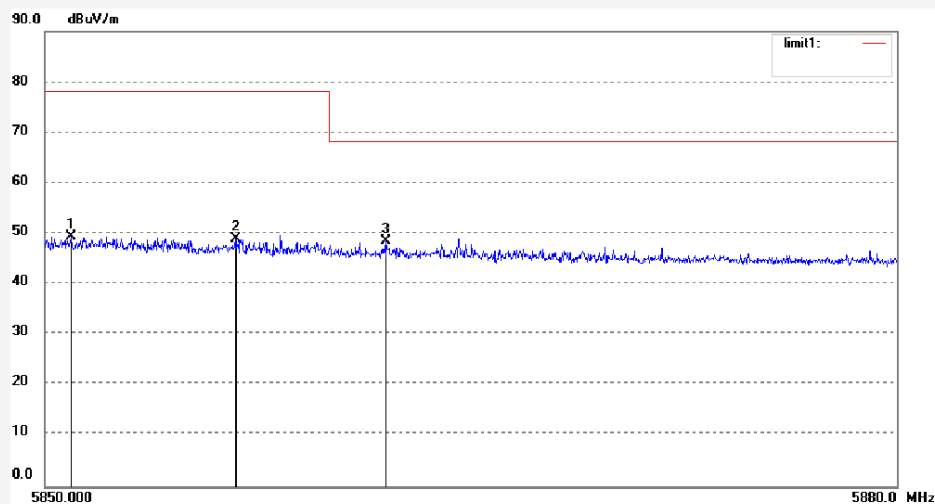

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.930	47.52	1.96	49.48	78.23	-28.75	peak			
2	5856.720	46.94	1.96	48.90	78.23	-29.33	peak			
3	5862.030	46.58	1.95	48.53	68.23	-19.70	peak			

**Wi-Fi 802.11 ac(HT80) mode, MCS0 Mbps
U-NII-1**




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lgwade #4061	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/11/09/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Media Player	Engineer Signature: LGWADE
Mode: TX 5210MHz	Distance: 3m
Model: P-PLA-103-YIT-02	
Manufacturer: ContextMedia LLC	

Note: 802.11ac VHT80

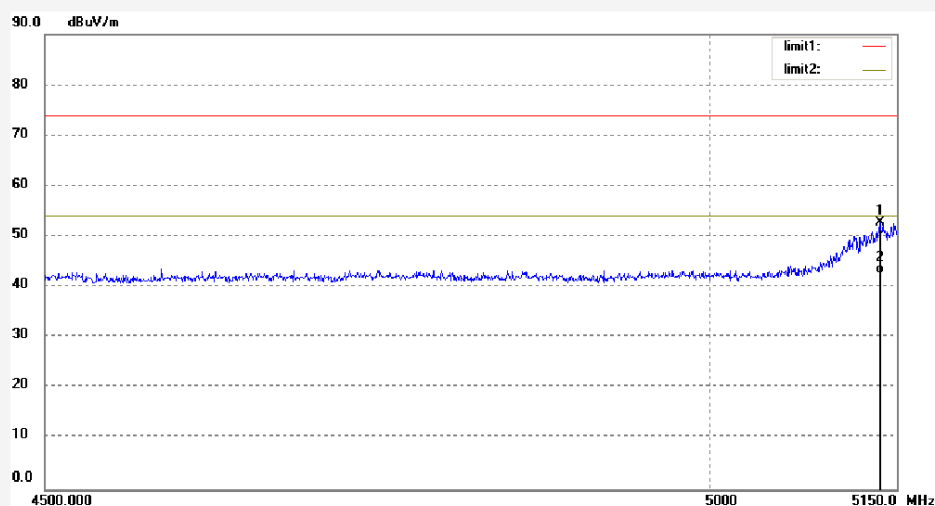

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5136.350	52.39	0.46	52.85	74.00	-21.15	peak			
2	5136.350	42.10	0.46	42.56	54.00	-11.44	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Igwade #4062
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5210MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT80

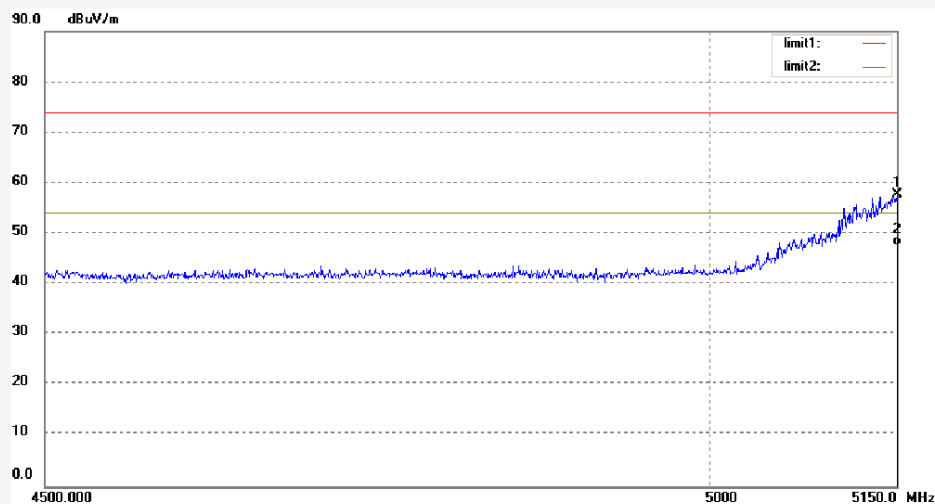

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	57.24	0.51	57.75	74.00	-16.25	peak			
2	5150.000	47.14	0.51	47.65	54.00	-6.35	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4063
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5210MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT80

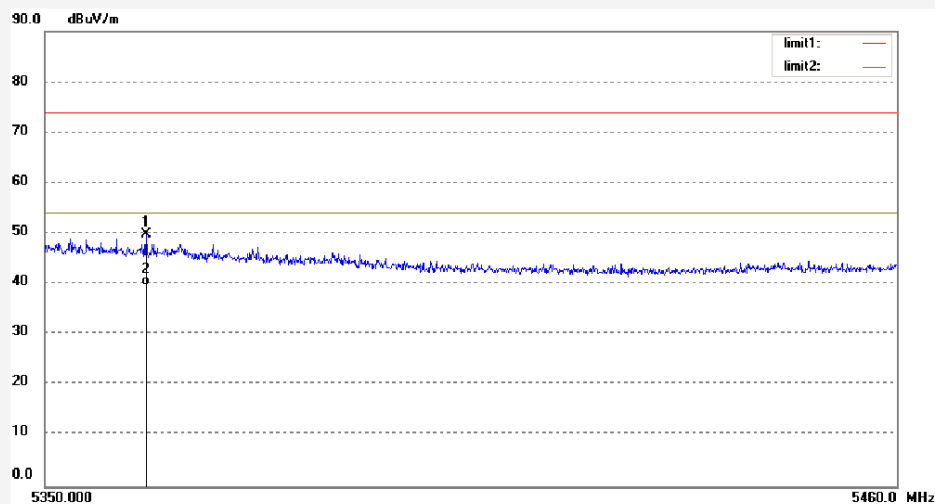

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5362.980	49.06	0.79	49.85	74.00	-24.15	peak			
2	5362.980	38.83	0.79	39.62	54.00	-14.38	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4064
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5210MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT80

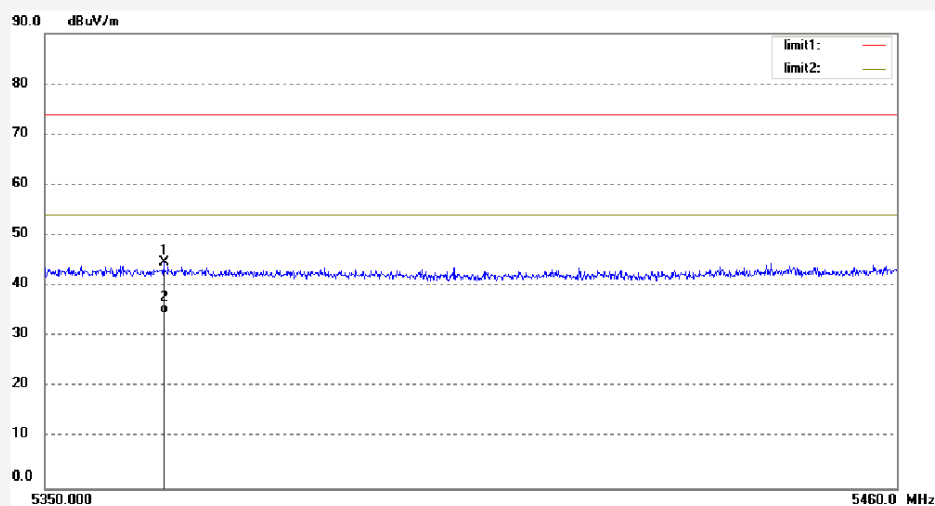

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5365.290	43.83	0.78	44.61	74.00	-29.39	peak			
2	5365.290	33.79	0.78	34.57	54.00	-19.43	AVG			

U-NII-3



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4065
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5775MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT80

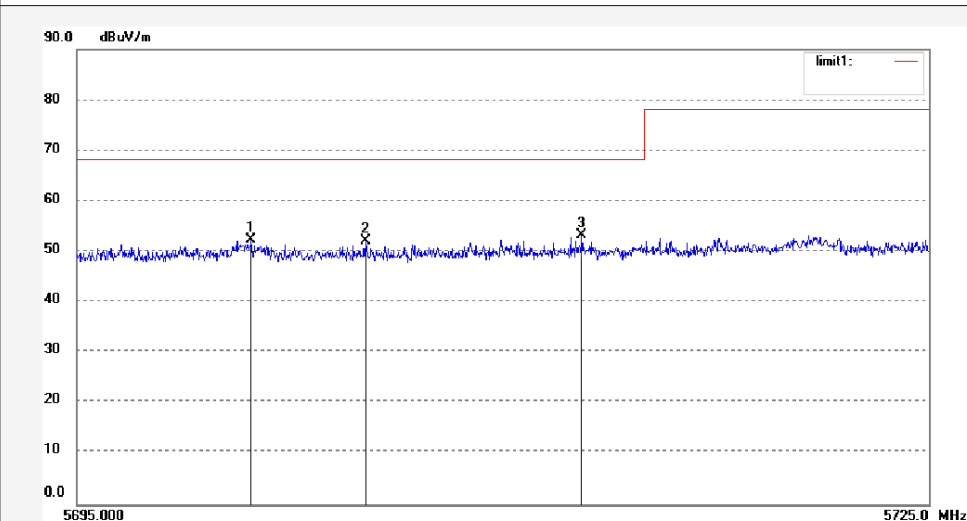

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5701.150	51.30	1.12	52.42	68.23	-15.81	peak			
2	5705.170	50.91	1.17	52.08	68.23	-16.15	peak			
3	5712.790	51.99	1.23	53.22	68.23	-15.01	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4066
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5775MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT80

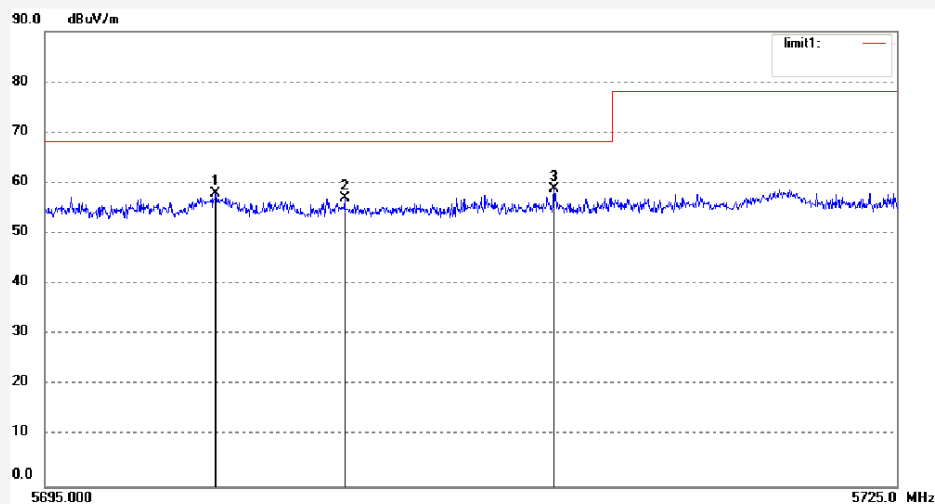

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5701.030	56.84	1.12	57.96	68.23	-10.27	peak			
2	5705.560	55.85	1.17	57.02	68.23	-11.21	peak			
3	5712.940	57.58	1.23	58.81	68.23	-9.42	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4067
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5775MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT80

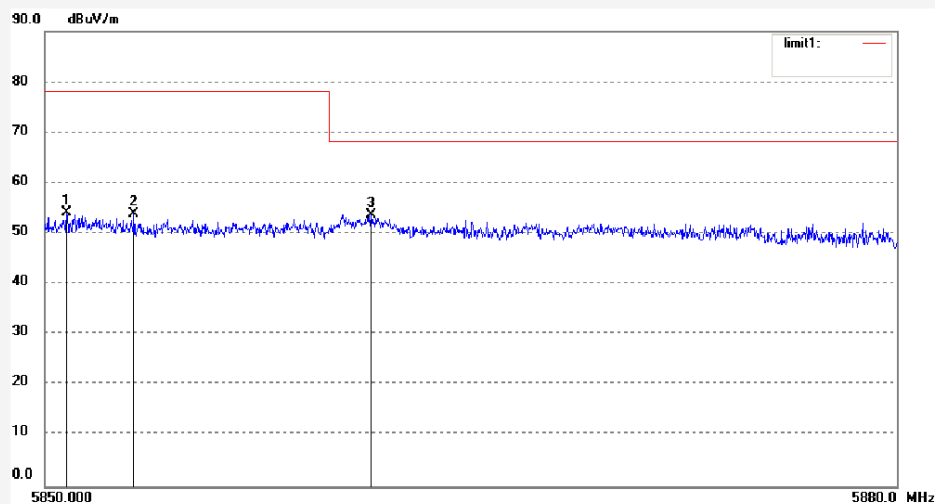

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.780	52.07	1.96	54.03	78.23	-24.20	peak			
2	5853.150	51.88	1.95	53.83	78.23	-24.40	peak			
3	5861.490	51.70	1.96	53.66	68.23	-14.57	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #4068
Standard: Band Edge
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Media Player
Mode: TX 5775MHz
Model: P-PLA-103-YIT-02
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/11/09/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note: 802.11ac VHT80

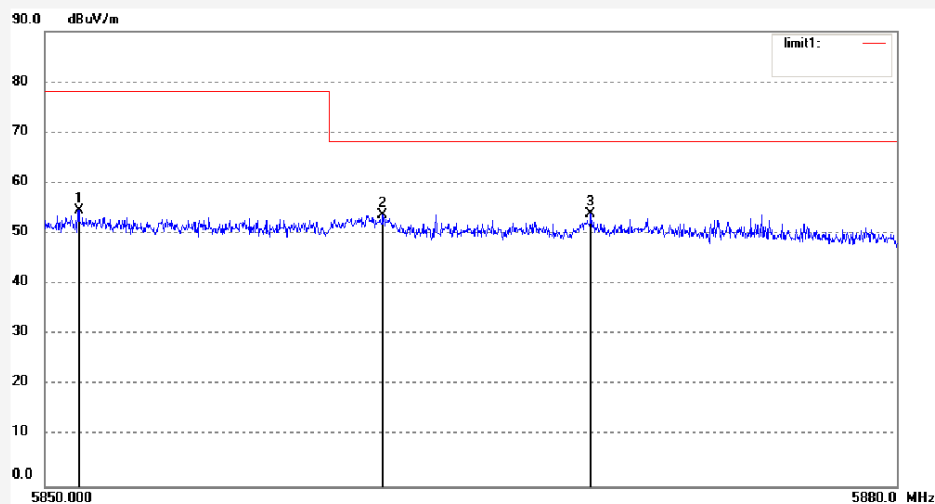

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5851.200	52.70	1.96	54.66	78.23	-23.57	peak			
2	5861.910	51.78	1.95	53.73	68.23	-14.50	peak			
3	5869.230	51.89	1.95	53.84	68.23	-14.39	peak			

APPENDIX B.3: Conducted Emission

ACCURATE TECHNOLOGY CO.,LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Media Player M/N:P-PLA-103-YIT-02

Operating Condition: On with Wifi(5.2G)
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 11/23/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
Average
150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

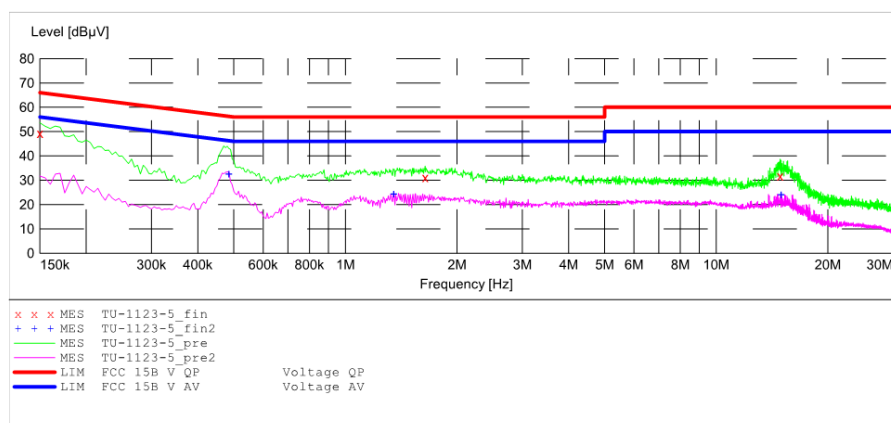

MEASUREMENT RESULT: "TU-1123-5_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	49.30	10.5	66	16.7	QP	N	GND
1.640000	31.10	10.9	56	24.9	QP	N	GND
14.860000	31.70	11.4	60	28.3	QP	N	GND

MEASUREMENT RESULT: "TU-1123-5_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.485000	32.40	10.7	46	13.9	AV	N	GND
1.350000	24.20	10.9	46	21.8	AV	N	GND
14.950000	23.90	11.4	50	26.1	AV	N	GND

ACCURATE TECHNOLOGY CO.,LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Media Player M/N:P-PLA-103-YIT-02

Operating Condition: On with Wifi(5.2G)
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 11/23/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
150.0 kHz 30.0 MHz 5.0 kHz Average QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

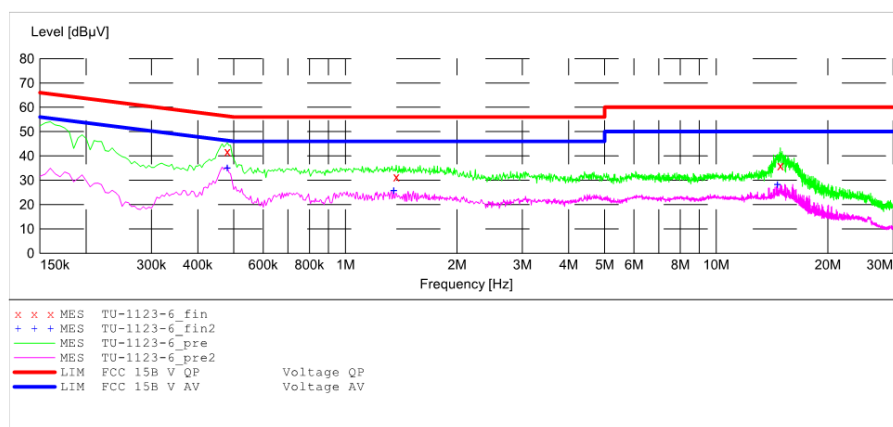

MEASUREMENT RESULT: "TU-1123-6_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.480000	41.80	10.7	56	14.5	QP	L1	GND
1.370000	31.40	10.9	56	24.6	QP	L1	GND
14.875000	36.00	11.4	60	24.0	QP	L1	GND

MEASUREMENT RESULT: "TU-1123-6_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.480000	34.90	10.7	46	11.4	AV	L1	GND
1.350000	25.60	10.9	46	20.4	AV	L1	GND
14.605000	28.10	11.4	50	21.9	AV	L1	GND

ACCURATE TECHNOLOGY CO.,LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Media Player M/N:P-PLA-103-YIT-02

Operating Condition: On with Wifi(5.8G)
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 11/23/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
150.0 kHz 30.0 MHz 5.0 kHz Average QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

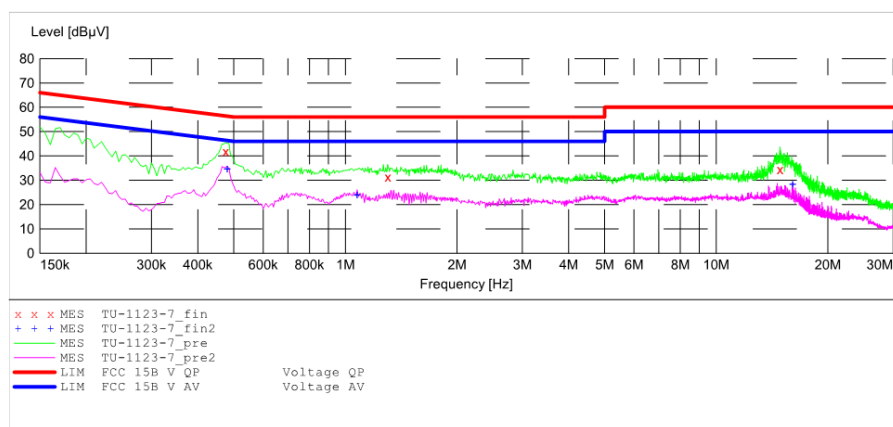

MEASUREMENT RESULT: "TU-1123-7_fin"

11/23/2016	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dBμV	dB	dBμV	dB			
	0.475000	41.80	10.7	56	14.6	QP	L1	GND
	1.300000	31.30	10.9	56	24.7	QP	L1	GND
	14.845000	34.40	11.4	60	25.6	QP	L1	GND

MEASUREMENT RESULT: "TU-1123-7_fin2"

11/23/2016	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dBμV	dB	dBμV	dB			
	0.480000	34.50	10.7	46	11.8	AV	L1	GND
	1.075000	23.80	10.9	46	22.2	AV	L1	GND
	16.075000	28.20	11.4	50	21.8	AV	L1	GND

ACCURATE TECHNOLOGY CO.,LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Media Player M/N:P-PLA-103-YIT-02

Operating Condition: On with Wifi(5.8G)
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 11/23/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
150.0 kHz 30.0 MHz 5.0 kHz Average QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

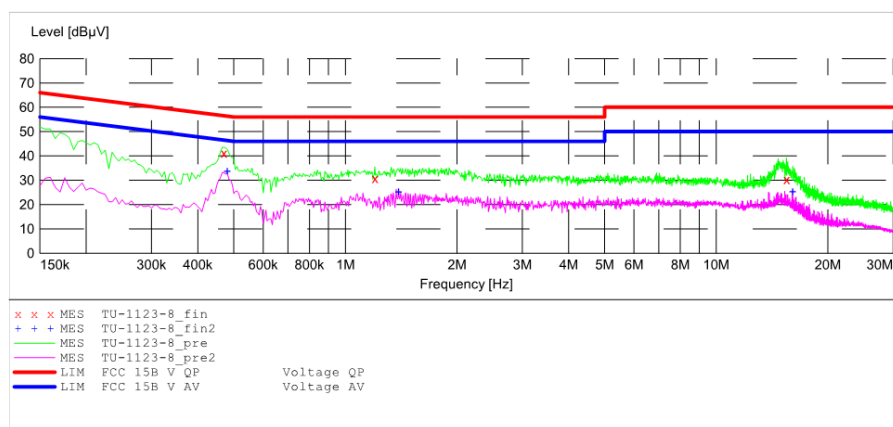

MEASUREMENT RESULT: "TU-1123-8_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.470000	41.10	10.7	57	15.4	QP	N	GND
1.200000	30.70	10.9	56	25.3	QP	N	GND
15.460000	30.30	11.4	60	29.7	QP	N	GND

MEASUREMENT RESULT: "TU-1123-8_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.480000	33.60	10.7	46	12.7	AV	N	GND
1.390000	25.10	10.9	46	20.9	AV	N	GND
16.075000	25.20	11.4	50	24.8	AV	N	GND