

Prüfbericht-Nr.: Test Report No.:	50094373 003	Auftrags-Nr.: Order No.:	164090912	Seite 1 von 565 Page 1 of 565
Kunden-Referenz-Nr.: Client Reference No.:	N/A	Auftragsdatum: Order date:	17.04.2017	
Auftraggeber: Client:	GIEC TECHNOLOGY (HONG KONG) CO., LTD. Unit 7, 22/F., Billion Trade Centre, 31 Hung To Road, Kwun Tong, Hongkong			
Prüfgegenstand: Test item:	11.6" Android tablet			
Bezeichnung / Typ-Nr.: Identification / Type No.:	NS-P11A8100, NS-P11A8100-C, NS-P11XXXXXXXXX (x=0-9, A-Z, a-z, - or blank, for market purpose only)			
Auftrags-Inhalt: Order content:	FCC/IC Certification			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.407 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-247 Issue 2 February 2017 RSS-Gen Issue 4 November 2014 KDB 789033 D02 v01			
Wareneingangsdatum: Date of receipt:	29.04.2017			
Prüfmuster-Nr.: Test sample No.:	A000575755-001, A000575755-002, A000575755-003			
Prüfzeitraum: Testing period:	06.05.2017 - 14.06.2017			
Ort der Prüfung: Place of testing:	Shenzhen EMTEK Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
03-07-2017	Andy Yan / Project Manager	03-07-2017	Owen Tian / Technical Certifier	
Datum Date	Name / Stellung Name / Position	Unterschrift Signature	Datum Date	Name / Stellung Name / Position
				Unterschrift Signature
Sonstiges / Other:		FCC ID: 2AIB2-P11A8100 IC: 21456-P11A8100 HVIN: NS-P11A8100-C		
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 PEAK OUTPUT POWER

RESULT: Pass

5.1.3 26dB BANDWIDTH

RESULT: Pass

5.1.4 99% BANDWIDTH

RESULT: Pass

5.1.5 6dB BANDWIDTH

RESULT: Pass

5.1.6 POWER SPECTRAL DENSITY

RESULT: Pass

5.1.7 SPURIOUS EMISSION

RESULT: Pass

5.1.8 DYNAMIC FREQUENCY SELECTION

RESULT: Pass

5.1.9 CONDUCTED EMISSIONS

RESULT: Pass

CONTENTS

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS	10
4.	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Peak Output Power</i>	<i>15</i>
5.1.3	<i>26dB Bandwidth</i>	<i>18</i>
5.1.4	<i>99% Bandwidth</i>	<i>20</i>
5.1.5	<i>6dB Bandwidth</i>	<i>22</i>
5.1.6	<i>Power spectral density</i>	<i>24</i>
5.1.7	<i>Spurious Emission</i>	<i>26</i>
5.1.8	<i>Dynamic Frequency Selection</i>	<i>553</i>
5.1.9	<i>Conducted emissions.....</i>	<i>559</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	562
7.	LIST OF TABLES	564
8.	LIST OF PHOTOGRAPHS	565

1. General Remarks

1.1 Complementary Materials

None.

2. Test Sites

2.1 Test Facilities

Shenzhen EMTEK Co., Ltd.

(FCC Registration No.: 709623)

(Test site Industry Canada No.: 4480A-2)

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, P.R. China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Transmitter spurious emissions				
EMI Test Receiver	Rohde & Schwarz	ESCI	101414	2018-05-19
EMI Test Receiver	Rohde & Schwarz	FSV40	132.1-3008K39-100967-AP	2018-05-19
Pre-Amplifier	LUNAR-EM	LNA30M3G-25	J10100000071	2018-05-19
Pre-Amplifier	Lunar EM	LNA1G18-48	J1011131010001	2018-05-19
Pre-Amplifier	Lunar EM	LNA18G26-40	J1012131010001	2018-05-20
Pre-Amplifier	Lunar EM	LNA26G40-40	J1013131028001	2018-05-19
Bilog Antenna	Schwarzbeck	VULB9163	660	2018-05-20
Horn Antenna	Schwarzbeck	BBHA 9120	1178	2018-05-20
Horn Antenna	Schwarzbeck	BBHA 9170	RS1307229170547	2018-05-20
Cable	H+B	NmSm-05-C15052	N/A	2018-05-20
Cable	H+B	NmSm-2-C15201	N/A	2018-05-20
Cable	H+B	NmNm-7-C15702	N/A	2018-05-20
Cable	H+B	SUCOFLEX104	MY14871/4	2018-05-20
Cable	H+B	BLU18A-NmSm-6500	D8501	2018-05-20
Cable	A.H	SAC-40G-1	414	2018-05-20
Cable	A.H	SAC-40G-1	413	2018-05-20
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400-2485MHz)	2	2018-05-20
Band reject Filter(60dB)	WI/DE	WRCJV-5700(5725-5825MHz)	3	2018-05-20
Radio Spectrum Test				
EMI Test Receiver	Rohde & Schwarz	ESCI	101045	2018-05-16
Vector Signal Generater	Agilent	N5182B	My53050553	2018-05-28
Analog Signal Generator	Agilent	N5171B	My53050878	2018-05-28
Signal Analyzer	Agilent	N9010A	My53470879	2018-05-28
Power Meter	Agilent	PS-X10-100	N/A	2018-05-28
Temp. / Humidity Chamber	Kingson	THS-M1	242	2018-05-28
Conducted Emission				
Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	2018-05-19
L.I.S.N.	Rohde & Schwarz	ENV216	101161	2018-05-19
50Ω Coaxial Switch	Anritsu	MP59B	6100175589	2018-05-20
Voltage Probe	Rohde & Schwarz	ESH2-Z3	100122	2018-05-20

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

Prüfbericht - Nr.: 50094373 003*Test Report No.***Seite 7 von 565***Page 7 of 565*

2.7 Status of Facility Used for Testing

Shenzhen EMTEK Co., Ltd. test facility located at Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUTs are 11.6" Android tablet with Wi-Fi, Bluetooth function.
 All models are identical except the model number, brand or color.
 For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	11.6" Android tablet
Type Designation	NS-P11A8100, NS-P11A8100-C, NS-P11XXXXXXXXXX (x=0-9, A-Z, a-z, - or blank, for market purpose only)
FCC ID	2AIB2-P11A8100
IC	21456-P11A8100
HVIN	NS-P11A8100-C
Operating Frequency band	5180 – 5825MHz
Extreme Temperature Range	0~+40°C
Operation Voltage	DC 3.7V (via built in battery)
	DC 5V (via AC/DC adapter)
Antenna Gain	3.92dBi

Table 4: Technical Specification of 5GHz, 802.11a/n

Operating mode(s) / WiFi:	IEEE 802.11a	IEEE 802.11n HT20	IEEE 802.11n HT40
Test modulation	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
Transmit Frequency Range (MHz):	5180 - 5825	5180 - 5825	5180 - 5825
Channel Number	25	25	12
Data Rate (Mbps)	6, 9, 12, 18, 24, 36, 48, 54	MCS0 ~ MCS7	MCS0 ~ MCS7
Maximum tune-up average output power (dBm):	12	12	12
Media Access Protocol	CSMA/CA with ACK	CSMA/CA with ACK	CSMA/CA with ACK

Table 5: Technical Specification of 5GHz, 802.11ac

Operating mode(s) / WiFi:	IEEE 802.11ac VHT20	IEEE 802.11ac VHT40
Test modulation	OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)
Transmit Frequency Range (MHz):	5180 - 5825	5180 - 5825
Channel Number	25	12
Data Rate (Mbps)	MCS0 ~ MCS7	MCS0 ~ MCS7
Maximum tune-up average output power (dBm):	12	12
Media Access Protocol	CSMA/CA with ACK	CSMA/CA with ACK

Table 6: List of WLAN Channel of 5GHz 802.11a/n/ac

802.11a		802.11n HT20; 802.11ac VHT20		802.11n HT40; 802.11ac VHT40	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	36	5180	38	5190
40	5200	40	5200	46	5230
44	5220	44	5220	54	5270
48	5240	48	5240	62	5310
52	5260	52	5260	102	5510
56	5280	56	5280	110	5550
60	5300	60	5300	118	5590
64	5320	64	5320	126	5630 (for FCC only)
100	5500	100	5500	134	5670
104	5520	104	5520	142	5710
108	5540	108	5540	151	5755
112	5560	112	5560	159	5795
116	5580	116	5580		
120	5600 (for FCC only)	120	5600 (for FCC only)		
124	5620 (for FCC only)	124	5620 (for FCC only)		
128	5640 (for FCC only)	128	5640 (for FCC only)		
132	5660	132	5660		
136	5680	136	5680		
140	5700	140	5700		
144	5720	144	5720		
149	5745	149	5745		
153	5765	153	5765		
157	5785	157	5785		
161	5805	161	5805		
165	5825	165	5825		

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi mode (Band U-NII-1)
 - 1. Transmitting
 - a. Low Channel
 - b. Middle Channel
 - c. High Channel
 - 2. Receiving
- B. On, Wi-Fi mode (Band U-NII-2A)
 - 1. Transmitting
 - a. Low Channel
 - b. Middle Channel
 - c. High Channel
 - 2. Receiving
- C. On, Wi-Fi mode (Band U-NII-2C)
 - 1. Transmitting
 - a. Low Channel
 - b. Middle Channel
 - c. High Channel
 - 2. Receiving
- D. On, Wi-Fi mode (Band U-NII-3)
 - 1. Transmitting
 - a. Low Channel
 - b. Middle Channel
 - c. High Channel
 - 2. Receiving
- E. Standby
- F. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- | | |
|--------------------------|----------------------|
| - Bill of Material | - Circuit Diagram |
| - Constructional Drawing | - Instruction Manual |
| - PCB Layout | - Rating Label |
| - Photo Document | |

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Description	Manufacturer	Part No.	Rating
AC/DC Adapter	Dongguan Wahhing Electrical Appliance CO.,Ltd.	PS01111A	Input: AC 100-240V, 50/60Hz, 0.4A Output: DC 5V, 3A

The EUT was tested with following cables:

Interface(s)/Port(s):	Max. cable length, shielding	Cable classification
AC Mains of adapter	2 cores, non-shielded port, 3m	AC Power Input
Micro USB port	4 cores, non-shielded port, 3m	DC Power Input

4.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test of below 1GHz

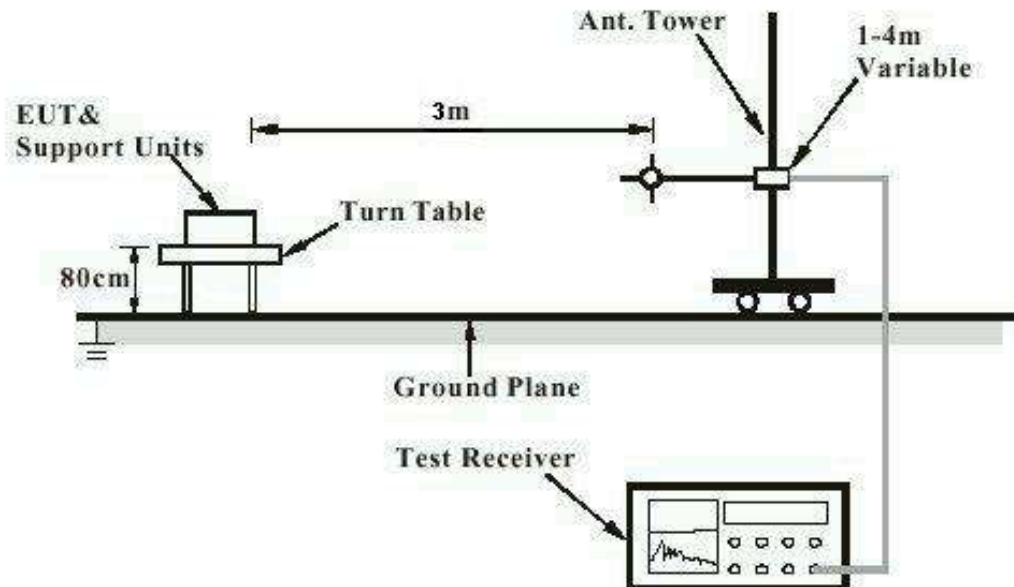


Diagram of Measurement Configuration for Radiation Test of above 1GHz

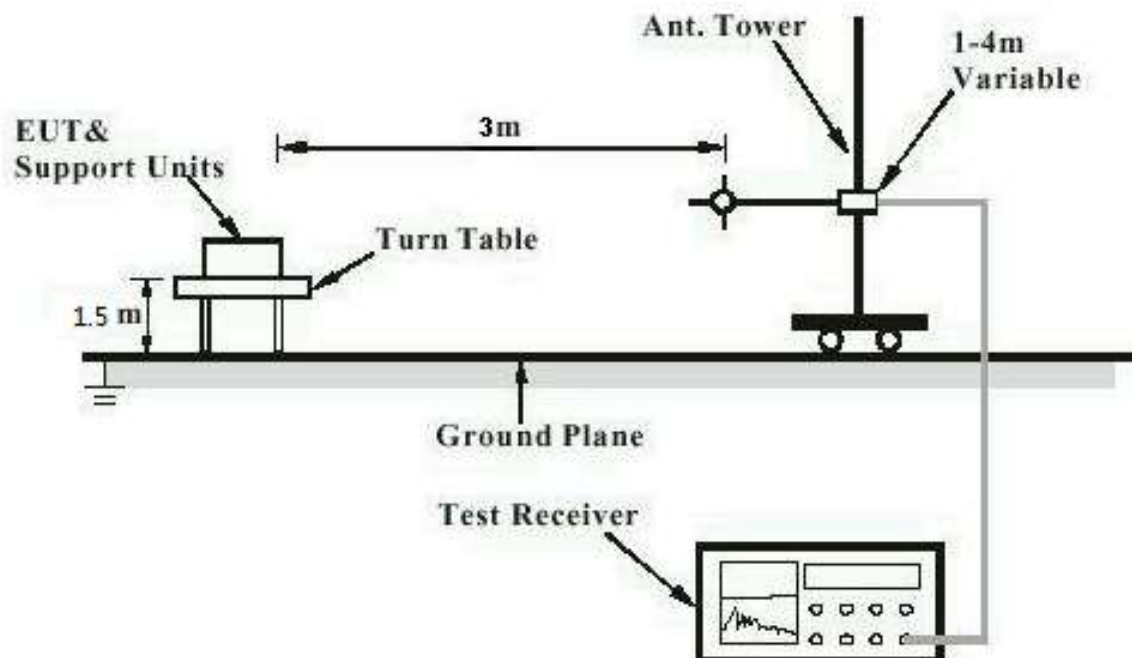


Diagram of Measurement Equipment Configuration for Conduction Measurement

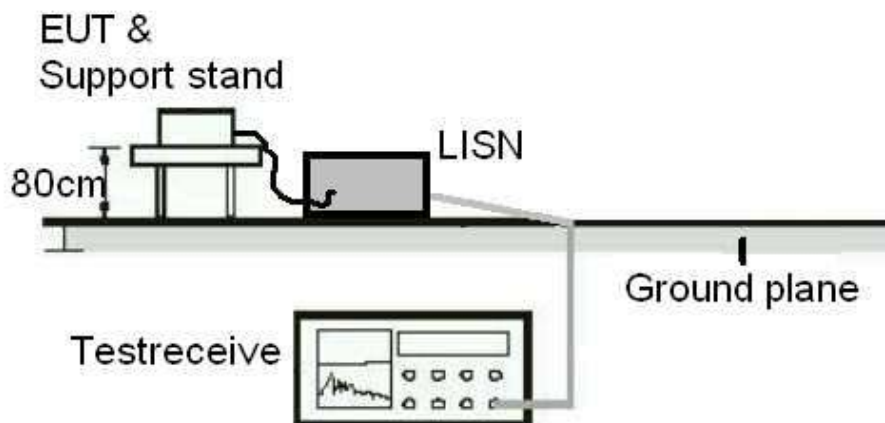
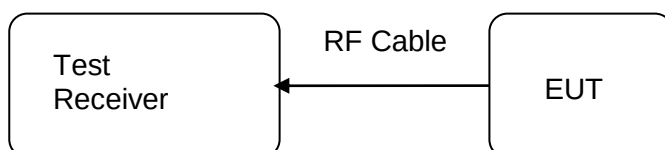


Diagram of Measurement Equipment Configuration for Transmitter Measurement



5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard	:	FCC Part 15.203 RSS-Gen Clause 8.3
Limit		The use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 3.92dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

5.1.2 Peak Output Power

RESULT:
Pass

Test date : 2017-05-24
 Test standard : FCC Part 15.407(a)(1)(iv)
 FCC Part 15.407(a)(2)
 FCC Part 15.407(a)(3)
 RSS-247 clause 6.2.1(1)
 RSS-247 clause 6.2.2(1)
 RSS-247 clause 6.2.3(1)
 RSS-247 clause 6.2.4(1)
 Basic standard : ANSI C63.10: 2013
 Limit : 24dBm for FCC, 23dBm for IC (Band U-NII-1)
 24dBm (Band U-NII-2A & Band U-NII-2C)
 30dBm (Band U-NII-3)
 Kind of test site : Shielded room

Test setup

Test Channel : All channel
 Operation Mode : A.1, B.1, C.1, D.1
 Ambient temperature : 24°C
 Relative humidity : 53%
 Atmospheric pressure : 101kPa

Table 7: Test result of Peak Output Power of 802.11a

Mode	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
802.11a	5180	10.98	23
	5200	11.04	23
	5240	11.74	23
	5260	11.11	24
	5280	11.15	24
	5320	11.79	24
	5500	11.50	24
	5600	11.96	24
	5700	12.00	24
	5745	11.61	30
	5785	11.70	30
	5825	11.79	30

Table 8: Test result of Peak Output Power of 802.11n HT20

Mode	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
802.11n HT20	5180	11.08	23
	5200	11.08	23
	5240	11.73	23
	5260	11.10	24
	5280	10.67	24
	5320	11.44	24
	5500	11.53	24
	5600	11.99	24
	5700	11.98	24
	5745	11.53	30
	5785	11.64	30
	5825	11.78	30

Table 9: Test result of Peak Output Power of 802.11ac VHT20

Mode	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
802.11ac VHT20	5180	10.95	23
	5200	11.01	23
	5240	11.77	23
	5260	11.07	24
	5280	10.66	24
	5320	11.63	24
	5500	11.51	24
	5600	11.74	24
	5700	11.93	24
	5745	11.51	30
	5785	11.56	30
	5825	11.78	30

Table 10: Test result of Peak Output Power of 802.11n HT40

Mode	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
802.11n HT40	5190	11.56	23
	5230	11.67	23
	5270	11.02	24
	5310	11.75	24
	5510	11.57	24
	5590	11.38	24
	5670	11.65	24
	5755	11.36	30
	5795	11.69	30

Table 11: Test result of Peak Output Power of 802.11ac VHT40

Mode	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
802.11ac VHT40	5190	11.56	23
	5230	11.62	23
	5270	10.86	24
	5310	11.20	24
	5510	11.67	24
	5590	11.76	24
	5670	11.61	24
	5755	11.49	30
	5795	11.64	30

5.1.3 26dB Bandwidth

RESULT:
Pass

Date of testing : 2017-05-24
 Test standard : FCC Part 15.407(a)(5)
 Basic standard : ANSI C63.10: 2013
 Kind of test site : Shielded room

Test setup

Test Channel : All channel
 Operation Mode : A.1, B.1, C.1, D.1
 Ambient temperature : 24°C
 Relative humidity : 53%
 Atmospheric pressure : 101kPa

Table 12: Test result of 26dB Bandwidth Band U-NII-1

Mode	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5180	19.66	N/A
	5200	19.62	N/A
	5240	19.73	N/A
802.11n HT20	5180	20.11	N/A
	5200	19.84	N/A
	5240	19.87	N/A
802.11n HT40	5190	40.18	N/A
	5230	39.83	N/A
802.11ac VHT20	5180	19.84	N/A
	5200	19.88	N/A
	5240	19.85	N/A
802.11ac VHT40	5190	40.46	N/A
	5230	40.15	N/A

Table 13: Test result of 26dB Bandwidth of Band U-NII-2A

Mode	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5260	19.53	N/A
	5280	19.67	N/A
	5320	19.68	N/A
802.11n HT20	5260	19.92	N/A
	5280	20.01	N/A
	5320	19.85	N/A
802.11n HT40	5270	40.12	N/A
	5310	40.20	N/A
802.11ac VHT20	5260	19.98	N/A
	5280	19.85	N/A
	5320	19.84	N/A
802.11ac VHT40	5270	40.38	N/A
	5310	40.01	N/A

Table 14: Test result of 26dB Bandwidth of Band U-NII-2C

Mode	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5500	19.73	N/A
	5600	19.67	N/A
	5700	19.61	N/A
802.11n HT20	5500	20.00	N/A
	5600	19.84	N/A
	5700	19.91	N/A
802.11n HT40	5510	39.94	N/A
	5590	40.13	N/A
	5670	40.04	N/A
802.11ac VHT20	5500	19.92	N/A
	5600	19.97	N/A
	5700	20.06	N/A
802.11ac VHT40	5510	40.15	N/A
	5590	39.77	N/A
	5670	40.17	N/A

Table 15: Test result of 26dB Bandwidth of Band U-NII-3

Mode	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	19.62	N/A
	5785	19.74	N/A
	5825	19.59	N/A
802.11n HT20	5745	19.88	N/A
	5785	19.85	N/A
	5825	19.88	N/A
802.11n HT40	5755	39.65	N/A
	5795	39.94	N/A
802.11ac VHT20	5745	19.94	N/A
	5785	19.81	N/A
	5825	19.92	N/A
802.11ac VHT40	5755	40.02	N/A
	5795	40.27	N/A

Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 20 von 565

Page 20 of 565

5.1.4 99% Bandwidth
RESULT:
Pass

Date of testing : 2017-05-24
 Test standard : RSS-Gen clause 6.6
 Basic standard : ANSI C63.10: 2013
 Kind of test site : Shielded room

Test setup

Test Channel : All channel
 Operation Mode : A.1, B.1, C.1, D.1
 Ambient temperature : 24°C
 Relative humidity : 53%
 Atmospheric pressure : 101kPa

Table 16: Test result of 99% Bandwidth Band U-NII-1

Mode	Channel Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	5180	16.672	N/A
	5200	16.689	N/A
	5240	16.670	N/A
802.11n HT20	5180	17.739	N/A
	5200	17.733	N/A
	5240	17.706	N/A
802.11n HT40	5190	36.319	N/A
	5230	36.342	N/A
802.11ac VHT20	5180	17.717	N/A
	5200	17.745	N/A
	5240	17.783	N/A
802.11ac VHT40	5190	36.364	N/A
	5230	36.290	N/A

Table 17: Test result of 99% Bandwidth of Band U-NII-2A

Mode	Channel Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	5260	16.655	N/A
	5280	16.660	N/A
	5320	16.688	N/A
802.11n HT20	5260	17.720	N/A
	5280	17.761	N/A
	5320	17.730	N/A
802.11n HT40	5270	36.326	N/A
	5310	36.255	N/A
802.11ac VHT20	5260	17.722	N/A
	5280	17.741	N/A
	5320	17.700	N/A
802.11ac VHT40	5270	36.391	N/A
	5310	36.350	N/A

Table 18: Test result of 99% Bandwidth of Band U-NII-2C

Mode	Channel Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	5500	16.680	N/A
	5600	16.685	N/A
	5700	16.680	N/A
802.11n HT20	5500	17.755	N/A
	5600	17.743	N/A
	5700	17.727	N/A
802.11n HT40	5510	36.290	N/A
	5590	36.243	N/A
	5670	36.271	N/A
802.11ac VHT20	5500	17.729	N/A
	5600	17.729	N/A
	5700	17.731	N/A
802.11ac VHT40	5510	36.295	N/A
	5590	36.346	N/A
	5670	36.309	N/A

Table 19: Test result of 99% Bandwidth of Band U-NII-3

Mode	Channel Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.661	N/A
	5785	16.662	N/A
	5825	16.681	N/A
802.11n HT20	5745	17.755	N/A
	5785	17.734	N/A
	5825	17.701	N/A
802.11n HT40	5755	36.273	N/A
	5795	36.319	N/A
802.11ac VHT20	5745	17.781	N/A
	5785	17.724	N/A
	5825	17.726	N/A
802.11ac VHT40	5755	36.330	N/A
	5795	36.206	N/A

5.1.5 6dB Bandwidth

RESULT:
Pass

Date of testing : 2017-05-24
 Test standard : FCC Part 15.407(e)
 RSS-247 clause 6.2.4(1)
 Basic standard : ANSI C63.10: 2013
 Limit : 500kHz for 6dB bandwidth
 Kind of test site : Shielded room

Test setup

Test Channel : All channel
 Operation Mode : A.1, B.1, C.1, D.1
 Ambient temperature : 24°C
 Relative humidity : 53%
 Atmospheric pressure : 101kPa

Table 20: Test result of 6dB Bandwidth Band U-NII-1

Mode	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5180	16.44	≥0.5
	5200	16.50	≥0.5
	5240	16.39	≥0.5
802.11n HT20	5180	17.64	≥0.5
	5200	17.65	≥0.5
	5240	17.63	≥0.5
802.11n HT40	5190	36.40	≥0.5
	5230	36.34	≥0.5
802.11ac VHT20	5180	17.65	≥0.5
	5200	17.63	≥0.5
	5240	17.63	≥0.5
802.11ac VHT40	5190	36.35	≥0.5
	5230	35.90	≥0.5

Table 21: Test result of 6dB Bandwidth of Band U-NII-2A

Mode	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5260	16.40	≥0.5
	5280	16.44	≥0.5
	5320	16.42	≥0.5
802.11n HT20	5260	17.65	≥0.5
	5280	17.70	≥0.5
	5320	17.63	≥0.5
802.11n HT40	5270	36.19	≥0.5
	5310	36.29	≥0.5
802.11ac VHT20	5260	17.62	≥0.5
	5280	17.63	≥0.5
	5320	17.64	≥0.5
802.11ac VHT40	5270	36.34	≥0.5
	5310	36.11	≥0.5

Table 22: Test result of 6dB Bandwidth of Band U-NII-2C

Mode	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5500	16.41	≥0.5
	5600	16.40	≥0.5
	5700	16.47	≥0.5
802.11n HT20	5500	17.64	≥0.5
	5600	17.64	≥0.5
	5700	17.65	≥0.5
802.11n HT40	5510	36.34	≥0.5
	5590	36.14	≥0.5
	5670	36.34	≥0.5
802.11ac VHT20	5500	17.63	≥0.5
	5600	17.66	≥0.5
	5700	17.63	≥0.5
802.11ac VHT40	5510	36.35	≥0.5
	5590	36.14	≥0.5
	5670	36.34	≥0.5

Table 23: Test result of 6dB Bandwidth of Band U-NII-3

Mode	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.42	≥0.5
	5785	16.43	≥0.5
	5825	16.40	≥0.5
802.11n HT20	5745	17.64	≥0.5
	5785	17.62	≥0.5
	5825	17.67	≥0.5
802.11n HT40	5755	36.13	≥0.5
	5795	36.32	≥0.5
802.11ac VHT20	5745	17.64	≥0.5
	5785	17.63	≥0.5
	5825	17.66	≥0.5
802.11ac VHT40	5755	36.35	≥0.5
	5795	36.35	≥0.5

Mode	Channel Frequency (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)
802.11a	5180	-1.251	10
	5200	-1.499	10
	5240	-1.097	10
802.11n HT20	5180	-1.946	10
	5200	-1.851	10
	5240	-1.527	10
802.11n HT40	5190	-4.632	10
	5230	-4.098	10
802.11ac VHT20	5180	-2.142	10
	5200	-1.701	10
	5240	-1.387	10
802.11ac VHT40	5190	-4.293	10
	5230	-4.164	10

Prüfbericht - Nr.: 50094373 003
Test Report No.
Seite 25 von 565
Page 25 of 565
Table 25: Test result of power spectral density of Band U-NII-2A

Mode	Channel Frequency (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)
802.11a	5260	-1.746	11
	5280	-1.620	11
	5320	-1.376	11
802.11n HT20	5260	-1.901	11
	5280	-1.808	11
	5320	-1.442	11
802.11n HT40	5270	-4.843	11
	5310	-4.143	11
802.11ac VHT20	5260	-1.920	11
	5280	-2.166	11
	5320	-1.674	11
802.11ac VHT40	5270	-4.791	11
	5310	-4.040	11

Table 26: Test result of power spectral density of Band U-NII-2C

Mode	Channel Frequency (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)
802.11a	5500	-1.028	11
	5600	-0.501	11
	5700	-0.510	11
802.11n HT20	5500	-1.247	11
	5600	-0.759	11
	5700	-1.284	11
802.11n HT40	5510	-3.929	11
	5590	-3.773	11
	5670	-3.613	11
802.11ac VHT20	5500	-1.228	11
	5600	-0.826	11
	5700	-0.890	11
802.11ac VHT40	5510	-3.993	11
	5590	-4.015	11
	5670	-3.692	11

Table 27: Test result of power spectral density of Band U-NII-3

Mode	Channel Frequency (MHz)	Result (dBm/500kHz)	Limit (dBm/500kHz)
802.11a	5745	-3.636	30
	5785	-4.384	30
	5825	-3.806	30
802.11n HT20	5745	-4.189	30
	5785	-4.061	30
	5825	-4.233	30
802.11n HT40	5755	-7.282	30
	5795	-7.254	30
802.11ac VHT20	5745	-4.444	30
	5785	-4.256	30
	5825	-4.284	30
802.11ac VHT40	5755	-7.380	30
	5795	-7.337	30

5.1.7 Spurious Emission

RESULT:**Pass**

Date of testing	:	2017-05-06
Test standard	:	FCC part 15.407(b) RSS-247 clause 6.2.1(2) RSS-247 clause 6.2.2(2) RSS-247 clause 6.2.3(2) RSS-247 clause 6.2.4(2) KDB789033 D02 v01
Basic standard	:	ANSI C63.10: 2013
Limits	:	FCC part 15.209(a)
Kind of test site	:	3m Semi-Anechoic Chamber & Anechoic Chamber

Test setup

Test Channel	:	All channel
Operation mode	:	A.1, B.1, C.1, D.1
Ambient temperature	:	24°C
Relative humidity	:	53%
Atmospheric pressure	:	101kPa

The frequency range of testing is 30MHz to 40GHz, and no any emissions were found from 26.5GHz to 40GHz, hence the radiated emission from 26.5GHz only the worst case was recorded.

For details refer to following test plot.

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

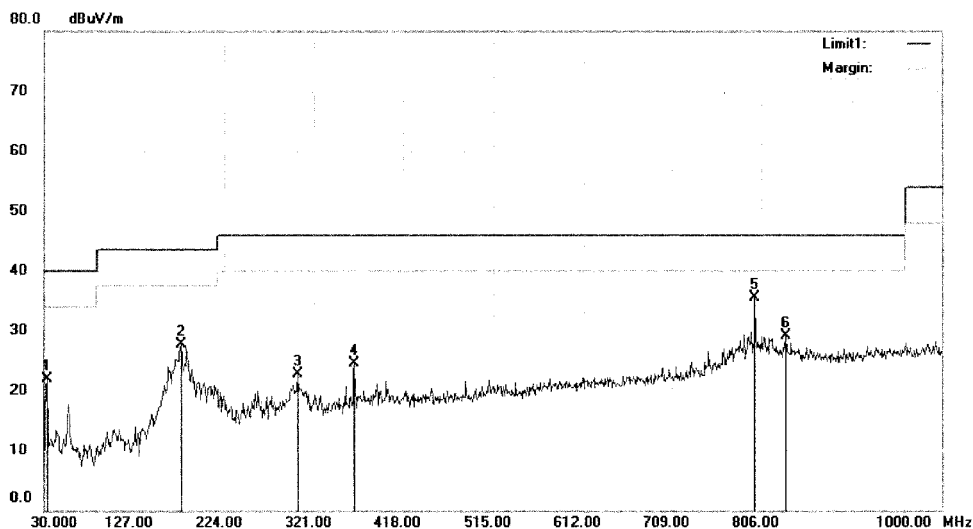
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #77

Date: 2017/05/06

Time:



Site: 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.86	-16.04	21.82	40.00	-18.18	QP		
2		176.4700	45.00	-17.34	27.66	43.50	-15.84	QP		
3		303.5400	34.70	-11.99	22.71	46.00	-23.29	QP		
4		365.6200	34.87	-10.28	24.59	46.00	-21.41	QP		
5	*	799.2100	37.61	-2.03	35.58	46.00	-10.42	QP		
6		832.1900	30.74	-1.67	29.07	46.00	-16.93	QP		

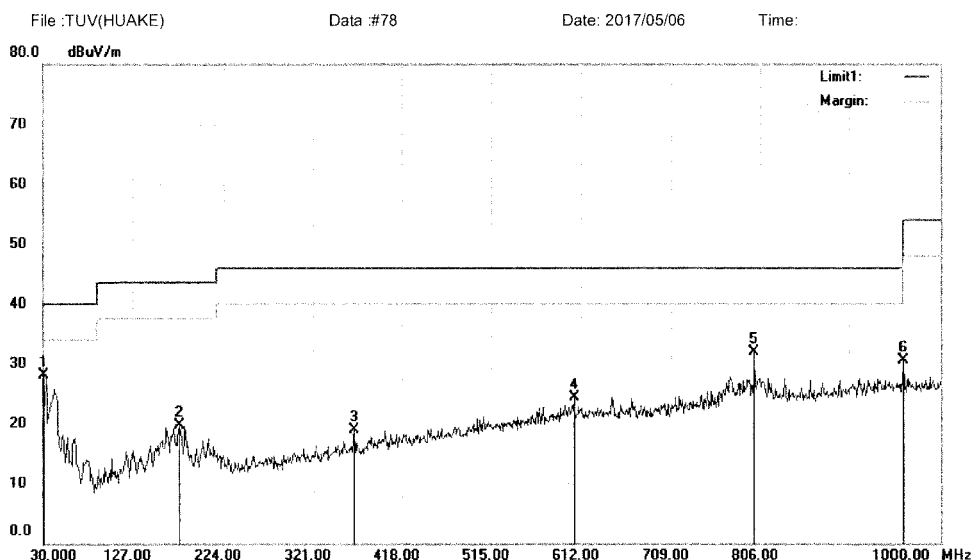
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #77

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	44.45	-16.30	28.15	40.00	-11.85	QP		
2		176.4700	37.03	-17.34	19.69	43.50	-23.81	QP		
3		365.6200	29.14	-10.28	18.86	46.00	-27.14	QP		
4		604.2400	29.29	-5.00	24.29	46.00	-21.71	QP		
5		799.2100	33.90	-2.03	31.87	46.00	-14.13	QP		
6		960.2300	30.85	-0.29	30.56	54.00	-23.44	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #78

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



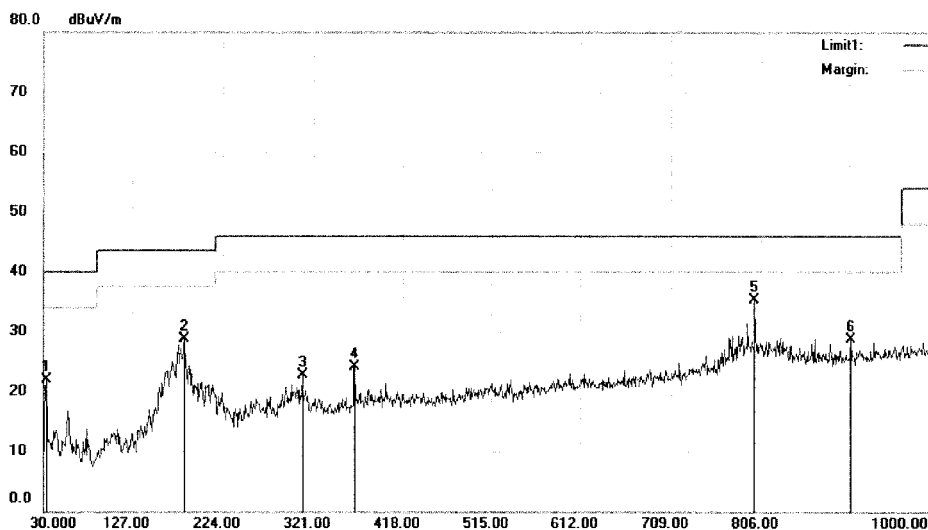
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #79

Date: 2017/05/06

Time:



Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a 5200

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		32.9100	37.90	-16.04	21.86	40.00	-18.14	QP		
2		183.2600	45.47	-16.84	28.63	43.50	-14.87	QP		
3		309.3600	34.61	-11.97	22.64	46.00	-23.36	QP		
4		365.6200	34.38	-10.28	24.10	46.00	-21.90	QP		
5	*	799.2100	37.42	-2.03	35.39	46.00	-10.61	QP		
6		904.9400	29.59	-0.91	28.68	46.00	-17.32	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #79

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

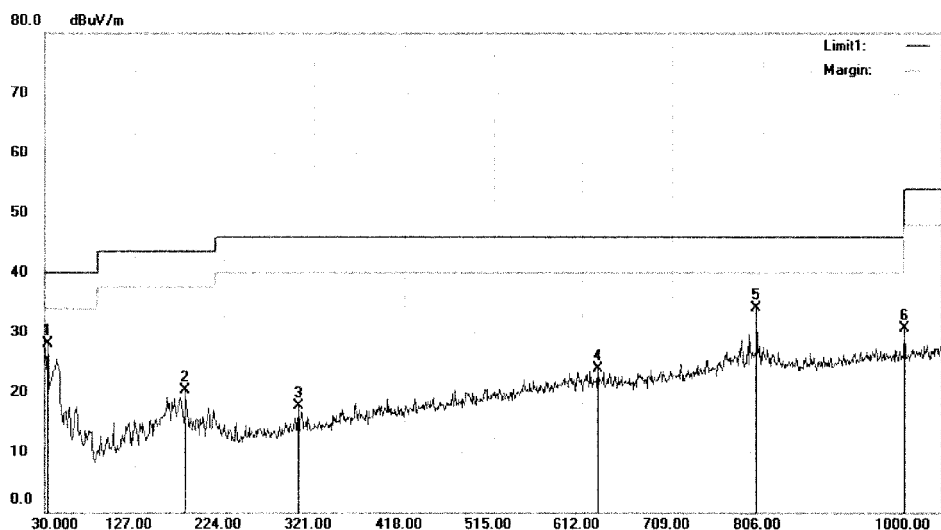

Radiated Emission Measurement

File: TUV(HUAKE)

Data: #80

Date: 2017/05/06

Time:



Site: 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	44.14	-16.04	28.10	40.00	-11.90	QP		
2		182.2900	37.04	-16.83	20.21	43.50	-23.29	QP		
3		304.5100	29.75	-11.99	17.76	46.00	-28.24	QP		
4		629.4600	28.70	-4.74	23.96	46.00	-22.04	QP		
5	*	799.2100	36.22	-2.03	34.19	46.00	-11.81	QP		
6		960.2300	31.00	-0.29	30.71	54.00	-23.29	QP		

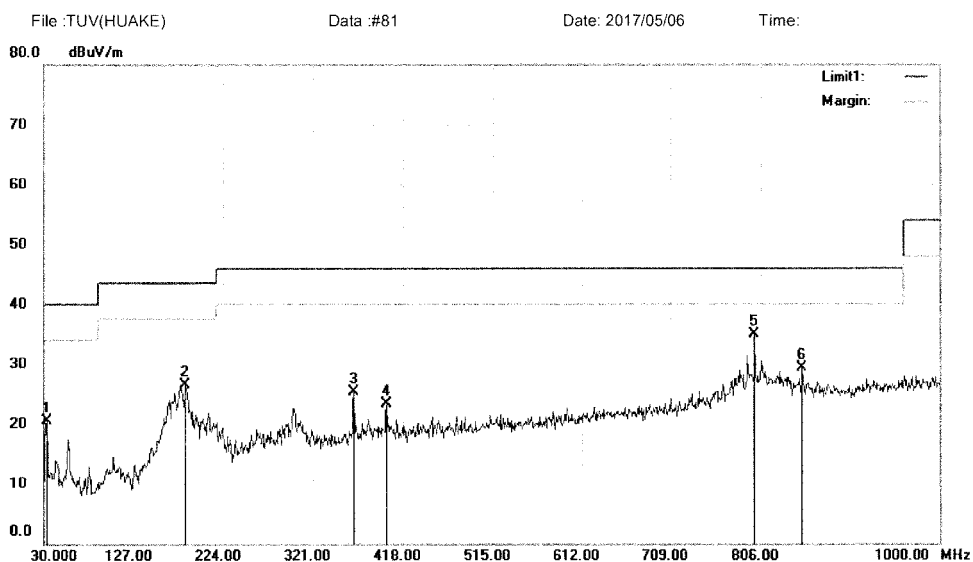
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #80

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		32.9100	36.51	-16.04	20.47	40.00	-19.53	QP		
2		182.2900	43.40	-16.83	26.57	43.50	-16.93	QP		
3		365.6200	35.56	-10.28	25.28	46.00	-20.72	QP		
4		400.5400	32.52	-9.24	23.28	46.00	-22.72	QP		
5	*	799.2100	36.86	-2.03	34.83	46.00	-11.17	QP		
6		849.6500	30.85	-1.49	29.36	46.00	-16.64	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #81

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

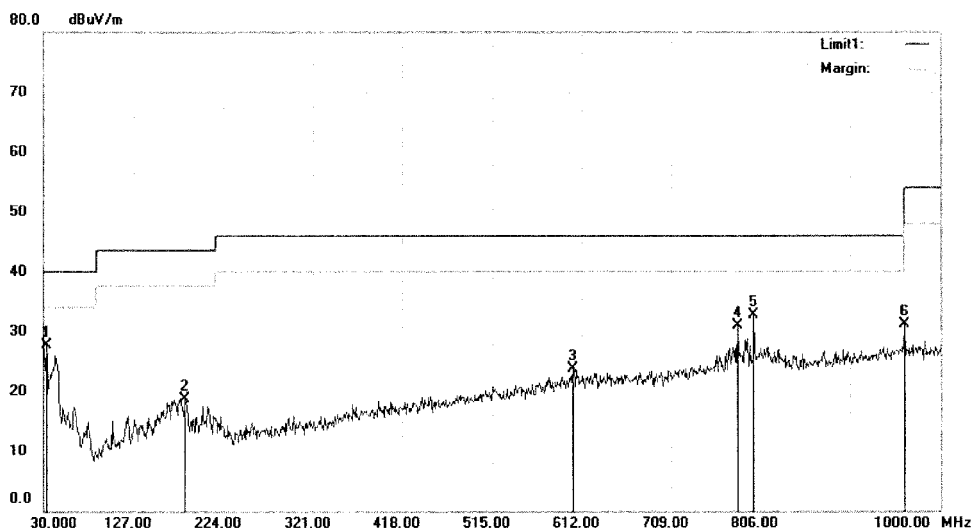

Radiated Emission Measurement

File: TUV(HUAKE)

Data: #82

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	43.80	-16.04	27.76	40.00	-12.24	QP		
2		182.2900	35.57	-16.83	18.74	43.50	-24.76	QP		
3		602.3000	28.75	-5.03	23.72	46.00	-22.28	QP		
4		781.7500	33.32	-2.38	30.94	46.00	-15.06	QP		
5		799.2100	34.66	-2.03	32.63	46.00	-13.37	QP		
6		960.2300	31.43	-0.29	31.14	54.00	-22.86	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data :#82

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

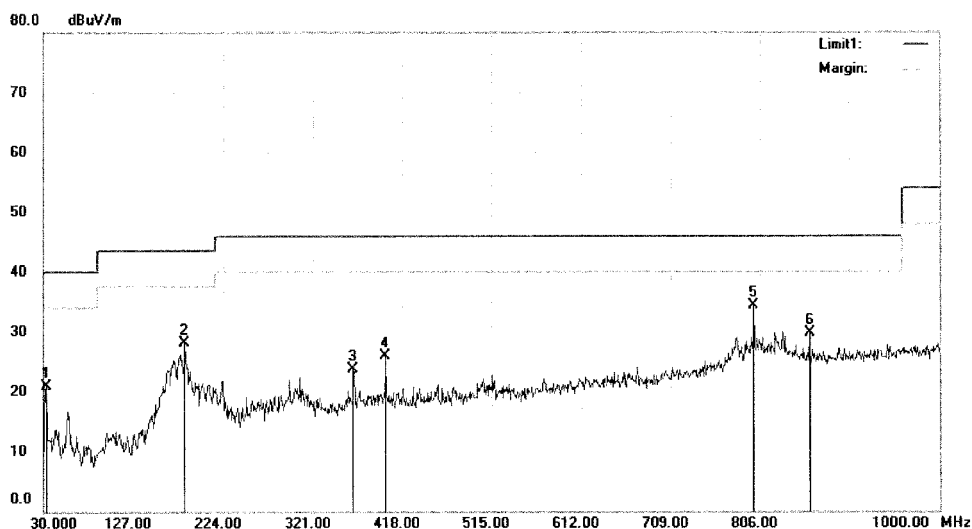

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#83

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a 5260

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.89	-16.04	20.85	40.00	-19.15	QP		
2		182.2900	45.00	-16.83	28.17	43.50	-15.33	QP		
3		364.6500	33.93	-10.29	23.64	46.00	-22.36	QP		
4		399.5700	35.17	-9.26	25.91	46.00	-20.09	QP		
5	*	799.2100	36.35	-2.03	34.32	46.00	-11.68	QP		
6		860.3200	30.99	-1.38	29.61	46.00	-16.39	QP		

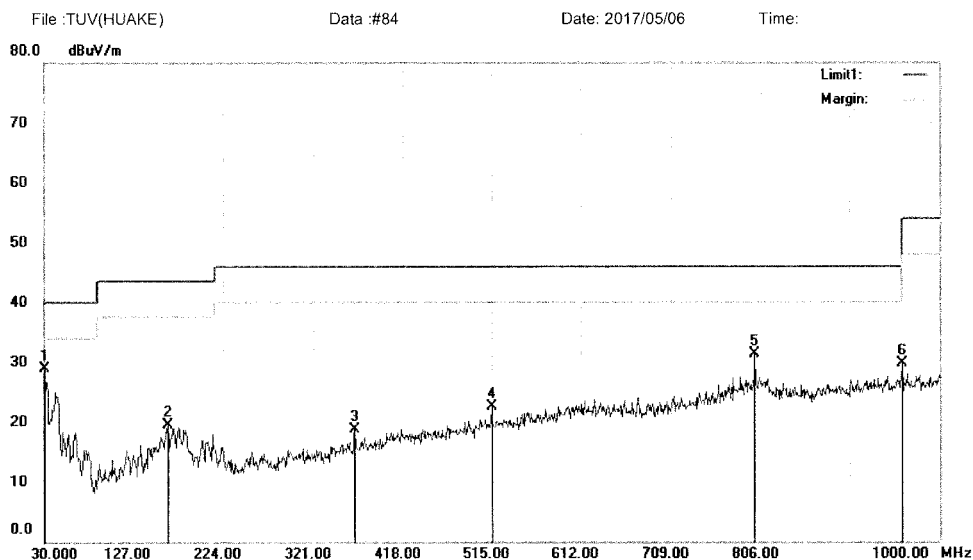
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#83

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5260
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	45.17	-16.30	28.87	40.00	-11.13	QP		
2		164.8300	37.73	-18.32	19.41	43.50	-24.09	QP		
3		365.6200	28.96	-10.28	18.68	46.00	-27.32	QP		
4		515.0000	29.59	-7.15	22.44	46.00	-23.56	QP		
5		799.2100	33.40	-2.03	31.37	46.00	-14.63	QP		
6		960.2300	30.09	-0.29	29.80	54.00	-24.20	QP		

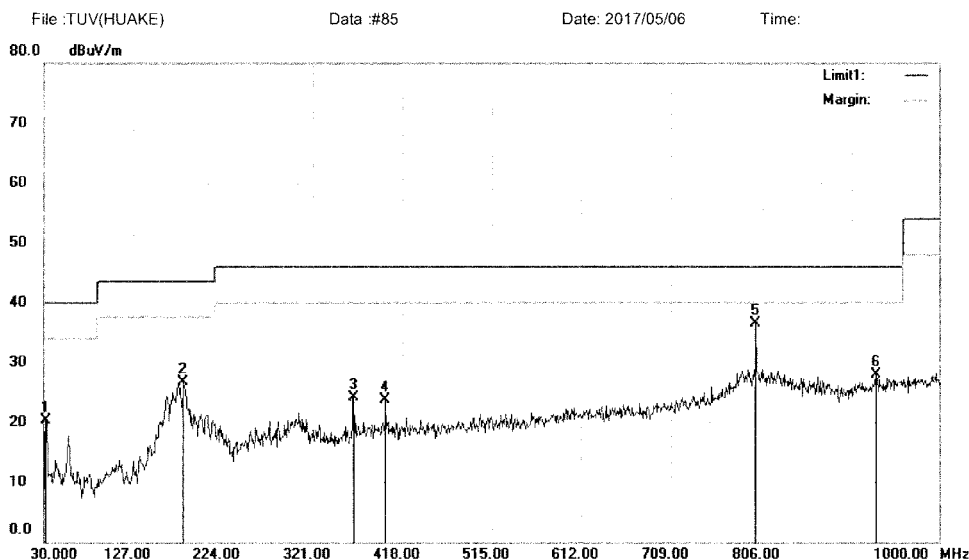
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #84

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5280
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.9400	36.54	-16.24	20.30	40.00	-19.70	QP		
2		182.2900	43.45	-16.83	26.62	43.50	-16.88	QP		
3		365.6200	34.38	-10.28	24.10	46.00	-21.90	QP		
4		399.5700	32.96	-9.26	23.70	46.00	-22.30	QP		
5	*	799.2100	38.58	-2.03	36.55	46.00	-9.45	QP		
6		930.1600	28.47	-0.62	27.85	46.00	-18.15	QP		

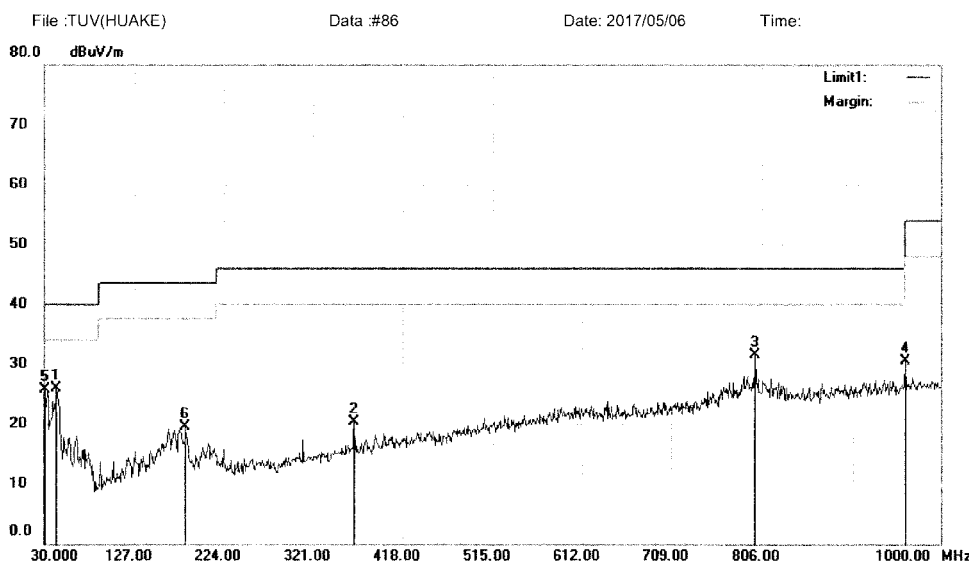
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #85

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5280
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	42.6100	40.78	-14.94	25.84	40.00	-14.16	QP		
2		365.6200	30.55	-10.28	20.27	46.00	-25.73	QP		
3		799.2100	33.55	-2.03	31.52	46.00	-14.48	QP		
4		960.2300	30.71	-0.29	30.42	54.00	-23.58	QP		
5		30.0000	41.99	-16.30	25.69	40.00	-14.31	QP		
6		182.2900	36.41	-16.83	19.58	43.50	-23.92	QP		

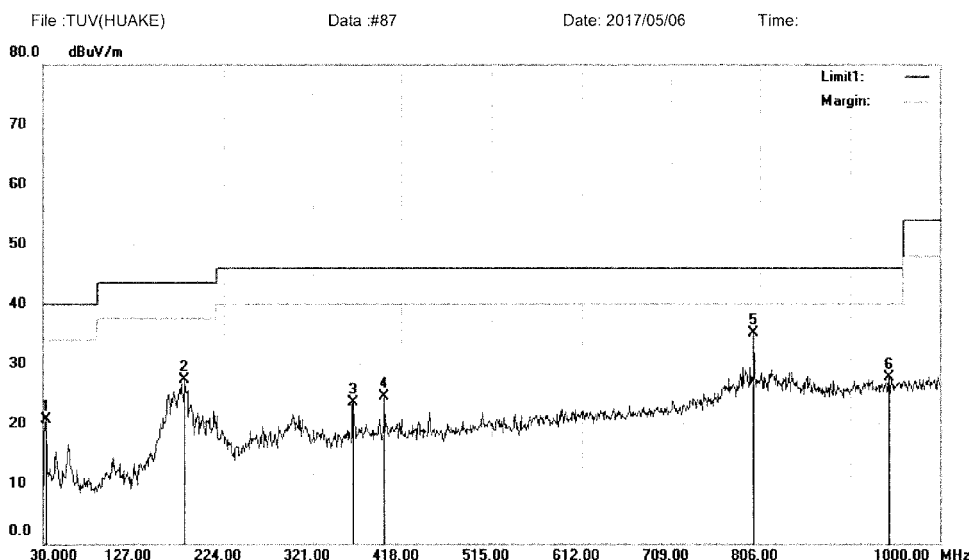
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #86

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5320
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		32.9100	36.75	-16.04	20.71	40.00	-19.29	QP		
2		182.2900	44.13	-16.83	27.30	43.50	-16.20	QP		
3		365.6200	33.86	-10.28	23.58	46.00	-22.42	QP		
4		399.5700	33.81	-9.26	24.55	46.00	-21.45	QP		
5	*	799.2100	37.05	-2.03	35.02	46.00	-10.98	QP		
6		944.7100	28.26	-0.46	27.80	46.00	-18.20	QP		

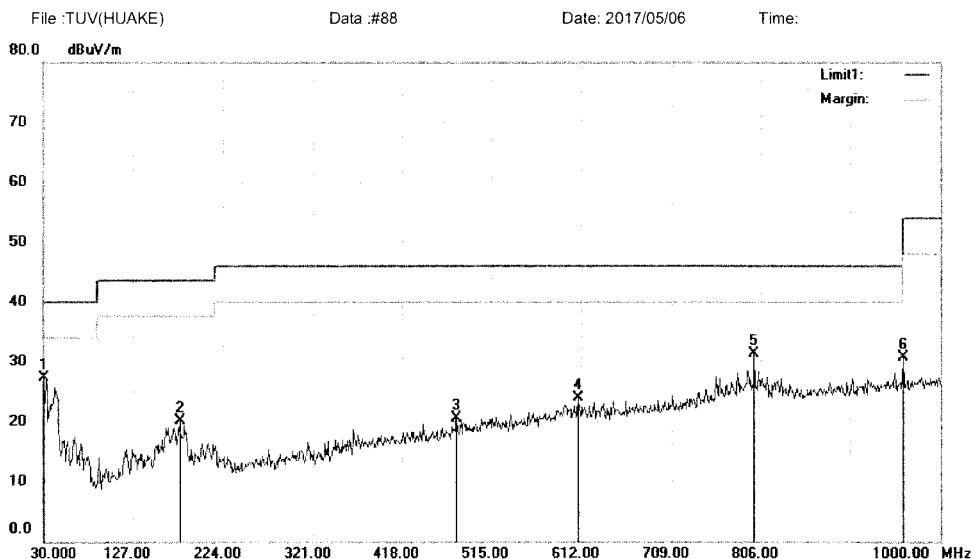
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #87

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11a 5320
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	43.62	-16.26	27.36	40.00	-12.64	QP		
2		177.4400	37.23	-17.20	20.03	43.50	-23.47	QP		
3		478.1400	28.37	-7.83	20.54	46.00	-25.46	QP		
4		608.1200	28.79	-4.97	23.82	46.00	-22.18	QP		
5		799.2100	33.35	-2.03	31.32	46.00	-14.68	QP		
6		960.2300	30.91	-0.29	30.62	54.00	-23.38	QP		

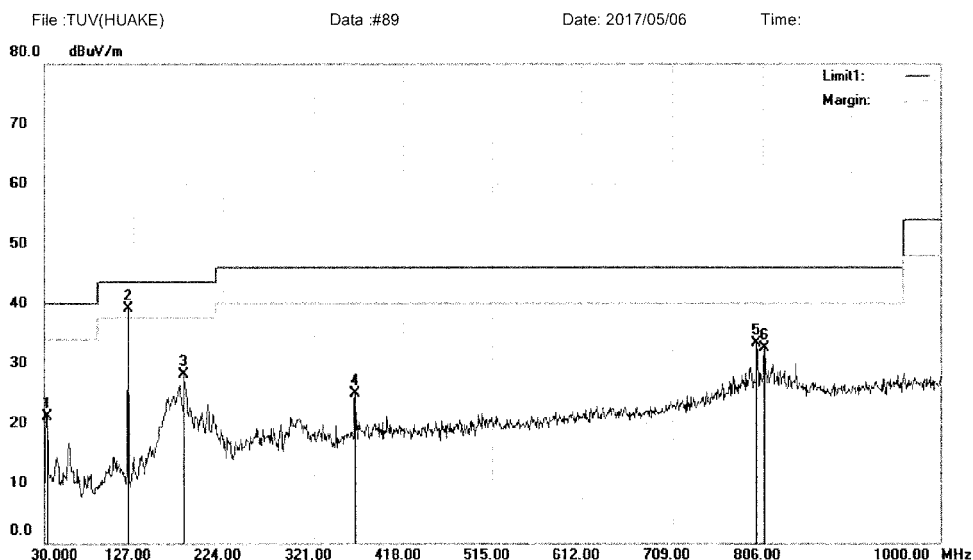
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#88

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5500
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.13	-16.04	21.09	40.00	-18.91	QP		
2	*	121.1800	56.60	-17.50	39.10	43.50	-4.40	QP		
3		182.2900	44.94	-16.83	28.11	43.50	-15.39	QP		
4		365.6200	35.12	-10.28	24.84	46.00	-21.16	QP		
5		799.2100	35.42	-2.03	33.39	46.00	-12.61	QP		
6		807.9400	34.37	-1.93	32.44	46.00	-13.56	QP		

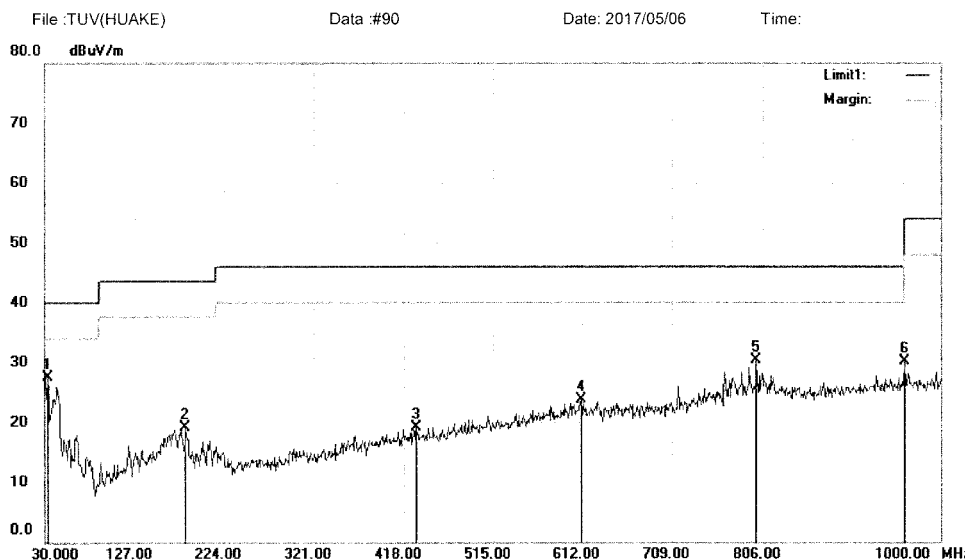
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #89

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5500
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	43.57	-16.04	27.53	40.00	-12.47	QP		
2		182.2900	35.92	-16.83	19.09	43.50	-24.41	QP		
3		431.5800	27.91	-8.78	19.13	46.00	-26.87	QP		
4		611.0300	28.62	-4.92	23.70	46.00	-22.30	QP		
5		799.2100	32.40	-2.03	30.37	46.00	-15.63	QP		
6		960.2300	30.35	-0.29	30.06	54.00	-23.94	QP		

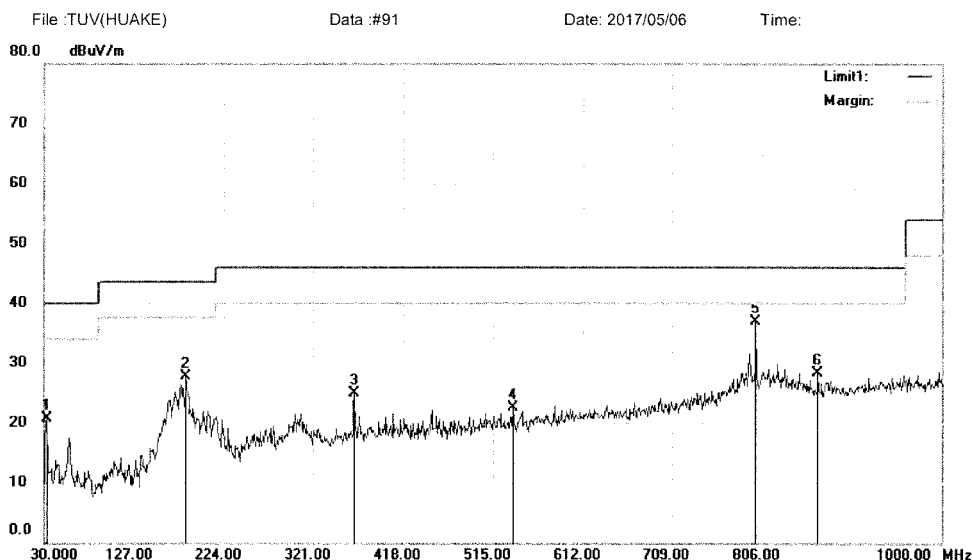
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #90

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a 5600

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.68	-16.04	20.64	40.00	-19.36	QP		
2		182.2900	44.59	-16.83	27.76	43.50	-15.74	QP		
3		365.6200	35.12	-10.28	24.84	46.00	-21.16	QP		
4		536.3400	29.03	-6.62	22.41	46.00	-23.59	QP		
5	*	799.2100	38.99	-2.03	36.96	46.00	-9.04	QP		
6		865.1700	29.69	-1.33	28.36	46.00	-17.64	QP		

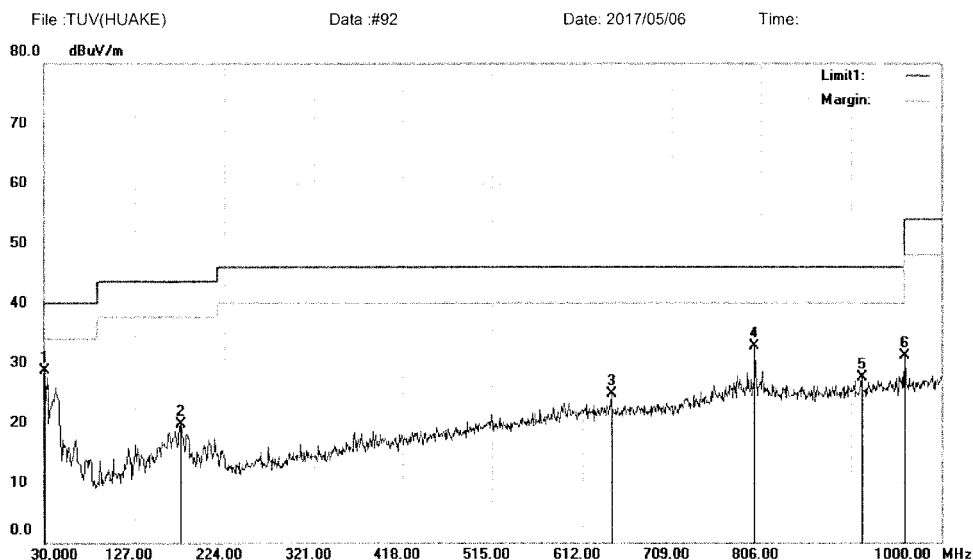
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #91

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a 5600

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	45.04	-16.26	28.78	40.00	-11.22	QP		
2		176.4700	37.01	-17.34	19.67	43.50	-23.83	QP		
3		643.0400	29.39	-4.59	24.80	46.00	-21.20	QP		
4		799.2100	34.76	-2.03	32.73	46.00	-13.27	QP		
5		914.6400	28.21	-0.80	27.41	46.00	-18.59	QP		
6		960.2300	31.36	-0.29	31.07	54.00	-22.93	QP		

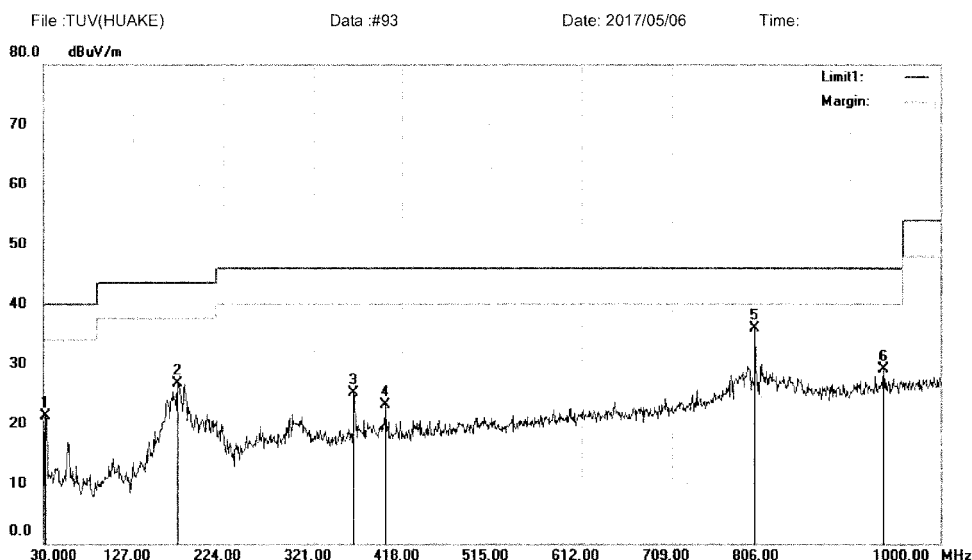
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #92

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5700
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.9400	37.50	-16.24	21.26	40.00	-18.74	QP		
2		175.5000	44.26	-17.48	26.78	43.50	-16.72	QP		
3		364.6500	35.43	-10.29	25.14	46.00	-20.86	QP		
4		399.5700	32.42	-9.26	23.16	46.00	-22.84	QP		
5	*	799.2100	37.90	-2.03	35.87	46.00	-10.13	QP		
6		939.8600	29.54	-0.52	29.02	46.00	-16.98	QP		

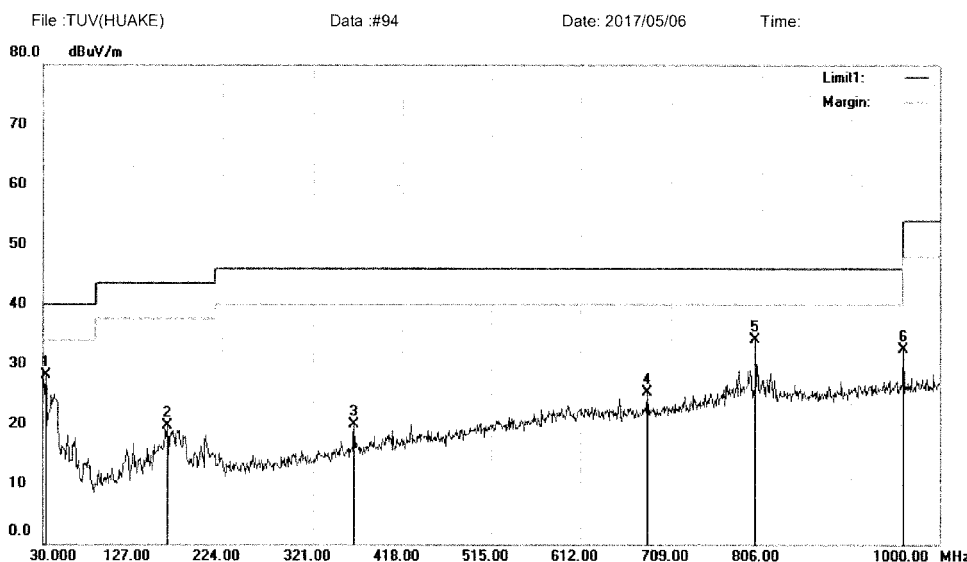
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #93

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5700
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	44.07	-16.04	28.03	40.00	-11.97	QP		
2		164.8300	37.94	-18.32	19.62	43.50	-23.88	QP		
3		365.6200	30.24	-10.28	19.96	46.00	-26.04	QP		
4		683.7800	29.37	-4.16	25.21	46.00	-20.79	QP		
5	*	799.2100	36.19	-2.03	34.16	46.00	-11.84	QP		
6		960.2300	32.70	-0.29	32.41	54.00	-21.59	QP		

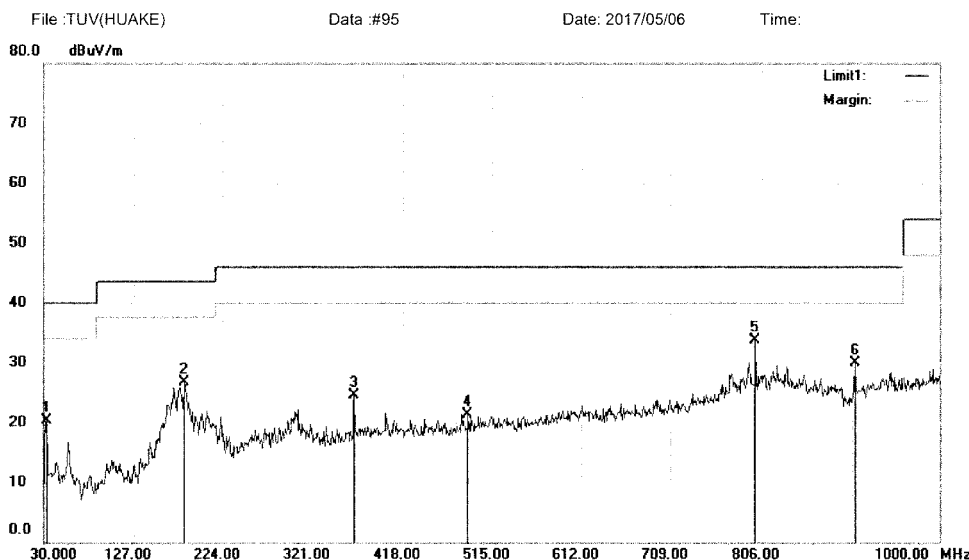
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #94

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.37	-16.04	20.33	40.00	-19.67	QP		
2		182.2900	43.56	-16.83	26.73	43.50	-16.77	QP		
3		365.6200	34.75	-10.28	24.47	46.00	-21.53	QP		
4		488.8100	28.93	-7.65	21.28	46.00	-24.72	QP		
5	*	799.2100	35.69	-2.03	33.66	46.00	-12.34	QP		
6		905.9100	30.70	-0.89	29.81	46.00	-16.19	QP		

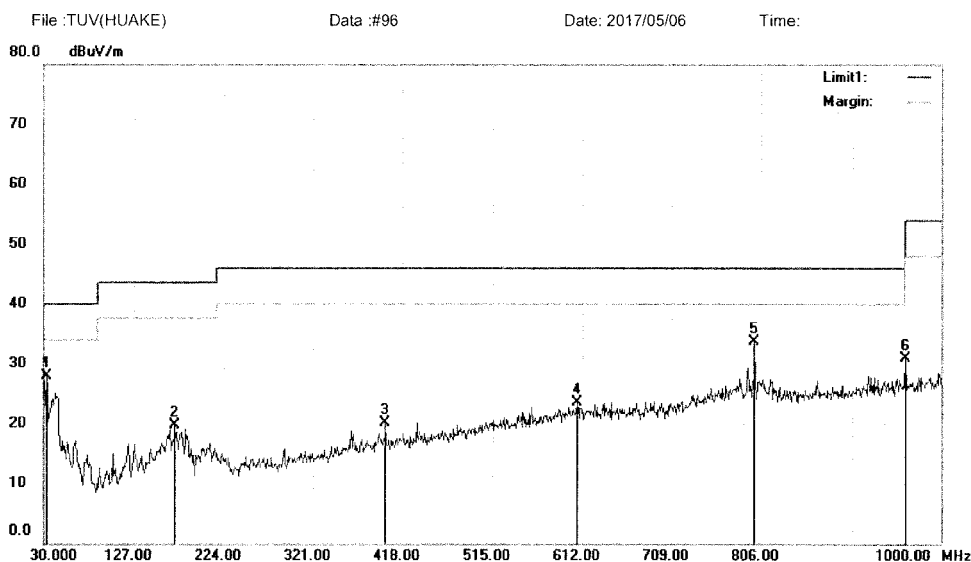
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #95

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	43.96	-16.04	27.92	40.00	-12.08	QP		
2		170.6500	37.96	-18.19	19.77	43.50	-23.73	QP		
3		399.5700	29.44	-9.26	20.18	46.00	-25.82	QP		
4		606.1800	28.45	-4.98	23.47	46.00	-22.53	QP		
5		799.2100	35.74	-2.03	33.71	46.00	-12.29	QP		
6		960.2300	31.12	-0.29	30.83	54.00	-23.17	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

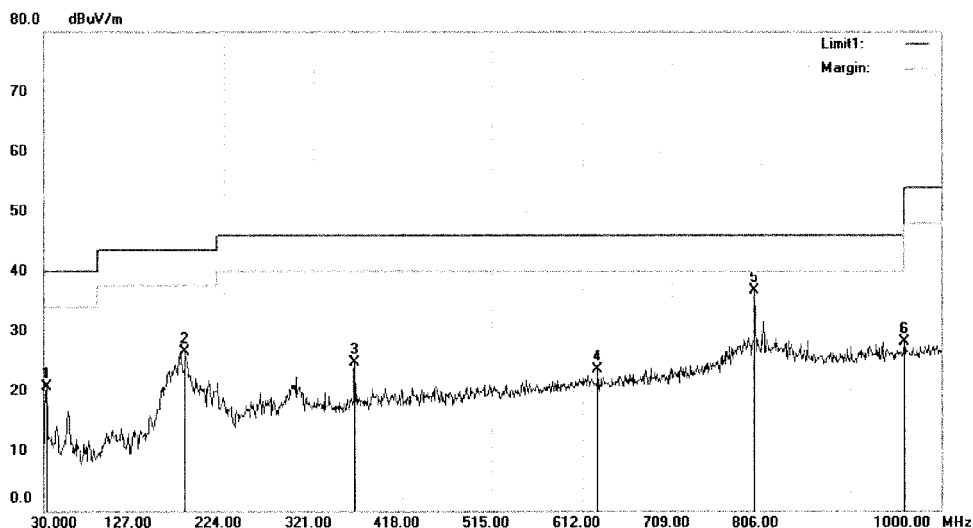
File: TUV(HUAKE)\Data: #96

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File: TUV(HUAKE) Data: #97 Date: 2017/05/06 Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.78	-16.04	20.74	40.00	-19.26	QP		
2		182.2900	43.39	-16.83	26.56	43.50	-16.94	QP		
3		365.6200	34.91	-10.28	24.63	46.00	-21.37	QP		
4		628.4900	28.16	-4.75	23.41	46.00	-22.59	QP		
5	*	799.2100	38.66	-2.03	36.63	46.00	-9.37	QP		
6		960.2300	28.32	-0.29	28.03	54.00	-25.97	QP		

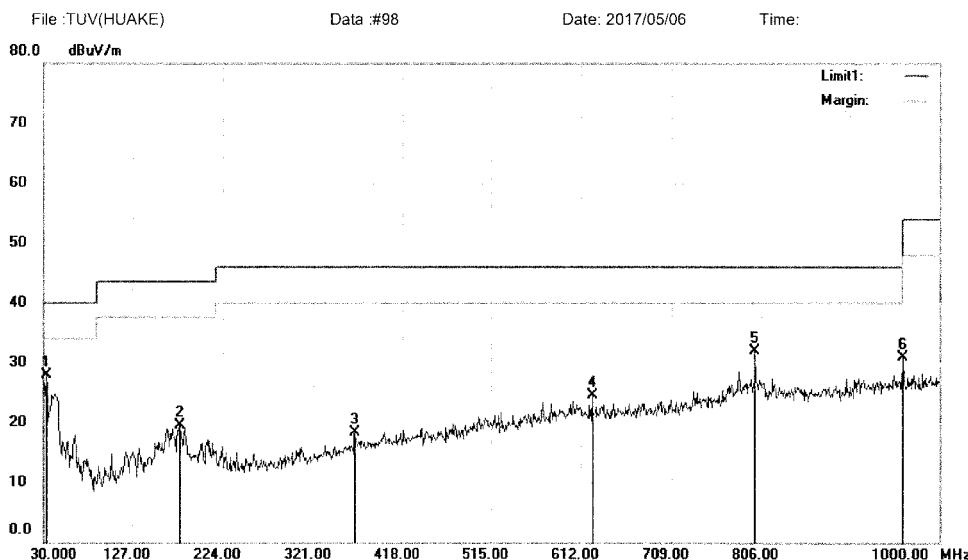
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #97

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5785
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	32.9100	44.00	-16.04	27.96	40.00	-12.04	QP		
2		177.4400	36.65	-17.20	19.45	43.50	-24.05	QP		
3		365.6200	28.58	-10.28	18.30	46.00	-27.70	QP		
4		623.6400	29.26	-4.79	24.47	46.00	-21.53	QP		
5		799.2100	33.89	-2.03	31.86	46.00	-14.14	QP		
6		960.2300	31.22	-0.29	30.93	54.00	-23.07	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #98

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

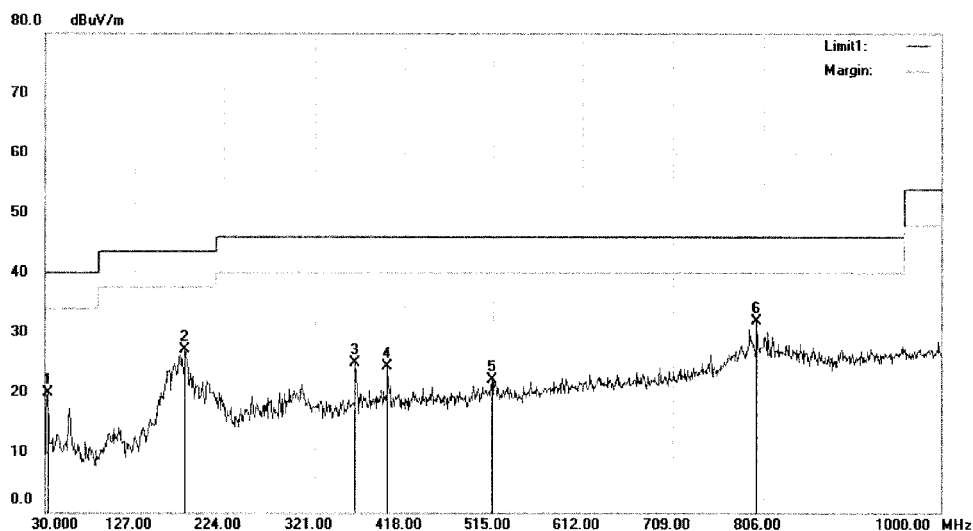

Radiated Emission Measurement

File: TUV(HUAKE)

Data: #99

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.01	-16.04	19.97	40.00	-20.03	QP		
2		182.2900	43.85	-16.83	27.02	43.50	-16.48	QP		
3		364.6500	35.24	-10.29	24.95	46.00	-21.05	QP		
4		399.5700	33.54	-9.26	24.28	46.00	-21.72	QP		
5		514.0300	29.23	-7.18	22.05	46.00	-23.95	QP		
6	*	799.2100	33.88	-2.03	31.85	46.00	-14.15	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #99

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

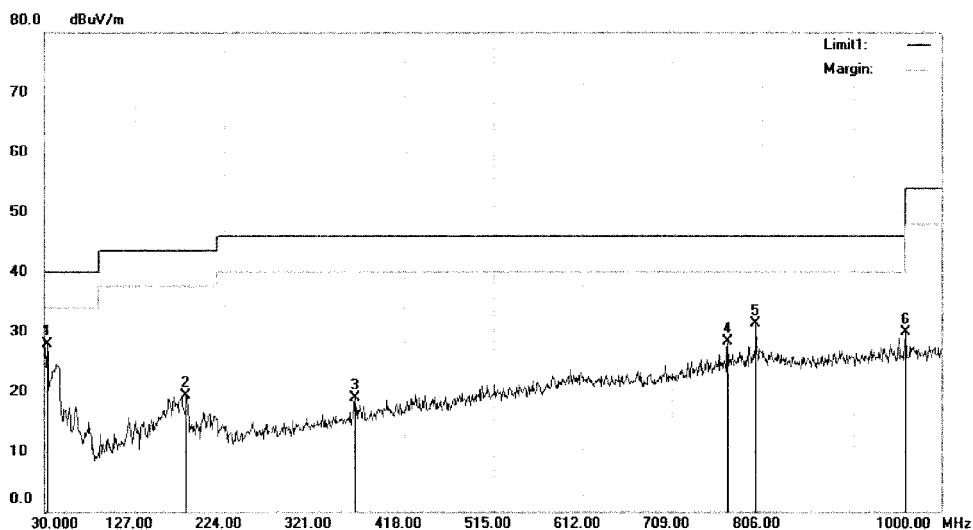

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#100

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a 5825

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	32.9100	44.01	-16.04	27.97	40.00	-12.03	QP		
2		182.2900	36.14	-16.83	19.31	43.50	-24.19	QP		
3		365.6200	29.26	-10.28	18.98	46.00	-27.02	QP		
4		769.1400	30.93	-2.63	28.30	46.00	-17.70	QP		
5		799.2100	33.33	-2.03	31.30	46.00	-14.70	QP		
6		960.2300	30.22	-0.29	29.93	54.00	-24.07	QP		

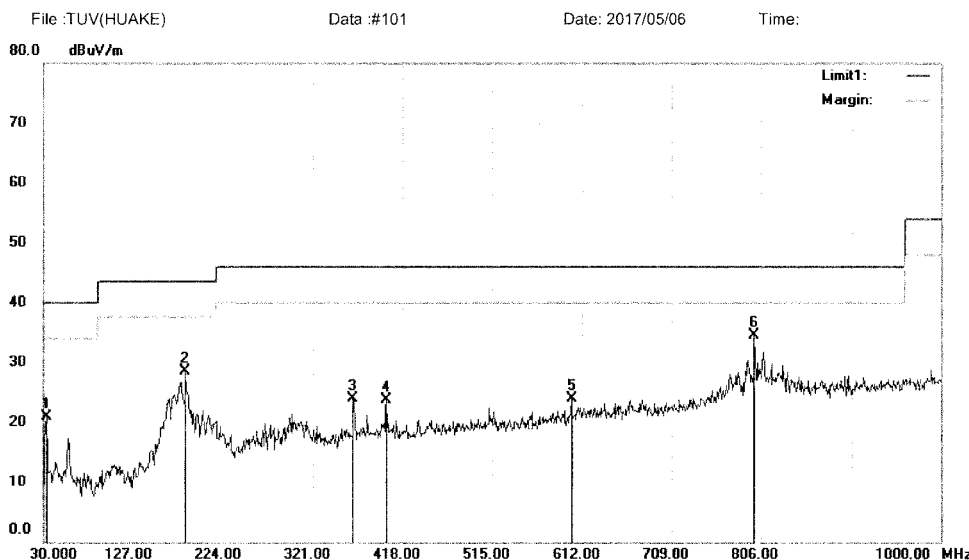
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#100

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.92	-16.04	20.88	40.00	-19.12	QP		
2		182.2900	45.31	-16.83	28.48	43.50	-15.02	QP		
3		364.6500	34.13	-10.29	23.84	46.00	-22.16	QP		
4		400.5400	32.99	-9.24	23.75	46.00	-22.25	QP		
5		600.3600	28.87	-5.05	23.82	46.00	-22.18	QP		
6	*	799.2100	36.51	-2.03	34.48	46.00	-11.52	QP		

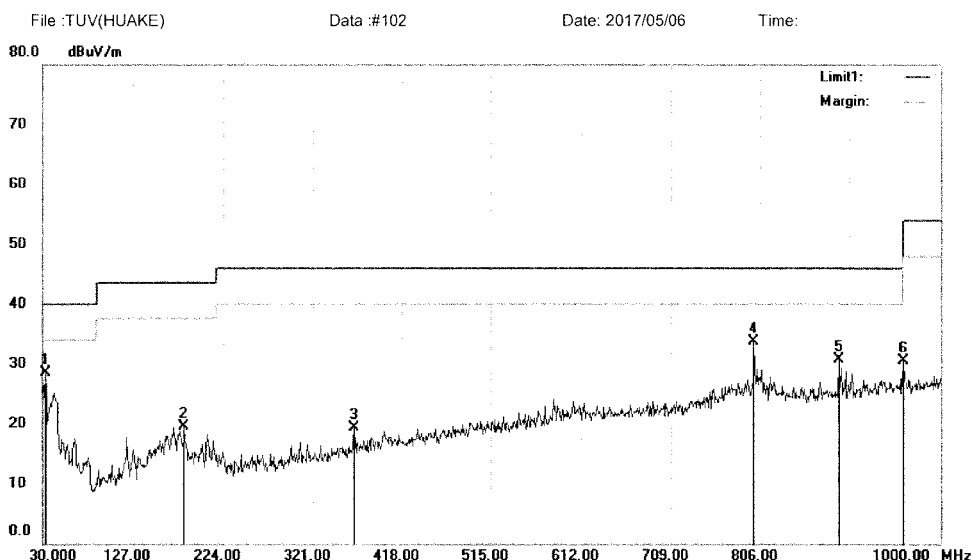
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #101

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.49	-16.04	28.45	40.00	-11.55	QP		
2		182.2900	36.28	-16.83	19.45	43.50	-24.05	QP		
3		365.6200	29.58	-10.28	19.30	46.00	-26.70	QP		
4		799.2100	35.65	-2.03	33.62	46.00	-12.38	QP		
5		891.3600	31.84	-1.04	30.80	46.00	-15.20	QP		
6		960.2300	30.75	-0.29	30.46	54.00	-23.54	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #102

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

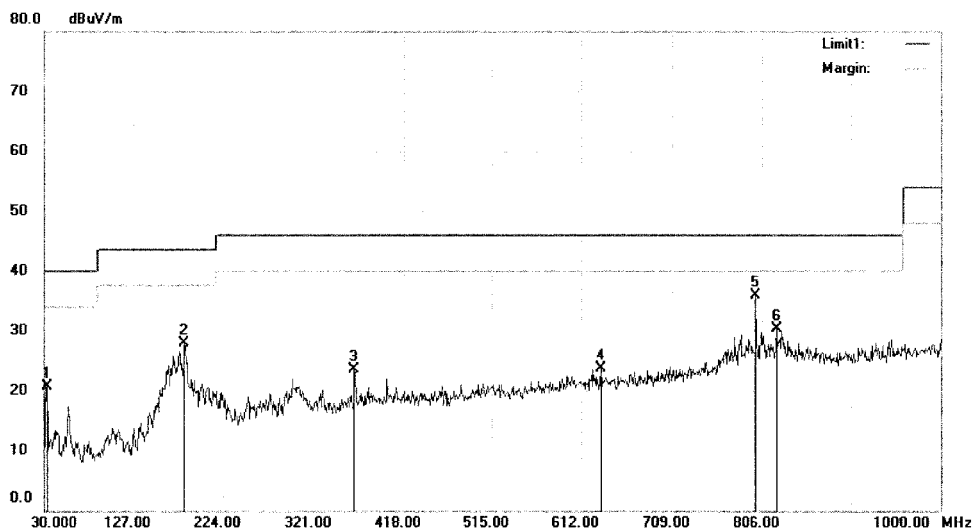

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#103

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.76	-16.04	20.72	40.00	-19.28	QP		
2		182.2900	44.71	-16.83	27.88	43.50	-15.62	QP		
3		364.6500	33.81	-10.29	23.52	46.00	-22.48	QP		
4		633.3400	28.46	-4.69	23.77	46.00	-22.23	QP		
5	*	799.2100	38.00	-2.03	35.97	46.00	-10.03	QP		
6		821.5200	32.00	-1.79	30.21	46.00	-15.79	QP		

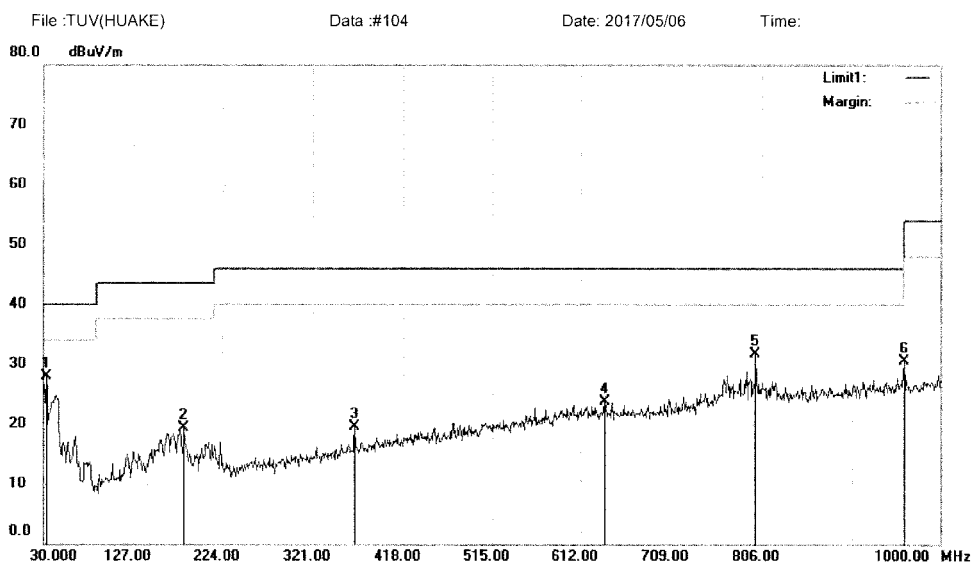
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#103

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5200
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	32.9100	43.89	-16.04	27.85	40.00	-12.15	QP		
2		182.2900	36.06	-16.83	19.23	43.50	-24.27	QP		
3		365.6200	29.70	-10.28	19.42	46.00	-26.58	QP		
4		638.1900	28.39	-4.64	23.75	46.00	-22.25	QP		
5		799.2100	33.65	-2.03	31.62	46.00	-14.38	QP		
6		960.2300	30.75	-0.29	30.46	54.00	-23.54	QP		

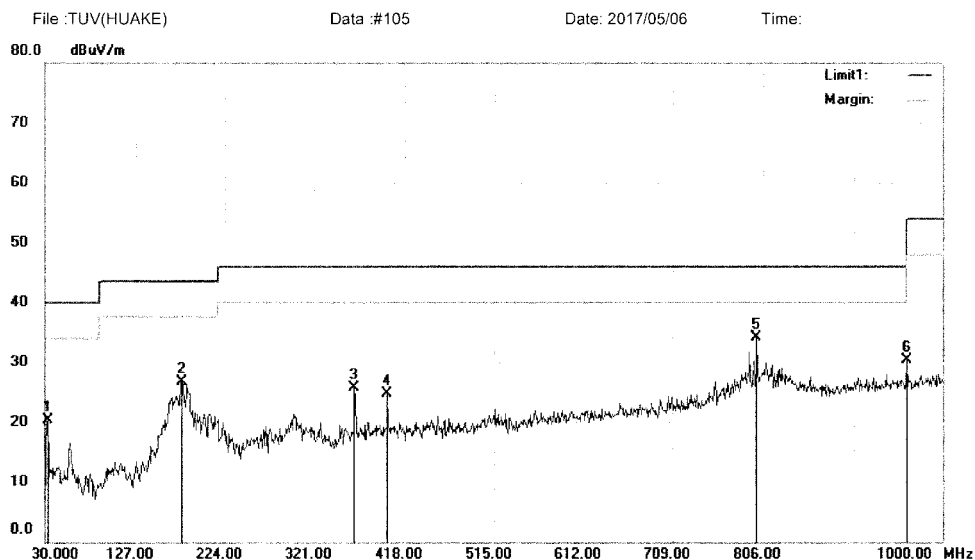
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #104

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.44	-16.04	20.40	40.00	-19.60	QP		
2		176.4700	43.95	-17.34	26.61	43.50	-16.89	QP		
3		364.6500	35.90	-10.29	25.61	46.00	-20.39	QP		
4		399.5700	33.92	-9.26	24.66	46.00	-21.34	QP		
5	*	799.2100	36.04	-2.03	34.01	46.00	-11.99	QP		
6		960.2300	30.53	-0.29	30.24	54.00	-23.76	QP		

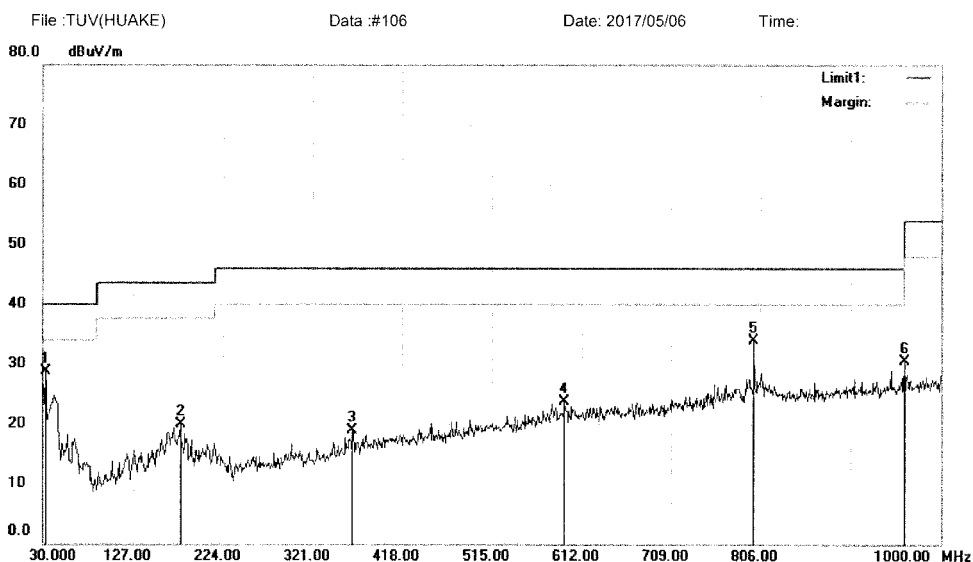
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #105

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.75	-16.04	28.71	40.00	-11.29	QP		
2		177.4400	37.11	-17.20	19.91	43.50	-23.59	QP		
3		364.6500	29.18	-10.29	18.89	46.00	-27.11	QP		
4		593.5700	28.92	-5.21	23.71	46.00	-22.29	QP		
5		799.2100	35.84	-2.03	33.81	46.00	-12.19	QP		
6		960.2300	30.75	-0.29	30.46	54.00	-23.54	QP		

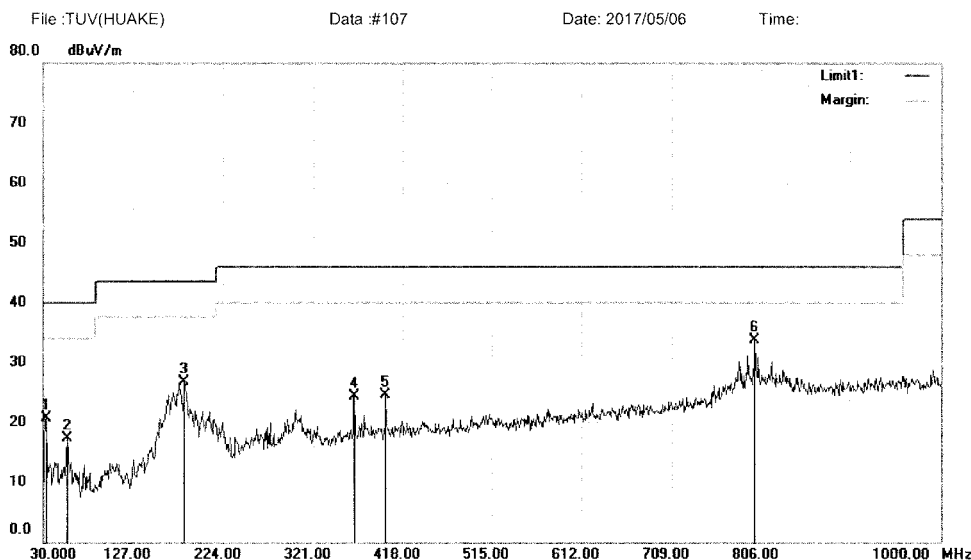
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#106

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg.69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT20 5260
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.82	-16.04	20.78	40.00	-19.22	QP		
2		56.1900	32.77	-15.55	17.22	40.00	-22.78	QP		
3		182.2900	43.62	-16.83	26.79	43.50	-16.71	QP		
4		365.6200	34.55	-10.28	24.27	46.00	-21.73	QP		
5		399.5700	33.77	-9.26	24.51	46.00	-21.49	QP		
6	*	799.2100	35.83	-2.03	33.80	46.00	-12.20	QP		

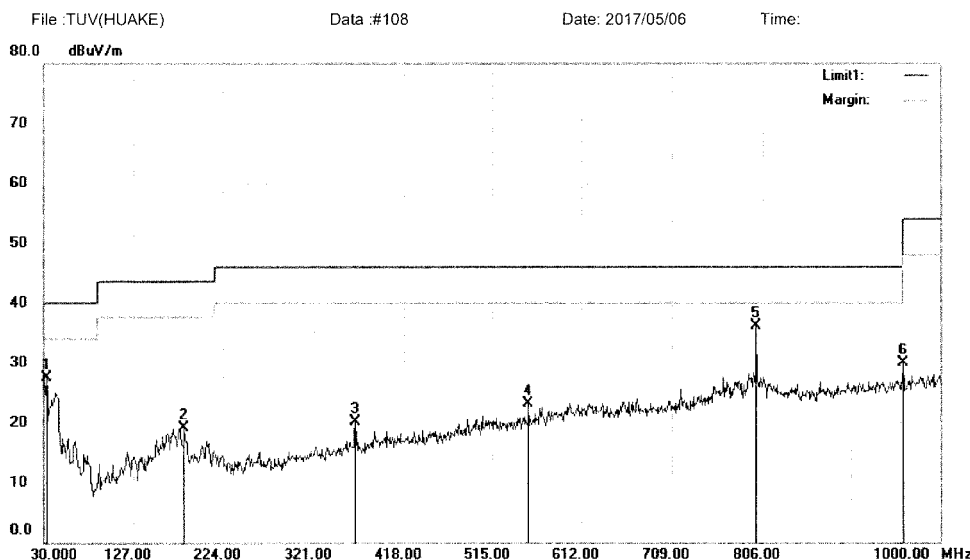
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#107

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5260
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	43.46	-16.04	27.42	40.00	-12.58	QP		
2		182.2900	35.93	-16.83	19.10	43.50	-24.40	QP		
3		365.6200	30.31	-10.28	20.03	46.00	-25.97	QP		
4		554.7700	29.23	-6.17	23.06	46.00	-22.94	QP		
5	*	799.2100	38.08	-2.03	36.05	46.00	-9.95	QP		
6		960.2300	30.29	-0.29	30.00	54.00	-24.00	QP		

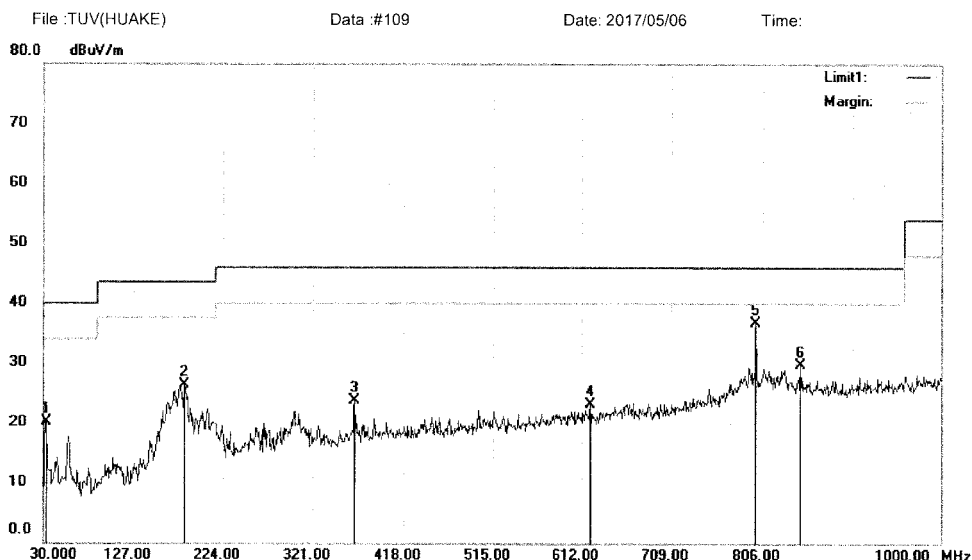
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #108

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5280
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.22	-16.04	20.18	40.00	-19.82	QP		
2		182.2900	43.11	-16.83	26.28	43.50	-17.22	QP		
3		365.6200	33.96	-10.28	23.68	46.00	-22.32	QP		
4		621.7000	27.97	-4.82	23.15	46.00	-22.85	QP		
5	*	799.2100	38.74	-2.03	36.71	46.00	-9.29	QP		
6		846.7400	31.20	-1.53	29.67	46.00	-16.33	QP		

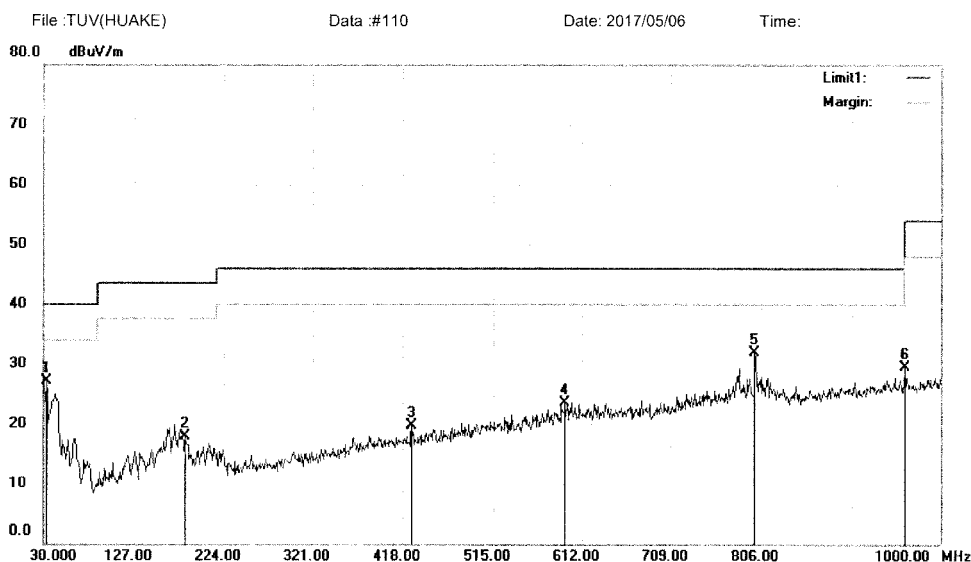
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #109

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5280
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	43.18	-16.04	27.14	40.00	-12.86	QP		
2		182.2900	34.79	-16.83	17.96	43.50	-25.54	QP		
3		427.7000	28.50	-8.85	19.65	46.00	-26.35	QP		
4		593.5700	28.72	-5.21	23.51	46.00	-22.49	QP		
5		799.2100	33.93	-2.03	31.90	46.00	-14.10	QP		
6		960.2300	29.77	-0.29	29.48	54.00	-24.52	QP		

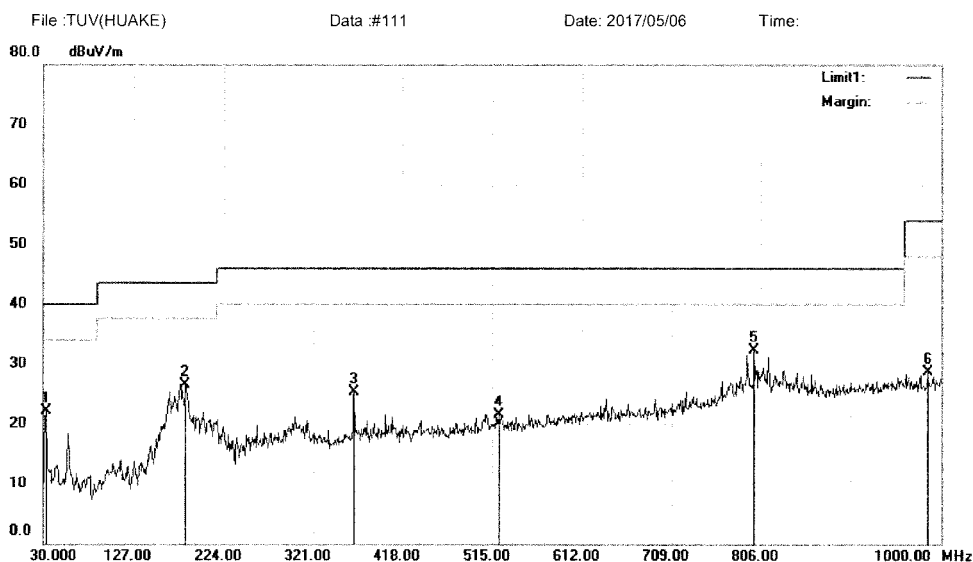
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#110

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5320
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	38.09	-16.04	22.05	40.00	-17.95	QP		
2		182.2900	43.32	-16.83	26.49	43.50	-17.01	QP		
3		365.6200	35.49	-10.28	25.21	46.00	-20.79	QP		
4		521.7900	28.53	-6.99	21.54	46.00	-24.46	QP		
5	*	799.2100	34.36	-2.03	32.33	46.00	-13.67	QP		
6		984.4800	28.75	-0.02	28.73	54.00	-25.27	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #111

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

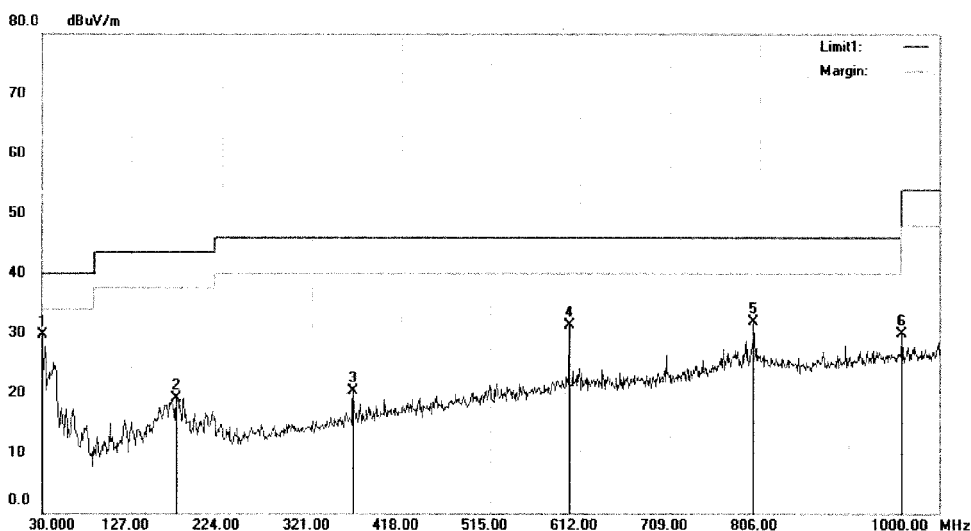

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#112

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20 5320

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	46.09	-16.30	29.79	40.00	-10.21	QP		
2		175.5000	36.59	-17.48	19.11	43.50	-24.39	QP		
3		365.6200	30.50	-10.28	20.22	46.00	-25.78	QP		
4		600.3600	36.37	-5.05	31.32	46.00	-14.68	QP		
5		799.2100	33.88	-2.03	31.85	46.00	-14.15	QP		
6		960.2300	30.14	-0.29	29.85	54.00	-24.15	QP		

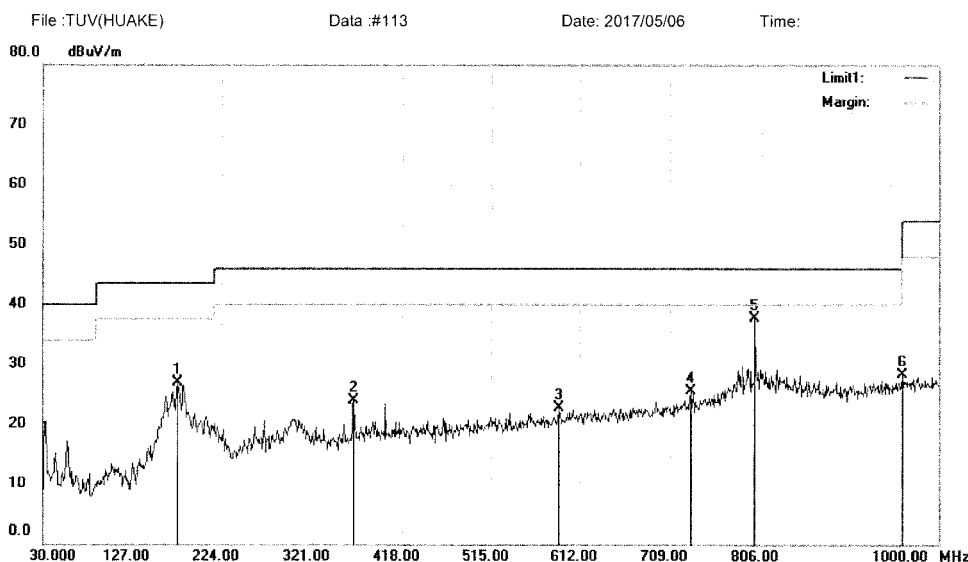
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#112

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5500
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		176.4700	44.21	-17.34	26.87	43.50	-16.63	QP		
2		365.6200	34.14	-10.28	23.86	46.00	-22.14	QP		
3		588.7200	27.95	-5.33	22.62	46.00	-23.38	QP		
4		731.3100	28.96	-3.37	25.59	46.00	-20.41	QP		
5	*	799.2100	39.76	-2.03	37.73	46.00	-8.27	QP		
6		960.2300	28.61	-0.29	28.32	54.00	-25.68	QP		

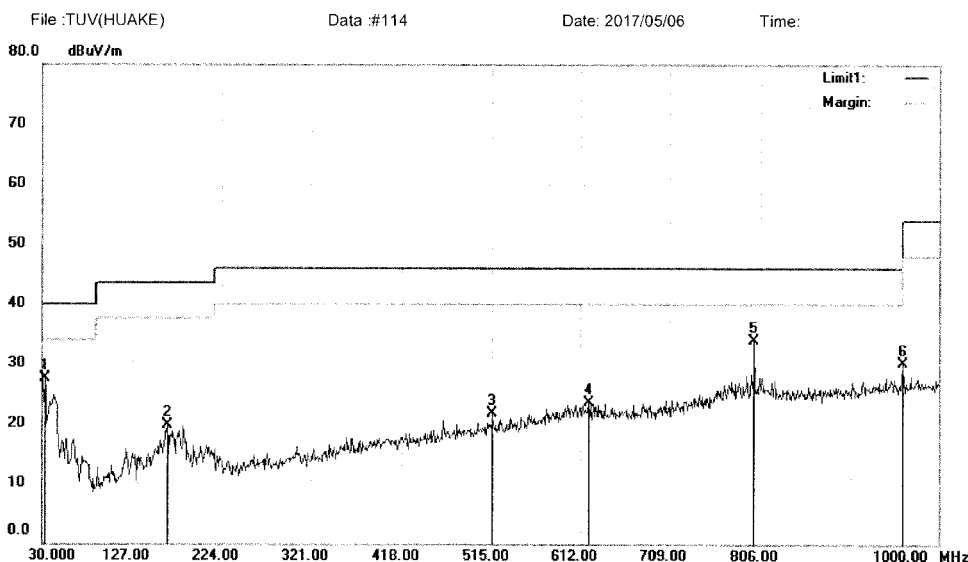
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #113

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5500
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	43.61	-16.04	27.57	40.00	-12.43	QP		
2		164.8300	38.03	-18.32	19.71	43.50	-23.79	QP		
3		515.9700	28.88	-7.13	21.75	46.00	-24.25	QP		
4		621.7000	28.38	-4.82	23.56	46.00	-22.44	QP		
5	*	799.2100	35.97	-2.03	33.94	46.00	-12.06	QP		
6		960.2300	30.38	-0.29	30.09	54.00	-23.91	QP		

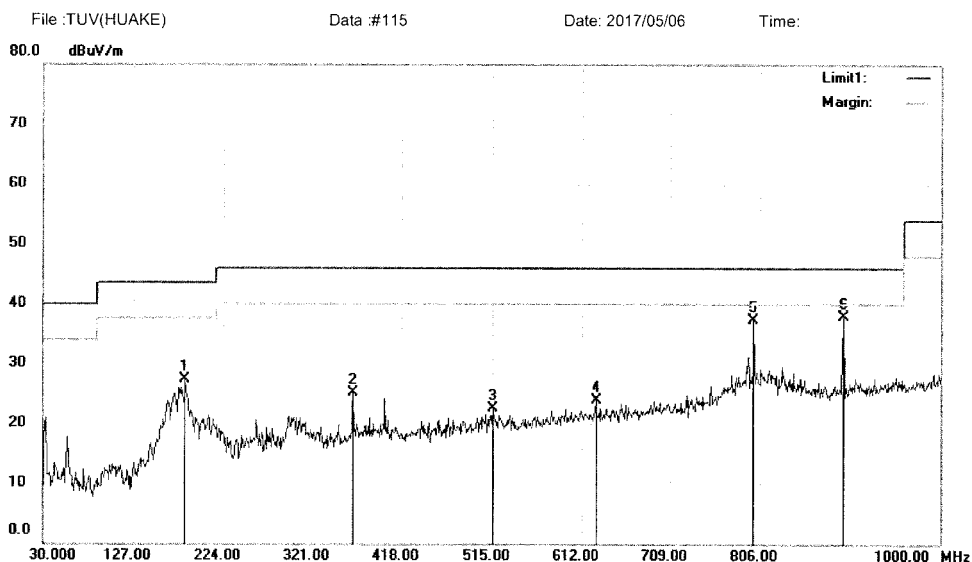
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #114

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5600
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		182.2900	44.06	-16.83	27.23	43.50	-16.27	QP		
2		365.6200	35.48	-10.28	25.20	46.00	-20.80	QP		
3		515.0000	29.59	-7.15	22.44	46.00	-23.56	QP		
4		627.5200	28.58	-4.76	23.82	46.00	-22.18	QP		
5		799.2100	39.28	-2.03	37.25	46.00	-8.75	QP		
6	*	894.2700	38.90	-1.02	37.88	46.00	-8.12	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

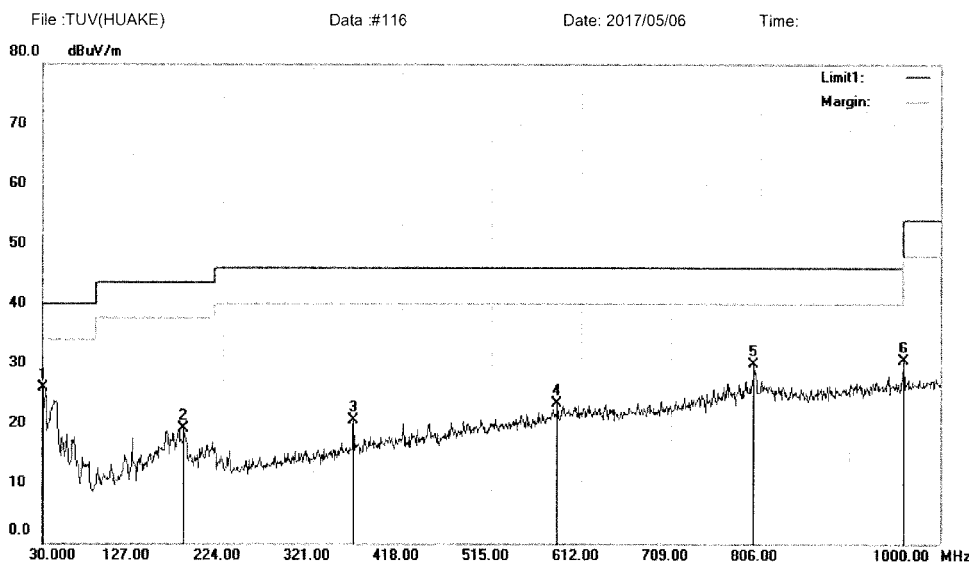
File: TUV(HUAKE)\Data: #115

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11nHT20 5600
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	42.25	-16.30	25.95	40.00	-14.05	QP		
2		182.2900	35.90	-16.83	19.07	43.50	-24.43	QP		
3		365.6200	30.84	-10.28	20.56	46.00	-25.44	QP		
4		585.8100	28.66	-5.41	23.25	46.00	-22.75	QP		
5		799.2100	32.02	-2.03	29.99	46.00	-16.01	QP		
6		960.2300	30.81	-0.29	30.52	54.00	-23.48	QP		

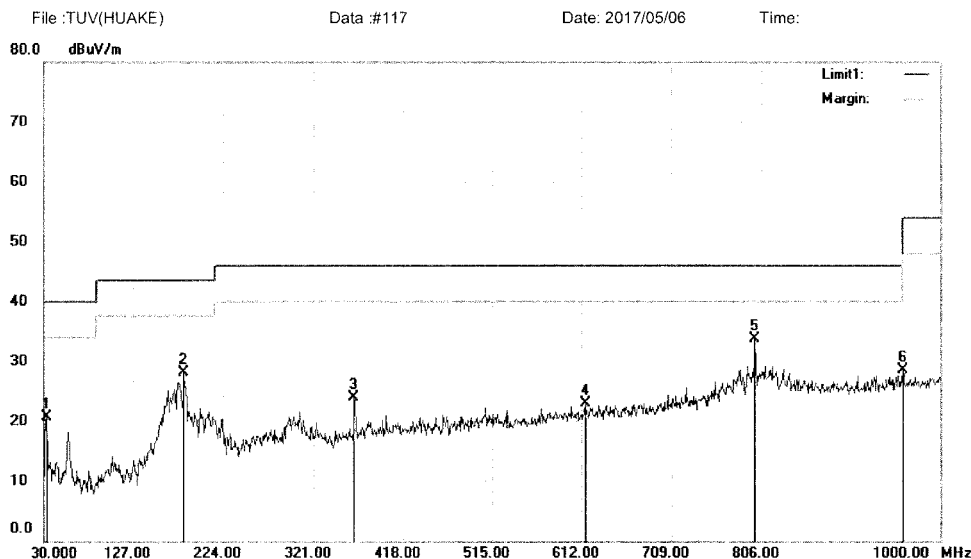
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #116

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5700
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.80	-16.04	20.76	40.00	-19.24	QP		
2		182.2900	44.95	-16.83	28.12	43.50	-15.38	QP		
3		364.6500	34.24	-10.29	23.95	46.00	-22.05	QP		
4		615.8800	27.74	-4.88	22.86	46.00	-23.14	QP		
5	*	799.2100	35.73	-2.03	33.70	46.00	-12.30	QP		
6		960.2300	28.88	-0.29	28.59	54.00	-25.41	QP		

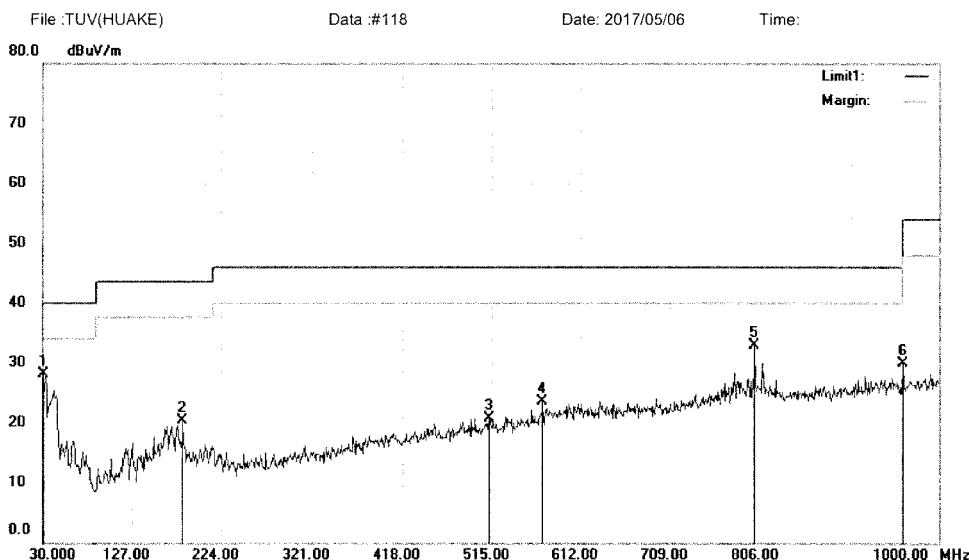
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #117

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5700
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	44.32	-16.26	28.06	40.00	-11.94	QP		
2		182.2900	37.17	-16.83	20.34	43.50	-23.16	QP		
3		511.1200	27.91	-7.25	20.66	46.00	-25.34	QP		
4		570.2900	29.31	-5.78	23.53	46.00	-22.47	QP		
5		799.2100	34.95	-2.03	32.92	46.00	-13.08	QP		
6		960.2300	30.20	-0.29	29.91	54.00	-24.09	QP		

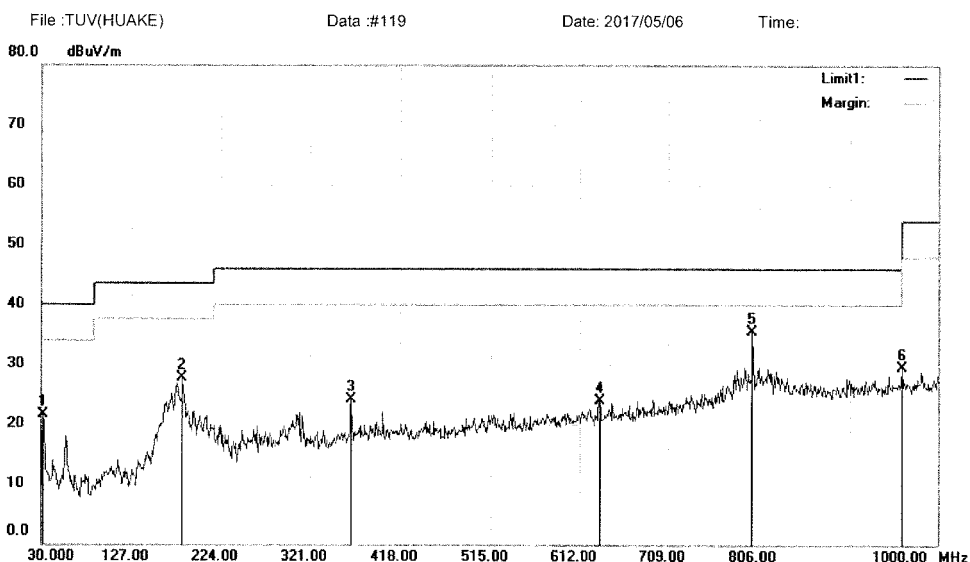
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#118

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.9400	37.74	-16.24	21.50	40.00	-18.50	QP		
2		182.2900	44.49	-16.83	27.66	43.50	-15.84	QP		
3		365.6200	34.45	-10.28	24.17	46.00	-21.83	QP		
4		634.3100	28.60	-4.69	23.91	46.00	-22.09	QP		
5	*	799.2100	37.51	-2.03	35.48	46.00	-10.52	QP		
6		960.2300	29.77	-0.29	29.48	54.00	-24.52	QP		

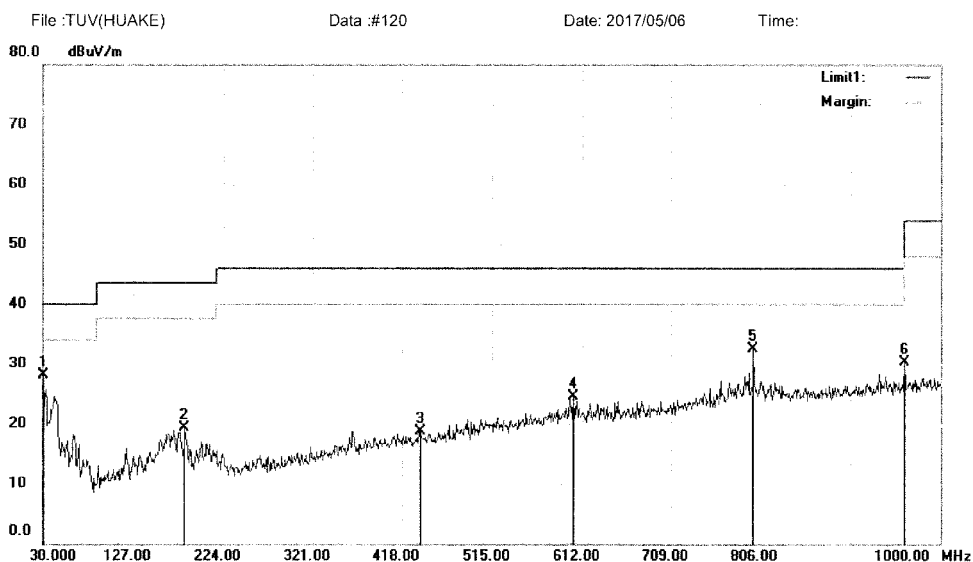
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #119

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5745
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	44.34	-16.30	28.04	40.00	-11.96	QP		
2		182.2900	36.23	-16.83	19.40	43.50	-24.10	QP		
3		437.4000	27.37	-8.65	18.72	46.00	-27.28	QP		
4		602.3000	29.59	-5.03	24.56	46.00	-21.44	QP		
5		799.2100	34.52	-2.03	32.49	46.00	-13.51	QP		
6		960.2300	30.60	-0.29	30.31	54.00	-23.69	QP		

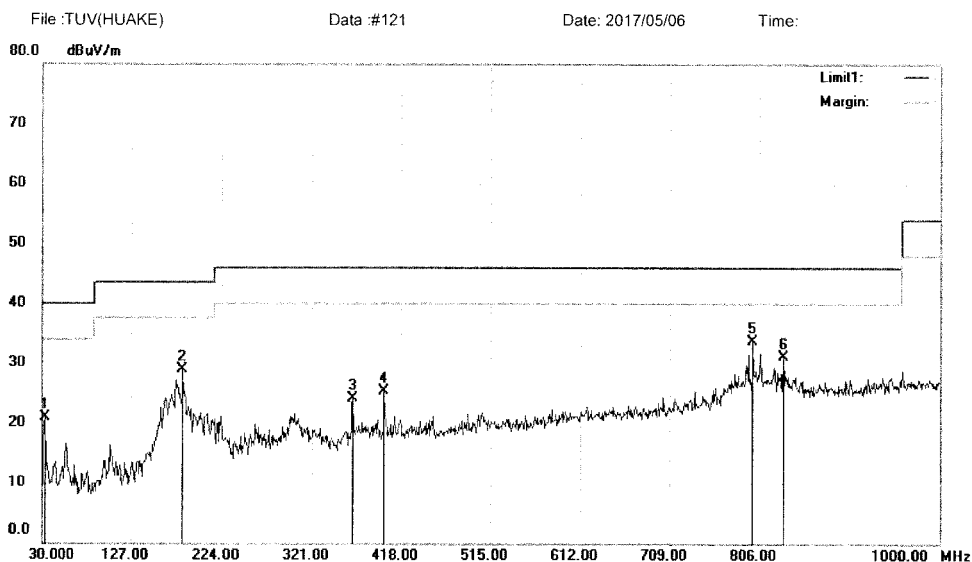
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #120

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.91	-16.04	20.87	40.00	-19.13	QP		
2		182.2900	45.71	-16.83	28.88	43.50	-14.62	QP		
3		365.6200	34.29	-10.28	24.01	46.00	-21.99	QP		
4		399.5700	34.64	-9.26	25.38	46.00	-20.62	QP		
5	*	799.2100	35.82	-2.03	33.79	46.00	-12.21	QP		
6		832.1900	32.82	-1.67	31.15	46.00	-14.85	QP		

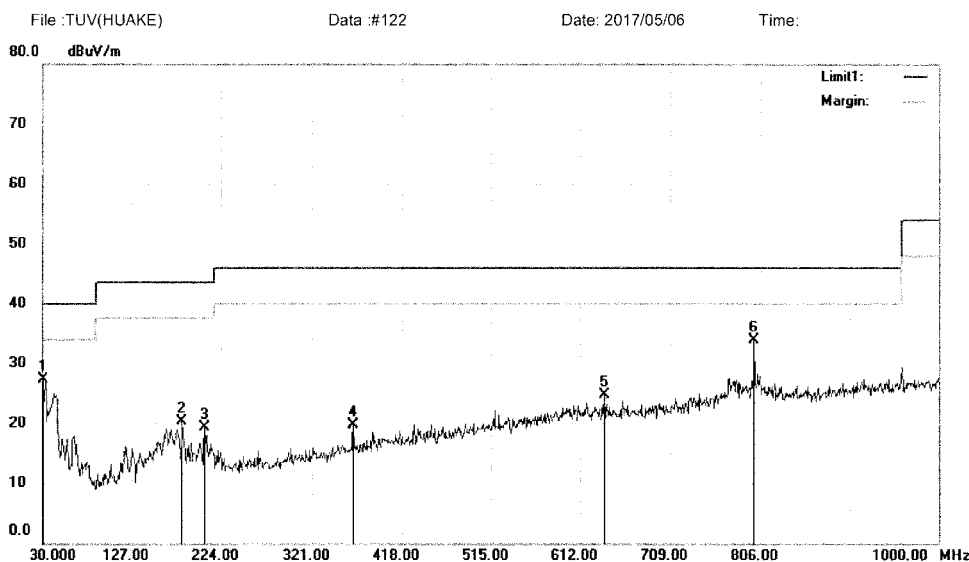
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #121

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.0000	43.56	-16.30	27.26	40.00	-12.74	QP		
2		182.2900	37.06	-16.83	20.23	43.50	-23.27	QP		
3		206.5400	34.95	-15.65	19.30	43.50	-24.20	QP		
4		365.6200	30.00	-10.28	19.72	46.00	-26.28	QP		
5		638.1900	29.36	-4.64	24.72	46.00	-21.28	QP		
6	*	799.2100	35.86	-2.03	33.83	46.00	-12.17	QP		

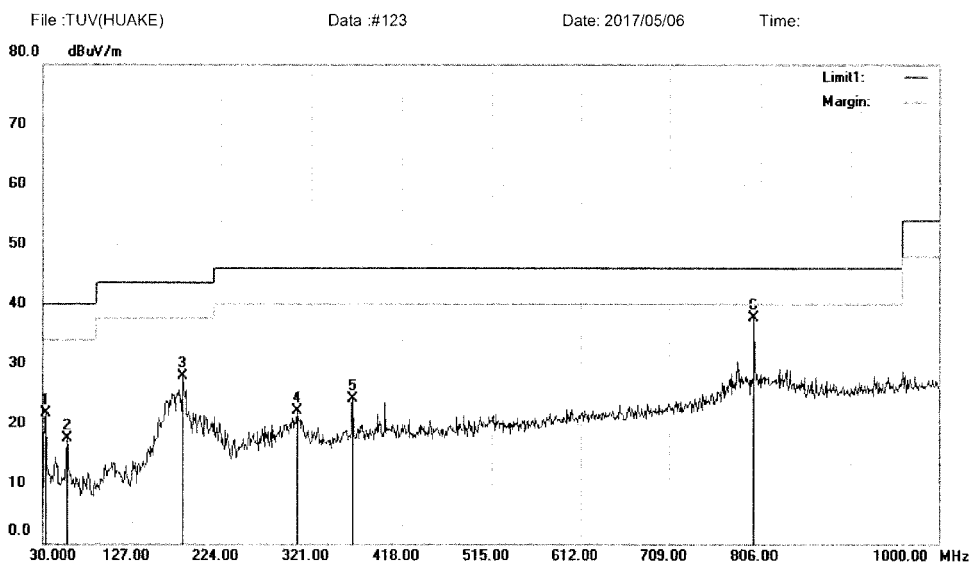
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #122

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.82	-16.04	21.78	40.00	-18.22	QP		
2		56.1900	33.03	-15.55	17.48	40.00	-22.52	QP		
3		182.2900	44.64	-16.83	27.81	43.50	-15.69	QP		
4		305.4800	34.16	-11.99	22.17	46.00	-23.83	QP		
5		365.6200	34.47	-10.28	24.19	46.00	-21.81	QP		
6	*	799.2100	39.73	-2.03	37.70	46.00	-8.30	QP		

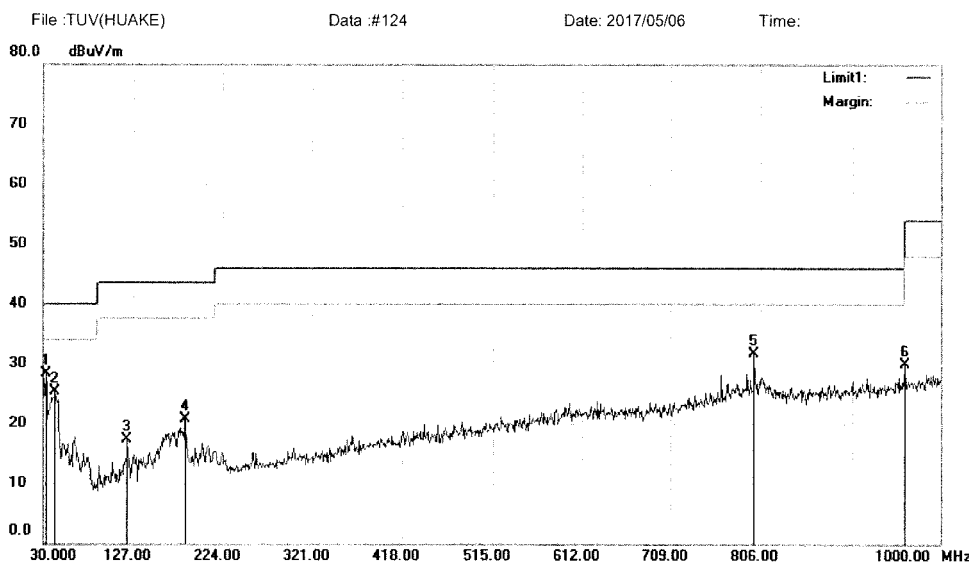
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#123

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.39	-16.04	28.35	40.00	-11.65	QP		
2		42.6100	40.23	-14.94	25.29	40.00	-14.71	QP		
3		120.2100	34.60	-17.35	17.25	43.50	-26.25	QP		
4		183.2600	37.57	-16.84	20.73	43.50	-22.77	QP		
5		799.2100	33.73	-2.03	31.70	46.00	-14.30	QP		
6		960.2300	30.21	-0.29	29.92	54.00	-24.08	QP		

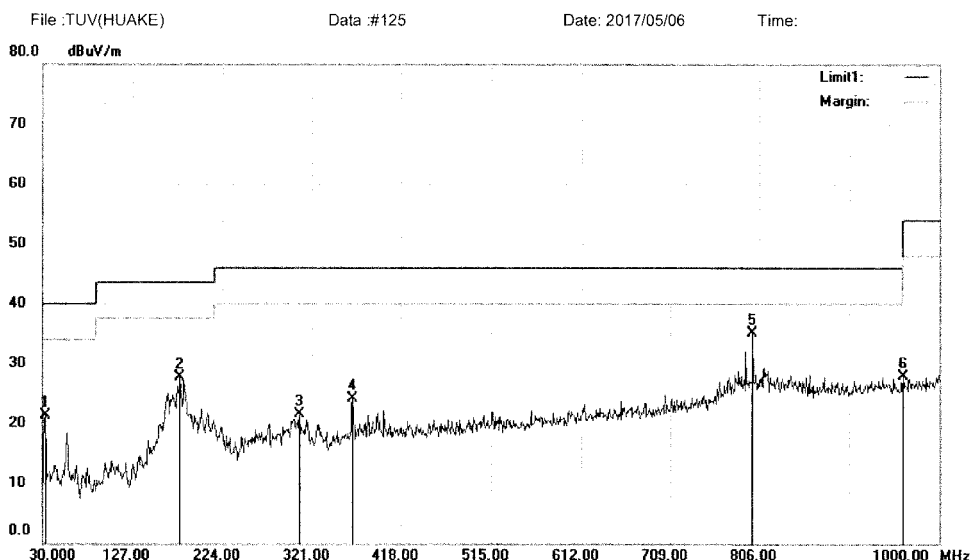
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #124

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.25	-16.04	21.21	40.00	-18.79	QP		
2		178.4100	44.73	-17.05	27.68	43.50	-15.82	QP		
3		307.4200	33.55	-11.99	21.56	46.00	-24.44	QP		
4		365.6200	34.39	-10.28	24.11	46.00	-21.89	QP		
5	*	799.2100	37.06	-2.03	35.03	46.00	-10.97	QP		
6		960.2300	28.14	-0.29	27.85	54.00	-26.15	QP		

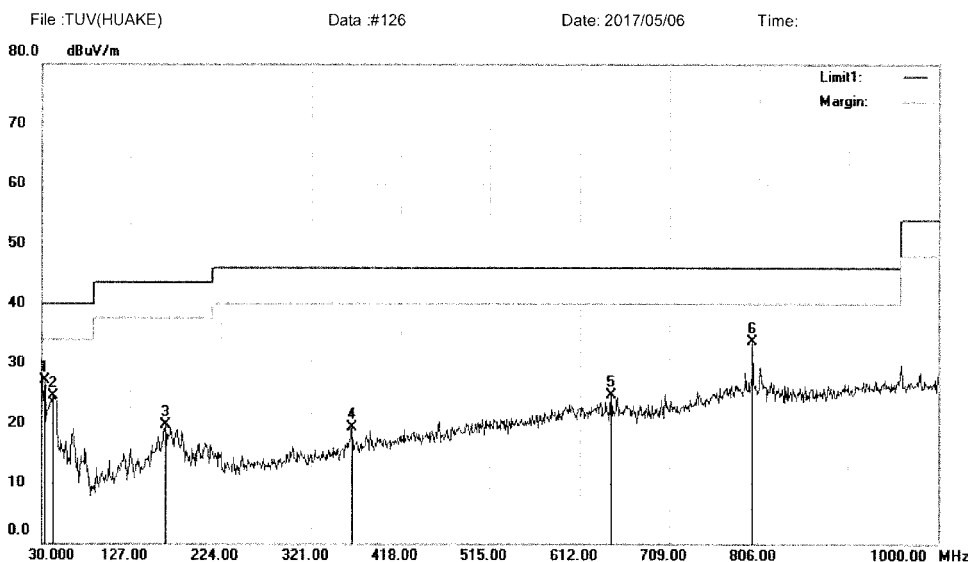
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #125

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	43.21	-16.04	27.17	40.00	-12.83	QP		
2		41.6400	39.59	-15.03	24.56	40.00	-15.44	QP		
3		164.8300	38.04	-18.32	19.72	43.50	-23.78	QP		
4		365.6200	29.66	-10.28	19.38	46.00	-26.62	QP		
5		645.9500	29.25	-4.56	24.69	46.00	-21.31	QP		
6	*	799.2100	35.73	-2.03	33.70	46.00	-12.30	QP		

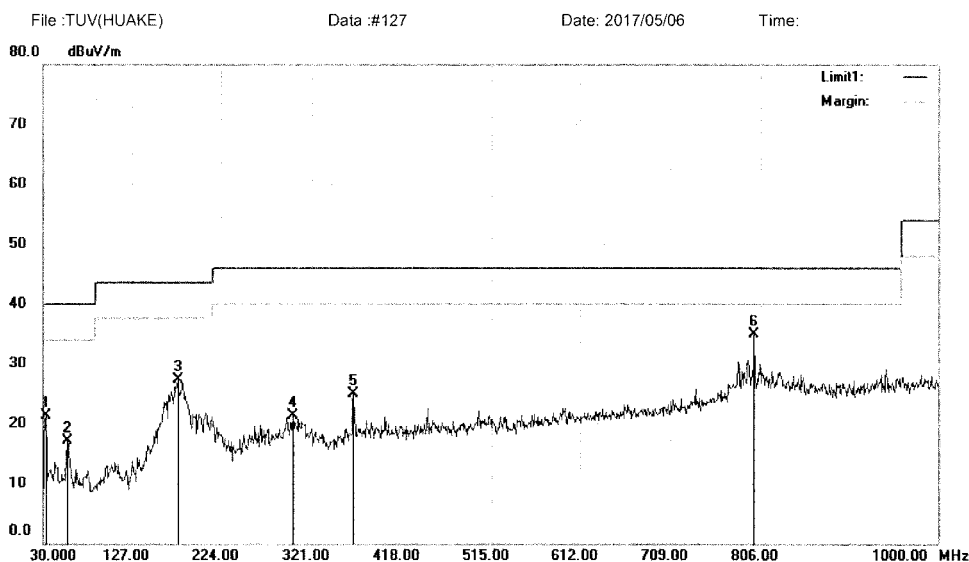
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #126

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.35	-16.04	21.31	40.00	-18.69	QP		
2		56.1900	32.73	-15.55	17.18	40.00	-22.82	QP		
3		177.4400	44.45	-17.20	27.25	43.50	-16.25	QP		
4		300.6300	33.23	-12.00	21.23	46.00	-24.77	QP		
5		365.6200	35.10	-10.28	24.82	46.00	-21.18	QP		
6	*	799.2100	36.96	-2.03	34.93	46.00	-11.07	QP		

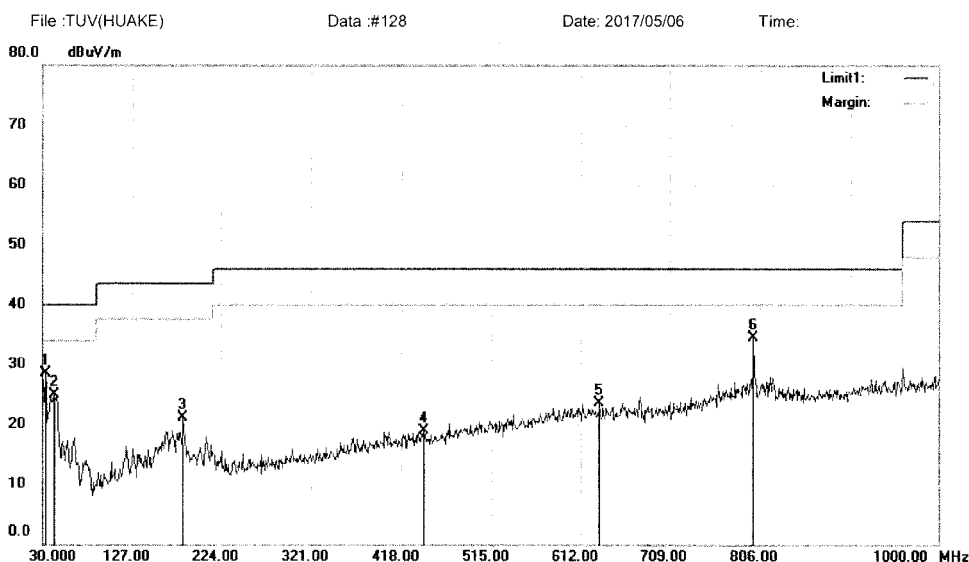
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #127

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.59	-16.04	28.55	40.00	-11.45	QP		
2		42.6100	39.76	-14.94	24.82	40.00	-15.18	QP		
3		182.2900	37.87	-16.83	21.04	43.50	-22.46	QP		
4		441.2800	27.48	-8.60	18.88	46.00	-27.12	QP		
5		632.3700	28.24	-4.71	23.53	46.00	-22.47	QP		
6		799.2100	36.47	-2.03	34.44	46.00	-11.56	QP		

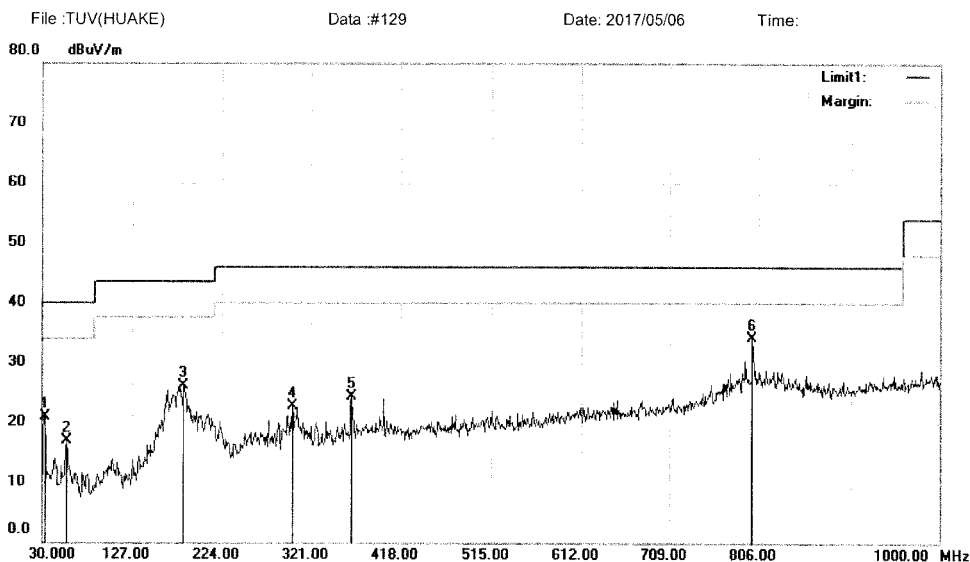
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#128

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5270
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.95	-16.04	20.91	40.00	-19.09	QP		
2		56.1900	32.40	-15.55	16.85	40.00	-23.15	QP		
3		182.2900	43.03	-16.83	26.20	43.50	-17.30	QP		
4		300.6300	34.68	-12.00	22.68	46.00	-23.32	QP		
5		365.6200	34.58	-10.28	24.30	46.00	-21.70	QP		
6	*	799.2100	36.09	-2.03	34.06	46.00	-11.94	QP		

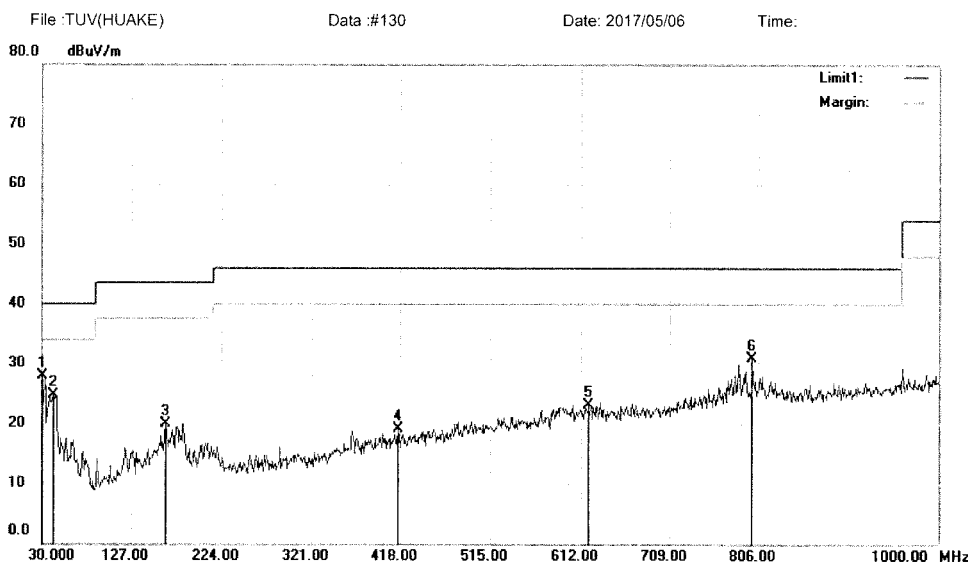
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #129

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5270
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	44.22	-16.26	27.96	40.00	-12.04	QP		
2		41.6400	39.77	-15.03	24.74	40.00	-15.26	QP		
3		163.8600	38.32	-18.32	20.00	43.50	-23.50	QP		
4		416.0600	28.09	-9.06	19.03	46.00	-26.97	QP		
5		620.7300	28.00	-4.84	23.16	46.00	-22.84	QP		
6		799.2100	32.90	-2.03	30.87	46.00	-15.13	QP		

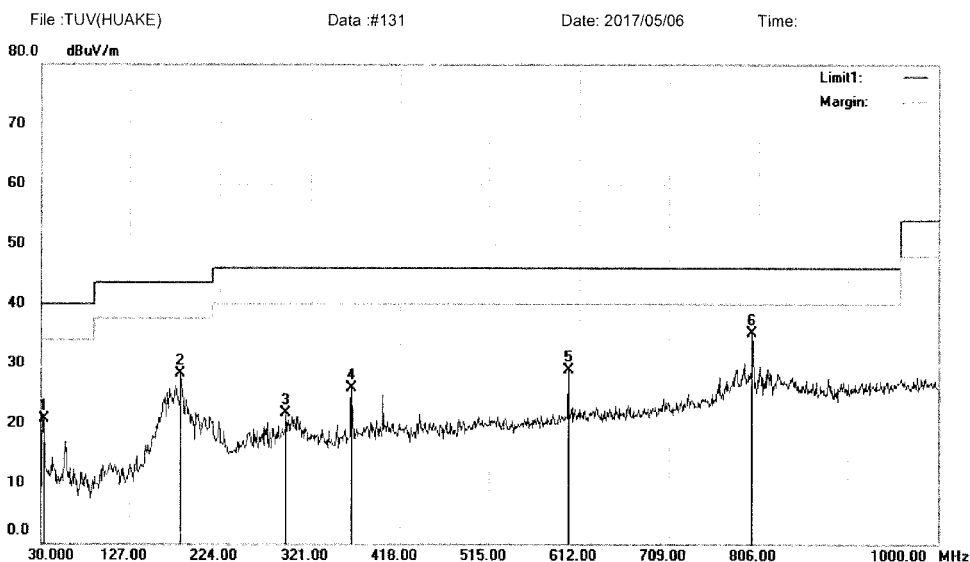
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #130

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5310
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.75	-16.04	20.71	40.00	-19.29	QP		
2		182.2900	45.06	-16.83	28.23	43.50	-15.27	QP		
3		294.8100	33.88	-12.27	21.61	46.00	-24.39	QP		
4		365.6200	36.11	-10.28	25.83	46.00	-20.17	QP		
5		600.3600	33.87	-5.05	28.82	46.00	-17.18	QP		
6	*	799.2100	37.08	-2.03	35.05	46.00	-10.95	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

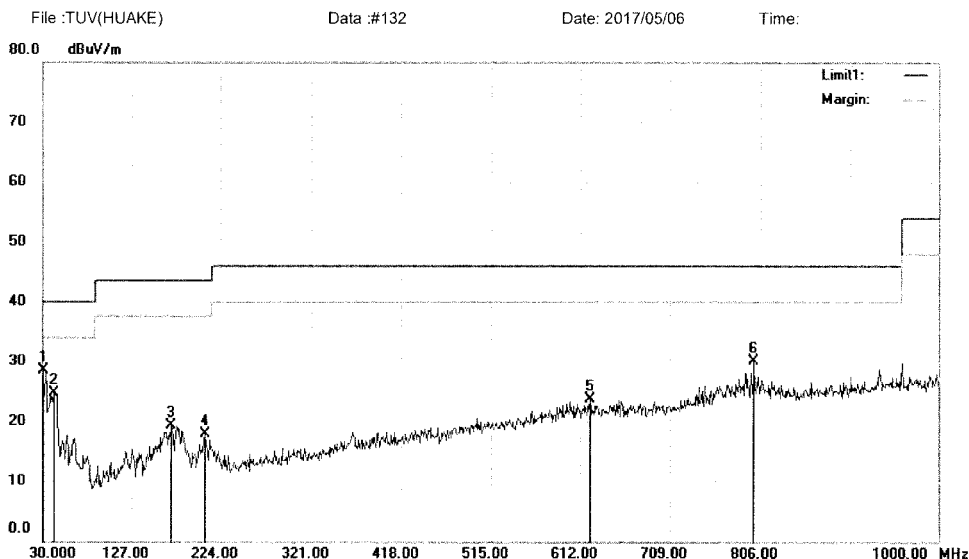
File: TUV(HUAKE)\Data: #131

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode:11nHT40 5310
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	44.74	-16.30	28.44	40.00	-11.56	QP		
2		42.6100	39.63	-14.94	24.69	40.00	-15.31	QP		
3		170.6500	37.42	-18.19	19.23	43.50	-24.27	QP		
4		207.5100	33.42	-15.57	17.85	43.50	-25.65	QP		
5		622.6700	28.44	-4.82	23.62	46.00	-22.38	QP		
6		799.2100	32.13	-2.03	30.10	46.00	-15.90	QP		

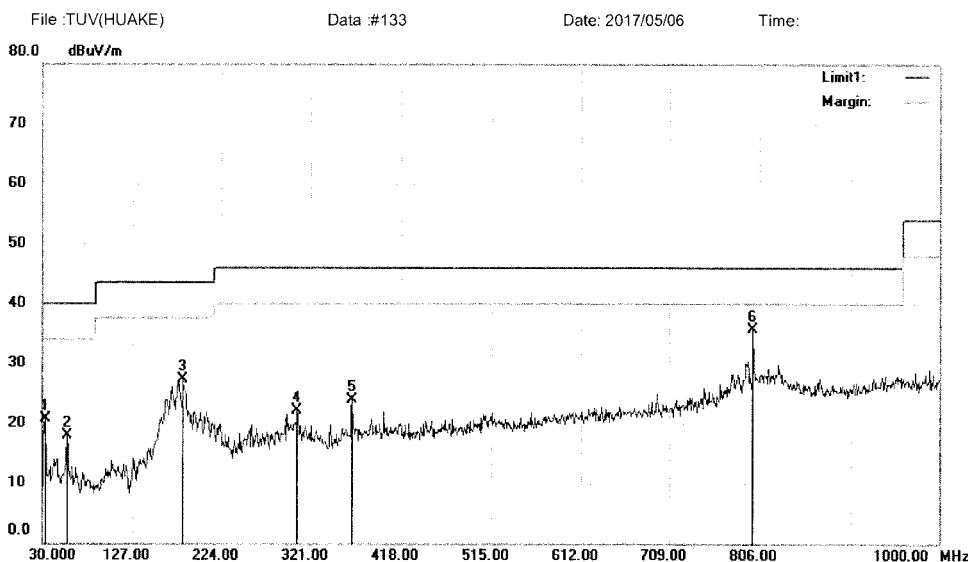
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#132

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5510
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.68	-16.04	20.64	40.00	-19.36	QP		
2		56.1900	33.37	-15.55	17.82	40.00	-22.18	QP		
3		182.2900	44.10	-16.83	27.27	43.50	-16.23	QP		
4		306.4500	34.03	-11.99	22.04	46.00	-23.96	QP		
5		365.6200	34.09	-10.28	23.81	46.00	-22.19	QP		
6	*	799.2100	37.73	-2.03	35.70	46.00	-10.30	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#133

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

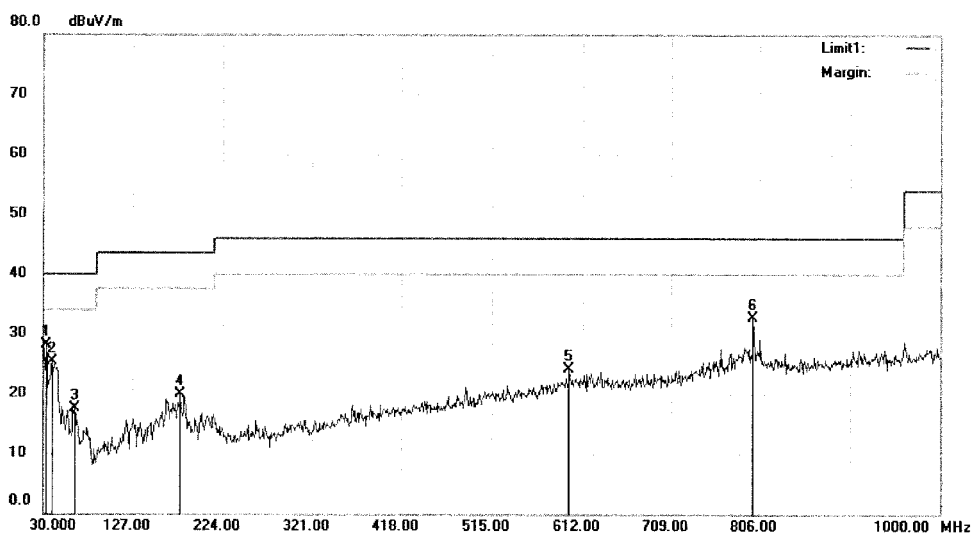

Radiated Emission Measurement

File: TUV(HUAKE)

Data: #134

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5510

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.09	-16.04	28.05	40.00	-11.95	QP		
2		39.7000	40.66	-15.38	25.28	40.00	-14.72	QP		
3		63.9500	34.91	-17.33	17.58	40.00	-22.42	QP		
4		178.4100	37.05	-17.05	20.00	43.50	-23.50	QP		
5		597.4500	29.15	-5.11	24.04	46.00	-21.96	QP		
6		799.2100	34.66	-2.03	32.63	46.00	-13.37	QP		

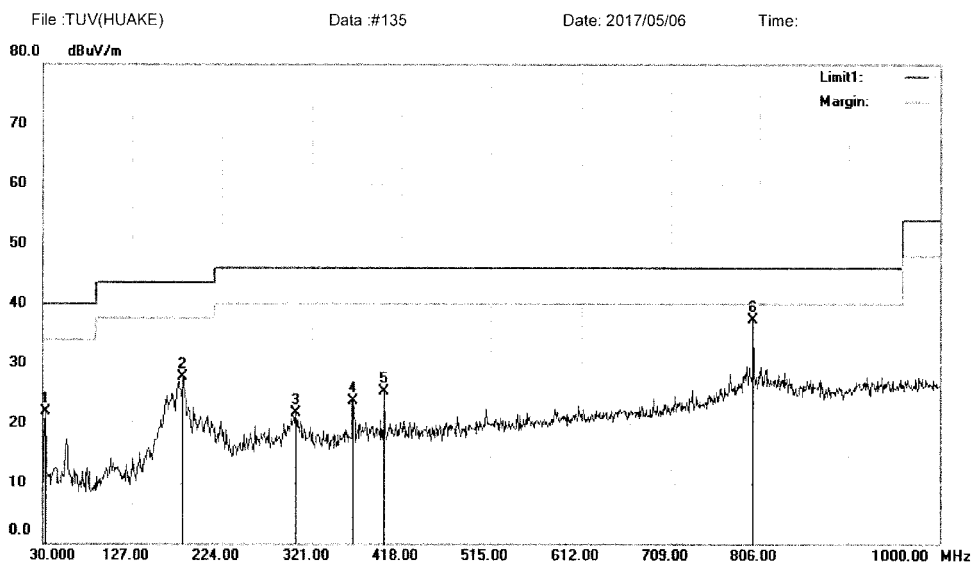
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #134

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5590
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.89	-16.04	21.85	40.00	-18.15	QP		
2		182.2900	44.63	-16.83	27.80	43.50	-15.70	QP		
3		303.5400	33.60	-11.99	21.61	46.00	-24.39	QP		
4		365.6200	33.98	-10.28	23.70	46.00	-22.30	QP		
5		399.5700	34.53	-9.26	25.27	46.00	-20.73	QP		
6	*	799.2100	39.25	-2.03	37.22	46.00	-8.78	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #135

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

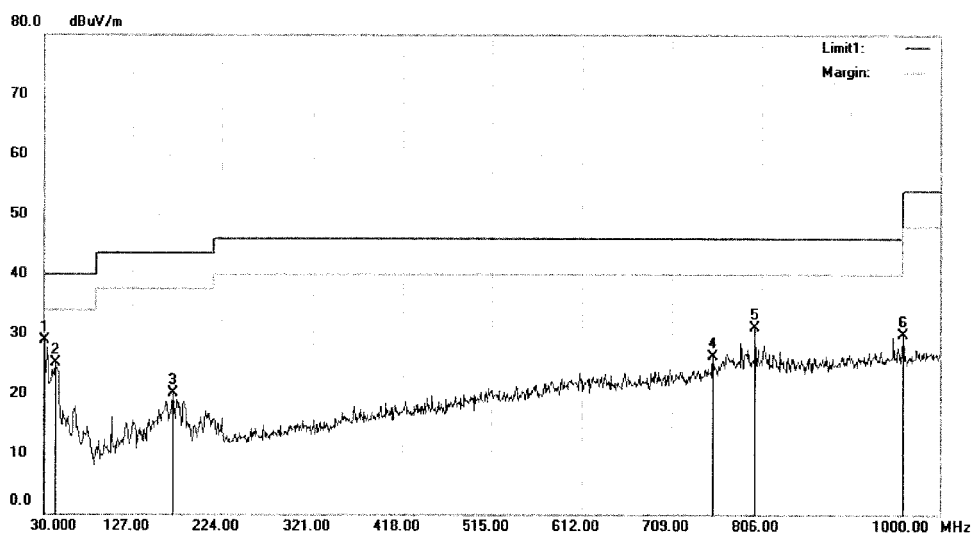
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #136

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5590

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	45.23	-16.30	28.93	40.00	-11.07	QP		
2		41.6400	40.08	-15.03	25.05	40.00	-14.95	QP		
3		171.6200	38.07	-18.04	20.03	43.50	-23.47	QP		
4		753.6200	29.18	-2.94	26.24	46.00	-19.76	QP		
5		799.2100	33.14	-2.03	31.11	46.00	-14.89	QP		
6		960.2300	30.16	-0.29	29.87	54.00	-24.13	QP		

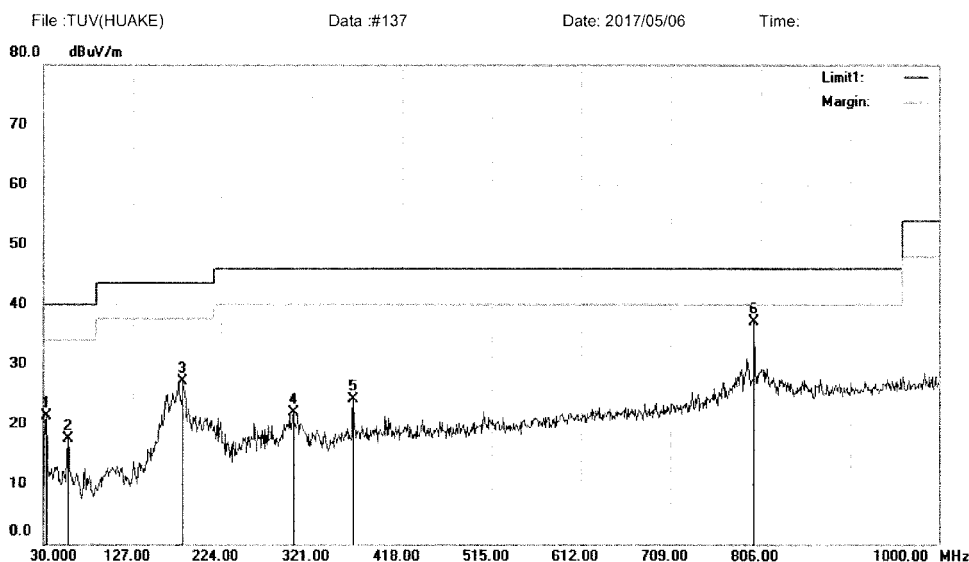
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #136

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5670
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.35	-16.04	21.31	40.00	-18.69	QP		
2		56.1900	32.96	-15.55	17.41	40.00	-22.59	QP		
3		182.2900	44.01	-16.83	27.18	43.50	-16.32	QP		
4		301.6000	33.91	-12.00	21.91	46.00	-24.09	QP		
5		365.6200	34.35	-10.28	24.07	46.00	-21.93	QP		
6	*	799.2100	39.17	-2.03	37.14	46.00	-8.86	QP		

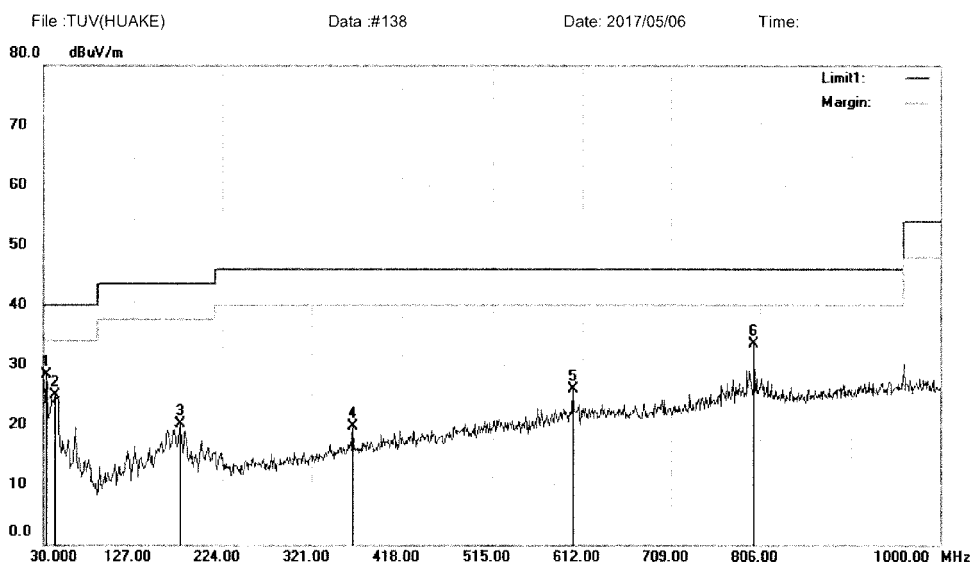
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #137

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5670
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.28	-16.04	28.24	40.00	-11.76	QP		
2		42.6100	39.83	-14.94	24.89	40.00	-15.11	QP		
3		177.4400	37.22	-17.20	20.02	43.50	-23.48	QP		
4		365.6200	29.91	-10.28	19.63	46.00	-26.37	QP		
5		602.3000	30.91	-5.03	25.88	46.00	-20.12	QP		
6		799.2100	35.58	-2.03	33.55	46.00	-12.45	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #138

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

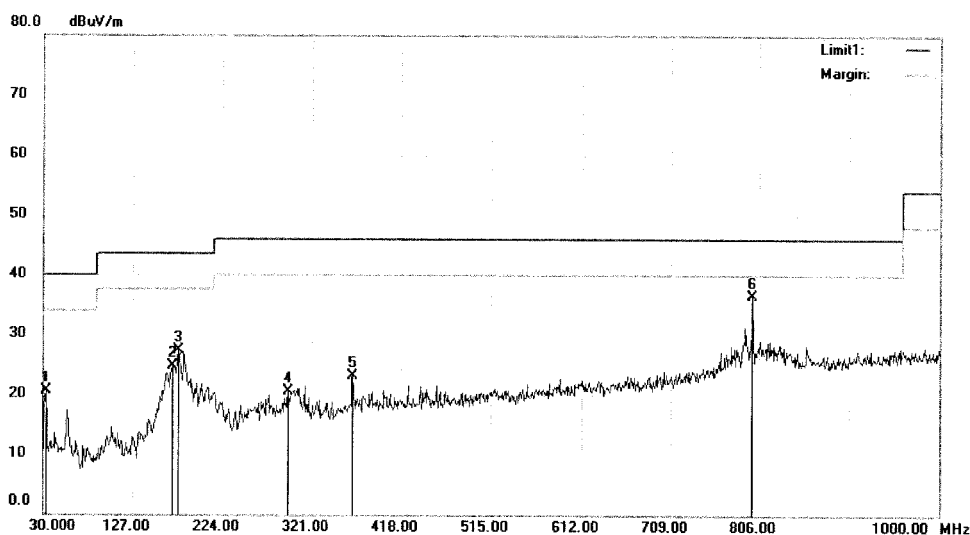

Radiated Emission Measurement

File: TUV(HUAKE)

Data: #139

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.57	-16.04	20.53	40.00	-19.47	QP		
2		170.6500	42.97	-18.19	24.78	43.50	-18.72	QP		
3		176.4700	44.58	-17.34	27.24	43.50	-16.26	QP		
4		295.7800	32.79	-12.23	20.56	46.00	-25.44	QP		
5		365.6200	33.41	-10.28	23.13	46.00	-22.87	QP		
6	*	799.2100	38.62	-2.03	36.59	46.00	-9.41	QP		

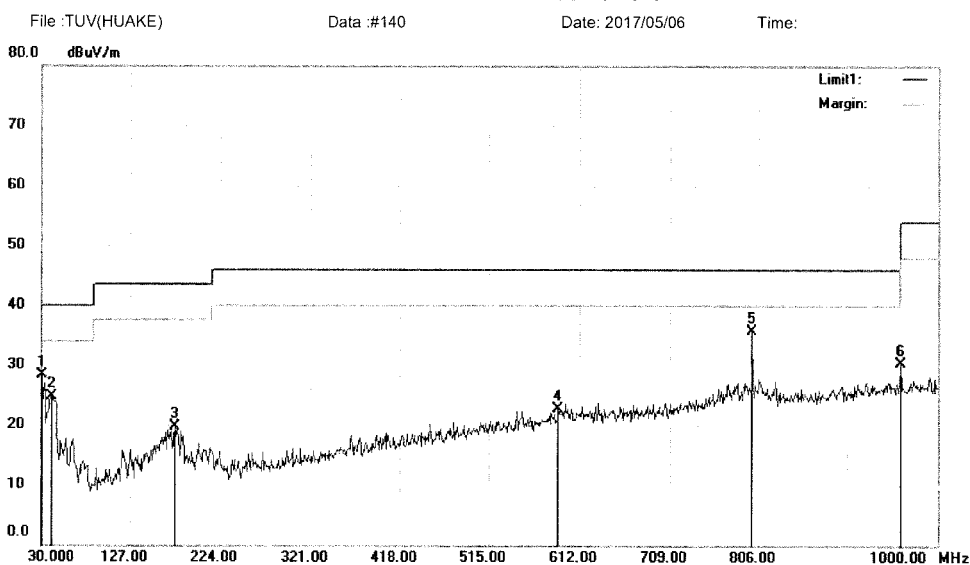
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#139

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.9700	44.64	-16.26	28.38	40.00	-11.62	QP		
2		40.6700	39.92	-15.24	24.68	40.00	-15.32	QP		
3		175.5000	37.28	-17.48	19.80	43.50	-23.70	QP		
4		589.6900	28.11	-5.31	22.80	46.00	-23.20	QP		
5	*	799.2100	37.66	-2.03	35.63	46.00	-10.37	QP		
6		960.2300	30.67	-0.29	30.38	54.00	-23.62	QP		

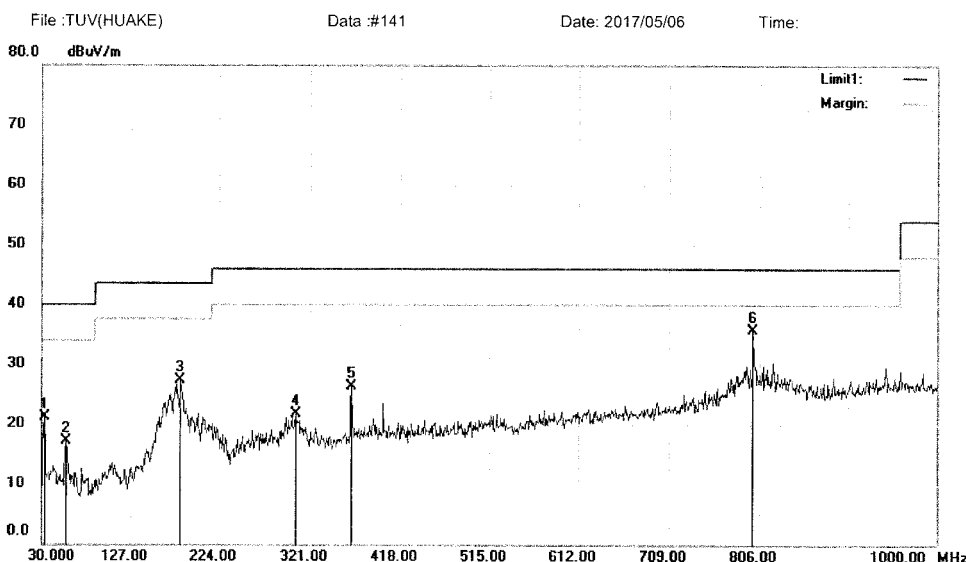
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #140

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.05	-16.04	21.01	40.00	-18.99	QP		
2		56.1900	32.60	-15.55	17.05	40.00	-22.95	QP		
3		182.2900	44.09	-16.83	27.26	43.50	-16.24	QP		
4		305.4800	33.76	-11.99	21.77	46.00	-24.23	QP		
5		365.6200	36.58	-10.28	26.30	46.00	-19.70	QP		
6	*	799.2100	37.65	-2.03	35.62	46.00	-10.38	QP		

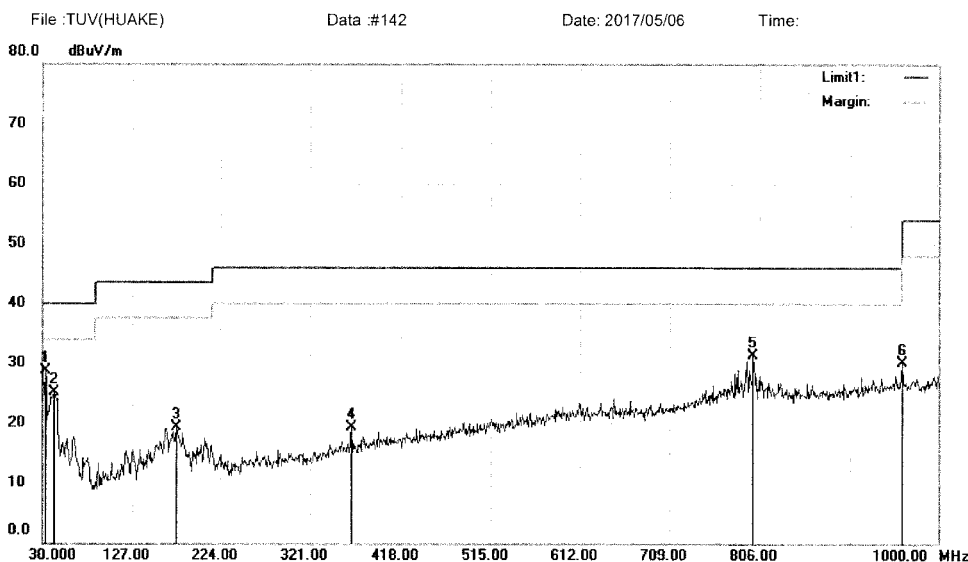
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #141

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.82	-16.04	28.78	40.00	-11.22	QP		
2		41.6400	40.04	-15.03	25.01	40.00	-14.99	QP		
3		175.5000	36.80	-17.48	19.32	43.50	-24.18	QP		
4		365.6200	29.51	-10.28	19.23	46.00	-26.77	QP		
5		799.2100	33.32	-2.03	31.29	46.00	-14.71	QP		
6		960.2300	30.49	-0.29	30.20	54.00	-23.80	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #142

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

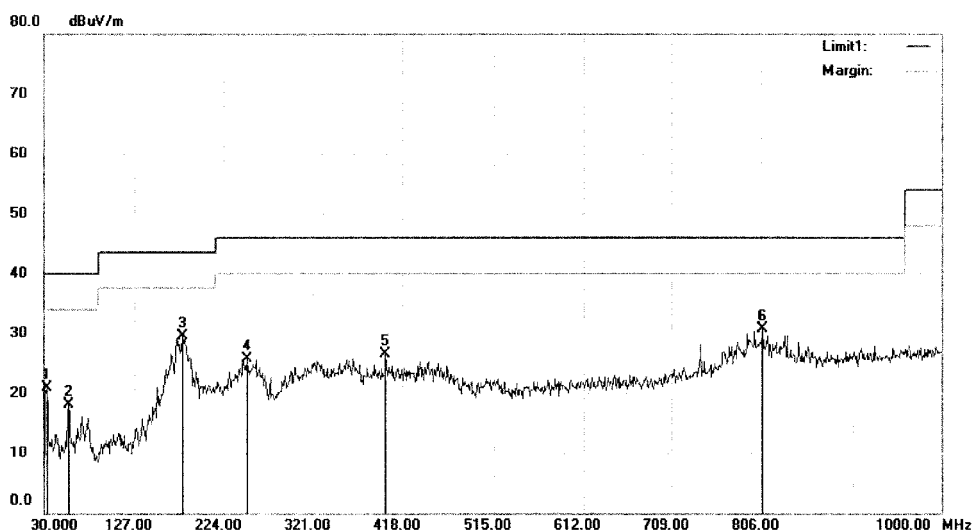
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#161

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.86	-16.04	20.82	40.00	-19.18	QP		
2		56.1900	33.62	-15.55	18.07	40.00	-21.93	QP		
3	*	179.3800	46.43	-16.92	29.51	43.50	-13.99	QP		
4		249.2200	39.33	-13.63	25.70	46.00	-20.30	QP		
5		399.5700	35.80	-9.26	26.54	46.00	-19.46	QP		
6		807.9400	32.64	-1.93	30.71	46.00	-15.29	QP		

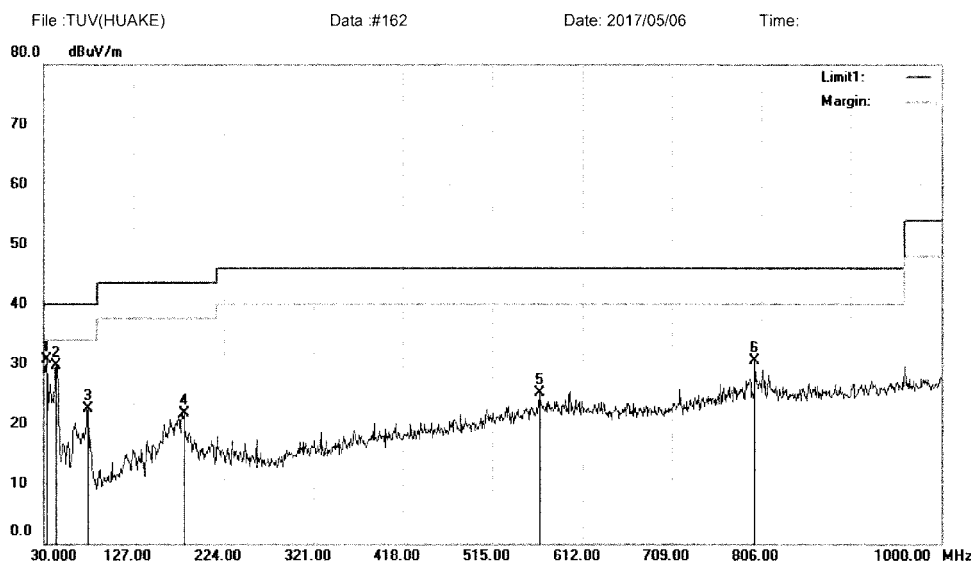
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#161

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	46.65	-16.04	30.61	40.00	-9.39	QP		
2		43.5800	44.66	-14.92	29.74	40.00	-10.26	QP		
3		78.5000	42.47	-19.87	22.60	40.00	-17.40	QP		
4		181.3200	38.44	-16.83	21.61	43.50	-21.89	QP		
5		566.4100	30.96	-5.88	25.08	46.00	-20.92	QP		
6		799.2100	32.62	-2.03	30.59	46.00	-15.41	QP		

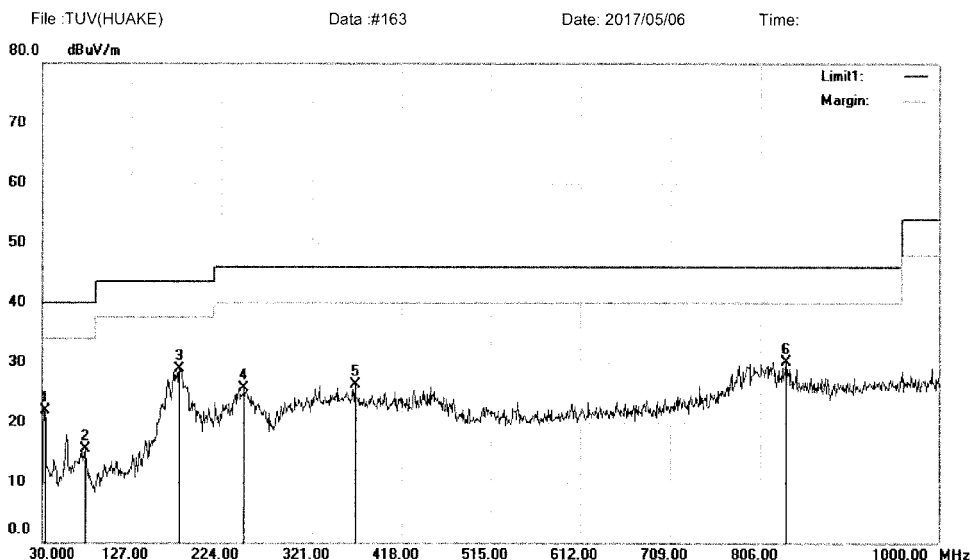
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #162

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.86	-16.04	21.82	40.00	-18.18	QP		
2		76.5600	35.73	-20.32	15.41	40.00	-24.59	QP		
3	*	179.3800	45.80	-16.92	28.88	43.50	-14.62	QP		
4		248.2500	39.47	-13.68	25.79	46.00	-20.21	QP		
5		367.5600	36.49	-10.24	26.25	46.00	-19.75	QP		
6		834.1300	31.81	-1.66	30.15	46.00	-15.85	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

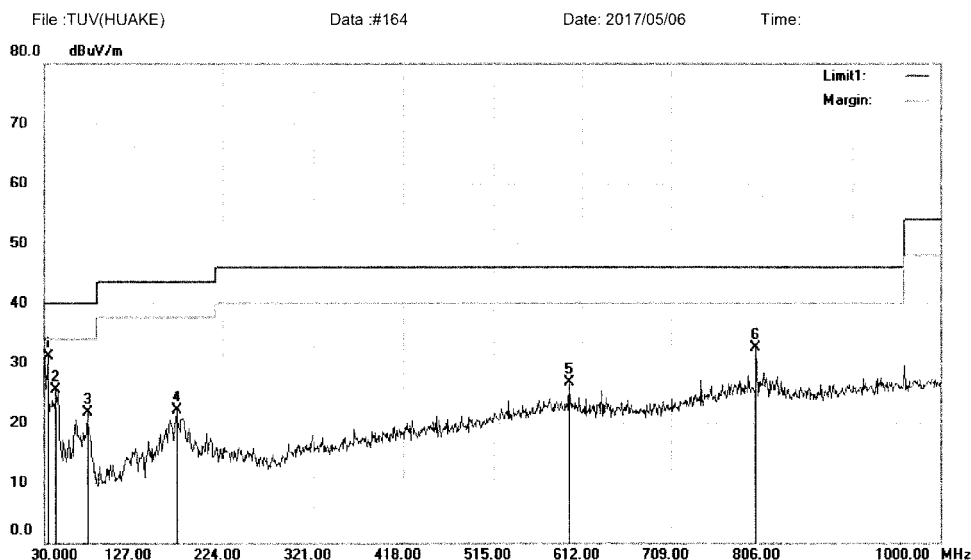
File: TUV(HUAKE)\Data: #163

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11ac20 5200
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	33.8800	46.88	-15.82	31.06	40.00	-8.94	QP		
2		42.6100	40.39	-14.94	25.45	40.00	-14.55	QP		
3		76.5600	41.95	-20.32	21.63	40.00	-18.37	QP		
4		173.5600	39.82	-17.76	22.06	43.50	-21.44	QP		
5		598.4200	31.73	-5.09	26.64	46.00	-19.36	QP		
6		799.2100	34.44	-2.03	32.41	46.00	-13.59	QP		

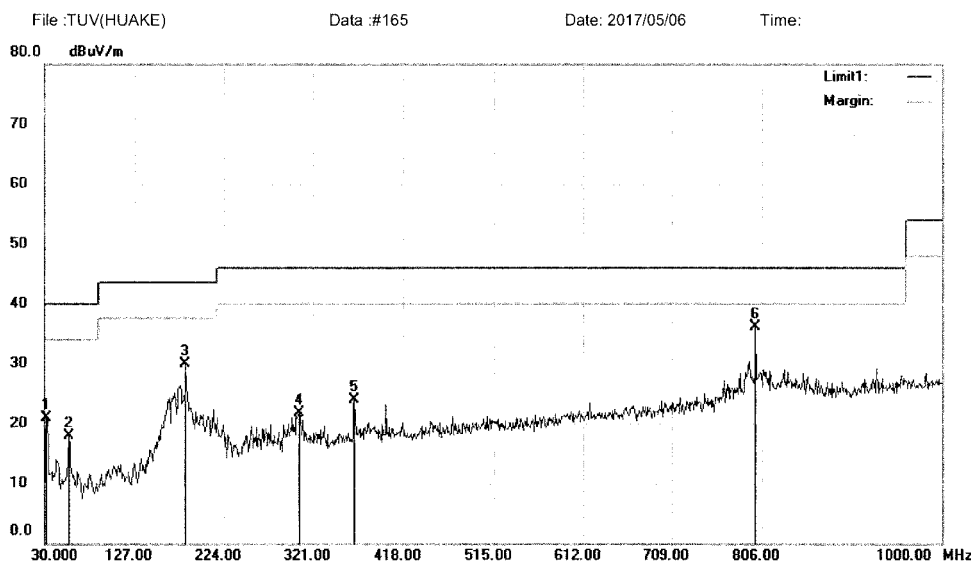
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #164

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac20 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.9400	37.13	-16.24	20.89	40.00	-19.11	QP		
2		56.1900	33.45	-15.55	17.90	40.00	-22.10	QP		
3		182.2900	46.64	-16.83	29.81	43.50	-13.69	QP		
4		305.4800	33.68	-11.99	21.69	46.00	-24.31	QP		
5		365.6200	34.26	-10.28	23.98	46.00	-22.02	QP		
6	*	799.2100	38.18	-2.03	36.15	46.00	-9.85	QP		

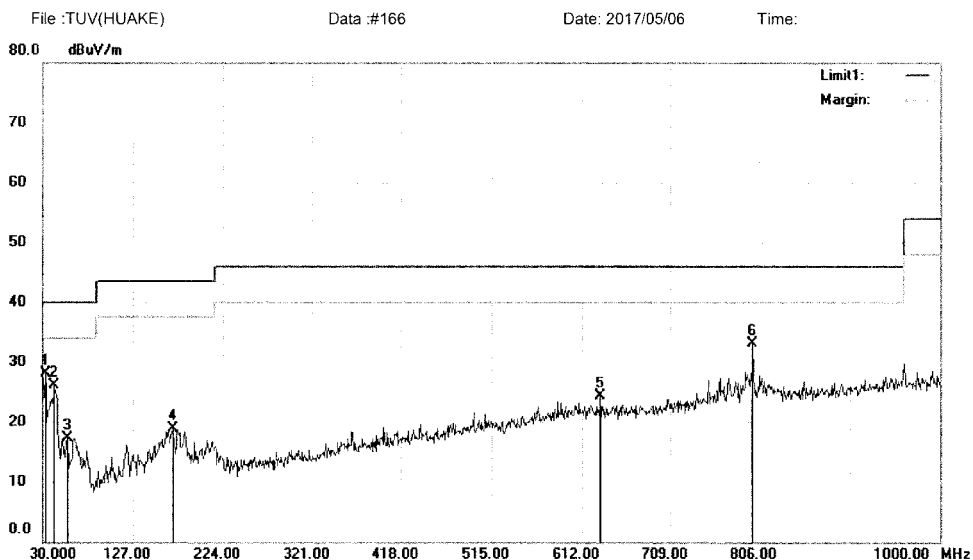
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#165

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac20 5240
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.17	-16.04	28.13	40.00	-11.87	QP		
2		42.6100	41.00	-14.94	26.06	40.00	-13.94	QP		
3		56.1900	32.82	-15.55	17.27	40.00	-22.73	QP		
4		169.6800	37.11	-18.29	18.82	43.50	-24.68	QP		
5		632.3700	29.04	-4.71	24.33	46.00	-21.67	QP		
6		799.2100	35.22	-2.03	33.19	46.00	-12.81	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#166

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

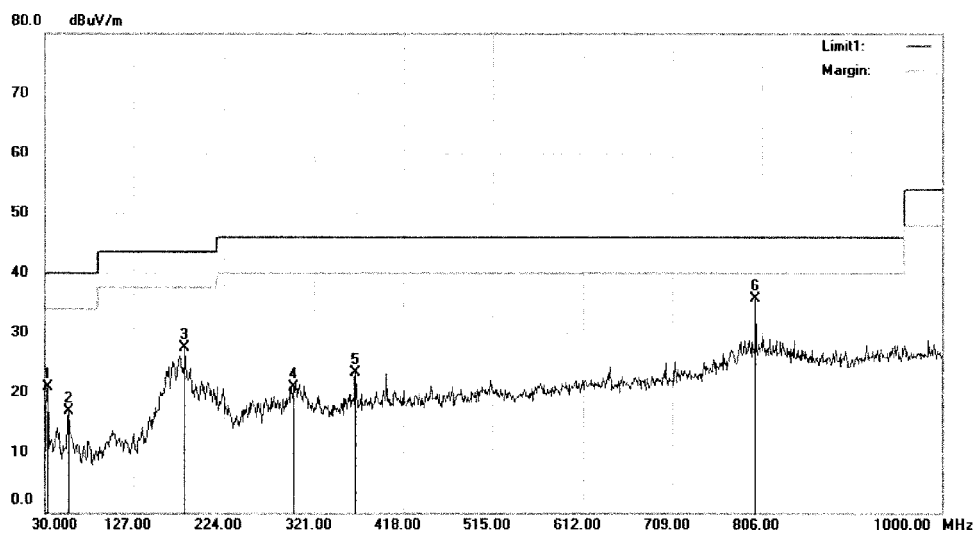
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#167

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5260

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		32.9100	36.93	-16.04	20.89	40.00	-19.11	QP		
2		56.1900	32.47	-15.55	16.92	40.00	-23.08	QP		
3		182.2900	44.27	-16.83	27.44	43.50	-16.06	QP		
4		297.7200	32.93	-12.11	20.82	46.00	-25.18	QP		
5		365.6200	33.60	-10.28	23.32	46.00	-22.68	QP		
6	*	799.2100	37.66	-2.03	35.63	46.00	-10.37	QP		

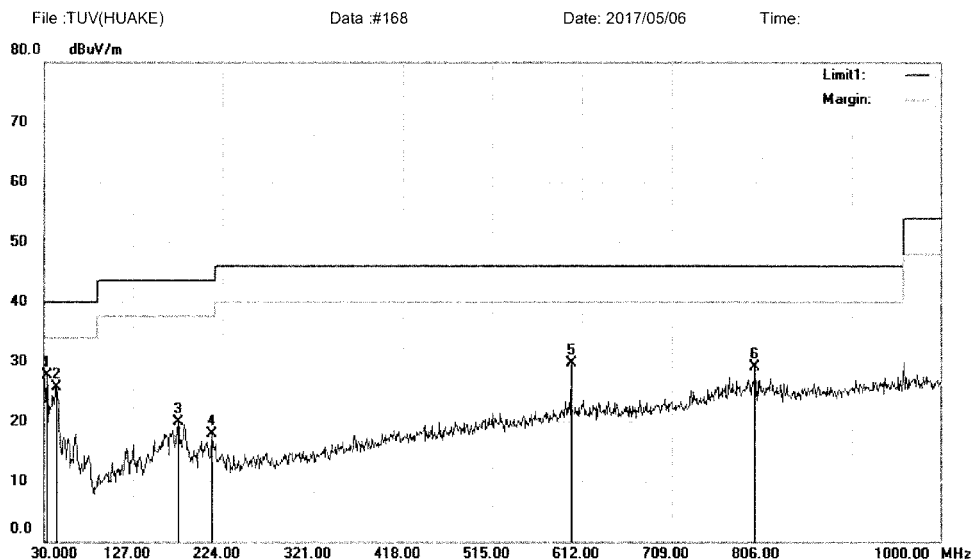
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#167

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac20 5260
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	43.67	-16.04	27.63	40.00	-12.37	QP		
2		43.5800	40.62	-14.92	25.70	40.00	-14.30	QP		
3		176.4700	37.34	-17.34	20.00	43.50	-23.50	QP		
4		212.3600	33.10	-15.16	17.94	43.50	-25.56	QP		
5		600.3600	34.66	-5.05	29.61	46.00	-16.39	QP		
6		799.2100	31.15	-2.03	29.12	46.00	-16.88	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#168

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

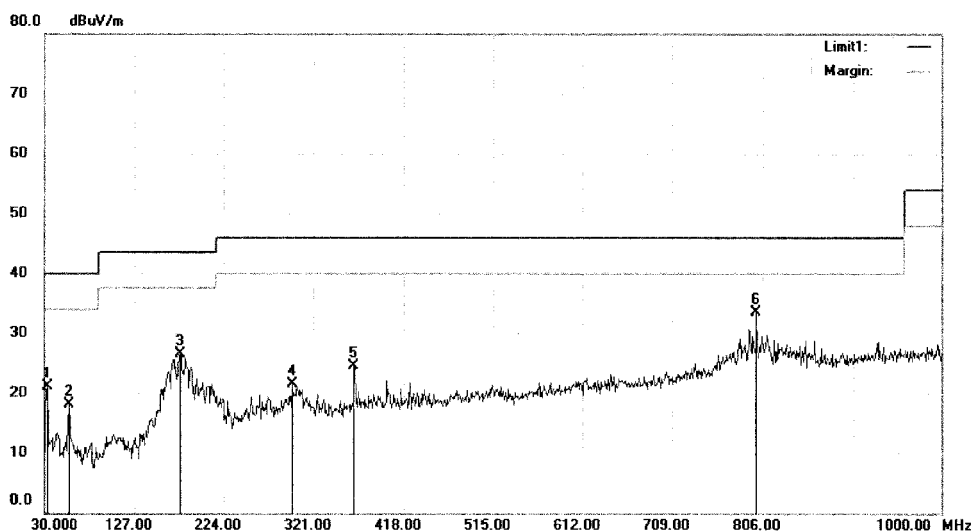
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#169

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5280

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.10	-16.04	21.06	40.00	-18.94	QP		
2		56.1900	33.60	-15.55	18.05	40.00	-21.95	QP		
3		176.4700	43.82	-17.34	26.48	43.50	-17.02	QP		
4		297.7200	33.66	-12.11	21.55	46.00	-24.45	QP		
5		364.6500	34.76	-10.29	24.47	46.00	-21.53	QP		
6	*	799.2100	35.61	-2.03	33.58	46.00	-12.42	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#169

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

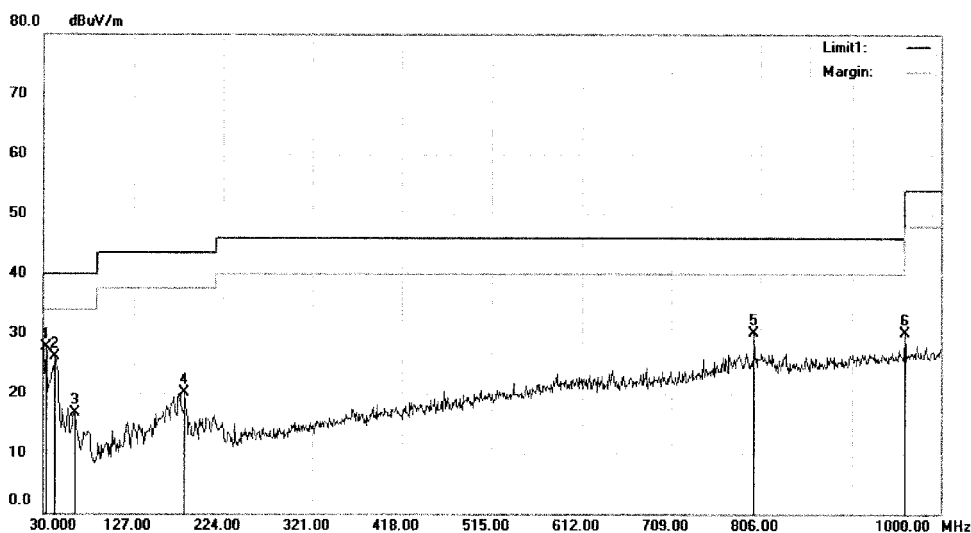
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#170

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5280

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	43.82	-16.04	27.78	40.00	-12.22	QP		
2		42.6100	41.13	-14.94	26.19	40.00	-13.81	QP		
3		63.9500	33.96	-17.33	16.63	40.00	-23.37	QP		
4		182.2900	36.85	-16.83	20.02	43.50	-23.48	QP		
5		799.2100	32.18	-2.03	30.15	46.00	-15.85	QP		
6		960.2300	30.33	-0.29	30.04	54.00	-23.96	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#170

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

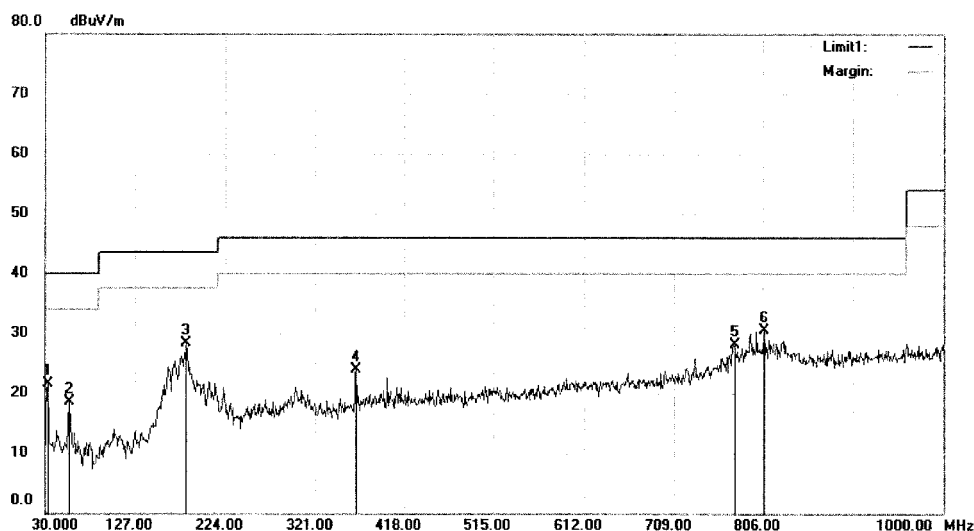
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #171

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5320

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.50	-16.04	21.46	40.00	-18.54	QP		
2		56.1900	33.96	-15.55	18.41	40.00	-21.59	QP		
3	*	182.2900	45.08	-16.83	28.25	43.50	-15.25	QP		
4		365.6200	34.17	-10.28	23.89	46.00	-22.11	QP		
5		774.9600	30.72	-2.52	28.20	46.00	-17.80	QP		
6		807.9400	32.43	-1.93	30.50	46.00	-15.50	QP		

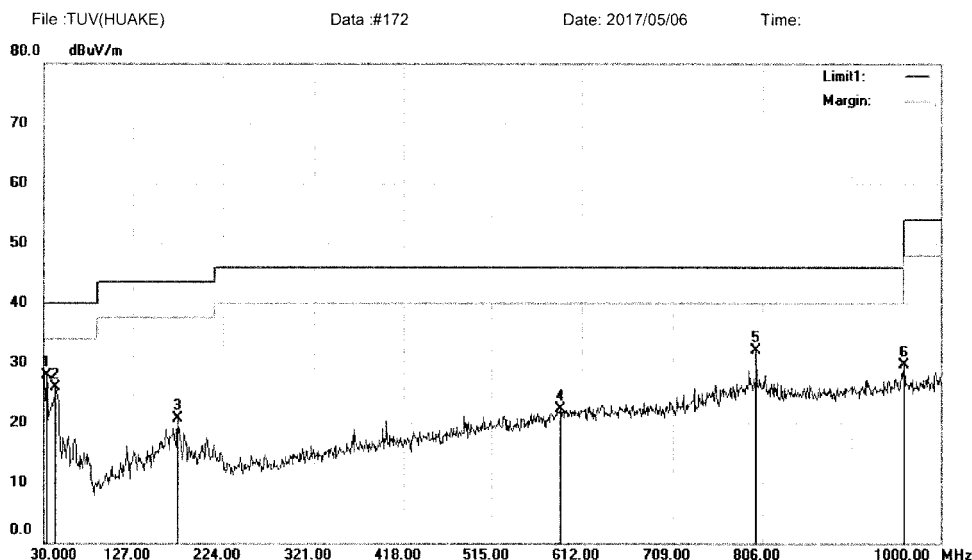
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #171

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5320
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.00	-16.04	27.96	40.00	-12.04	QP		
2		42.6100	40.84	-14.94	25.90	40.00	-14.10	QP		
3		175.5000	38.19	-17.48	20.71	43.50	-22.79	QP		
4		588.7200	27.67	-5.33	22.34	46.00	-23.66	QP		
5		799.2100	34.05	-2.03	32.02	46.00	-13.98	QP		
6		960.2300	29.95	-0.29	29.66	54.00	-24.34	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#172

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



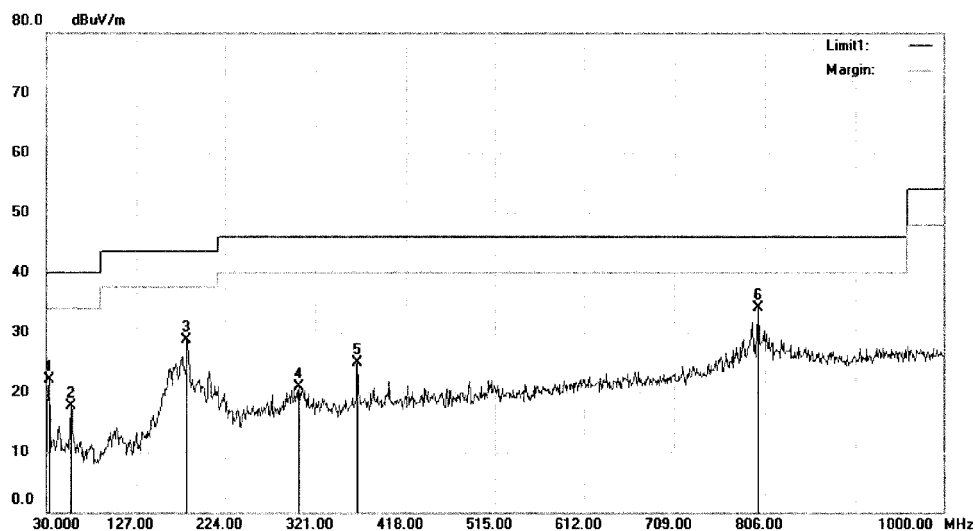
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#173

Date: 2017/05/06

Time:



Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5500

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	38.05	-16.04	22.01	40.00	-17.99	QP		
2		56.1900	33.35	-15.55	17.80	40.00	-22.20	QP		
3		182.2900	45.45	-16.83	28.62	43.50	-14.88	QP		
4		303.5400	32.80	-11.99	20.81	46.00	-25.19	QP		
5		365.6200	35.11	-10.28	24.83	46.00	-21.17	QP		
6	*	799.2100	36.10	-2.03	34.07	46.00	-11.93	QP		

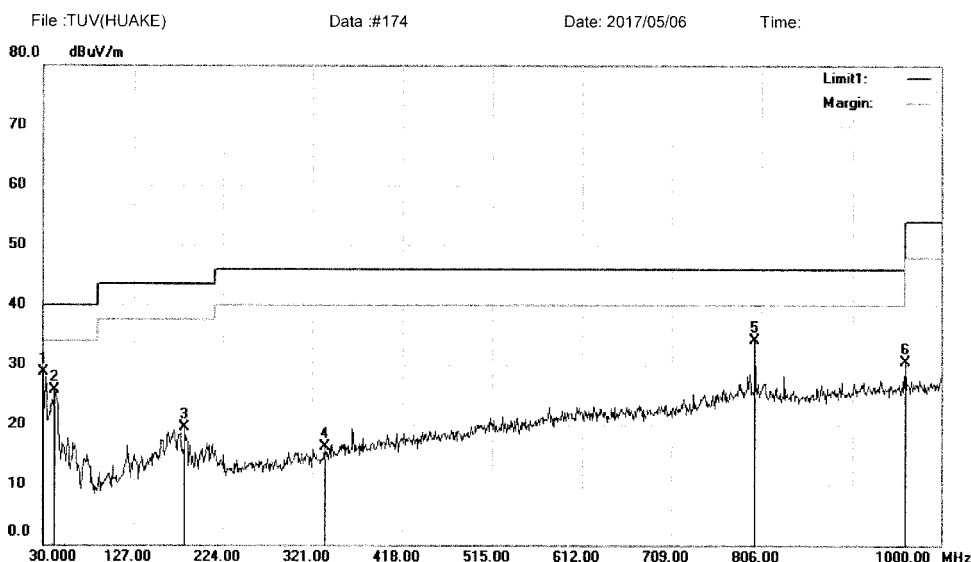
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#173

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5500
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	44.97	-16.26	28.71	40.00	-11.29	QP		
2		42.6100	40.57	-14.94	25.63	40.00	-14.37	QP		
3		182.2900	36.35	-16.83	19.52	43.50	-23.98	QP		
4		334.5800	27.63	-11.40	16.23	46.00	-29.77	QP		
5		799.2100	36.11	-2.03	34.08	46.00	-11.92	QP		
6		960.2300	30.84	-0.29	30.55	54.00	-23.45	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV(HUAKE)\Data : #174

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

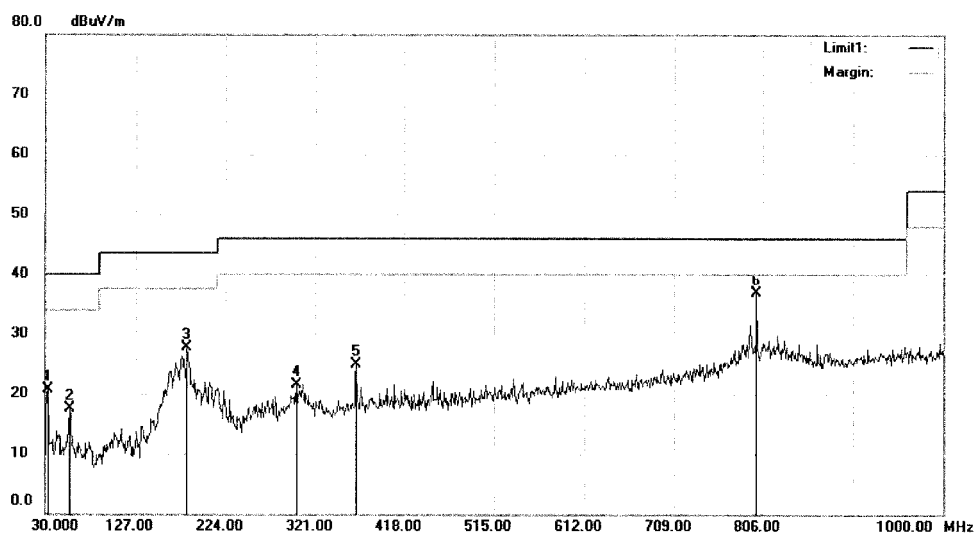

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#175

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5600

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.68	-16.04	20.64	40.00	-19.36	QP		
2		56.1900	33.12	-15.55	17.57	40.00	-22.43	QP		
3		182.2900	44.59	-16.83	27.76	43.50	-15.74	QP		
4		300.6300	33.56	-12.00	21.56	46.00	-24.44	QP		
5		365.6200	35.12	-10.28	24.84	46.00	-21.16	QP		
6	*	799.2100	38.99	-2.03	36.96	46.00	-9.04	QP		

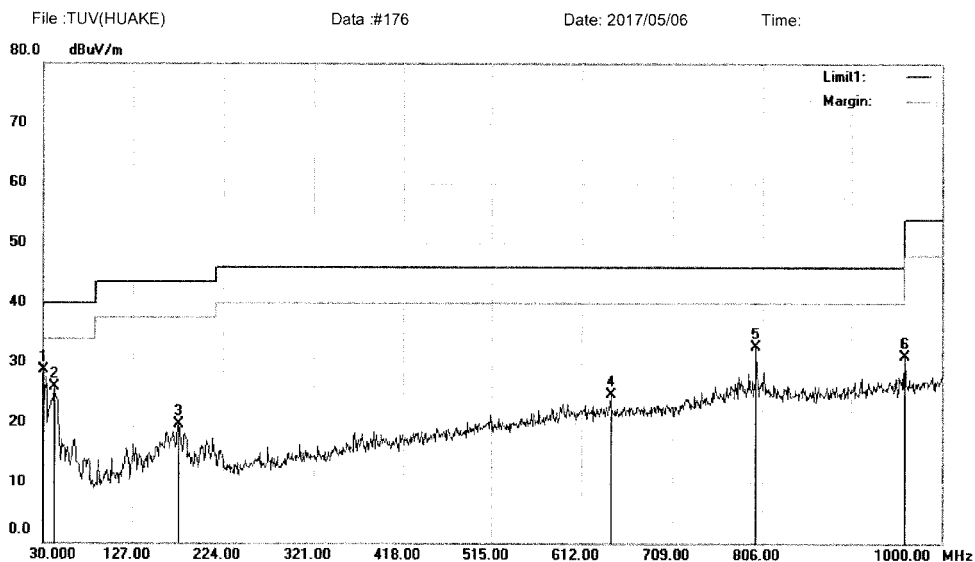
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#175

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5600
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	45.04	-16.26	28.78	40.00	-11.22	QP		
2		41.6400	40.90	-15.03	25.87	40.00	-14.13	QP		
3		176.4700	37.01	-17.34	19.67	43.50	-23.83	QP		
4		643.0400	29.39	-4.59	24.80	46.00	-21.20	QP		
5		799.2100	34.76	-2.03	32.73	46.00	-13.27	QP		
6		960.2300	31.36	-0.29	31.07	54.00	-22.93	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV(HUAKE)\Data : #176

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

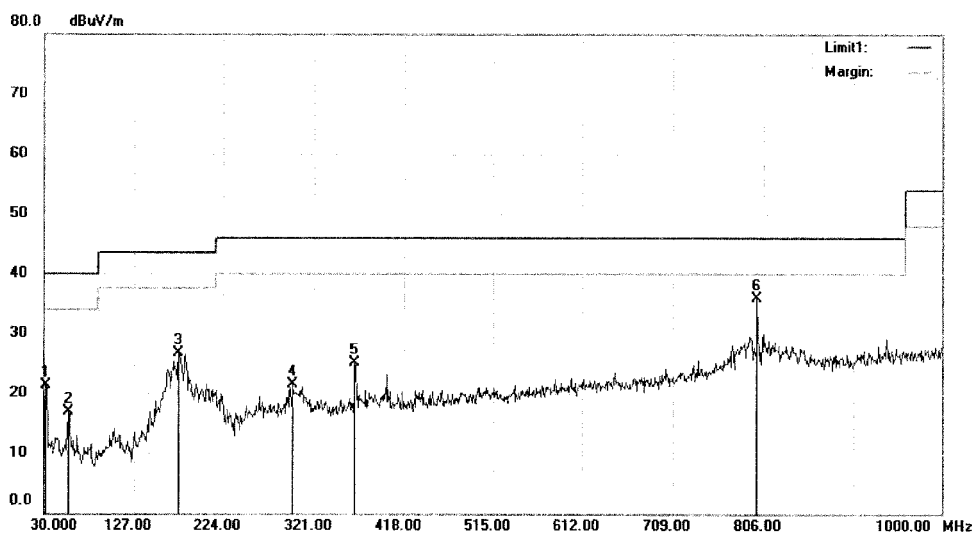

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#177

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5700

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.9400	37.50	-16.24	21.26	40.00	-18.74	QP		
2		56.1900	32.39	-15.55	16.84	40.00	-23.16	QP		
3		175.5000	44.26	-17.48	26.78	43.50	-16.72	QP		
4		298.6900	33.64	-12.07	21.57	46.00	-24.43	QP		
5		364.6500	35.43	-10.29	25.14	46.00	-20.86	QP		
6	*	799.2100	37.90	-2.03	35.87	46.00	-10.13	QP		

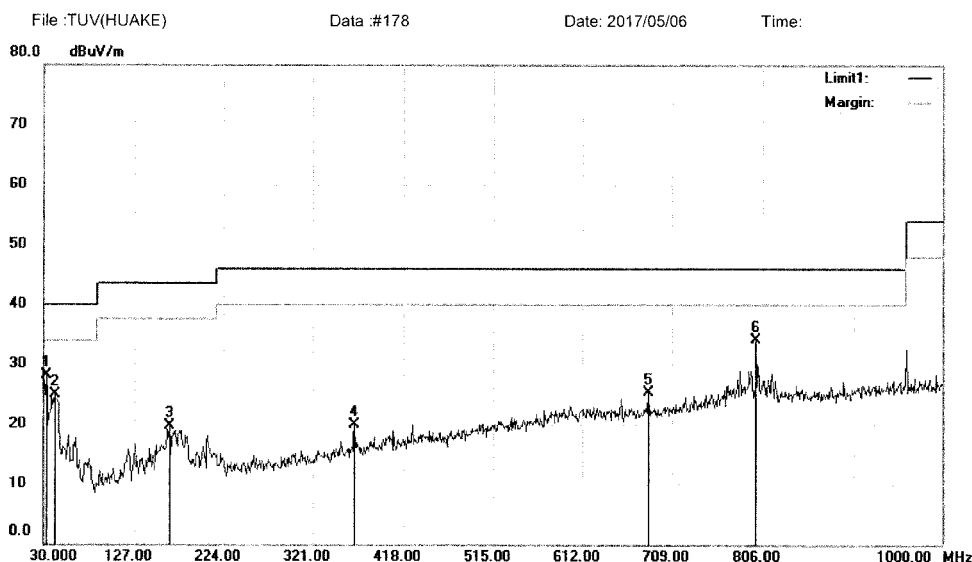
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#177

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac20 5700
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	44.07	-16.04	28.03	40.00	-11.97	QP		
2		41.6400	39.92	-15.03	24.89	40.00	-15.11	QP		
3		164.8300	37.94	-18.32	19.62	43.50	-23.88	QP		
4		365.6200	30.24	-10.28	19.96	46.00	-26.04	QP		
5		683.7800	29.37	-4.16	25.21	46.00	-20.79	QP		
6	*	799.2100	36.19	-2.03	34.16	46.00	-11.84	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#178

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

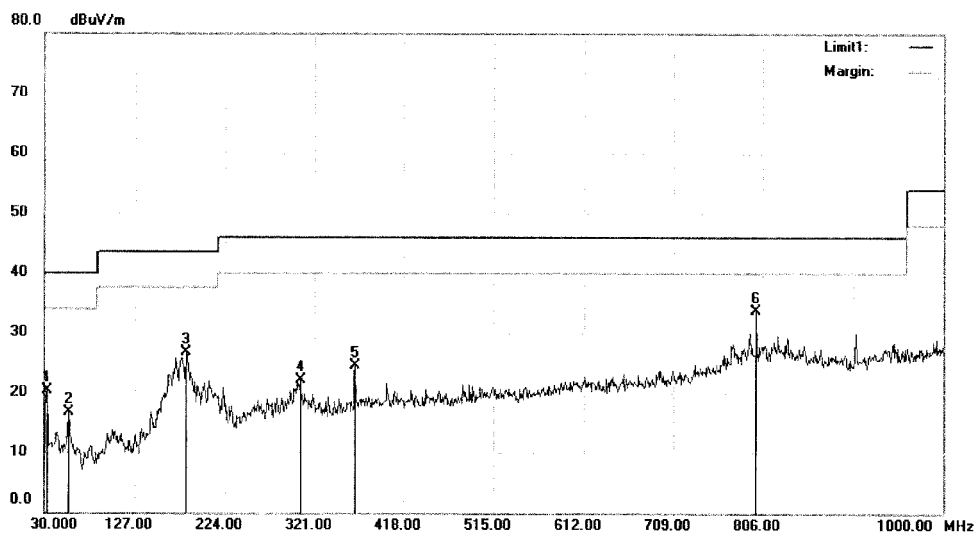
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #179

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.37	-16.04	20.33	40.00	-19.67	QP		
2		56.1900	32.17	-15.55	16.62	40.00	-23.38	QP		
3		182.2900	43.56	-16.83	26.73	43.50	-16.77	QP		
4		305.4800	34.04	-11.99	22.05	46.00	-23.95	QP		
5		365.6200	34.75	-10.28	24.47	46.00	-21.53	QP		
6	*	799.2100	35.69	-2.03	33.66	46.00	-12.34	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #179

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

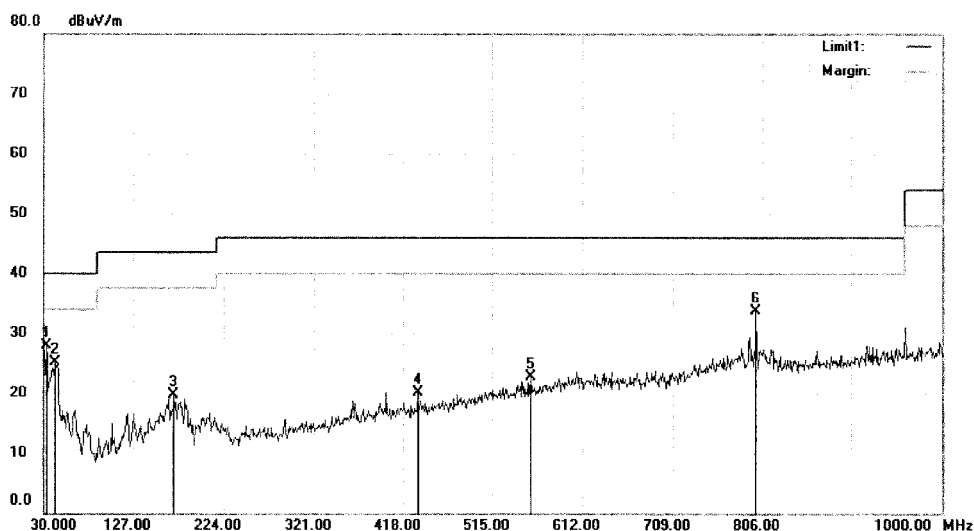
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#180

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	43.96	-16.04	27.92	40.00	-12.08	QP		
2		42.6100	40.08	-14.94	25.14	40.00	-14.86	QP		
3		170.6500	37.96	-18.19	19.77	43.50	-23.73	QP		
4		433.5200	28.83	-8.74	20.09	46.00	-25.91	QP		
5		556.7100	28.88	-6.13	22.75	46.00	-23.25	QP		
6		799.2100	35.74	-2.03	33.71	46.00	-12.29	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

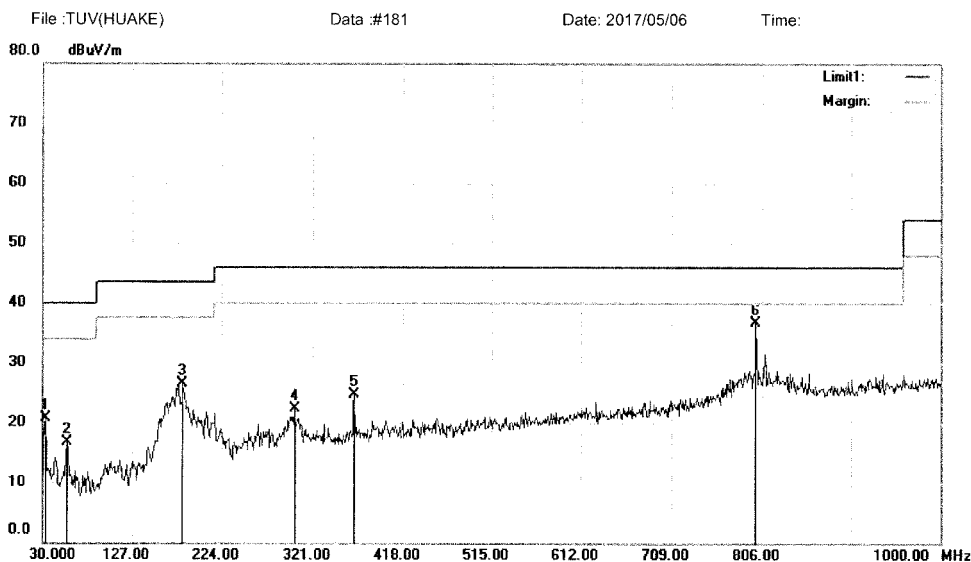
File :TUV(HUAKE)\Data :#180

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11ac20 5785
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.78	-16.04	20.74	40.00	-19.26	QP		
2		56.1900	32.34	-15.55	16.79	40.00	-23.21	QP		
3		182.2900	43.39	-16.83	26.56	43.50	-16.94	QP		
4		301.6000	34.23	-12.00	22.23	46.00	-23.77	QP		
5		365.6200	34.91	-10.28	24.63	46.00	-21.37	QP		
6	*	799.2100	38.66	-2.03	36.63	46.00	-9.37	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #181

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

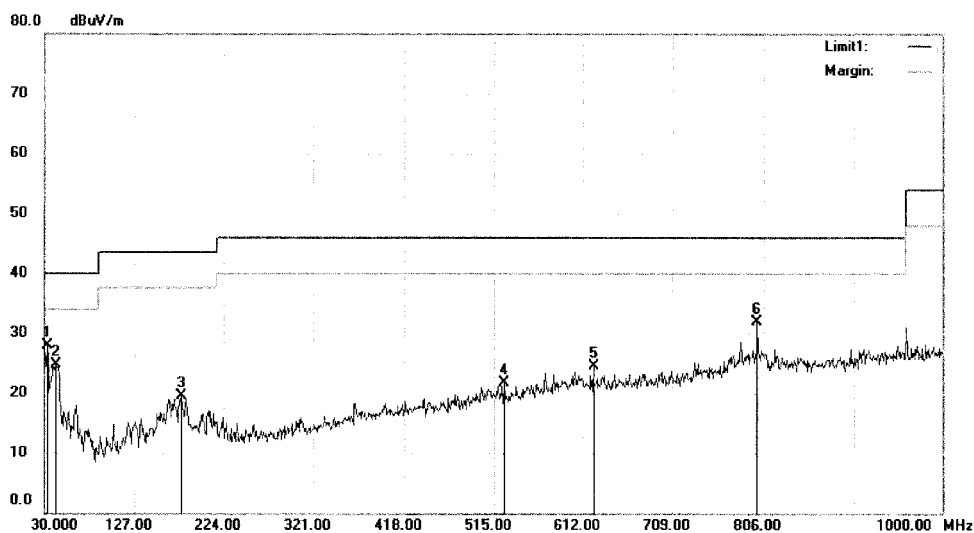
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#182

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.00	-16.04	27.96	40.00	-12.04	QP		
2		42.6100	39.65	-14.94	24.71	40.00	-15.29	QP		
3		177.4400	36.65	-17.20	19.45	43.50	-24.05	QP		
4		525.6700	28.52	-6.89	21.63	46.00	-24.37	QP		
5		623.6400	29.26	-4.79	24.47	46.00	-21.53	QP		
6		799.2100	33.89	-2.03	31.86	46.00	-14.14	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#182

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

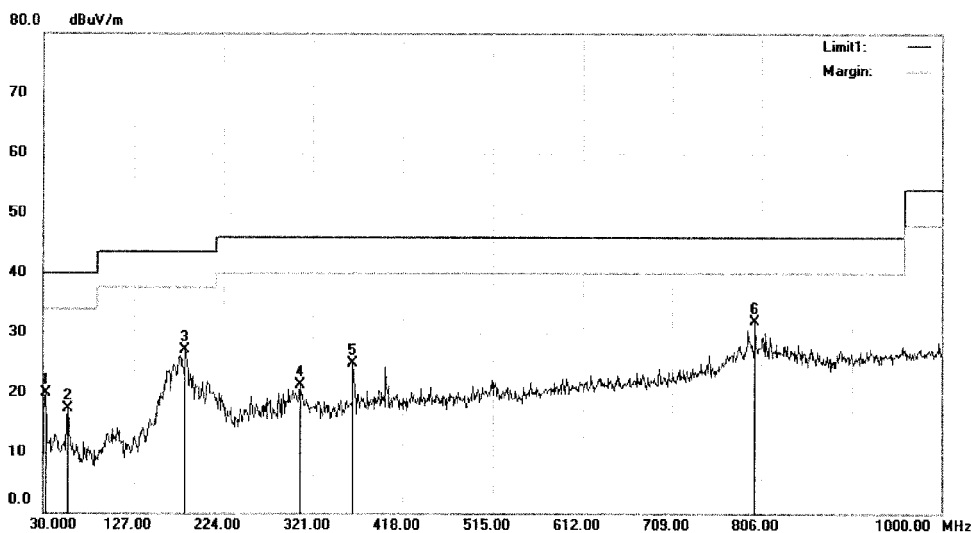

Radiated Emission Measurement

File : TUV(HUAKE)

Data : #183

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		32.9100	36.01	-16.04	19.97	40.00	-20.03	QP		
2		56.1900	32.82	-15.55	17.27	40.00	-22.73	QP		
3		182.2900	43.85	-16.83	27.02	43.50	-16.48	QP		
4		307.4200	33.38	-11.99	21.39	46.00	-24.61	QP		
5		364.6500	35.24	-10.29	24.95	46.00	-21.05	QP		
6	*	799.2100	33.88	-2.03	31.85	46.00	-14.15	QP		

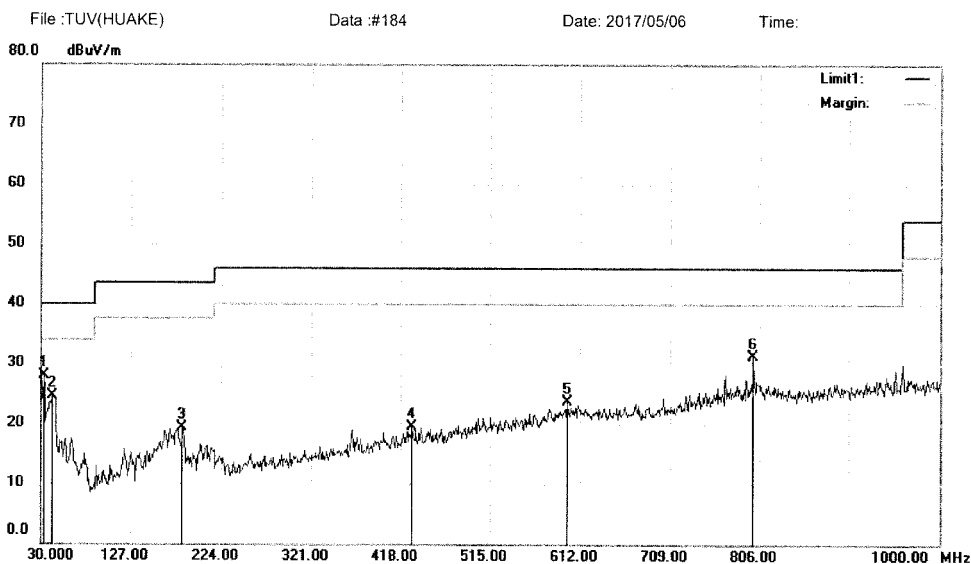
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV(HUAKE)\Data : #183

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.01	-16.04	27.97	40.00	-12.03	QP		
2		42.6100	39.52	-14.94	24.58	40.00	-15.42	QP		
3		182.2900	36.14	-16.83	19.31	43.50	-24.19	QP		
4		430.6100	28.22	-8.79	19.43	46.00	-26.57	QP		
5		598.4200	28.83	-5.09	23.74	46.00	-22.26	QP		
6		799.2100	33.33	-2.03	31.30	46.00	-14.70	QP		

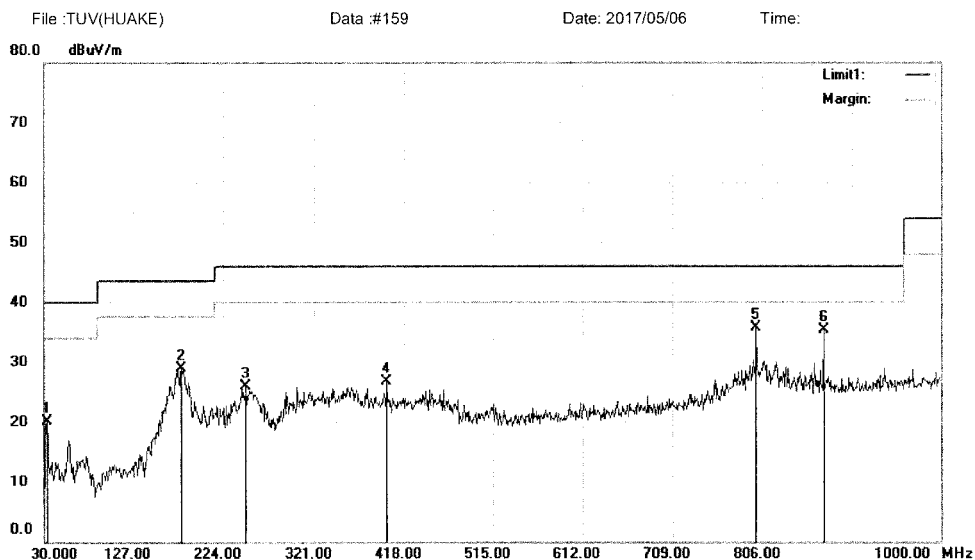
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #184

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.20	-16.04	20.16	40.00	-19.84	QP		
2		179.3800	45.84	-16.92	28.92	43.50	-14.58	QP		
3		248.2500	39.50	-13.68	25.82	46.00	-20.18	QP		
4		399.5700	35.90	-9.26	26.64	46.00	-19.36	QP		
5	*	799.2100	37.64	-2.03	35.61	46.00	-10.39	QP		
6		871.9600	36.63	-1.26	35.37	46.00	-10.63	QP		

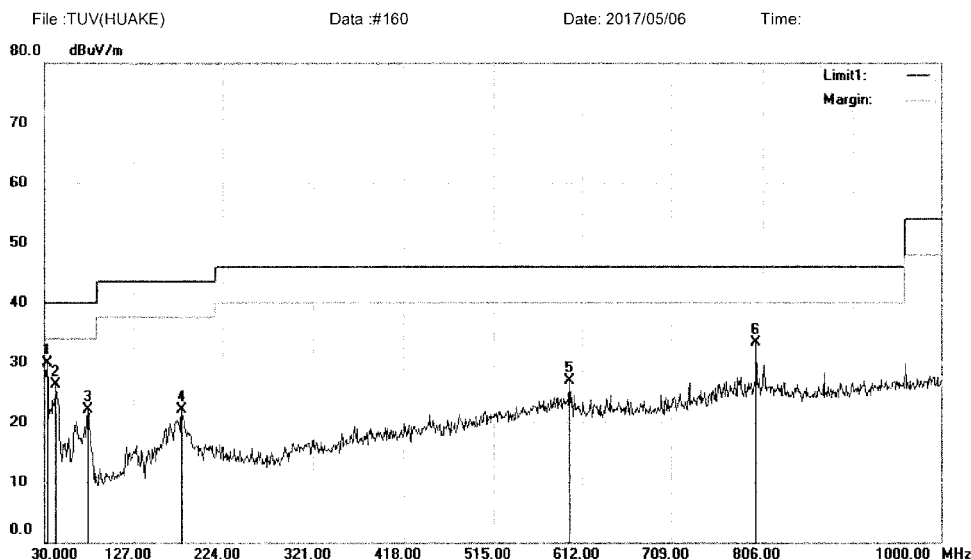
*: Maximum data x: Over limit !: over margin

Operator: KK

File : TUV(HUAKE)\Data : #159

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	45.90	-16.04	29.86	40.00	-10.14	QP		
2		42.6100	41.27	-14.94	26.33	40.00	-13.67	QP		
3		76.5600	42.43	-20.32	22.11	40.00	-17.89	QP		
4		179.3800	38.98	-16.92	22.06	43.50	-21.44	QP		
5		598.4200	32.09	-5.09	27.00	46.00	-19.00	QP		
6		799.2100	35.37	-2.03	33.34	46.00	-12.66	QP		

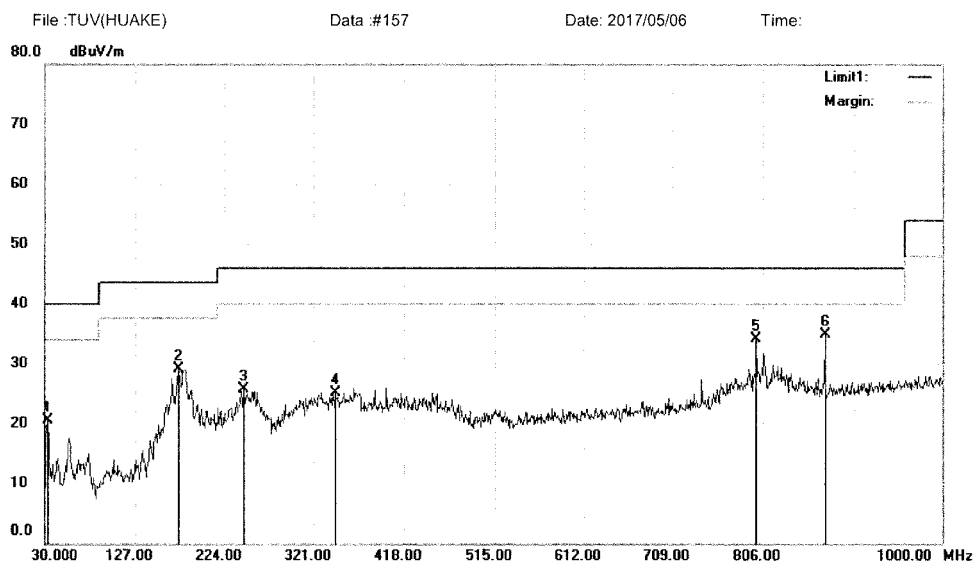
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV(HUAKE)\Data : #160

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.61	-16.04	20.57	40.00	-19.43	QP		
2		173.5600	46.96	-17.76	29.20	43.50	-14.30	QP		
3		245.3400	39.53	-13.82	25.71	46.00	-20.29	QP		
4		344.2800	36.22	-11.02	25.20	46.00	-20.80	QP		
5		799.2100	36.14	-2.03	34.11	46.00	-11.89	QP		
6	*	871.9600	36.21	-1.26	34.95	46.00	-11.05	QP		

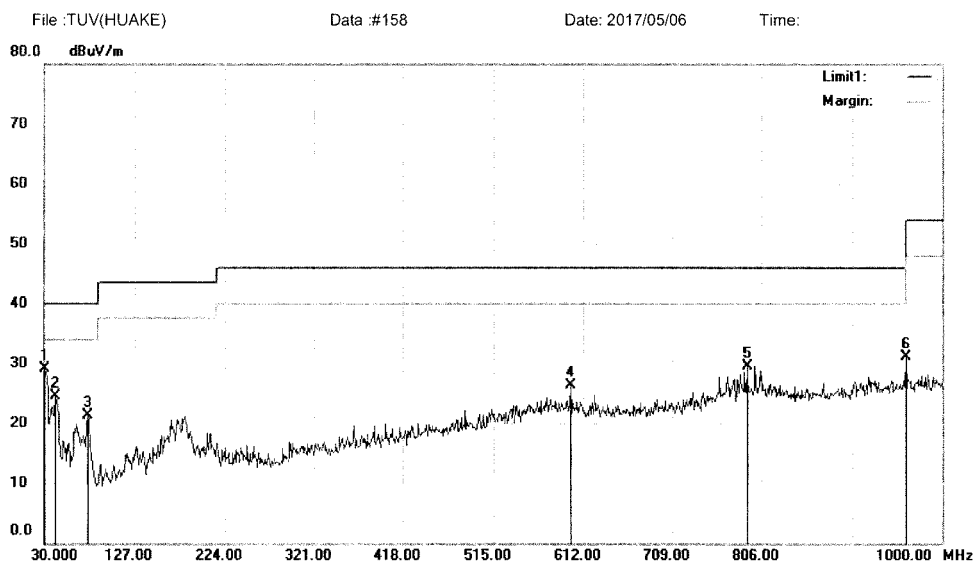
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #157

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	45.36	-16.26	29.10	40.00	-10.90	QP		
2		42.6100	39.50	-14.94	24.56	40.00	-15.44	QP		
3		76.5600	41.70	-20.32	21.38	40.00	-18.62	QP		
4		598.4200	31.45	-5.09	26.36	46.00	-19.64	QP		
5		790.4800	31.62	-2.20	29.42	46.00	-16.58	QP		
6		960.2300	31.30	-0.29	31.01	54.00	-22.99	QP		

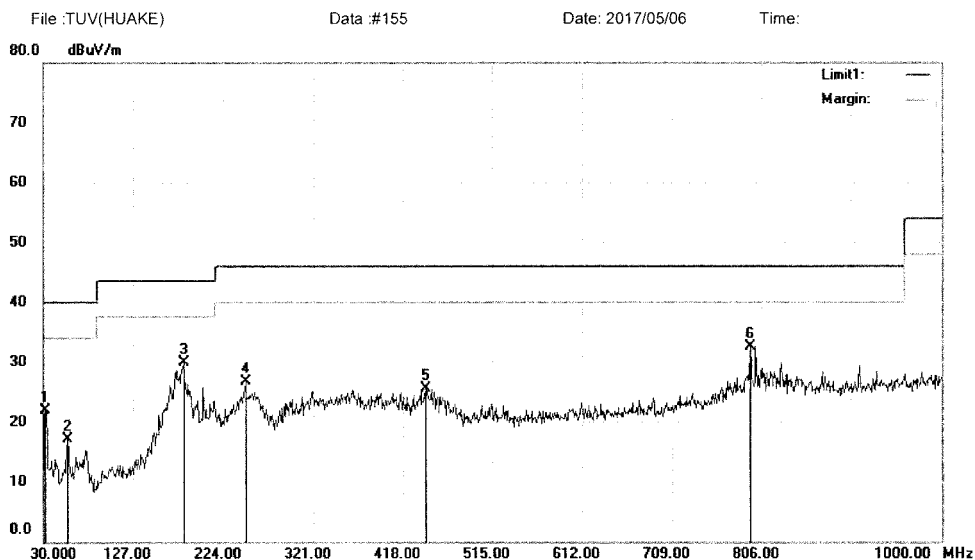
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV(HUAKE)\Data : #158

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac40 5270

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.9400	38.09	-16.24	21.85	40.00	-18.15	QP		
2		56.1900	32.71	-15.55	17.16	40.00	-22.84	QP		
3		181.3200	46.78	-16.83	29.95	43.50	-13.55	QP		
4		247.2800	40.43	-13.73	26.70	46.00	-19.30	QP		
5		443.2200	34.16	-8.59	25.57	46.00	-20.43	QP		
6	*	793.3900	34.71	-2.15	32.56	46.00	-13.44	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

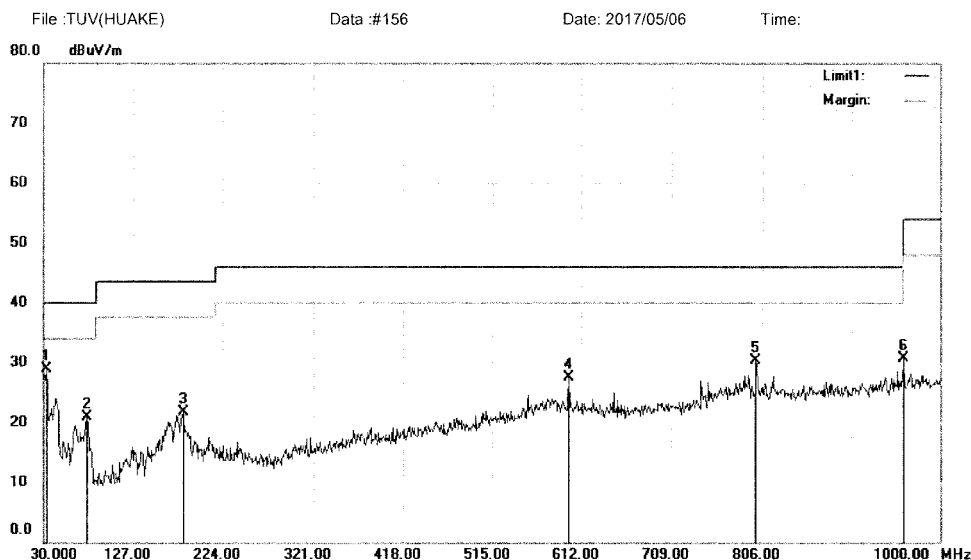
File :TUV(HUAKE)\Data :#155

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5270

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.9100	44.95	-16.04	28.91	40.00	-11.09	QP		
2		76.5600	41.14	-20.32	20.82	40.00	-19.18	QP		
3		181.3200	38.60	-16.83	21.77	43.50	-21.73	QP		
4		598.4200	32.52	-5.09	27.43	46.00	-18.57	QP		
5		799.2100	32.32	-2.03	30.29	46.00	-15.71	QP		
6		960.2300	30.94	-0.29	30.65	54.00	-23.35	QP		

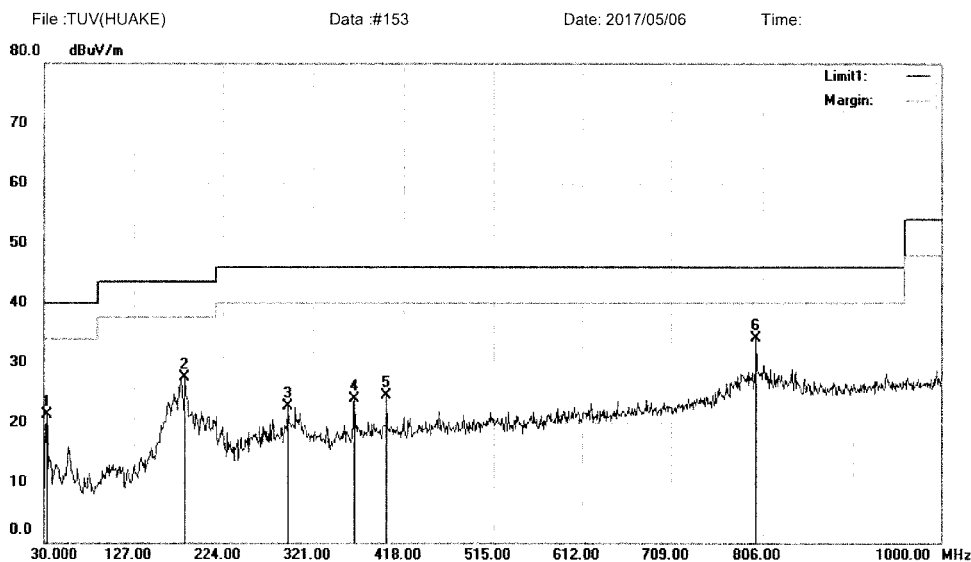
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #156

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5310
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.26	-16.04	21.22	40.00	-18.78	QP		
2		182.2900	44.26	-16.83	27.43	43.50	-16.07	QP		
3		294.8100	35.05	-12.27	22.78	46.00	-23.22	QP		
4		365.6200	34.18	-10.28	23.90	46.00	-22.10	QP		
5		399.5700	33.74	-9.26	24.48	46.00	-21.52	QP		
6	*	799.2100	36.19	-2.03	34.16	46.00	-11.84	QP		

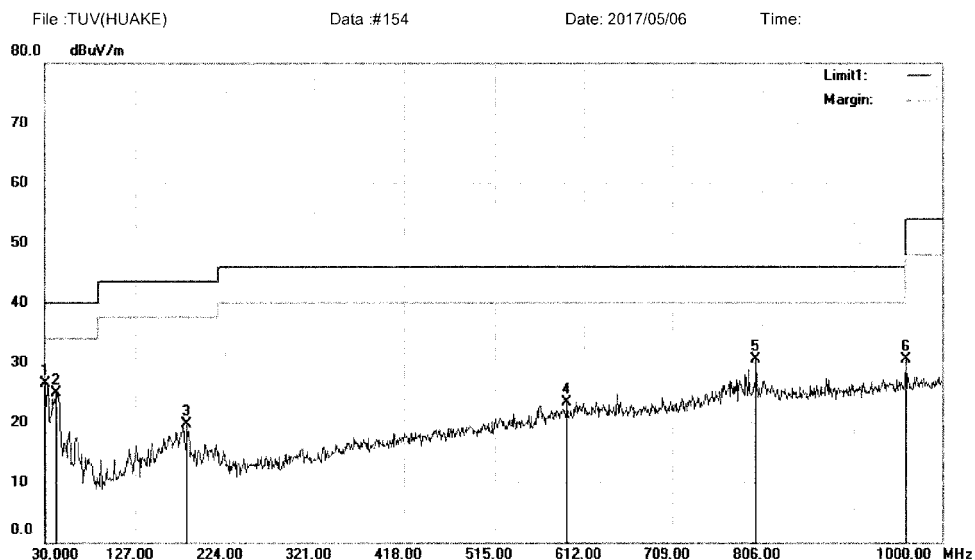
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #153

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5310
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	42.83	-16.26	26.57	40.00	-13.43	QP		
2		42.6100	39.93	-14.94	24.99	40.00	-15.01	QP		
3		182.2900	36.57	-16.83	19.74	43.50	-23.76	QP		
4		593.5700	28.45	-5.21	23.24	46.00	-22.76	QP		
5		799.2100	32.54	-2.03	30.51	46.00	-15.49	QP		
6		960.2300	30.84	-0.29	30.55	54.00	-23.45	QP		

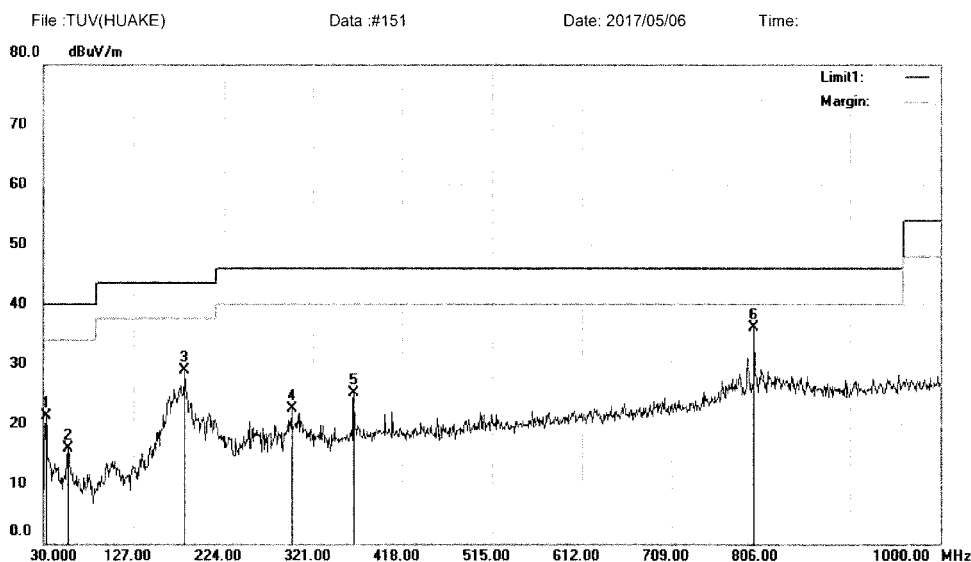
*:Maximum data x:Over limit l:over margin

Operator: KK

File: TUV(HUAKE)\Data: #154

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac40 5510
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.27	-16.04	21.23	40.00	-18.77	QP		
2		56.1900	31.54	-15.55	15.99	40.00	-24.01	QP		
3		182.2900	45.78	-16.83	28.95	43.50	-14.55	QP		
4		297.7200	34.57	-12.11	22.46	46.00	-23.54	QP		
5		365.6200	35.32	-10.28	25.04	46.00	-20.96	QP		
6	*	799.2100	38.12	-2.03	36.09	46.00	-9.91	QP		

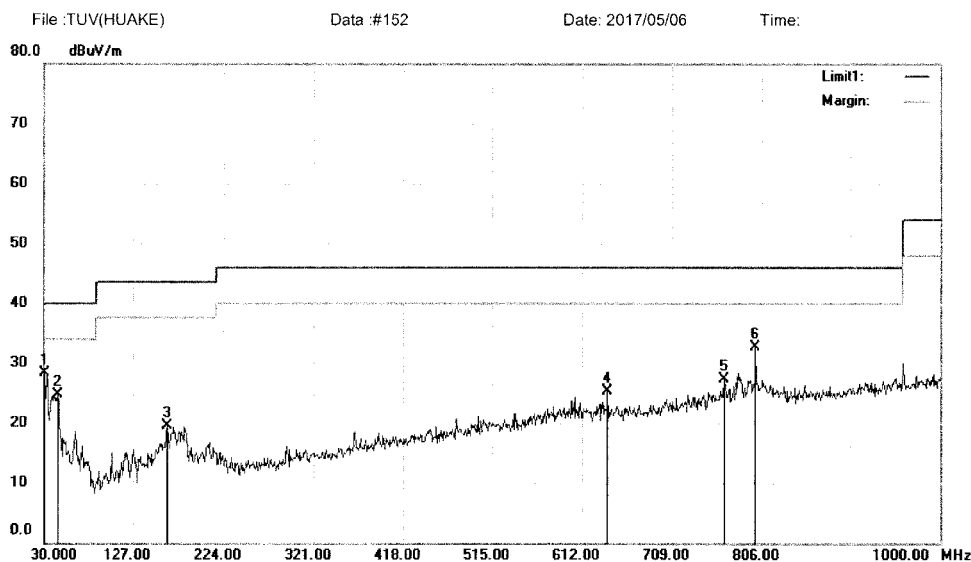
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#151

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac40 5510

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	44.52	-16.26	28.26	40.00	-11.74	QP		
2		44.5500	39.66	-15.01	24.65	40.00	-15.35	QP		
3		163.8600	37.87	-18.32	19.55	43.50	-23.95	QP		
4		640.1300	29.93	-4.63	25.30	46.00	-20.70	QP		
5		765.2600	30.08	-2.71	27.37	46.00	-18.63	QP		
6		799.2100	34.71	-2.03	32.68	46.00	-13.32	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#152

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

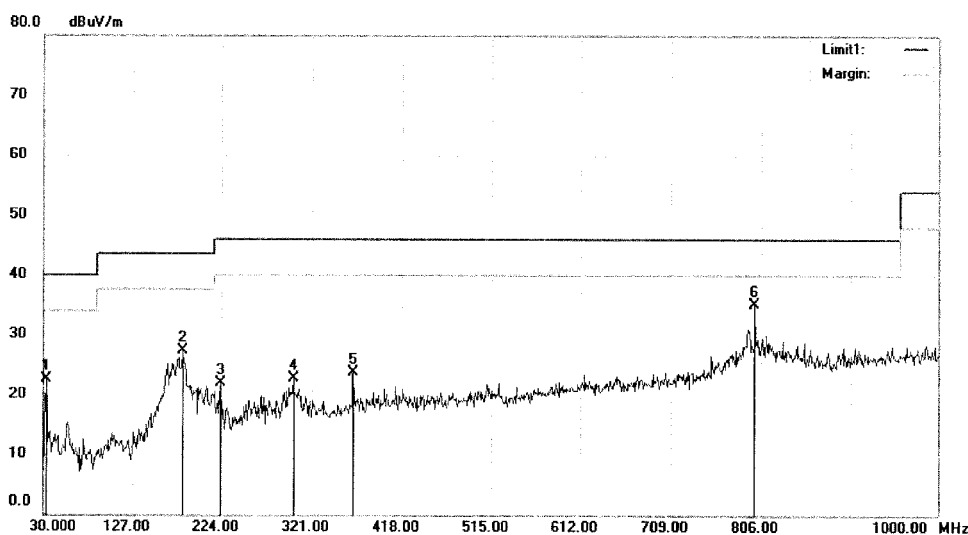
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #149

Date: 2017/05/06

Time:



Site: 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5590

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	38.45	-16.04	22.41	40.00	-17.59	QP		
2		182.2900	44.18	-16.83	27.35	43.50	-16.15	QP		
3		223.0300	36.35	-14.46	21.89	46.00	-24.11	QP		
4		301.6000	34.65	-12.00	22.65	46.00	-23.35	QP		
5		365.6200	33.94	-10.28	23.66	46.00	-22.34	QP		
6	*	799.2100	37.18	-2.03	35.15	46.00	-10.85	QP		

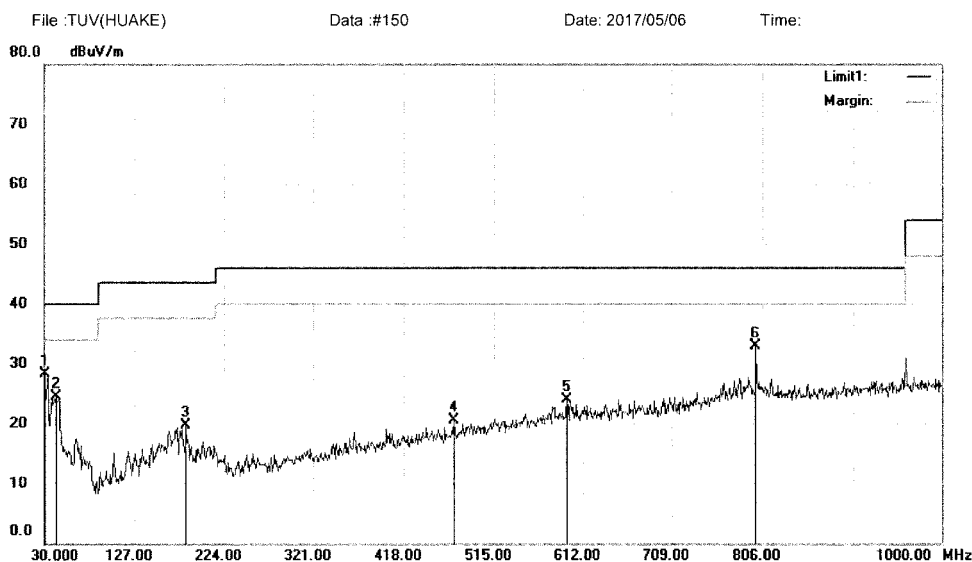
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #149

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5590
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	44.67	-16.30	28.37	40.00	-11.63	QP		
2		41.6400	39.63	-15.03	24.60	40.00	-15.40	QP		
3		182.2900	36.58	-16.83	19.75	43.50	-23.75	QP		
4		471.3500	28.59	-8.11	20.48	46.00	-25.52	QP		
5		594.5400	29.11	-5.19	23.92	46.00	-22.08	QP		
6		799.2100	35.01	-2.03	32.98	46.00	-13.02	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV(HUAKE)\Data : #150

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

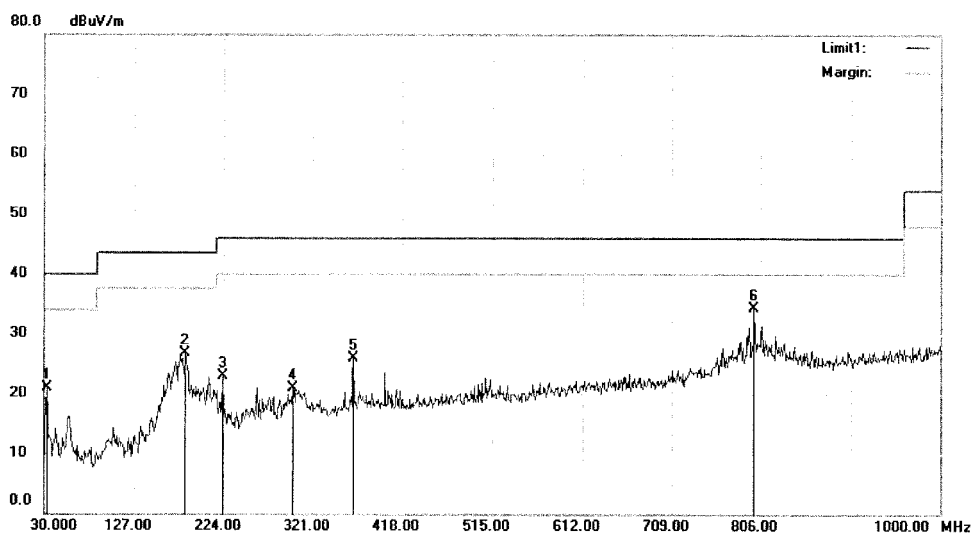

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#147

Date: 2017/05/06

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac40 5670

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	37.03	-16.04	20.99	40.00	-19.01	QP		
2		182.2900	43.46	-16.83	26.63	43.50	-16.87	QP		
3		223.0300	37.34	-14.46	22.88	46.00	-23.12	QP		
4		299.6600	32.99	-12.02	20.97	46.00	-25.03	QP		
5		365.6200	36.10	-10.28	25.82	46.00	-20.18	QP		
6	*	799.2100	36.25	-2.03	34.22	46.00	-11.78	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#147

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



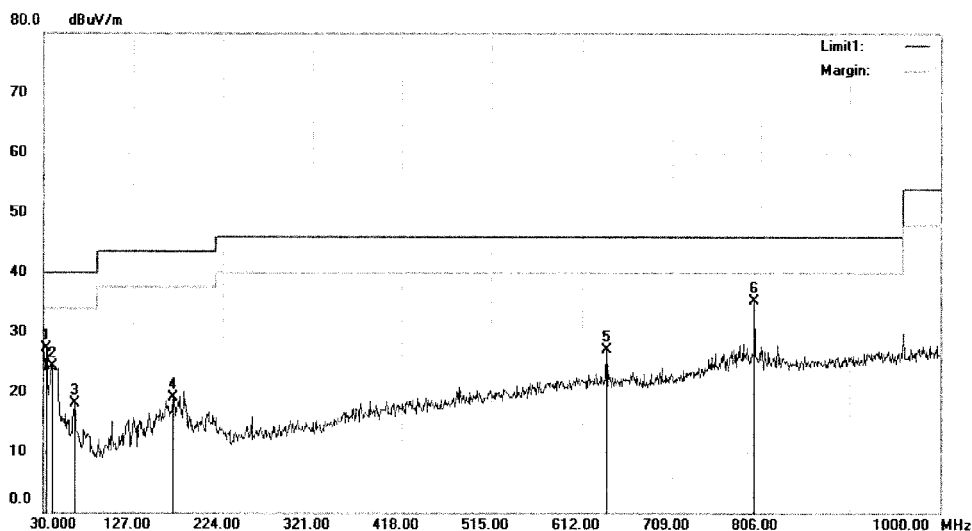
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #148

Date: 2017/05/06

Time:



Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5670

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	43.35	-16.04	27.31	40.00	-12.69	QP		
2		39.7000	39.77	-15.38	24.39	40.00	-15.61	QP		
3		63.9500	35.41	-17.33	18.08	40.00	-21.92	QP		
4		169.6800	37.44	-18.29	19.15	43.50	-24.35	QP		
5		638.1900	31.66	-4.64	27.02	46.00	-18.98	QP		
6	*	799.2100	37.37	-2.03	35.34	46.00	-10.66	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #148

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

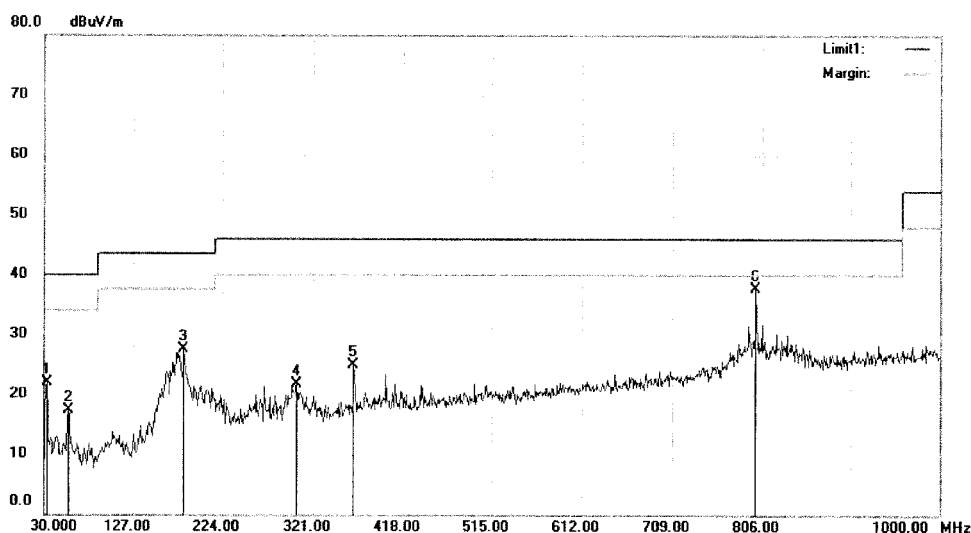

Radiated Emission Measurement

File: TUV(HUAKE)

Data: #145

Date: 2017/05/06

Time:



Site: 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	38.01	-16.04	21.97	40.00	-18.03	QP		
2		56.1900	32.84	-15.55	17.29	40.00	-22.71	QP		
3		182.2900	44.42	-16.83	27.59	43.50	-15.91	QP		
4		303.5400	33.64	-11.99	21.65	46.00	-24.35	QP		
5		364.6500	35.15	-10.29	24.86	46.00	-21.14	QP		
6	*	799.2100	39.66	-2.03	37.63	46.00	-8.37	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #145

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

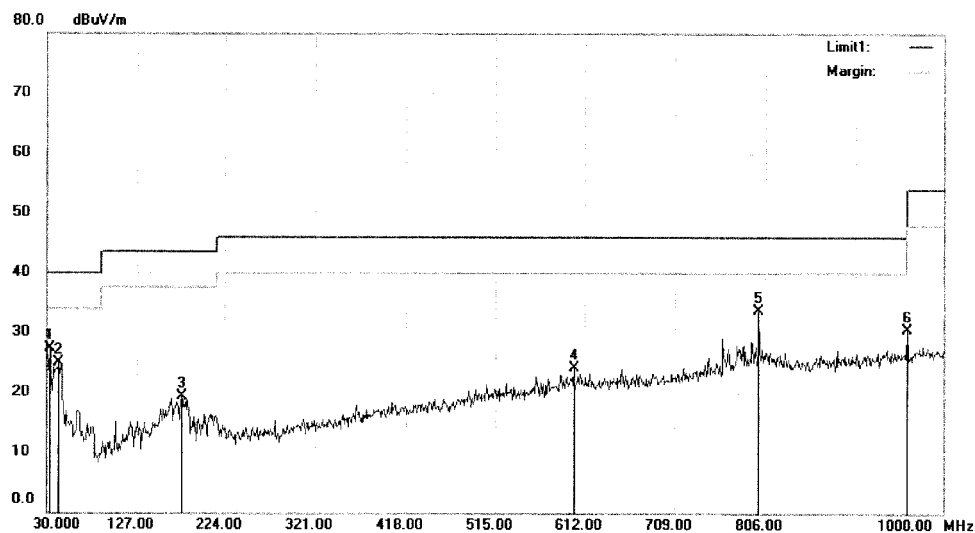
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #146

Date: 2017/05/06

Time:



Site: 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	43.33	-16.04	27.29	40.00	-12.71	QP		
2		42.6100	39.75	-14.94	24.81	40.00	-15.19	QP		
3		176.4700	36.69	-17.34	19.35	43.50	-24.15	QP		
4		600.3600	29.14	-5.05	24.09	46.00	-21.91	QP		
5	*	799.2100	35.70	-2.03	33.67	46.00	-12.33	QP		
6		960.2300	30.74	-0.29	30.45	54.00	-23.55	QP		

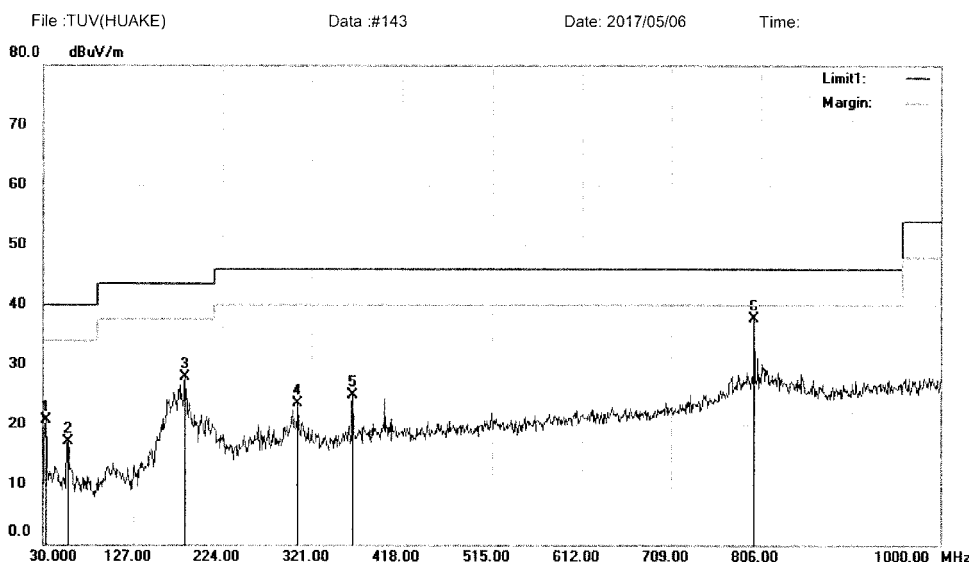
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #146

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.9100	36.65	-16.04	20.61	40.00	-19.39	QP		
2		56.1900	32.60	-15.55	17.05	40.00	-22.95	QP		
3		183.2600	44.82	-16.84	27.98	43.50	-15.52	QP		
4		306.4500	35.47	-11.99	23.48	46.00	-22.52	QP		
5		365.6200	35.12	-10.28	24.84	46.00	-21.16	QP		
6	*	799.2100	39.82	-2.03	37.79	46.00	-8.21	QP		

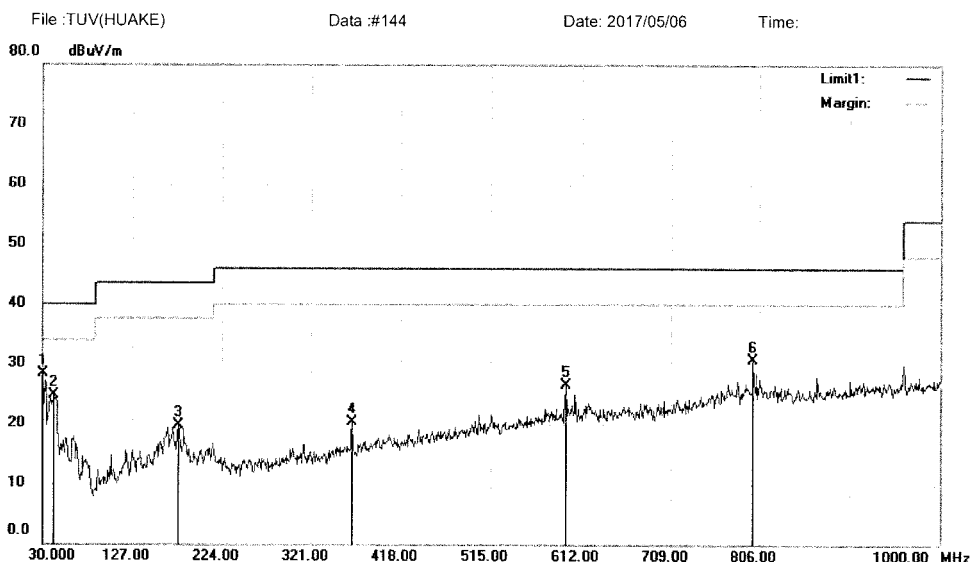
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #143

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	44.66	-16.30	28.36	40.00	-11.64	QP		
2		42.6100	39.58	-14.94	24.64	40.00	-15.36	QP		
3		176.4700	37.11	-17.34	19.77	43.50	-23.73	QP		
4		365.6200	30.63	-10.28	20.35	46.00	-25.65	QP		
5		595.5100	31.66	-5.15	26.51	46.00	-19.49	QP		
6		799.2100	32.78	-2.03	30.75	46.00	-15.25	peak		

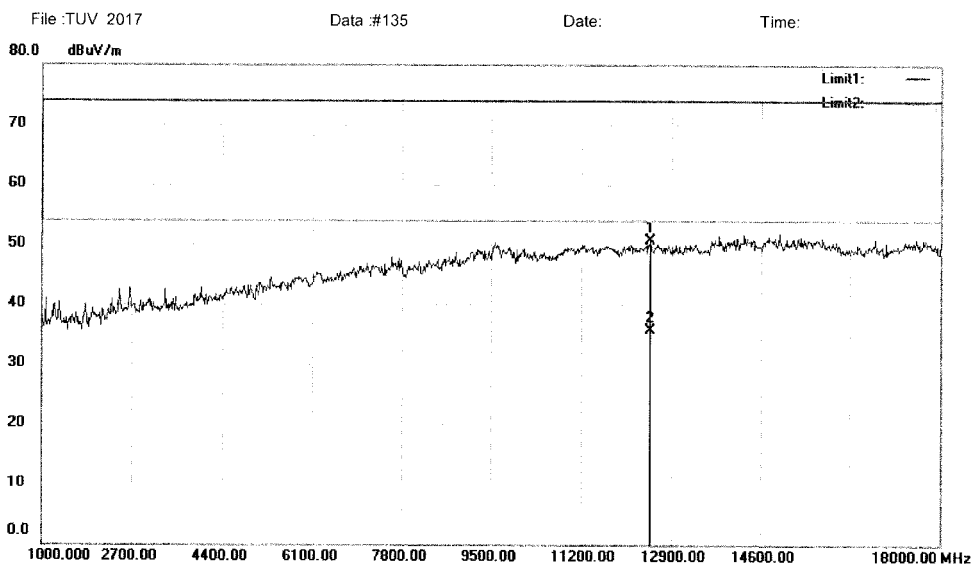
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #144

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		12509.00	63.89	-13.12	50.77	74.00	-23.23	peak		
2	*	12509.00	48.92	-13.12	35.80	54.00	-18.20	AVG		

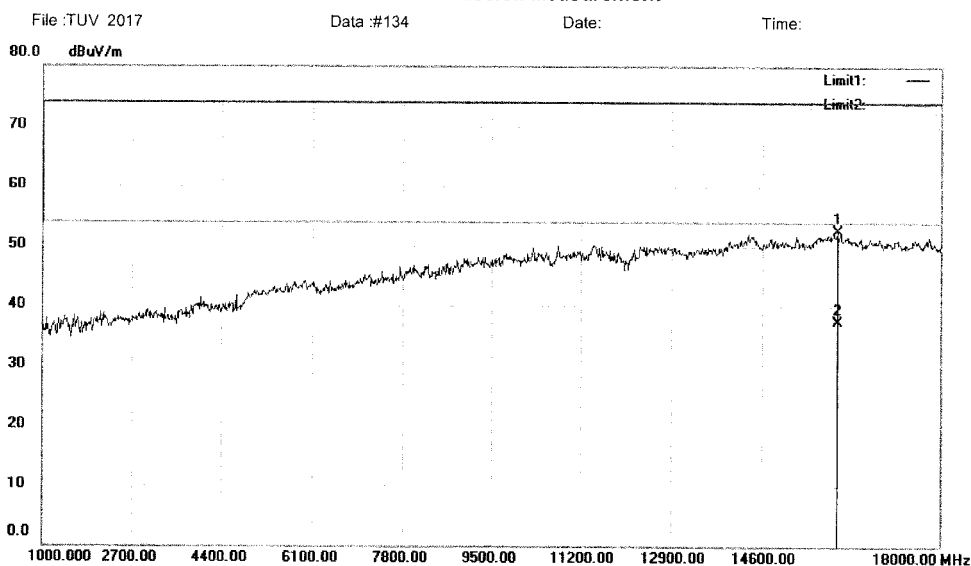
*:Maximum data x:Over limit !:over margin

Operator:

File: TUV 2017\Data: #135

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3
 Limit: (RE)FCC PART 15 C
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5180
 Note:

Polarization: **Vertical** Temperature: 24 C
 Power: AC 120V/60Hz Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		16028.00	65.08	-12.65	52.43	74.00	-21.57	peak		
2	*	16028.00	49.95	-12.65	37.30	54.00	-16.70	AVG		

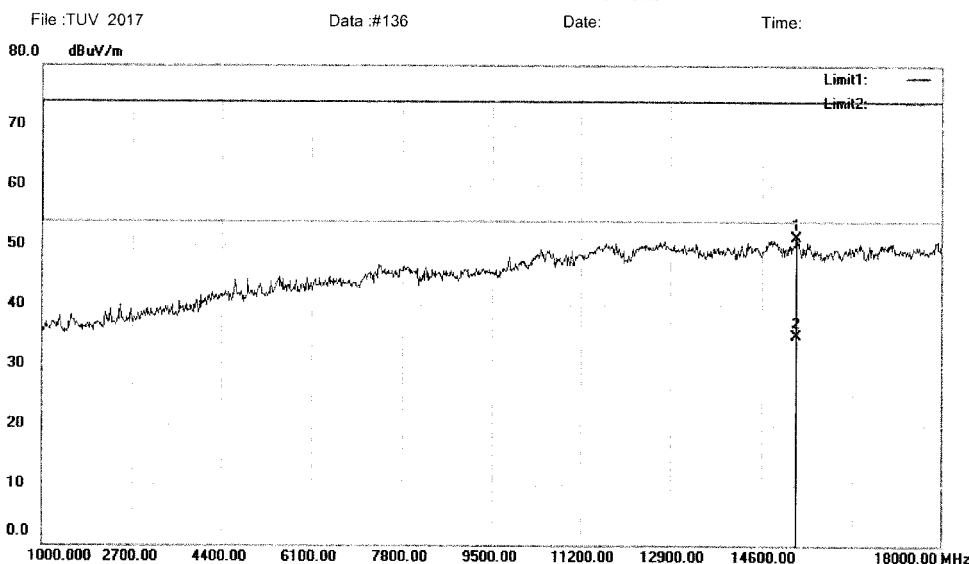
*:Maximum data x:Over limit !:over margin

Operator:

File: TUV 2017\Data: #134

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15246.00	61.69	-10.36	51.33	74.00	-22.67	peak		
2	*	15246.00	45.26	-10.36	34.90	54.00	-19.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

File: TUV 2017>Data: #136

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



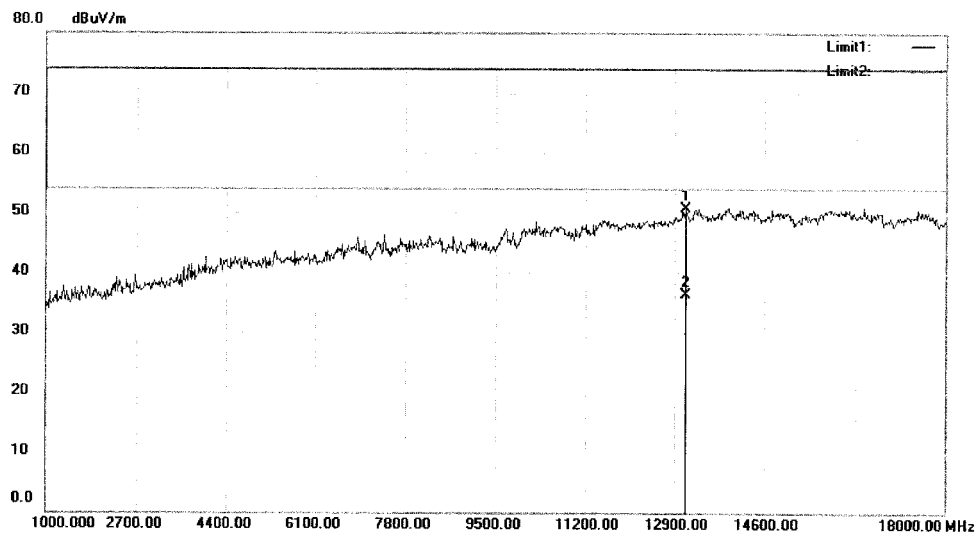
Radiated Emission Measurement

File: TUV 2017

Data: #137

Date:

Time:



Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13104.00	62.95	-12.21	50.74	74.00	-23.26	peak		
2	*	13104.00	48.51	-12.21	36.30	54.00	-17.70	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

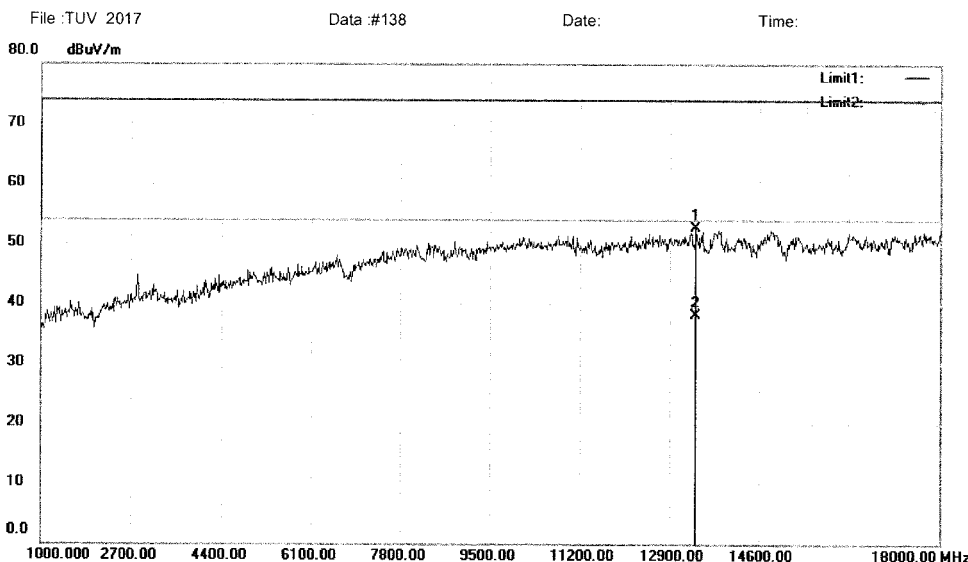
File: TUV 2017\Data: #137

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11a 5240
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13393.00	63.49	-10.80	52.69	74.00	-21.31	peak		
2	*	13393.00	48.90	-10.80	38.10	54.00	-15.90	AVG		

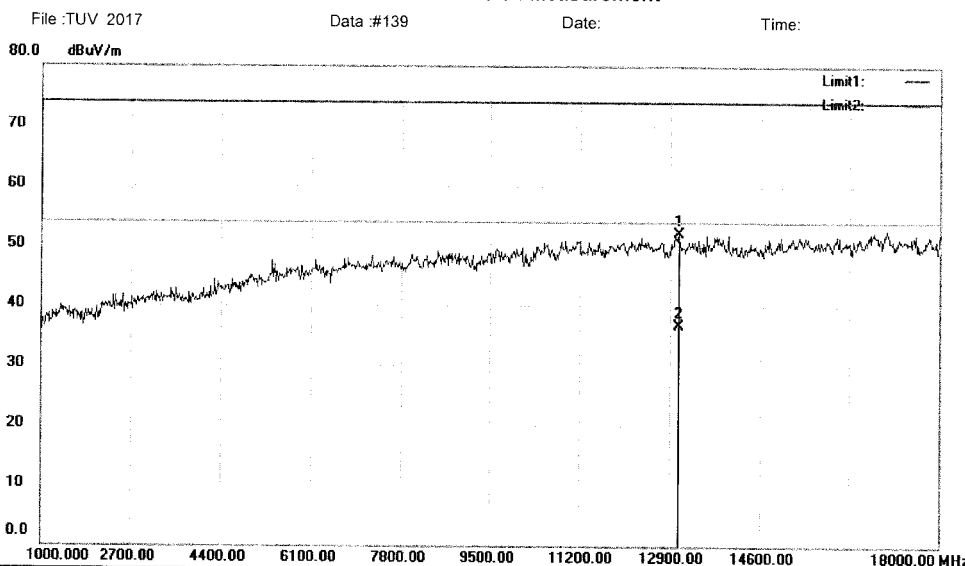
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #138

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13070.00	64.42	-12.38	52.04	74.00	-21.96	peak		
2	*	13070.00	49.18	-12.38	36.80	54.00	-17.20	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#139

Page: 1