

USER MANUAL

802.11 b/g/n, 1T1R 2.4GHz Module

Model: NIUS

WN3602M-PLUS (3.3V/5V)

NXP 88MW320

Version 1.0

3.3V



5V



PRODUCT FEATURES

- IEEE 802.11b/g/n, 1x1 SISO 2.4 GHz
- Compact Form Factor: 30x17x1mm (PCB) ±0.1mm
- Integrated CPU, memory, MAC, DSSS/OFDM baseband, direct conversion RF radio, encryption
- CMOS and low-swing sine wave input clock
- Low-power with deep sleep and standby modes
- Integrated T/R switch, PA, and LNA
- HF/RoHS compliance

PRODUCT SPECIFICATIONS

MAIN CHIPSET

NXP 88MW320-A0-NAPE/AZ


FUNCTIONAL SPECIFICATIONS

WiFi Function	
Standard	IEEE802.11b; IEEE 802.11g; IEEE 802.11n
Bus Interface	UART
Data Rate	802.11b: 11, 5.5, 2, 1 Mbps
	802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
	802.11n: MCS 0 to 7
Media Access Control	CSMA/CA with ACK
Modulation Techniques	802.11b: CCK, DQPSK, DBPSK
	802.11g: 64QAM, 16QAM, QPSK, BPSK
	802.11n: BPSK, QPSK, 16QAM, 64QAM
Network Architecture	Ad-hoc mode (Peer-to-Peer) Infrastructure mode
Operation Channel	2.4GHz
	11: (Ch. 1-11) – United States
	13: (Ch. 1-13) – Europe
	14: (Ch. 1-14) – Japan
Frequency Range	802.11bg 2.412 ~ 2.462 GHz
Transmit Output Power – 1x1 (Tolerance: +-1.5dBm)	802.11b: 11b(1M~11M) :16dBm

	802.11g: 11g(6M~18M) :16dBm 11g(24~54M): 15dBm 802.11n: 11n(MCS0~MCS7) :13dBm
Receive Sensitivity	802.11b: (IEEE Standard <-76dBm) typical: -87.5dBm(1M) 802.11g: (IEEE Standard <-65dBm) Typical: -73dBm(54M) 802.11n: 20MHz (IEEE Standard <-64dBm) Typical: -71dBm
Security	WPA, WPA2, WPS, WEP 64/128, IEEE 802.11x, IEEE 802.11i
Operating Voltage	5V or 3.3V $\pm 10\%$ supply voltage
Power Consumption (Average)	165mA@16dBm
Antenna Type	Printed Antenna

PIN DEFINITION


J1 Stamp Module Pin-out

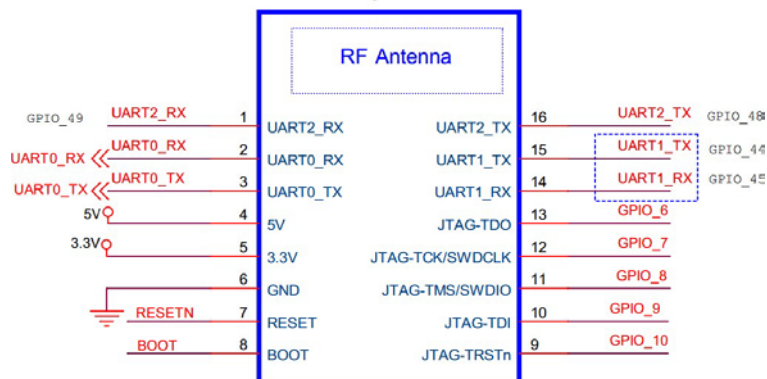


PIN	Name	Type	
1	UART2_RX	I	
2	UART0_RX	I	
3	UART0_TX	O	
4	5V	P	5V Power in
5	3.3V	P	3.3V Power in
6	GND	GND	Ground
7	RESET	I	IC Reset
8	BOOT	I/O	
9	GPIO10	I	JTAG-TRST
10	GPIO9	I	JTAG-TDI
11	GPIO8	I/O	JTAG-TMS
12	GPIO7	I	JTAG-CLK
13	GPIO6	O	JTAG-TDO
14	UART1_RX	I	
15	UART1_TX	O	
16	UART2_TX	O	

MECHANICAL

WN3602M (3.3V)

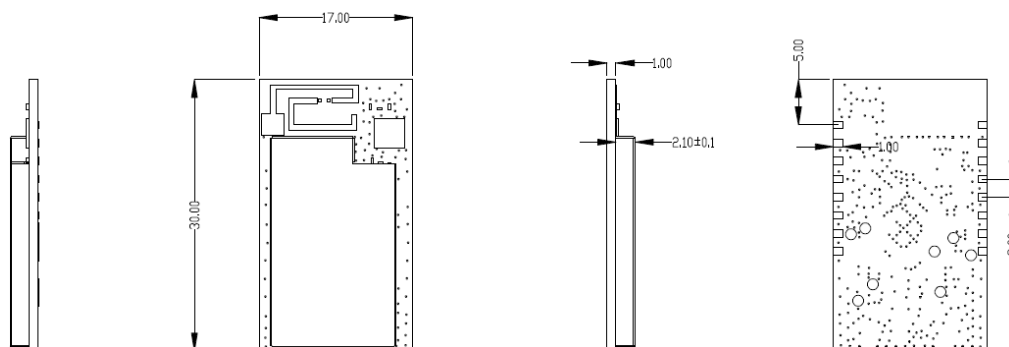


WN3602M (5V)

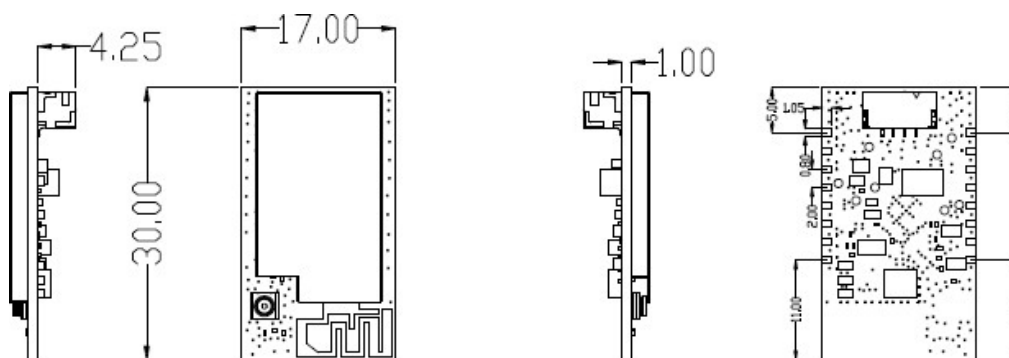

Unit : mm ; Tolerance : +/- 0.1mm

RECOMMEND FOOTPRINT

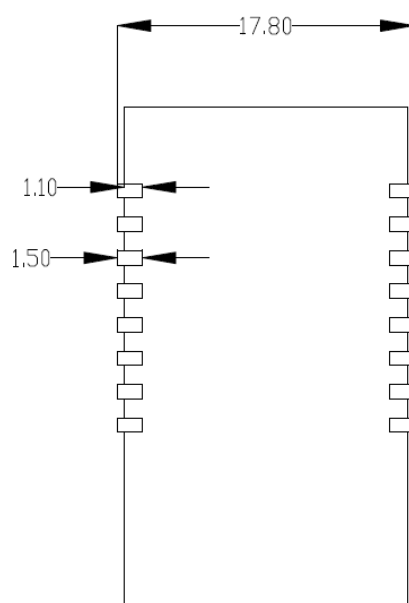

Unit : mm

ENVIRONMENTAL

Operating

Operating Temperature: 0 to 70 °C

Relevant Humidity: 5-90% (non-condensing)

Storage

Temperature: -40 to 85 °C

Relevant Humidity: 5-95% (non-condensing)

WARNINGS

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ☐ Reorient or relocate the receiving antenna.
- ☐ Increase the separation between the equipment and receiver.
- ☐ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ☐ Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

ISED Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

ISED Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

The transmitter module may not be co-located with any other transmitter or antenna.

Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible.

This module is intended for OEM integrators under the following conditions:

1. Ensure that the end-user has no manual instructions to remove or install module.
2. This module is certified pursuant to Part 15 rules section 15.247 and RSS-247.
3. This module has been approved to operate with the antenna types listed below, with the maximum permissible gain indicated.

Antenna	Frequency Band	Antenna Type	Brand	Model Number	Gain(dBi)
1	2400-2483.5MHz	Printed Antenna	LITEON	WN3602M	-0.9

4. Label and compliance information

Label of the end product:

FCC

The host product must be labeled in a visible area with the following "Contains FCC ID: 2AIBX-NIULL".

The end product shall bear the following 15.19 statement: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

ISED

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains transmitter module IC: 21700-NIULL" or "Contains IC: 21700-NIULL"

Contient le module d'émission IC: 21700-NIULL

5. Information on test modes and additional testing requirements

This module has been approved under stand-alone configuration.

OEM integrator has limited the operation channels in channel 1-11 for 2.4GHz band.

The separate approval is required for all other operating configurations, including portable configurations with respect to Part 2.1093/RSS-102 and different antenna configurations

The information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host can be found at KDB Publication 996369 D04.

OEM integrator is still responsible for testing their end product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

IMPORTANT NOTE: In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC/ISED authorization is no longer considered valid and the FCC/IC No. cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC/ISED authorization.

6. Additional testing, Part 15 Subpart B and ICES-003 disclaimer

Appropriate measurements (e.g. Part 15 Subpart B compliance) and if applicable additional equipment authorizations (e.g. SDoC) of the host product to be addressed by the integrator/manufacture.

This module is only FCC/ISED authorized for the specific rule parts 15.247, RSS-247 listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC/ISED rules that apply to the host product as being Part 15 Subpart B/ICES-003 compliant.

7. The user manual of the end product should include:

FCC:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The antenna(s) used for this transmitter must not transmit simultaneously with any other antenna or transmitter.

ISED:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1.This device may not cause interference.

2.This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1.L'appareil ne doit pas produire de brouillage;

2.L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

ISED Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

The transmitter module may not be co-located with any other transmitter or antenna.

Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible.

NCC 警語:

1.取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

2.本器材須經專業工程人員安裝及設定，始得設置使用，且不得直接販售給一般消費者。

3.最終產品內含已認證過之射頻模組(組件)，應於最終產品本體明顯處標示「本產品內含射頻模組

CCXXXXLPYYYYZ」

WARNING BRAZIL:

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados. Para maiores informações, consulte o site da ANATEL – www.anatel.gov.br")