

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (1) of (18)

TEST REPORT Part 15 Subpart C 15.249

Equipment under test MULTICOPTER

Model name LOBIT 100C

FCC ID 2AICO-LOBIT100C

Applicant DROGEN Co., Ltd.

Manufacturer DROGEN Co., Ltd.

Date of test(s) 2016.06.03 ~2016.06.20

Date of issue 2016.06.28

Issued to

DROGEN Co., Ltd.

D-1004, Smart Vally, 30 Songdomirae-ro, Yeonsu-gu, Incheon, 21990, Korea Tel: +82-70-5066-1234 / Fax: +82-32-720-4622

Issued by

KES Co., Ltd.

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea 473-29, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by:	Report approval by:
Har	
Hyeon-Su Jang	Jeff Do
Test engineer	Technical manager



Test report No.: KES-RF-16T0050 Page (2) of (18)

Revision history

Revision	Date of issue Test report No.		Description
-	2016.06.28	KES-RF-16T0050	Initial



Test report No.: KES-RF-16T0050 Page (3) of (18)

TABLE OF CONTENTS

1. G	General i	nformation	4
1.	.1.	EUT description	4
1.	.2.	Test configuration	4
1.	.3.	Frequency/channel operations	5
1.	.4.	Accessory information	
1.	.5.	Device modifications	
1.	.6.	Derivation model information	5
2. S	ummary	of tests	6
		lts	
3.	.1	Field strength of fundamental & Radiated spurious emission & Out-of-band emission	7
3.	.2	20 dB bandwidth	14
Apper	ndix A.	Measurement equipment	17
		Test setup photo	18



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (4) of (18)

1. General information

Applicant: DROGEN Co., Ltd.

Applicant address: D-1004, Smart Vally, 30 Songdomirae-ro, Yeonsu-gu, Incheon, 21990, Korea

Test site: KES Co., Ltd.

Test site address: C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do,14057, Korea

473-29, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea

FCC rule part(s): Part 15.249

FCC ID: 2AICO-LOBIT100C

Test device serial No.: Production Pre-production Engineering

1.1. EUT description

Equipment under test MULTICOPTER

Frequency range 2410 Mb ~ 2465 Mb

Model: LOBIT 100C

Derivative model N/A

Modulation technique GFSK

Number of channels 12ch

Antenna specification Antenna type: PCB, Peak gain: 1.0 dBi

Power source DC 3.7 V Li-ion Battery

1.2. Test configuration

The <u>DROGEN Co., Ltd. MULTICOPTER FCC ID: 2AICO-LOBIT100C</u> was tested per the guidance ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing.



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (5) of (18)

1.3. Frequency/channel operations

Ch.	Frequency (Mb)
01	2 410
	•
06	2 435
•	•
12	2 465

1.4. Accessory information

Applicant	Equipment	Manufacturer	Model	Power source	
-	-	-	-	-	

1.5. Device modifications

N/A

1.6. Derivation model information

N/A



Test report No.: KES-RF-16T0050 Page (6) of (18)

2. **Summary of tests**

Reference	Parameter	Test results
15.249(a)	Field strength of fundamental	Pass
15.205 15.209 15.249(d)	Radiated spurious emission, Out-of-band emission	Pass
15.215(c)	20 dB bandwidth	Pass




C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (7) of (18)


3. Test results

3.1 Field strength of fundamental & Radiated spurious emission & Out-of-band emission Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

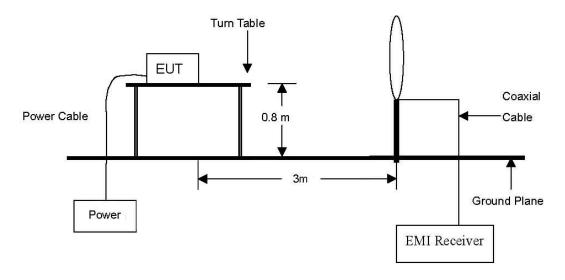


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 Mz to 1 Gz emissions.

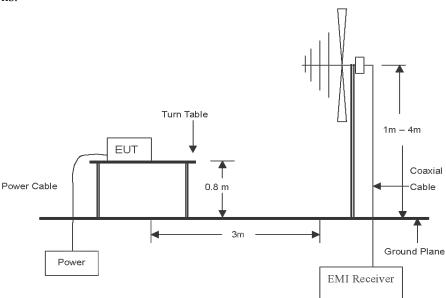



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (8) of (18)

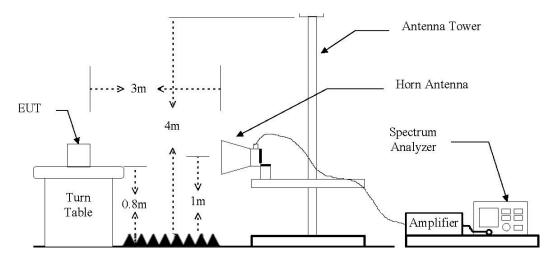

Test procedure below 30 Mz

- 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- 3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 Mbz

- 1. Spectrum analyzer settings for f < 1 GHz:
 - ① Span = wide enough to fully capture the emission being measured
 - ② RBW = 100 kHz
 - \bigcirc VBW \geq RBW
 - 4 Detector = quasi peak
 - ⑤ Sweep time = auto
 - \bigcirc Trace = max hold
- 2. Spectrum analyzer settings for $f \ge 1$ GHz: Peak
 - ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
 - ② RBW = 1 MHz
 - \bigcirc VBW \geq 3 Mz
 - 4 Detector = peak
 - ⑤ Sweep time = auto
 - \bigcirc Trace = max hold
 - 7 Trace was allowed to stabilize



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (9) of (18)

- 3. Spectrum analyzer settings for $f \ge 1$ GHz: Average
 - ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
 - ② RBW = 1 Mbz
 - \bigcirc VBW = 10 Hz
 - 4 Set detector = Peak
 - ⑤ Set sweep time = auto
 - \bigcirc Sweep = auto
 - \bigcirc Trace = max hold
 - Allow sweeps to continue until the trace stabilizes.

Note.

1. f < 30 MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40log(D_m/Ds)$ $f \ge 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20log(D_m/Ds)$ Where:

 F_d = Distance factor in dB

 D_m = Measurement distance in meters

 D_s = Specification distance in meters

- 3. CF(Correction factors(dB)) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d(dB)
- 4. Field strength($dB\mu V/m$) = Level($dB\mu V$) + CF (dB) + or DCF(dB)
- 5. Margin(dB) = Limit(dB μ V/m) Field strength(dB μ V/m)
- 6. Emissions below 18 © were measured at a 3 meter test distance while emissions above 18 © were measured at a 1 meter test distance with the application of a distance correction factor.
- 7. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **Y orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **Y orientation**.
- 8. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (10) of (18)

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (µV/m)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kllz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

^{**}Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands $54 \sim 72~\text{MHz}$, $76 \sim 88~\text{MHz}$, $174 \sim 216~\text{MHz}$ or $470 \sim 806~\text{MHz}$. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to 15.249(a)

Fundamental	Field strength	of fundamental	Field strength of harmonics		
frequency	mV/m	dBuV/m	uV/m	dBuV/m	
902-928 MHz	50	94	500	54	
2400-2483.5 MHz	50	94	500	54	
5725-5875 MHz	50	94	500	54	
24.0-24.25 GHz	250	108	2500	68	

According to 15.249(d)

Emission radiated outside of the specified frequency bands, except harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limit in FCC part 15C, Section 15.209, whichever is the lesser attenuation.



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (11) of (18)

Test result (Fundamental)

Operating Frequency: 2 410 Mbz

Frequency (MHz)	Level (dBµV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2410.10	80.09	Peak	Н	-0.84	=	79.25	114.00	34.75
2410.12	68.62	Peak	V	-0.84	-	67.78	114.00	46.22

Operating Frequency: 2 435 Mb

Frequency (MHz)	Level (dBµV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2435.25	78.87	Peak	Н	-0.71	-	78.16	114.00	35.84
2435.14	70.05	Peak	V	-0.71	-	69.34	114.00	44.66

Operating Frequency: 2 465 Mbz

Frequency (MHz)	Level (dBµV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2465.00	77.84	Peak	Н	-0.55	-	77.29	114.00	36.71
2465.14	67.80	Peak	V	-0.55	-	67.25	114.00	46.75



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (12) of (18)

Test results (Spurious emission)

- Below 30 Mbz

Operating Frequency: 2 410 Mb (Worst case)

Frequency (MHz)	Level (dBµV)	Ant. Pol. (H/V)	CF (dB)	F _d (dB)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)		
No spurious emissions were detected within 20 dB of the limit									

- Below 1 000 Mbz

Operating Frequency: 2 410 Mz (Worst case)

Frequency (MHz)	Level (dBµV)	Ant. Pol (H/V)	CF (dB)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
49.41	21.33	V	15.37	36.70	40.00	3.30
136.75	15.26	Н	10.82	26.08	43.50	17.42
157.10	17.58	V	11.27	28.85	43.50	11.15
241.47	20.36	Н	15.93	36.29	46.00	10.71
302.10	14.27	V	17.66	31.93	46.00	14.07
410.25	16.33	Н	20.95	37.28	46.00	9.72



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (13) of (18)

- Above 1 000 Mb

Operating Frequency: 2 410 Mbz

Frequency (MHz)	Level (dBµV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2377.15	43.58	Peak	Н	-1.02	-	42.56	74.00	31.44
2377.18	42.55	Peak	V	-1.02	-	41.53	74.00	32.47
4820.35	41.32	Peak	Н	8.19	-	49.51	74.00	24.49
4820.22	40.42	Peak	V	8.19	-	48.61	74.00	25.39

Operating Frequency: 2 435 Mz

Frequency (MHz)	Level (dBµV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4870.84	40.28	Peak	Н	8.55	-	48.83	74.00	25.17
4870.66	39.02	Peak	V	8.55	-	47.57	74.00	26.43

Operating Frequency: 2 465 Mbz

Frequency (MHz)	Level (dBµV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2483.51	42.89	Peak	Н	-0.45	-	42.44	74.00	31.56
2483.51	42.70	Peak	V	-0.45	-	42.25	74.00	31.75
4930.88	39.95	Peak	Н	8.98	-	48.93	74.00	25.07
4930.69	38.77	Peak	V	8.98	-	47.75	74.00	26.25



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (14) of (18)

3.2 20 dB bandwidth

EUT Attenuator Spectrum analyzer

Test procedure

1. Use the following spectrum analyzer setting

Center frequency: Lowest, middle and highest channels

Span = approximately 2 to 3 times the 20dB bandwidth

RBW \geq 1 % of the 20dB bandwidth

 $VBW \ge 3 \times RBW$

Sweep = auto

Detector function = peak

Trace = \max hold

2. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Limit

Not applicable




C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (15) of (18)

Test results

Operation mode	Frequency(Mb)	20 dB bandwidth(Mb)	Limit
	2 410	0.724	1
Transmission	2 435	0.731	-
	2 465	0.731	1

20 dB bandwidth // Low channel

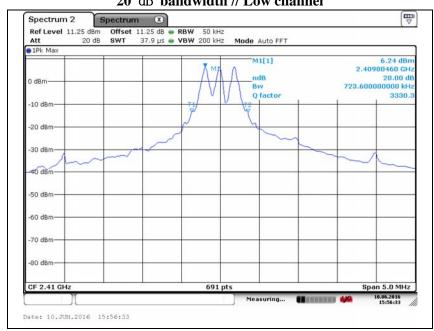



C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Test report No.: KES-RF-16T0050 Page (16) of (18)

20 dB bandwidth // Middle channel



20 dB bandwidth // High channel





Test report No.: KES-RF-16T0050 Page (17) of (18)

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV30	100736	1 year	2016.07.25
8360B Series Swept Signal Generator	НР	83630B	3844A00786	1 year	2017.01.25
High Pass Filter	WAINWRIGHT INSTRUMENT	WHJS3000-10TT	1	1 year	2016.07.24
Low Pass Filter	WEINSCHEL	WLK1.0/18G-10TT	1	1 year	2016.07.24
Preamplifier	HP	8447F	2805A02570	1 year	2017.01.21
Brodband preamplifier	Schwarzbeck	BBV9718	9718-246	1 years	2016.10.23
Loop Antenna	R&S	HFH2- Z2.335.4711.52	826532	2 years	2017.03.03
Trilog-broadband antenna	Schwarzbeck	VULB 9168	9168-713	2 years	2017.05.15
Horn antenna	A.H.	SAS-571	781	2 years	2017.05.07
EMI Test Receiver	R&S	ESR3	101781	1 year	2017.05.03
EMI Test Receiver	R&S	ESU26	100552	1 year	2017.04.24

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
-	-	-	-