# **FCC Test Report**

Report No.: AGC06426160601FE02

FCC ID : 2AICV-S10

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: 3G Smart Phone

**BRAND NAME** : SIMTEL

MODEL NAME : S10

**CLIENT**: PHONEPAC S.A

**DATE OF ISSUE** : June 17, 2016

**STANDARD(S)** : FCC Part 22H & 24E Rules

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

# **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC06426160601FE02 Page 2 of 146

# REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	June 17, 2016	Valid	Original Report

# **TABLE OF CONTENTS**

TABLE OF CONTENTS	3
1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	3
2.3 TEST METHODOLOGY	3
2.4 TEST FACILITY	3
2.5 MEASUREMENT INSTRUMENTS	3
2.6 SPECIAL ACCESSORIES	10
2.7 EQUIPMENT MODIFICATIONS	10
3. SYSTEM TEST CONFIGURATION	11
3.1 EUT CONFIGURATION	11
3.2 EUT EXERCISE	11
3.3 GENERAL TECHNICAL REQUIREMENTS	11
3.4 CONFIGURATION OF EUT SYSTEM	12
4. SUMMARY OF TEST RESULTS	13
5. DESCRIPTION OF TEST MODES	13
6. OUTPUT POWER	14
6.1 CONDUCTED OUTPUT POWER	14
6.2 RADIATED OUTPUT POWER	21
6.3. PEAK-TO-AVERAGE RATIO	25
7. OCCUPIED BANDWIDTH	27
7.1 MEASUREMENT METHOD	27
7.2 PROVISIONS APPLICABLE	27
7.3 MEASUREMENT RESULT	28
APPENDIX A:BANDWIDTH	28
8. BAND EDGE	48
8.1 MEASUREMENT METHOD	48

8.2 PROVISIONS APPLICABLE	48
8.3 MEASUREMENT RESULT	49
APPENDIX B: BAND EDGES COMPLIANCE	49
9. SPURIOUS EMISSION	61
9.1 CONDUCTED SPURIOUS EMISSION	61
APPENDIX C: SPURIOUS EMISSION AT ANTENNA TERMINAL	63
9.2 RADIATED SPURIOUS EMISSION	118
10. MAINS CONDUCTED EMISSION	122
10.1 MEASUREMENT METHOD	122
10.2 PROVISIONS APPLICABLE	122
10.3 MEASUREMENT RESULT	123
11. FREQUENCY STABILITY	125
11.1 MEASUREMENT METHOD	125
11.2 PROVISIONS APPLICABLE	125
11.3 MEASUREMENT RESULT	
Appendix D:Frequency Stability	127
PHOTOGRAPHS OF TEST SETUP	138
PHOTOGRAPHS OF FUT	140

Page 5 of 146

# 1. VERIFICATION OF COMPLIANCE

Applicant	PHONEPAC S.A
Address	Ciudadela Nueva Kennedy Calle 3rd and Av. Olimpo, Guayaquil, Ecuador.
Manufacturer UTCOM TECHNOLOGY CO., LIMITED	
Address C1105-1107, Tiley Central Plaza, No 3 Haide Road, Nanshan District	
Product Designation	3G Smart Phone
Brand Name	SIMTEL
Test Model	S10
Date of test	June 08, 2016 to June 16, 2016
Deviation	None
Condition of Test Sample	Normal

# We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA- 603-D-2010. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By	Dota Zhang	
	Dota Zhang(Zhang Jianfeng)	June 17, 2016
Reviewed By	Bore xie	
	Bart Xie(Xie Xiaobin)	June 17, 2016
Approved By	gelja slang	
	Solger Zhang(Zhang Hongyi) Authorized Officer	June 17, 2016

Page 6 of 146

# 2. GENERAL INFORMATION

# 2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	3G Smart Phone			
Hardware version:	FS259-MB-V0.3			
Software version:	5.1			
	☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐			
Frequency Bands:	☑GSM 900 ☑DCS 1800 (Non-U.S. Bands) ☑UMTS FDD Band II ☑UMTS FDD Band V (U.S. Bands)			
	UMTS FDD Band I UMTS FDD Band VIII (Non-U.S. Bands)			
Antenna:	PIFA Antenna			
	GSM / GPRS : GMSK			
Type of Modulation	EDGE : GMSK/8PSK			
	HSDPA:QPSK/16QAM; HSUPA:BPSK; WCDMA:QPSK			
Antenna gain:	-1.0dBi			
Power Supply:	DC 3.7V by battery			
Battery parameter:	DC3.7V/2000mAh			
Adapter Input:	AC100-240V, 50-60Hz, 0.15A			
Adapter Output:	DC5V, 700mAh			
Dual Card:	WCDMA / GSM Card Slot			
Duai Caiu.	GSM Card Slot			
GPRS Class	12			
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Normal: DC3.7 V)			
Extreme Temp. Tolerance	-10℃ to +50℃			
*** Note: The High Voltage DC4.2V and Low Voltage DC3.4V were declared by manufacturer, The				
EUT couldn't be operating normally with higher or lower voltage.				
Other functions have been performed according to verification procedure except for Bluetooth and				

MS function. Card 1 can't transmit with Card 2 simultaneously.

<sup>\*\*\*</sup> Note: 1.The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, only these modes were used for all tests.

<sup>2.</sup> We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst case as a representative.

Page 7 of 146

# **WCDMA Card Slot:**

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average	
	(dBm)	(dBm)	Burst Power (dBm)	
GSM 850	30.44	32.73	31.85	
PCS 1900	27.48	29.75	28.61	
UMTS BAND II	22.02	23.65	22.14	
UMTS BAND V	22.08	23.48	21.74	

# **GSM Card Slot:**

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average	
	(dBm)	(dBm)	Burst Power (dBm)	
GSM 850	30.23	31.87	31.33	
PCS 1900	27.14	29.28	28.20	

Report No.: AGC06426160601FE02 Page 8 of 146

# 2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AICV-S10**, filing to comply with the FCC Part 22H&24E requirements.

# 2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-D-2010, and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

KDB 971168 D01 Power Meas License Digital Systems v02r02

# 2.4 TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.		
Location  Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,			
FCC Registration No. 371540			
Description	The test site is constructed and calibrated to meet the FCC requirements in documents of ANSI/TIA-603-D-2010.		

## 2.5 MEASUREMENT INSTRUMENTS

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9168	D69250	Mar 1, 2016	Feb 28, 2017
Trilog Broadband Antenna(substituted antenna) (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 5, 2016	June 4, 2017
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 5, 2016	June 4, 2017
Spectrum analyzer	Agilent	E4407B	MY46185649	June 5, 2016	June 4, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Horn Antenna(substituted antenna) (1G-18GHz)	ETS LINDGREN	3117	00034609	Mar 1, 2016	Feb 28, 2017

Report No.: AGC06426160601FE02 Page 9 of 146

Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 5, 2016	June 4, 2017
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 5,2016	June 4,2017
COMMUNICATION TESTER	AGILENT	8960	GB46490550	July 25, 2015	July 24, 2016
RF attenuator	N/A	RFA20db	68	N/A	N/A
Signal Generator	AGILENT	N5182A	MY50140530	Oct 16,2015	Oct 15,2016
Signal Generator(substituted equipment)	AGILENT	E8257D	MY45141029	Oct 16,2015	Oct 15,2016

Page 10 of 146

# 2.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

# 2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 11 of 146

# 3. SYSTEM TEST CONFIGURATION

# 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

# 3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

# 3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item	FCC Rules	
4	Conducted output power		2.1046/22.913(a) (2) / 24.232
1	Output Power	Radiated output power	(c)
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)
3	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
4	Mains Conducted Emi	Mains Conducted Emission	
5	Frequency Stability		2.1055/22.355 /24.235
6	Occupied Bandwidth		2.1049 (h)(i)
7	Emission Bandwidth		22.917(a)/24.238(a)
8	Band Edge		22.917(a)/24.238(a)

Page 12 of 146

# 3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	3G Smart Phone	S10	FCC ID:2AICV-S10	EUT
2	Battery	S10	3.7V 2000mAh	Accessory
3	Adapter	S10	AC:100-240V 50/60Hz, 0.15A DC: 5V/ 700mAh	Accessory
4	USB Cable	S10	N/A	Accessory
5	Laptop	Dell	INSPIRON	A.E

<sup>\*\*\*</sup>Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

Page 13 of 146

# 4. SUMMARY OF TEST RESULTS

Item Number	Item Des	scription	FCC Rules	Result	
		Conducted			
1	Output Dower	Output Power	2.1046/22.913(a) (2) /	Pass	
	Output Power	Radiated	24.232 (c)	Pass	
		Output Power			
0	Peak-to-Average	Peak-to-Average	24.222(4)	Door	
2	Ratio	Ratio	24.232(d)	Pass	
	Spurious Emission	Conducted		Pass	
3		Spurious Emission	2.1051 / 22.917 / 24.238		
3		Radiated	2.1051 / 22.917 / 24.230		
		Spurious Emission			
4	Mains Conducted Em	ission	15.107 / 15.207	Pass	
5	Fraguanay Stability		2.1055/22.355	Pass	
5	Frequency Stability		/24.235	Pass	
6	Occupied Bandwidth		2.1049 (h)(i)	Pass	
7	Emission Bandwidth		22.917(a)/24.238(a)	Pass	
8	Band Edge		22.917(a)/24.238(a)	Pass	

## 5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

- \*\*\*Note: 1.GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, mode have been tested during the test.
  - 2. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions
  - 3. All antenna port conducted emissions testing was performed on a test bench with the antenna Port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

Report No.: AGC06426160601FE02 Page 14 of 146

# **6. OUTPUT POWER**

## **6.1 CONDUCTED OUTPUT POWER**

## **6.1.1 MEASUREMENT METHOD**

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS1900, WCDMA/HSPA band II, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

## **6.1.2 MEASUREMENT RESULT**

	Conducted Output Power Limits for GSM850/EDGE band					
Mode	Nominal Peak Power	Tolerance(dB)				
GSM	33 dBm (2W)	- 2				
EDGE	27 dBm(0.5W)	±2				
	Conducted Output Power Limits for PCS1900/EDGE band					
Mode	Nominal Peak Power	Tolerance(dB)				
GSM	30 dBm (1W)	- 2				
EDGE	26 dBm (0.4W)	±2				
	Conducted Output Power Limits for UMTS	band II				
Mode	Nominal Peak Power	Tolerance(dB)				
WCDMA	24 dBm (0.25W)	- 2				
	Conducted Output Power Limits for UMTS band V					
Mode	Nominal Peak Power	Tolerance(dB)				
WCDMA	24 dBm (0.25W)	- 2				

Report No.: AGC06426160601FE02 Page 15 of 146

# **GSM 850:**

Mode	Frequency	Reference	Peak	Tolerance	Avg.Burst	Duty cycle	Frame
lviode	(MHz)	Power	Power		Power	Factor(dB)	Power(dBm)
	824.2	33	32.73	-0.27	31.85	-9	22.85
GSM850	836.6	33	32.60	-1.41	31.44	-9	22.44
	848.8	33	32.38	-1.19	31.27	-9	22.27
CDDC050	824.2	33	31.41	-1.59	30.53	-9	21.53
GPRS850	836.6	33	31.57	-1.43	30.41	-9	21.41
(1 Slot)	848.8	33	31.65	-1.35	30.44	-9	21.44
CDDC050	824.2	30	29.42	-0.58	28.36	-6	22.36
GPRS850	836.6	30	29.18	-0.82	28.39	-6	22.39
(2 Slot)	848.8	30	29.63	-0.37	28.21	-6	22.21
CDDC050	824.2	28.23	27.54	-0.69	26.37	-4.26	22.11
GPRS850	836.6	28.23	27.28	-0.95	26.21	-4.26	21.95
(3 Slot)	848.8	28.23	27.47	-0.76	26.48	-4.26	22.22
CDDCoro	824.2	27	26.25	-0.75	25.43	-3	22.43
GPRS850	836.6	27	26.29	-0.71	25.36	-3	22.36
(4 Slot)	848.8	27	26.32	-0.68	25.32	-3	22.32

Mode	Channel	Frequency	Peak Power	Avg.Burst Power
Wiode		(MHz)	(dBm)	(dBm)
FDCF	128	824.2	26.44	25.69
EDGE (1 Slot)	189	836.6	26.30	25.63
(1 3101)	251	848.8	26.24	25.46
EDCE	128	824.2	23.12	23.82
EDGE	189	836.6	23.19	23.71
(2 Slot)	251	848.8	23.67	23.41
EDGE	128	824.2	22.12	22.52
(3 Slot)	189	836.6	22.73	22.59
(3 3101)	251	848.8	22.48	22.26
EDGE	128	824.2	21.65	21.29
	189	836.6	21.35	21.44
(4 Slot)	251	848.8	21.28	21.38

Report No.: AGC06426160601FE02 Page 16 of 146

# PCS 1900:

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
	1850.2	30	29.75	-0.25	28.61	-9	19.61
GSM1900	1880	30	29.32	-0.68	28.36	-9	19.36
	1909.8	30	29.58	-0.42	28.23	-9	19.23
CDDC1000	1850.2	30	28.44	-1.56	27.59	-9	18.59
GPRS1900	1880	30	28.13	-1.87	27.41	-9	18.41
(1 Slot)	1909.8	30	28.46	-1.54	27.63	-9	18.63
CDDC1000	1850.2	27	26.42	-0.58	25.58	-6	19.58
GPRS1900	1880	27	26.18	-0.82	25.24	-6	19.24
(2 Slot)	1909.8	27	26.73	-0.27	25.26	-6	19.26
GPRS1900	1850.2	25.23	24.41	-0.82	23.34	-4.26	19.08
	1880	25.23	24.63	-0.6	23.67	-4.26	19.41
(3 Slot)	1909.8	25.23	24.58	-0.65	23.15	-4.26	18.89
00004000	1850.2	24	23.64	-0.36	22.86	-3	19.86
GPRS1900	1880	24	23.57	-0.43	22.52	-3	19.52
(4 Slot)	1909.8	24	23.23	-0.77	22.43	-3	19.43

Mode	Channel	Frequency	Peak Power	Avg.Burst Power
		(MHz)	(dBm)	(dBm)
EDGE	512	1850.2	25.92	25.41
(1 Slot)	661	1880	25.63	25.30
(1 3101)	810	1909.8	25.74	25.13
EDCE	512	1850.2	23.43	22.42
EDGE (2 Slot)	661	1880	23.49	23.58
	810	1909.8	22.82	22.62
EDGE	512	1850.2	23.46	23.31
_	661	1880	23.28	23.37
(3 Slot)	810	1909.8	22.24	22.25
FDOF	512	1850.2	20.67	20.26
EDGE (4 Slot)	661	1880	20.21	20.47
(4 3101)	810	1909.8	20.38	20.38

Report No.: AGC06426160601FE02 Page 17 of 146

# **UMTS BAND II**

Mode	Frequency	Reference	Peak Power	Tolerance	Avg.Burst
	(MHz)	power	00.05	0.05	Power
WCDMA 1900	1852.6	24	23.65	-0.35	22.14
RMC	1880	24	23.43	-0.57	21.95
	1907.4	24	23.52	-0.48	22.07
WCDMA 1900	1852.6	24	23.29	-0.71	21.46
AMR	1880	24	23.25	-0.75	21.82
7 uvii C	1907.4	24	23.41	-0.59	21.43
HSDPA -	1852.6	24	22.23	-1.77	20.68
Subtest 1	1880	24	22.18	-1.82	20.27
Sublest 1	1907.4	24	22.06	-1.94	20.54
HSDPA	1852.6	24	22.14	-1.86	20.29
	1880	24	22.38	-1.62	20.34
Subtest 2	1907.4	24	22.01	-1.99	20.26
LIODDA	1852.6	24	22.13	-1.87	20.58
HSDPA Subtest 3	1880	24	22.19	-1.81	20.35
	1907.4	24	22.36	-1.64	20.21
	1852.6	24	22.32	-1.68	20.39
HSDPA	1880	24	22.24	-1.76	20.28
Subtest 4	1907.4	24	22.16	-1.84	20.52
1101154	1852.6	24	22.17	-1.83	20.61
HSUPA	1880	24	22.16	-1.84	20.31
Subtest 1	1907.4	24	22.57	-1.43	20.16
	1852.6	24	22.55	-1.45	20.18
HSUPA	1880	24	22.12	-1.88	20.22
Subtest 2	1907.4	24	22.69	-1.31	20.27
	1852.6	24	22.25	-1.75	20.21
HSUPA	1880	24	22.08	-1.92	20.39
Subtest 3	1907.4	24	22.43	-1.57	20.05
1101123	1852.6	24	22.41	-1.59	20.17
HSUPA	1880	24	22.37	-1.63	20.65
Subtest 4	1907.4	24	22.21	-1.79	20.42
	1852.6	24	22.06	-1.94	20.83
HSUPA	1880	24	22.14	-1.86	20.47
Subtest 5	1907.4	24	22.29	-1.71	20.22

Report No.: AGC06426160601FE02 Page 18 of 146

# **UMTS BAND V**

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
	826.6	24	23.48	-0.52	21.74
WCDMA 850 RMC	836.4	24	23.21	-0.79	21.51
	846.4	24	23.26	-0.74	21.33
	826.6	24	23.14	-0.86	21.61
WCDMA 850	836.4	24	23.02	-0.98	21.43
AMR -	846.4	24	23.08	-0.92	21.35
	826.6	24	22.73	-1.27	20.14
HSDPA	836.4	24	22.71	-1.29	20.29
Subtest 1	846.4	24	22.54	-1.46	20.24
	826.6	24	22.59	-1.41	20.13
HSDPA	836.4	24	22.15	-1.85	20.28
Subtest 2	846.4	24	22.13	-1.87	20.35
	826.6	24	22.16	-1.84	20.31
HSDPA	836.4	24	22.18	-1.82	20.17
Subtest 3	846.4	24	22.27	-1.73	20.12
	826.6	24	22.68	-1.32	20.12
HSDPA	836.4	24	22.53	-1.47	20.74
Subtest 4	846.4	24	22.51	-1.49	20.64
	826.6	24	22.42	-1.58	20.63
HSUPA Subtest 1	836.4	24	22.12	-1.88	20.52
Sublest I	846.4	24	22.18	-1.82	20.14
	826.6	24	22.13	-1.87	20.16
HSUPA Subtest 2	836.4	24	22.27	-1.73	20.21
Subtest 2	846.4	24	22.19	-1.81	20.76
	826.6	24	22.73	-1.27	20.15
HSUPA Subtest 3	836.4	24	22.62	-1.38	20.43
Sublest 3	846.4	24	22.57	-1.43	20.86
	826.6	24	22.44	-1.56	20.12
HSUPA Subtest 4	836.4	24	22.32	-1.68	20.48
3ubiesi 4	846.4	24	22.22	-1.78	20.63
	826.6	24	22.06	-1.94	20.37
HSUPA	836.4	24	22.17	-1.83	20.15
Subtest 5	846.4	24	22.43	-1.57	20.41

Report No.: AGC06426160601FE02 Page 19 of 146

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)		
For all combinations of ,DPDCH,DPCCH	0< CM<2 5	MAY(CM 4 O)		
HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5	MAX(CM-1,0)		
Note: CM=1 for $\beta_c/\beta_d=12/15$ , $\beta_{hs}/\beta_c=24/15$ . For all other combinations of DPDCH, DPCCH,				

Note: CM=1 for  $\beta_c/\beta_d$ =12/15,  $\beta_{hs}/\beta_c$ =24/15.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Report No.: AGC06426160601FE02 Page 20 of 146

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

Page 21 of 146

## **6.2 RADIATED OUTPUT POWER**

#### **6.2.1 MEASUREMENT METHOD**

The measurements procedures specified in ANSI/TIA-603-D-2010 were applied.

- 1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
- 2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 6. The EUT is then put into continuously transmitting mode at its maximum power level.
- 7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 9. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi...

#### 6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Report No.: AGC06426160601FE02 Page 22 of 146

Mode	Nominal Peak Power
GSM 850/EDGE	<=38.45 dBm (7W)
PCS 1900/EDGE	<=33 dBm (2W)
UMTS BAND II	<=33 dBm (2W)
UMTS BANDV	<=38.45 dBm (7W)

Report No.: AGC06426160601FE02 Page 23 of 146

# **6.2.3 MEASUREMENT RESULT**

	Radia	ted Power (ERP) for G	SM 850/EDGE 8	
		Result		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion
		(dBm)	Of Max. ERP	
	824.2	30.44	Horizontal	Pass
	836.6	30.12	Horizontal	Pass
CCMOEO	848.8	30.28	Horizontal	Pass
GSM850	824.2	29.63	Vertical	Pass
	836.6	28.74	Vertical	Pass
	848.8	28.52	Vertical	Pass
	824.2	25.13	Horizontal	Pass
	836.6	25.29	Horizontal	Pass
EDCE	848.8	25.51	Horizontal	Pass
EDGE	824.2	25.49	Vertical	Pass
	836.6	25.18	Vertical	Pass
	848.8	25.22	Vertical	Pass

Radiated Power (E.I.R.P) for PCS 1900/EDGE 8						
		Re				
Mode	Frequency	Max. Peak	Polarization	Conclusion		
		E.I.R.P.(dBm)	Of Max. E.I.R.P.			
	1850.2	27.48	Horizontal	Pass		
	1880.0	27.32	Horizontal	Pass		
GSM 1900	1909.8	27.23	Horizontal	Pass		
G3W 1900 -	1850.2	26.62	Vertical	Pass		
	1880.0	26.82	Vertical	Pass		
	1909.8	25.47	Vertical	Pass		
	1850.2	24.96	Horizontal	Pass		
	1880.0	24.58	Horizontal	Pass		
EDGE	1909.8	24.67	Horizontal	Pass		
EDGE -	1850.2	23.74	Vertical	Pass		
	1880.0	23.43	Vertical	Pass		
	1909.8	23.45	Vertical	Pass		

	Radiated Power (E.I.R.P) for UMTS band II						
		Result					
Mode	Frequency	Max. Peak E.I.R.P	Polarization				
		(dBm)	Of Max. E.I.R.P				
	1852.6	22.02	Horizontal	Pass			
	1880	21.87	Horizontal	Pass			
RMC	1907.4	21.92	Horizontal	Pass			
12.2kbps	1852.6	21.48	Vertical	Pass			
	1880	20.85	Vertical	Pass			
	1907.4	21.63	Vertical	Pass			

Radiated Power (ERP) for UMTS band V							
		Re					
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion			
		(dBm)	Of Max. E.I.R.P.				
	826.6	22.08	Horizontal	Pass			
	836.4	21.91	Horizontal	Pass			
RMC	846.4	21.85	Horizontal	Pass			
12.2kbps	826.6	20.66	Vertical	Pass			
	836.4	20.72	Vertical	Pass			
	846.4	21.25	Vertical	Pass			

Note: Above is the worst mode data.

Page 25 of 146

# 6.3. PEAK-TO-AVERAGE RATIO

#### **6.3.1 MEASUREMENT METHOD**

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR (dB) = PPk (dBm) - PAvg (dBm).

## **6.3.2 PROVISIONS APPLICABLE**

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

## **6.3.3 MEASUREMENT RESULT**

Modes	GSM850(GSM)		
Channel	128	190	251
Gildillici	(Low)	(Mid)	(High)
Frequency	824.2	836.6	848.8
(MHz)	024.2		
Peak-To-Average Ratio (dB)/GSM	0.88	1.16	1.11
Peak-To-Average Ratio (dB)/EDGE	0.75	0.67	0.78

Modes	PCS 1900 (GSM)			
Channel	512	661	810	
Gilainiei	(Low)	(Mid)	(High)	
Frequency	1850.2	1880	1909.8	
(MHz)	1000.2	1000		
Peak-To-Average Ratio (dB)/GSM	1.14	0.96	1.35	
Peak-To-Average Ratio (dB)/EDGE	0.51	0.33	0.61	

Report No.: AGC06426160601FE02 Page 26 of 146

Modes	UMTS BAND II		
Channel	9663	9800	9937
- Chaine	(Low)	(Mid)	(High)
Frequency (MHz)	1852.6	1880	1907.4
Peak-To-Average Ratio (dB)	1.51	1.48	1.45

Modes	UMTS BAND V			
Channel	4358	4407	4457	
Silarii oi	(Low)	(Mid)	(High)	
Frequency	826.6	836.6	846.4	
(MHz)	020.0	630.0	040.4	
Peak-To-Average Ratio (dB)	1.74	1.7	1.93	

Page 27 of 146

# 7. OCCUPIED BANDWIDTH

## 7.1 MEASUREMENT METHOD

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

2. RBW=1~5% of the expected OBW, VBW>=3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

## 7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

Report No.: AGC06426160601FE02 Page 28 of 146

# 7.3 MEASUREMENT RESULT

# **APPENDIX A:BANDWIDTH**

# **Test Results**

Test	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdict	
Band	Mode	Channel	(KHZ)	(KHZ)	VCIGIO	
		LCH	248.92	312.84	PASS	
GSM850	GSM	MCH	246.99	310.36	PASS	
		HCH	246.70	314.48	PASS	
		LCH	260.91	327.95	PASS	
	EDGE	MCH	257.56	326.81	PASS	
		HCH	248.27	319.85	PASS	

Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdict	
	Mode	Channel	(KHZ)	(KHZ)	verdict	
	GSM EDGE	LCH	247.26	314.50	PASS	
		MCH	245.82	316.22	PASS	
00144000		HCH	247.62	323.98	PASS	
GSM1900		LCH	254.14	321.72	PASS	
		MCH	252.93	325.42	PASS	
		HCH	260.91	328.35	PASS	

Report No.: AGC06426160601FE02 Page 29 of 146

# For GSM

Test Band=GSM850


## Test Mode=GSM

#### Test Channel=LCH




Report No.: AGC06426160601FE02 Page 30 of 146

## Test Channel=MCH

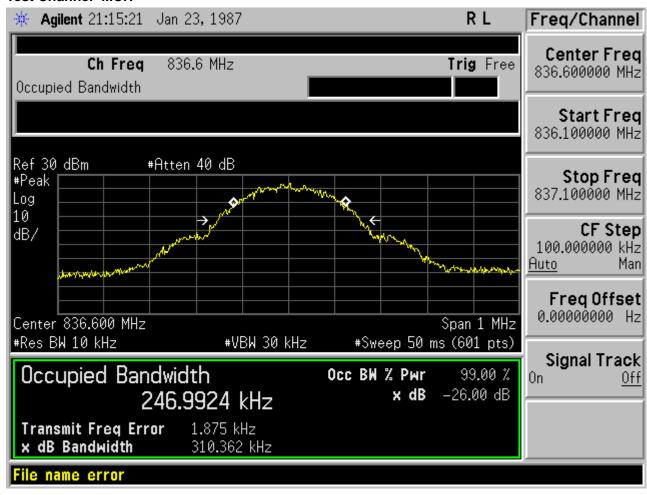

Page 31 of 146

## Test Channel=HCH

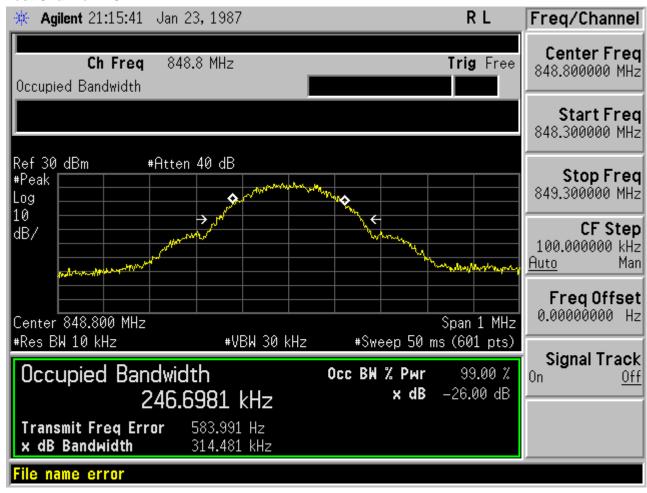


Report No.: AGC06426160601FE02 Page 32 of 146

## Test Band=GSM850


# Test Mode=EDGE

## Test Channel=LCH

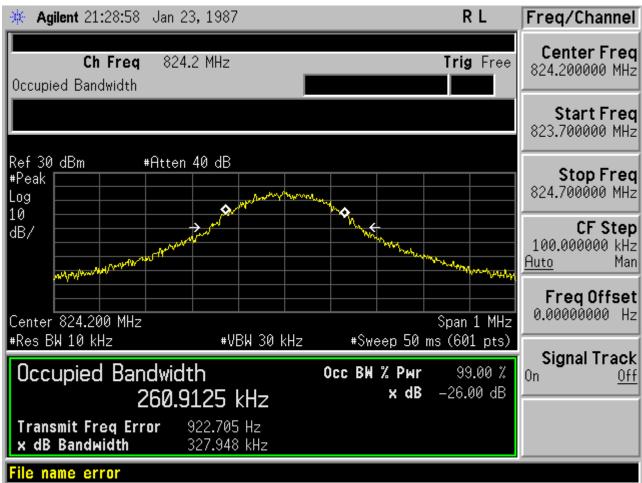


Report No.: AGC06426160601FE02 Page 33 of 146

## Test Channel=MCH

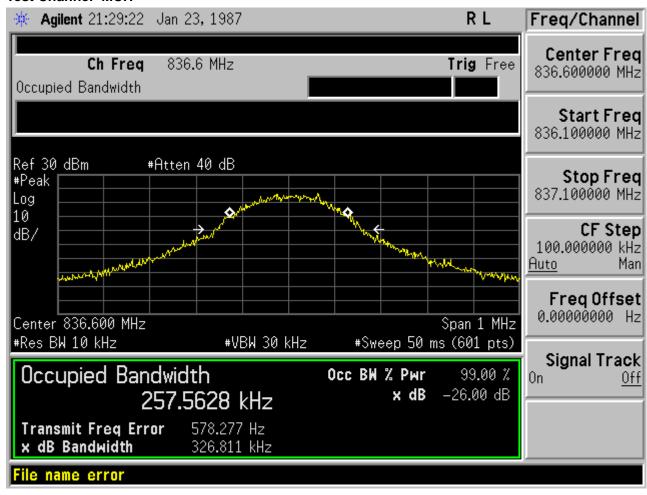

Page 34 of 146

## Test Channel=HCH

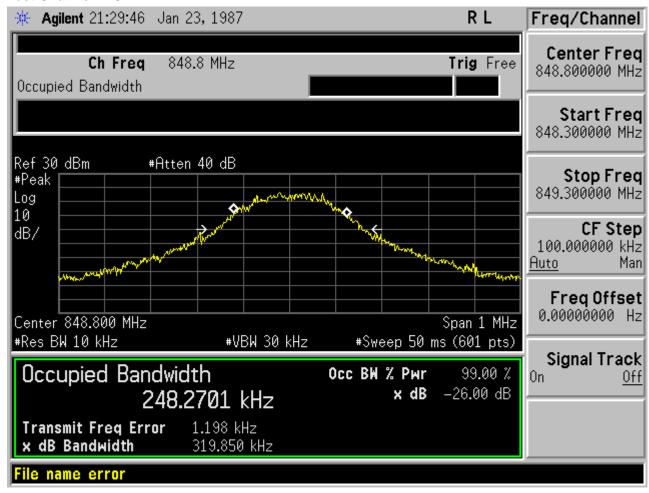

Report No.: AGC06426160601FE02 Page 35 of 146

## Test Band=GSM1900


## Test Mode=GSM

## Test Channel=LCH




Report No.: AGC06426160601FE02 Page 36 of 146

## Test Channel=MCH

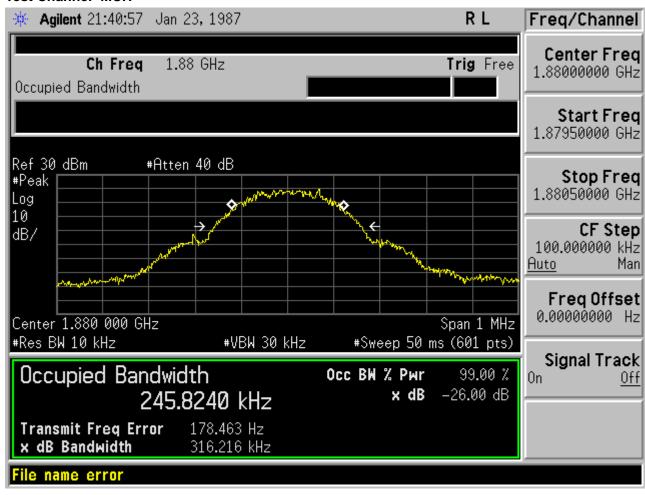


Page 37 of 146

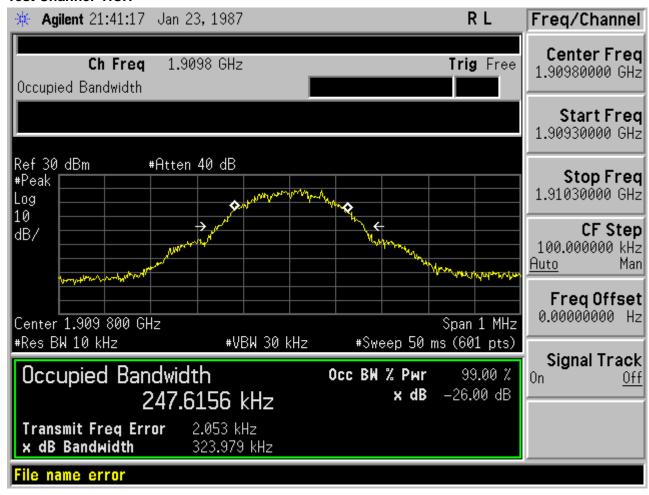


Report No.: AGC06426160601FE02 Page 38 of 146


### Test Mode=EDGE

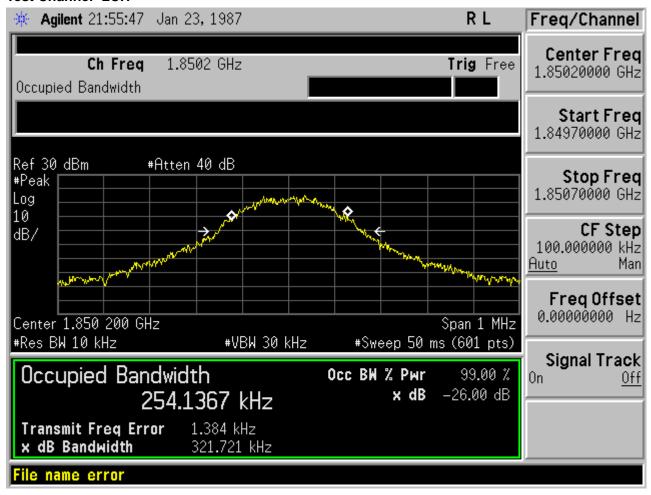

Report No.: AGC06426160601FE02 Page 39 of 146

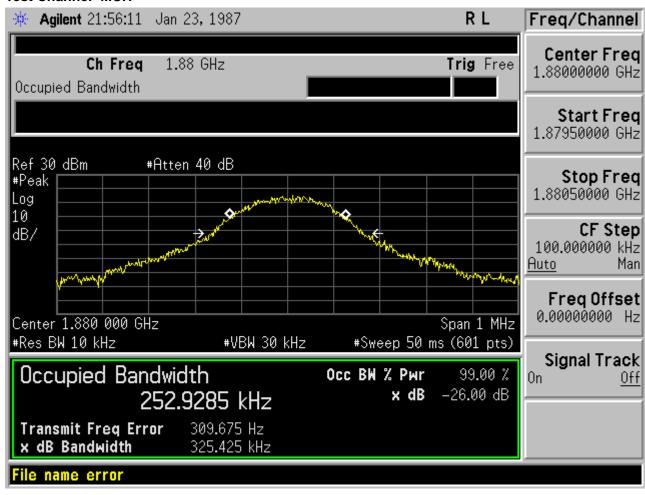

Page 40 of 146

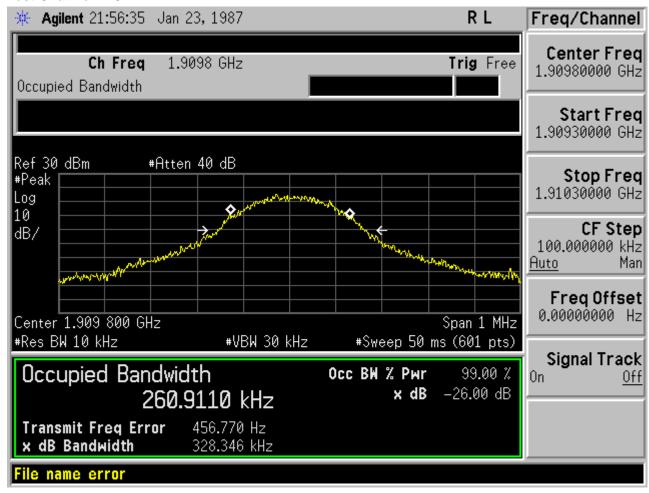

Report No.: AGC06426160601FE02 Page 41 of 146

Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdi
	Mode	Channel	(KHZ)	(KHZ)	ct
WCDMA8 50	UMTS	LCH	4093.0	4660	PASS
		MCH	4087.4	4667	PASS
		HCH	4077.6	4664	PASS


Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdi
	Mode	Channel	(KHZ)	(KHZ)	ct
WCDMA1 900	UMTS	LCH	4128.4	4747	PASS
		MCH	4097.7	4669	PASS
		HCH	4102.0	4716	PASS

Report No.: AGC06426160601FE02 Page 42 of 146


### For WCDMA

### Test Band=WCDMA850


### **Test Mode=UMTS**

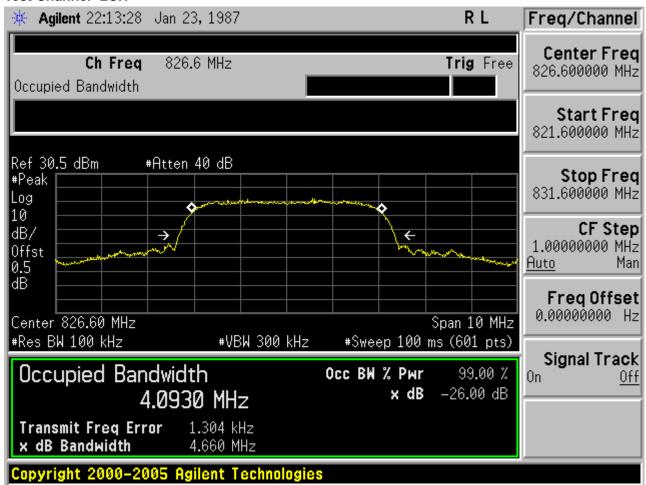

Page 43 of 146

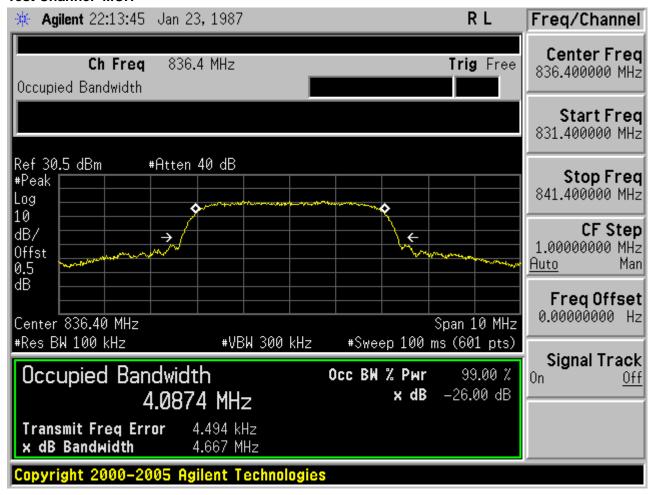


Page 44 of 146

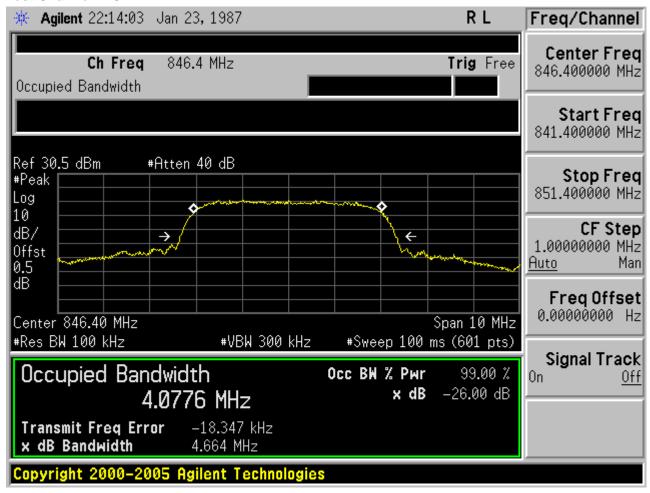


Report No.: AGC06426160601FE02 Page 45 of 146

### Test Band=WCDMA1900


### **Test Mode=UMTS**

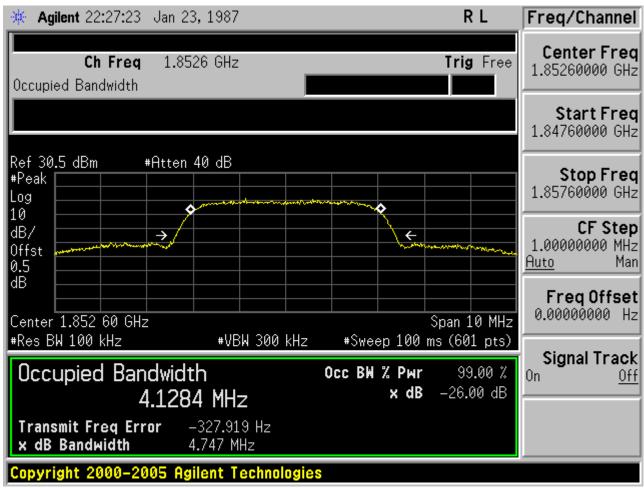

Page 46 of 146

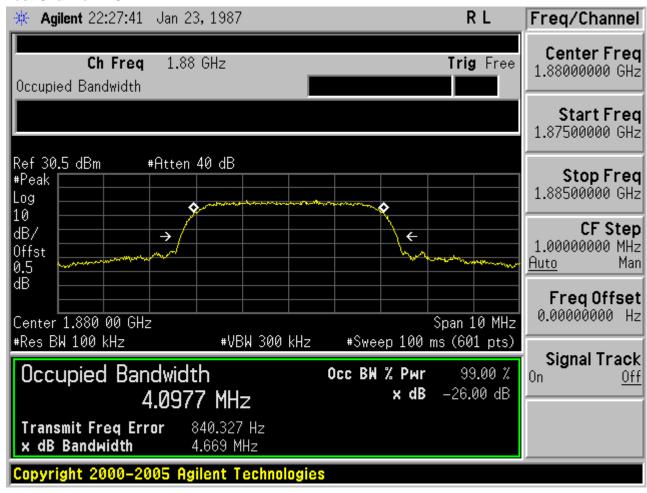

Page 47 of 146

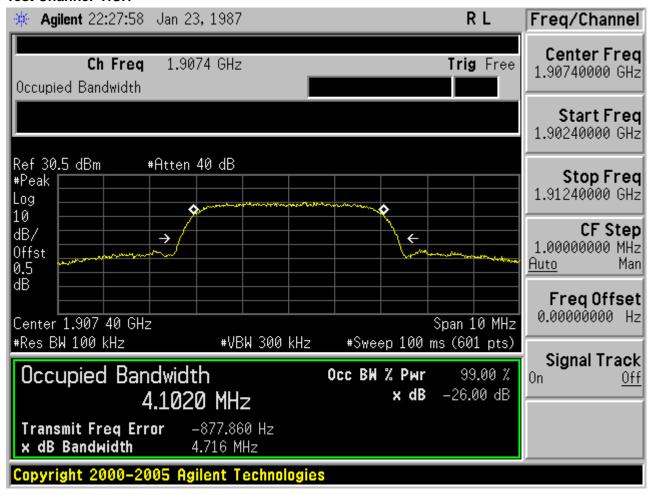

Page 48 of 146

### 8. BAND EDGE

#### **8.1 MEASUREMENT METHOD**

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration

- 2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
- 3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
- 4. Span was set large enough so as to capture all out of band emissions near the band edge.
- 5. RBW>1% of the emission bandwidth, VBW >=3 x RBW, Detector=RMS, Number of points>=2 x Span/RBW, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

### **8.2 PROVISIONS APPLICABLE**

As Specified in FCC rules of 22.917(a) and 24.238(a) and KDB 971168 V02r02

Report No.: AGC06426160601FE02 Page 49 of 146

### **8.3 MEASUREMENT RESULT**


### APPENDIX B: BAND EDGES COMPLIANCE

**Test Results** 


For GSM

Test Band=GSM850

Test Mode=GSM

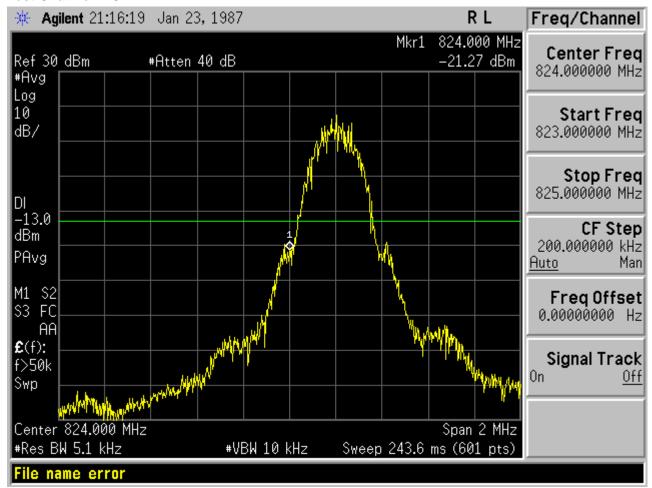


Report No.: AGC06426160601FE02 Page 50 of 146

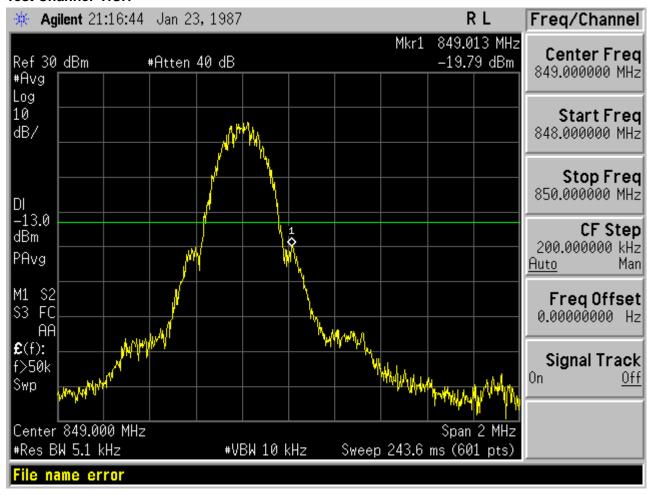


Report No.: AGC06426160601FE02 Page 51 of 146

# Test Mode=EDGE

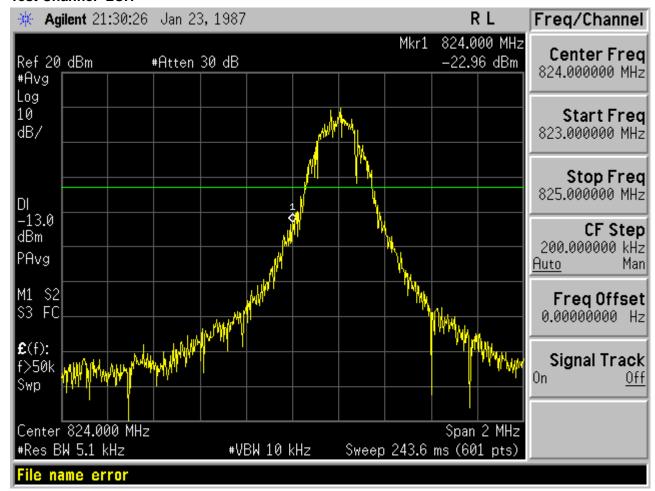


Page 52 of 146

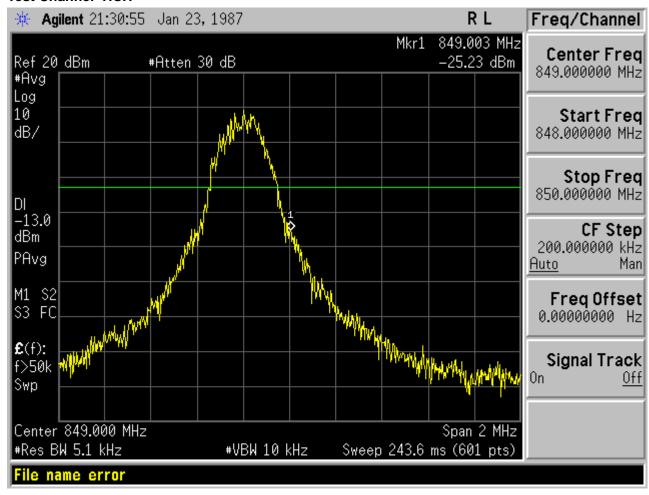


Report No.: AGC06426160601FE02 Page 53 of 146

### Test Band=GSM1900

# Test Mode=GSM

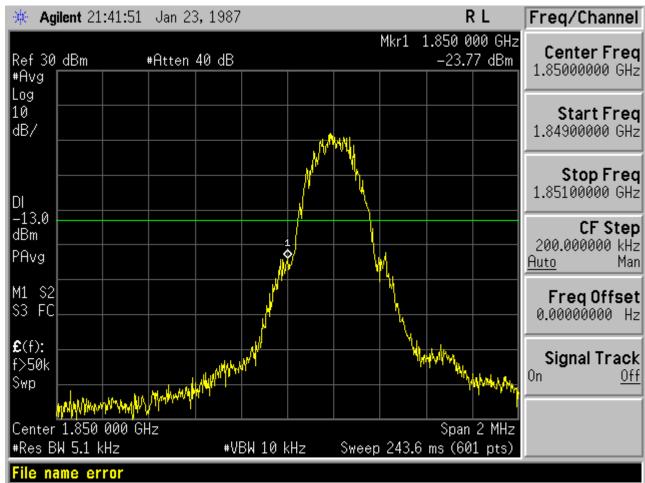


Page 54 of 146

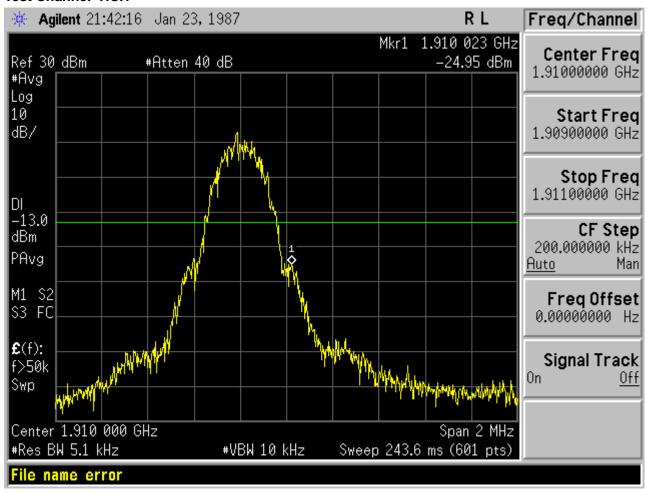


Page 55 of 146

### **Test Mode=EDGE**

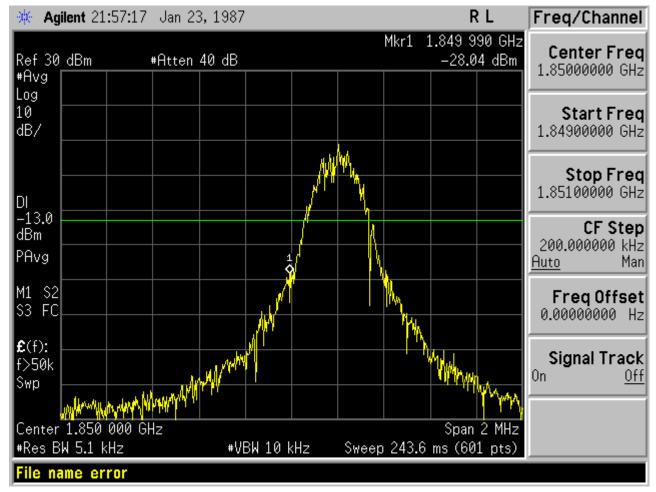

Report No.: AGC06426160601FE02 Page 56 of 146

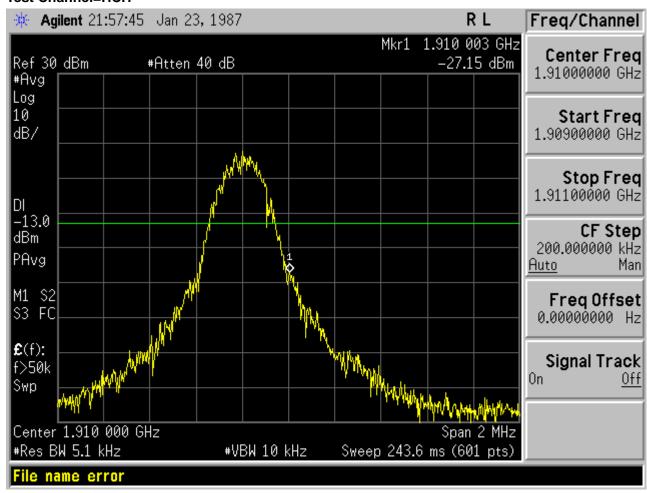


Page 57 of 146


# For WCDMA

Test Band=WCDMA850

Test Mode=UMTS

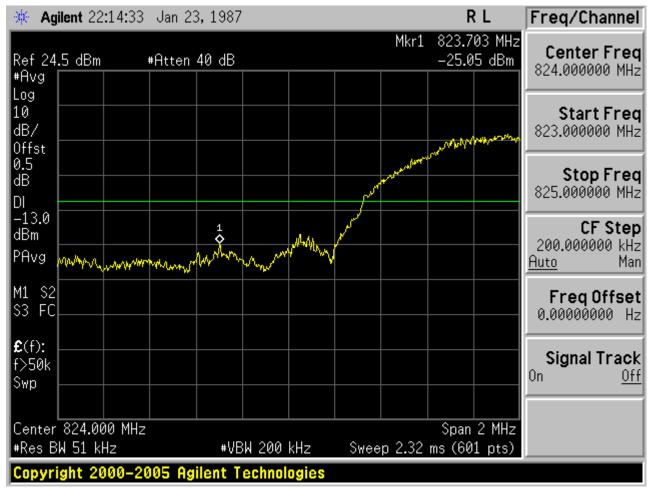


Page 58 of 146

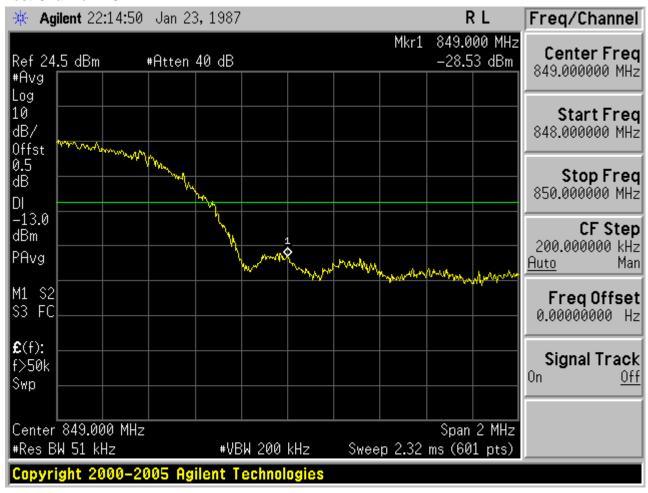


Report No.: AGC06426160601FE02 Page 59 of 146

### Test Band=WCDMA1900

# **Test Mode=UMTS**

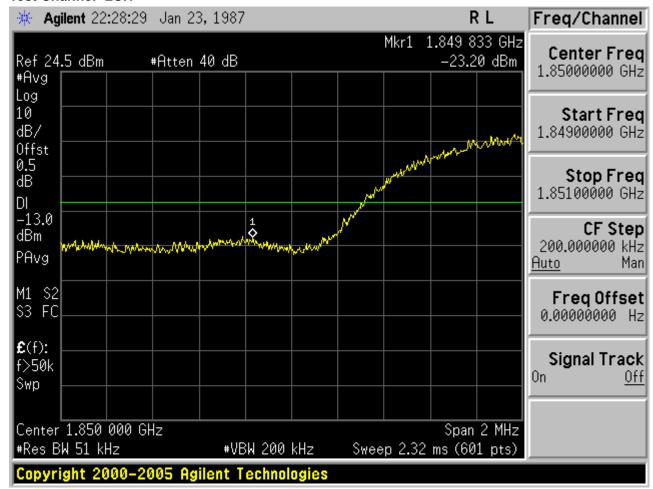

Report No.: AGC06426160601FE02 Page 60 of 146

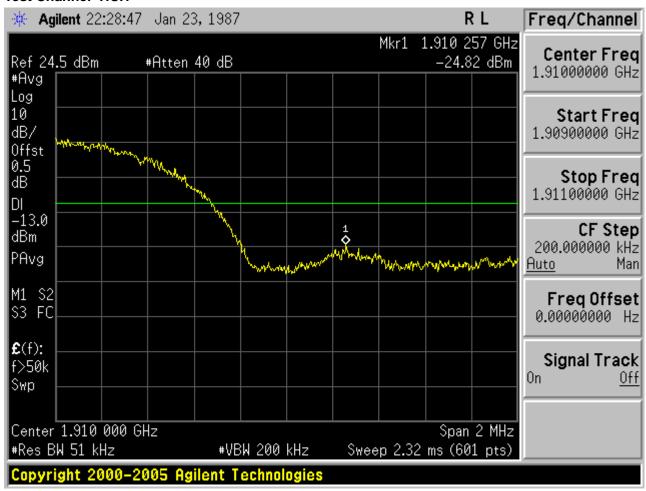

Page 61 of 146

### 9. SPURIOUS EMISSION

### 9.1 CONDUCTED SPURIOUS EMISSION

### 9.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1. The level of the carrier and the various conducted spurious and harmonic frequency is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration.
- 2. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM 850, data taken from 30 MHz to 9 GHz.
- 3. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850/EDGE 8		
Channel	Frequency (MHz)	
128	824.2	
190	836.6	
251	848.8	

Typical Channels for testing of PCS 1900/EDGE 8		
Channel	Frequency (MHz)	
512	1850.2	
661	1880.0	
810	1909.8	

Typical Channels for testing of UMTS band II		
Channel	Frequency (MHz)	
9663	1852.6	
9800	1880	
9937	1907.4	

Page 62 of 146

Typical Channels for testing of UMTS band V		
Channel	Frequency (MHz)	
4358	826.6	
4407	836.4	
4457	846.4	

# 9.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Page 63 of 146


### 9.1.3 MEASUREMENT RESULT

# APPENDIX C: SPURIOUS EMISSION AT ANTENNA TERMINAL


**Test Results** 

Test Band=GSM850


Test Mode=GSM

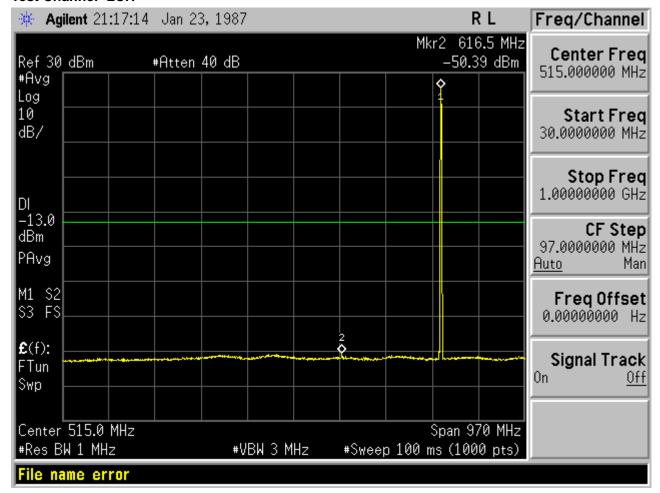


Page 64 of 146

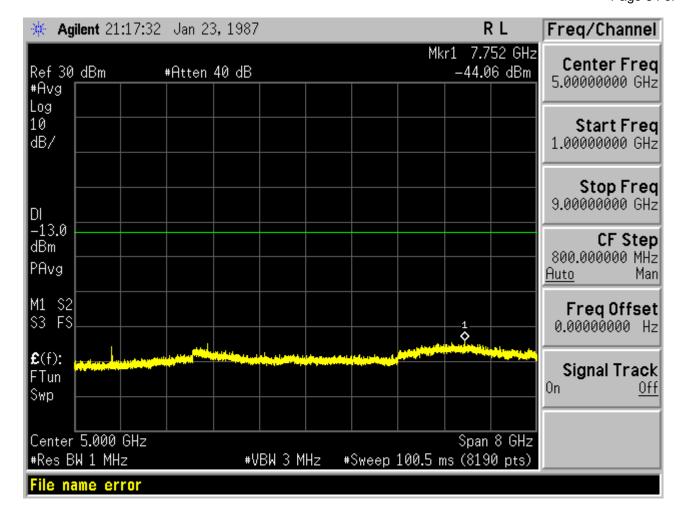



Page 65 of 146

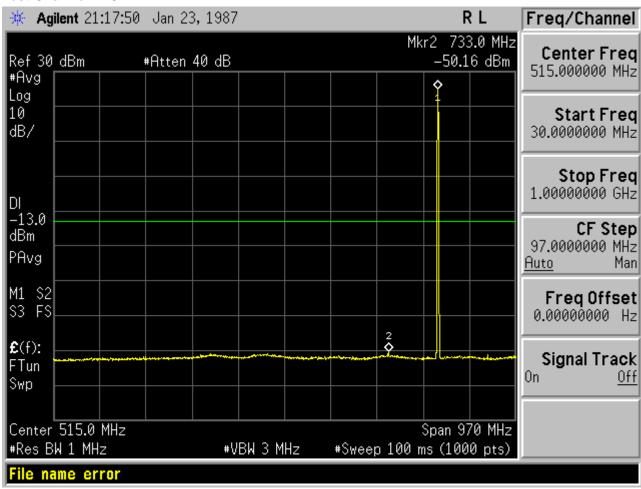

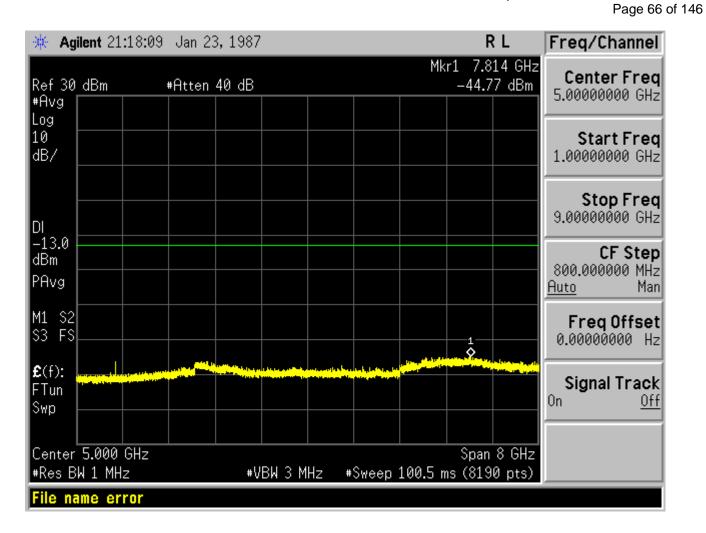


Page 67 of 146

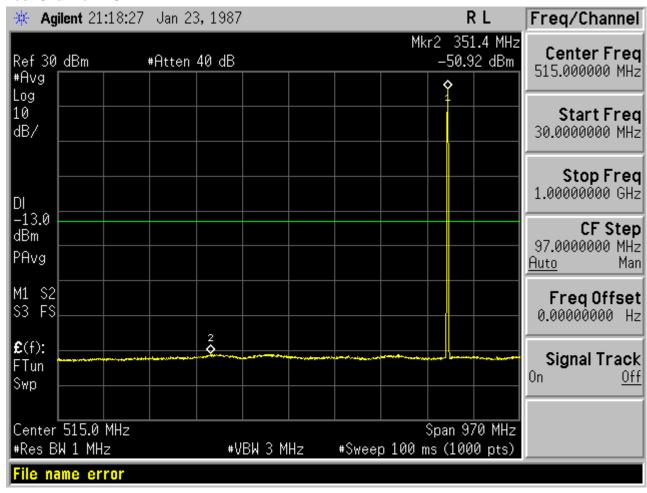


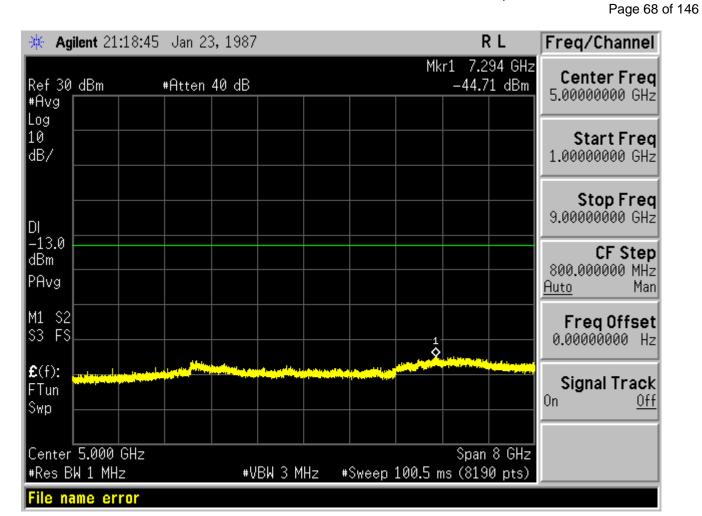


Report No.: AGC06426160601FE02 Page 69 of 146


# **Test Mode=EDGE**

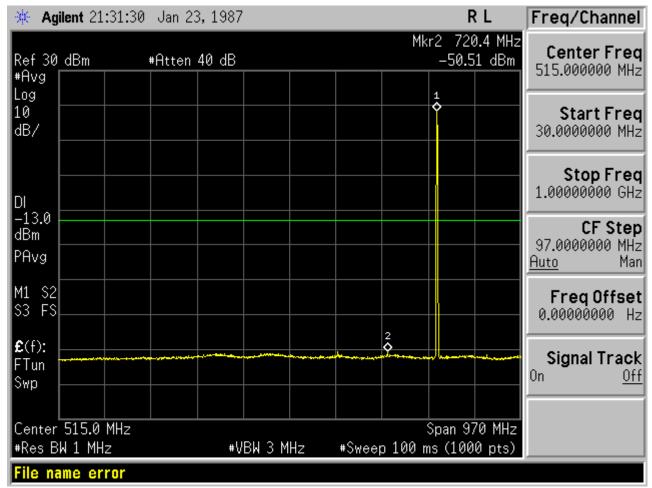

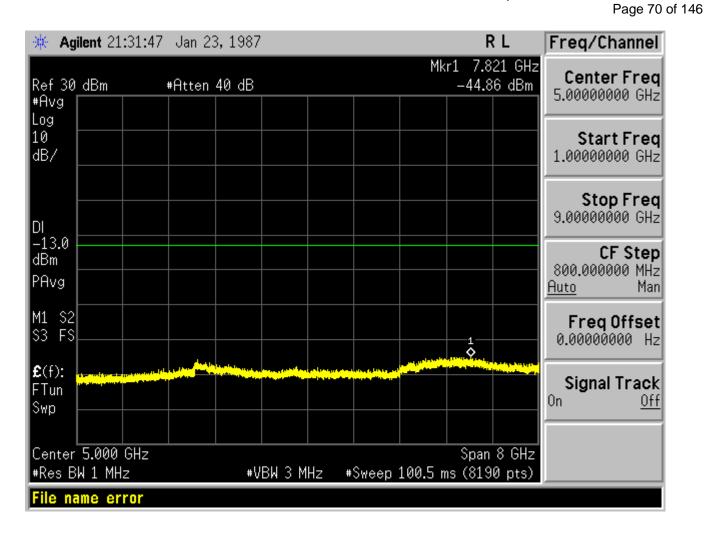


Page 71 of 146

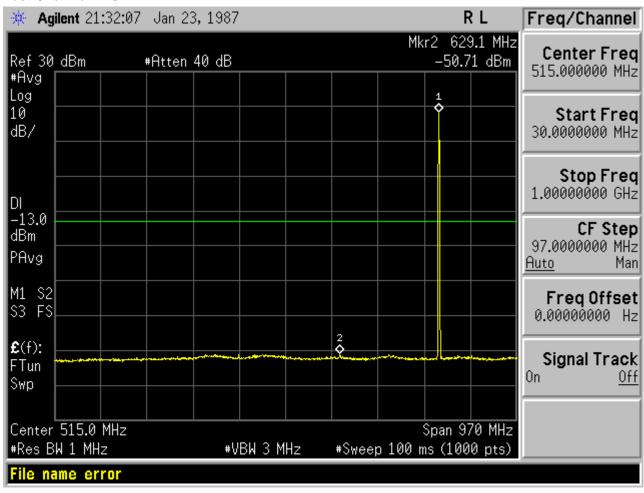

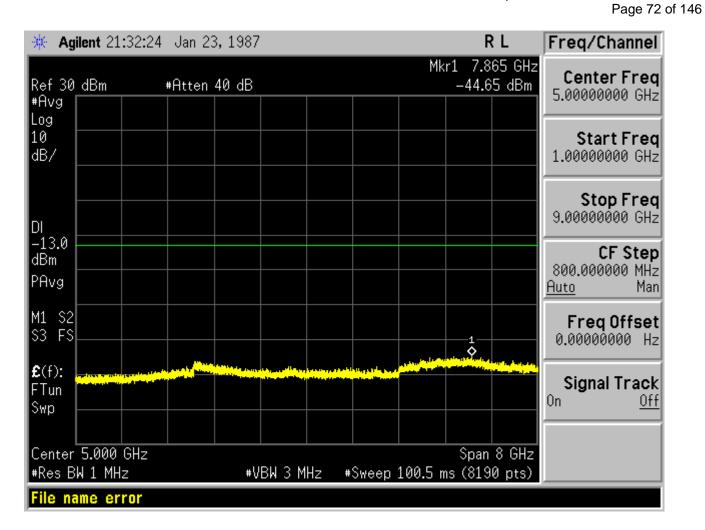


Page 73 of 146

#### Test Channel=HCH

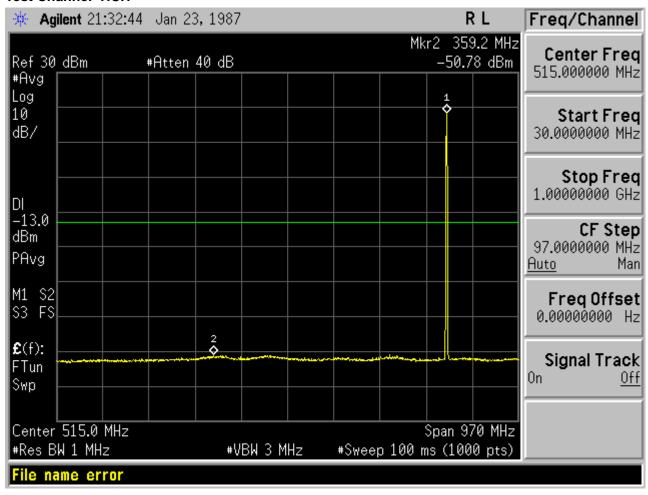

Page 74 of 146

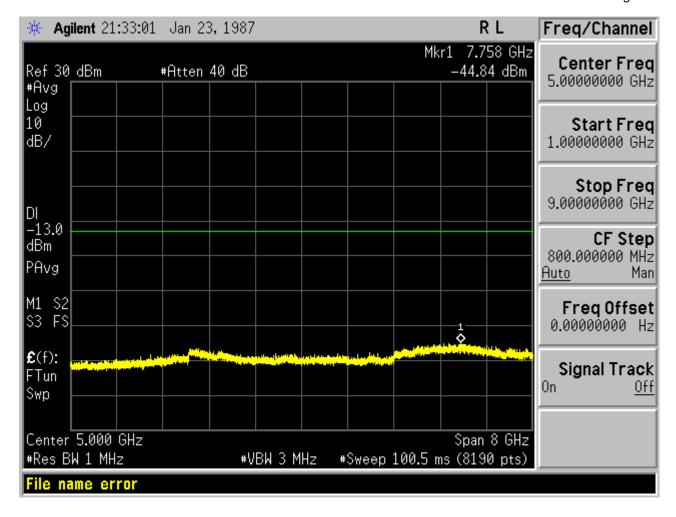



Report No.: AGC06426160601FE02 Page 75 of 146


#### Test Band=GSM1900


Test Mode=GSM

### Test Channel=LCH

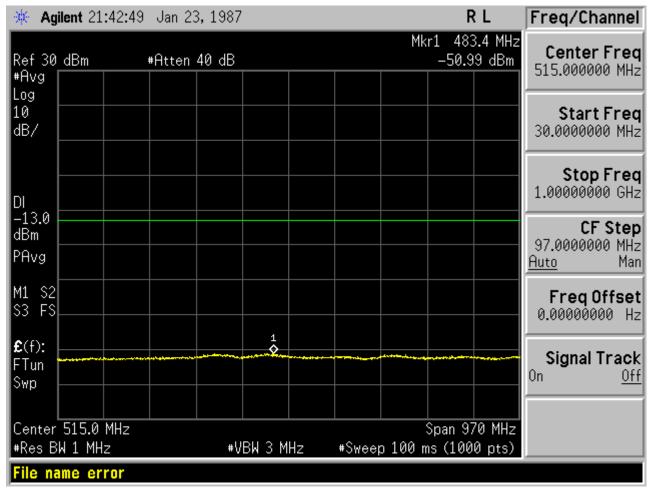

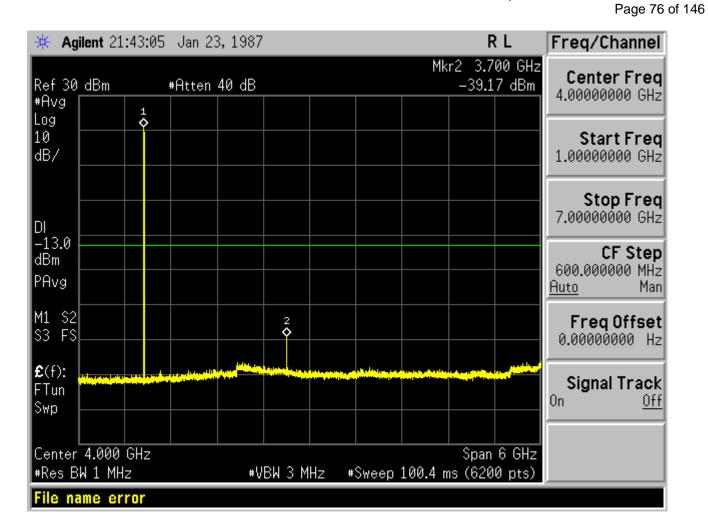


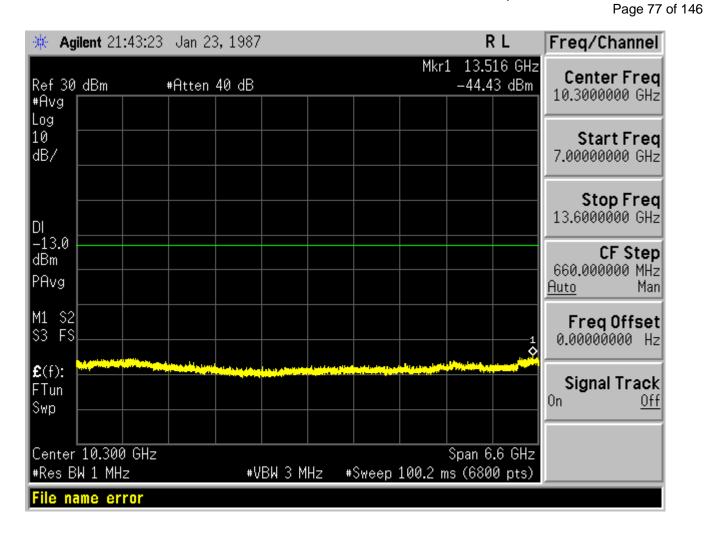

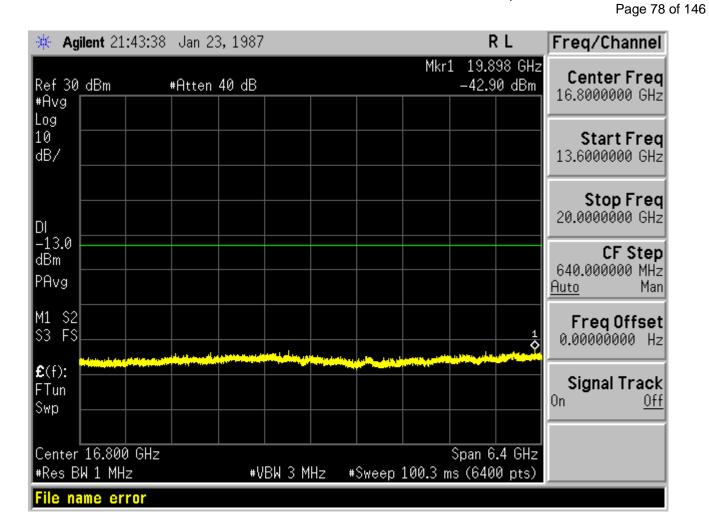


Page 79 of 146

## Test Channel=MCH

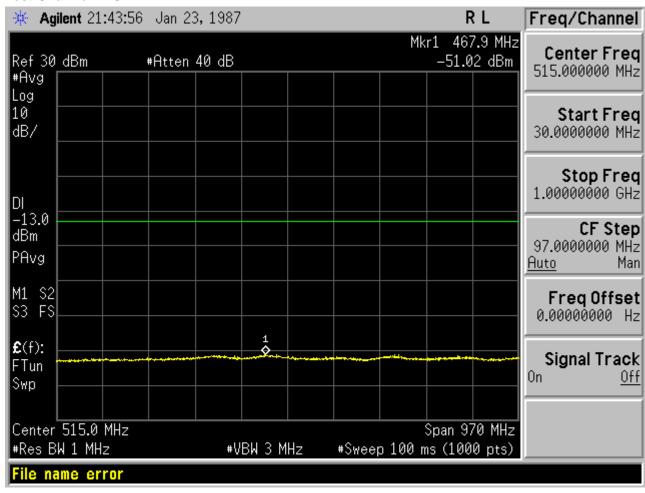



Report No.: AGC06426160601FE02 Page 80 of 146

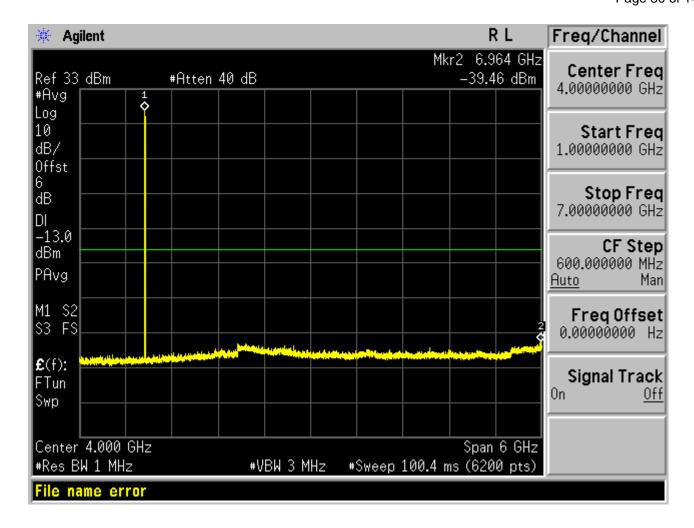

Report No.: AGC06426160601FE02 Page 81 of 146


Page 82 of 146

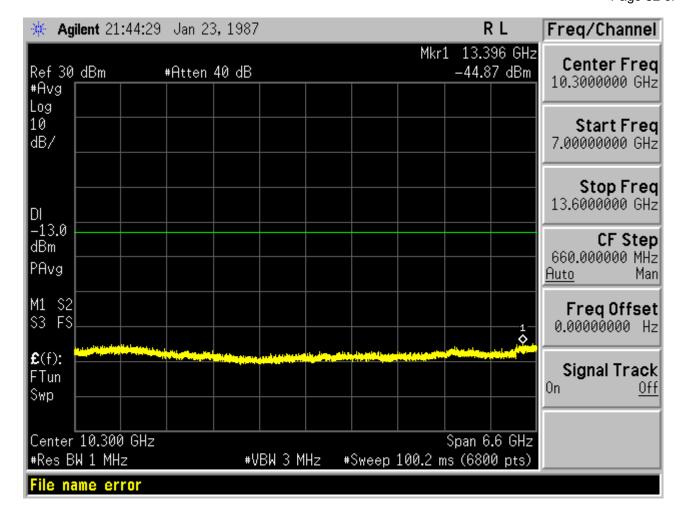


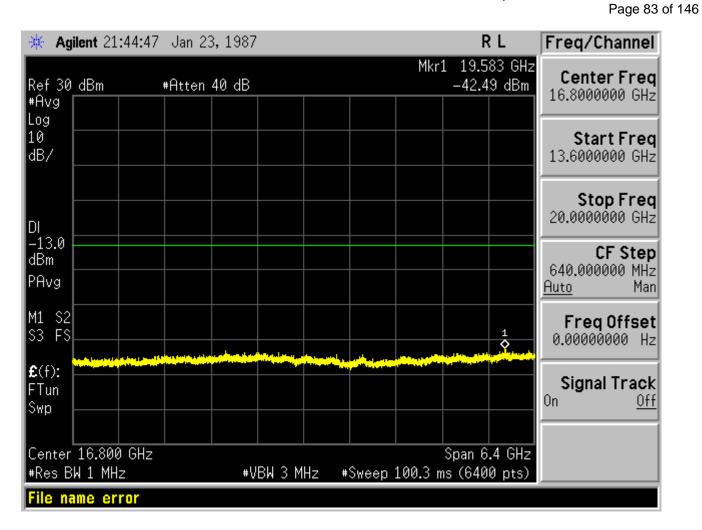


Page 84 of 146


#### Test Channel=HCH

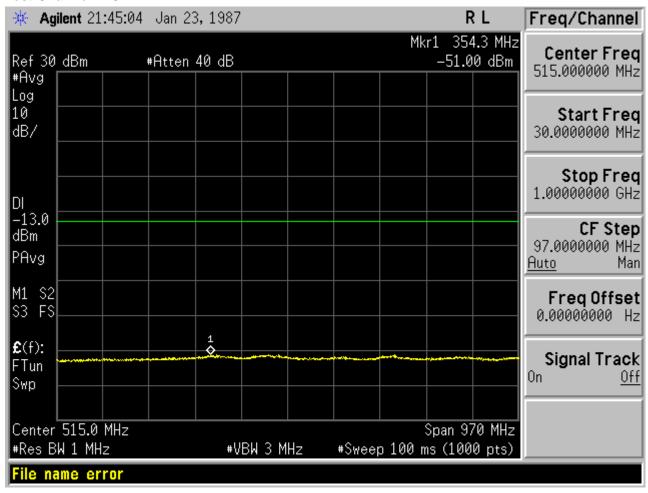

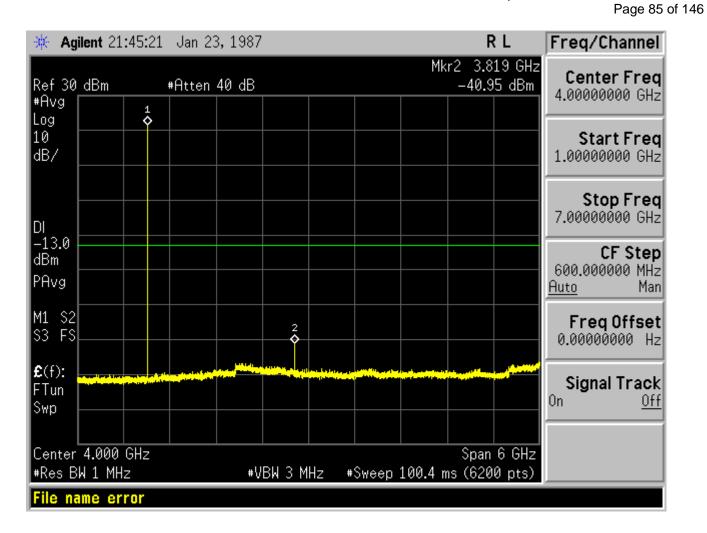

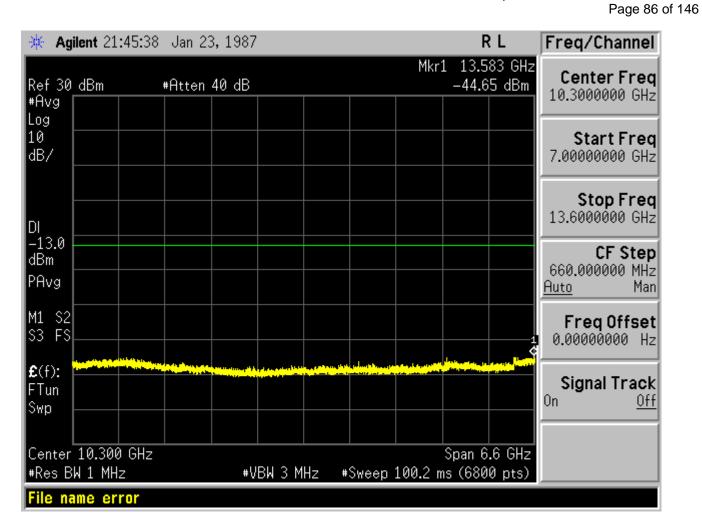


Page 87 of 146

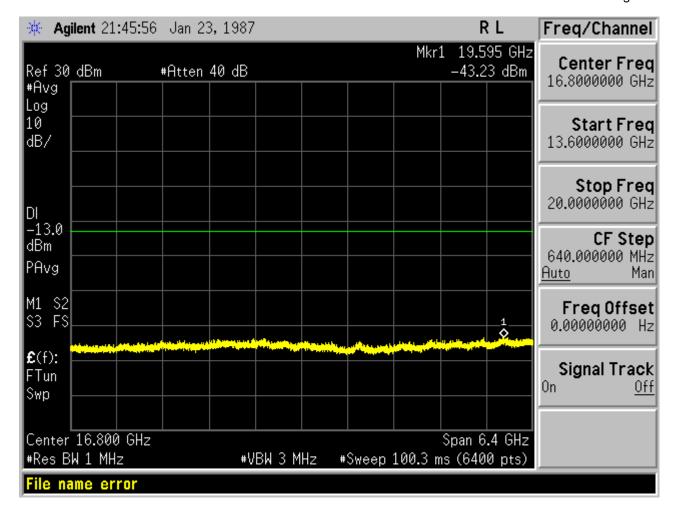



Page 88 of 146

## Test Mode=EDGE


#### Test Channel=LCH

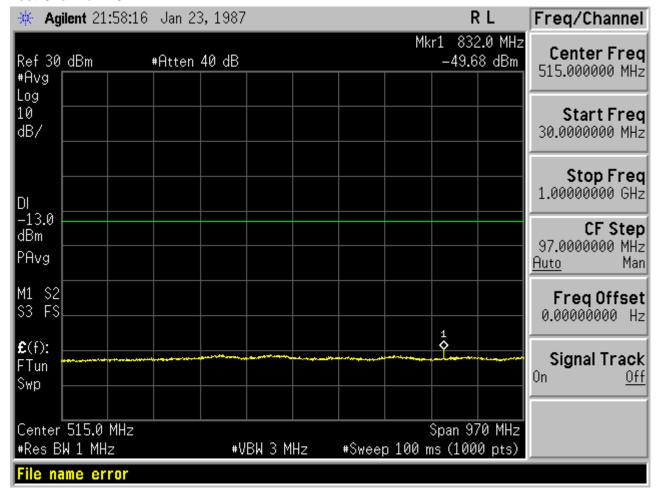

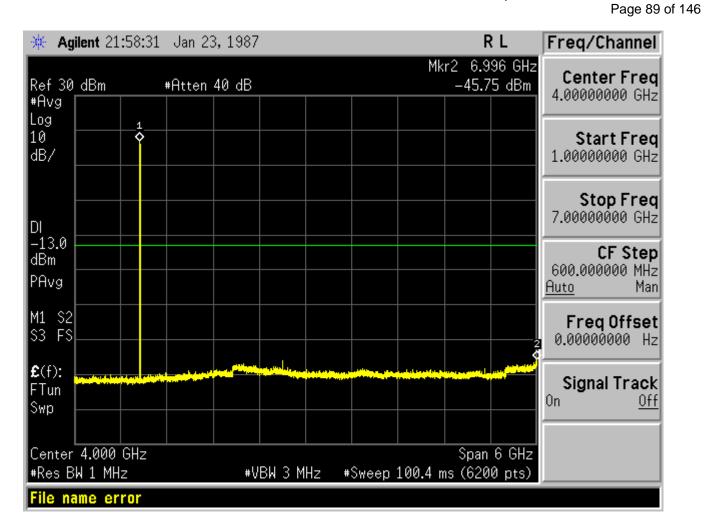

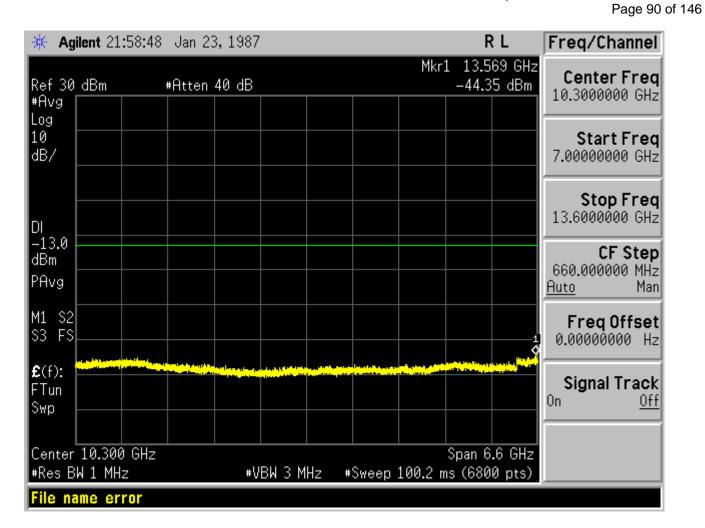



Page 91 of 146

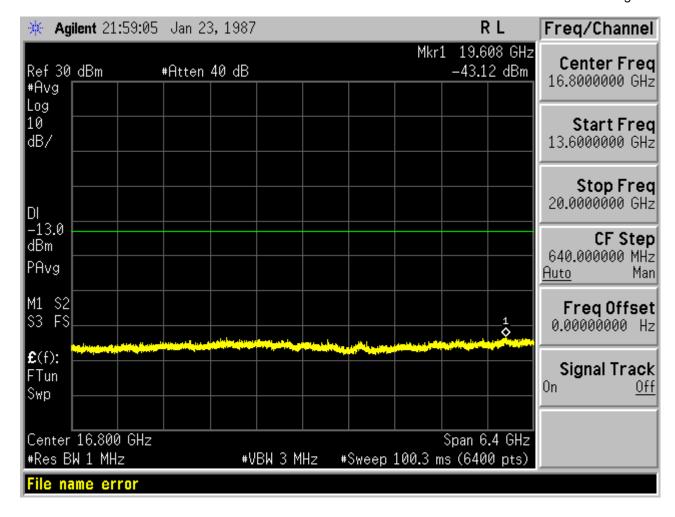


Page 92 of 146

## Test Channel=MCH

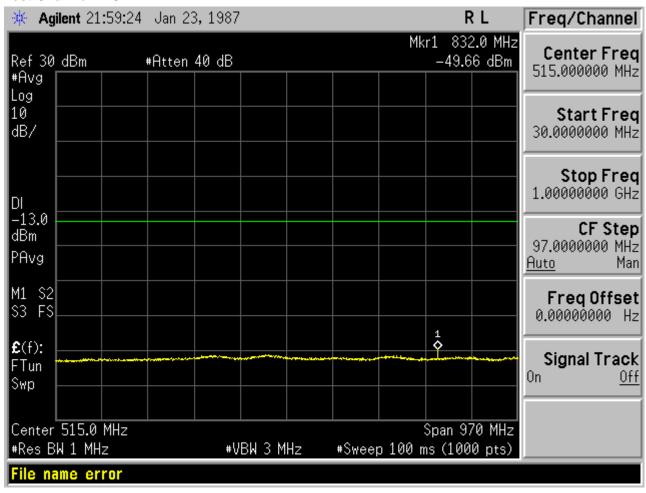


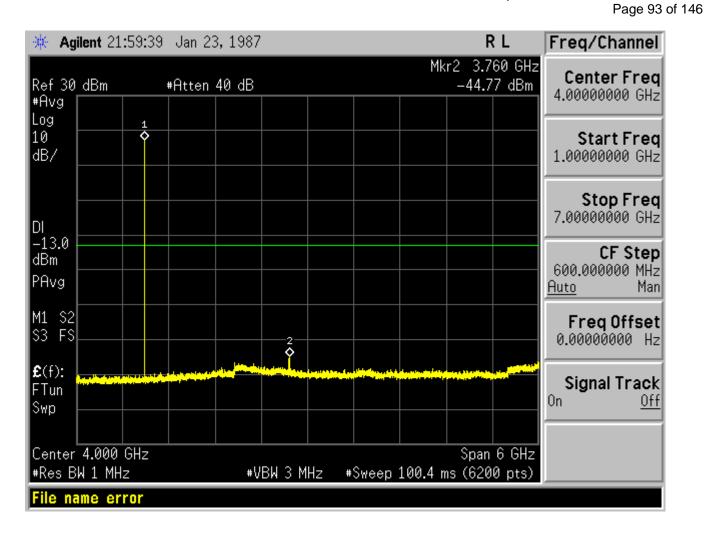

Page 94 of 146

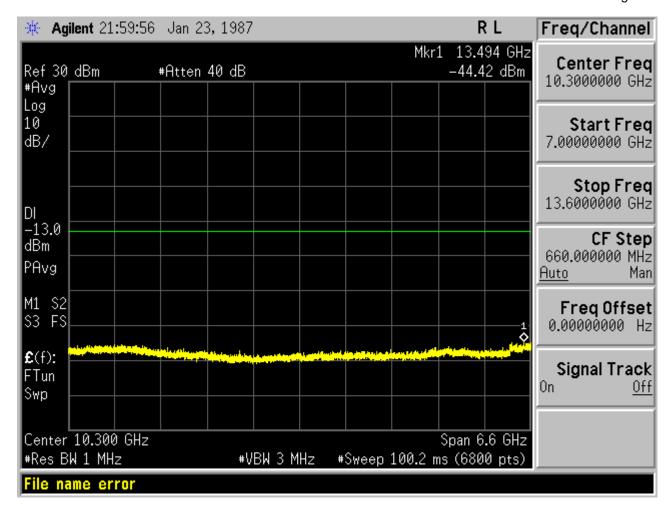


Page 95 of 146

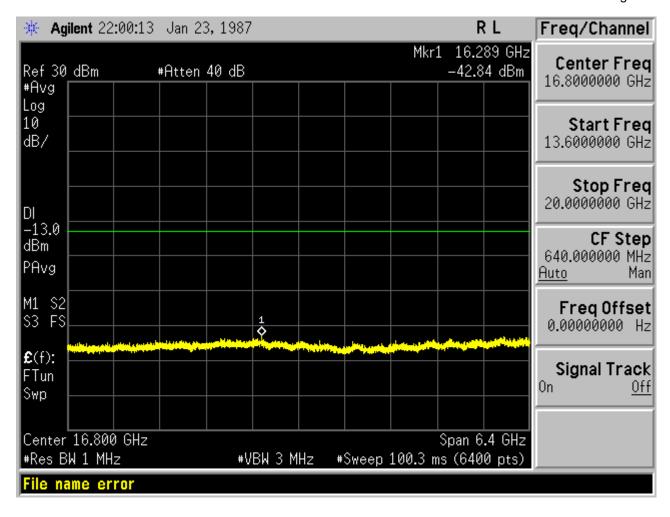



Page 96 of 146

#### Test Channel=HCH

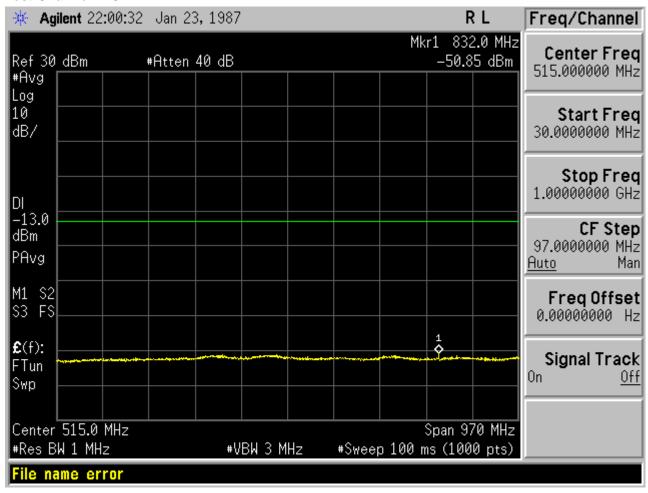


Page 97 of 146

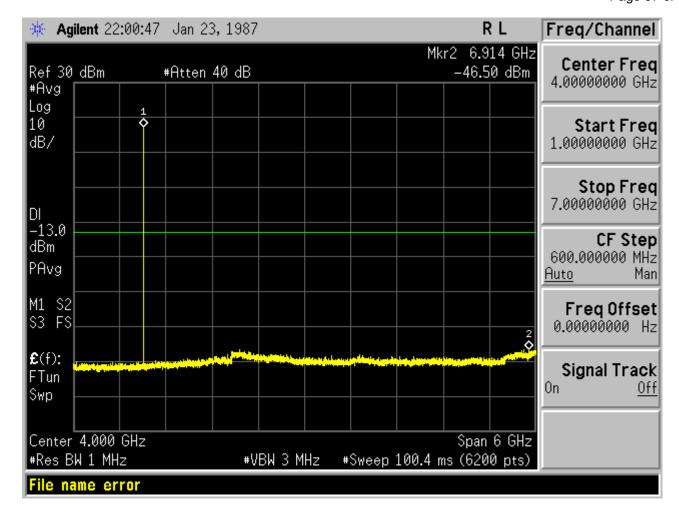

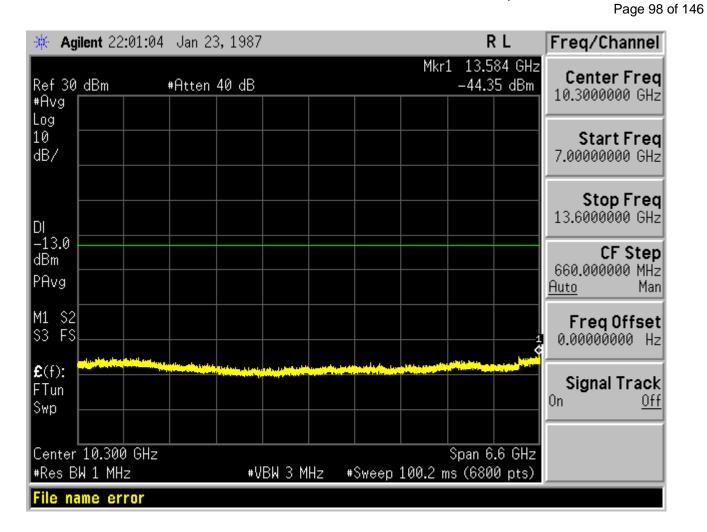

Page 99 of 146

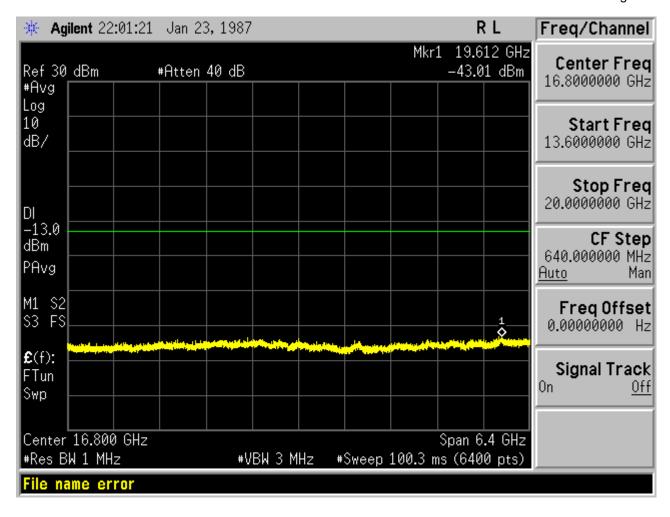



Report No.: AGC06426160601FE02 Page 100 of 146

#### Test Band=WCDMA850

# **Test Mode=UMTS**


### Test Channel=LCH

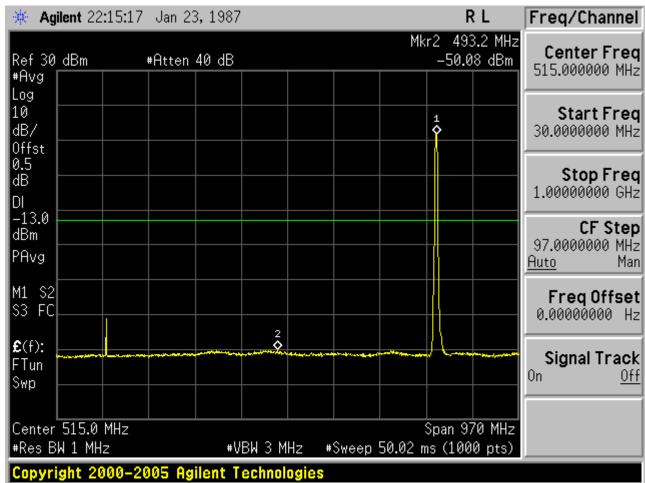


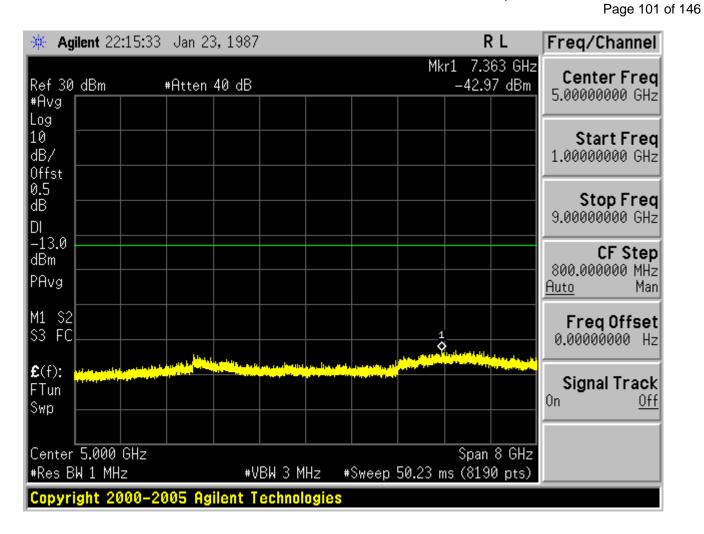

Report No.: AGC06426160601FE02 Page 102 of 146


#### Test Channel=MCH

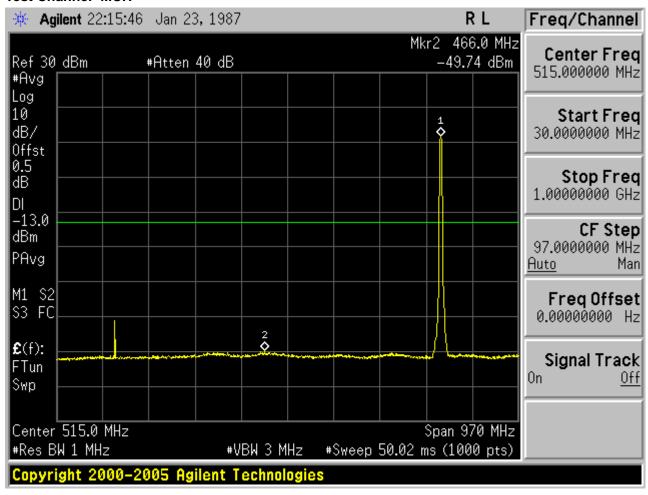


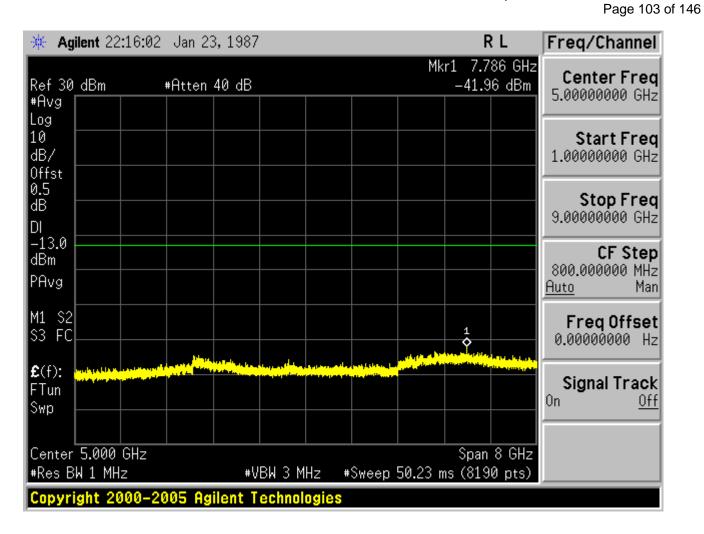

Report No.: AGC06426160601FE02 Page 104 of 146

#### Test Channel=HCH

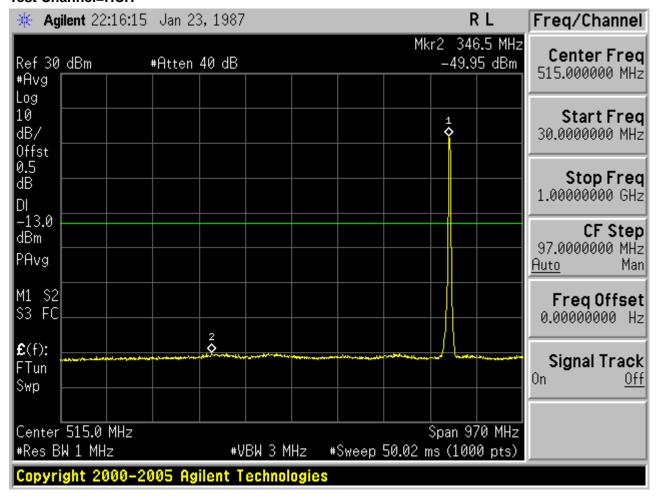

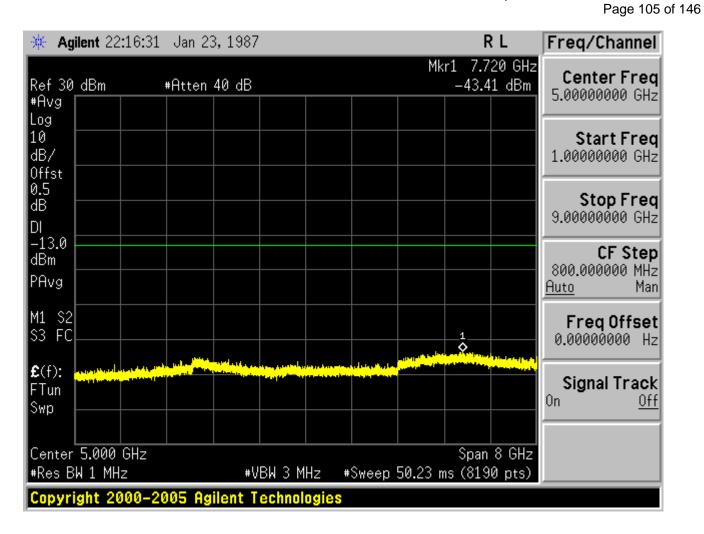



Report No.: AGC06426160601FE02 Page 106 of 146


#### Test Band=WCDMA1900


# **Test Mode=UMTS**

#### Test Channel=LCH

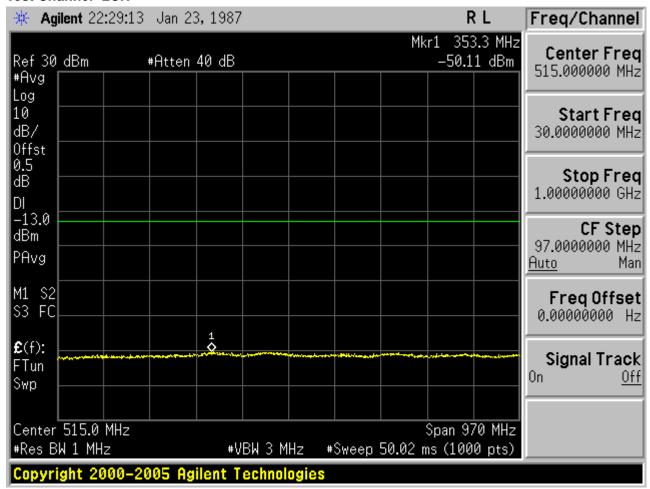

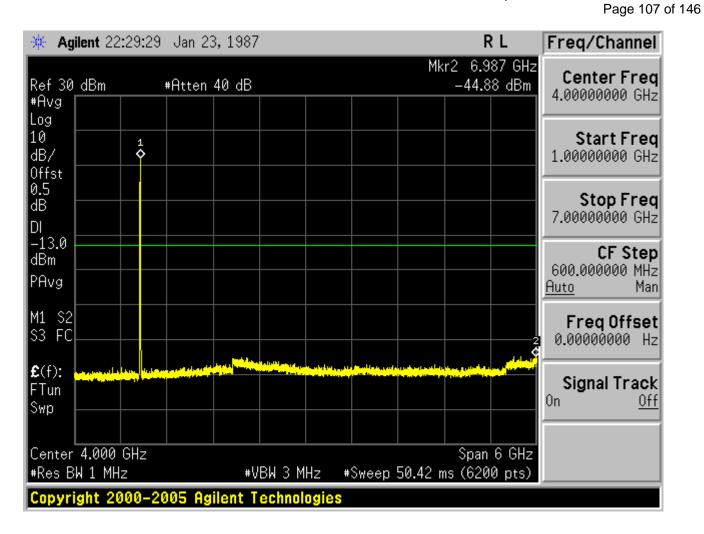


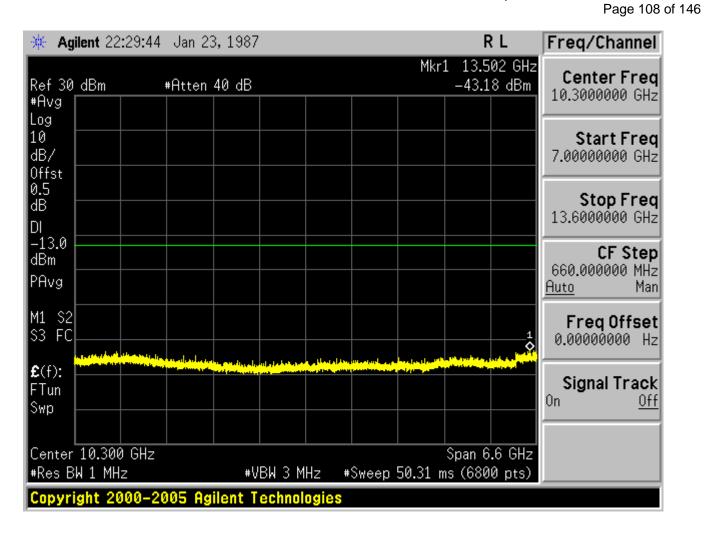


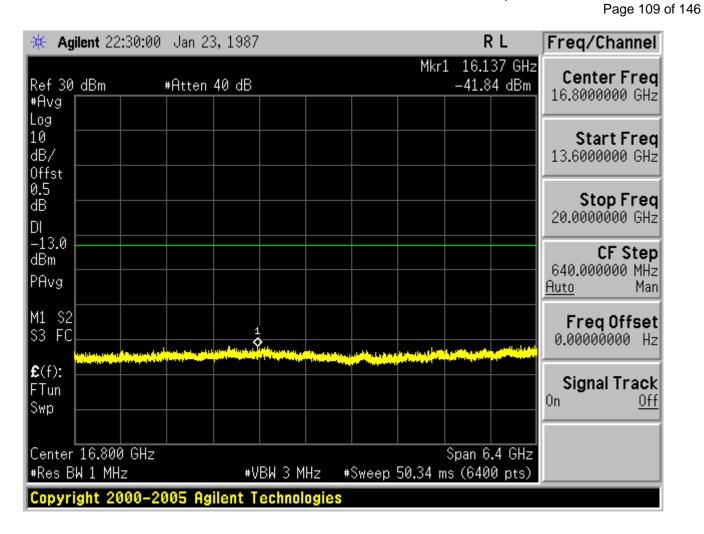



Report No.: AGC06426160601FE02 Page 110 of 146

#### Test Channel=MCH

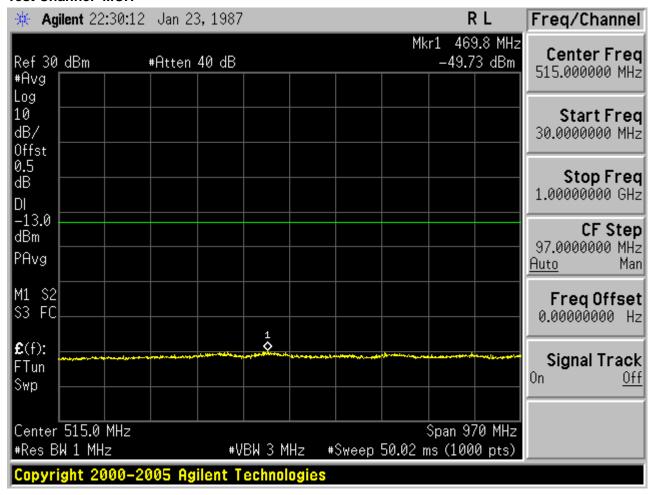

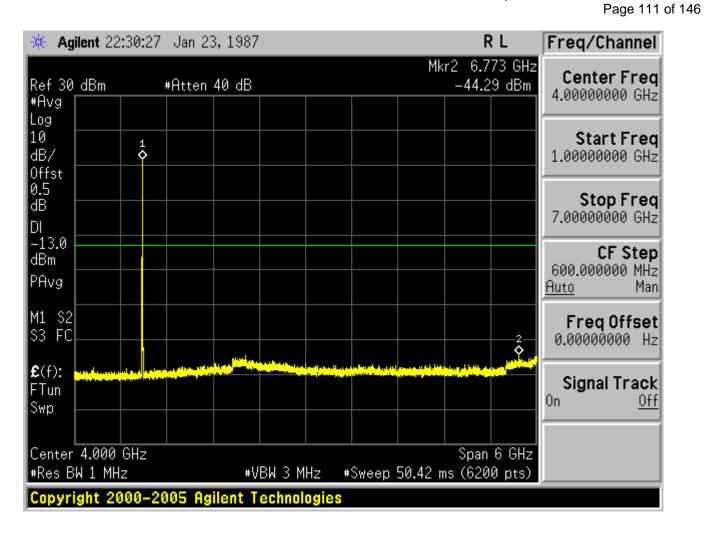


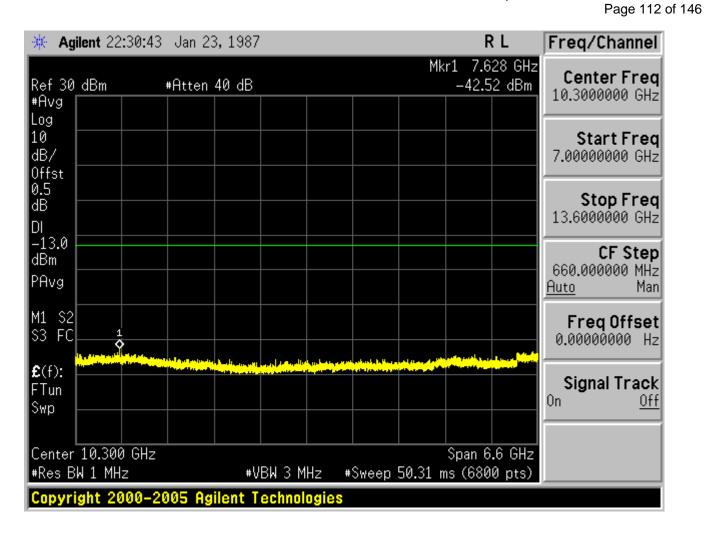


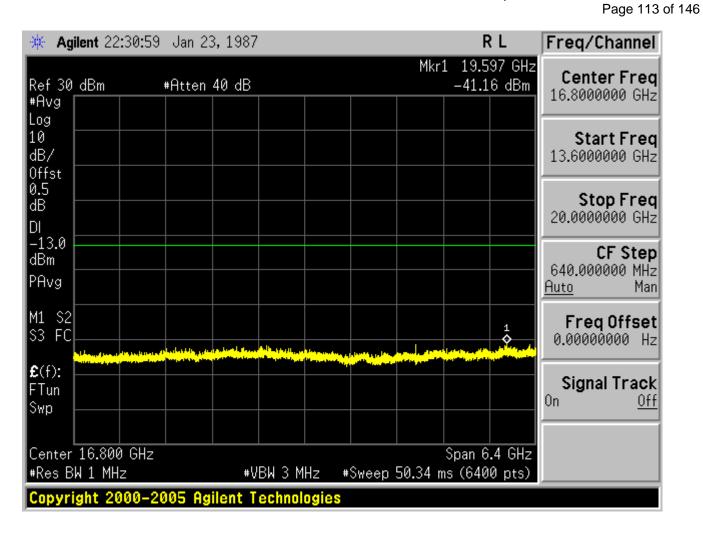



Report No.: AGC06426160601FE02 Page 114 of 146

#### Test Channel=HCH

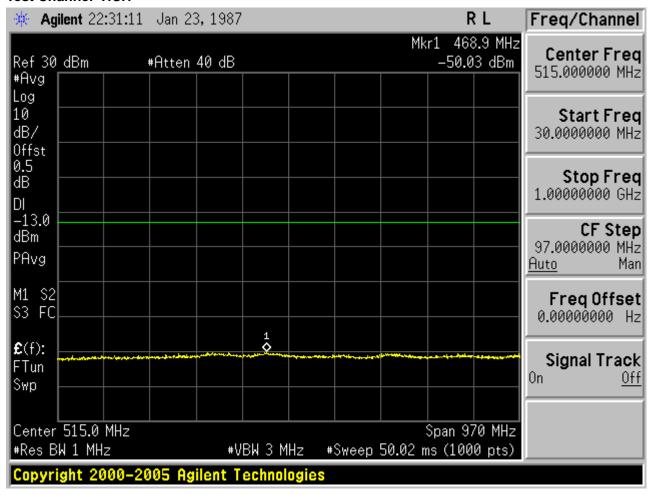

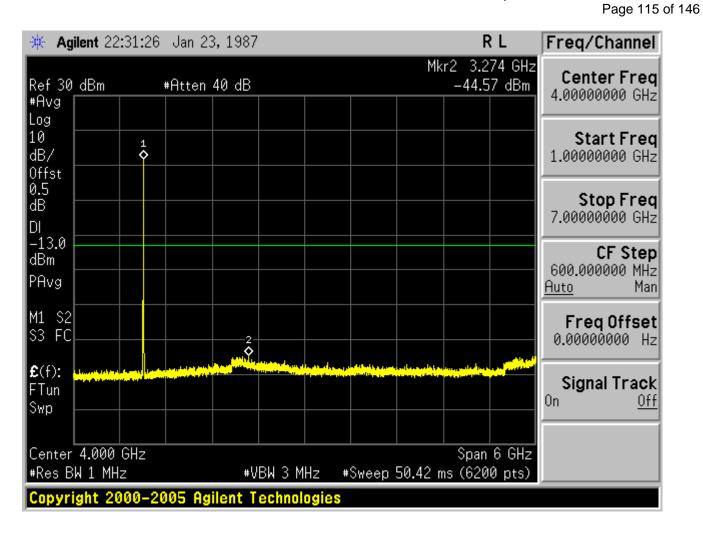

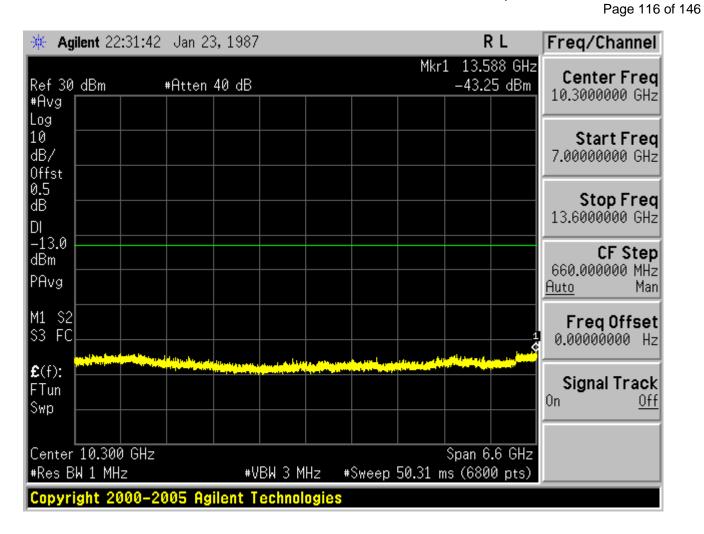

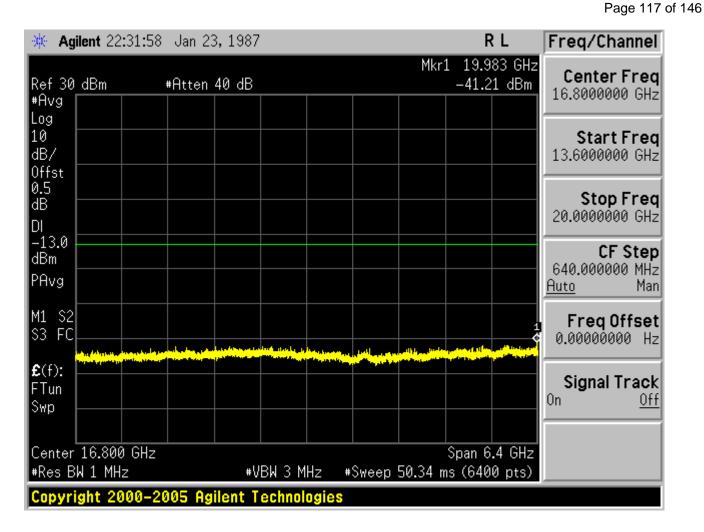

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.

Report No.: AGC06426160601FE02 Page 118 of 146


#### 9.2 RADIATED SPURIOUS EMISSION

#### 9.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603-D-2010 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS/EGPRS 850, GPRS/EGPRS 1900, HSPA band II, HSPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx(dBuV)+CL(dB)+SA(dB)+Gain(dBi)-107(dBuV to dBm) The SA is calibrated using following setup.

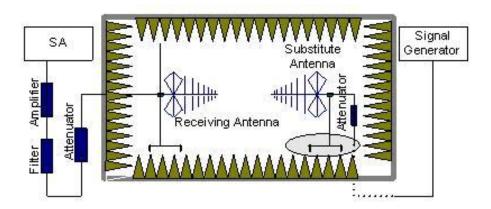

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

Report No.: AGC06426160601FE02 Page 119 of 146

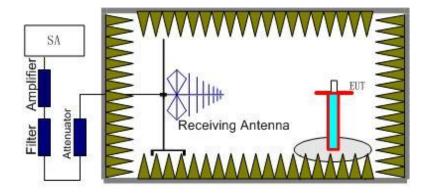

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.6MHz, 1880MHz, 1907.4MHz), UMTS band V(826.6MHz, 836.4MHz, 846.4MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A<sub>Rpl</sub> is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P<sub>Mea</sub>+A<sub>Rpl</sub>

### 9.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** only record the worst condition of each test mode:

Report No.: AGC06426160601FE02 Page 120 of 146

## 9.2.3 MEASUREMENT RESULT

## **GSM 850:**

The Worst Test Results for Channel 251/848.8 MHz												
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity							
1685.23	-41.73	-5.01	-46.74	-13.00	Horizontal							
2456.12	-42.19	-2.18	-44.37	-13.00	Vertical							
3645.78	-42.53	3.46	-39.07	-13.00	Vertical							
4536.58	-43.73	2.79	-40.94	-13.00	Horizontal							

# **GSM 850(EDGE 8):**

	The Worst Test Results for Channel 251/848.8 MHz												
Frequency(MHz)	Power(dBm)	ARpl (dBm)	·   PMea(dBm)		Polarity								
1696.28	-46.49	-2.26	-48.75	-13.00	Horizontal								
2162.19	-46.72	-3.12	-49.84	-13.00	Vertical								
3645.78	-47.15	-1.74	-48.89	-13.00	Vertical								
9257.65	-45.43	8.46	-36.97	-13.00	Horizontal								

## PCS 1900:

	The Worst Test Results for Channel 810/1909.8MHz												
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity								
1429.36	-43.43	-3.22	-46.65	-13.00	Vertical								
2563.47	-42.17	-0.24	-42.41	-13.00	Vertical								
3645.26	-44.92	3.98	-40.94	-13.00	Horizontal								
4563.56	-44.49	11.56	-32.93	-13.00	Vertical								
5689.25	-42.47	17.89	-24.58	-13.00	Horizontal								

Page 121 of 146

# PCS 1900(EDGE 8):

	The Worst Test Results for Channel 810/1909.8MHz												
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity								
1430.15	-43.41	2.7	-40.71	-13.00	Vertical								
9367.91	-46.17	11.6	-34.57	-13.00	Vertical								
13356.68	-43.15	14.89	-28.26	-13.00	Horizontal								
15249.71	-46.25	13.87	-32.38	-13.00	Vertical								
17913.63	-46.53	19.76	-26.77	-13.00	Horizontal								

### **UMTS** band II:

	The Worst Test Results for Channel 9938/1907.4MHz											
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity							
2000.00	-38.82	-2.25	-41.07	-13.00	Vertical							
9548.50	-41.43	-3.03	-44.46	-13.00	Horizontal							
13367.40	-41.19	-1.87	-43.06	-13.00	Horizontal							
15277.80	-38.67	8.52	-30.15	-13.00	Vertical							
17931.60	-43.52	18.7	-24.82	-13.00	Horizontal							

## **UMTS** band V:

	The Worst Test Results for Channel 4458/846.4MHz											
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity							
1598.26	-38.43	-2.26	-40.69	-13.00	Vertical							
2365.78	-39.37	-3.12	-42.49	-13.00	Horizontal							
4967.65	-40.67	-1.74	-42.41	-13.00	Horizontal							
6457.86	-39.48	8.74	-30.74	-13.00	Vertical							
7896.56	-40.44	17.89	-22.55	-13.00	Horizontal							

Note: ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The "Factor" value can be calculated automatically by software of measurement system.

Below 30MHZ no Spurious found and The GSM modes is the worst condition.

Page 122 of 146

## 10. MAINS CONDUCTED EMISSION

## **10.1 MEASUREMENT METHOD**

The measurement procedure specified in ANSI/TIA-603-D-2010 was used for testing. Conducted Emission was measured with travel charger.

### **10.2 PROVISIONS APPLICABLE**

Frequency of Emission (MHz)	Conducted Limit(dBuV)				
	Quasi-Peak	Average			
0.15 – 0.5	66 to 56 *	56 to 46 *			
0.5 – 5	56	46			
5 – 30	60	50			
*Decreases with the logarithm of the frequency.					


<sup>\*</sup>The lower limit shall apply at the transition frequency.

**Note:** The GSM850 mode is the worst condition and the test result as following:

Page 123 of 146

## **10.3 MEASUREMENT RESULT**

### LINE CONDUCTED EMISSION - L

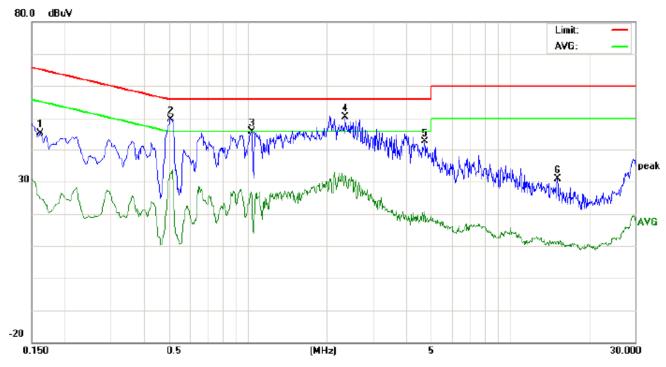


Site: Conduction Phase: L1 Temperature: 23.5
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 54.6 %

EUT: 3G Smart Phone

M/N: S10 Mode: Call Note:

No.	No. Freq.		Reading_Level (dBuV)		Correct Factor	Measurement (dBuV)		Limit (dBuV)		Mai (d	rgin IB)	P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	35.32		14.40	10.17	45.49		24.57	65.36	55.36	-19.87	-30.79	Р	
2	0.5100	39.14		22.16	10.39	49.53		32.55	56.00	46.00	-6.47	-13.45	Р	
3	1.0339	35.61		15.02	10.37	45.98		25.39	56.00	46.00	-10.02	-20.61	Р	
4	2.3580	40.06		21.80	10.37	50.43		32.17	56.00	46.00	-5.57	-13.83	Р	
5	4.7340	32.29		10.39	10.22	42.51		20.61	56.00	46.00	-13.49	-25.39	Р	
6	15.2060	20.71		1.31	10.12	30.83		11.43	60.00	50.00	-29.17	-38.57	Р	

## LINE CONDUCTED EMISSION - N

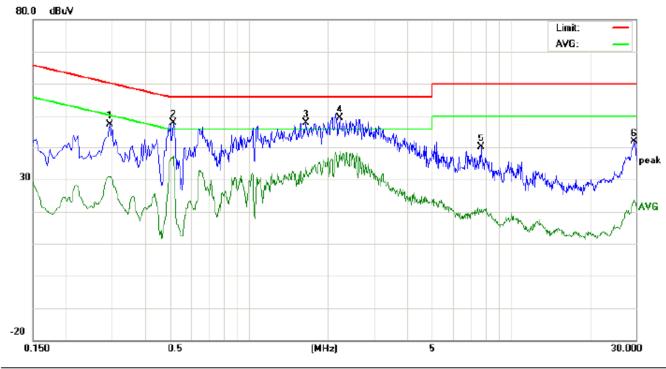

Site: Conduction Phase: N Temperature: 23.5
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 54.6 %

EUT: 3G Smart Phone

M/N: S10 Mode: Call Note:

No.	No. Freq.		Reading_Level (dBuV)		Correct Measurement Factor (dBuV)					rgin IB)	P/F	Comment		
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2940	37.01		20.66	10.29	47.30		30.95	60.41	50.41	-13.11	-19.46	Р	
2	0.5180	37.41		24.12	10.38	47.79		34.50	56.00	46.00	-8.21	-11.50	Р	
3	1.6460	37.59		23.30	10.33	47.92		33.63	56.00	46.00	-8.08	-12.37	Р	
4	2.2180	39.10		28.41	10.31	49.41		38.72	56.00	46.00	-6.59	-7.28	Р	
5	7.6900	29.73		10.20	10.34	40.07		20.54	60.00	50.00	-19.93	-29.46	Р	
6	29.3340	30.05		12.72	10.12	40.17		22.84	60.00	50.00	-19.83	-27.16	Р	

Note: The GSM850 mode is the worst condition.

Page 125 of 146

#### 11. FREQUENCY STABILITY

#### 11.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the EUT to overnight soak at -10℃.
- 3.With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band, channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4.Repeat the above measurements at  $10^{\circ}$ C increments from -10°C to +55°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6. Subject the EUT to overnight soak at +55°C.
- 7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8. Repeat the above measurements at  $10^{\circ}$ C increments from +55 $^{\circ}$ C to -10 $^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9.At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### 11.2 PROVISIONS APPLICABLE

#### 11.2.1 For Hand carried battery powered equipment

According to the ANSI/TIA-603-D-2010, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

Page 126 of 146

## 11.2.2 For equipment powered by primary supply voltage

According to the ANSI/TIA-603-D-2010, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

Report No.: AGC06426160601FE02 Page 127 of 146

## 11.3 MEASUREMENT RESULT

# **Appendix D:Frequency Stability**

Test Results

Frequency Error vs. Voltage:

Test Band	Test Mo de	Test Chan nel	Test Tem p.	Te st Vol t.( V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict	
			TN	3.4	-20.40	-0.02	±2.5	PASS	
		LCH	LCH	TN	3.7	-17.05	-0.02	±2.5	PASS
			TN 4.		-15.30	-0.02	±2.5	PASS	
GSM8	GS		TN	3.4	-9.88	-0.01	±2.5	PASS	
50	M	MCH	TN	3.7	-9.30	-0.01	±2.5	PASS	
30	IVI		TN	4.2	-12.59	-0.02	±2.5	PASS	
			TN	3.4	-12.33	-0.01	±2.5	PASS	
			TN	3.7	-13.82	-0.02	±2.5	PASS	
			TN	4.2	-14.98	-0.02	±2.5	PASS	

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		1		(V)			)	
			TN	3.4	-25.41	-0.03	±2.5	PASS
		LCH	TN	3.7	-17.72	-0.02	±2.5	PASS
			TN	4.2	-31.90	-0.04	±2.5	PASS
			TN	3.4	-31.83	-0.04	±2.5	PASS
GSM850	EDGE	MCH	TN	3.7	-35.22	-0.04	±2.5	PASS
			TN	4.2	-34.45	-0.04	±2.5	PASS
			TN	3.4	-29.83	-0.04	±2.5	PASS
		HCH	TN	3.7	-33.19	-0.04	±2.5	PASS
			TN	4.2	-23.79	-0.03	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		1		(V)			)	
			TN	3.4	-20.73	-0.01	±2.5	PASS
		LCH	TN	3.7	24.92	0.01	±2.5	PASS
			TN	4.2	-20.15	-0.01	±2.5	PASS
CCM400		м мсн	TN	3.4	-25.57	-0.01	±2.5	PASS
GSM190 0	GSM		TN	3.7	24.47	0.01	±2.5	PASS
0			TN	4.2	20.08	0.01	±2.5	PASS
			TN	3.4	22.54	0.01	±2.5	PASS
		HCH	TN	3.7	24.73	0.01	±2.5	PASS
			TN	4.2	22.99	0.01	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		1		(V)			)	
			TN	3.4	-29.93	-0.02	±2.5	PASS
	EDGE	LCH	TN	3.7	-24.02	-0.01	±2.5	PASS
			TN	4.2	-24.73	-0.01	±2.5	PASS
CCM400			TN	3.4	-32.64	-0.02	±2.5	PASS
GSM190 0		MCH	TN	3.7	-33.87	-0.02	±2.5	PASS
			TN	4.2	-33.80	-0.02	±2.5	PASS
			TN	3.4	-39.68	-0.02	±2.5	PASS
		HCH	TN	3.7	-42.59	-0.02	±2.5	PASS
			TN	4.2	-43.00	-0.02	±2.5	PASS

Report No.: AGC06426160601FE02 Page 131 of 146

# **Frequency Error vs. Temperature:**

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1					)	
			VN	-10	-18.02	-0.02	±2.5	PASS
			VN	0	-9.10	-0.01	±2.5	PASS
			VN	10	-13.82	-0.02	±2.5	PASS
GSM850	GSM	LCH	VN	20	-16.47	-0.02	±2.5	PASS
			VN	30	-13.17	-0.02	±2.5	PASS
			VN	40	-13.62	-0.02	±2.5	PASS
			VN	50	-10.01	-0.01	±2.5	PASS
			VN	-10	-9.23	-0.01	±2.5	PASS
			VN	0	-14.46	-0.02	±2.5	PASS
			VN	10	-13.75	-0.02	±2.5	PASS
GSM850	GSM	MCH	VN	20	-13.75	-0.02	±2.5	PASS
			VN	30	-12.85	-0.02	±2.5	PASS
			VN	40	-15.56	-0.02	±2.5	PASS
			VN	50	-12.27	-0.01	±2.5	PASS
			VN	-10	-12.46	-0.01	±2.5	PASS
			VN	0	-13.37	-0.02	±2.5	PASS
			VN	10	-12.53	-0.01	±2.5	PASS
GSM850	GSM	HCH	VN	20	-13.17	-0.02	±2.5	PASS
			VN	30	-15.88	-0.02	±2.5	PASS
			VN	40	-12.53	-0.01	±2.5	PASS
			VN	50	-16.79	-0.02	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		I					)	
			VN	-10	37.26	0.05	±2.5	PASS
			VN	0	-34.32	-0.04	±2.5	PASS
			VN	10	-34.38	-0.04	±2.5	PASS
GSM850	EDGE	LCH	VN	20	-28.19	-0.03	±2.5	PASS
			VN	30	-27.99	-0.03	±2.5	PASS
			VN	40	-31.41	-0.04	±2.5	PASS
			VN	50	-32.54	-0.04	±2.5	PASS
			VN	-10	-32.93	-0.04	±2.5	PASS
			VN	0	-36.39	-0.04	±2.5	PASS
			VN	10	-29.90	-0.04	±2.5	PASS
GSM850	EDGE	MCH	VN	20	-26.70	-0.03	±2.5	PASS
			VN	30	-21.24	-0.03	±2.5	PASS
			VN	40	26.44	0.03	±2.5	PASS
			VN	50	-19.34	-0.02	±2.5	PASS
			VN	-10	30.38	0.04	±2.5	PASS
			VN	0	-31.87	-0.04	±2.5	PASS
			VN	10	-30.51	-0.04	±2.5	PASS
GSM850	EDGE	HCH	VN	20	-33.93	-0.04	±2.5	PASS
			VN	30	-29.12	-0.03	±2.5	PASS
			VN	40	-31.16	-0.04	±2.5	PASS
			VN	50	38.26	0.05	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1					)	
			VN	-10	-19.63	-0.01	±2.5	PASS
			VN	0	-17.63	-0.01	±2.5	PASS
CCM100			VN	10	-20.21	-0.01	±2.5	PASS
GSM190 0	GSM	LCH	VN	20	20.79	0.01 ±2	±2.5	PASS
0			VN	30	-26.22	-0.01	±2.5	PASS
			VN	40	-25.31	-0.01	±2.5	PASS
			VN	50	-13.17	-0.01	±2.5	PASS
	GSM		VN	-10	23.31	0.01	±2.5	PASS
			VN	0	-20.92	-0.01	±2.5	PASS
GSM190			VN	10	25.96	0.01	±2.5	PASS
0		MCH	VN	20	26.15	0.01	0.01 ±2.5	PASS
0			VN	30	-21.76	-0.01	±2.5	PASS
			VN	40	-24.34	-0.01	±2.5	PASS
			VN	50	-24.15	-0.01	±2.5	PASS
			VN	-10	20.92	0.01	±2.5	PASS
			VN	0	15.63	0.01	±2.5	PASS
CCM100			VN	10	13.37	0.01	±2.5	PASS
GSM190 0	GSM	HCH	VN	20	23.37	0.01	±2.5	PASS
			VN	30	23.63	0.01	±2.5	PASS
			VN	40	12.79	0.01	±2.5	PASS
			VN	50	10.85	0.01	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1					)	
			VN	-10	-23.15	-0.01	±2.5	PASS
			VN	0	-24.09	-0.01	±2.5	PASS
GSM190			VN	10	-29.64	-0.02	±2.5	PASS
0	EDGE	LCH	VN	20	-21.79	-0.01	±2.5	PASS
0			VN	30	-29.54	-0.02	±2.5	PASS
			VN	40	-28.31	-0.02	±2.5	PASS
			VN	50	-33.77	-0.02	±2.5	PASS
	EDGE		VN	-10	-34.45	-0.02	±2.5	PASS
			VN	0	-33.16	-0.02	±2.5	PASS
GSM190			VN	10	-41.13	-0.02	±2.5	PASS
0		MCH	VN	20	-47.23	-0.03	±2.5	PASS
			VN	30	-35.19	-0.02	±2.5	PASS
			VN	40	-39.97	-0.02	±2.5	PASS
			VN	50	-37.90	-0.02	±2.5	PASS
			VN	-10	-44.30	-0.02	±2.5	PASS
			VN	0	-33.29	-0.02	±2.5	PASS
GSM190			VN	10	-33.74	-0.02	±2.5	PASS
0	EDGE	HCH	VN	20	-32.03	-0.02	±2.5	PASS
			VN	30	-30.22	-0.02	±2.5	PASS
			VN	40	-38.74	-0.02	±2.5	PASS
			VN	50	-40.42	-0.02	±2.5	PASS

Report No.: AGC06426160601FE02 Page 135 of 146

# Frequency Error vs. Voltage:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		1		(V)			)	
			TN	3.4	-16.25	-0.02	±2.5	PASS
	UMTS	LCH	TN	3.7	-6.41	-0.01	±2.5	PASS
			TN	4.2	-9.84	-0.01	±2.5	PASS
WCDMA			TN	3.4	-12.59	-0.02	±2.5	PASS
850		MCH	TN	3.7	-6.41	-0.02	±2.5	PASS
650			TN	4.2	-9.84	-0.01	±2.5	PASS
			TN	3.4	-15.11	-0.02	±2.5	PASS
		HCH	TN	3.7	-6.41	-0.04	±2.5	PASS
			TN	4.2	-15.11	-0.02	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		- 1		(V)			)	
			TN	3.4	13.42	0.01	±2.5	PASS
	UMTS	LCH	TN	3.7	12.76	0.01	±2.5	PASS
			TN	4.2	5.73	0.01	±2.5	PASS
MCDMA			TN	3.4	9.84	0.01	±2.5	PASS
WCDMA 1900		MCH	TN	3.7	-16.49	-0.01	±2.5	PASS
1900			TN	4.2	16.48	0.01	±2.5	PASS
			TN	3.4	-20.83	-0.01	±2.5	PASS
		HCH	TN	3.7	-18.42	-0.01	±2.5	PASS
			TN	4.2	-9.61	-0.01	±2.5	PASS

Report No.: AGC06426160601FE02 Page 136 of 146

# **Frequency Error vs. Temperature:**

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		I					)	
			VN	-10	10.76	0.01	±2.5	PASS
			VN	0	-15.56	-0.02	±2.5	PASS
WCDMA			VN	10	-8.93	-0.01	±2.5	PASS
850	UMTS	LCH	VN	20	-12.13	-0.01	±2.5	PASS
650			VN	30	-17.40	-0.02	±2.5	PASS
			VN	40	-14.88	-0.02	±2.5	PASS
			VN	50	-13.28	-0.02	±2.5	PASS
	UMTS		VN	-10	-5.95	-0.01	±2.5	PASS
			VN	0	-25.18	-0.03	±2.5	PASS
WCDMA			VN	10	-19.91	-0.02	±2.5	PASS
850		MCH	VN	20	-14.42	-0.02	±2.5	PASS
650			VN	30	-19.91	-0.02	±2.5	PASS
			VN	40	-24.26	-0.03	±2.5	PASS
			VN	50	-13.05	-0.02	±2.5	PASS
			VN	-10	-13.50	-0.02	±2.5	PASS
			VN	0	-18.08	-0.02	±2.5	PASS
MCDMA			VN	10	-26.42	-0.02	±2.5	PASS
WCDMA 850	UMTS	HCH	VN	20	-19.91	-0.02	±2.5	PASS
000			VN	30	-7.32	-0.01	±2.5	PASS
			VN	40	-22.11	-0.01	±2.5	PASS
			VN	50	-16.25	-0.02	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1					)	
			VN	-10	18.99	0.01	±2.5	PASS
			VN	0	22.43	0.01	±2.5	PASS
MCDMA			VN	10	15.24	0.01	±2.5	PASS
WCDMA 1900	UMTS	LCH	VN	20	22.57	0.01	±2.5	PASS
1900			VN	30	23.16	0.01	±2.5	PASS
			VN	40	28.41	0.01	±2.5	PASS
			VN	50	14.66	0.01	±2.5	PASS
	UMTS		VN	-10	26.32	0.01	±2.5	PASS
			VN	0	22.20	0.01	±2.5	PASS
WCDMA			VN	10	17.62	0.01	±2.5	PASS
1900		MCH	VN	20	15.79	0.01	±2.5	PASS
1900			VN	30	-13.28	-0.01	±2.5	PASS
			VN	40	22.20	0.01	±2.5	PASS
			VN	50	10.30	0.01	±2.5	PASS
			VN	-10	-18.44	-0.01	±2.5	PASS
			VN	0	10.99	0.01	±2.5	PASS
WCDMA			VN	10	12.59	0.01	±2.5	PASS
1900	UMTS	HCH	VN	20	15.56	0.01	±2.5	PASS
1900			VN	30	25.86	0.01	±2.5	PASS
			VN	40	15.56	0.01	±2.5	PASS
			VN	50	-15.11	-0.01	±2.5	PASS

Report No.: AGC06426160601FE02 Page 138 of 146

# PHOTOGRAPHS OF TEST SETUP


CONDUCTED EMISSION



RADIATED SPURIOUS EMISSION



Report No.: AGC06426160601FE02 Page 139 of 146

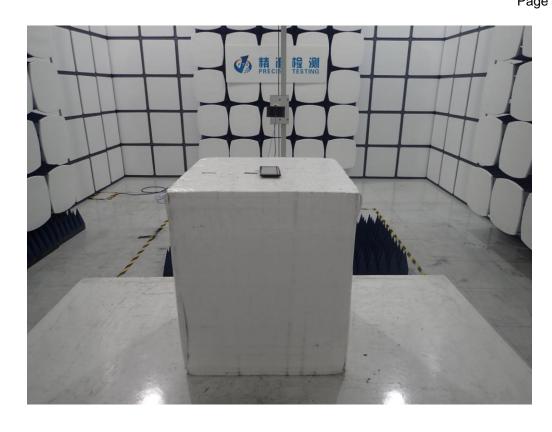

## **CONDUCTED MEASUREMENTS**



Report No.: AGC06426160601FE02 Page 140 of 146

## **PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT




THE LABEL OF ADAPTER



Report No.: AGC06426160601FE02 Page 141 of 146

THE LABEL OF BATTERY

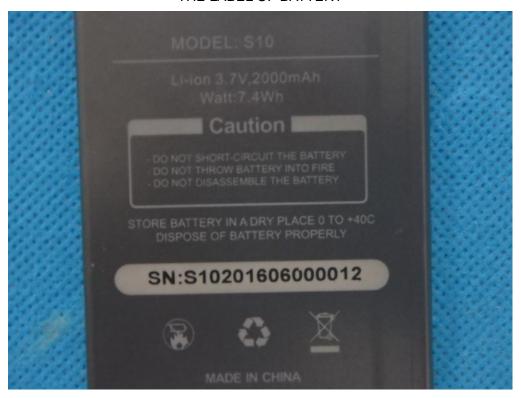

TOP VIEW OF EUT



Report No.: AGC06426160601FE02 Page 142 of 146

**BOTTOM VIEW OF EUT** 




FRONT VIEW OF EUT



Report No.: AGC06426160601FE02 Page 143 of 146

## **BACK VIEW OF EUT**

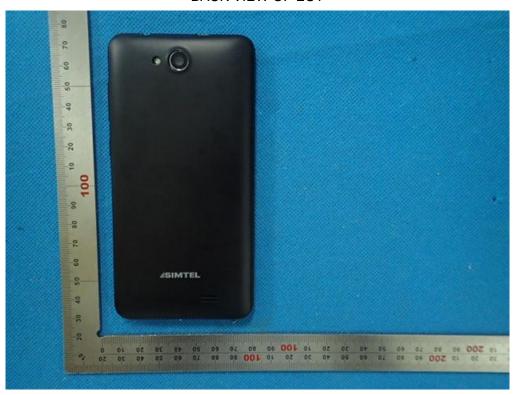

LEFT VIEW OF EUT



Report No.: AGC06426160601FE02 Page 144 of 146

RIGHT VIEW OF EUT



**OPEN VIEW OF EUT-1** 



Report No.: AGC06426160601FE02 Page 145 of 146

## **OPEN VIEW OF EUT-2**




**OPEN VIEW OF EUT-3** 




Report No.: AGC06426160601FE02 Page 146 of 146

**INTERNAL VIEW OF EUT-1** 

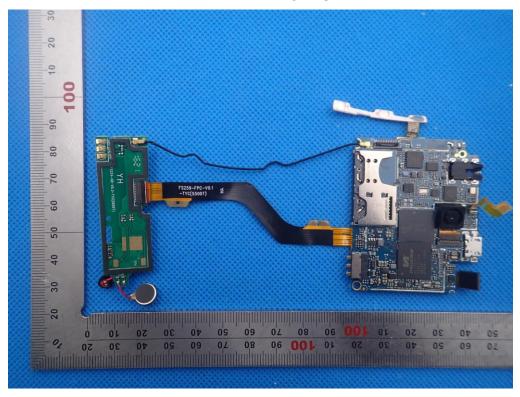

**INTERNAL VIEW OF EUT-2** 

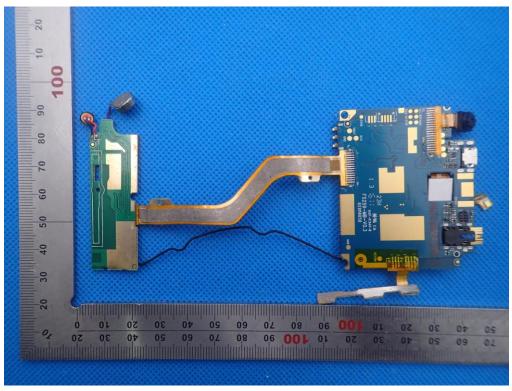

----END OF REPORT----