

FCC 47 CFR MPE REPORT

All Best Technology Limited

Bluetooth Speaker System with Alarm Clock Wireless Charging Station

Model Number: HS1-qi

Additional Model: HS1-WC,HS1,S1 Hotel

FCC ID:2AIEG-HS1-QI

Prepared for:	All Best Technology Limited
	Yincheng 1st Rd., Yincheng Industrial Zone, Xiabian Village, Chang'an Town,
	Dongguan City, Guangdong Province, China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R1804047
Date of Test:	Apr. 28, 2018
Date of Report:	Apr. 28, 2018

Environmental evaluation and exposure limit according to FCC CFR 47 Part 1.1307(b), 1.1310

1. Limits for Maximum Permissible Exposure (MPE)


Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational / Control Exposures				
0.3-3.0	614	1.63	*(100)	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30

** means Plane-wave equivalent power density

2. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Magnetic field probe	Narda	2304/03	M-0018	June,29,17	1 Year

3. Test setup

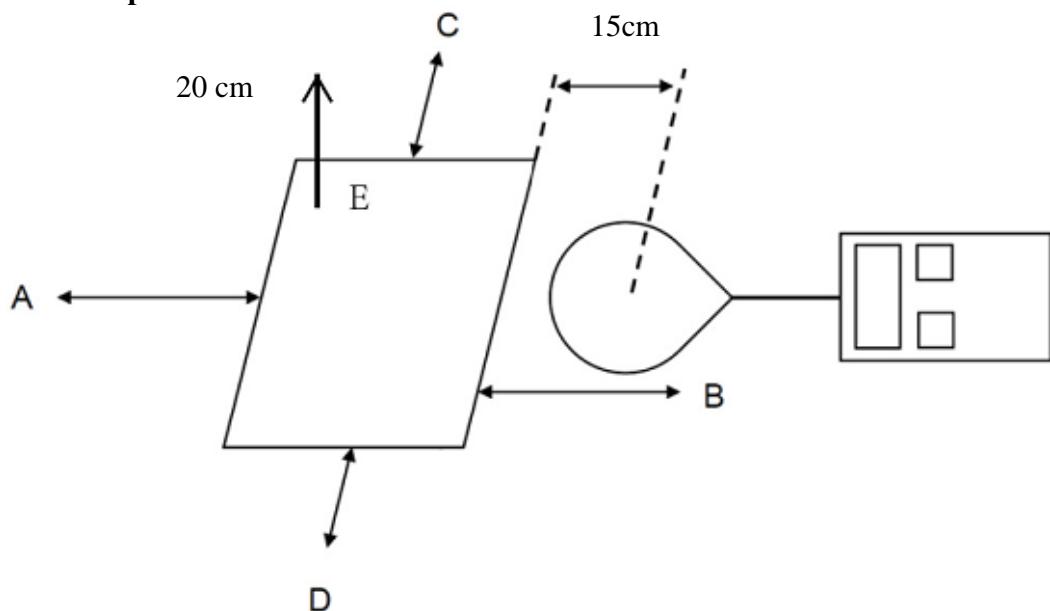

- The test was performed on 360 degree turn table in anechoic chamber.
- The probe was placed at 15 cm surrounding the device and 20 cm above the top of the charger and the geometric centre of the probe.
- The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.

4. Equipment Approval Considerations

According to the item 5(b) of KDB 680106 D01 RF Exposure Wireless Charging App v03:

Inductive wireless power transfer applications that meets KDB 680106 Clause 5(b) 6 conditions are excluded from submitting an RF exposure evaluation.

1	Power transfer frequency is less than 1 MHz
	YES; the device operated in the frequency range from 110-205KHz.
2	Output power from each primary coil is less than or equal to 15 watts.
	YES; the maximum output power of the primary coil is 4.95W.
3	The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
	YES; the transfer system includes only single primary and secondary coils.
4	Client device is placed directly in contact with the transmitter.
	YES; Client device is placed directly in contact with the transmitter.
5	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
	YES
6	The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
	YES; The EUT field strength levels are 50% x MPE limits.

5. Test Mode

Mode	Description
Charging mode with dummy load	Full Load
	Half Load
	Empty Load

6. E-Field Test Result

Test Mode	Full Load	Half Load	Empty Load
Frequency range (kHz)	110 to 205 kHz		
Position A(V/m)	1.435	1.361	1.345
Position B(V/m)	1.231	1.224	1.212
Position C(V/m)	1.274	1.265	1.198
Position D(V/m)	1.346	1.309	1.253
Position E(V/m)	1.701	1.652	1.610
Limits (V/m)	614		
50% Limits(V/m)	307		

7. H-Field Test Result


Test Mode	Full Load	Half Load	Empty Load
Frequency range (kHz)	110 to 205 kHz		
Position A(A/m)	0.156	0.131	0.148
Position B(A/m)	0.182	0.153	0.150
Position C(A/m)	0.157	0.162	0.149
Position D(A/m)	0.168	0.137	0.155
Position E(A/m)	0.301	0.252	0.244
Limits (A/m)	1.63		
50% Limits (A/m)	0.815		




FCC ID:2AIEG-HS1-QI

8. Test Setup Photo

Position A

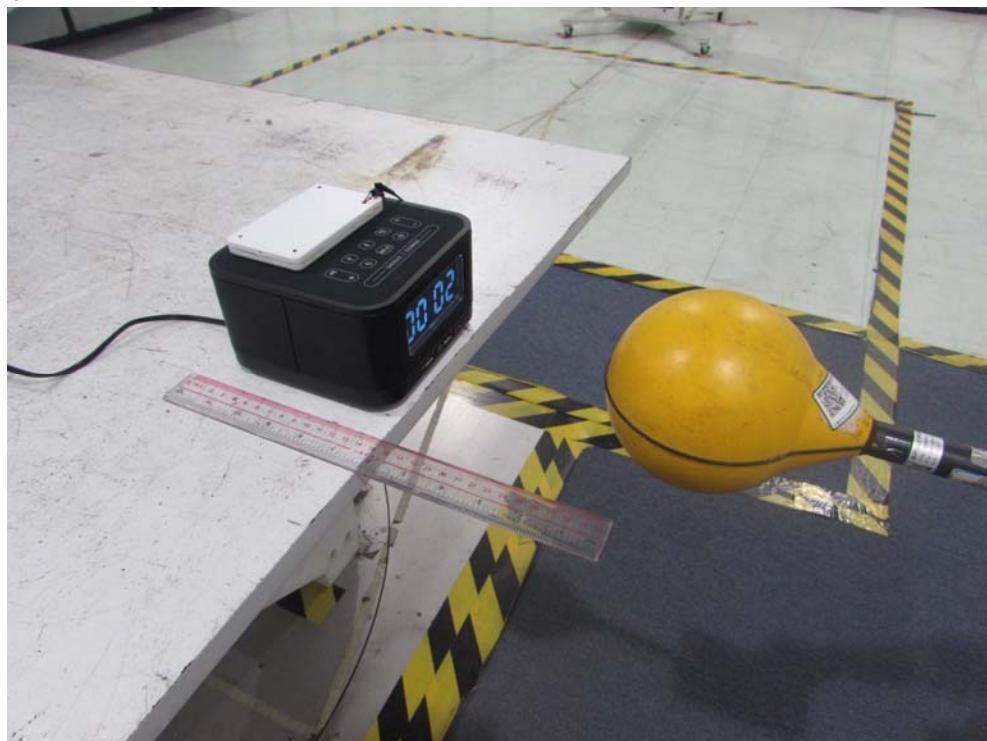


Position B

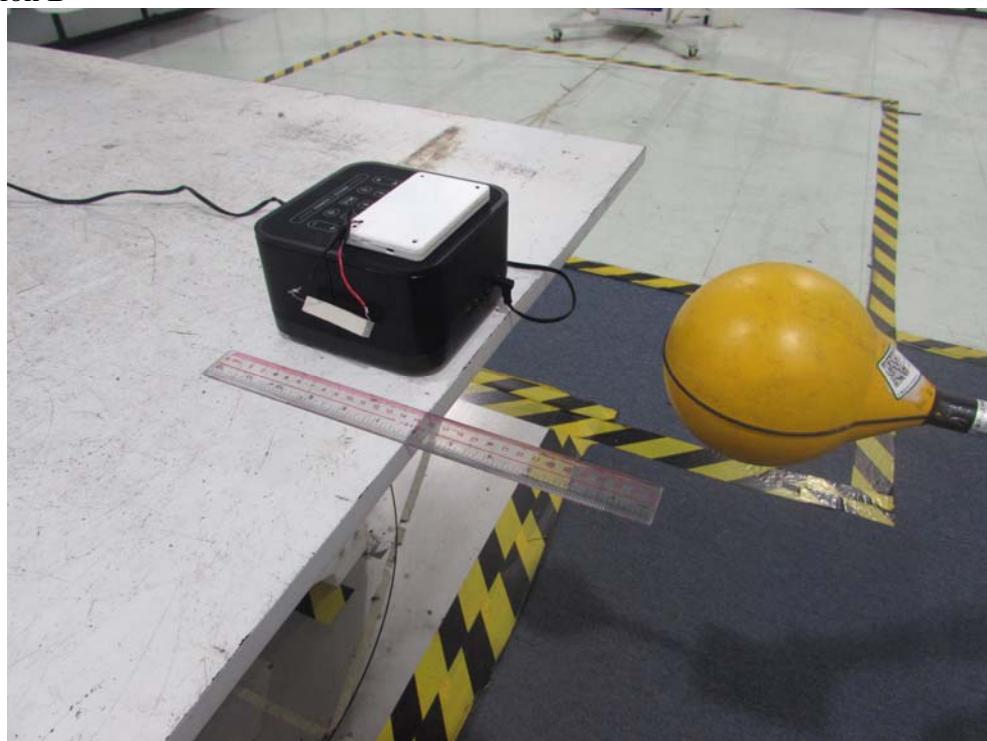


FCC ID:2AIEG-HS1-QI


Position C

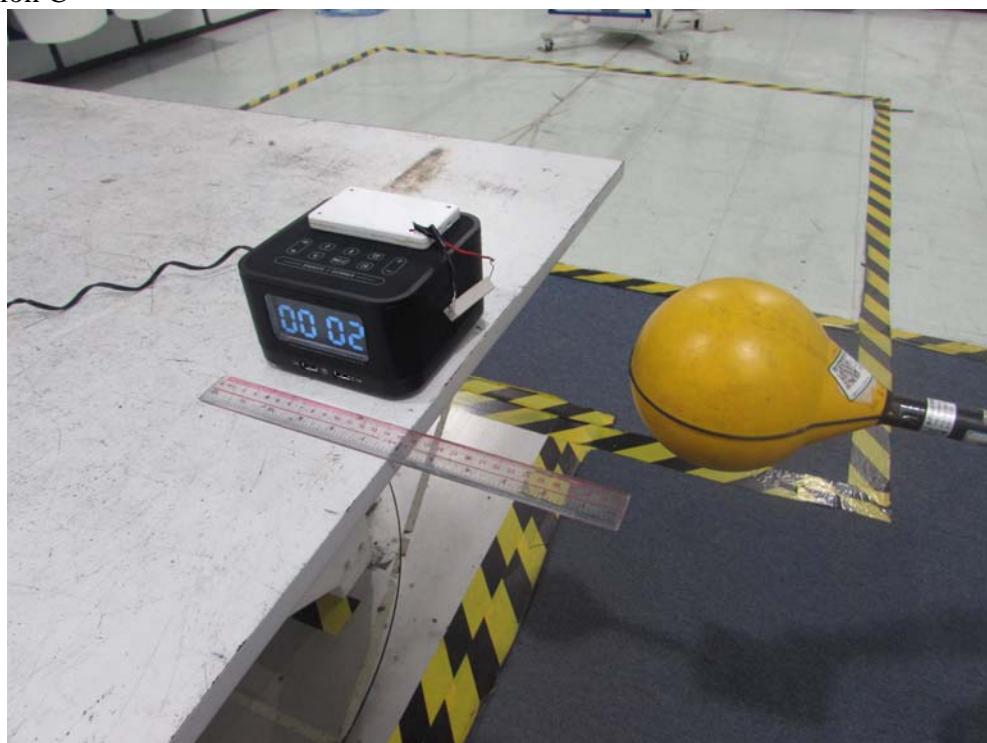

Position D

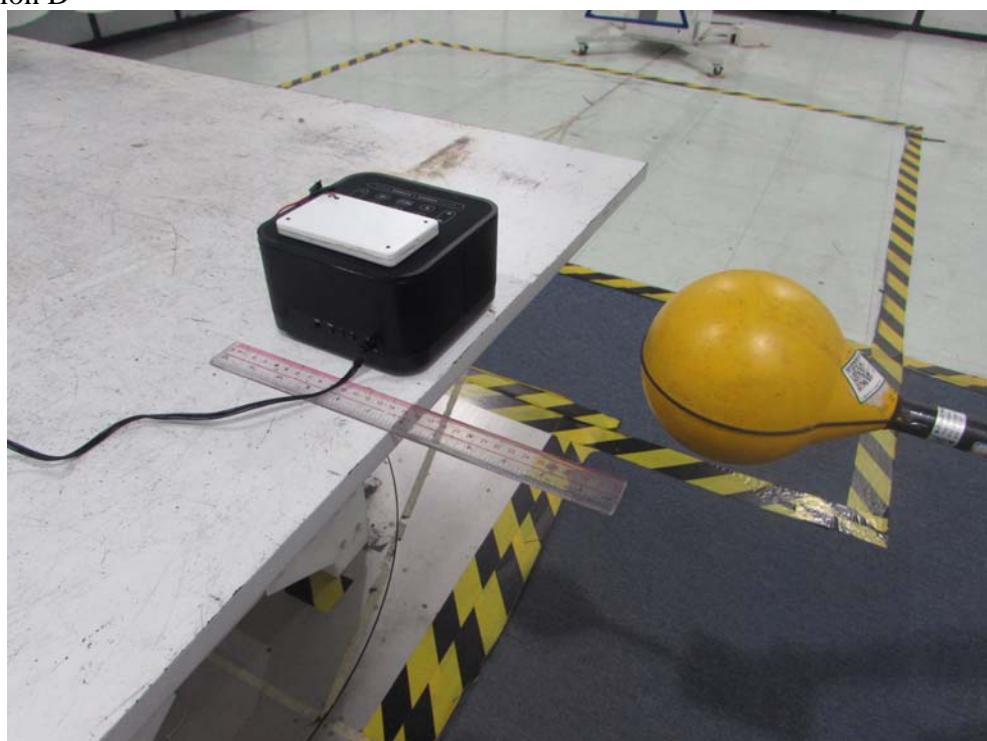

Position E

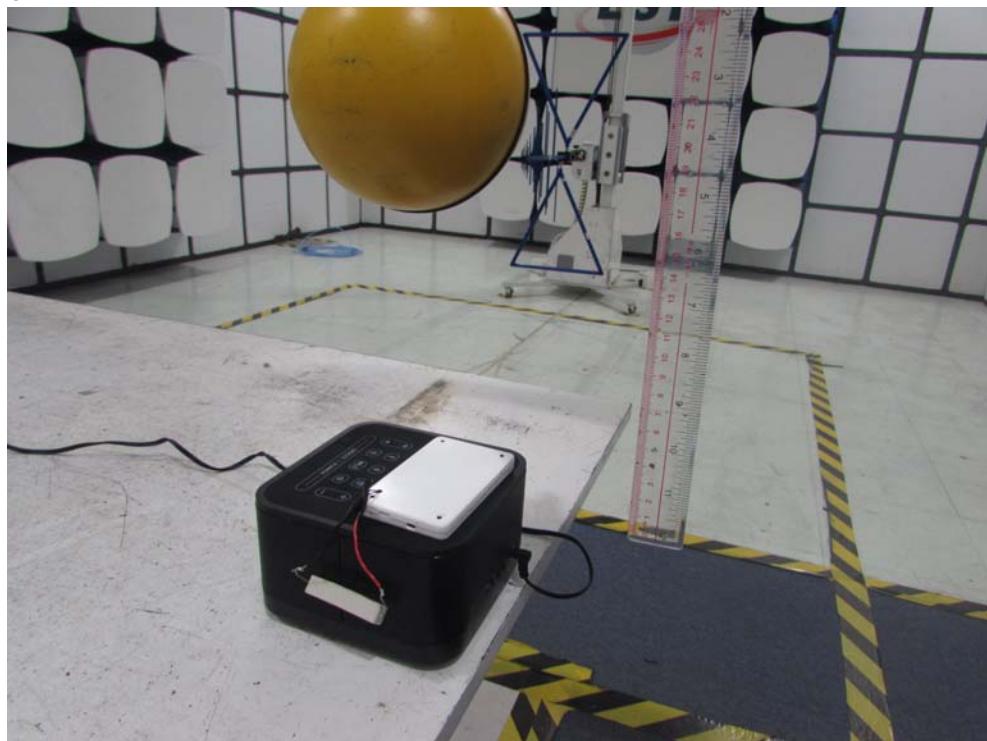

Note: The dummy load must be placed horizontal of the EUT at the top.(Parallel to the coil)

=====END=====