



# FCC TEST REPORT FCC ID: 2AIEGS1PRO

Product : Alarm Clock Radio Speaker System

Model Name : S1pro

Brand : N/A

Report No. : PTC801186160622E-FC02

# **Prepared for**

All Best Technology Limited

No.9, Yincheng 1st Rd., Xiabian Village, Chang'an Town,

Dongguan City, Guangdong Province, China

# Prepared by

DongGuan Precise Testing Service Co.,Ltd.

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community

Dongcheng District, Dongguan, Guangdong, China



#### **TEST RESULT CERTIFICATION**

Applicant's name All Best Technology Limited

Address No.9, Yincheng 1st Rd., Xiabian Village, Chang'an Town, Dongguan City,

Guangdong Province, China

Manufacture's name All Best Technology Limited

Address No.9, Yincheng 1st Rd., Xiabian Village, Chang'an Town, Dongguan City,

Guangdong Province, China

Product name Alarm Clock Radio Speaker System

Model name S1pro

FCC CFR47 Part 15 Section 15.247 Standards

Test procedure ANSI C63.10:2013,

**Test Date** Jun.24. 2016 ~ Jul.14. 2016

Date of Issue Jul.15, 2016

Test Result **Pass** 

FCC Registration Number: 371540

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

**Testing Engineer** 

August Qiu

**Technical Manager** 

Hack Ye

**Authorized Signatory** 

Chris Du

August Qiu Hack Ye Cholin



# **Contents**

			Page
2	TEST	Г SUMMARY	5
3	GEN	ERAL INFORMATION	6
	3.1	GENERAL DESCRIPTION OF E.U.T	6
	3.2	CHANNEL LIST	7
	3.3	TEST MODE	8
4	EQU	IPMENT DURING TEST	9
	4.1	EQUIPMENTS LIST	9
	4.2	MEASUREMENT UNCERTAINTY	10
5	CON	DUCTED EMISSION	11
	5.1	E.U.T. OPERATION	11
	5.2	EUT SETUP	11
	5.3	MEASUREMENT DESCRIPTION	11
	5.4	CONDUCTED EMISSION TEST RESULT	12
6	RAD	IATED SPURIOUS EMISSIONS	14
	6.1	EUT OPERATION	14
	6.2	TEST SETUP	15
	6.3	SPECTRUM ANALYZER SETUP	16
	6.4	Test Procedure	17
	6.5	SUMMARY OF TEST RESULTS	18
7	CON	DUCTED SPURIOUS EMISSIONS	24
	7.1	TEST PROCEDURE	24
	7.2	TEST RESULT	24
8	BAN	D EDGE MEASUREMENT	27
	8.1	TEST PROCEDURE	27
	8.2	TEST RESULT	28
9	6DB	BANDWIDTH MEASUREMENT	29
	9.1	TEST PROCEDURE	29
10	MAX	IMUM PEAK OUTPUT POWER	32
	10.1	Test Procedure	32
	10.2	TEST RESULT	32
11	POW	/ER SPECTRAL DENSITY	35
	11.1	Test Procedure	35
	11.2	Test Result	35

RECISE TESTING		Report No.: PTC801186160622E-FC02
12	ANTENNA REQUIREMENT	38




# 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable






# **3 General Information**

# 3.1 General Description of E.U.T

Product Name	:	Alarm Clock Radio Speaker System
Model Name		S1pro
Model Description		N/A
Bluetooth Version	:	V4.0
Operating frequency		2402-2480MHz, 40 channels
Max. RF output power		-7.34dBm
Type of Modulation	:	GFSK
Antenna installation:		PCB printed antenna
Antenna Gain:	:	0.79dBi
Power supply	:	AC 100-240V 50/60Hz 0.65A Max power by adapter
Adapter		Input AC 100-240V 50/60Hz 0.65A Max, Output 5V 3A





# 3.2 Channel List


BLE									
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)		
0	2402	10	2422	20	2442	30	2462		
1	2404	11	2424	21	2444	31	2464		
2	2406	12	2426	22	2446	32	2466		
3	2408	13	2428	23	2448	33	2468		
4	2410	14	2430	24	2450	34	2470		
5	2412	15	2432	25	2452	35	2472		
6	2414	16	2434	26	2454	36	2474		
7	2416	17	2436	27	2456	37	2476		
8	2418	18	2438	28	2458	38	2478		
9	2420	19	2440	29	2460	39	2480		



# 3.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Modulation	Test mode	Low channel	Middle channel	High channel
GFSK(BLE)	Transmitting	2402MHz	2440MHz	2480MHz






# **4 Equipment During Test**

# 4.1 Equipments List

4.1	Equipment	s List								
RF Conducted Test										
Item	Kind of Equipment	Manufactur er	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period			
1	EMC Analyze (9k~26.5GHz)	7 (911011)	E4407B	MY45109572	Aug.04, 2015	Aug.03, 2016	1 year			
2	EXA Signal Analyzer	Keysight	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2015	Aug.03, 2016	1 year			
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year			
Radiat	ted Emissions									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period			
1	EMI Test Receiver	Rohde&Schw arz	ESCI	101417	July 15, 2015	July 14, 2016	1 year			
2	Trilog Broadband Antenna	SCHWARZB ECK	VULB9160	9160-3355	July 15, 2015	July 14, 2016	1 year			
3	Amplifier	EM	EM-30180	060538	July 15, 2015	July 14, 2016	1 year			
4	Horn Antenna	SCHWARZB ECK	BBHA9120 D	9120D- 1246	July 15, 2015	July 14, 2016	1 year			
5	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2015	July 14, 2016	1 year			
6	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2015	July 14, 2016	1 year			
Condu	Conducted Emissions									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period			
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year			
2	LISN	SCHWARZB ECK	NSLK 8128	8128-289	July 15, 2015	July 14, 2016	1 year			
3	Cable	LARGE	RF300	-	July 15, 2015	July 14, 2016	1 year			





# **4.2 Measurement Uncertainty**

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB



#### 5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207

Test Method: : ANSI C63.10:2013

Test Result: ; PASS

Frequency Range: : 150kHz to 30MHz

Class/Severity: : Class B

Limit: :  $66-56 \text{ dB}_{\mu}\text{V}$  between 0.15MHz & 0.5MHz

:  $56 dB\mu V$  between 0.5MHz & 5MHz

: 60 dB<sub>μ</sub>V between 5MHz & 30MHz

Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)

## 5.1 E.U.T. Operation

Operating Environment:

Temperature: : 25.5 °C


Humidity: : 51 % RH

Atmospheric Pressure: : 101.2kPa

EUT Operation: : Refer to section 3.3

#### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2013.

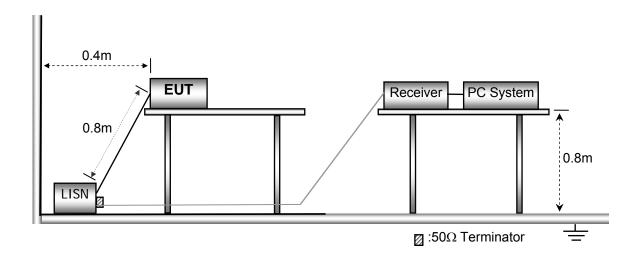


## 5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.




# **5.4 Conducted Emission Test Result**

Live line:

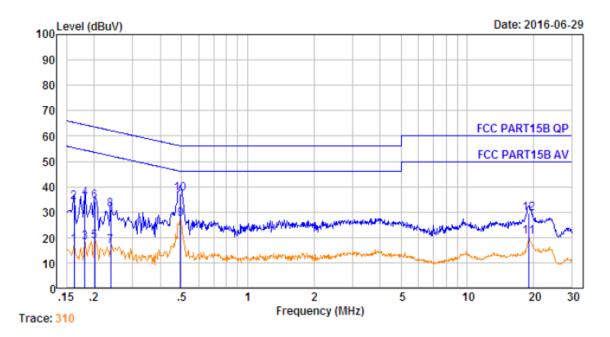


No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBu√	O∨er Limit dB	Remark
1.	0.162	10.60	0.60	5.67	16.87	55.34	-38.47	Average
2.	0.162	10.60	0.60	22.77	33.97	65.34	-31.37	QP -
3.	0.182	10.61	0.60	6.84	18.05	54.42	-36.37	Average
4.	0.182	10.61	0.60	24.04	35.25	64.42	-29.17	QP
5.	0.202	10.61	0.60	7.30	18.51	53.54	-35.03	Average
6.	0.202	10.61	0.60	23.00	34.21	63.54	-29.33	QP
7.	0.238	10.62	0.60	5.35	16.57	52.17	-35.60	Average
8.	0.238	10.62	0.60	19.65	30.87	62.17	-31.30	QP
9.	0.494	10.64	0.60	16.09	27.33	46.10	-18.77	Average
10.	0.494	10.64	0.60	26.19	37.43	56.10	-18.67	QP
11.	19.021	10.78	0.60	8.79	20.17	50.00	-29.83	Average
12.	19.021	10.78	0.60	17.99	29.37	60.00	-30.63	QP

Remark:Emission Level=Receiver Reading+Cable Loss+AMN Factor





## Neutral line:

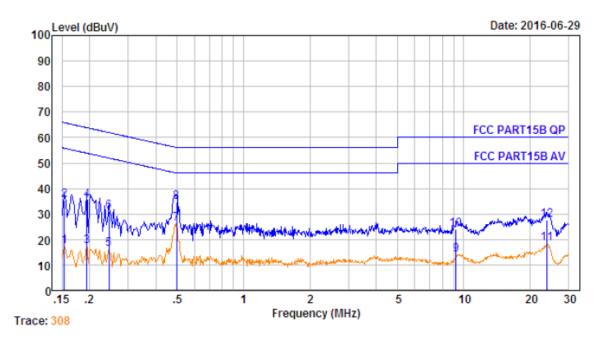

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBu√	Over Limit dB	Remark
1.	0.154	10.60	0.60	6.29	17.49	55.78	-38.29	Average
2.	0.154	10.60	0.60	24.39	35.59	65.78	-30.19	QP -
3.	0.194	10.61	0.60	5.96	17.17	53.84	-36.67	Average
4.	0.194	10.61	0.60	24.06	35.27	63.84	-28.57	QP -
5.	0.246	10.62	0.60	5.15	16.37	51.91	-35.54	Average
6.	0.246	10.62	0.60	19.95	31.17	61.91	-30.74	QP
7.	0.497	10.65	0.60	15.09	26.34	46.05	-19.71	Average
8.	0.497	10.65	0.60	23.49	34.74	56.05	-21.31	QP
9.	9.253	10.76	0.60	2.70	14.06	50.00	-35.94	Average
10.	9.253	10.76	0.60	12.80	24.16	60.00	-35.84	QP
11.	23.888	10.79	0.60	6.88	18.27	50.00	-31.73	Average
12.	23.888	10.79	0.60	16.28	27.67	60.00	-32.33	QP

Remark:Emission Level=Receiver Reading+Cable Loss+AMN Factor



# **6 Radiated Spurious Emissions**

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: : ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE

V03R03

Test Result: : PASS
Measurement Distance: : 3m

Limit: : See the follow table

	Field Strer	ngth	Field Strength Limit at 3m Measurement Dist		
Frequency (MHz)	uV/m Distance uV/m		uV/m	dBuV/m	
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80	
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40	
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40	
30 ~ 88	100	3	100	20log <sup>(100)</sup>	
88 ~ 216	150	3	150	20log <sup>(150)</sup>	
216 ~ 960	200	3	200	20log <sup>(200)</sup>	
Above 960	500	3	500	20log <sup>(500)</sup>	

# 6.1 EUT Operation

Operating Environment:


Temperature: :  $23.5 \, ^{\circ}\text{C}$  Humidity: :  $51.1 \, ^{\circ}\text{RH}$  Atmospheric Pressure: : 101.2kPa

EUT Operation : Refer to section 3.3




## 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site. The test setup for emission measurement below 30MHz.

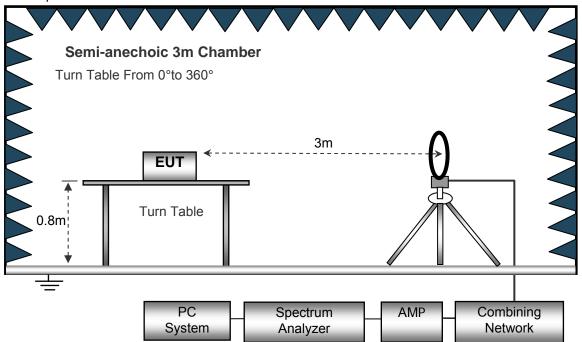


The test setup for emission measurement from 30 MHz to 1 GHz.

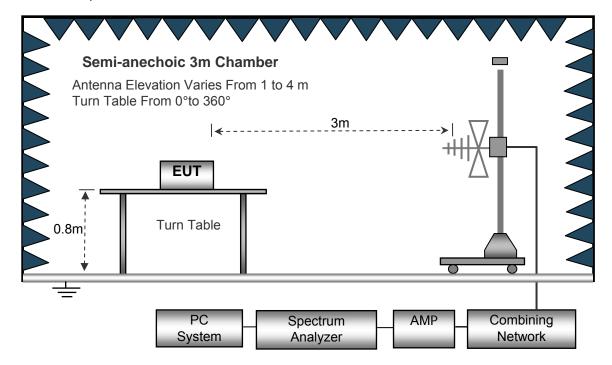



The test setup for emission measurement above 1 GHz.

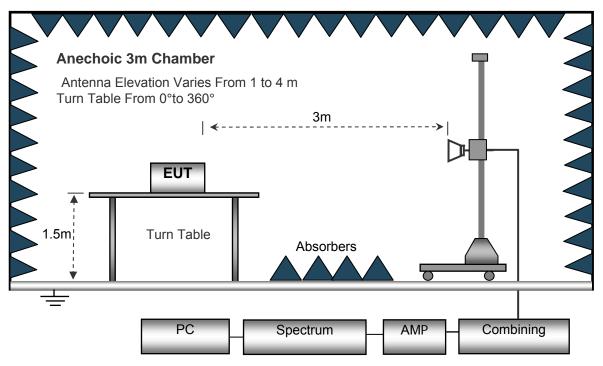

# 6.3 Spectrum Analyzer Setup

Below	30	M	Ηz
-------	----	---	----

	Sweep Speed	. Auto
	IF Bandwidth	.10kHz
	Video Bandwidth	.10kHz
	Resolution Bandwidth	.10kHz
30MHz ~ 1GH	<del>l</del> z	
	Sweep Speed	. Auto
	Detector	.PK
	Resolution Bandwidth	.100kHz
	Video Bandwidth	.300kHz
Above 1GHz		
	Sweep Speed	. Auto
	Detector	.PK
	Resolution Bandwidth	.1MHz
	Video Bandwidth	.3MHz
	Detector	.Ave.
	Resolution Bandwidth	.1MHz
	Video Bandwidth	.10Hz



## 6.4 Test Procedure

- The EUT is placed on a turntable, which is 0.8m above ground plane.with below 1000MHz
   and which is 1.5m above ground plane.with above 1000MHz
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.
- 7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



# 6.5 Summary of Test Results


Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 1GHz

All applicable test modes have been tested and only the worst case (GFSK TX in middle channel) is recorded.

Antenna Polarization: Horizontal

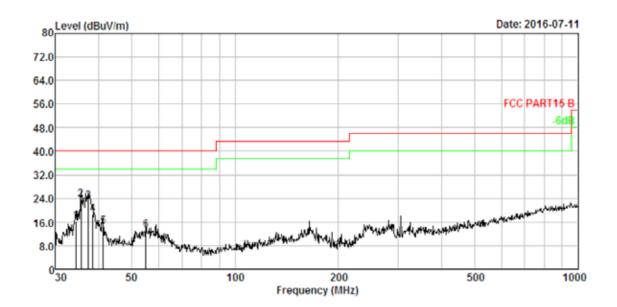


No.	Freq MHz	Cable Loss dB		Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	34.396	1.18	13.36	31.64	30.02	16.16	40.00	-23.84	QP QP
2.	35.624	1.21	13.43	38.95	30.03	23.56	40.00	-16.44	QP
3.	37.416	1.26	13.51	38.40	30.05	23.12	40.00	-16.88	QP
4.	38.481	1.28	13.59	33.93	30.06	18.74	40.00	-21.26	QP
5.	41.277	1.34	13.59	29.50	30.08	14.35	40.00	-25.65	QP
6.	55.027	1.60	11.90	29.84	30.18	13.16	40.00	-26.84	QP

Remark:Emission Level=Receiver Reading+Cable Loss+ANT Factor-AMP Factor



Antenna Polarization: Vertical

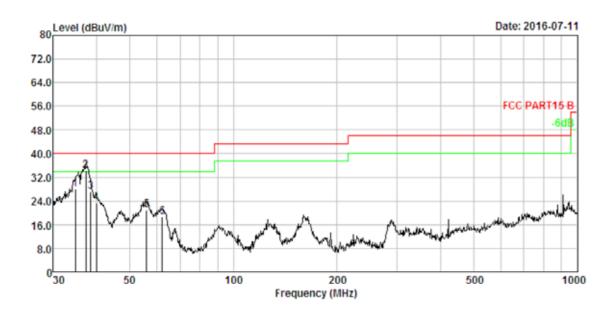

No.	Freq MHz	Cable Loss dB		Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	34.760	1.19	13.38	43.63	30.02	28.18	40.00	-11.82	QP
2.	37.285	1.25	13.50	49.61	30.05	34.31	40.00	-5.69	QP
3.	38.481	1.28	13.59	42.22	30.06	27.03	40.00	-12.97	QP
4.	39.994	1.32	13.71	38.41	30.07	23.37	40.00	-16.63	QP
5.	56.001	1.62	11.96	37.69	30.19	21.08	40.00	-18.92	QP
6.	62.213	1.72	12.02	35.08	30.22	18.60	40.00	-21.40	QP

Remark:Emission Level=Receiver Reading+Cable Loss+ANT Factor-AMP Factor



Test Frequency: 1GHz ~ 18GHz

Remark: only the worst data (GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin	
(MHz)	(dBµV)	(PK/QP/Ave)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
		GFSK(B	LE) Low Chanr	nel			
1184.32	44.94	PK	-18.92	26.02	74.00	-47.98	
1184.32	39.66	Ave	-18.92	20.74	54.00	-33.26	
4804.00	48.63	PK	-1.06	47.57	74.00	-26.43	
4804.00	43.35	Ave	-1.06	42.29	54.00	-11.71	
7206.00	49.63	PK	1.33	50.96	74.00	-23.04	
7206.00	43.06	Ave	1.33	44.39	54.00	-9.61	
		Restricte	d bands Emissi	ion			
2320.41	45.02	PK	-13.19	31.83	74.00	-42.17	
2320.41	39.30	Ave	-13.19	26.11	54.00	-27.89	
2360.47	42.91	PK	-13.14	29.77	74.00	-44.23	
2360.47	38.12	Ave	-13.14	24.98	54.00	-29.02	
2486.05	42.47	PK	-13.08	29.39	74.00	-44.61	
2486.05	40.29	Ave	-13.08	27.21	54.00	-26.79	
Remark: Corre	Remark: Corrected Factor=ANT Factor + Cable Loss – Amp Gain						

Page 20 of 38



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin		
(MHz)	(dBµV)	(PK/QP/Ave)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
		GFSK(	(BLE) Middle Ch	annel				
1184.32	44.30	PK	-18.92	25.38	74.00	-48.62		
1184.32	40.28	Ave	-18.92	21.36	54.00	-32.64		
4880.00	49.43	PK	-0.93	48.50	74.00	-25.50		
4880.00	43.20	Ave	-0.93	42.27	54.00	-11.73		
7320.00	48.63	PK	1.67	50.30	74.00	-23.70		
7320.00	42.66	Ave	1.67	44.33	54.00	-9.67		
		Restri	cted bands Emis	ssion				
2342.14	45.67	PK	-13.19	32.48	74.00	-41.52		
2342.14	40.13	Ave	-13.19	26.94	54.00	-27.06		
2387.88	42.64	PK	-13.14	29.50	74.00	-44.50		
2387.88	37.45	Ave	-13.14	24.31	54.00	-29.69		
2492.53	41.62	PK	-13.08	28.54	74.00	-45.46		
2492.53	41.11	Ave	-13.08	28.03	54.00	-25.97		
Remark: Cor	Remark: Corrected Factor=ANT Factor + Cable Loss – Amp Gain							



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin		
(MHz)	(dBµV)	(PK/QP/Ave)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
		GFSK(B	LE) High Chanr	nel				
1184.32	45.10	PK	-18.92	26.18	74.00	-47.82		
1184.32	40.80	Ave	-18.92	21.88	54.00	-32.12		
4960.00	49.56	PK	-0.87	48.69	74.00	-25.31		
4960.00	43.36	Ave	-0.87	42.49	54.00	-11.51		
7440.00	48.14	PK	1.84	49.98	74.00	-24.02		
7440.00	42.32	Ave	1.84	44.16	54.00	-9.84		
		Restricte	d bands Emissi	on				
2341.04	46.40	PK	-13.19	33.21	74.00	-40.79		
2341.04	40.85	Ave	-13.19	27.66	54.00	-26.34		
2368.77	43.64	PK	-13.14	30.50	74.00	-43.50		
2368.77	38.26	Ave	-13.14	25.12	54.00	-28.88		
2489.68	41.20	PK	-13.08	28.12	74.00	-45.88		
2489.68	41.07	Ave	-13.08	27.99	54.00	-26.01		
Remark: Corre	Remark: Corrected Factor=ANT Factor + Cable Loss – Amp Gain							



Radiated band edge:

Naulateu Dalit	a cage.	T						
Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin		
(MHz)	(dBµV)	(PK/QP/Ave)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
	GFSK(BLE)							
2400.00	48.50	PK	-13.12	35.38	74.00	-38.62		
2400.00	40.91	PK	-13.12	27.79	74.00	-46.21		
2483.50	47.20	PK	-13.06	34.14	74.00	-39.86		
2483.50	42.81	PK	-13.06	29.75	74.00	-44.25		

# **Test Frequency : Above 18GHz**

The measurements were more than 20 dB below the limit and not reported

Remark 1. The testing has been conformed to 10\*2480 =24800MHz.

2. All other emissions more than 30dB below the limit.



ECISE TESTING Report No.: PTC801186160622E-FC02

# 7 Conducted Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10 2013

Test Limit : In any 100 kHz bandwidth outside the frequency band in which the

spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a)

(see Section 15.205(c)).

Test Result : PASS

#### 7.1 Test Procedure

1. Remove the antenna f m the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spect m analyzer:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

#### 7.2 Test Result

Remark: only the worst data(GFSK modulation mode) were reported.



## Low Channel













CISE TESTING Report No.: PTC801186160622E-FC02

# 8 Band Edge Measurement

Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the

restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section

15.205(c)).

Test Method : ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R03

Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the

frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated

measurement, provided the transmitter demonstrates compliance with the

conducted power limits based on the use of RMS averaging over a time

peak conducted power limits. If the transmitter complies with the

interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands,

as defined in §15.205(a), must also comply with the radiated emission

limits specified in §15.209(a) (see §15.205(c)).

Test Mode : Refer to section 3.3

#### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;


2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold




#### 8.2 Test Result

#### GFSK Band edge-left side

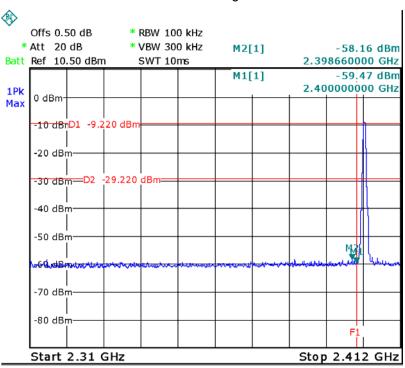

## GFSK Band edge-right side

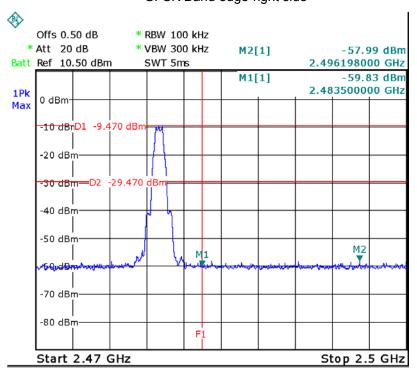



## 9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03

Systems using digital modulation techniques may operate in the 902-928

Test Limit MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB

bandwidth shall be at least 500 kHz.

Test Mode : Refer to section 3.3

#### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;


2. Set the spectrum analyzer: For BLE, RBW = 30 kHz, VBW = 100kHz

#### Test Result


Modulation		Limit		
Modulation	Low Channel	Middle Channel	High Channel	Limit
GFSK(BLE)	0.659	0.659	0.659	≥500kHz





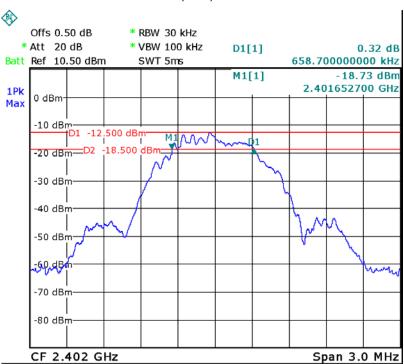


#### GFSK(BLE) Middle Channel

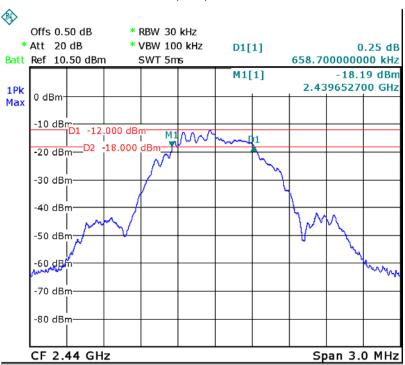



# GFSK(BLE) High Channel

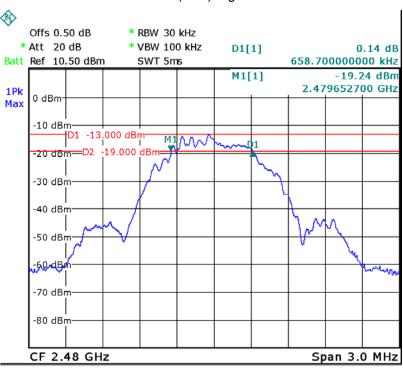



# 10 Maximum Peak Output Power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03

Test Limit :

Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output

power.

Test Mode : Refer to section 3.3

#### **10.1Test Procedure**

KDB 558074 D01 DTS Meas Guidance v03r03

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

a)Set the RBW DTS bandwidth.

b)Set VBW 3 RBW.

c)Set span 3 x RBW


- d)Sweep time = auto couple.
- e)Detector = peak.
- f)Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

#### 10.2Test Result


Modulation	Maximu	Limit		
	Low Channel	Middle Channel	High Channel	LIIIIL
GFSK(BLE)	-7.95	-7.34	-7.93	1W(30dBm)





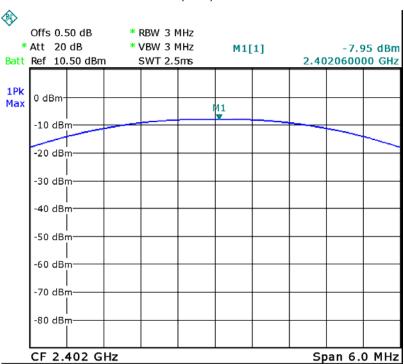


## GFSK(BLE) Middle Channel

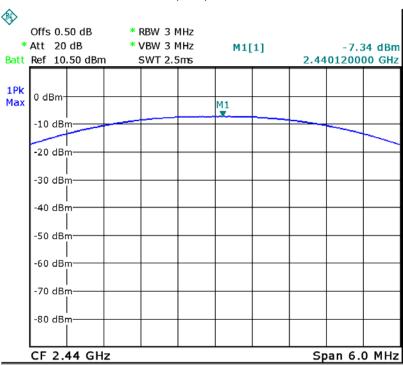



# GFSK(BLE) High Channel

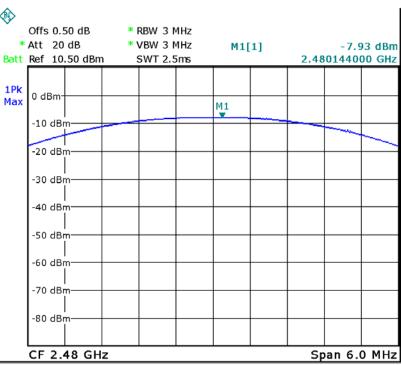



# 11 Power Spectral density

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03

Test Limit : Regulation 15.247(f) The power spectral density conducted from the

intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during

any time interval of continuous transmission.

Test Mode : Refer to section 3.3

#### 11.1 Test Procedure

KDB 558074 D01 DTS Meas Guidance v03r03


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.


- 2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz, Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

#### 11.2 Test Result


Madulation	Power S	Limit		
Modulation	Low Channel	Middle Channel	High Channel	LIIIII
GFSK(BLE)	-23.85	-23.47	-24.57	8dBm/3kHz





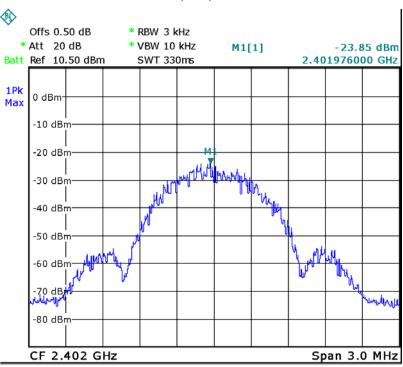


## GFSK(BLE) Middle Channel

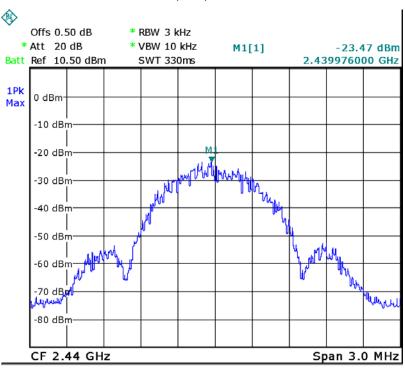



# GFSK(BLE) High Channel

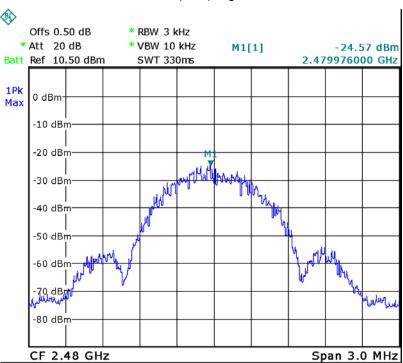



# 12 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an PCB printed antenna which meet the requirement of this section.

\*\*\*\*\*THE END REPORT\*\*\*\*\*