

Certification Test Report

FCC ID: 2AIGCWFB003

FCC Rule Part: 15.247

ISED Canada's Radio Standards Specification: RSS-247

TÜV SÜD Report Number: RD72137771.100

Manufacturer: Murata Electronics Model: PAC-USWHS002-WF-2

Test Begin Date: March 27, 2018 Test End Date: April 05, 2018

Report Issue Date: May 29, 2018



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code AT-1921

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

Prepared by:

Reviewed by:

Jean Tezil EMC Engineer TÜV SÜD America Inc. Randle Sherian EMC Lab Manager TÜV SÜD America Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 33 pages

Report: RD72137771.100 TÜV SÜD America Inc. Page 1 of 33

TABLE OF CONTENTS

| 1 | GENERAL | 3 |
|---|---|--------|
| | 1.1 Purpose | 3 |
| | 1.2 PRODUCT DESCRIPTION | |
| | 1.3 TEST METHODOLOGY AND CONSIDERATIONS | |
| 2 | 2 TEST FACILITIES | 5 |
| _ | | |
| | 2.1 LOCATION | |
| | 2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS 2.3 RADIATED EMISSIONS TEST SITE DESCRIPTION | |
| | 2.3 RADIATED EMISSIONS LEST SITE DESCRIPTION | |
| | 2.4 CONDUCTED EMISSIONS TEST SITE DESCRIPTION | |
| 3 | | |
| J | | |
| 4 | LIST OF TEST EQUIPMENT | 8 |
| 5 | SUPPORT EQUIPMENT | 9 |
| _ | C FOLUDMENT LINDED TECT CETTID DI OCIV DIA CDAM | 0 |
| 6 | 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM | 9 |
| 7 | SUMMARY OF TESTS | 10 |
| | 7.1 Antenna Requirement – FCC: 15.203 | 10 |
| | 7.2 POWER LINE CONDUCTED EMISSIONS – FCC: 15.207; ISED CANADA: RSS-GEN 8.8 | |
| | 7.2.1 Measurement Procedure | 10 |
| | 7.2.2 Measurement Results | |
| | 7.3 6DB / 99% BANDWIDTH – FCC: 15.247(A)(2); ISED CANADA: RSS-247 5.2(1) | |
| | 7.3.1 Measurement Procedure | |
| | 7.3.2 Measurement Results | |
| | 7.4 FUNDAMENTAL EMISSION OUTPUT POWER – FCC: 15.247(B)(3); ISED CANADA: RSS-247 20 | 5.4(4) |
| | 7.4.1 Maximum peak conducted output power - Measurement Procedure | 20 |
| | 7.4.2 Measurement Results | 20 |
| | 7.5 EMISSION LEVELS – FCC: 15.247(D), 15.205, 15.209; ISED CANADA RSS-247 5.5, RSS-G | BEN |
| | 8.9/8.10 | |
| | 7.5.1 Emissions into Non-restricted Frequency Bands | |
| | 7.5.1.1 Measurement Procedure | |
| | 7.5.1.2 Measurement Results | |
| | 7.6 EMISSIONS INTO RESTRICTED FREQUENCY BANDS | |
| | 7.6.1 Measurement Procedure | |
| | 7.6.1.2 Measurement Results | |
| | 7.6.1.3 Sample Calculation: | |
| | 7.7 POWER SPECTRAL DENSITY – FCC: 15.247(E); ISED CANADA: RSS-247 5.2(2) | |
| | 7.7.1 Measurement Procedure | 29 |
| | 7.7.2 Measurement Results | 29 |
| Q | R CONCLUSION | 33 |

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-247 Certification.

1.2 Product Description

The PAC-USWHS002-WF-2 WIFI-BLE adapter is the second generation in its series. It wirelessly monitors and controls a MEUS HVAC unit via WIFI link. This device communicates wirelessly using either 802.11b/g/n WIFI mode or Bluetooth Smart (i.e. BLE) mode.

The current report addresses the evaluation of both BLE and WIFI modes.

Technical Information:

| Detail | Description | | |
|--------------------------|--|--|--|
| Frequency Range | 802.11b/g/n (HT20)/n (HT40): 2412 - 2462 MHz | | |
| Frequency hange | BLE: 2402 – 2480 MHz | | |
| Number of Channels | 802.11b/g/n (HT20)/n (HT40): 11 | | |
| Number of Chamiles | BLE: 40 Channels | | |
| | 802.11b: DSSS (DBPSK / DQPSK / CCK) | | |
| Modulation Format | 802.11g/n (HT20): OFDM (BPSK / QPSK / 16QAM | | |
| Woddiation Format | / 64QAM) | | |
| | BLE: GFSK | | |
| | 802.11b: 1-11Mbps | | |
| Data Rates | 802.11g: 6-54 Mbps | | |
| Data Hates | 802.11n (HT 20): 6.5 – 72 Mbps | | |
| | BLE: 1 Mbps | | |
| Number of Inputs/Outputs | 1T1R | | |
| Operating Voltage | 12Vdc | | |
| Antenna Type / Gain | Inverted-F Antenna/ 3.3 dBi | | |

Manufacturer Information:

Murata Electronics, 3079 Premiere Parkway, Suite 140 Duluth, GA, 30097 USA

EUT Serial Numbers:

RF CE BLE: 8134P008X100119F, RF CE WIFI: 8134P008X100117F, RE BLE: 8134P008X100123F, RE WIFI: 8134P008X100152F.

Test Sample Condition: The test samples were provided in good working order with no visible defects.

Report: RD72137771.100 TÜV SÜD America Inc. Page 3 of 33

1.3 Test Methodology and Considerations

To program the unit for WIFI evaluation, the manufacturer provided commands scripts that are passed to the EUT through a terminal application, such as Putty or Tera term. Specific set of commands lines were created for each configuration indicating the WLAN channel, bandwidth, data rates, and power levels. During this evaluation, the power setting (-1), that was used, represented the highest level according to the manufacturer. The data presented in this report represents the worse case where applicable. The worse case data rates are also indicated in the table below for each mode.

| Mode | Data Rate | Software Power Settings |
|--------------|-----------|----------------------------|
| 802.11b | 11 Mbps | -1 |
| 802.11g | 6 Mbps | -1 |
| 802.11n HT20 | MCS5 | -1 |

For the Bluetooth Low Energy (BLE) evaluation, an interface was provided by the manufacturer which allows to specify the channel frequency, the BLE feature, and the power level. The power setting used during all testing was at 0dBm, which corresponds to the highest power level.

For radiated emissions measurements, the EUT was programmed to generate a continuously modulated signal on each channel investigated. The EUT was evaluated in three orthogonal orientations. The worst-case orientations were the Y-plane for WIFI and X-plane for BLE. See test setup photos for more information.

For RF conducted emissions measurements, the EUT was evaluated using a temporary SMA antenna connector which was tapped into the EUT board to facilitate connection to the test equipment.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America Inc. 2320 Presidential Drive, Suite 101 Durham, NC 27703 Phone: (919) 381-4235

2.2 Laboratory Accreditations/Recognitions/Certifications

TÜV SÜD America Inc. is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1921 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

FCC Registered Test Site Number: 637011

ISED Canada Test Site Registration Number: 20446

Report: RD72137771.100 TÜV SÜD America Inc. Page 5 of 33

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a $2' \times 6' \times 1.5'$ deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4'' PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

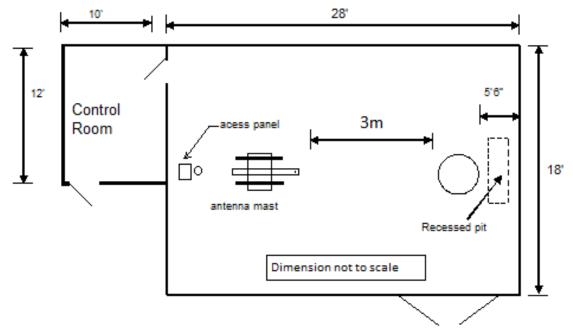


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

Report: RD72137771.100 TÜV SÜD America Inc. Page 6 of 33

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 10' sheet galvanized steel horizontal ground reference plane (GRP) bonded every 6" to an 8' X 8' aluminum vertical ground plane.

A diagram of the room is shown below in figure 2.4-1:

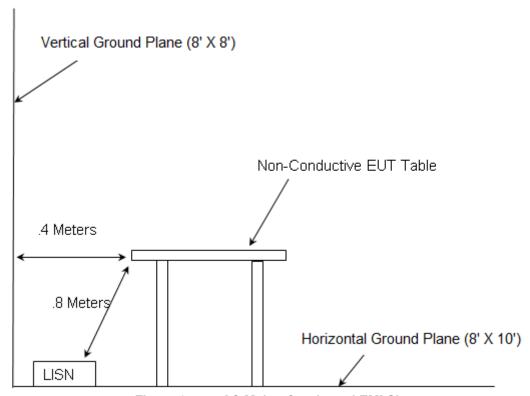


Figure 2.4-1: AC Mains Conducted EMI Site

Report: RD72137771.100 TÜV SÜD America Inc. Page 7 of 33

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ANSÎ C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2017
- US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2017
- FCC KDB 558074 D01 DTS Meas Guidance v04 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, April 5, 2017
- ISED Canada Radio Standards Specification: RSS-247, Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices, Issue 2, Feb 2017
- ISED Canada Radio Standards Specification: RSS-GEN General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

| Asset ID | Manufacturer | Model # | Equipment Type | Serial # | Last Calibration Date | Calibration Due Date |
|----------|---------------------------------|---------------------------|-------------------|------------|-----------------------------|-------------------------|
| DEMC0277 | EMCO | 93146 | Antennas | 9904-5199 | 9/12/2016 | 9/12/2018 |
| DEMC0626 | EMCO | 3110B | Antennas | 9411-1945 | 3/21/2017 | 3/21/2019 |
| DEMC3002 | Rohde & Schwarz | ESU40 | Receiver | 100346 | 7/24/2017 | 7/24/2018 |
| DEMC3006 | Rohde & Schwarz | TS-PR18 | Amplifiers | 122006 | 1/10/2018 | 1/10/2019 |
| DEMC3007 | Rohde & Schwarz | TS-PR26 | Amplifiers | 100051 | 1/10/2018 | 1/10/2019 |
| DEMC3008 | Rohde & Schwarz | NRP2 | Meter | 103131 | 2/15/2018 | 2/15/2019 |
| DEMC3009 | Rohde & Schwarz | NRP-Z81 | Meter | 102397 | 2/15/2018 | 2/15/2019 |
| DEMC3011 | Rohde & Schwarz | ENV216 | LISN | 3011 | 1/10/2018 | 1/10/2019 |
| DEMC3012 | Rohde & Schwarz | EMC32-EB | Software | 100731 | NCR | NCR |
| DEMC3016 | Fei Teng Wireless Technology | HA-07M18G-NF | Antennas | 2013120203 | 2/7/2018 | 2/7/2020 |
| DEMC3027 | Micro-Tronics | BRM50702 | Filter | 175 | 1/7/2018 | 1/7/2019 |
| DEMC3032 | Hasco, Inc. | HLL142-S1-S1- 192/WA | Cables | 3075 | 1/9/2018 | 1/9/2019 |
| DEMC3037 | Hasco, Inc. | HLL142-S1-S1-18 | Cables | 6367 | 1/9/2018 | 1/9/2019 |
| DEMC3038 | Florida RF Labs | NMSE-290AW- 60.0-NMSE | Cable Set | 1448 | 1/5/2018 | 1/5/2019 |
| DEMC3039 | Florida RF Labs | NMSE-290AW- 396.0-NMSE | Cable Set | 1447 | 1/5/2018 | 1/5/2019 |
| DEMC3048 | Aeroflex Inmet | 26AH-06 | Attenuator | 1447 | 1/9/2018 | 1/9/2019 |
| DEMC3049 | Aeroflex Inmet | 26AH-20 | Attenuator | 1443 | 1/9/2018 | 1/9/2019 |
| DEMC3051 | Mountain View Cable | BMS-RG400- 264.0-BMS | Cables | 3051 | 1/8/2018 | 1/8/2019 |
| DEMC3055 | Rohde & Schwarz | 3005 | Cables | 3055 | 1/8/2018 | 1/8/2019 |
| DEMC3057 | Advanced Technical Materials | 42-441-6/BR | Antennas | R110602 | NCR | NCR |
| DEMC3059 | Mountain View Cable | А | Cables | 3059 | 1/9/2018 | 1/9/2019 |
| DEMC3085 | Rohde & Schwarz | FSW43 | Spectrum Analyzer | 103997 | 3/15/2018 | 3/15/2019 |

NCR = No Calibration Required

DMAS MT-25 RF absorber material was used on the floor for all final measurements above 1 GHz.

Asset DEMC3002: Firmware Version: ESU40 is 4.73 SP4 Asset DEMC3012: Software Version: EMC32-B is 9.15 Asset DEMC3085: Instrument Firmware 2.90 SP1

Report: RD72137771.100 TÜV SÜD America Inc. Page 8 of 33

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

| Item | Equipment Type Manufacturer | | Model Number | Serial Number |
|------|-----------------------------|--|---------------------------|------------------------------------|
| 1 | EUT | Murata ElectronicsMu rata Electronic S | PAC- USWHS002-WF- 2 | (See sect 1.2: EUT serial numbers) |
| 2 | Bench Power Supply | Sorensen | QRD20-4 | 2716 |
| 3 | EUT Power supply | Volgen | SPU10-105 | TUV #6 |
| 4 | Computer | Dell | Latitude D630 | G03F3F1 |

Table 5-2: Cable Description

| Cable # | Cable Type | Length | Shield | Termination |
|---------|--------------|--------|--------|-------------|
| Α | Power cable | 1.87 m | No | 1 to 3 |
| В | Power supply | 1 m | No | 1 to 2 |
| С | USB cable | 1.8 m | No | 1 to 4 |

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

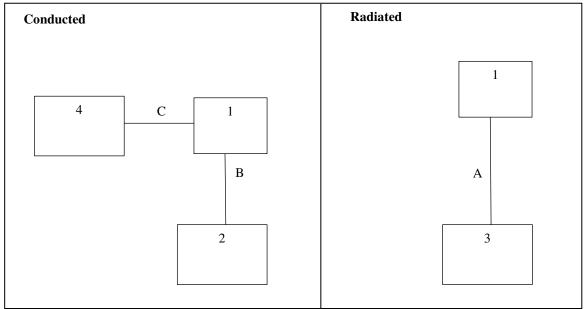


Figure 6-1: Test Setup Block Diagram

Report: RD72137771.100 TÜV SÜD America Inc. Page 9 of 33

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: 15.203

The inverted-F antenna is an integral part of the PCB board of the device. Therefore, the antenna meets the requirement of Section 15.203.

7.2 Power Line Conducted Emissions – FCC: 15.207; ISED Canada: RSS-Gen 8.8

7.2.1 Measurement Procedure

ANSI C63.10-2013 section 6 was the guiding document for this evaluation. Conducted emissions were evaluated from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss Margin = Applicable Limit - Corrected Reading

7.2.2 Measurement Results

Performed by: Charles Callis

Table 7.2.2-1: Conducted EMI Results – Line 1

| Frequency | QuasiPeak | Average | Limit | Margin | Meas. | Bandwidth | Line | Filter | Corr. |
|-----------|-----------|---------|--------|--------|--------------|-----------|------|--------|-------|
| (MHz) | (dBμV) | (dBµV) | (dBµV) | (dB) | Time (ms) | (kHz) | | | (dB) |
| 0.206000 | | 42.83 | 53.17 | 10.34 | 5000.0 | 9.000 | L1 | OFF | 9.6 |
| 0.206000 | 55.08 | | 63.20 | 8.12 | 5000.0 | 9.000 | L1 | OFF | 9.6 |
| 0.312000 | | 36.03 | 49.68 | 13.65 | 5000.0 | 9.000 | L1 | OFF | 9.6 |
| 0.312000 | 44.85 | I | 59.72 | 14.87 | 5000.0 | 9.000 | L1 | OFF | 9.6 |
| 0.412000 | | 31.30 | 47.48 | 16.18 | 5000.0 | 9.000 | L1 | OFF | 9.7 |
| 0.412000 | 38.76 | - | 57.50 | 18.74 | 5000.0 | 9.000 | L1 | OFF | 9.7 |
| 0.520000 | | 29.10 | 46.00 | 16.90 | 5000.0 | 9.000 | L1 | OFF | 9.7 |
| 0.520000 | 35.79 | | 56.00 | 20.21 | 5000.0 | 9.000 | L1 | OFF | 9.7 |
| 0.624000 | | 24.11 | 46.00 | 21.89 | 5000.0 | 9.000 | L1 | OFF | 9.7 |
| 0.624000 | 28.92 | | 56.00 | 27.08 | 5000.0 | 9.000 | L1 | OFF | 9.7 |
| 0.828000 | | 18.61 | 46.00 | 27.39 | 5000.0 | 9.000 | L1 | OFF | 9.7 |
| 0.828000 | 24.26 | | 56.00 | 31.74 | 5000.0 | 9.000 | L1 | OFF | 9.7 |
| 3.428000 | | 17.56 | 46.00 | 28.44 | 5000.0 | 9.000 | L1 | OFF | 9.8 |
| 3.428000 | 25.77 | - | 56.00 | 30.23 | 5000.0 | 9.000 | L1 | OFF | 9.8 |
| 4.256000 | | 20.92 | 46.00 | 25.08 | 5000.0 | 9.000 | L1 | OFF | 9.9 |
| 4.256000 | 26.57 | - | 56.00 | 29.43 | 5000.0 | 9.000 | L1 | OFF | 9.9 |
| 7.782000 | | 22.87 | 50.00 | 27.13 | 5000.0 | 9.000 | L1 | OFF | 10.0 |
| 7.782000 | 26.98 | I | 60.00 | 33.02 | 5000.0 | 9.000 | L1 | OFF | 10.0 |
| 29.570000 | | 18.36 | 50.00 | 31.64 | 5000.0 | 9.000 | L1 | OFF | 10.2 |
| 29.570000 | 25.49 | - | 60.00 | 34.51 | 5000.0 | 9.000 | L1 | OFF | 10.2 |

Report: RD72137771.100 TÜV SÜD America Inc. Page 10 of 33

Table 7.2.2-2: Conducted EMI Results – Line 2

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dBμV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|--------------------|---------------------|-------------------|-----------------|----------------|-----------------------|--------------------|------|--------|---------------|
| 0.210000 | | 37.60 | 53.00 | 15.40 | 5000.0 | 9.000 | N | OFF | 9.6 |
| 0.210000 | 46.56 | | 63.04 | 16.48 | 5000.0 | 9.000 | N | OFF | 9.6 |
| 0.408000 | | 22.98 | 47.55 | 24.57 | 5000.0 | 9.000 | N | OFF | 9.6 |
| 0.408000 | 34.40 | | 57.58 | 23.18 | 5000.0 | 9.000 | N | OFF | 9.6 |
| 0.516000 | | 25.69 | 46.00 | 20.31 | 5000.0 | 9.000 | N | OFF | 9.6 |
| 0.516000 | 32.97 | | 56.00 | 23.03 | 5000.0 | 9.000 | N | OFF | 9.6 |
| 0.616000 | | 22.74 | 46.00 | 23.26 | 5000.0 | 9.000 | N | OFF | 9.6 |
| 0.616000 | 28.97 | | 56.00 | 27.03 | 5000.0 | 9.000 | N | OFF | 9.6 |
| 0.928000 | | 22.37 | 46.00 | 23.63 | 5000.0 | 9.000 | N | OFF | 9.7 |
| 0.928000 | 28.39 | I | 56.00 | 27.61 | 5000.0 | 9.000 | N | OFF | 9.7 |
| 1.440000 | | 11.67 | 46.00 | 34.33 | 5000.0 | 9.000 | N | OFF | 9.7 |
| 1.440000 | 21.89 | | 56.00 | 34.11 | 5000.0 | 9.000 | N | OFF | 9.7 |
| 3.304000 | | 23.27 | 46.00 | 22.73 | 5000.0 | 9.000 | N | OFF | 9.8 |
| 3.304000 | 31.11 | | 56.00 | 24.89 | 5000.0 | 9.000 | N | OFF | 9.8 |
| 4.956000 | | 24.73 | 46.00 | 21.27 | 5000.0 | 9.000 | N | OFF | 9.8 |
| 4.956000 | 27.82 | | 56.00 | 28.18 | 5000.0 | 9.000 | N | OFF | 9.8 |
| 6.818000 | | 27.40 | 50.00 | 22.60 | 5000.0 | 9.000 | N | OFF | 9.9 |
| 6.818000 | 30.64 | | 60.00 | 29.36 | 5000.0 | 9.000 | N | OFF | 9.9 |
| 28.826000 | | 24.22 | 50.00 | 25.78 | 5000.0 | 9.000 | N | OFF | 10.2 |
| 28.826000 | 30.64 | | 60.00 | 29.36 | 5000.0 | 9.000 | N | OFF | 10.2 |

7.3 6dB / 99% Bandwidth - FCC: 15.247(a)(2); ISED Canada: RSS-247 5.2(1)

7.3.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to \geq 3 times the RBW. The trace was set to max hold with a peak detector active. The marker-delta function of the spectrum analyzer was utilized to determine the 6dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth.

7.3.2 Measurement Results

Performed by Jean Tezil

Table 7.2.2-1: 6dB / 99% Bandwidth - 802.11b

| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|--------------------|------------------------|------------------------|
| 2412 | 9.032 | 14.016 |
| 2437 | 9.046 | 14.008 |
| 2462 | 8.094 | 14.001 |




Figure 7.2.2-1: 6dB Bandwidth - 802.11b - 2412 MHz




Figure 7.2.2-2: 6dB Bandwidth - 802.11b - 2437 MHz

Report: RD72137771.100 TÜV SÜD America Inc. Page 12 of 33




Figure 7.2.2-3: 6dB Bandwidth - 802.11b - 2462 MHz




Figure 7.2.2-4: 99% Bandwidth - 802.11b - 2412 MHz




Figure 7.2.2-5: 99% Bandwidth – 802.11b – 2437 MHz




Figure 7.2.2-6: 99% Bandwidth – 802.11b – 2462 MHz

Table 7.2.2-2: 6dB / 99% Bandwidth - 802.11g

| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|--------------------|------------------------|------------------------|
| 2412 | 16.320 | 16.409 |
| 2437 | 16.333 | 16.398 |
| 2462 | 16.299 | 16.422 |




Figure 7.2.2-7: 6dB Bandwidth – 802.11g – 2412 MHz




Figure 7.2.2-8: 6dB Bandwidth - 802.11g - 2437 MHz




Figure 7.2.2-9: 6dB Bandwidth – 802.11g – 2462 MHz




Figure 7.2.2-10: 99% Bandwidth - 802.11g - 2412 MHz

Report: RD72137771.100 TÜV SÜD America Inc. Page 14 of 33




Figure 7.2.2-11: 99% Bandwidth – 802.11g – 2437 MHz





Figure 7.2.2-12: 99% Bandwidth - 802.11g - 2462 MHz

Table 7.2.2-3: 6dB / 99% Bandwidth - 802.11n (HT20)


| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|--------------------|------------------------|------------------------|
| 2412 | 17.211 | 17.503 |
| 2437 | 17.228 | 17.560 |
| 2462 | 16.933 | 17.523 |



Spectrum 2 Spectrum 3 MultiView Spectrum 11:00:37 29.03.2018

Figure 7.2.2-13: 6dB Bandwidth – 802.11n (HT20) – 2412 MHz

Figure 7.2.2-14: 6dB Bandwidth - 802.11n (HT20) - 2437 MHz






Figure 7.2.2-15: 6dB Bandwidth – 802.11n (HT20) – 2462 MHz Figure 7.2.2-16: 99% Bandwidth – 802.11n (HT20) – 2412 MHz

TÜV SÜD America Inc. Report: RD72137771.100

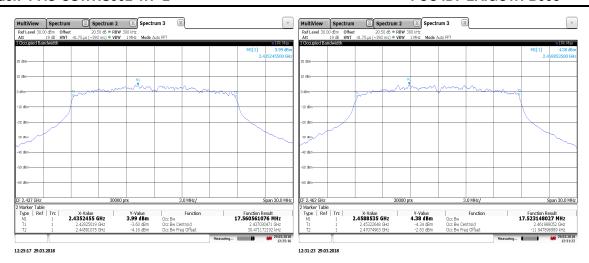


Figure 7.2.2-17: 99% Bandwidth – 802.11n (HT20) – 2437 MHz Figure 7.2.2-18: 99% Bandwidth – 802.11n (HT20) – 2462 MHz

Table 7.2.2-4: 6dB / 99% Bandwidth - BLE

| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|--------------------|------------------------|------------------------|
| 2402 | 1.927 | 2.266 |
| 2440 | 1.904 | 2.284 |
| 2480 | 1.913 | 2.280 |




Figure 7.2.2-19: 6dB Bandwidth – BLE – 2402 MHz




Figure 7.2.2-20: 6dB Bandwidth - BLE - 2440 MHz




Figure 7.2.2-21: 6dB Bandwidth - BLE - 2480 MHz




Figure 7.2.2-22: 99% Bandwidth - BLE - 2402 MHz








Figure 7.2.2-24: 99% Bandwidth - BLE - 2480 MHz

7.4 Fundamental Emission Output Power – FCC: 15.247(b)(3); ISED Canada: RSS-247 5.4(4)

7.4.1 Maximum peak conducted output power - Measurement Procedure

The maximum peak conducted output power was measured in accordance with FCC KDB 558074 D01 DTS Measurement Guidance utilizing the PKPM1 Peak power meter method. The RF output of the equipment under test was directly connected to the input of the peak power meter applying suitable attenuation.

7.4.2 Measurement Results

Performed by Jean Tezil

Table 7.3.2-1: Maximum Peak Conducted Output Power - 802.11b

| Frequency (MHz) | Output Power (dBm) |
|--------------------|-----------------------|
| 2412 | 20.49 |
| 2437 | 20.19 |
| 2462 | 22.64 |

Table 7.3.2-2: Maximum Peak Conducted Output Power - 802.11g

| Frequency (MHz) | Output Power (dBm) |
|--------------------|-----------------------|
| 2412 | 24.71 |
| 2437 | 24.41 |
| 2462 | 24.20 |

Table 7.3.2-3: Maximum Peak Conducted Output Power – 802.11n (HT20)

| Frequency (MHz) | Output Power (dBm) |
|--------------------|-----------------------|
| 2412 | 24.06 |
| 2437 | 24.50 |
| 2462 | 24.47 |

Table 7.3.2-4: Maximum Peak Conducted Output Power – BLE

| Frequency (MHz) | Output Power (dBm) |
|--------------------|-----------------------|
| 2402 | 8.05 |
| 2440 | 7.47 |
| 2480 | 7.28 |

Report: RD72137771.100 TÜV SÜD America Inc. Page 20 of 33

7.5 Emission Levels – FCC: 15.247(d), 15.205, 15.209; ISED Canada RSS-247 5.5, RSS-Gen 8.9/8.10

7.5.1 Emissions into Non-restricted Frequency Bands

7.5.1.1 Measurement Procedure

The unwanted emissions into non-restricted bands were measured conducted in accordance with FCC KDB 558074 D01 DTS Measurement Guidance. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to \geq 300 kHz. The trace was set to max hold with a peak detector active. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 20 dBc limit. The spectrum span was then adjusted for the measurement of spurious emissions from 30 MHz to 25GHz, 10 times the highest fundamental frequency. Additionally, a pre-scan was performed from 9 kHz or the lowest frequency generated to 30 MHz.

Band-edge compliance was determined using the conducted marker-delta method in which the radio frequency power that is produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

7.5.1.2 Measurement Results

Performed by Jean Tezil

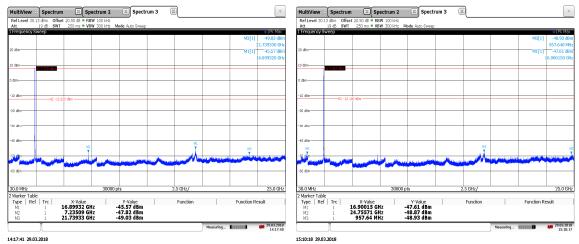


Figure 7.5.1.2-1: 30 MHz - 25 GHz - 802.11b - 2412 MHz

Figure 7.5.1.2-2: 30 MHz - 25 GHz - 802.11b - 2437 MHz

Report: RD72137771.100 TÜV SÜD America Inc. Page 21 of 33

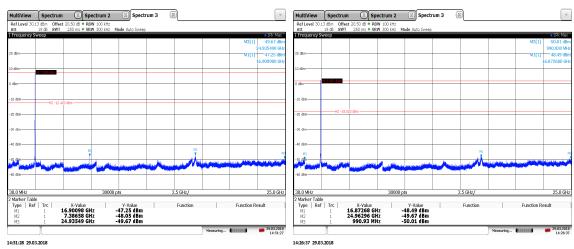


Figure 7.5.1.2-3: 30 MHz - 25 GHz - 802.11b - 2462 MHz

Figure 7.5.1.2-4: 30 MHz - 25 GHz - 802.11g - 2412 MHz

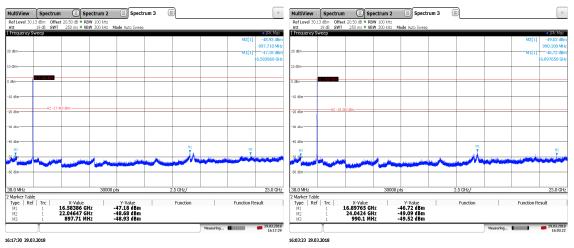


Figure 7.5.1.2-5: 30 MHz – 25 GHz – 802.11g – 2437 MHz

Figure 7.5.1.2-6: 30 MHz - 25 GHz - 802.11g - 2462 MHz

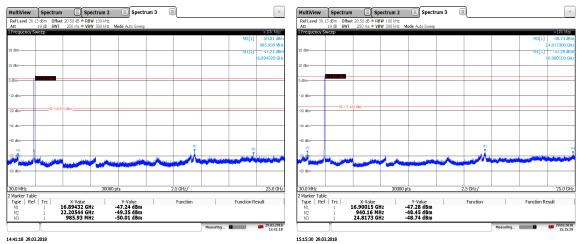


Figure 7.5.1.2-7: 30 MHz – 25 GHz – 802.11n (HT20) – 2412 MHz

Figure 7.5.1.2-8:30 MHz – 25 GHz – 802.11n (HT20) – 2437 MHz




Figure 7.5.1.2-9: 30 MHz - 25 GHz - 802.11n (HT20) - 2462 MHz




Figure 7.5.1.2-10: 30 MHz - 25 GHz - BLE - 2402 MHz




Figure 7.5.1.2-11: 30 MHz - 25 GHz - BLE - 2440 MHz




Figure 7.5.1.2-12: 30 MHz - 25 GHz - BLE - 2480 MHz





Figure 7.5.1.2-13: Lower Band-edge - 802.11b - 2412 MHz




Figure 7.5.1.2-14: Upper Band-edge - 802.11b - 2462 MHz



MultiView Spectrum Spectrum 2 Spectrum 3 🗵

Figure 7.5.1.2-15: Lower Band-edge - 802.11g - 2412 MHz

Figure 7.5.1.2-16: Upper Band-edge - 802.11g - 2462 MHz






Figure 7.5.1.2-17: Lower Band-edge – 802.11n (HT20) – 2412 MHz Figure 7.5.1.2-18: Upper Band-edge – 802.11n (HT20) – 2462 MHz






Figure 7.5.1.2-19: Lower Band-edge - BLE - 2402 MHz

Figure 7.5.1.2-20: Upper Band-edge -- BLE - 2480 MHz

7.6 Emissions into Restricted Frequency Bands

7.6.1 Measurement Procedure

The unwanted emissions into restricted bands were measured radiated over the frequency range of 30MHz to 25GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a RBW of 120 kHz and a VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

7.6.1.1 Duty Cycle Correction

The Duty Cycle Correction was not required for Wi-Fi.

A duty cycle correction factor -26.576dB was applied for the BLE radio and was based on the calculations below using data from the manufacturer provided theory of operation.

Maximum duty cycle is calculated as (176us / 3.75ms) = 0.0469. Duty cycle derating factor in dB = 20 * log (0.0469) = -26.576 dB.

7.6.1.2 Measurement Results

Performed by Charles Callis

Table 7.6.1.3-1: Radiated Spurious Emissions Tabulated Data - 802.11b

| Frequency (dBuV) | | Antenna Polarity | Correction Factors | Corrected Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | | |
|---------------------------|-------------------------|---------------------|--------------------|-----------------------------|-------|-------------------|------|----------------|------|---------|
| (| pk | Qpk/Avg | (H/V) | (dB) | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| | Low Channel = 2412 MHz | | | | | | | | | |
| 2390 | 69.2 | 55.3 | Н | -3.88 | 65.32 | 51.42 | 74.0 | 54.0 | 8.7 | 2.6 |
| Middle Channel = 2437 MHz | | | | | | | | | | |
| 4874 | 41.50 | 26.90 | V | 2.61 | 44.11 | 29.51 | 74.0 | 54.0 | 29.9 | 24.5 |
| 7311 | 51.10 | 34.90 | Н | 7.22 | 58.32 | 42.12 | 74.0 | 54.0 | 15.7 | 11.9 |
| 7311 | 51.00 | 35.20 | ٧ | 7.22 | 58.22 | 42.42 | 74.0 | 54.0 | 15.8 | 11.6 |
| | High Channel = 2462 MHz | | | | | | | | | |
| 2483.5 | 69.1 | 55.1 | Н | -3.66 | 65.44 | 51.44 | 74.0 | 54.0 | 8.6 | 2.6 |
| 4924 | 42.9 | 27.6 | Н | 2.59 | 45.49 | 30.19 | 74.0 | 54.0 | 28.5 | 23.8 |
| 4924 | 44.60 | 28.90 | V | 2.59 | 47.19 | 31.49 | 74.0 | 54.0 | 26.8 | 22.5 |
| 7386 | 48.00 | 36.00 | Н | 7.39 | 55.39 | 43.39 | 74.0 | 54.0 | 18.6 | 10.6 |
| 7386 | 48.70 | 33.70 | V | 7.39 | 56.09 | 41.09 | 74.0 | 54.0 | 17.9 | 12.9 |

Report: RD72137771.100 TÜV SÜD America Inc. Page 25 of 33

Table 7.6.1.3-2: Radiated Spurious Emissions Tabulated Data – 802.11g

| Table Florite El Hadiated Opanious Elinosistic Tabalated Bata Goziff | | | | | | | | | | | |
|--|---------------------------|-----------------|-------|-------------------------|-------|--------------------------|------|-------------------|------|----------------|--|
| Frequency (MHz) | | Level (dBuV) | | Antenna Concetion (| | Corrected Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
| (101112) | pk | Qpk/Avg | (H/V) | (dB) | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg | |
| Low Channel = 2412 MHz | | | | | | | | | | | |
| 2390 | 70.10 | 55.80 | Н | -3.88 | 66.22 | 51.92 | 74.0 | 54.0 | 7.8 | 2.1 | |
| | Middle Channel = 2437 MHz | | | | | | | | | | |
| 7311 | 45.30 | 29.40 | Н | 7.22 | 52.52 | 36.62 | 74.0 | 54.0 | 21.5 | 17.4 | |
| 7311 | 45.20 | 29.80 | V | 7.22 | 52.42 | 37.02 | 74.0 | 54.0 | 21.6 | 17.0 | |
| High Channel = 2462 MHz | | | | | | | | | | | |
| 2483.5 | 69.4 | 55.3 | Н | -3.66 | 65.74 | 51.64 | 74.0 | 54.0 | 8.3 | 2.4 | |
| 7386 | 43.60 | 28.80 | Н | 7.39 | 50.99 | 36.19 | 74.0 | 54.0 | 23.0 | 17.8 | |
| 7386 | 44.00 | 29.00 | V | 7.39 | 51.39 | 36.39 | 74.0 | 54.0 | 22.6 | 17.6 | |

Table 7.6.1.3-3: Radiated Spurious Emissions Tabulated Data – 802.11n (HT20)

| Tubio Tiorno di Tudidico Opuriodo Emissiono Tubaldico Butta Obertini (11120) | | | | | | | | | | |
|--|---------------------------|---------|---------------------|--------------------|---------------|---------|-------------------|---------|----------------|---------|
| Frequency (MHz) | Level (dBuV) | | Antenna Polarity | Correction Factors | 0000.00 20.00 | | Limit (dBuV/m) | | Margin (dB) | |
| (1011 12) | pk | Qpk/Avg | (H/V) | (dB) | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| | Low Channel = 2412 MHz | | | | | | | | | |
| 2390 | 72.9 | 55.4 | Н | -3.88 | 69.02 | 51.52 | 74.0 | 54.0 | 5.0 | 2.5 |
| 12060 | 37.30 | 23.50 | Н | 11.73 | 49.03 | 35.23 | 74.0 | 54.0 | 25.0 | 18.8 |
| 14472 | 37.90 | 26.90 | V | 12.97 | 50.87 | 39.87 | 74.0 | 54.0 | 23.1 | 14.1 |
| | Middle Channel = 2437 MHz | | | | | | | | | |
| 7311 | 42.10 | 30.40 | Н | 7.22 | 49.32 | 37.62 | 74.0 | 54.0 | 24.7 | 16.4 |
| 7311 | 43.40 | 29.70 | V | 7.22 | 50.62 | 36.92 | 74.0 | 54.0 | 23.4 | 17.1 |
| High Channel = 2462 MHz | | | | | | | | | | |
| 2483.5 | 69.3 | 55 | Н | -3.66 | 65.64 | 51.34 | 74.0 | 54.0 | 8.4 | 2.7 |
| 7386 | 43.20 | 35.70 | Н | 7.39 | 50.59 | 43.09 | 74.0 | 54.0 | 23.4 | 10.9 |
| 7386 | 42.80 | 31.40 | V | 7.39 | 50.19 | 38.79 | 74.0 | 54.0 | 23.8 | 15.2 |

Report: RD72137771.100 TÜV SÜD America Inc. Page 26 of 33

Table 7.6.1.3-4: Radiated Spurious Emissions Tabulated Data – BLE

| Frequency (dBuV) | | Antenna Polarity | Correction Factors | Corrected Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | | |
|------------------|---------------------------|---------------------|--------------------|-----------------------------|-------|-------------------|------|----------------|------|---------|
| (| pk | Qpk/Avg | (H/V) | (dB) | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| | Low Channel = 2402 MHz | | | | | | | | | |
| 2390 | 68.60 | 54.80 | Н | -3.88 | 64.72 | 24.35 | 74.0 | 54.0 | 9.3 | 29.7 |
| 4804 | 56.30 | 49.30 | Н | 2.64 | 58.94 | 25.36 | 74.0 | 54.0 | 15.1 | 28.6 |
| 4804 | 48.60 | 40.60 | ٧ | 2.64 | 51.24 | 16.66 | 74.0 | 54.0 | 22.8 | 37.3 |
| | Middle Channel = 2440 MHz | | | | | | | | | |
| 4880 | 56.80 | 49.50 | Н | 2.61 | 59.41 | 25.53 | 74.0 | 54.0 | 14.6 | 28.5 |
| 4880 | 49.70 | 41.60 | ٧ | 2.61 | 52.31 | 17.63 | 74.0 | 54.0 | 21.7 | 36.4 |
| 7320 | 44.40 | 33.00 | Н | 7.24 | 51.64 | 13.66 | 74.0 | 54.0 | 22.4 | 40.3 |
| | High Channel = 2480 MHz | | | | | | | | | |
| 2483.5 | 74.00 | 59.40 | Н | -3.66 | 70.34 | 29.16 | 74.0 | 54.0 | 3.7 | 24.8 |
| 2483.5 | 68.90 | 55.10 | V | -3.66 | 65.24 | 24.86 | 74.0 | 54.0 | 8.8 | 29.1 |
| 4960 | 57.60 | 50.20 | Н | 2.58 | 60.18 | 26.20 | 74.0 | 54.0 | 13.8 | 27.8 |
| 4960 | 50.20 | 41.80 | V | 2.58 | 52.78 | 17.80 | 74.0 | 54.0 | 21.2 | 36.2 |
| 7440 | 49.50 | 40.10 | Н | 7.51 | 57.01 | 21.03 | 74.0 | 54.0 | 17.0 | 33.0 |

Duty cycle: 4.69%

Report: RD72137771.100 TÜV SÜD America Inc. Page 27 of 33

7.6.1.3 Sample Calculation:

 $R_C = R_U + CF_T$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

 R_U = Uncorrected Reading R_C = Corrected Level AF = Antenna Factor CA = Cable Attenuation AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Peak – WIFI (Table 7.6.1.3-1)

Corrected Level: 69.2 dBuV/m - 3.88 dB = 65.32 dBuV/m

Margin: 74dBuV/m - 65.32dBuV/m = 8.68dB

Example Calculation: Average – WIFI (Table 7.6.1.3-1)

Corrected Level: 55.3dBuV/m - 3.88dB = 51.42dBuV

Margin: 54dBuV - 45.56 dBuV = 2.58dB

Example Calculation: Peak – BLE (Table 7.6.1.3-4)

Corrected Level: 68.6dBuV/m - 3.88dB = 64.72dBuV/m

Margin: 74dBuV/m - 64.72dBuV/m = 9.28dB

Example Calculation: Average – BLE (Table 7.6.1.3-4)

Corrected Level: 54.8 dBuV/m - 3.88 dB - 26.576 dB = 24.344 dBuV

Margin: 54dBuV - 24.344dBuV - = 29.656dB

7.7 Power Spectral Density – FCC: 15.247(e); ISED Canada: RSS-247 5.2(2)

7.7.1 Measurement Procedure


The power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance utilizing the PKPSD (peak PSD) method. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 10 kHz. The Video Bandwidth (VBW) was set to 30 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active.

7.7.2 Measurement Results

Performed by Jean Tezil

Table 7.6.2-1: Peak Power Spectral Density – 802.11b

| Frequency (MHz) | PSD Level (dBm) |
|--------------------|--------------------|
| 2412 | -3.52 |
| 2437 | -4.57 |
| 2462 | -3.52 |






Figure 7.6.2-1: PSD Plot - 802.11b - 2412 MHz

Figure 7.6.2-2: PSD Plot - 802.11b - 2437 MHz




Figure 7.6.2-3: PSD Plot - 802.11b - 2462 MHz

Report: RD72137771.100 TÜV SÜD America Inc. Page 29 of 33

Table 7.6.2-2: Peak Power Spectral Density - 802.11g

| Frequency (MHz) | PSD Level (dBm) |
|--------------------|--------------------|
| 2412 | -10.66 |
| 2437 | -11.10 |
| 2462 | -10.86 |

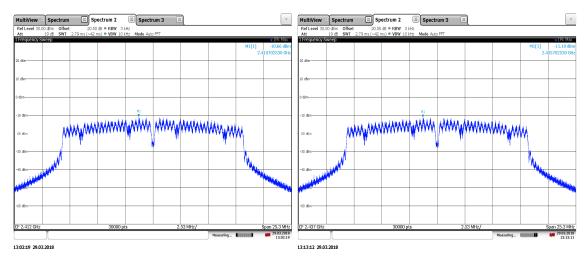


Figure 7.6.2-4: PSD Plot – 802.11g – 2412 MHz

Figure 7.6.2-5: PSD Plot – 802.11g – 2437 MHz




Figure 7.6.2-6: PSD Plot – 802.11g – 2462 MHz

Table 7.6.2-3: Peak Power Spectral Density – 802.11n (HT20)

| Frequency (MHz) | PSD Level (dBm) |
|--------------------|--------------------|
| 2412 | -11.82 |
| 2437 | -12.35 |
| 2462 | -12.21 |

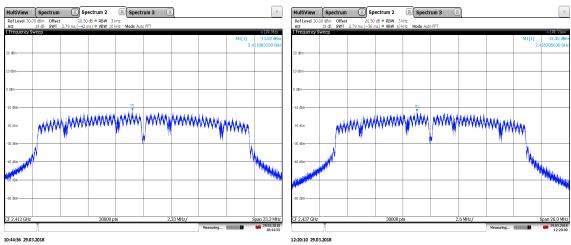


Figure 7.6.2-7: PSD Plot – 802.11n (HT20) – 2412 MHz Figure 7.6.2-8: PSD Plot – 802.11n (HT20) – 2437 MHz





Figure 7.6.2-9: PSD Plot – 802.11n (HT20) – 2462 MHz

Table 7.6.2-4: Peak Power Spectral Density – BLE

| Frequency (MHz) | PSD Level (dBm) |
|--------------------|--------------------|
| 2402 | -10.94 |
| 2440 | -10.88 |
| 2480 | -10.67 |



| MultiView | Spectrum | Spectrum 3 | Spectr

Figure 7.6.2-7: PSD Plot - BLE - 2402 MHz

Figure 7.6.2-8: PSD Plot - BLE - 2440 MHz




Figure 7.6.2-9: PSD Plot - BLE - 2480 MHz

8 MEASUREMENT UNCERTAINTY

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) k = 1.96 which provide confidence levels of 95%.

| Parameter | U _{lab} |
|-----------------------------------|------------------|
| Occupied Channel Bandwidth | ± 0.004% |
| RF Conducted Output Power | ± 0.689 dB |
| Power Spectral Density | ±0.5 dB |
| Antenna Port Conducted Emissions | ± 2.717 dB |
| Radiated Emissions | ± 5.877 dB |
| Temperature | ± 0.860 ℃ |
| Radio Frequency | ±2.832 x 10-8 |
| AC Power Line Conducted Emissions | ±2.85 |

9 CONCLUSION

In the opinion of TÜV SÜD America Inc. the PAC-USWHS002-WF-2, manufactured by Murata Electronics meets the requirements of FCC Part 15 subpart C and ISED Canada Radio Standards Specification: RSS-247 for the tests documented herein.

END REPORT

Report: RD72137771.100 TÜV SÜD America Inc. Page 33 of 33