



FCC TEST REPORT

FCC ID:2AIGT-B01

Applicant: Shenzhen BAKER Electronics Co.LTD
Address: 6/F.A.Building, The first industrial area of Fenghuang, Fuyong, Bao'an, Shenzhen City, China.
Manufacturer: Shenzhen BAKER Electronics Co.LTD
Address: 6/F.A.Building, The first industrial area of Fenghuang, Fuyong, Bao'an, Shenzhen City, China.
EUT: AI BOX
Trade Mark: N/A
Model Number: B01, B02, B03, B04, B05, B06, B07, B08, B09, B10, B11, B12, B13, B14, B15, B16, B17, B18, B19, B20
Date of Receipt: May 16, 2025
Test Date: May 16, 2025 to Jun. 12, 2025
Date of Report: Jun. 12, 2025
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China
Applicable Standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
ANSI C63.10:2013
KDB 789033 D02 v02r01
Test Result: Pass
Report Number: DLE-250626009R

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1. VERSION	4
2. SUMMARY OF TEST RESULTS.....	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS.....	10
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS.....	12
4.1.2 TEST PROCEDURE.....	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULT	13
4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT	14
4.2.1 APPLICABLE STANDARD	14
4.2.2 CONFORMANCE LIMIT	14
4.2.3 MEASURING INSTRUMENTS	15
4.2.4 TEST CONFIGURATION.....	15
4.2.5 TEST PROCEDURE.....	16
4.2.6 RADIATED EMISSION TEST RESULT	17
4.2.7 RADIATED BAND EDGE TEST RESULT	24
5. POWER SPECTRAL DENSITY TEST	27
5.1 APPLIED PROCEDURES / LIMIT	27
5.2 TEST PROCEDURE	28
5.3 DEVIATION FROM STANDARD.....	28
5.4 TEST SETUP	28
5.5 EUT OPERATION CONDITIONS	28
5.6 TEST RESULTS	29
6. 26DB EMISSION BANDWIDTH.....	33
6.1 APPLIED PROCEDURES / LIMIT	33
6.2 TEST PROCEDURE	33
6.3 EUT OPERATION CONDITIONS	33



Table of Contents

Page

6.4 TEST RESULTS	34
7. MAXIMUM CONDUCTED OUTPUT POWER.....	38
7.1 PPLIED PROCEDURES / LIMIT.....	38
7.2 TEST PROCEDURE.....	38
7.3 DEVIATION FROM STANDARD.....	38
7.4 TEST SETUP.....	38
7.5 EUT OPERATION CONDITIONS	38
7.6 TEST RESULTS	39
8. FREQUENCY STABILITY MEASUREMENT	40
8.1 LIMIT	40
8.2 TEST PROCEDURES	40
8.3 TEST SETUP LAYOUT.....	40
8.4 EUT OPERATION DURING TEST.....	40
8.5 TEST RESULTS	41
9. DUTY CYCLE.....	44
9.1 APPLIED PROCEDURES / LIMIT	44
9.2 DEVIATION FROM STANDARD.....	44
9.3 TEST SETUP.....	44
9.4 EUT OPERATION CONDITIONS	44
9.5 TEST RESULTS	45
10. ANTENNA REQUIREMENT	48
11. TEST SETUP PHOTO	49
11. EUT CONSTRUCTIONAL DETAILS.....	49



1. VERSION

Report No.	Version	Description	Approved
DLE-250626009R	Rev.01	Initial issue of report	Jun. 12, 2025



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207(a)	AC Power Line Conducted Emission	N/A	
789033 D02 General U-NII	Duty Cycle	PASS	
15.205(a) 15.209(a) 15.407(b)(1)	Radiated Emissions and Band Edge	PASS	
789033 D02 General U-NII	26dB Emission Bandwidth	PASS	
15.407(a)(1) 15.407(a)(12)	Maximum Conducted Output Power	PASS	
15.407(a)(1)	Power Spectral Density	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB identifier: CN0118

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	$U=4.5\text{dB}$
2	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=4.8\text{dB}$
3	3m chamber Radiated spurious emission(1GHz-6GHz)	$U=4.9\text{dB}$
4	3m chamber Radiated spurious emission(6GHz-40GHz)	$U=5.0\text{dB}$
5	Conducted disturbance	$U=3.2\text{dB}$
6	RF Band Edge	$U=1.68\text{dB}$
7	RF power conducted	$U=1.86\text{dB}$
8	RF conducted Spurious Emission	$U=2.2\text{dB}$
9	RF Occupied Bandwidth	$U=1.8\text{MHz}$
10	RF Power Spectral Density	$U=1.75\text{dB}$
11	humidity uncertainty	$U=5.3\%$
12	Temperature uncertainty	$U=0.59^{\circ}\text{C}$



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	AI BOX	
Model No.:	B01	
Serial Model:	B02, B03, B04, B05, B06, B07, B08, B09, B10, B11, B12, B13, B14, B15, B16, B17, B18, B19, B20	
Model Different.:	All the model are the same circuit and RF module, except model names and appearance color.	
Hardware Version:	N/A	
Software Version:	N/A	
Sample(s) Status:	Engineer sample	
Product Description:	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n
	Data Rate	802.11a: 6/9/12/24/18/36/48/54Mbit/s 802.11n: MCS0-MCS7
	Modulation	802.11a/n: Orthogonal Frequency Division Multiplexing(OFDM)
	Frequency range	☒ 5180-5240MHz for 802.11a/n (20M); ☒ 5190-5230MHz for 802.11n (40M);
	Number of Channels	☒ 4 channels for 802.11 a/n (20M) in the 5180-5240MHz band; ☒ 2 channels for 802.11 n (40M) in the 5190-5230 MHz band;
Channel List	Please refer to the Note 2.	
Antenna Type:	PCB Antenna	
Antenna gain:	Band	5.2G
	Gain	-3.64dBi
Power Supply:	Input: 5V  From USB	

**Note:**

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

802.11a/n(20MHz) Frequency Channel For 5.2G							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220	48	5240

802.11n(40MHz) Frequency Channel For 5.2G							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	-	-	-	-

3.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11 a/n (20M) CH 36/CH 40/CH 48 For 5.2G
Mode 2	802.11 n (40M) CH 38/CH 46 For 5.2G

Final Test Mode	For Conducted
	Description
Mode 1	802.11 a/n (20M) CH 36/CH 40/CH 48 For 5.2G
Mode 2	802.11 n (40M) CH 38/CH 46 For 5.2G

Final Test Mode	For Radiated
	Description
Mode 1	802.11 a/n (20M) CH 36/CH 40/CH 48 For 5.2G
Mode 2	802.11 n (40M) CH 38/CH 46 For 5.2G

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. For battery operated equipment, the equipment tests shall be performed using a new battery.	



We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11a	802.11n20	802.11n40
Data rate	6Mbps	MCS0(HT0)	MCS0(HT0)


Test Software	SecureCRT
Power level setup	Default

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission

E-1

Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	AI BOX	N/A	B01	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) EUT is tested with new battery.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Sep. 29, 2024	Sep. 28, 2025
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	RF-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	RF-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	RF-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
6	ESG Signal Generator	Agilent	E4421B	GB40051203	B.03.84	Sep. 29, 2024	Sep. 28, 2025
7	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 29, 2024	Sep. 28, 2025
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344/M-1752	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Van der Hoofden measuring head	Schwarzbeck Mess-elektronik	VDHH 9502	9502-039	N/A	Sep. 30, 2024	Sep. 29, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 30, 2024	Sep. 29, 2025
11	MWRF Power Meter Test system	MW	MW100-RF CB	10371	N/A	Sep. 29, 2024	Sep. 28, 2025
12	Power Meter	KEYSIGHT	N1912AP	926431	A.05.00	Sep. 29, 2024	Sep. 28, 2025
13	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
14	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\
15	Constant temperature and humidity test chamber	GAOXIN	GX-3000-80 L40	2401057	V4.8.4	Oct. 10, 2024	Oct. 09, 2025



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments
- a. powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
 - b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the
 - c. cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
 - d. LISN at least 80 cm from nearest part of EUT chassis.
 - e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

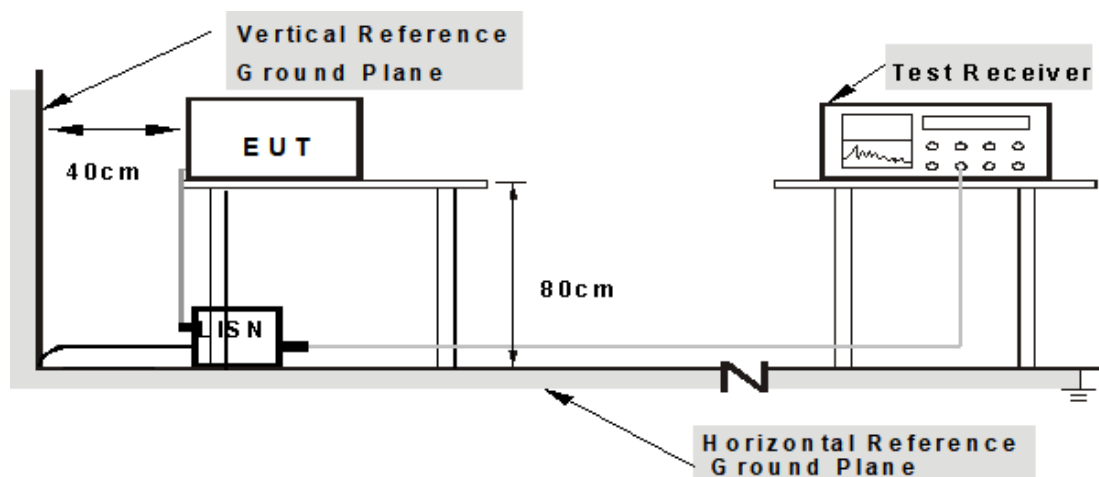

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 TEST RESULT

N/A

Note: Only AC products need to test this item; DC products are not applicable.



4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(b)(1) and 15.205(a) and 15.209(a)

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(1) Undesirable emission limits. Except as shown in paragraph (b)(10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits: For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Frequency Range	Peak	Average
All emissions outside of the 5.15-5.35 GHz band shall not exceed	68.20 (dBuV/m)	54 (dBuV/m)

According to FCC Part 15.407(b)(10): Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300m
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30m
1.705~30.0	30	29.5	30m
30-88	100	40	3m
88-216	150	43.5	3m
216-960	200	46	3m
Above 960	500	54	3m

Limits of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Class B (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54


- Remark: 1. Emission level in dBuV/m = 20 log (uV/m);
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters;
 3. Distance extrapolation factor = 40log(Specific distance/ test distance)(dB);
 4. Limit line=Specific limits(dBuV) + distance extrapolation factor.
 5. Emission level in dBuV/m = (dBm) + 95.2 .

4.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 3.5 of this test report.

4.2.4 TEST CONFIGURATION


1. For radiated emissions below 30MHz

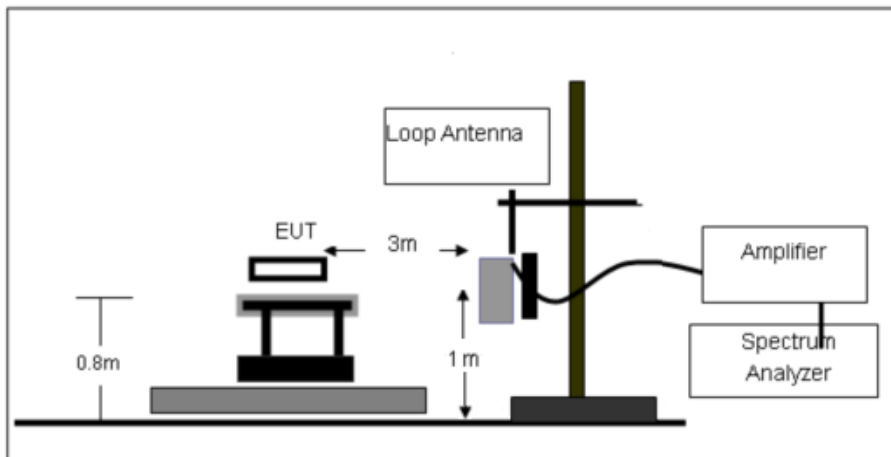

2. For radiated emissions from 30MHz to 1000MHz

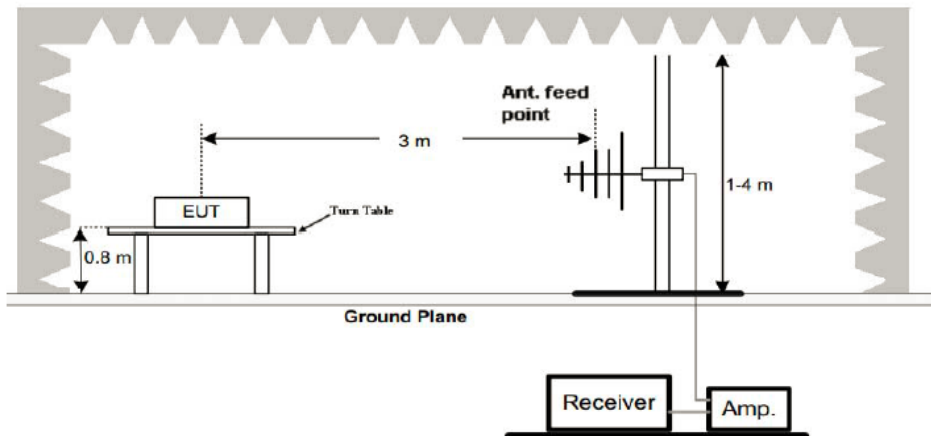

3. Radiated Emission Test-Up Frequency Above 1GHz

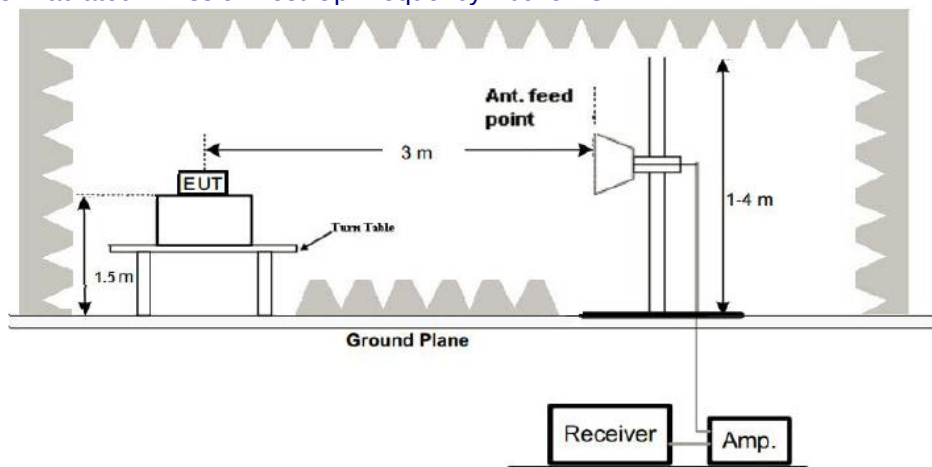



4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item – EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. The narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.




4.2.6 RADIATED EMISSION TEST RESULT

Radiated Emission Between 9KHz – 30MHz:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) the test result no need to reported.

Radiated Emission Between 30MHz – 1GHz:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5180MHz

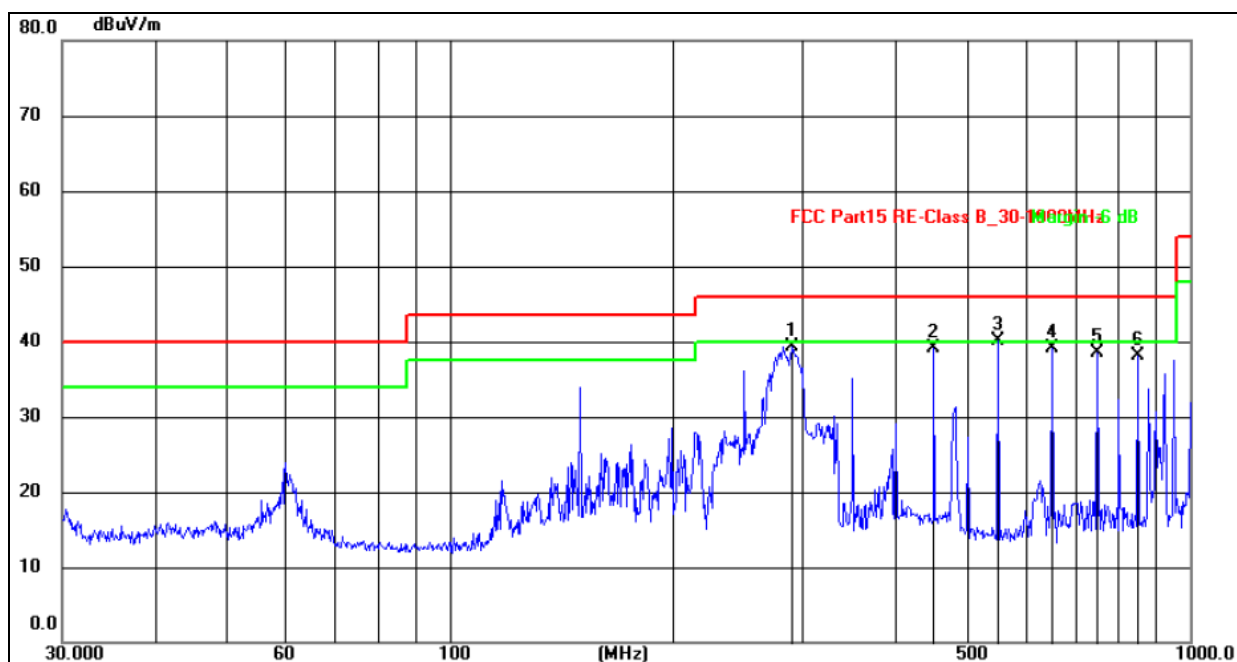

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	290.0172	54.65	-15.25	39.40	46.00	-6.60	QP
2	451.1349	52.65	-13.49	39.16	46.00	-6.84	QP
3	550.9479	49.79	-9.68	40.11	46.00	-5.89	QP
4	651.9415	46.53	-7.37	39.16	46.00	-6.84	QP
5	750.1082	45.10	-6.54	38.56	46.00	-7.44	QP
6	851.0353	44.73	-6.67	38.06	46.00	-7.94	QP

Note:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin= Measurement Level-Limit.
7. The test data shows only the worst case TX 802.11n20 - 5180MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5180MHz



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	280.0237	48.18	-18.54	29.64	46.00	-16.36	QP
2	451.1349	51.11	-12.72	38.39	46.00	-7.61	QP
3	550.9479	46.98	-9.12	37.86	46.00	-8.14	QP
4	651.9415	47.43	-7.35	40.08	46.00	-5.92	QP
5	750.1082	44.57	-5.32	39.25	46.00	-6.75	QP
6	952.0937	38.56	-0.17	38.39	46.00	-7.61	QP

Note:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin= Measurement Level-Limit.
7. The test data shows only the worst case TX 802.11n20 - 5180MHz.



Radiated Emission Between 1GHz – 40GHz:

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX - 802.11a & n20 & n40		

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360.00	49.35	30.55	5.77	24.66	49.23	68.20	-18.97	PK
V	10360.00	33.97	30.55	5.77	24.66	33.85	54.00	-20.15	AV
V	15540.00	50.69	30.33	6.32	24.55	51.23	74.00	-22.77	PK
V	15540.00	37.05	30.33	6.32	24.55	37.59	54.00	-16.41	AV
V	20720.00	52.34	30.85	7.45	24.69	53.63	74.00	-20.37	PK
V	20720.00	37.65	30.85	7.45	24.69	38.94	54.00	-15.06	AV
V	25900.00	53.25	31.02	8.99	25.57	56.79	68.20	-11.41	PK
V	25900.00	37.96	31.02	8.99	25.57	41.50	54.00	-12.50	AV
H	10360.00	49.84	30.55	5.77	24.66	49.72	68.20	-18.48	PK
H	10360.00	35.59	30.55	5.77	24.66	35.47	54.00	-18.53	AV
H	15540.00	51.25	30.33	6.32	24.55	51.79	74.00	-22.21	PK
H	15540.00	36.91	30.33	6.32	24.55	37.45	54.00	-16.55	AV
H	20720.00	52.66	30.85	7.45	24.69	53.95	74.00	-20.05	PK
H	20720.00	38.92	30.85	7.45	24.69	40.21	54.00	-13.79	AV
H	25900.00	51.04	31.02	8.99	25.57	54.58	68.20	-13.62	PK
H	25900.00	38.82	31.02	8.99	25.57	42.36	54.00	-11.64	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400.00	49.28	30.55	5.77	24.66	49.16	68.20	-19.04	PK
V	10400.00	34.43	30.55	5.77	24.66	34.31	54.00	-19.69	AV
V	15600.00	50.66	30.33	6.32	24.55	51.20	74.00	-22.80	PK
V	15600.00	36.64	30.33	6.32	24.55	37.18	54.00	-16.82	AV
V	20800.00	51.57	30.85	7.45	24.69	52.86	74.00	-21.14	PK
V	20800.00	38.02	30.85	7.45	24.69	39.31	54.00	-14.69	AV
V	26000.00	53.22	31.02	8.99	25.57	56.76	68.20	-11.44	PK
V	26000.00	37.90	31.02	8.99	25.57	41.44	54.00	-12.56	AV
H	10400.00	49.71	30.55	5.77	24.66	49.59	68.20	-18.61	PK
H	10400.00	36.16	30.55	5.77	24.66	36.04	54.00	-17.96	AV
H	15600.00	51.69	30.33	6.32	24.55	52.23	74.00	-21.77	PK
H	15600.00	37.14	30.33	6.32	24.55	37.68	54.00	-16.32	AV
H	20800.00	53.03	30.85	7.45	24.69	54.32	74.00	-19.68	PK
H	20800.00	38.79	30.85	7.45	24.69	40.08	54.00	-13.92	AV
H	26000.00	51.38	31.02	8.99	25.57	54.92	68.20	-13.28	PK
H	26000.00	38.70	31.02	8.99	25.57	42.24	54.00	-11.76	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480.00	49.23	30.55	5.77	24.66	49.11	68.20	-19.09	PK
V	10480.00	34.44	30.55	5.77	24.66	34.32	54.00	-19.68	AV
V	15720.00	50.80	30.33	6.32	24.55	51.34	74.00	-22.66	PK
V	15720.00	37.35	30.33	6.32	24.55	37.89	54.00	-16.11	AV
V	20960.00	51.78	30.85	7.45	24.69	53.07	74.00	-20.93	PK
V	20960.00	38.14	30.85	7.45	24.69	39.43	54.00	-14.57	AV
V	26200.00	52.82	31.02	8.99	25.57	56.36	68.20	-11.84	PK
V	26200.00	37.70	31.02	8.99	25.57	41.24	54.00	-12.76	AV
H	10480.00	49.19	30.55	5.77	24.66	49.07	68.20	-19.13	PK
H	10480.00	35.23	30.55	5.77	24.66	35.11	54.00	-18.89	AV
H	15720.00	52.01	30.33	6.32	24.55	52.55	74.00	-21.45	PK
H	15720.00	37.94	30.33	6.32	24.55	38.48	54.00	-15.52	AV
H	20960.00	52.83	30.85	7.45	24.69	54.12	74.00	-19.88	PK
H	20960.00	38.75	30.85	7.45	24.69	40.04	54.00	-13.96	AV
H	26200.00	50.93	31.02	8.99	25.57	54.47	68.20	-13.73	PK
H	26200.00	37.84	31.02	8.99	25.57	41.38	54.00	-12.62	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360.00	49.28	30.55	5.77	24.66	49.16	68.20	-19.04	PK
V	10360.00	33.77	30.55	5.77	24.66	33.65	54.00	-20.35	AV
V	15540.00	51.04	30.33	6.32	24.55	51.58	74.00	-22.42	PK
V	15540.00	37.04	30.33	6.32	24.55	37.58	54.00	-16.42	AV
V	20720.00	51.88	30.85	7.45	24.69	53.17	74.00	-20.83	PK
V	20720.00	38.44	30.85	7.45	24.69	39.73	54.00	-14.27	AV
V	25900.00	52.80	31.02	8.99	25.57	56.34	68.20	-11.86	PK
V	25900.00	37.52	31.02	8.99	25.57	41.06	54.00	-12.94	AV
H	10360.00	49.28	30.55	5.77	24.66	49.16	68.20	-19.04	PK
H	10360.00	35.84	30.55	5.77	24.66	35.72	54.00	-18.28	AV
H	15540.00	52.07	30.33	6.32	24.55	52.61	74.00	-21.39	PK
H	15540.00	37.84	30.33	6.32	24.55	38.38	54.00	-15.62	AV
H	20720.00	52.55	30.85	7.45	24.69	53.84	74.00	-20.16	PK
H	20720.00	38.60	30.85	7.45	24.69	39.89	54.00	-14.11	AV
H	25900.00	50.88	31.02	8.99	25.57	54.42	68.20	-13.78	PK
H	25900.00	38.51	31.02	8.99	25.57	42.05	54.00	-11.95	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400.00	49.60	30.55	5.77	24.66	49.48	68.20	-18.72	PK
V	10400.00	34.10	30.55	5.77	24.66	33.98	54.00	-20.02	AV
V	15600.00	51.28	30.33	6.32	24.55	51.82	74.00	-22.18	PK
V	15600.00	37.50	30.33	6.32	24.55	38.04	54.00	-15.96	AV
V	20800.00	51.59	30.85	7.45	24.69	52.88	74.00	-21.12	PK
V	20800.00	37.74	30.85	7.45	24.69	39.03	54.00	-14.97	AV
V	26000.00	52.88	31.02	8.99	25.57	56.42	68.20	-11.78	PK
V	26000.00	37.68	31.02	8.99	25.57	41.22	54.00	-12.78	AV
H	10400.00	48.92	30.55	5.77	24.66	48.80	68.20	-19.40	PK
H	10400.00	36.05	30.55	5.77	24.66	35.93	54.00	-18.07	AV
H	15600.00	50.93	30.33	6.32	24.55	51.47	74.00	-22.53	PK
H	15600.00	36.74	30.33	6.32	24.55	37.28	54.00	-16.72	AV
H	20800.00	52.17	30.85	7.45	24.69	53.46	74.00	-20.54	PK
H	20800.00	38.44	30.85	7.45	24.69	39.73	54.00	-14.27	AV
H	26000.00	51.78	31.02	8.99	25.57	55.32	68.20	-12.88	PK
H	26000.00	38.10	31.02	8.99	25.57	41.64	54.00	-12.36	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480.00	49.31	30.55	5.77	24.66	49.19	68.20	-19.01	PK
V	10480.00	34.09	30.55	5.77	24.66	33.97	54.00	-20.03	AV
V	15720.00	50.93	30.33	6.32	24.55	51.47	74.00	-22.53	PK
V	15720.00	37.35	30.33	6.32	24.55	37.89	54.00	-16.11	AV
V	20960.00	51.75	30.85	7.45	24.69	53.04	74.00	-20.96	PK
V	20960.00	37.71	30.85	7.45	24.69	39.00	54.00	-15.00	AV
V	26200.00	52.69	31.02	8.99	25.57	56.23	68.20	-11.97	PK
V	26200.00	38.26	31.02	8.99	25.57	41.80	54.00	-12.20	AV
H	10480.00	49.07	30.55	5.77	24.66	48.95	68.20	-19.25	PK
H	10480.00	35.65	30.55	5.77	24.66	35.53	54.00	-18.47	AV
H	15720.00	51.38	30.33	6.32	24.55	51.92	74.00	-22.08	PK
H	15720.00	37.72	30.33	6.32	24.55	38.26	54.00	-15.74	AV
H	20960.00	52.96	30.85	7.45	24.69	54.25	74.00	-19.75	PK
H	20960.00	38.08	30.85	7.45	24.69	39.37	54.00	-14.63	AV
H	26200.00	51.02	31.02	8.99	25.57	54.56	68.20	-13.64	PK
H	26200.00	37.64	31.02	8.99	25.57	41.18	54.00	-12.82	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10380.00	48.91	30.55	5.77	24.66	48.79	74.00	-25.21	PK
V	10380.00	33.94	30.55	5.77	24.66	33.82	54.00	-20.18	AV
V	15570.00	51.24	30.33	6.32	24.55	51.78	74.00	-22.22	PK
V	15570.00	36.84	30.33	6.32	24.55	37.38	54.00	-16.62	AV
V	20760.00	51.82	30.85	7.45	24.69	53.11	68.20	-15.09	PK
V	20760.00	38.56	30.85	7.45	24.69	39.85	54.00	-14.15	AV
V	25950.00	52.71	31.02	8.99	25.57	56.25	68.20	-11.95	PK
V	25950.00	38.41	31.02	8.99	25.57	41.95	54.00	-12.05	AV
H	10380.00	48.90	30.55	5.77	24.66	48.78	74.00	-25.22	PK
H	10380.00	36.09	30.55	5.77	24.66	35.97	54.00	-18.03	AV
H	15570.00	51.47	30.33	6.32	24.55	52.01	74.00	-21.99	PK
H	15570.00	37.85	30.33	6.32	24.55	38.39	54.00	-15.61	AV
H	20760.00	53.03	30.85	7.45	24.69	54.32	74.00	-19.68	PK
H	20760.00	39.01	30.85	7.45	24.69	40.30	54.00	-13.70	AV
H	25950.00	51.71	31.02	8.99	25.57	55.25	68.20	-12.95	PK
H	25950.00	38.24	31.02	8.99	25.57	41.78	54.00	-12.22	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5230MHz									
V	10460.00	49.34	30.55	5.77	24.66	49.22	74.00	-24.78	PK
V	10460.00	33.69	30.55	5.77	24.66	33.57	54.00	-20.43	AV
V	15690.00	46.60	30.33	6.32	24.55	47.14	68.20	-21.06	PK
V	15690.00	34.75	30.33	6.32	24.55	35.29	54.00	-18.71	AV
V	20920.00	48.34	30.85	7.45	24.69	49.63	68.20	-18.57	PK
V	20920.00	36.18	30.85	7.45	24.69	37.47	54.00	-16.53	AV
V	26150.00	50.42	31.02	8.99	25.57	53.96	68.20	-14.24	PK
V	26150.00	36.34	31.02	8.99	25.57	39.88	54.00	-14.12	AV
H	10460.00	49.26	30.55	5.77	24.66	49.14	74.00	-24.86	PK
H	10460.00	36.25	30.55	5.77	24.66	36.13	54.00	-17.87	AV
H	15690.00	51.57	30.33	6.32	24.55	52.11	68.20	-16.09	PK
H	15690.00	36.86	30.33	6.32	24.55	37.40	54.00	-16.60	AV
H	20920.00	50.57	30.85	7.45	24.69	51.86	68.20	-16.34	PK
H	20920.00	38.79	30.85	7.45	24.69	40.08	54.00	-13.92	AV
H	26150.00	50.01	31.02	8.99	25.57	53.55	68.20	-14.65	PK
H	26150.00	36.97	31.02	8.99	25.57	40.51	54.00	-13.49	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



4.2.7 RADIATED BAND EDGE TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX - 802.11a & n20 & n40		

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	4500.00	44.75	30.45	8.77	38.66	61.73	74.00	-12.27	PK
V	4500.00	30.37	30.45	8.77	38.66	47.35	54.00	-6.65	AV
V	5100.00	45.02	30.45	8.77	38.66	62.00	74.00	-12.00	PK
V	5100.00	31.53	30.45	8.77	38.66	48.51	54.00	-5.49	AV
V	5150.00	45.24	30.45	8.77	38.66	62.22	74.00	-11.78	PK
V	5150.00	31.57	30.45	8.77	38.66	48.55	54.00	-5.45	AV
H	4500.00	43.88	30.45	8.77	38.66	60.86	74.00	-13.14	PK
H	4500.00	30.95	30.45	8.77	38.66	47.93	54.00	-6.07	AV
H	5100.00	44.43	30.45	8.77	38.66	61.41	74.00	-12.59	PK
H	5100.00	31.41	30.45	8.77	38.66	48.39	54.00	-5.61	AV
H	5150.00	44.08	30.45	8.77	38.66	61.06	74.00	-12.94	PK
H	5150.00	30.67	30.45	8.77	38.66	47.65	54.00	-6.35	PK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	5350.00	44.61	30.45	8.77	38.66	61.59	74.00	-12.41	PK
V	5350.00	30.97	30.45	8.77	38.66	47.95	54.00	-6.05	AV
V	5400.00	45.16	30.45	8.77	38.66	62.14	74.00	-11.86	PK
V	5400.00	32.21	30.45	8.77	38.66	49.19	54.00	-4.81	AV
V	5460.00	44.82	30.45	8.77	38.66	61.80	74.00	-12.20	PK
V	5460.00	32.24	30.45	8.77	38.66	49.22	54.00	-4.78	AV
H	5350.00	43.77	30.45	8.77	38.66	60.75	74.00	-13.25	PK
H	5350.00	31.11	30.45	8.77	38.66	48.09	54.00	-5.91	AV
H	5400.00	43.90	30.45	8.77	38.66	60.88	74.00	-13.12	PK
H	5400.00	30.65	30.45	8.77	38.66	47.63	54.00	-6.37	AV
H	5460.00	43.95	30.45	8.77	38.66	60.93	74.00	-13.07	PK
H	5460.00	31.12	30.45	8.77	38.66	48.10	54.00	-5.90	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	4500.00	44.38	30.45	8.77	38.66	61.36	74.00	-12.64	PK
V	4500.00	30.29	30.45	8.77	38.66	47.27	54.00	-6.73	AV
V	5100.00	44.73	30.45	8.77	38.66	61.71	74.00	-12.29	PK
V	5100.00	31.83	30.45	8.77	38.66	48.81	54.00	-5.19	AV
V	5150.00	45.27	30.45	8.77	38.66	62.25	74.00	-11.75	PK
V	5150.00	32.11	30.45	8.77	38.66	49.09	54.00	-4.91	AV
H	4500.00	44.50	30.45	8.77	38.66	61.48	74.00	-12.52	PK
H	4500.00	31.19	30.45	8.77	38.66	48.17	54.00	-5.83	AV
H	5100.00	44.47	30.45	8.77	38.66	61.45	74.00	-12.55	PK
H	5100.00	30.76	30.45	8.77	38.66	47.74	54.00	-6.26	AV
H	5150.00	43.27	30.45	8.77	38.66	60.25	74.00	-13.75	PK
H	5150.00	30.27	30.45	8.77	38.66	47.25	54.00	-6.75	PK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	5350.00	44.78	30.45	8.77	38.66	61.76	74.00	-12.24	PK
V	5350.00	30.86	30.45	8.77	38.66	47.84	54.00	-6.16	AV
V	5400.00	44.52	30.45	8.77	38.66	61.50	74.00	-12.50	PK
V	5400.00	31.90	30.45	8.77	38.66	48.88	54.00	-5.12	AV
V	5460.00	44.75	30.45	8.77	38.66	61.73	74.00	-12.27	PK
V	5460.00	31.88	30.45	8.77	38.66	48.86	54.00	-5.14	AV
H	5350.00	43.89	30.45	8.77	38.66	60.87	74.00	-13.13	PK
H	5350.00	30.82	30.45	8.77	38.66	47.80	54.00	-6.20	AV
H	5400.00	44.06	30.45	8.77	38.66	61.04	74.00	-12.96	PK
H	5400.00	31.40	30.45	8.77	38.66	48.38	54.00	-5.62	AV
H	5460.00	44.02	30.45	8.77	38.66	61.00	74.00	-13.00	PK
H	5460.00	31.21	30.45	8.77	38.66	48.19	54.00	-5.81	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	4500.00	44.42	30.45	8.77	38.66	61.40	74.00	-12.60	PK
V	4500.00	30.74	30.45	8.77	38.66	47.72	54.00	-6.28	AV
V	5100.00	45.27	30.45	8.77	38.66	62.25	74.00	-11.75	PK
V	5100.00	32.11	30.45	8.77	38.66	49.09	54.00	-4.91	AV
V	5150.00	45.16	30.45	8.77	38.66	62.14	74.00	-11.86	PK
V	5150.00	32.09	30.45	8.77	38.66	49.07	54.00	-4.93	AV
H	4500.00	43.76	30.45	8.77	38.66	60.74	74.00	-13.26	PK
H	4500.00	31.25	30.45	8.77	38.66	48.23	54.00	-5.77	AV
H	5100.00	44.25	30.45	8.77	38.66	61.23	74.00	-12.77	PK
H	5100.00	30.70	30.45	8.77	38.66	47.68	54.00	-6.32	AV
H	5150.00	43.72	30.45	8.77	38.66	60.70	74.00	-13.30	PK
H	5150.00	30.62	30.45	8.77	38.66	47.60	54.00	-6.40	PK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5230MHz									
V	5350.00	44.39	30.45	8.77	38.66	61.37	74.00	-12.63	PK
V	5350.00	31.03	30.45	8.77	38.66	48.01	54.00	-5.99	AV
V	5400.00	45.00	30.45	8.77	38.66	61.98	74.00	-12.02	PK
V	5400.00	32.26	30.45	8.77	38.66	49.24	54.00	-4.76	AV
V	5460.00	44.52	30.45	8.77	38.66	61.50	74.00	-12.50	PK
V	5460.00	32.03	30.45	8.77	38.66	49.01	54.00	-4.99	AV
H	5350.00	43.80	30.45	8.77	38.66	60.78	74.00	-13.22	PK
H	5350.00	30.62	30.45	8.77	38.66	47.60	54.00	-6.40	AV
H	5400.00	44.52	30.45	8.77	38.66	61.50	74.00	-12.50	PK
H	5400.00	30.93	30.45	8.77	38.66	47.91	54.00	-6.09	AV
H	5460.00	43.78	30.45	8.77	38.66	60.76	74.00	-13.24	PK
H	5460.00	30.55	30.45	8.77	38.66	47.53	54.00	-6.47	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ kHz}$ is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

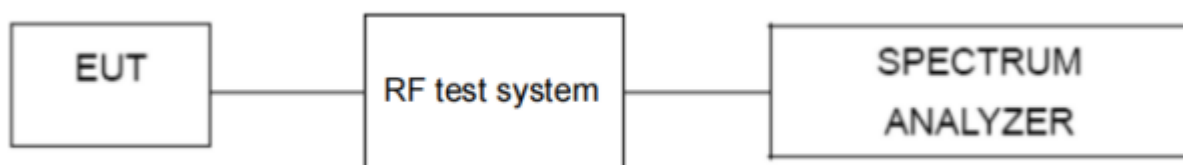

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Band :	5.2G		


Test mode	Frequency (MHz)	PSD (dBm)	duty cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)	Result
802.11a	5180	6.409	0.10	6.509	11	Pass
	5200	6.075	0.10	6.175	11	Pass
	5240	6.407	0.10	6.507	11	Pass
802.11n20	5180	5.341	0.04	5.381	11	Pass
	5200	4.951	0.04	4.991	11	Pass
	5240	5.544	0.04	5.584	11	Pass
802.11n40	5190	1.886	0.05	1.936	11	Pass
	5230	2.202	0.05	2.252	11	Pass
Note: Total PSD = PSD + Duty Cycle Factor.						




802.11a
CH36

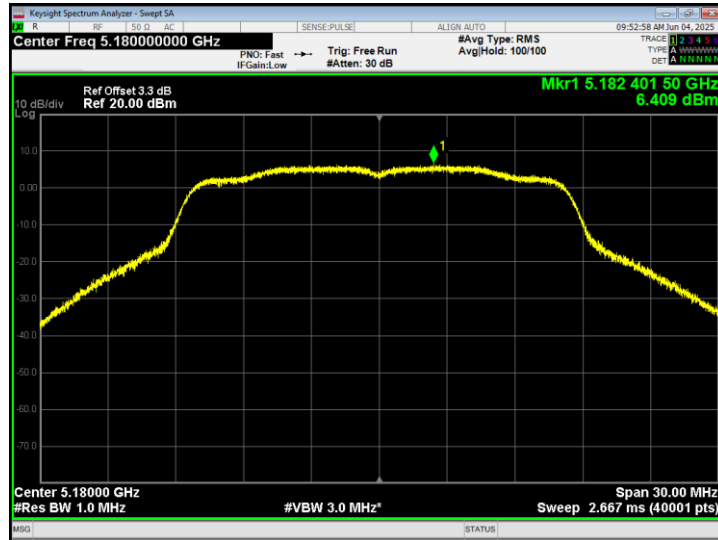

CH40

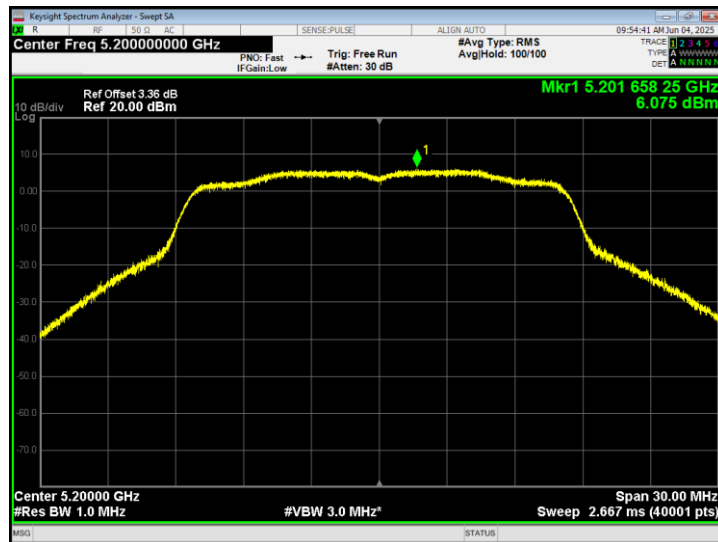


CH48

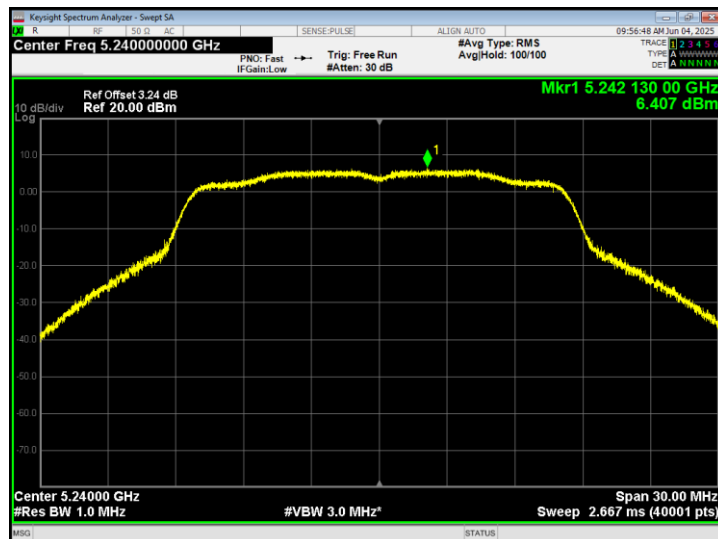





802.11n20
CH36

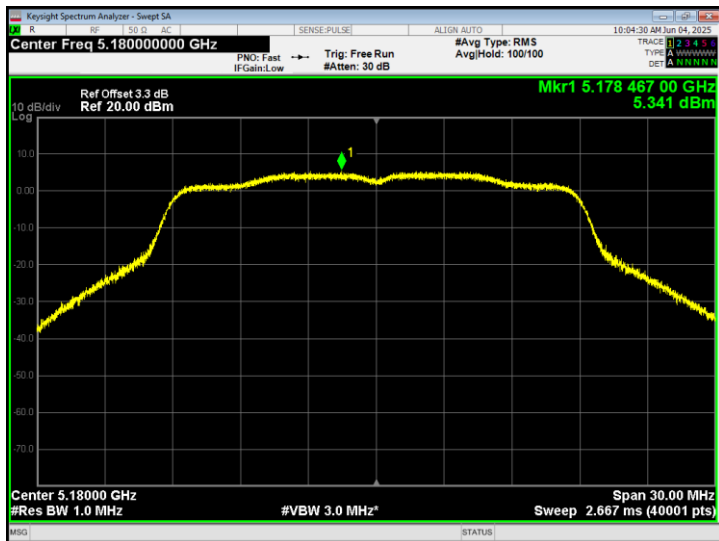

CH40

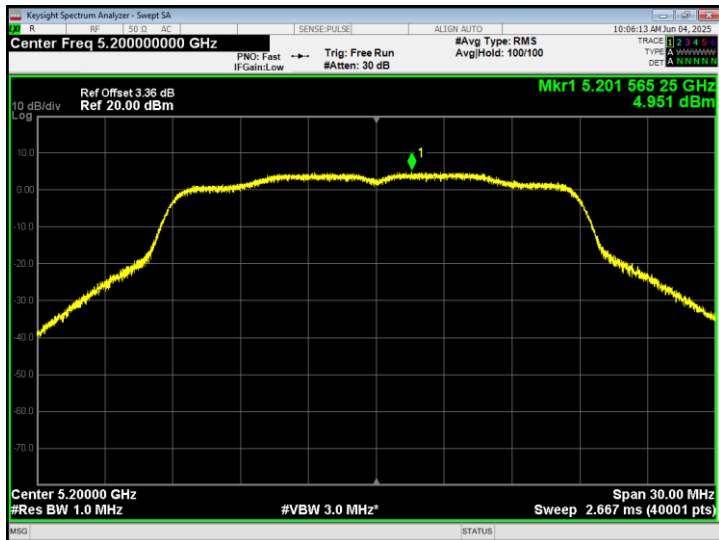


CH48

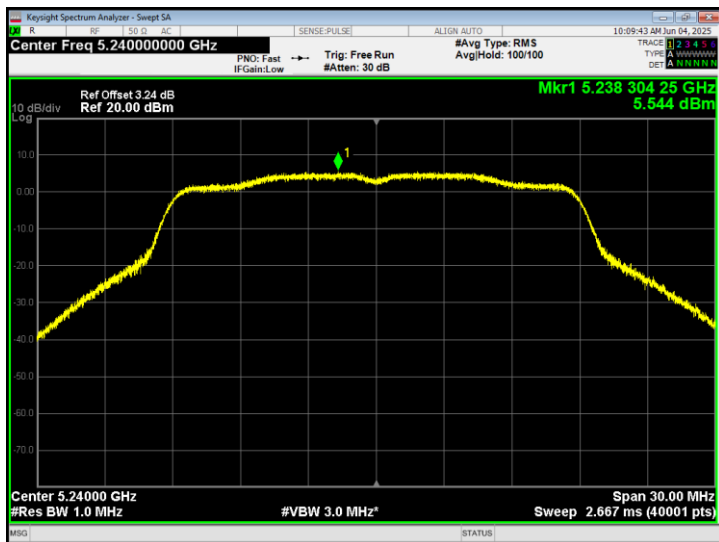




802.11n40
CH38

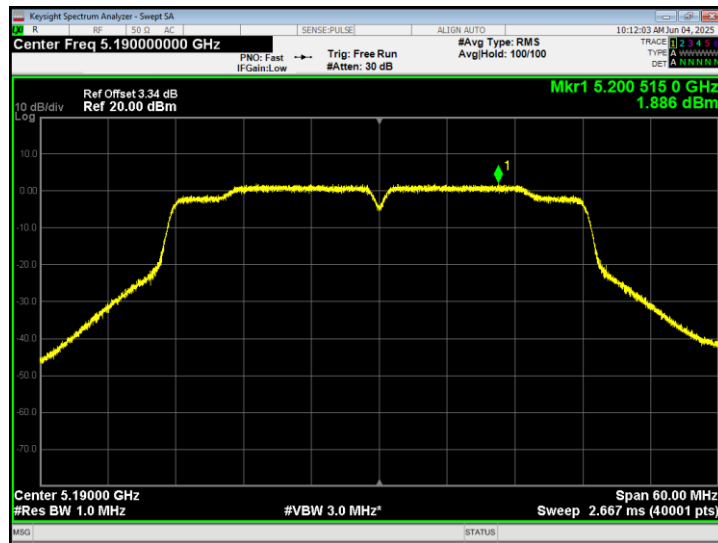

CH46

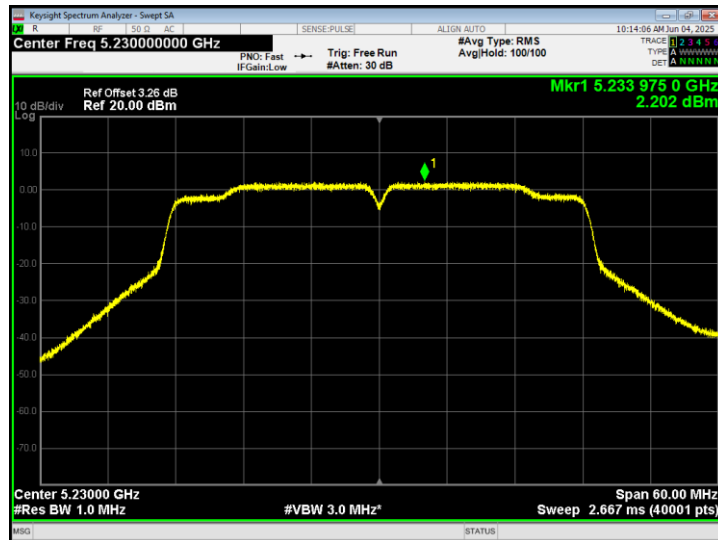



6. 26DB EMISSION BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

6.2 TEST PROCEDURE

The following procedure shall be used for measuring 6dB Occupied Bandwidth:


The procedure for this method is as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring 26dB Emission bandwidth:

The procedure for this method is as follows:

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

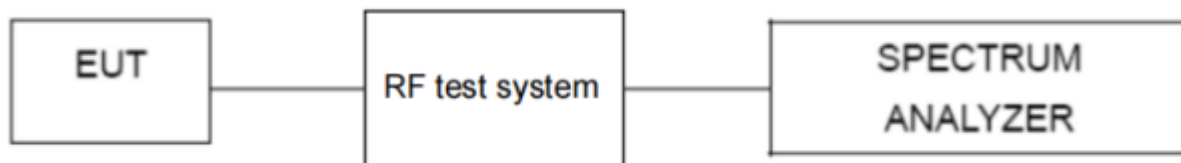

6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



6.4 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Band :	5.2G		

Test Mode	Frequency (MHz)	26dB Emission Bandwidth (MHz)	Limit (MHz)	Result
802.11a	5180	23.00	N/A	Pass
	5200	22.68		
	5240	22.65		
802.11n20	5180	22.62	N/A	Pass
	5200	22.80		
	5240	22.17		
802.11n40	5190	43.86	N/A	Pass
	5230	42.70		




802.11a


26dB Bandwidth plot on channel 36

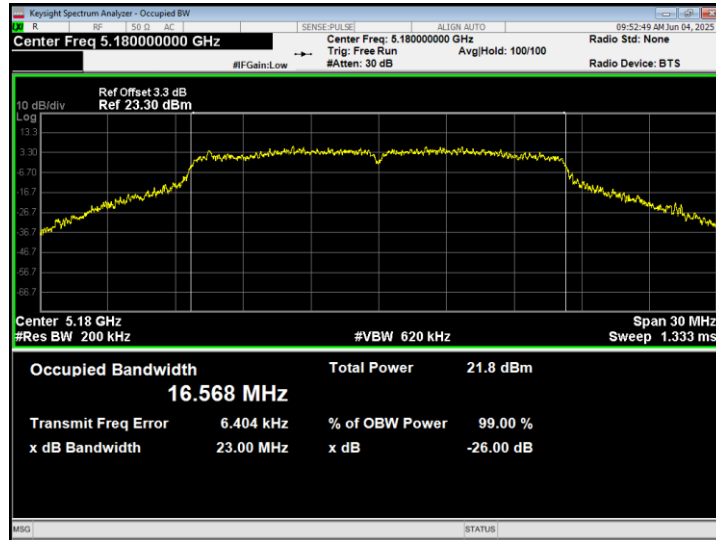

26dB Bandwidth plot on channel 40

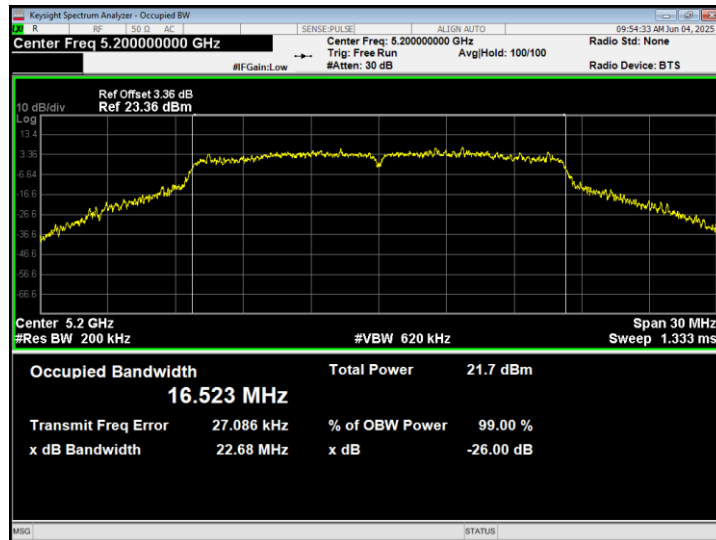


26dB Bandwidth plot on channel 48

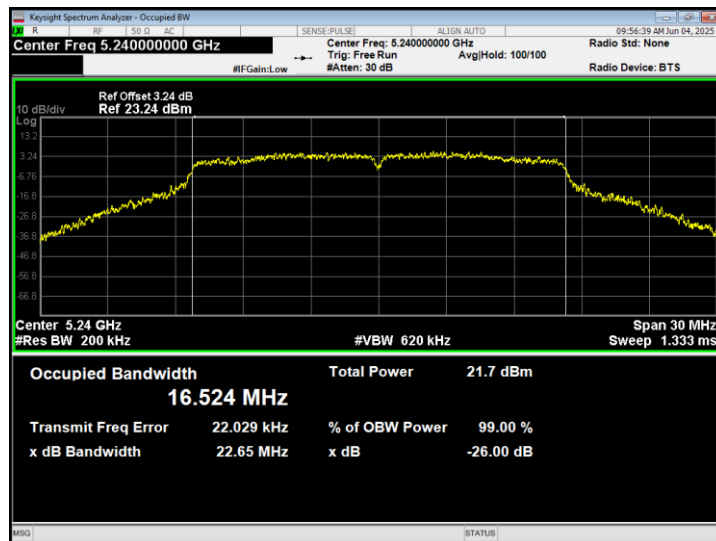




802.11n20


26dB Bandwidth plot on channel 36

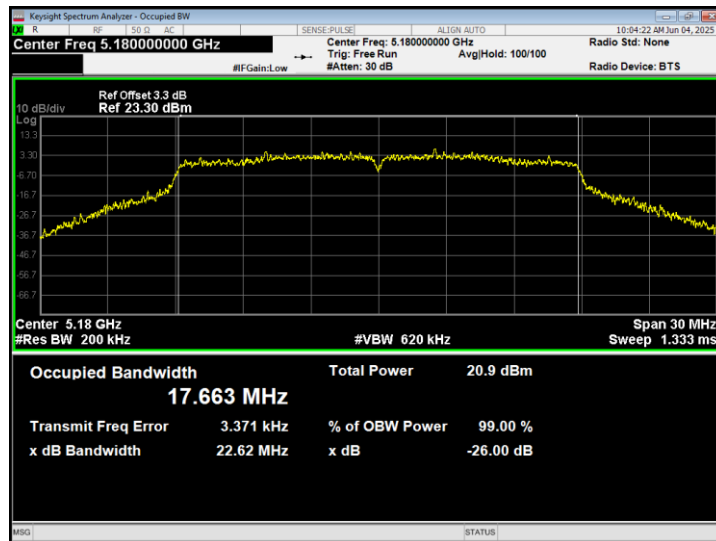

26dB Bandwidth plot on channel 40

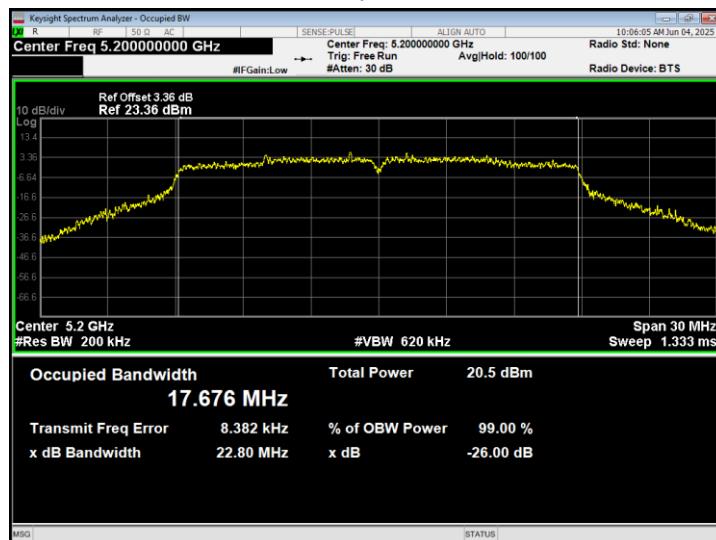


26dB Bandwidth plot on channel 48

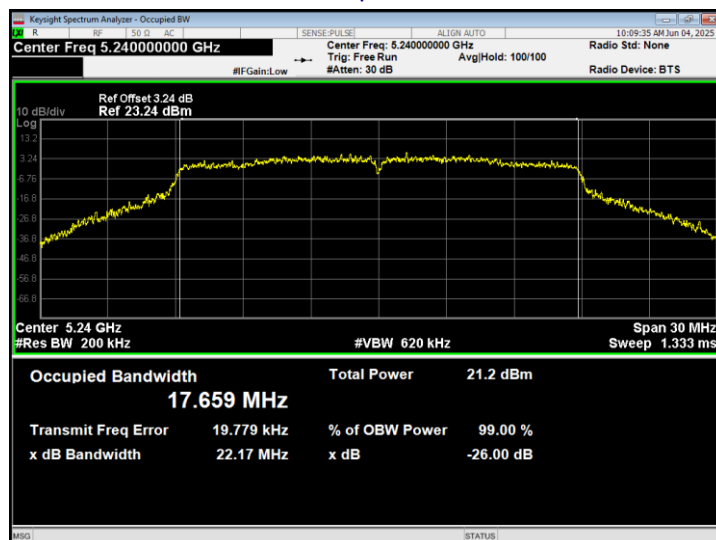




802.11n40
26dB Bandwidth plot on channel 38

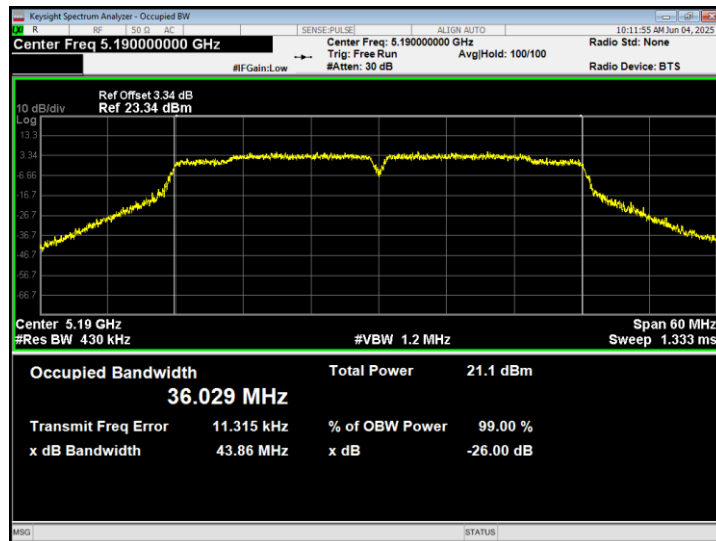

26dB Bandwidth plot on channel 46

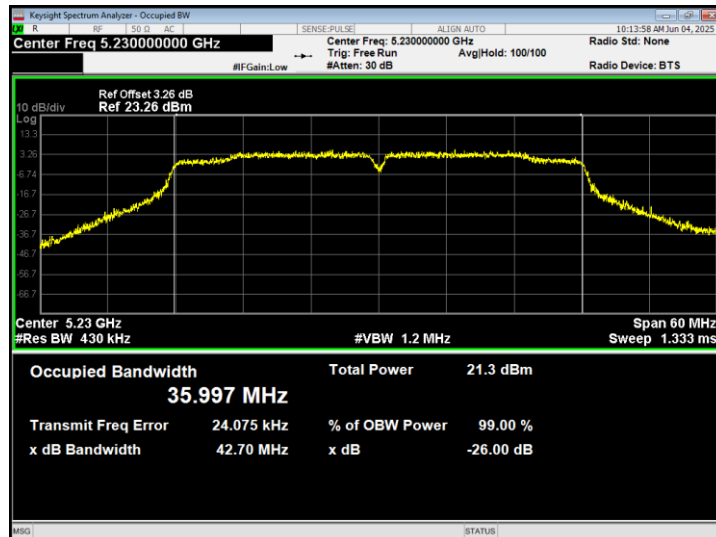



7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)(1)

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW

7.2 TEST PROCEDURE

According 789033 D02 General UNII Test Procedures New Rules v02r01.

EUT Measurement using a Power Meter (PM)

a) Method PM (Measurement using an RF average power meter):

(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:

- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
- At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
- The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

(ii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II.B.

(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

b) Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Band :	5.2G		

Test Mode	Frequency (MHz)	Output power (dBm)	Duty cycle factor (dB)	Total power (dBm)	Limit (dBm)	Result
802.11 a	5180	16.205	0.10	16.305	23.98	Pass
	5200	15.866	0.10	15.966	23.98	Pass
	5240	15.964	0.10	16.064	23.98	Pass
802.11 n20	5180	15.254	0.04	15.294	23.98	Pass
	5200	14.885	0.04	14.925	23.98	Pass
	5240	15.489	0.04	15.529	23.98	Pass
802.11 n40	5190	15.382	0.05	15.432	23.98	Pass
	5230	15.587	0.05	15.637	23.98	Pass

Note: Total power = Output power + Duty cycle factor.



8. FREQUENCY STABILITY MEASUREMENT

8.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall (IEEE 802.11n specification).

8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C~70°C.

8.3 TEST SETUP LAYOUT

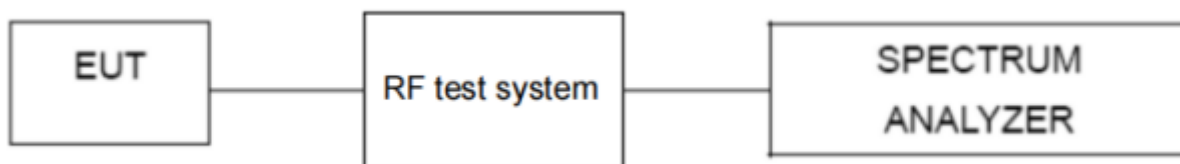

8.4 EUT OPERATION DURING TEST

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



8.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Band :	5.2G		
Note: Note: All channels have been tested, and only the worst test data is recorded in this report.			

Extreme temperature frequency stability:

Reference Frequency: 802.11a - 5180MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Measured Frequency (MHz)	Deviation (ppm)
70	5	5179.978	-4.221
60	5	5179.962	-7.297
50	5	5179.982	-3.408
40	5	5179.972	-5.423
30	5	5179.972	-5.350
25	5	5179.984	-3.145
10	5	5179.984	-3.082
0	5	5179.978	-4.338
-10	5	5179.975	-4.732
-20	5	5179.968	-6.197

Reference Frequency: 802.11n20 - 5180MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Measured Frequency (MHz)	Deviation (ppm)
70	5	5179.986	-2.721
60	5	5179.988	-2.273
50	5	5179.984	-3.006
40	5	5179.980	-3.858
30	5	5179.989	-2.041
25	5	5179.989	-2.049
10	5	5179.987	-2.431
0	5	5179.975	-4.871
-10	5	5179.972	-5.339
-20	5	5179.977	-4.401



Reference Frequency: 802.11n40 - 5190MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Measured Frequency (MHz)	Deviation (ppm)
70	5	5189.980	-3.892
60	5	5189.986	-2.678
50	5	5189.972	-5.379
40	5	5189.972	-5.427
30	5	5189.975	-4.883
25	5	5189.971	-5.635
10	5	5189.973	-5.238
0	5	5189.973	-5.285
-10	5	5189.984	-3.068
-20	5	5189.974	-5.037



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Note: Note: All channels have been tested, and only the worst test data is recorded in this report.			

Extreme voltage frequency stability:

Reference Frequency: 802.11a - 5180MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Measured Frequency (MHz)	Deviation (ppm)
25	5.5	5179.978	-4.221
25	5.3	5179.962	-7.297
25	5	5179.982	-3.408
25	4.8	5179.972	-5.423
25	4.5	5179.972	-5.350

Reference Frequency: 802.11n20 - 5180MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Measured Frequency (MHz)	Deviation (ppm)
25	5.5	5179.986	-2.721
25	5.3	5179.988	-2.273
25	5	5179.984	-3.006
25	4.8	5179.980	-3.858
25	4.5	5179.989	-2.041

Reference Frequency: 802.11n40 - 5190MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Measured Frequency (MHz)	Deviation (ppm)
25	5.5	5189.980	-3.892
25	5.3	5189.986	-2.678
25	5	5189.972	-5.379
25	4.8	5189.972	-5.427
25	4.5	5189.975	-4.883



9. DUTY CYCLE

9.1 APPLIED PROCEDURES / LIMIT


Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

9.2 DEVIATION FROM STANDARD

No deviation.

9.3 TEST SETUP

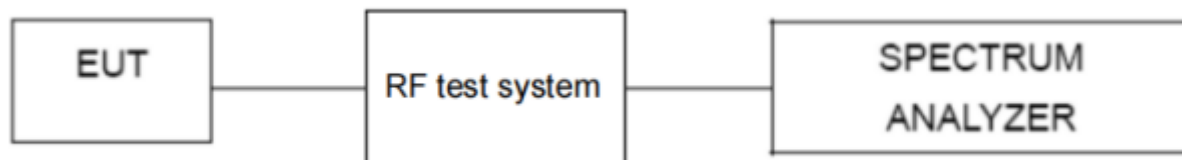

9.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.




9.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Band :	5.2G		


5.2G				
Test Mode	Frequency (MHz)	Duty Cycle (%)	Factor (dB)	Result
802.11a	5180	97.66	0.10	Pass
802.11n20	5180	99.00	0.04	Pass
802.11n40	5190	98.76	0.05	Pass
Note: Duty Cycle= Ton /Total*100%				
Duty Cycle Correction Factor = 10log (1/Duty Cycle)				



802.11a - 5180MHz

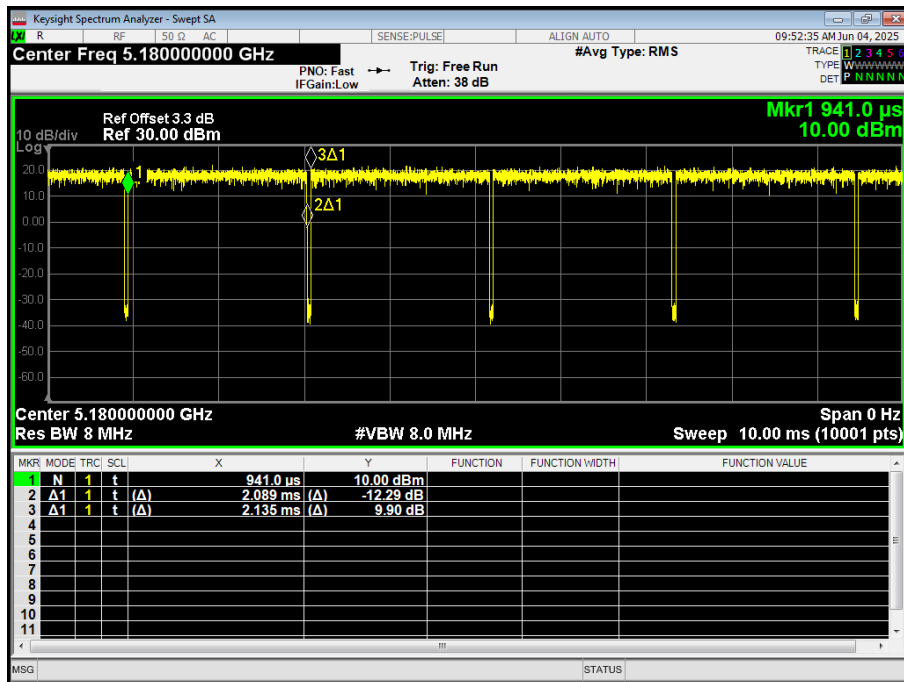


802.11n20 - 5180MHz

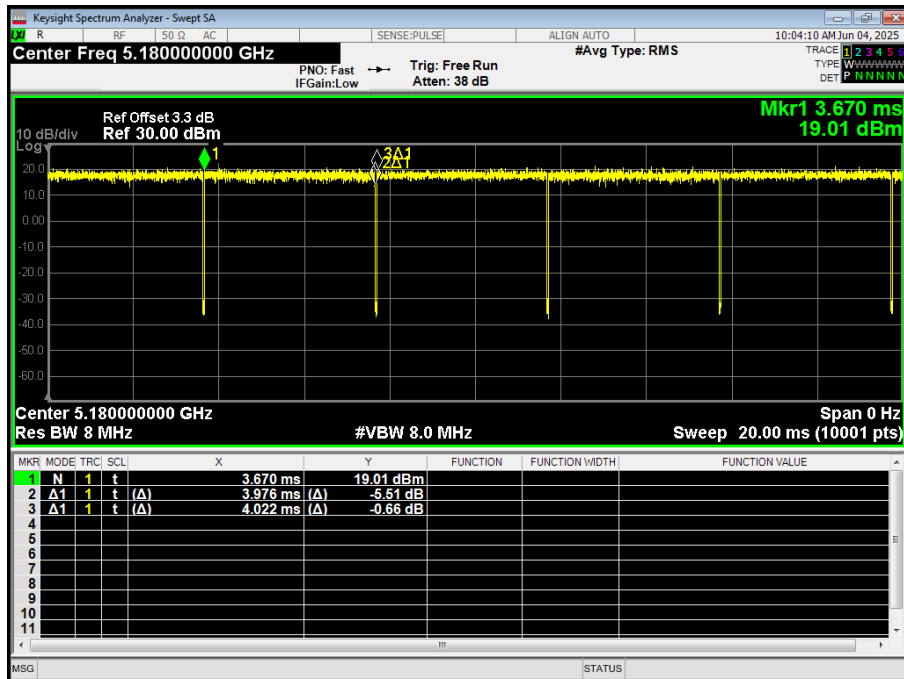



802.11n40 - 5190MHz

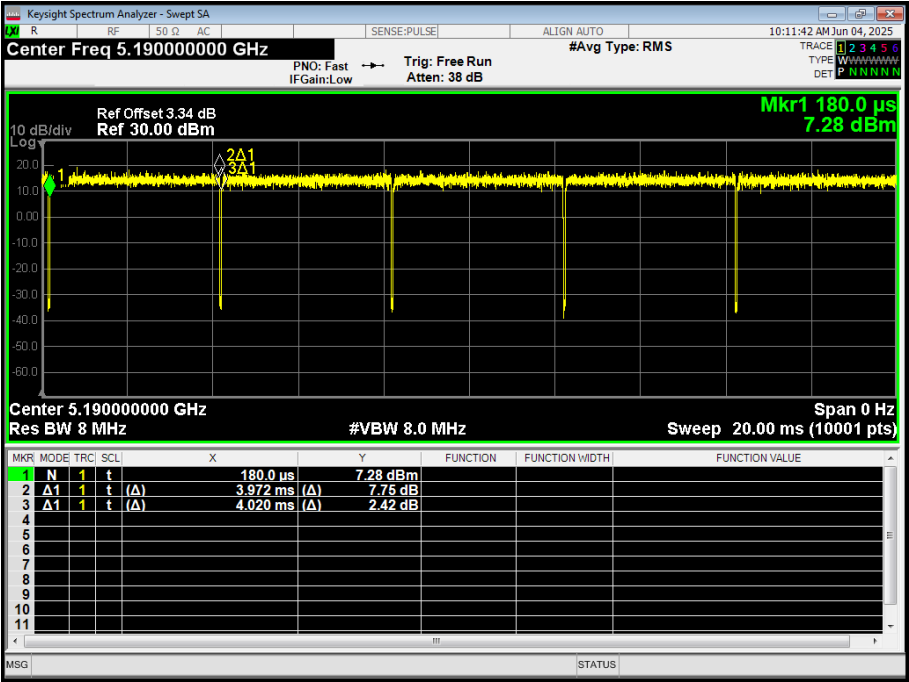

Note: All channel have been tested, and the report only reflects the worst case data.



10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is PCB antenna, the best case gain of the antenna is -3.64dBi, reference to the appendix II for details	



11. TEST SETUP PHOTO

Reference to the appendix I for details.

11. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******