



REPORT No.: SZ16050136W03

FCC RF TEST REPORT

APPLICANT : Suzhou Hyco Information Technology Ltd

PRODUCT NAME : Smart Logistics watches

MODEL NAME : W561

TRADE NAME : HYCO

BRAND NAME : HYCO

FCC ID : 2AIHX-561V21

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2016-09-05



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
[Http://www.morlab.com](http://www.morlab.com)

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	5
1.3 TEST STANDARDS AND RESULTS	6
1.3.1 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 NUMBER OF HOPPING FREQUENCY	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST PROCEDURE	8
2.2.4 TEST RESULT	8
2.3 PEAK OUTPUT POWER	12
2.3.1 REQUIREMENT	12
2.3.2 TEST DESCRIPTION	12
2.3.3 TEST RESULT	12
2.4 20DB BANDWIDTH	14
2.4.1 DEFINITION	14
2.4.2 TEST DESCRIPTION	14
2.4.3 TEST PROCEDURE	14
2.4.4 TEST RESULT	14
2.5 CARRIED FREQUENCY SEPARATION	24
2.5.1 DEFINITION	24
2.5.2 TEST DESCRIPTION	24
2.5.3 TEST PROCEDURE	24
2.5.4 TEST RESULT	25
2.6 TIME OF OCCUPANCY (DWELL TIME)	28



2.6.1	REQUIREMENT	28
2.6.2	TEST DESCRIPTION	28
2.6.3	TEST PROCEDURE	28
2.6.4	TEST RESULT	29
2.7	CONDUCTED SPURIOUS EMISSIONS	41
2.7.1	REQUIREMENT	41
2.7.2	TEST DESCRIPTION	41
2.7.3	TEST PROCEDURE	41
2.7.4	TEST RESULT	42
2.8	RESTRICTED FREQUENCY BANDS	54
2.8.1	REQUIREMENT	54
2.8.2	TEST DESCRIPTION	54
2.8.3	TEST PROCEDURE	55
2.8.4	TEST RESULT	55
2.9	CONDUCTED EMISSION	63
2.9.1	REQUIREMENT	63
2.9.2	TEST DESCRIPTION	63
2.9.3	TEST RESULT	64
2.10	RADIATED EMISSION	66
2.10.1	REQUIREMENT	66
2.10.2	TEST DESCRIPTION	67
2.10.3	TEST PROCEDURE	69
2.10.4	TEST RESULT	69
ANNEX A GENERAL INFORMATION		79

Change History		
Issue	Date	Reason for change
1.0	2016-09-05	First edition



REPORT No.: SZ16050136W03

TEST REPORT DECLARATION

Applicant	Suzhou Hyco Information Technology Ltd
Applicant Address	Room 105, Tower B, North Zone, No.999, Huaxu Road, Qingpu District, Shanghai
Manufacturer	Suzhou Hyco Information Technology Ltd
Manufacturer Address	Room 105, Tower B, North Zone, No.999, Huaxu Road, Qingpu District, Shanghai
Product Name	Smart Logistics watches
Model Name	W561
Brand Name	HYCO
HW Version	V2.1
SW Version	w561a_4.3-20160604_1436
Test Standards	47 CFR Part 15 Subpart C
Test Date	2016-06-06 to 2016-07-02
Test Result	PASS

Tested by : Zou Jian
Zou Jian

Reviewed by : Qiu Xiaojun
Qiu Xiaojun

Approved by : Peng Huarui
Peng Huarui



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	Suzhou Hyco Information Technology Ltd
Address:	Room 105, Tower B, North Zone, No.999, Huaxu Road, Qingpu District, Shanghai

1.2 Equipment under Test (EUT) Description

Brand Name:	HYCO
Trade Name:	HYCO
Model Name:	W561
Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Modulation Type:	Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Bluetooth Version:	2.1+EDR
Antenna Type:	FPC Antenna
Antenna Gain:	-0.5 dBi

NOTE:

The EUT is a Smart Logistics watches, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
01	V2.1	w561a_4.3-20160604_1436



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Result
1	15.203	Antenna Requirement	N.A	<u>PASS</u>
2	15.247(a)	Number of Hopping Frequency	Jun 06, 2016	<u>PASS</u>
3	15.247(b)	Peak Output Power	Jun 06, 2016	<u>PASS</u>
4	15.247(a)	20dB Bandwidth	Jun 06, 2016	<u>PASS</u>
5	15.247(a)	Carrier Frequency Separation	Jun 06, 2016	<u>PASS</u>
6	15.247(a)	Time of Occupancy (Dwell time)	Jun 06, 2016	<u>PASS</u>
7	15.247(d)	Conducted Spurious Emission	Jun 06, 2016	<u>PASS</u>
8	15.247(d)	Restricted Frequency Bands	Jun 20&Jul 02, 2016	<u>PASS</u>
9	15.209 15.247(d)	Radiated Emission	Jun 20, 2016	<u>PASS</u>
10	15.207	Conducted Emission	Jun 20, 2016	<u>PASS</u>

NOTE: The tests were performed according to the method of measurements prescribed in DA-00-705 and ANSI C63.10-2013.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2 Number of Hopping Frequency

2.2.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2 Test Description

A. Test Setup:

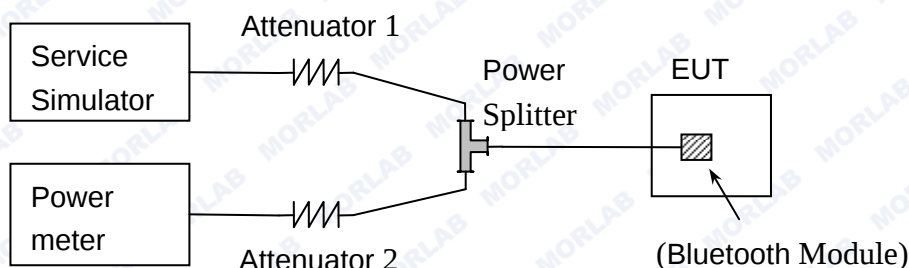

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).



2.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize


2.2.4 Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS

B. Test Plots:

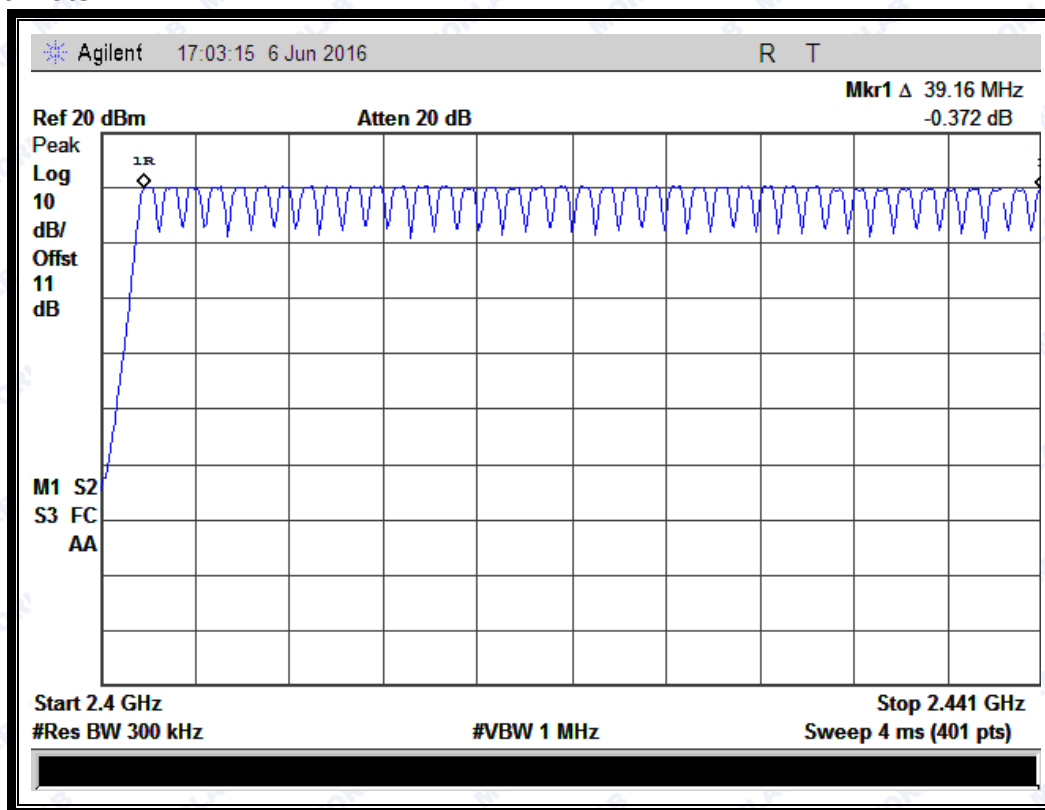




REPORT No.: SZ16050136W03

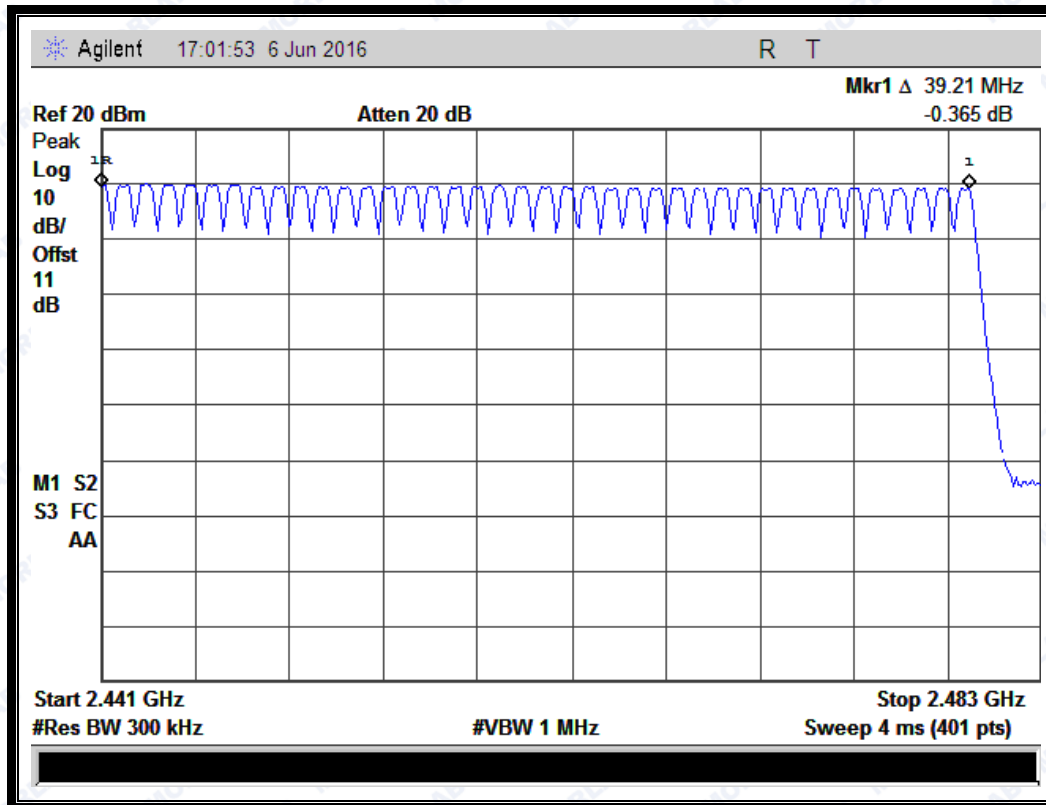

(Plot A: GFSK)




REPORT No.: SZ16050136W03

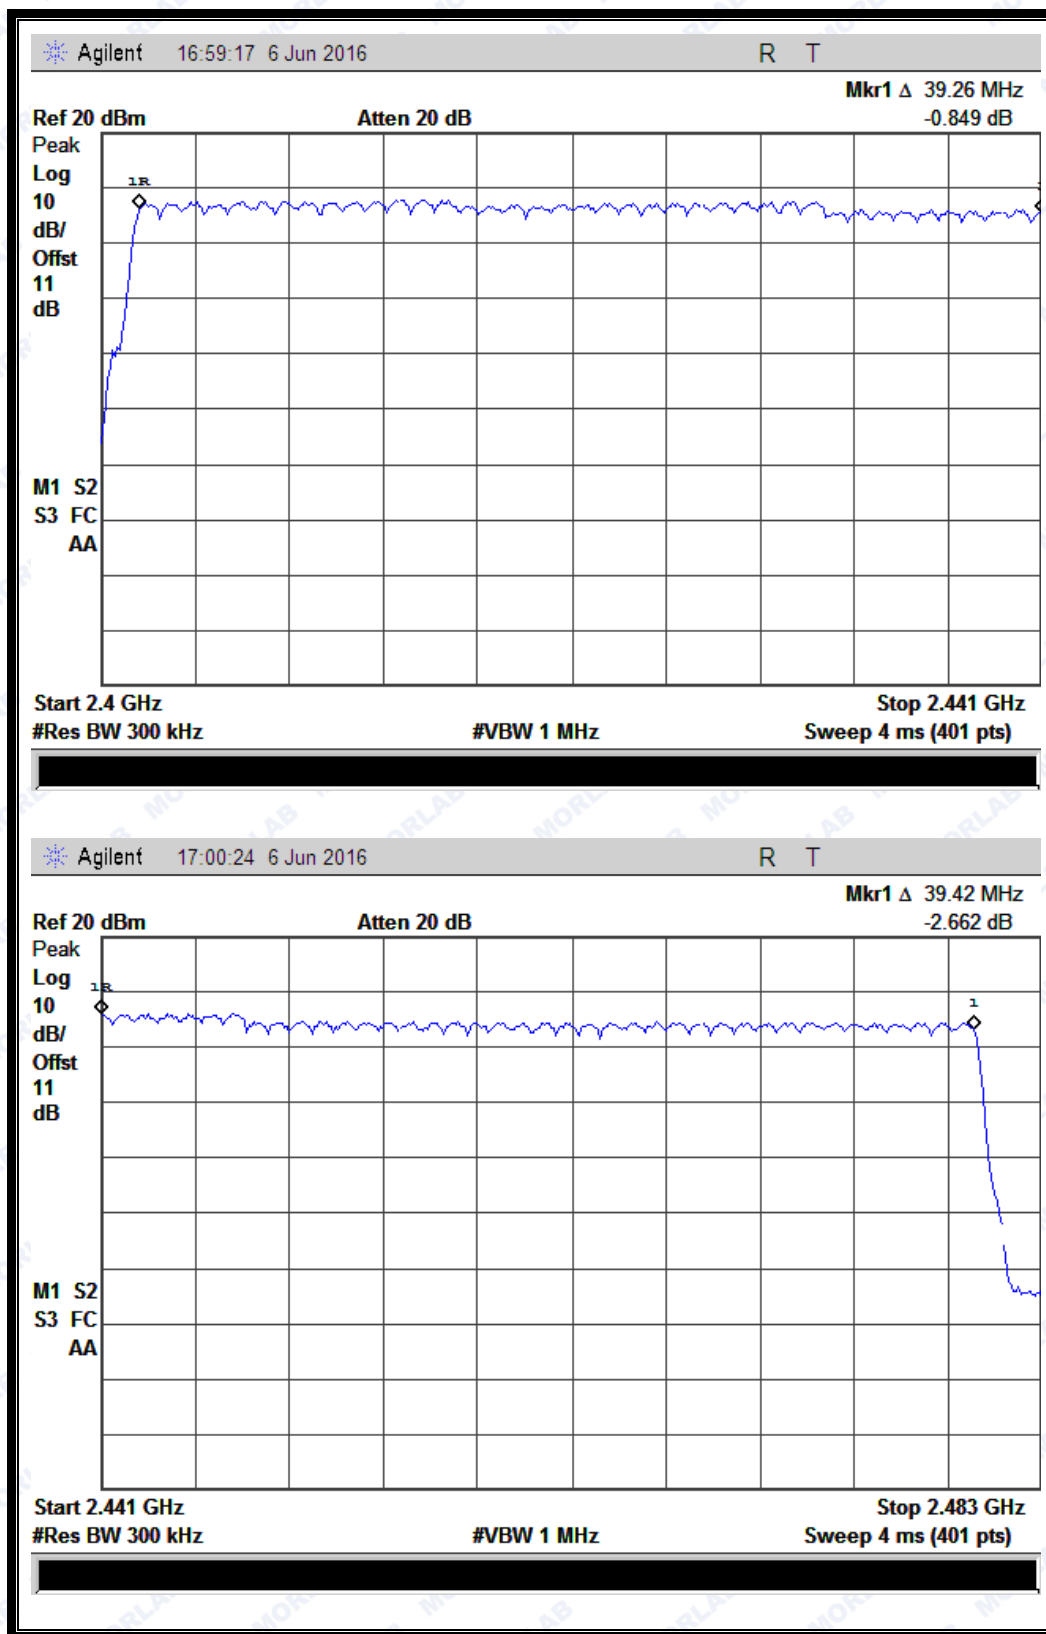

(Plot B: $\pi/4$ -DQPSK)



REPORT No.: SZ16050136W03

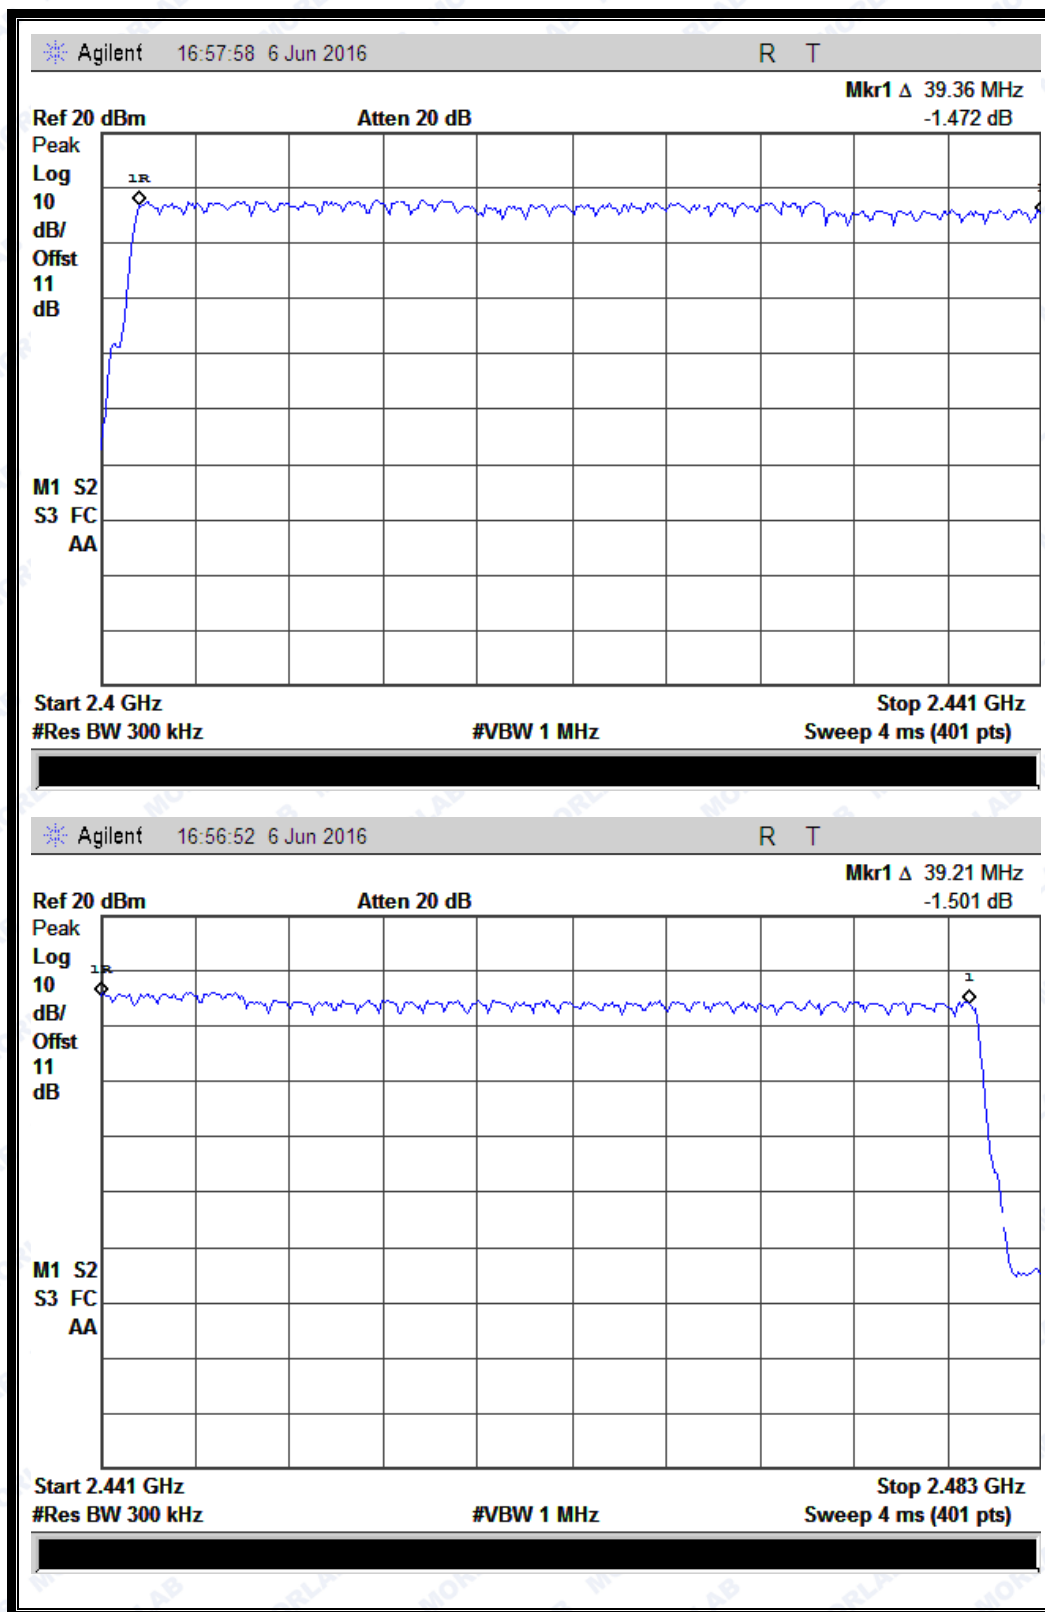

(Plot C: 8- DPSK)


2.3 Peak Output Power

2.3.1 Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2 Test Description

A. Test Setup:

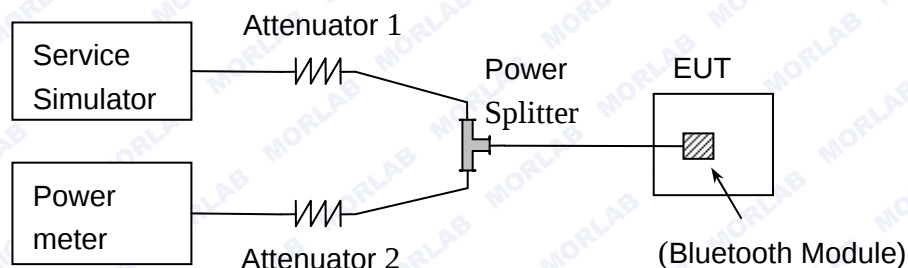

The Bluetooth Module of the EUT is coupled to the Power meter and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by power meter.

**2.3.3.1 GFSK Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.52	0.0113	20.97	0.125	PASS
39	2441	10.18	0.0104			PASS
78	2480	9.64	0.0092			PASS

2.3.3.2 $\pi/4$ -DQPSK Mode**B. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	8.94	0.0078	20.97	0.125	PASS
39	2441	7.83	0.0061			PASS
78	2480	6.31	0.0043			PASS

2.3.3.3 8-DPSK Mode**C. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	9.04	0.0080	20.97	0.125	PASS
39	2441	7.95	0.0062			PASS
78	2480	6.50	0.0045			PASS


2.4 20dB Bandwidth

2.4.1 Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2 Test Description

A. Test Setup:

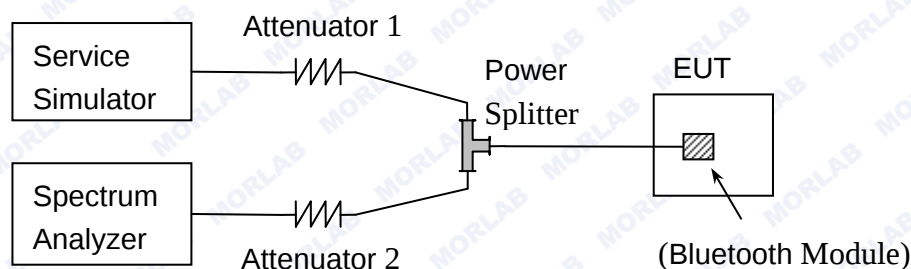

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


2.4.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

**2.4.4.1 GFSK Mode****A. Test Verdict:**

The maximum 20dB bandwidth measured is 1.040MHz according to the table below.


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.040	Plot A
39	2441	1.036	Plot B
78	2480	0.9814	Plot C

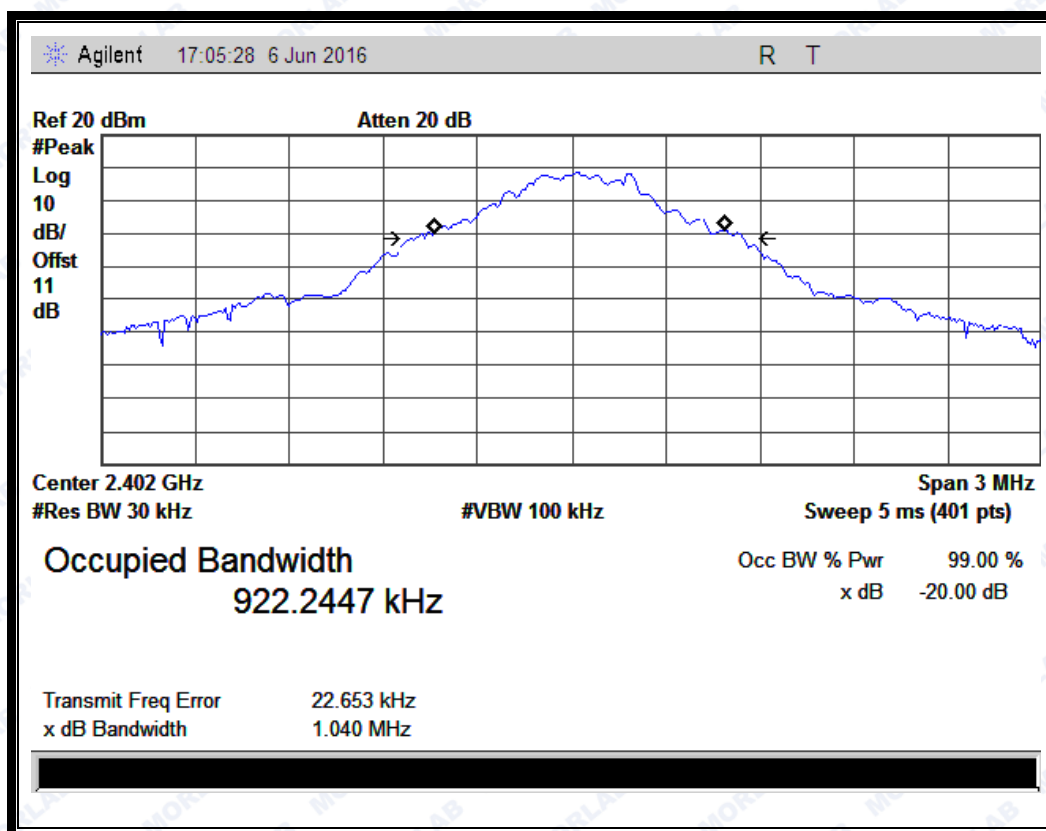B. Test Plots:


(Plot A: Channel = 2402 @ GFSK)



REPORT No.: SZ16050136W03

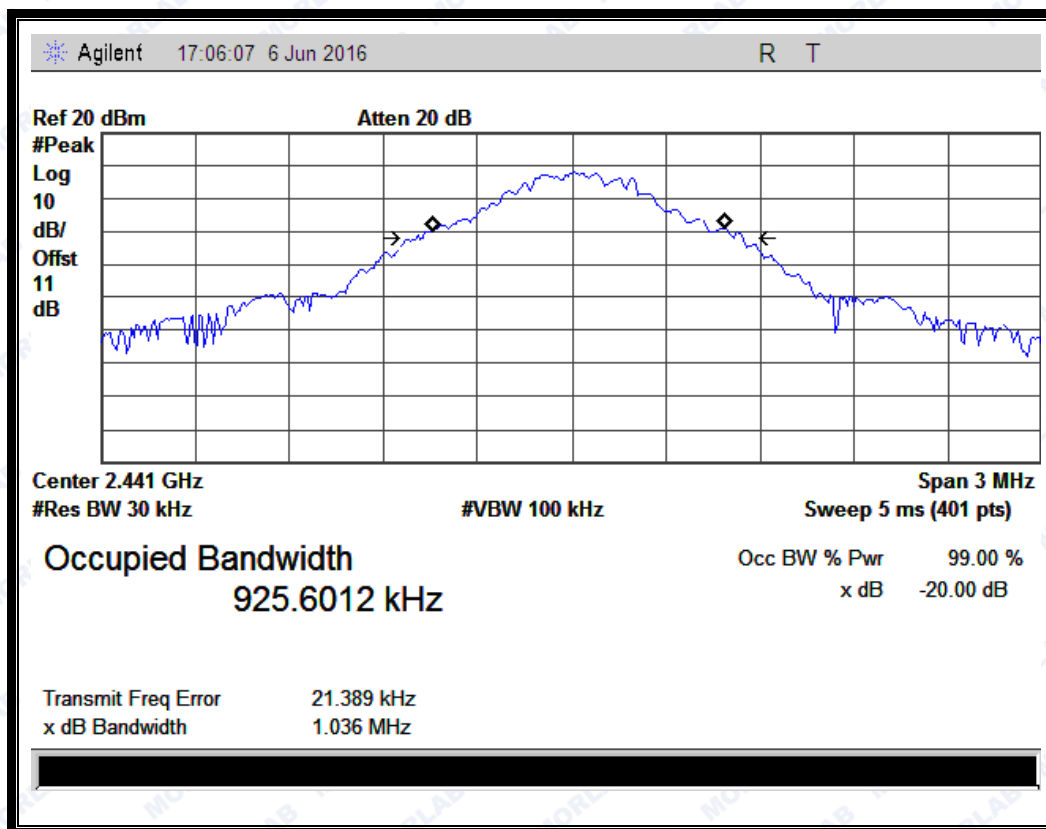

(Plot B: Channel = 2441 @ GFSK)

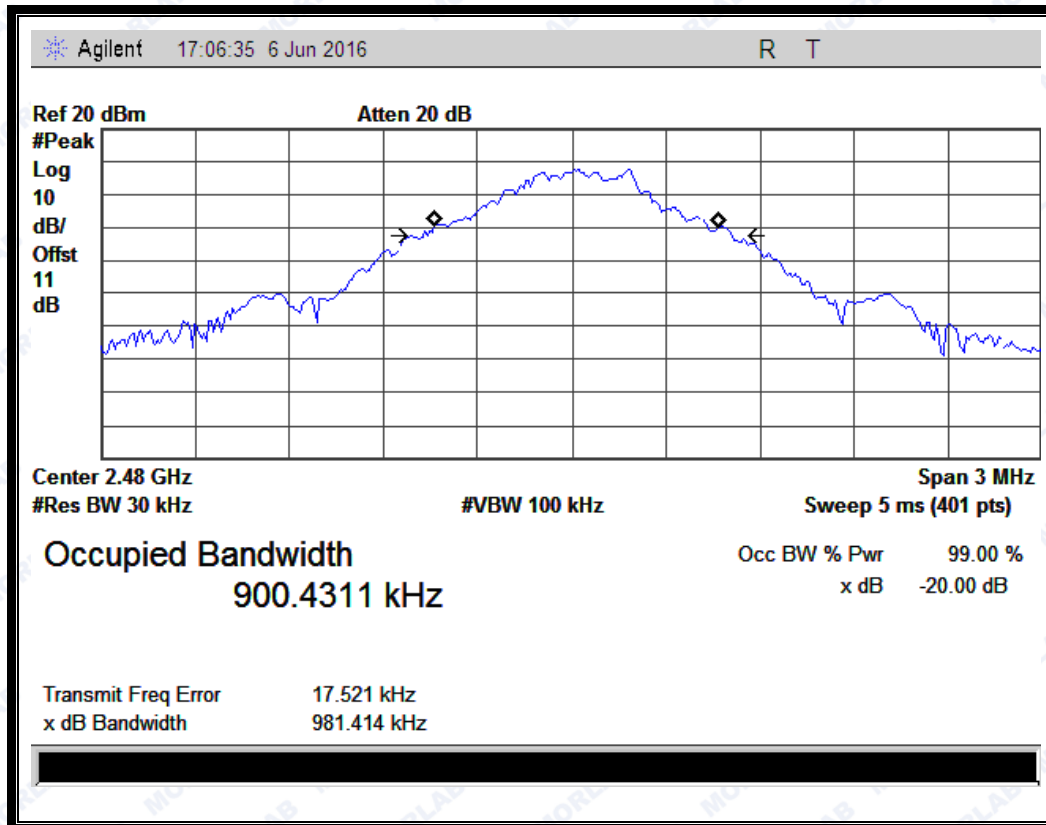

(Plot C: Channel = 2480 @ GFSK)

2.4.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.382MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.372	Plot D
39	2441	1.382	Plot E
78	2480	1.367	Plot F

B. Test Plots:




REPORT No.: SZ16050136W03

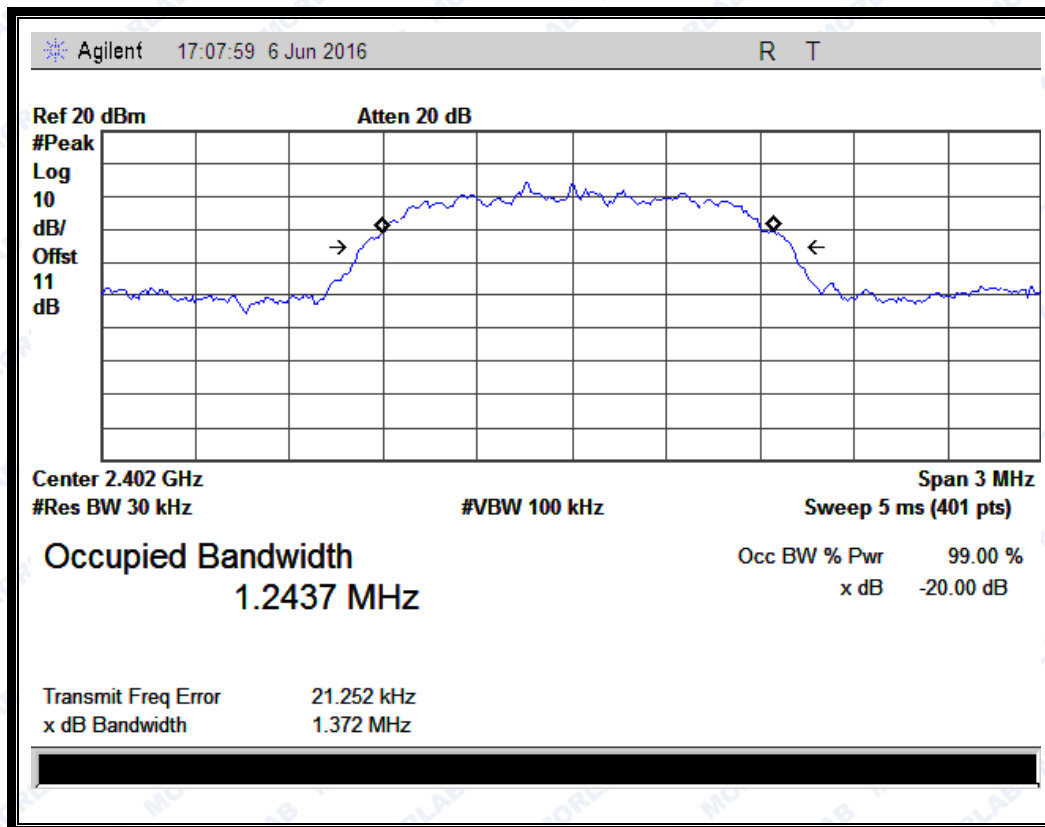


(Plot D: Channel = 2402 @ $\pi/4$ -DQPSK)



REPORT No.: SZ16050136W03

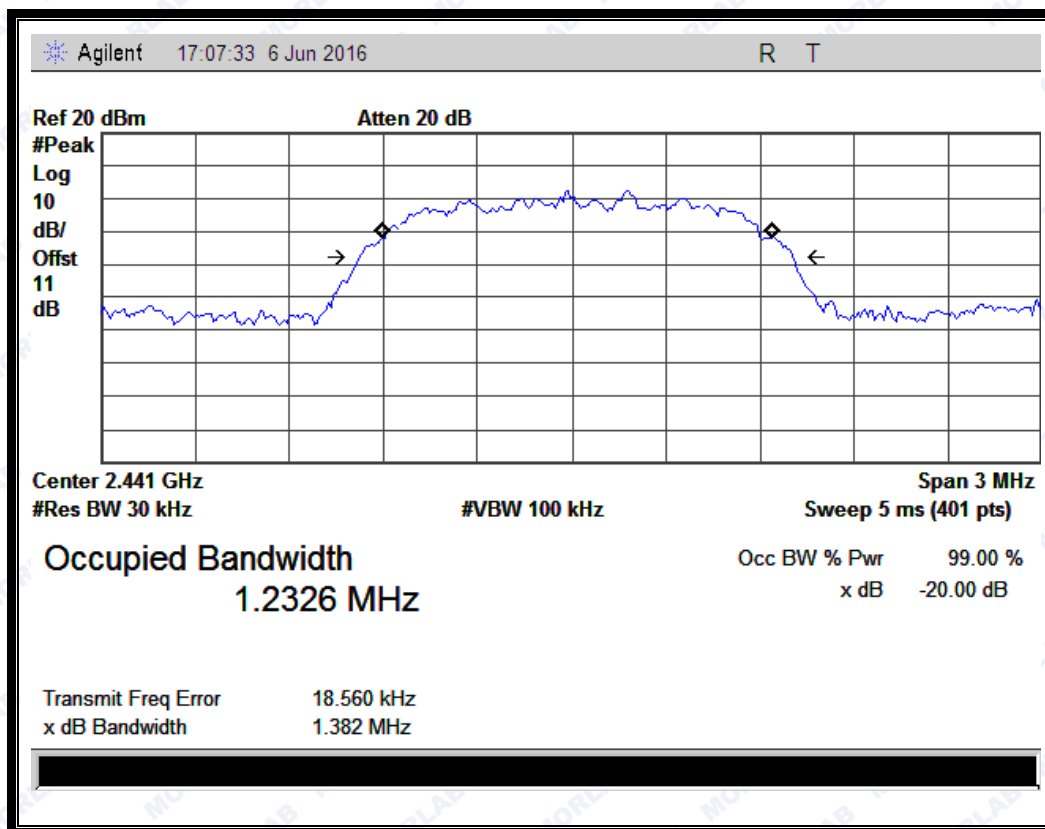

(Plot E: Channel = 2441 @ $\pi/4$ -DQPSK)

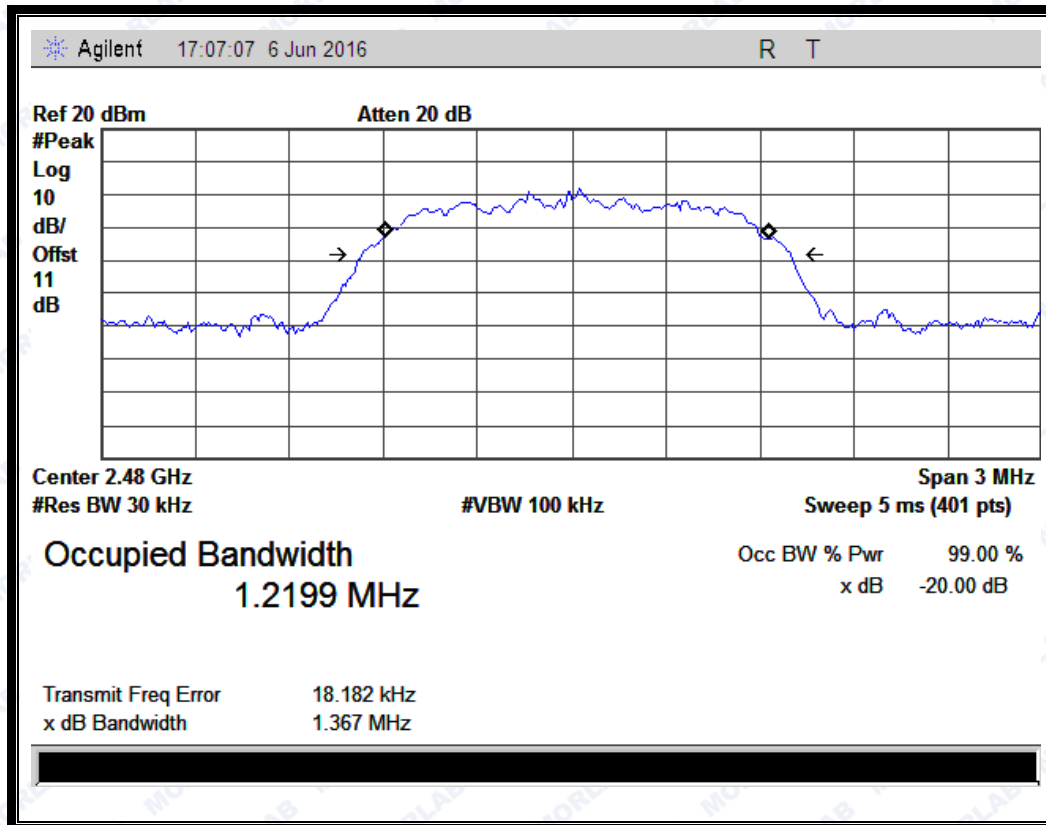(Plot F: Channel = 2480 @ $\pi/4$ -DQPSK)

2.4.4.3 8-DPSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 2.052MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	2.052	Plot G
39	2441	1.333	Plot H
78	2480	1.331	Plot I

B. Test Plots:




REPORT No.: SZ16050136W03

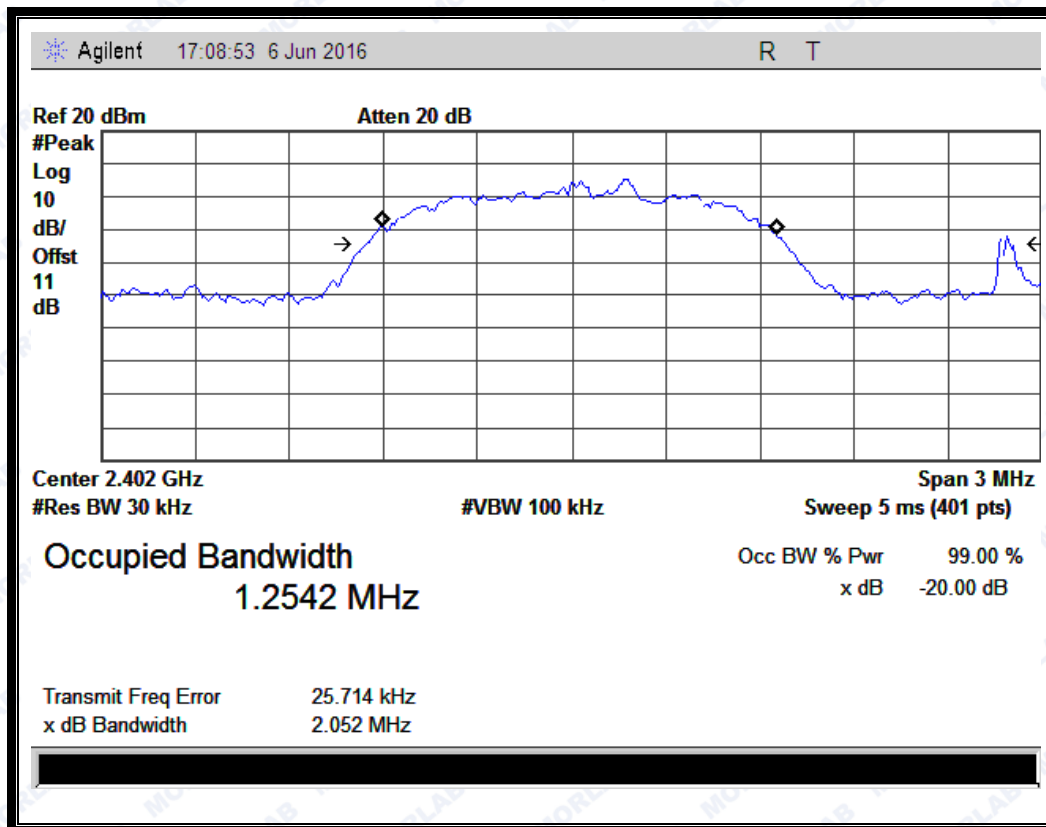

(Plot G: Channel = 2402 @ 8-DPSK)




REPORT No.: SZ16050136W03

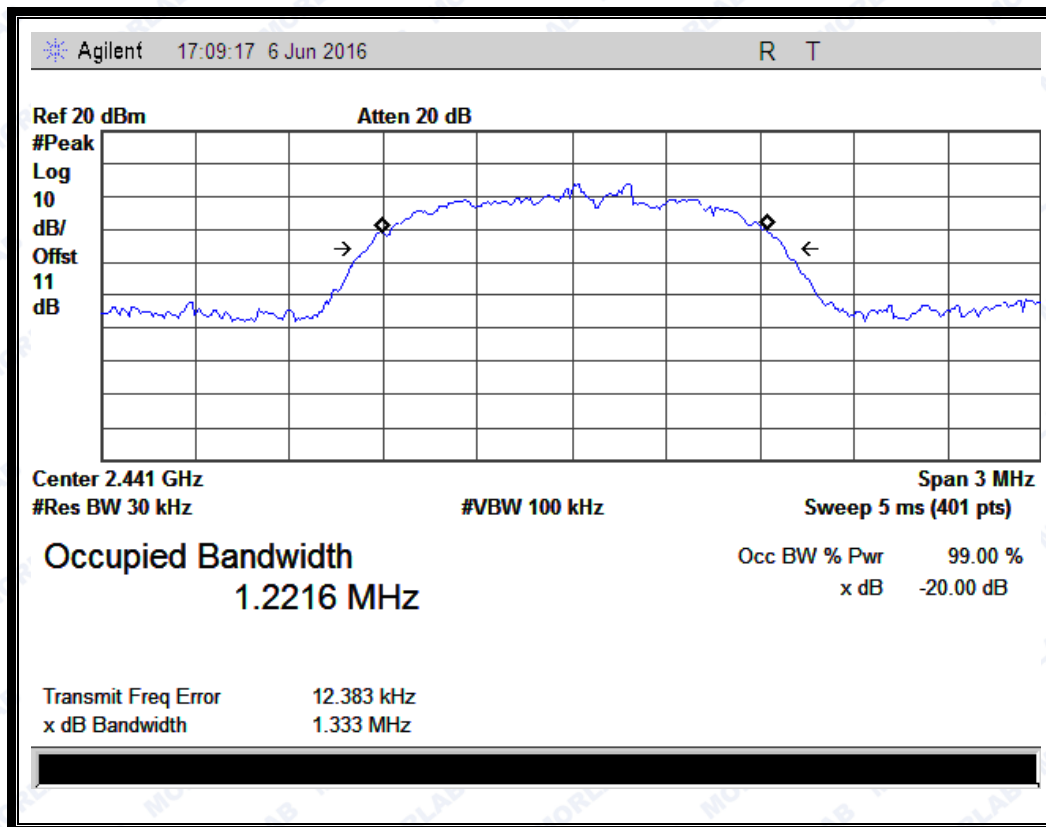

(Plot H: Channel = 2441 @ 8-DPSK)



REPORT No.: SZ16050136W03

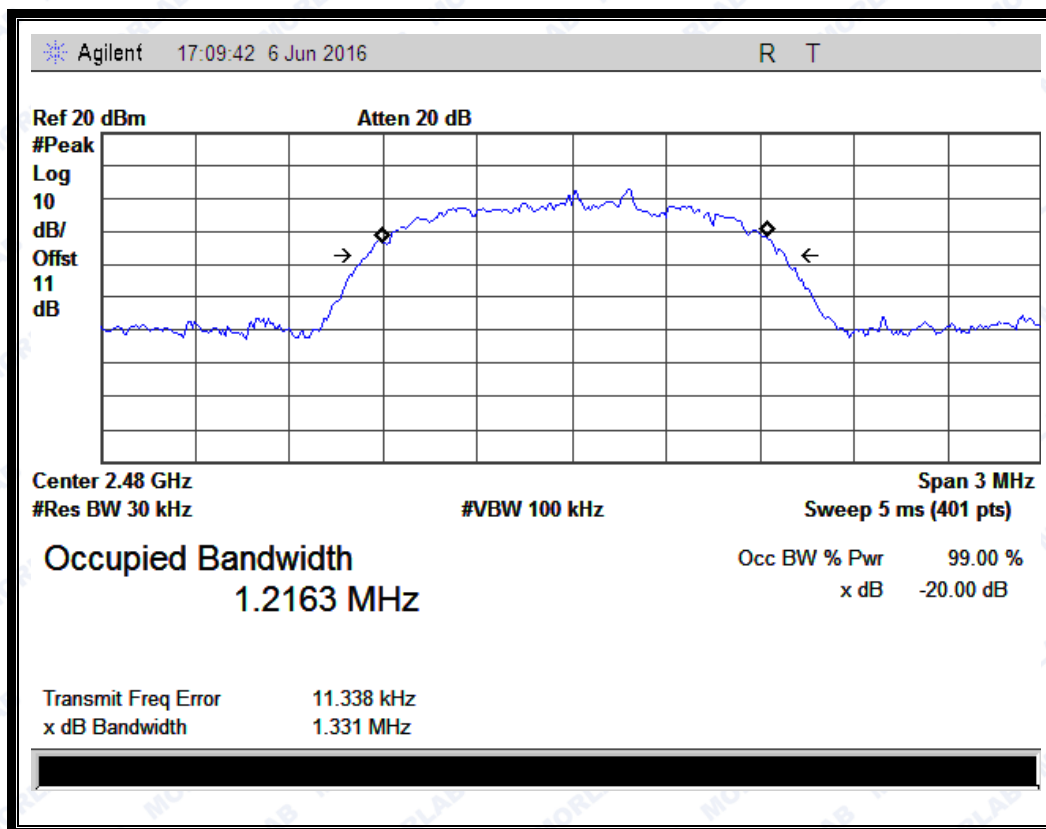

(Plot I: Channel = 2480 @ 8-DPSK)


2.5 Carried Frequency Separation

2.5.1 Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2 Test Description

A. Test Setup:

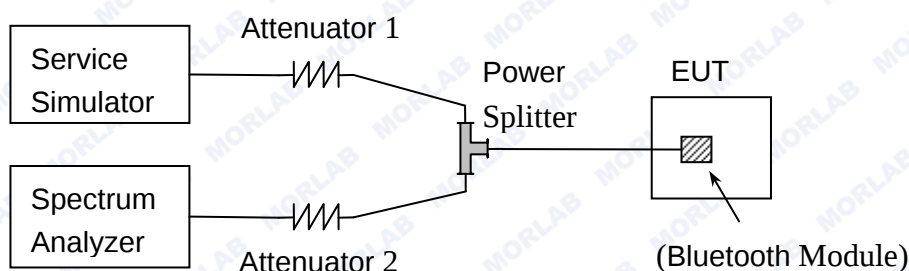

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.5.4 Test Result


The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 0), whichever is greater. So, the verdict is PASSING

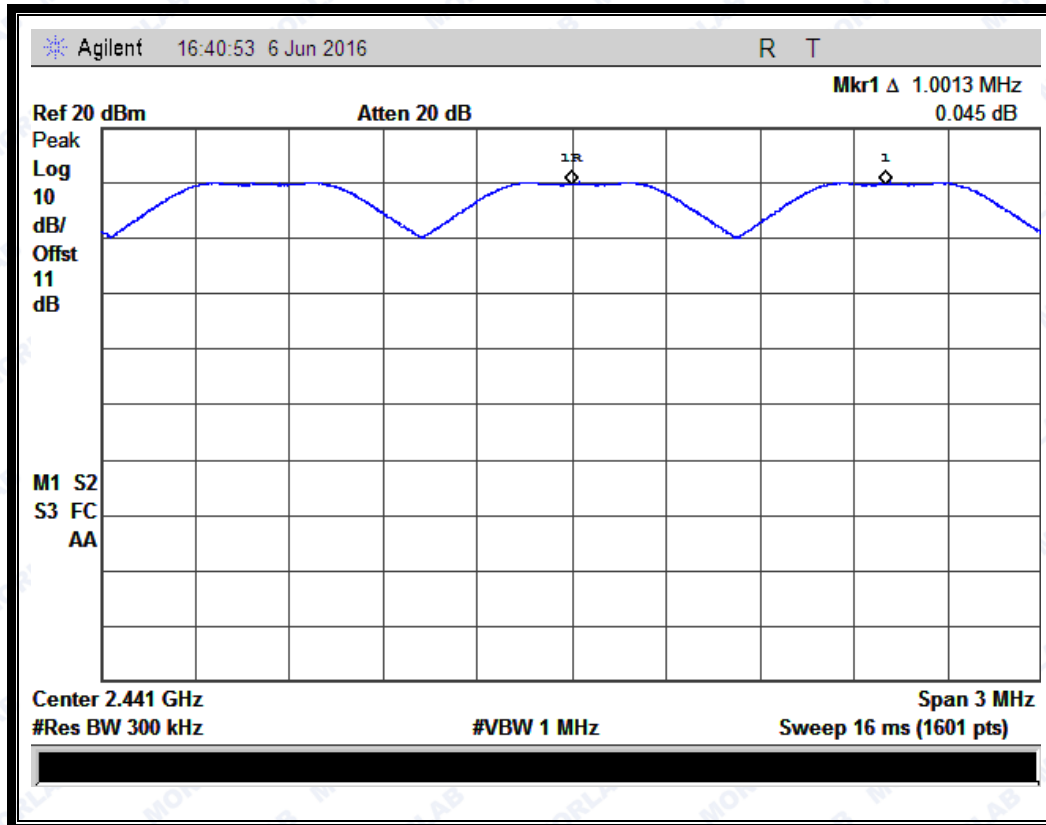

(Plot A: GFSK)




REPORT No.: SZ16050136W03

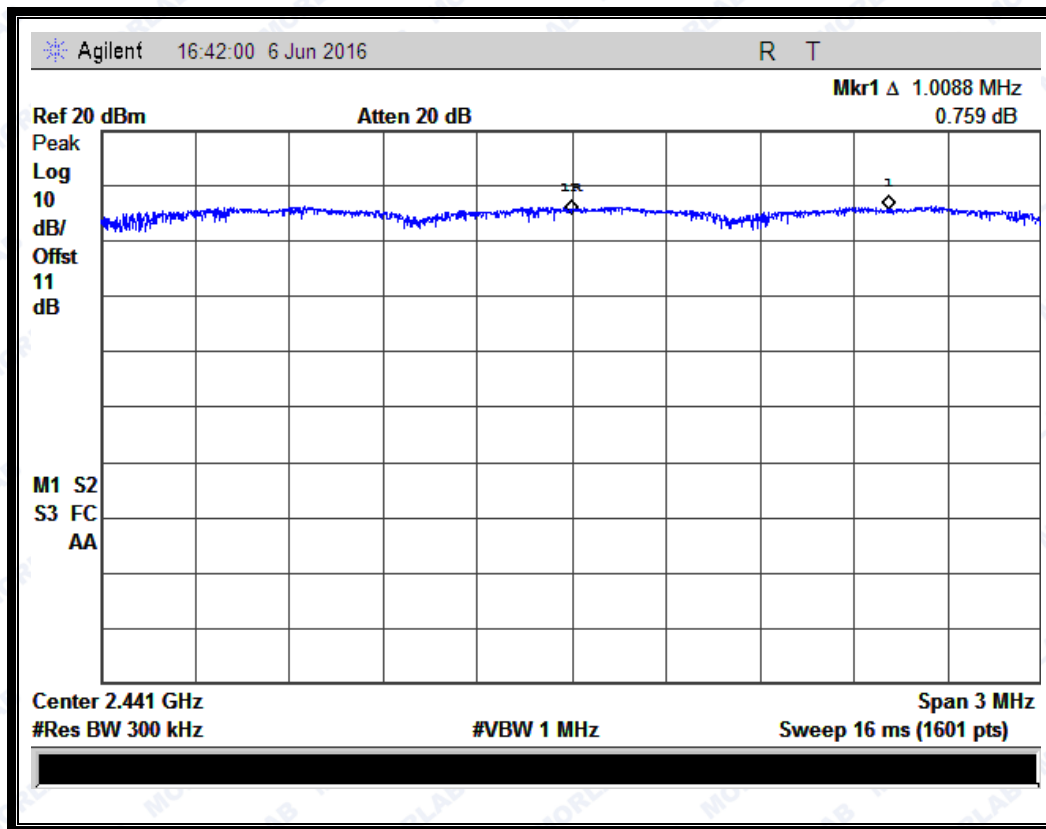

(Plot B: $\pi/4$ -DQPSK)



REPORT No.: SZ16050136W03

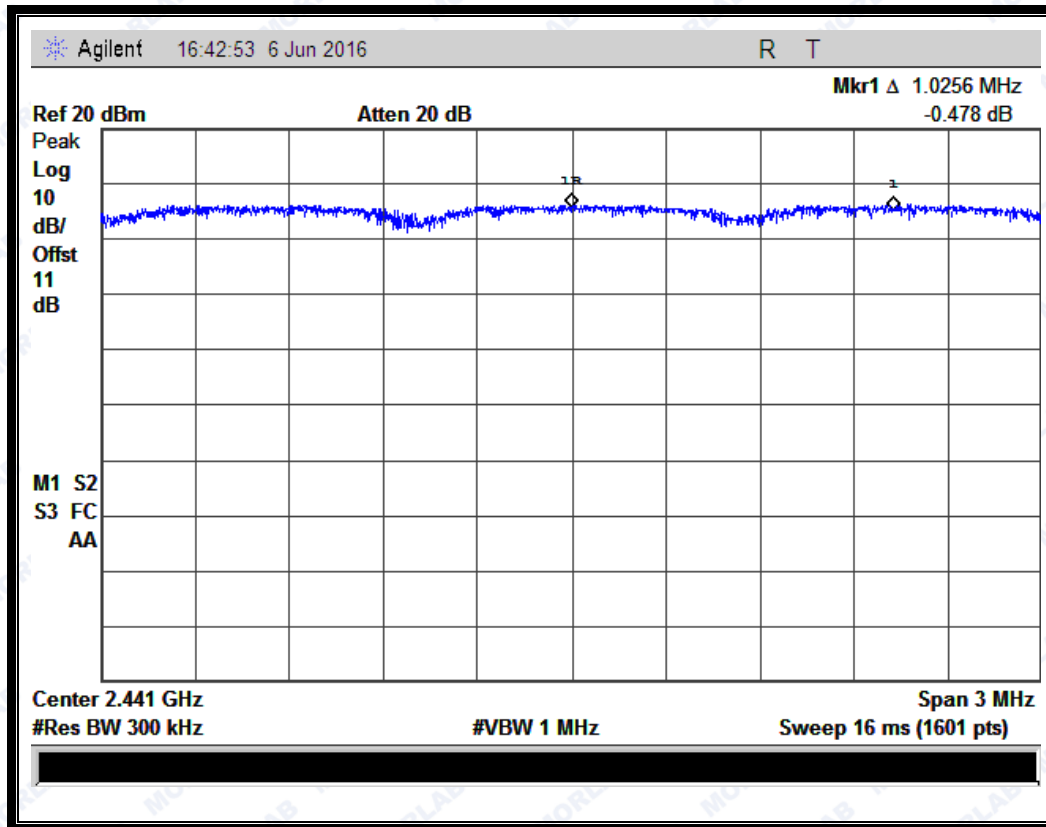

(Plot C: 8-DPSK)


2.6 Time of Occupancy (Dwell time)

2.6.1 Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2 Test Description

A. Test Setup:

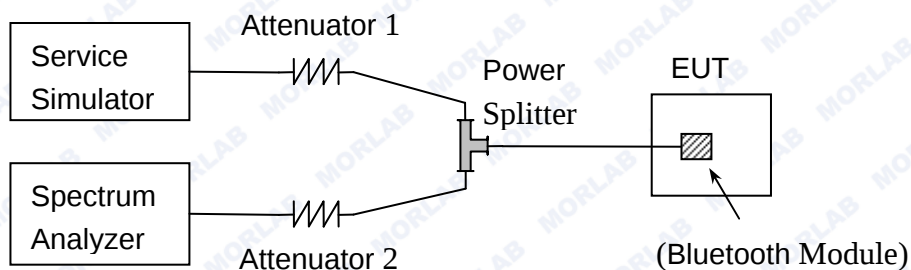

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.6.3 Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in 3.16 s}) * \text{pulse width}$.



REPORT No.: SZ16050136W03


2.6.4 Test Result

2.6.4.1 GFSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.38	31	0.01178	0.1178	0.4	PASS
DH3	1.59	17	0.02703	0.2703		PASS
DH5	2.86	12	0.03432	0.3432		PASS

B. Test Plots:

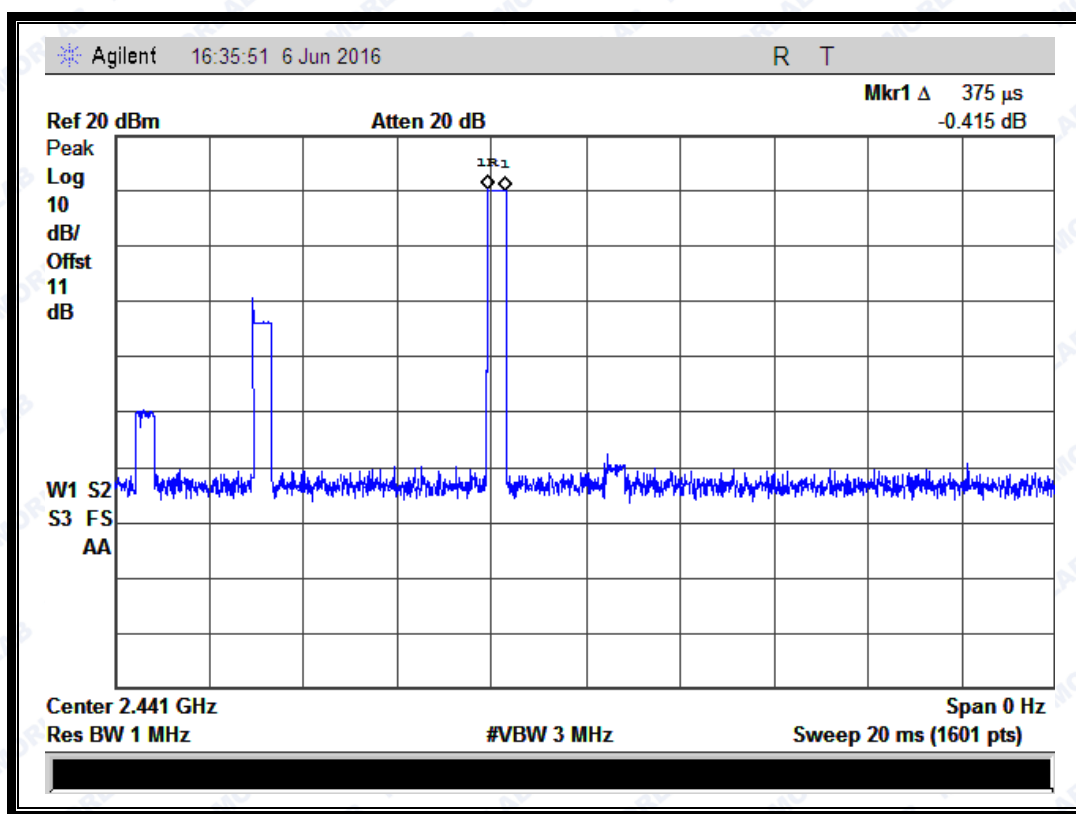




REPORT No.: SZ16050136W03

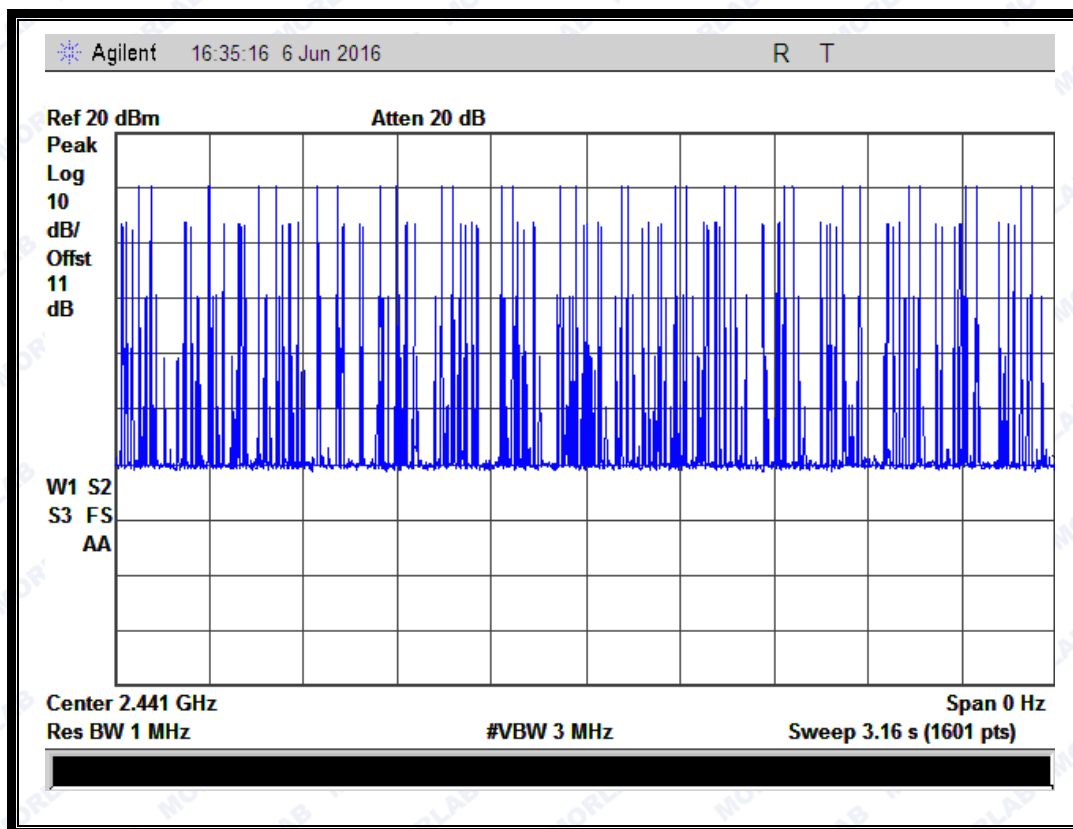

(Plot A: DH1 @ GFSK)




REPORT No.: SZ16050136W03

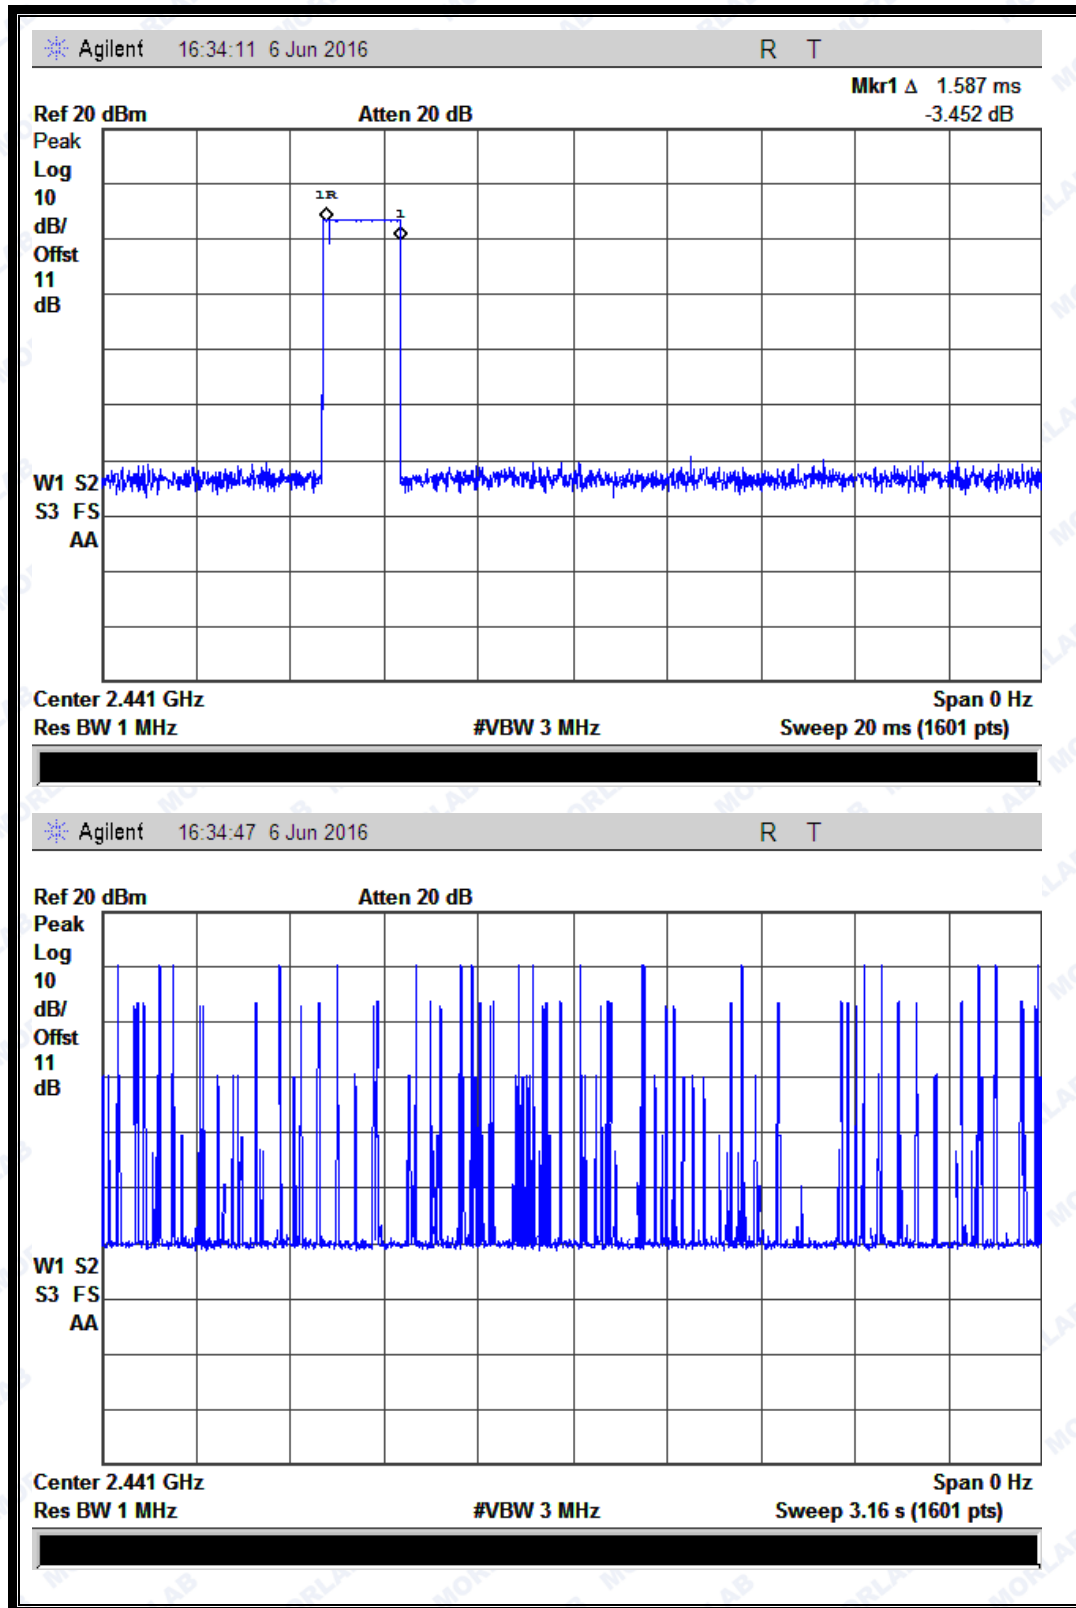

(Plot B: DH3 @ GFSK)



REPORT No.: SZ16050136W03

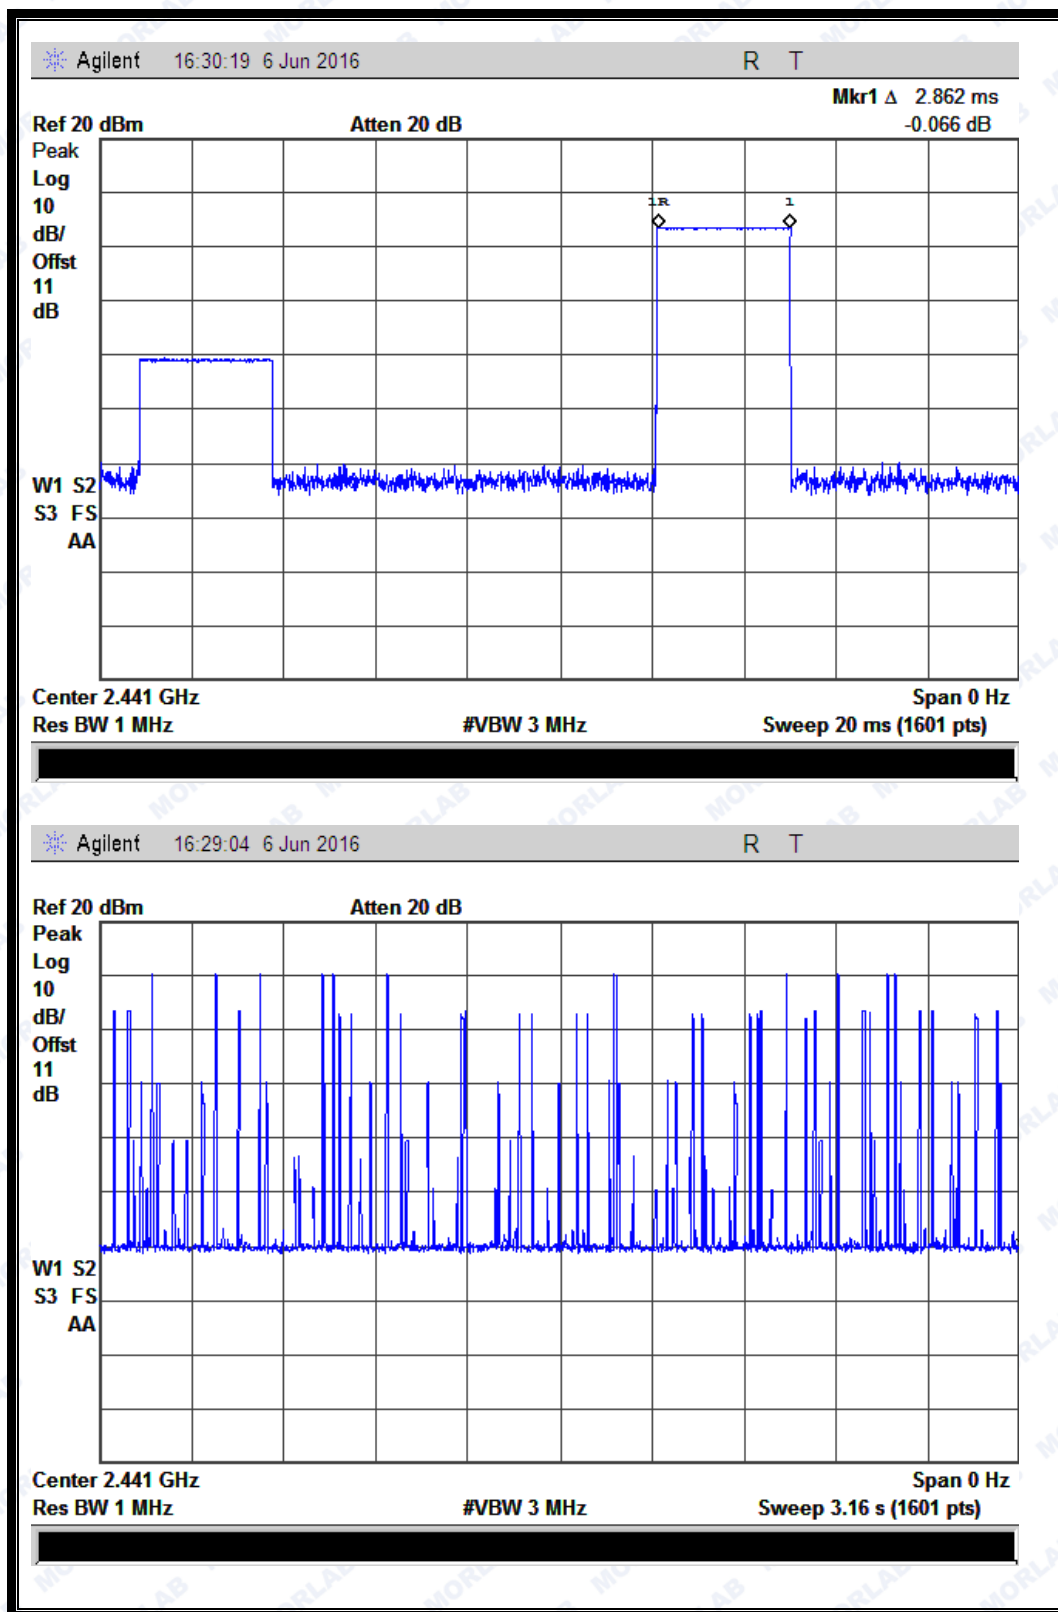

(Plot C: DH5 @ GFSK)




REPORT No.: SZ16050136W03

2.6.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.35	31	0.01085	0.1085	0.4	PASS
DH3	1.58	18	0.02844	0.2844		PASS
DH5	2.84	12	0.03408	0.3408		PASS

B. Test Plots:

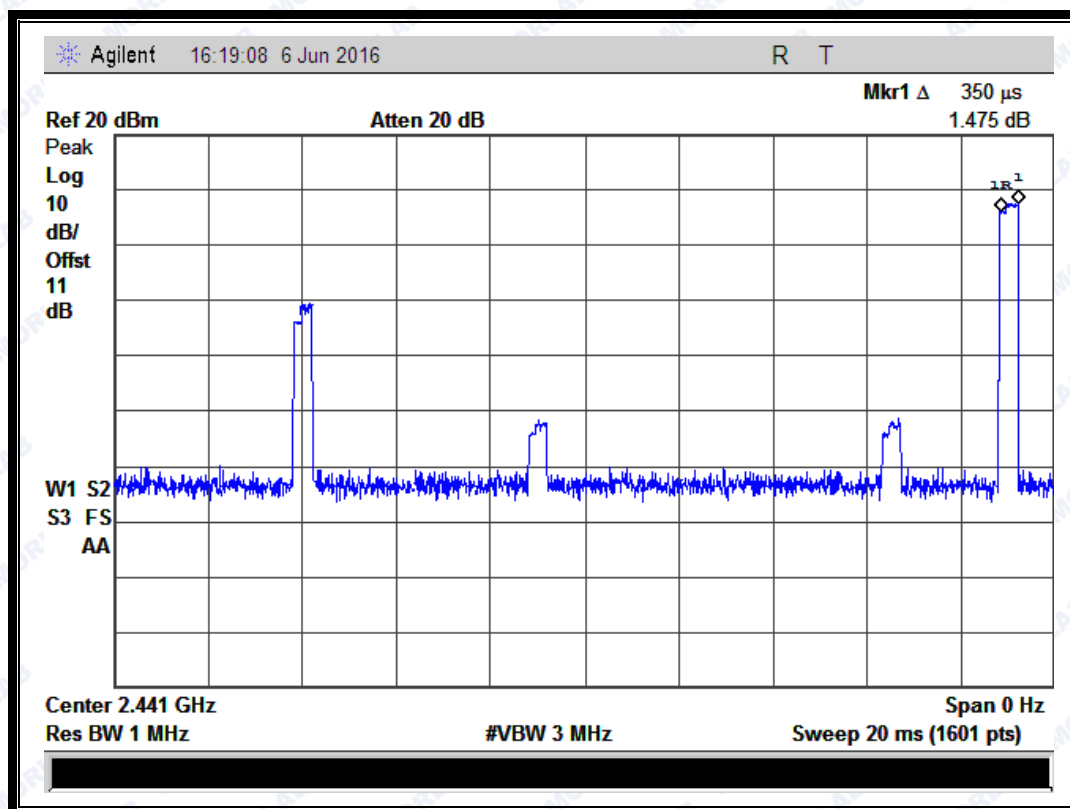




REPORT No.: SZ16050136W03

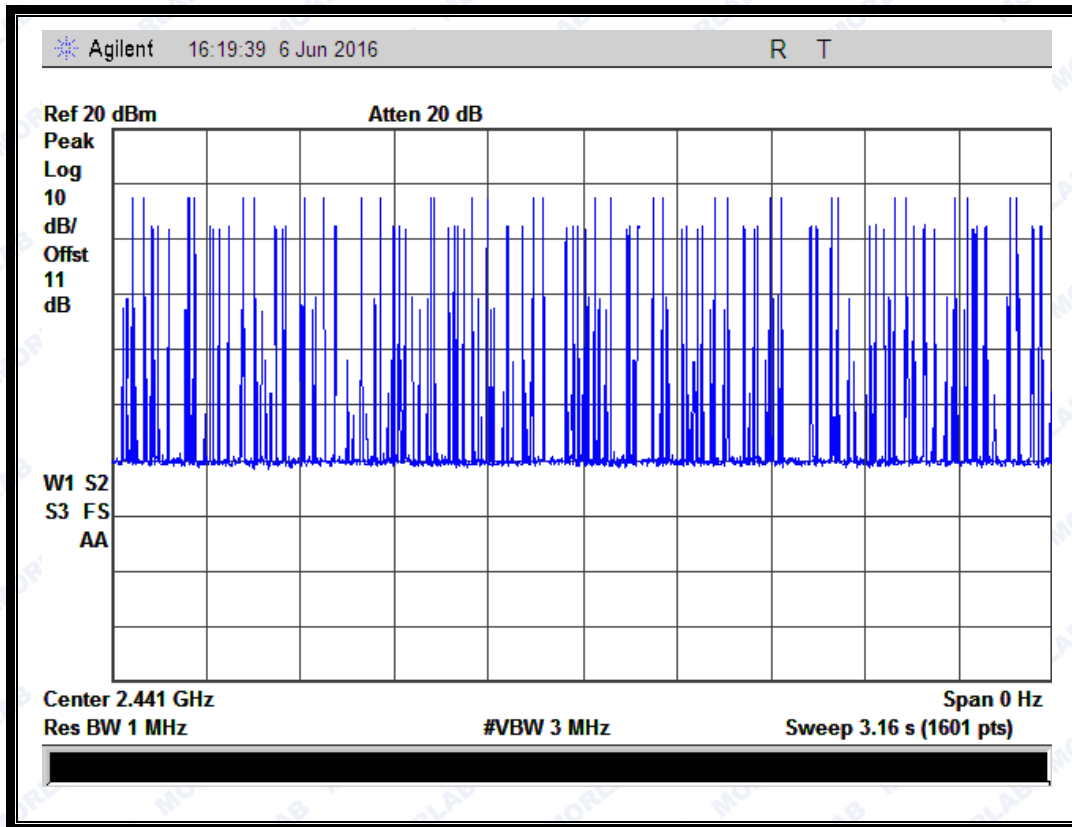

(Plot D: DH1 @ $\pi/4$ -DQPSK)




REPORT No.: SZ16050136W03

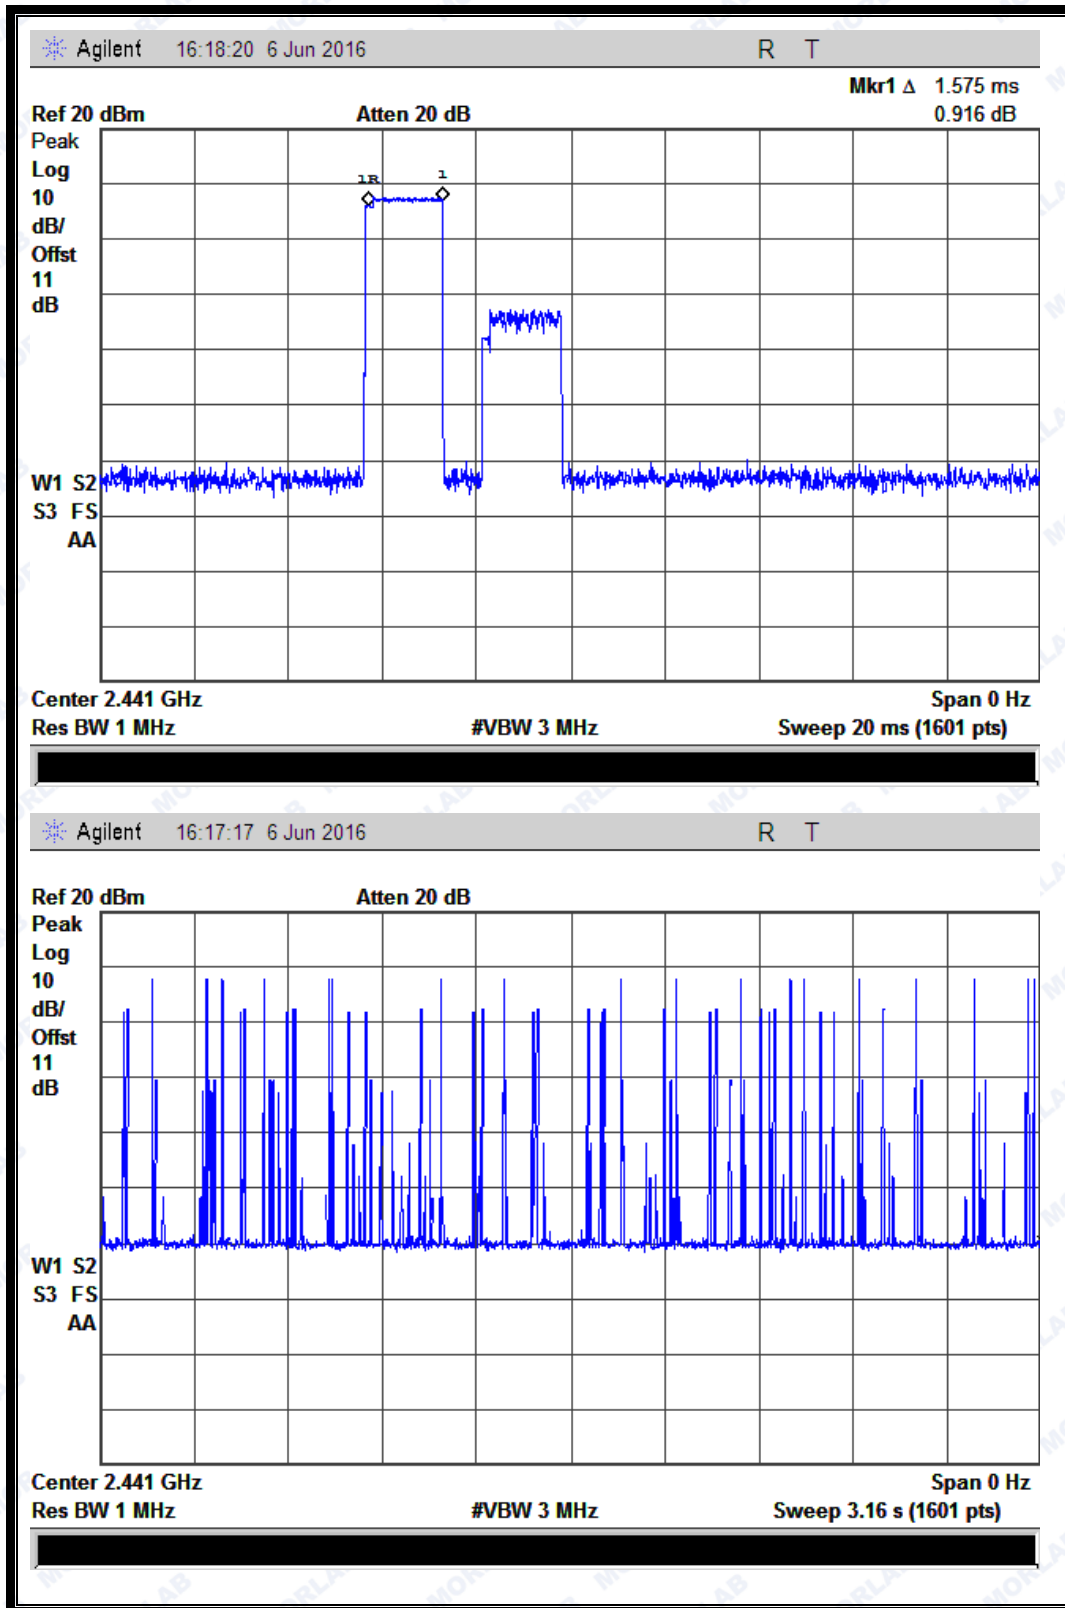

(Plot E: DH3 @ $\pi/4$ -DQPSK)



REPORT No.: SZ16050136W03

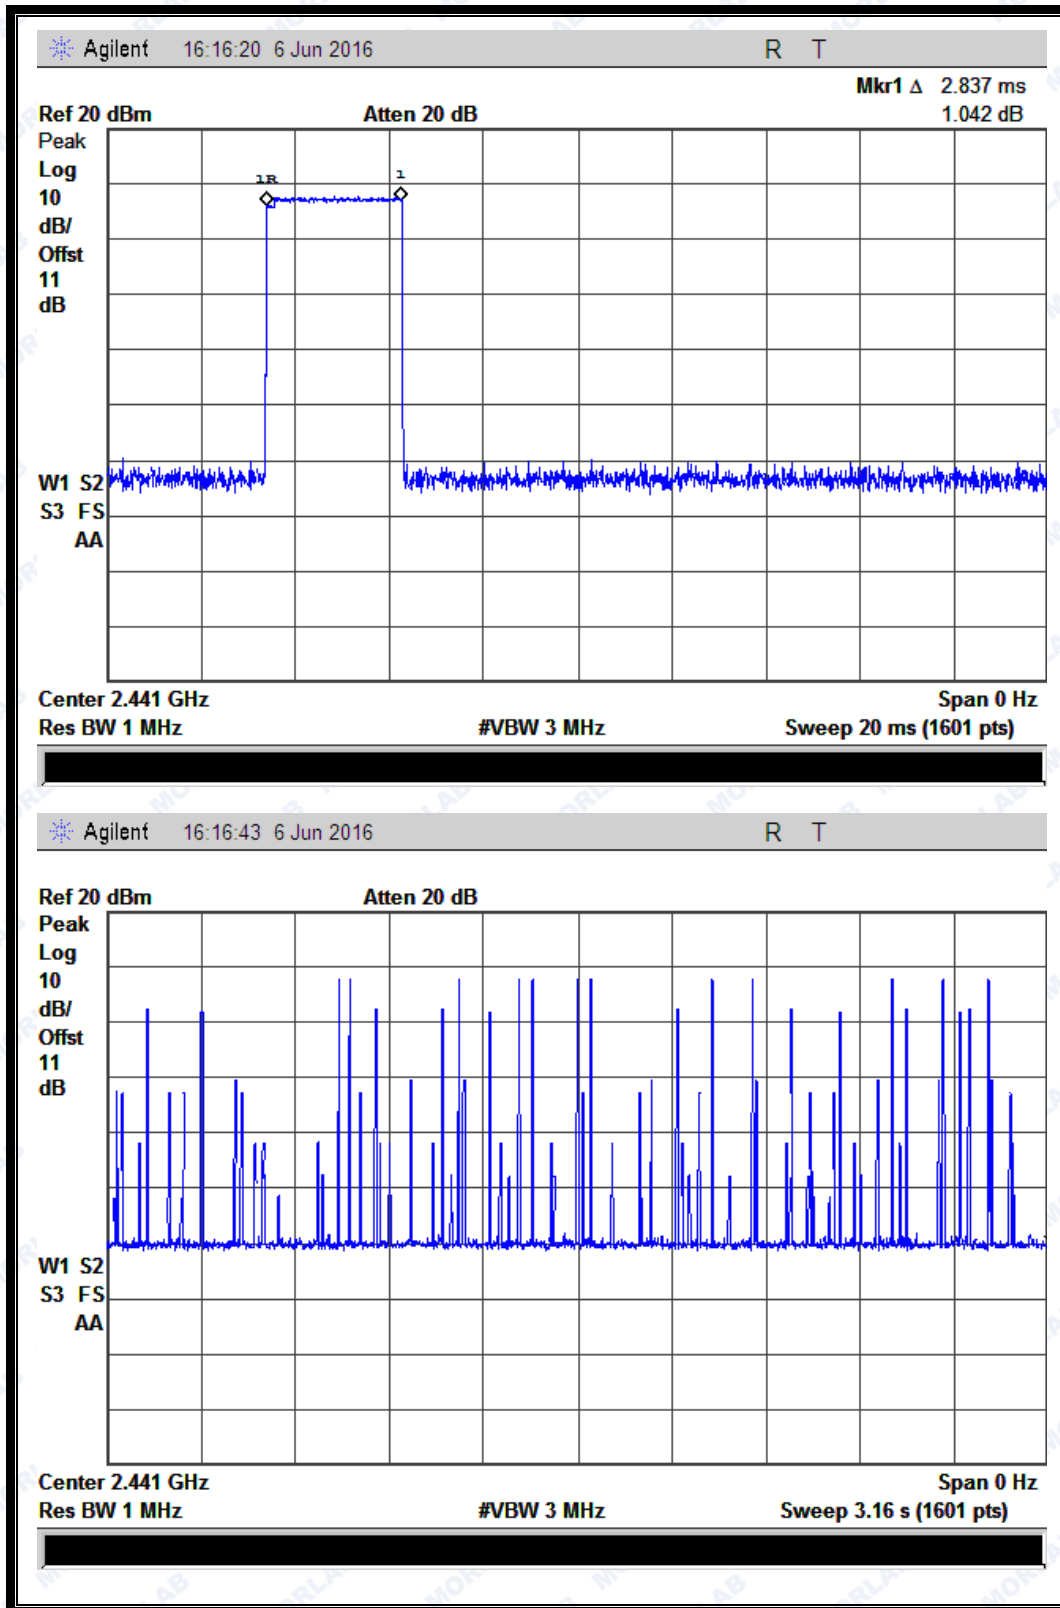

(Plot F: DH5 @ $\pi/4$ -DQPSK)




REPORT No.: SZ16050136W03

2.6.4.3 8-DPSK mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.39	32	0.01248	0.1248	0.4	PASS
DH3	1.61	17	0.02737	0.2737		PASS
DH5	2.75	12	0.03300	0.3300		PASS

B. Test Plots:

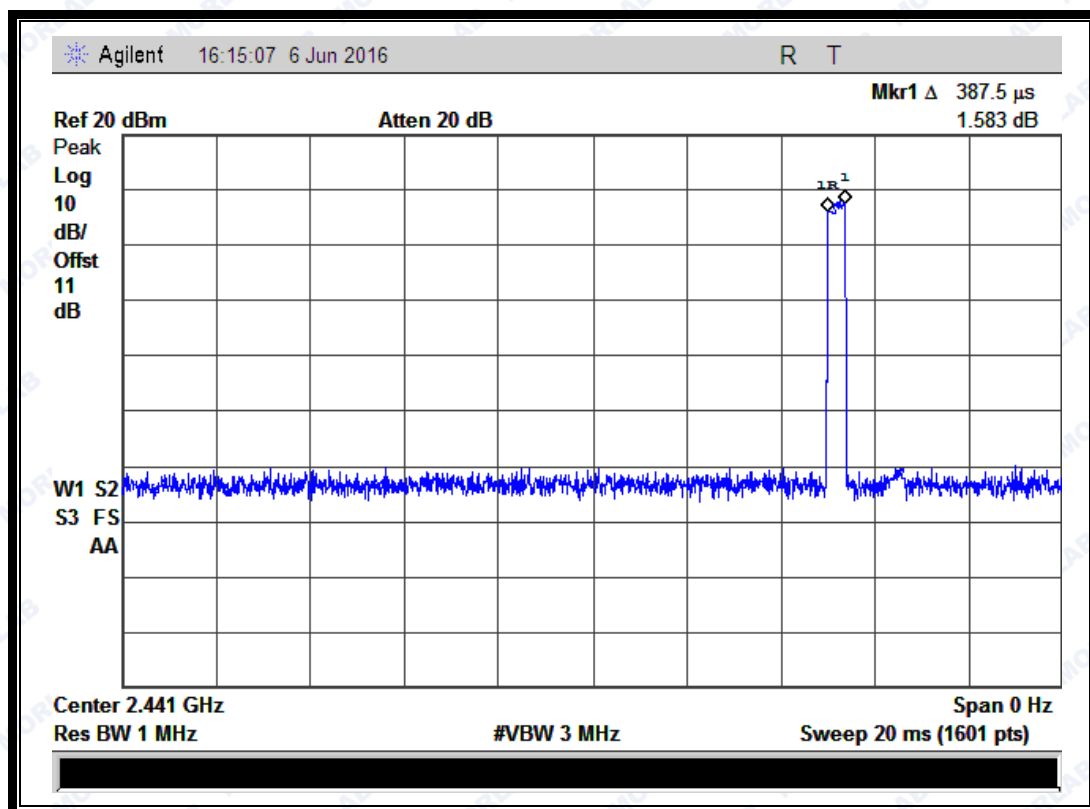




REPORT No.: SZ16050136W03

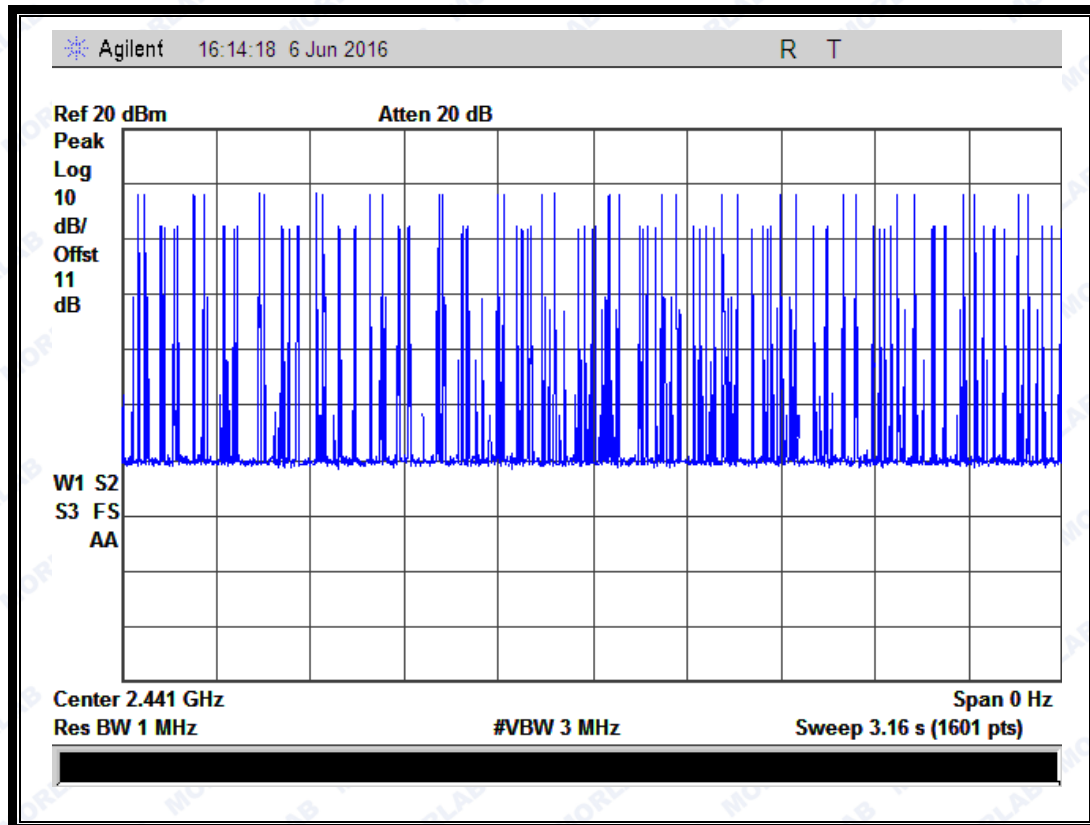

(Plot G: DH1 @ 8-DPSK)




REPORT No.: SZ16050136W03

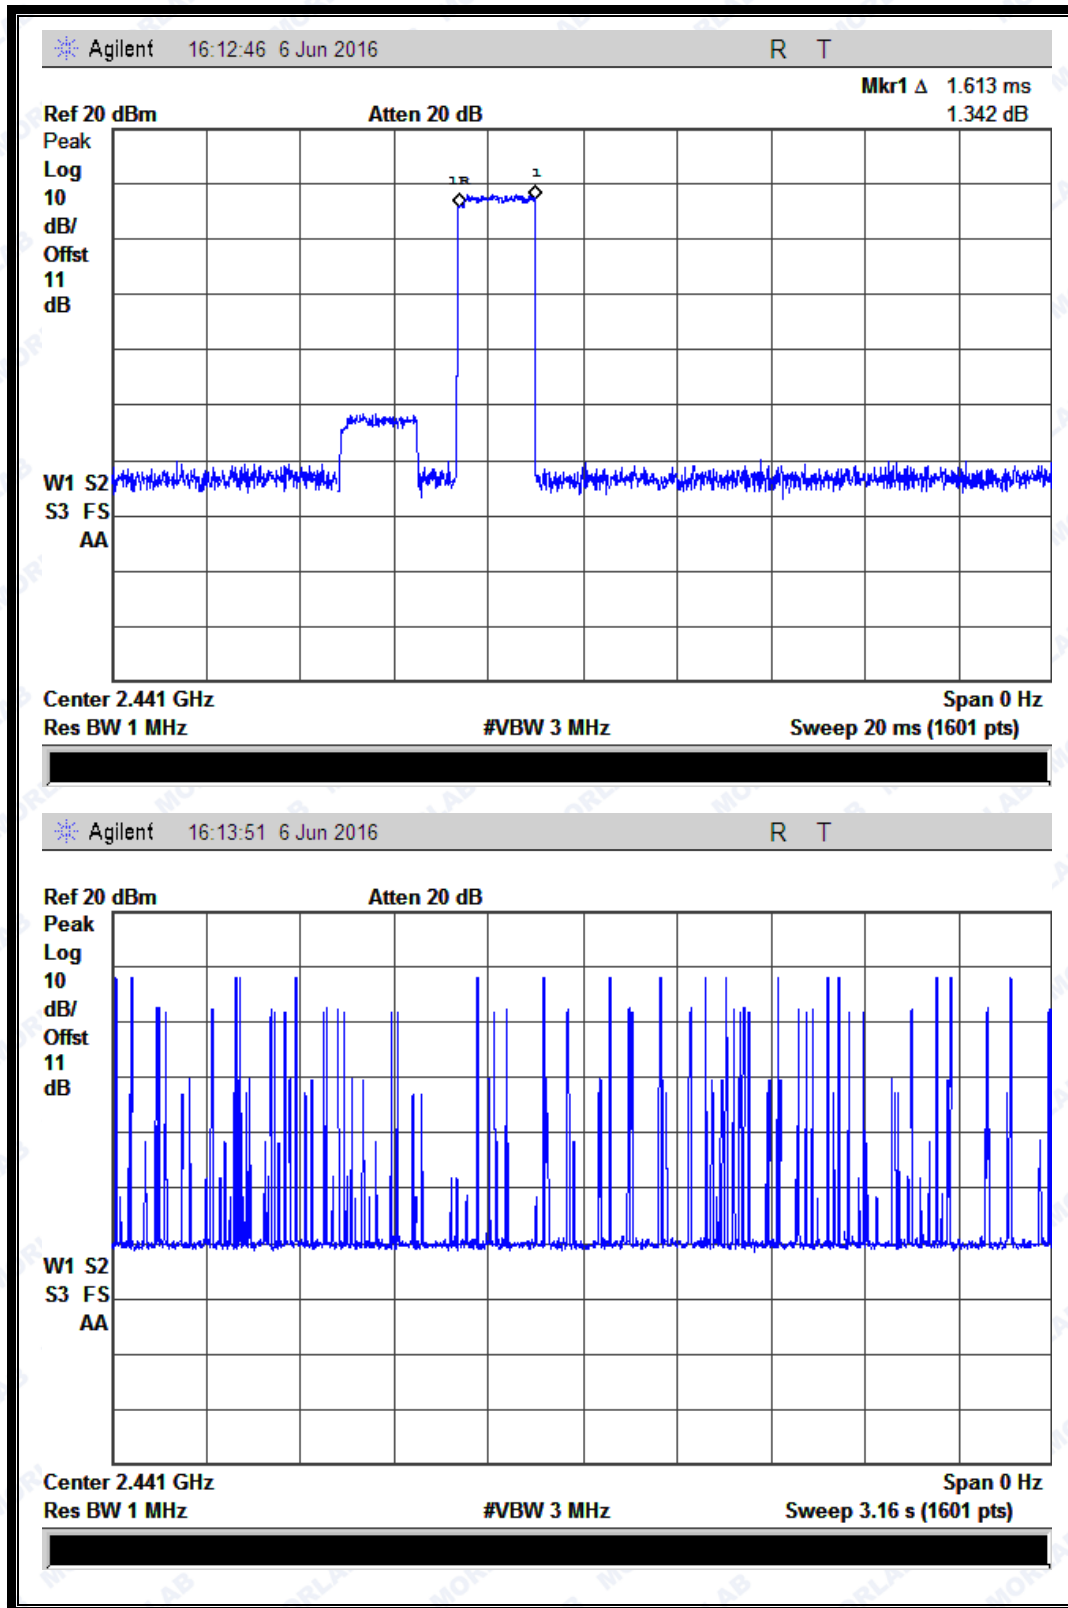

(Plot H: DH3 @ 8-DPSK)



REPORT No.: SZ16050136W03

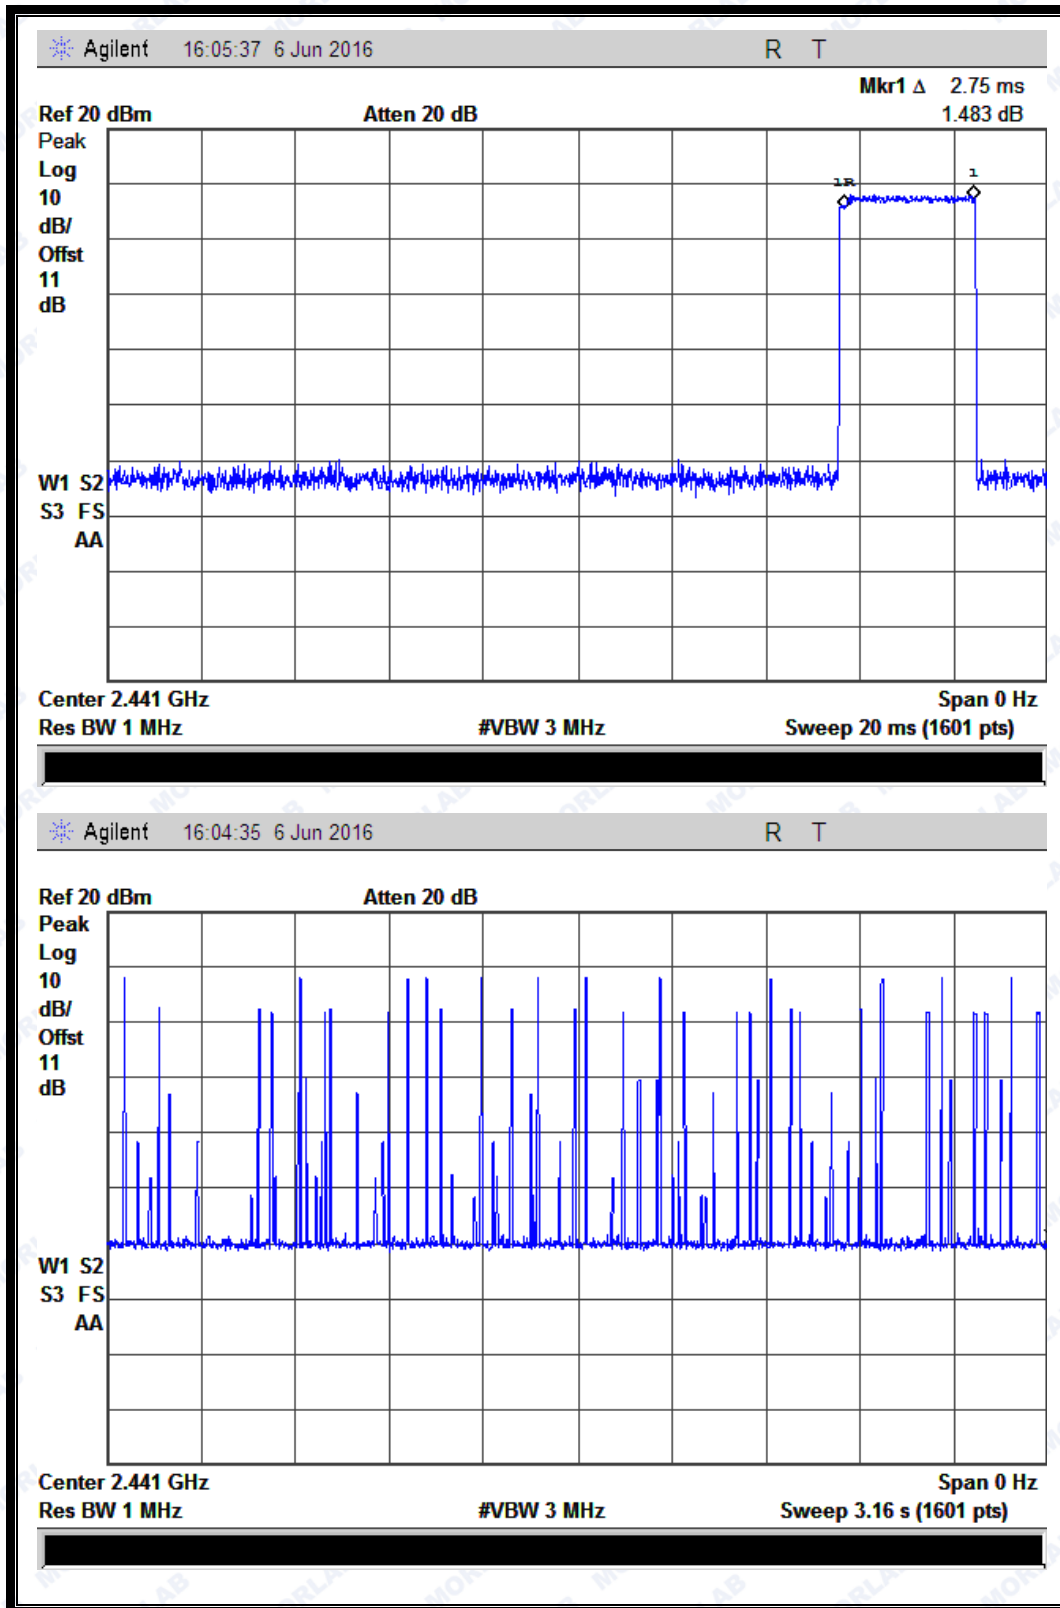

(Plot I: DH5 @ 8-DPSK)


2.7 Conducted Spurious Emissions

2.7.1 Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:

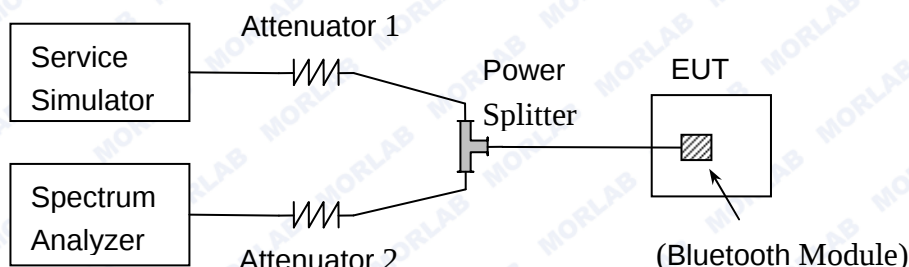

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.7.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1 GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-12.28	Plot A.1	9.85	-10.15	PASS
39	2441	-13.39	Plot B.1	9.61	-10.39	PASS
78	2480	-14.65	Plot C.1	9.61	-10.39	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

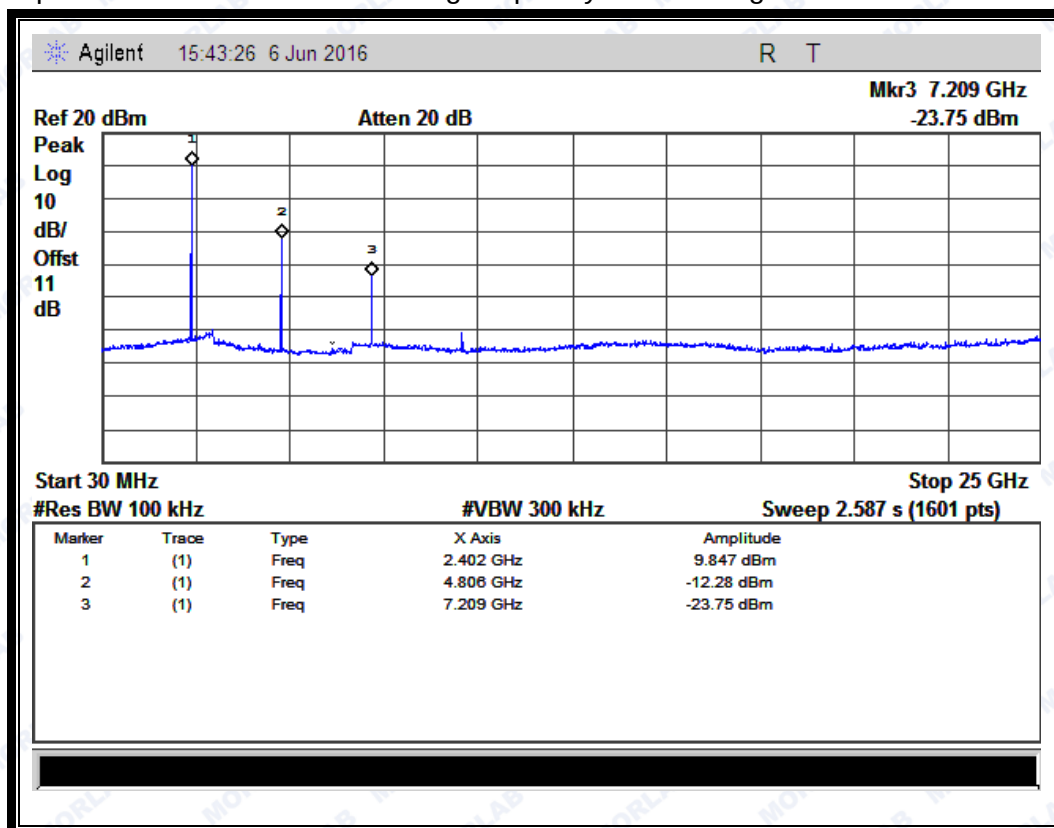


(Plot A.1: Channel = 0, 30MHz to 25GHz @ GFSK Mode)



REPORT No.: SZ16050136W03

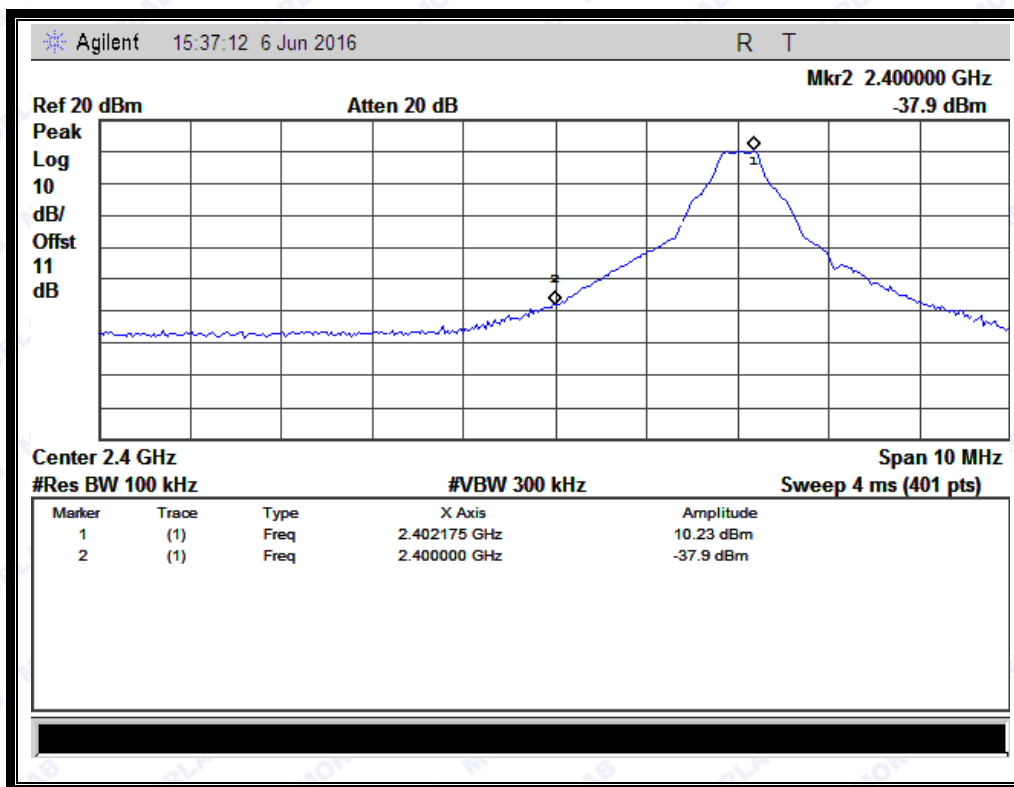


(Channel = 0, Band edge @ GFSK Mode)

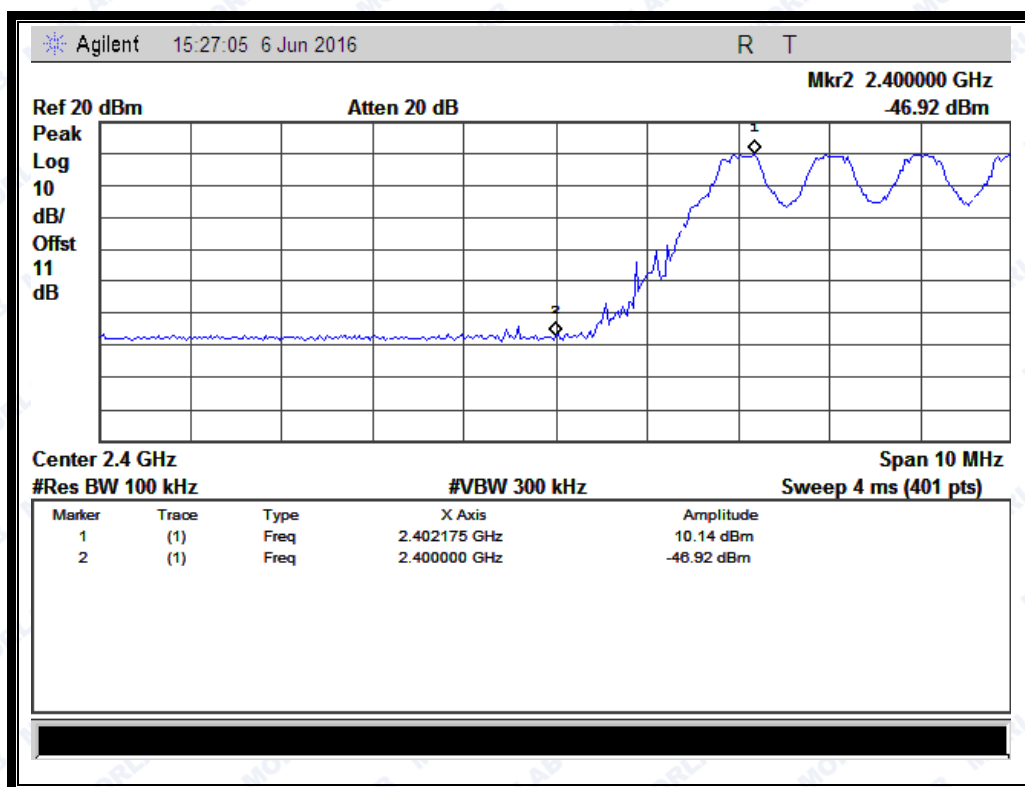


(Channel = 0, Band edge with hopping on @ GFSK Mode)



REPORT No.: SZ16050136W03

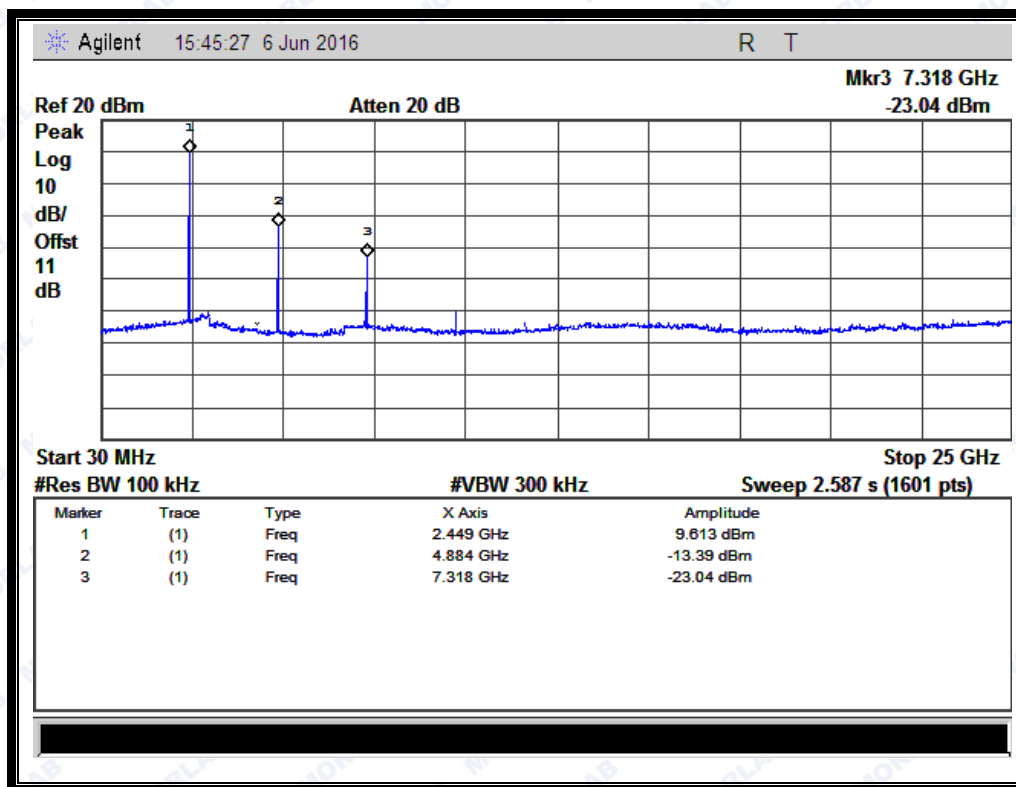


(Plot B.1: Channel = 39, 30MHz to 25GHz @ GFSK Mode)

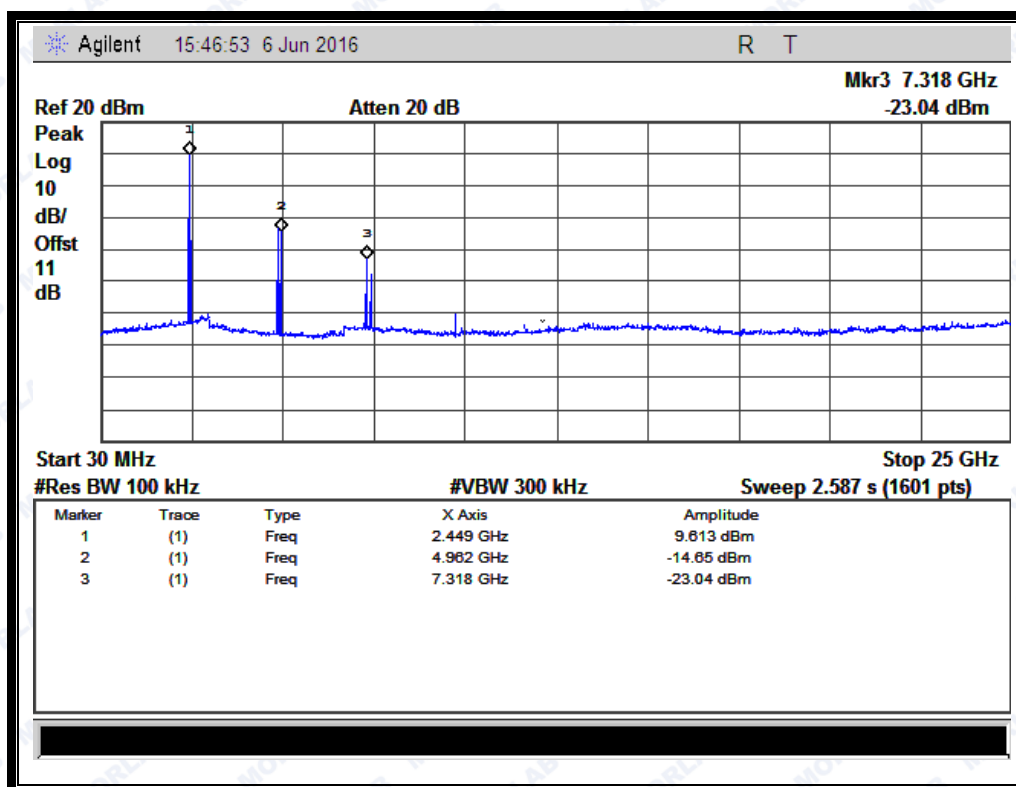


(Plot C.1: Channel = 78, 30MHz to 25GHz @ GFSK Mode)



REPORT No.: SZ16050136W03

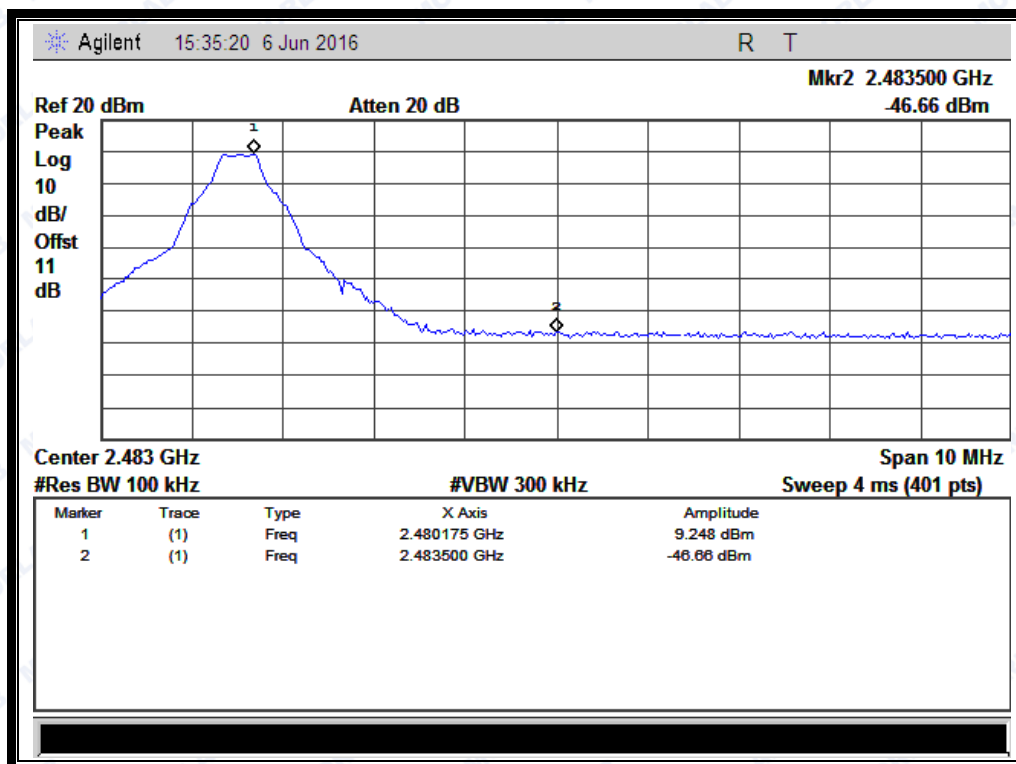

(Channel = 78, Band edge @ GFSK Mode)

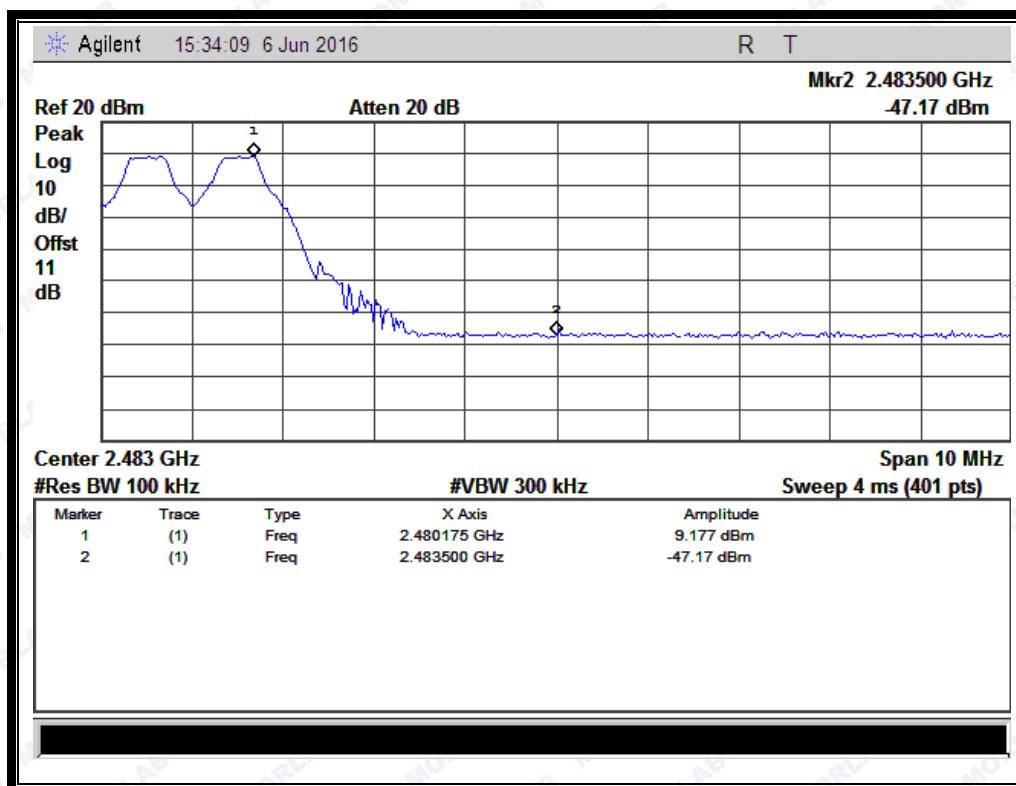

(Channel = 78, Band edge with hopping on @ GFSK Mode)


2.7.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-17.24	Plot D.1	5.73	-14.27	PASS
39	2441	-20.17	Plot E.1	3.96	-16.04	PASS
78	2480	-25.86	Plot F.1	2.77	-17.23	PASS

B. Test Plots:



Note: the power of the Module transmitting frequency should be ignored.

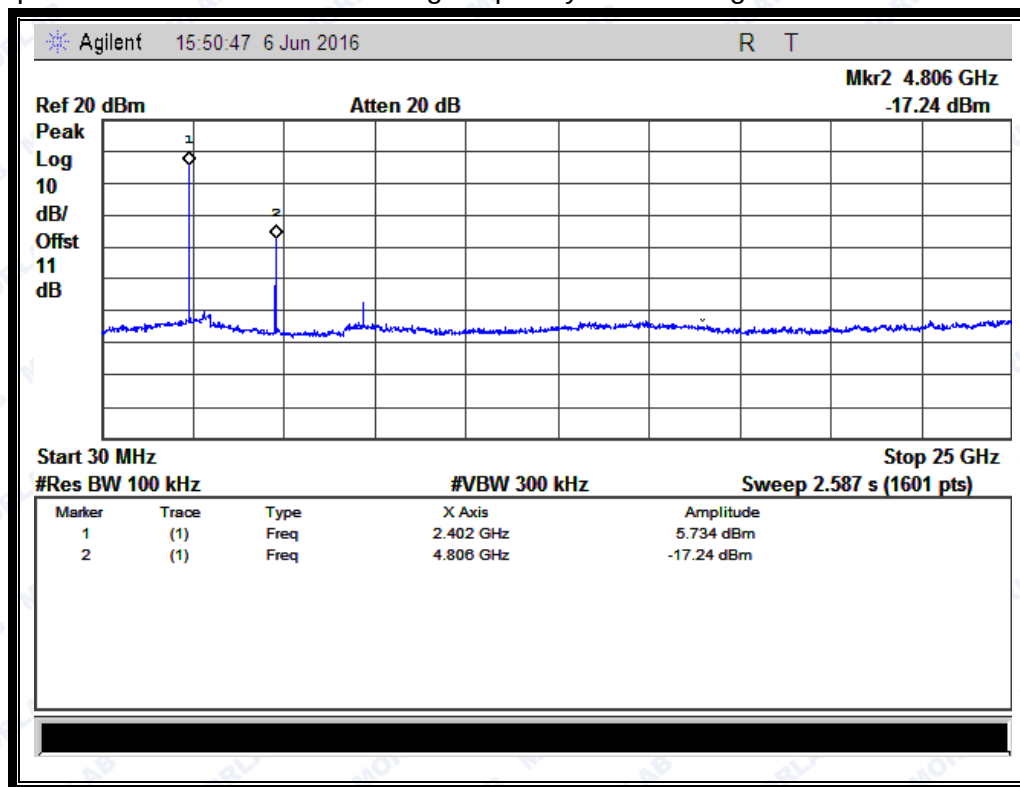

(Plot D.1: Channel = 0, 30MHz to 25GHz @ $\pi/4$ -DQPSK)





REPORT No.: SZ16050136W03

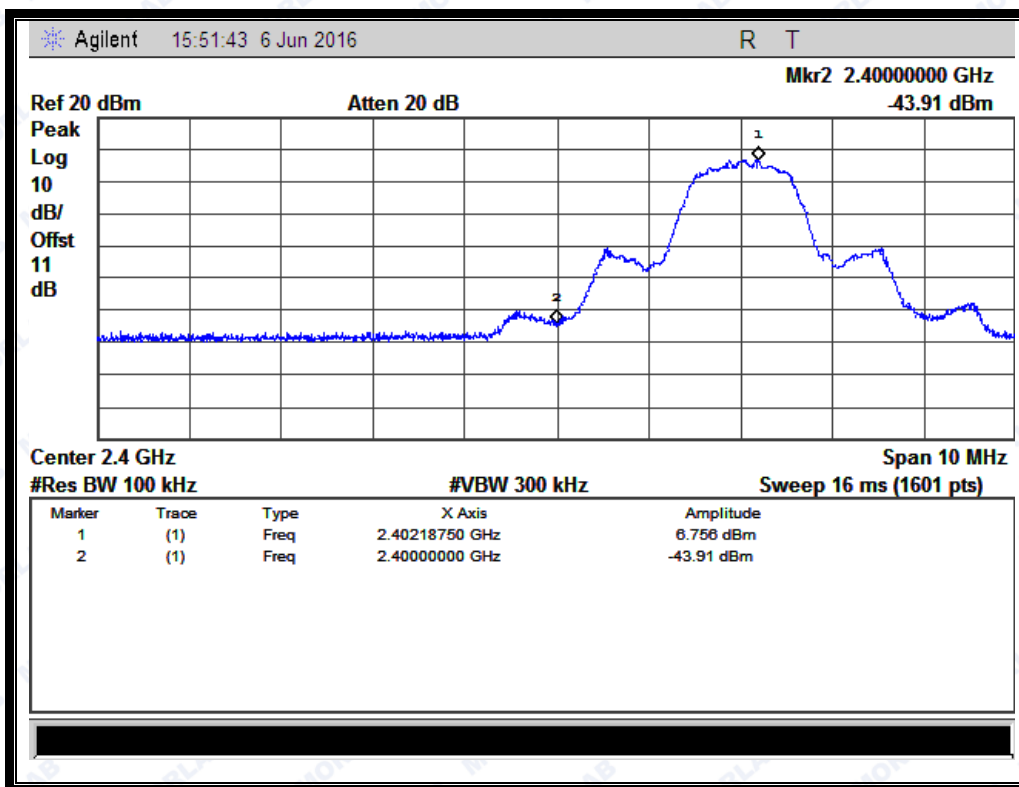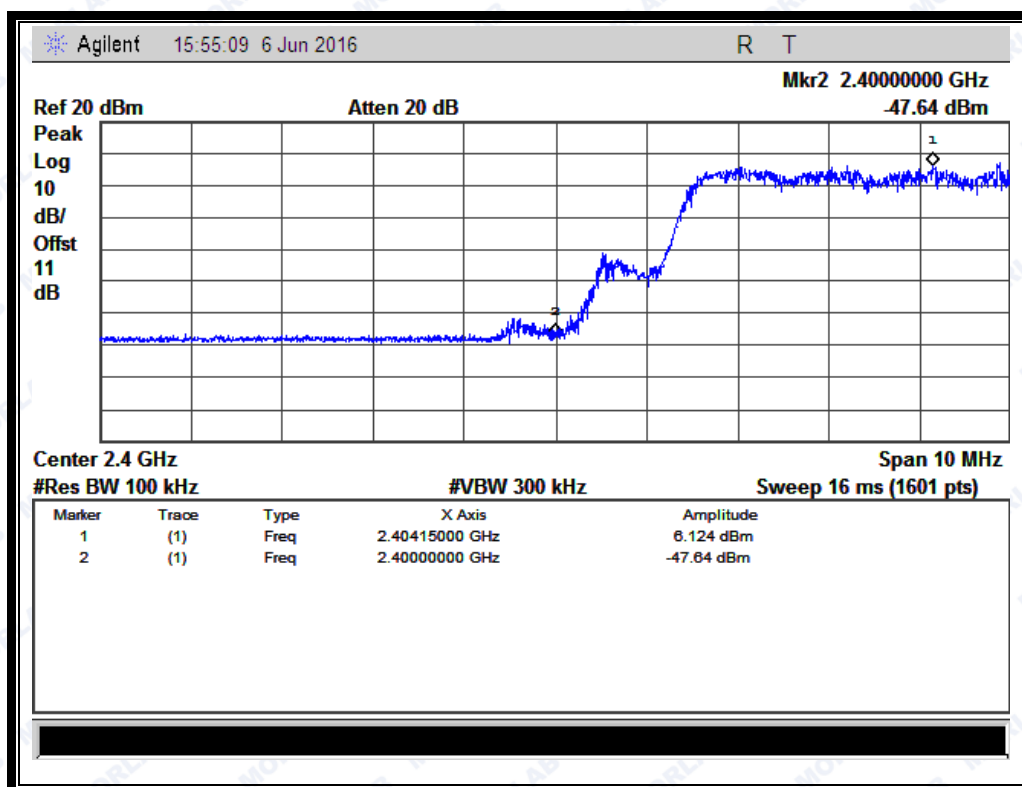(Channel = 0, Band edge @ $\pi/4$ -DQPSK)(Channel = 0, Band edge with hopping on @ $\pi/4$ -DQPSK)




REPORT No.: SZ16050136W03

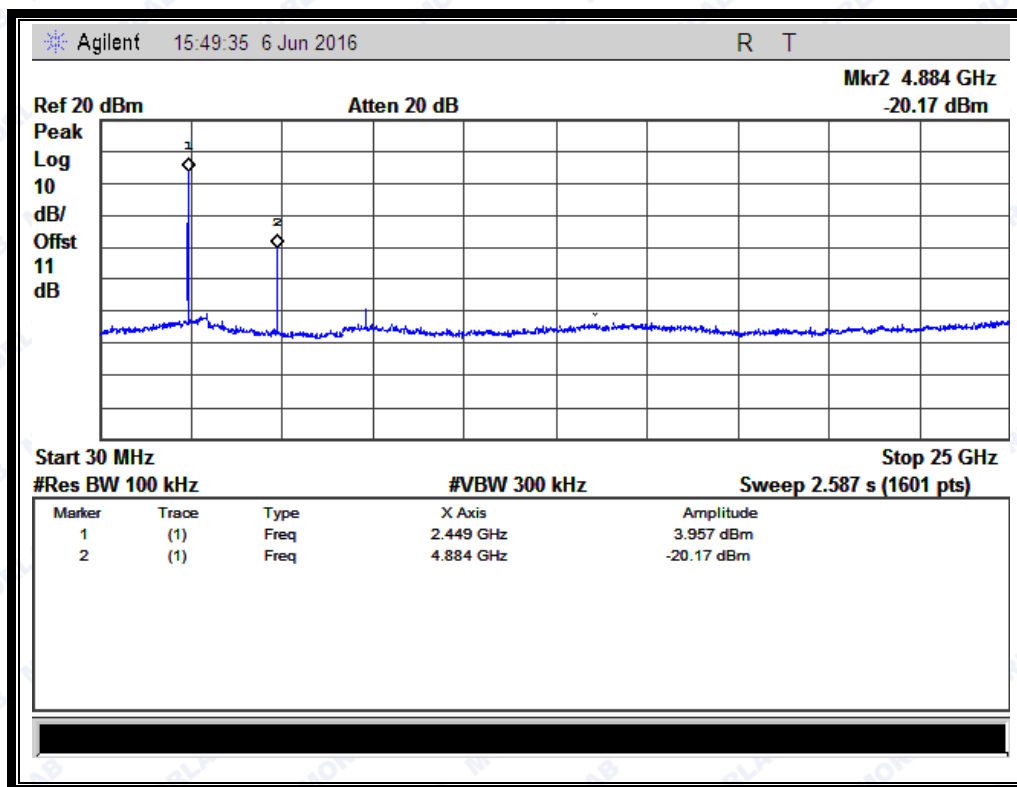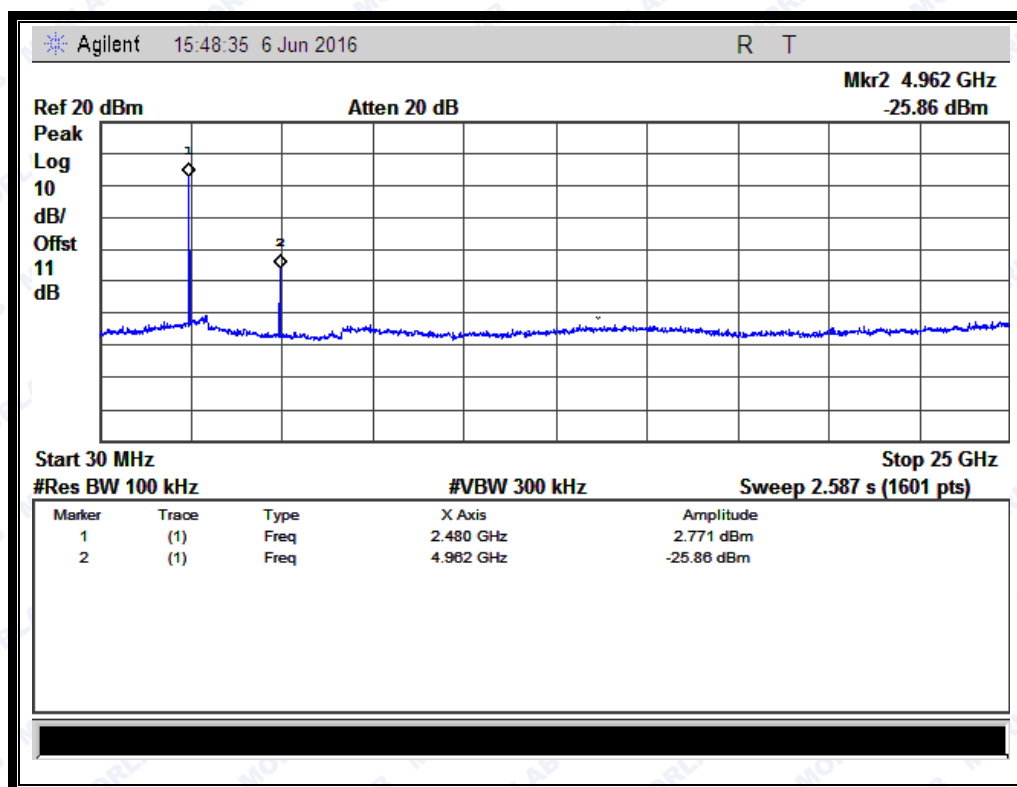
(Plot E.1: Channel = 39, 30MHz to 25GHz @ $\pi/4$ -DQPSK)(Plot F.1: Channel = 78, 30MHz to 25GHz @ $\pi/4$ -DQPSK)



REPORT No.: SZ16050136W03

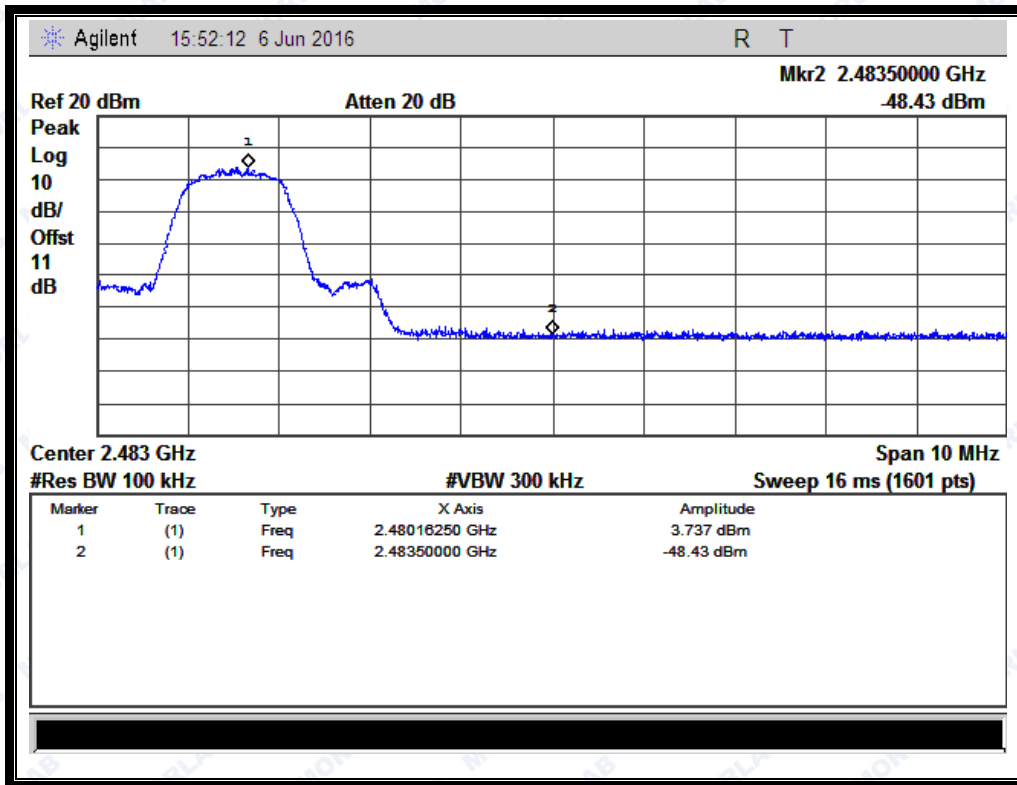

(Channel = 78, Band edge @ $\pi/4$ -DQPSK)

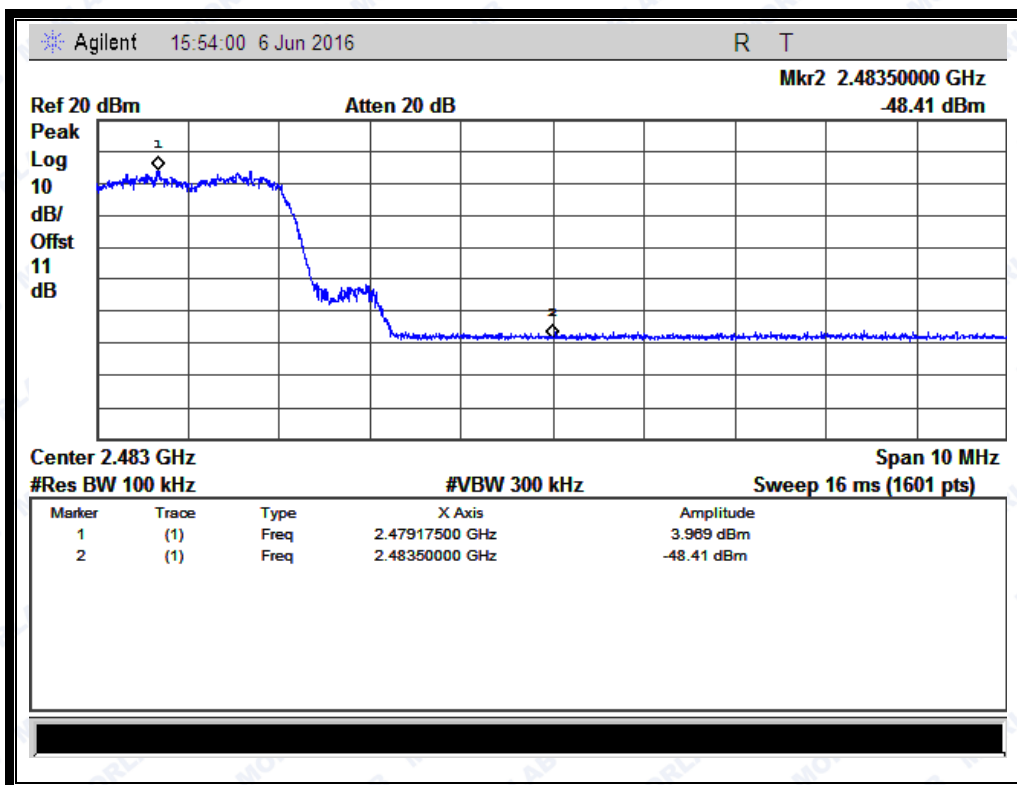

(Channel = 78, Band edge with hopping on @ $\pi/4$ -DQPSK)




2.7.4.3 8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-19.50	Plot G.1	5.07	-14.93	PASS
39	2441	-22.78	Plot H.1	3.56	-16.44	PASS
78	2480	-26.01	Plot I.1	1.95	-18.05	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

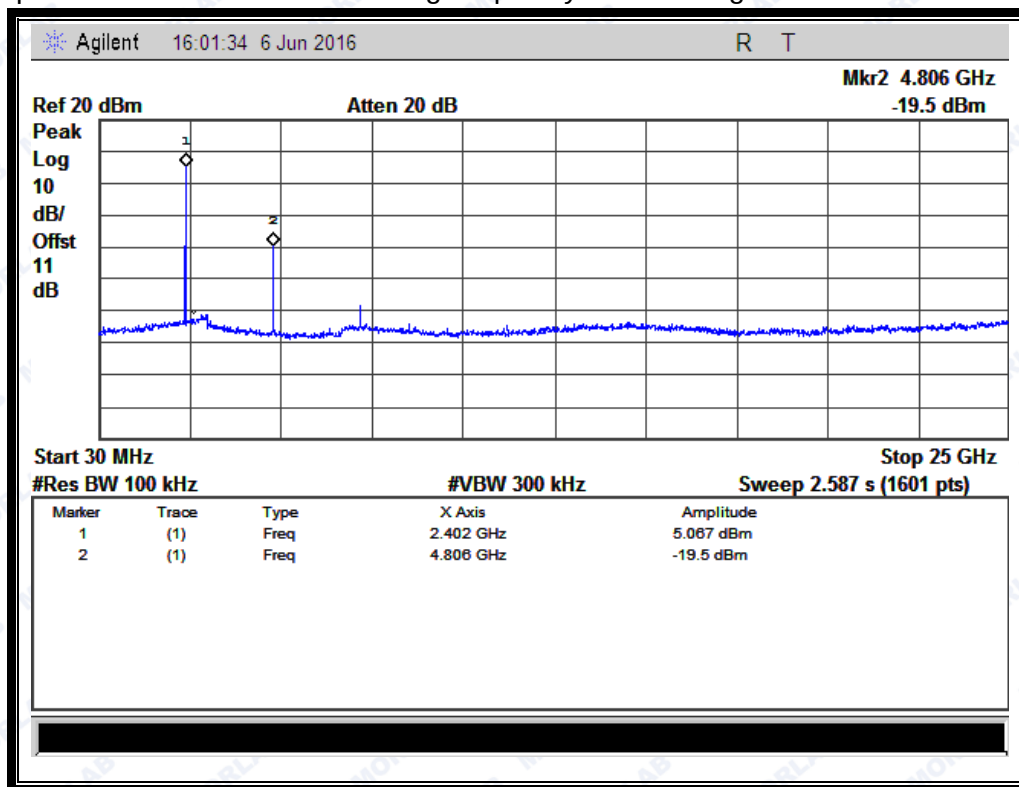


(Plot G.1: Channel = 0, 30MHz to 25GHz @ 8-DPSK)



REPORT No.: SZ16050136W03

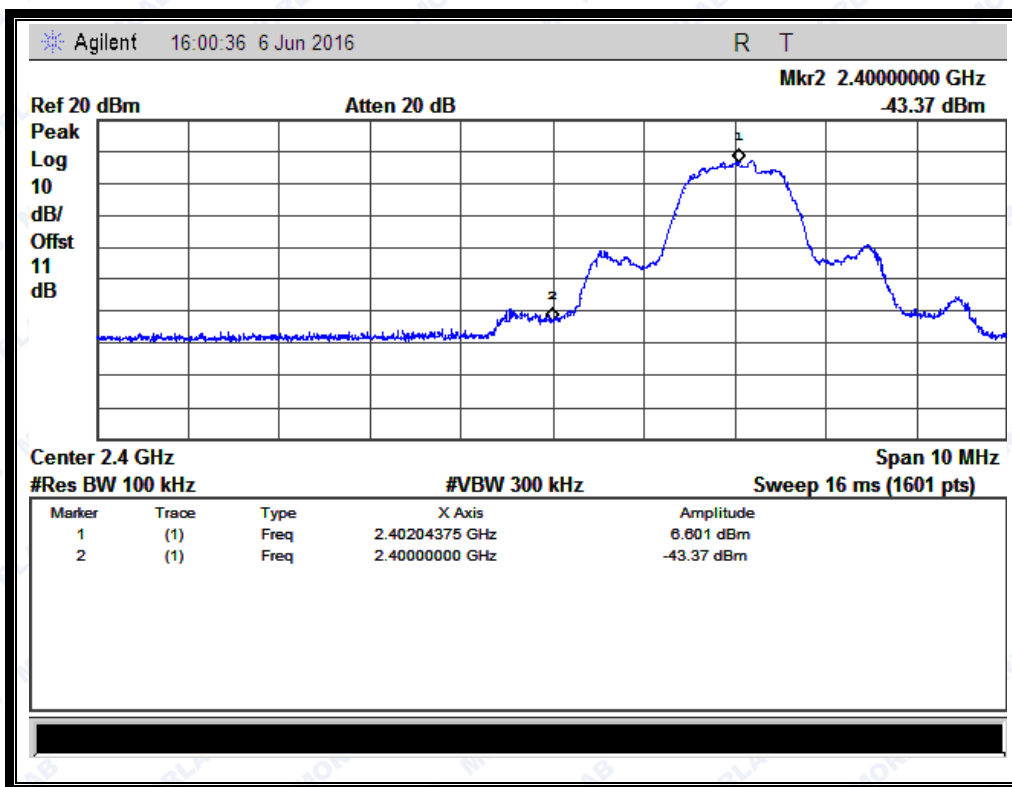


(Channel = 0, Band edge @ 8-DPSK)

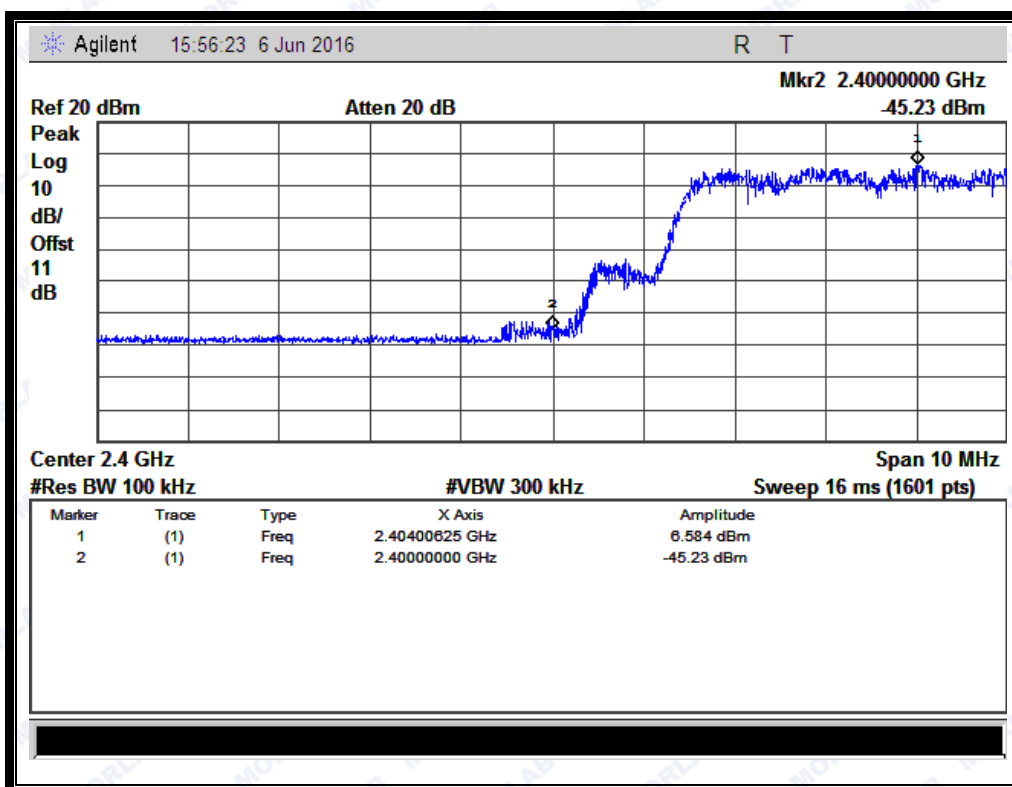


(Channel = 0, Band edge with hopping on @ 8-DPSK)




REPORT No.: SZ16050136W03

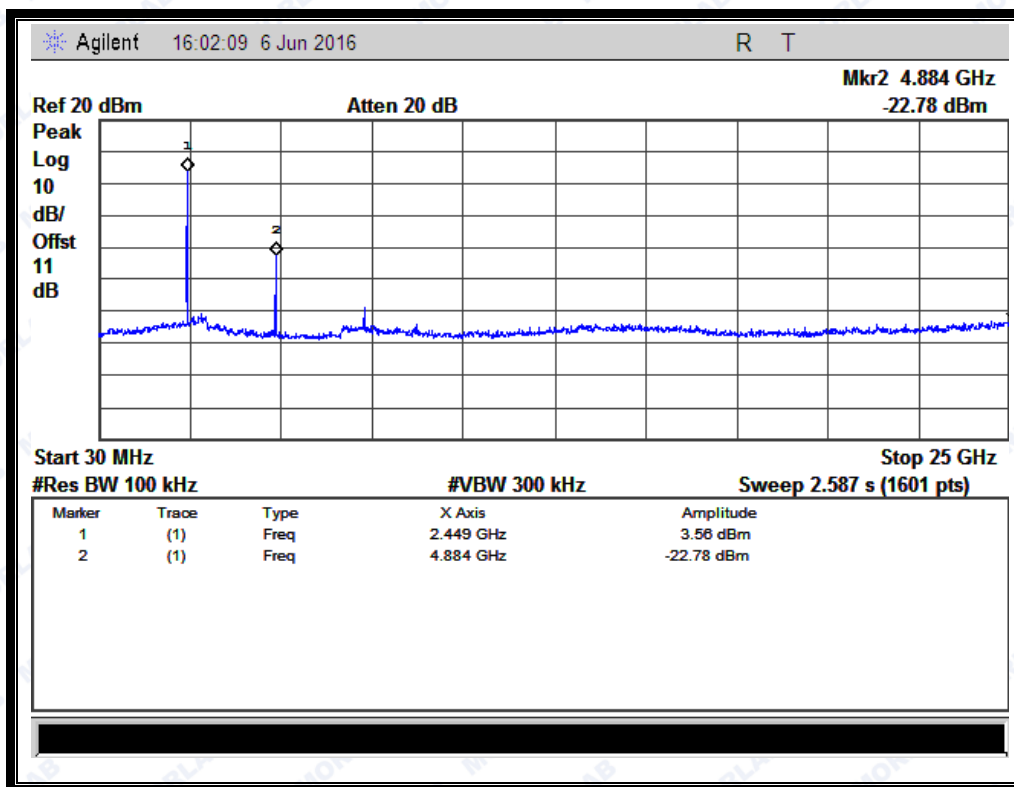


(Plot H.1: Channel = 39, 30MHz to 25GHz @ 8-DPSK)

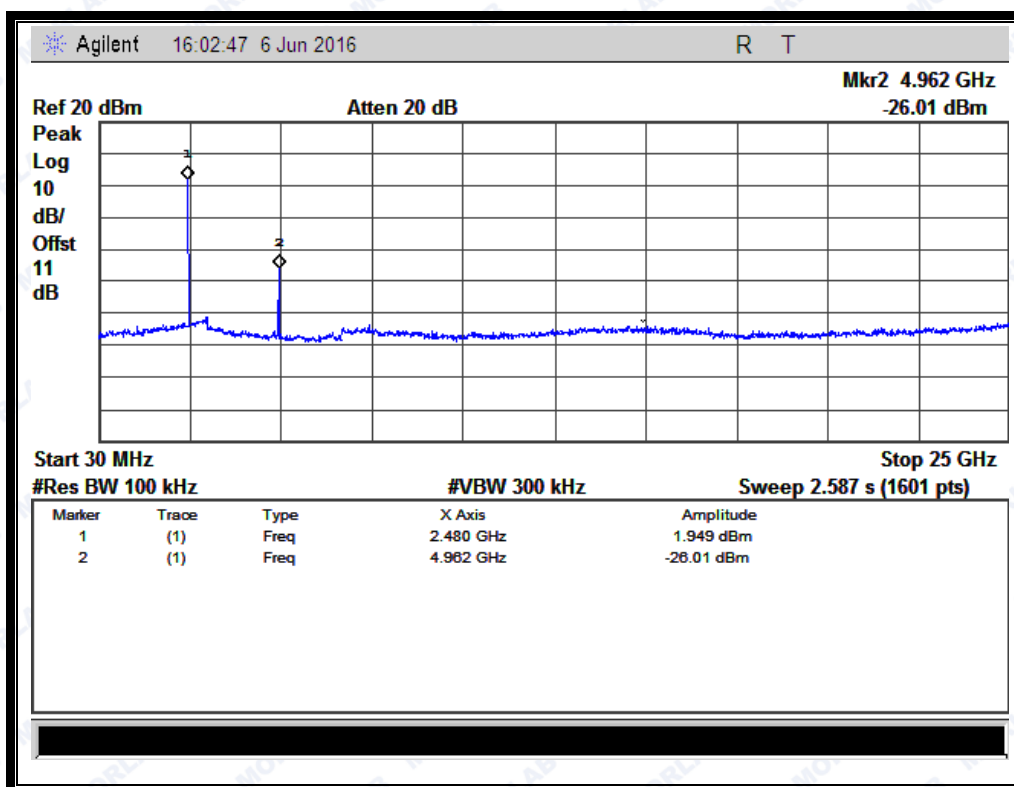

(Plot I.1: Channel = 78, 30MHz to 25GHz @ 8-DPSK)

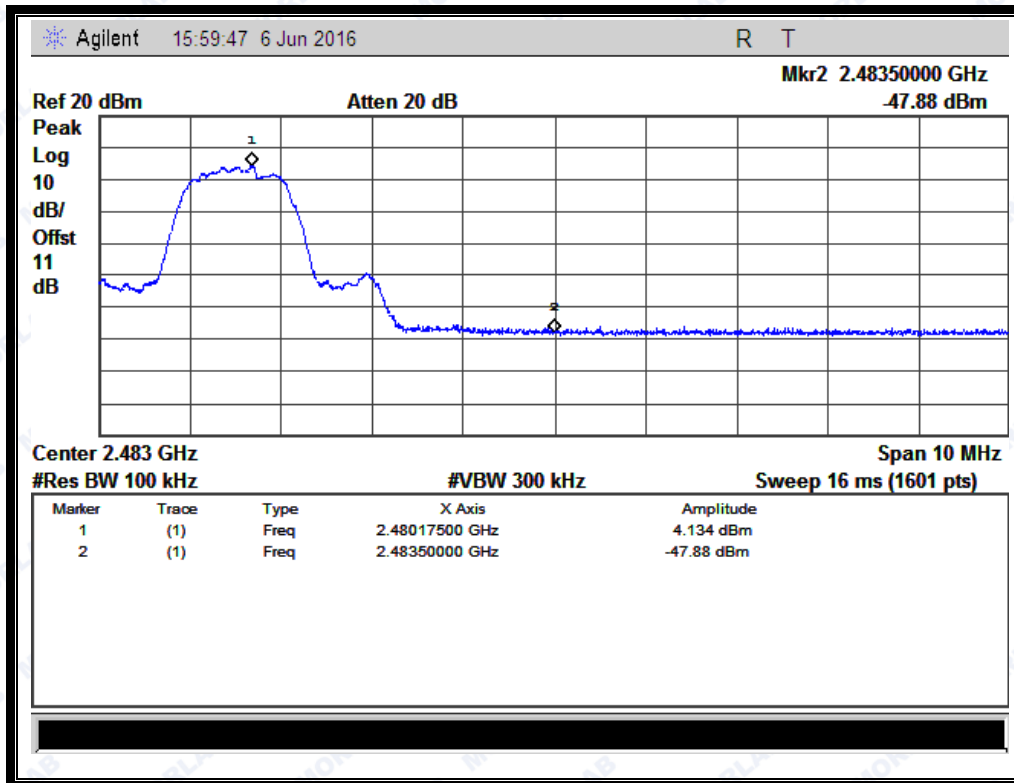

(Plot I.1: Channel = 78, Band edge @ 8-DPSK)

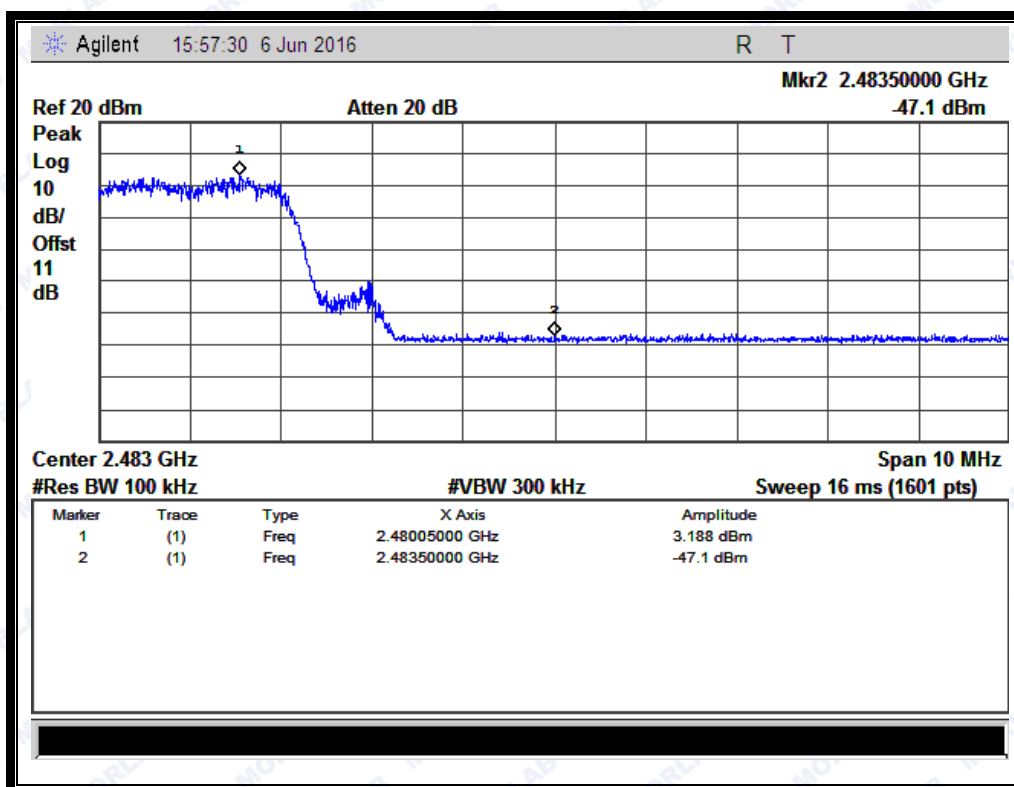

(Plot I.1: Channel = 78, Band edge with hopping on @ 8-DPSK)


2.8 Restricted Frequency Bands

2.8.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2 Test Description

A. Test Setup:

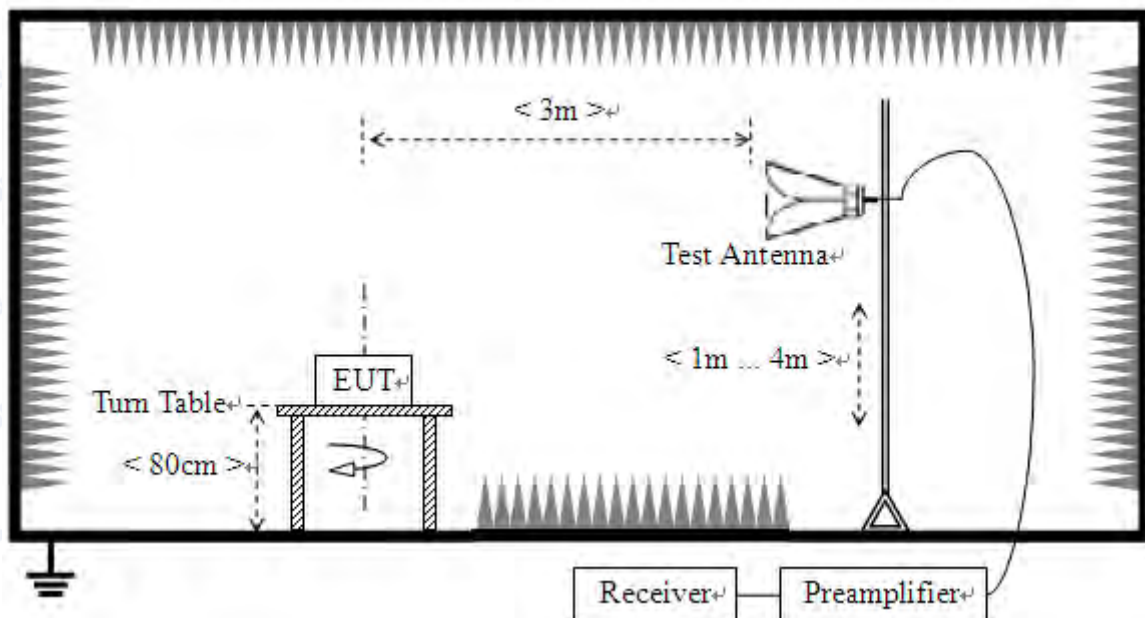

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.8.3 Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.8.4 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


2.8.4.1 GFSK Mode**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2382.47	PK	44.87	-33.63	32.56	43.80	74	Pass
0	2382.47	AV	32.82	-33.63	32.56	31.75	54	Pass
78	2483.50	PK	43.89	-33.18	32.50	43.21	74	Pass
78	2483.50	AV	32.75	-33.18	32.50	32.07	54	Pass




REPORT No.: SZ16050136W03

B. Test Plots:

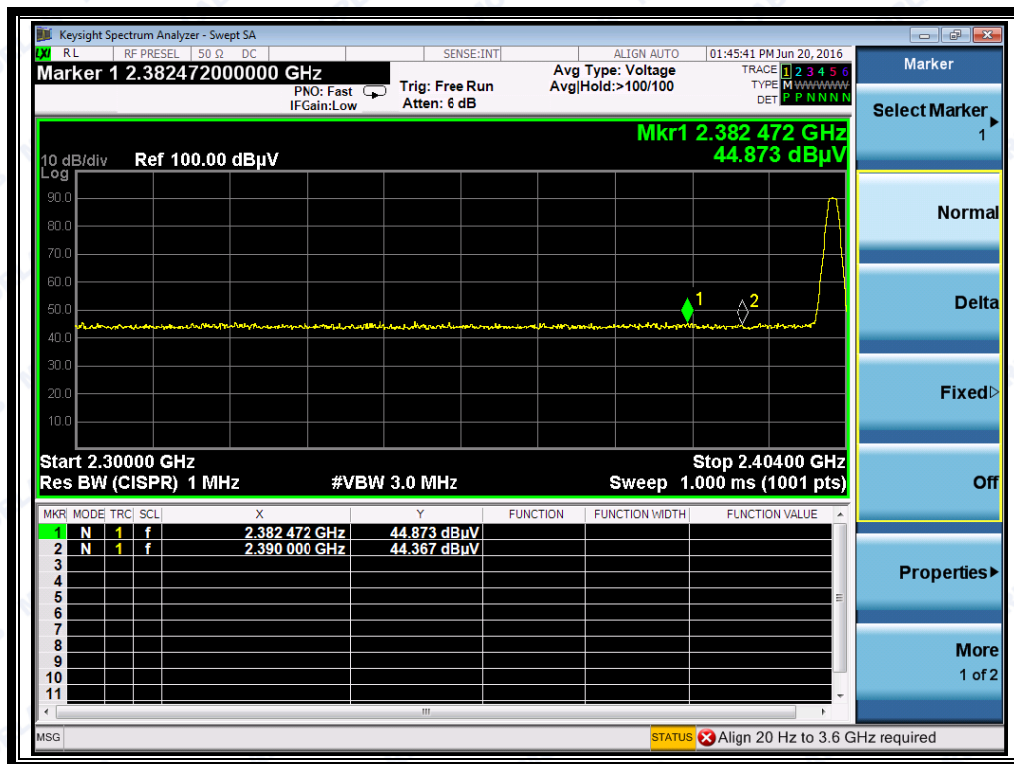


(Plot A1:Channel = 0 PEAK @ GFSK)

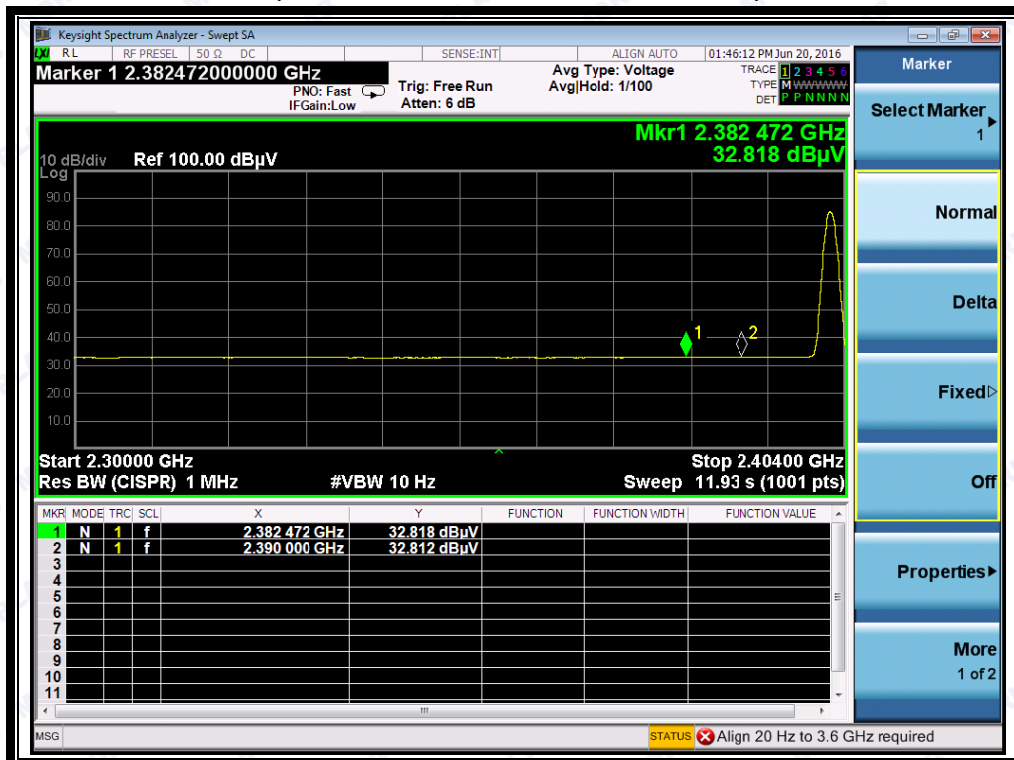

(Plot A2:Channel = 0 AVERAGE @ GFSK)



(Plot B1: Channel = 78 PEAK @ GFSK)

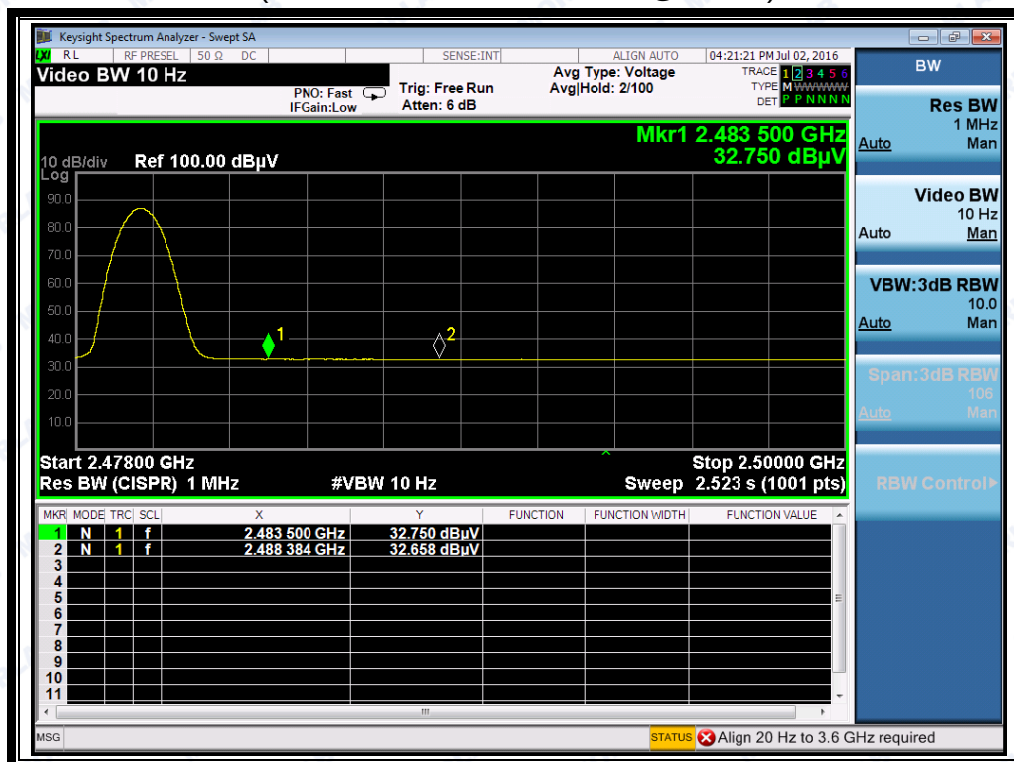


(Plot B2: Channel = 78 AVERAGE @ GFSK)

2.8.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2353.14	PK	44.98	-33.63	32.56	43.91	74	Pass
0	2353.14	AV	32.76	-33.63	32.56	31.69	54	Pass
78	2484.40	PK	44.11	-33.18	32.5	43.43	74	Pass
78	2486.01	AV	32.72	-33.18	32.5	32.04	54	Pass

B. Test Plots:

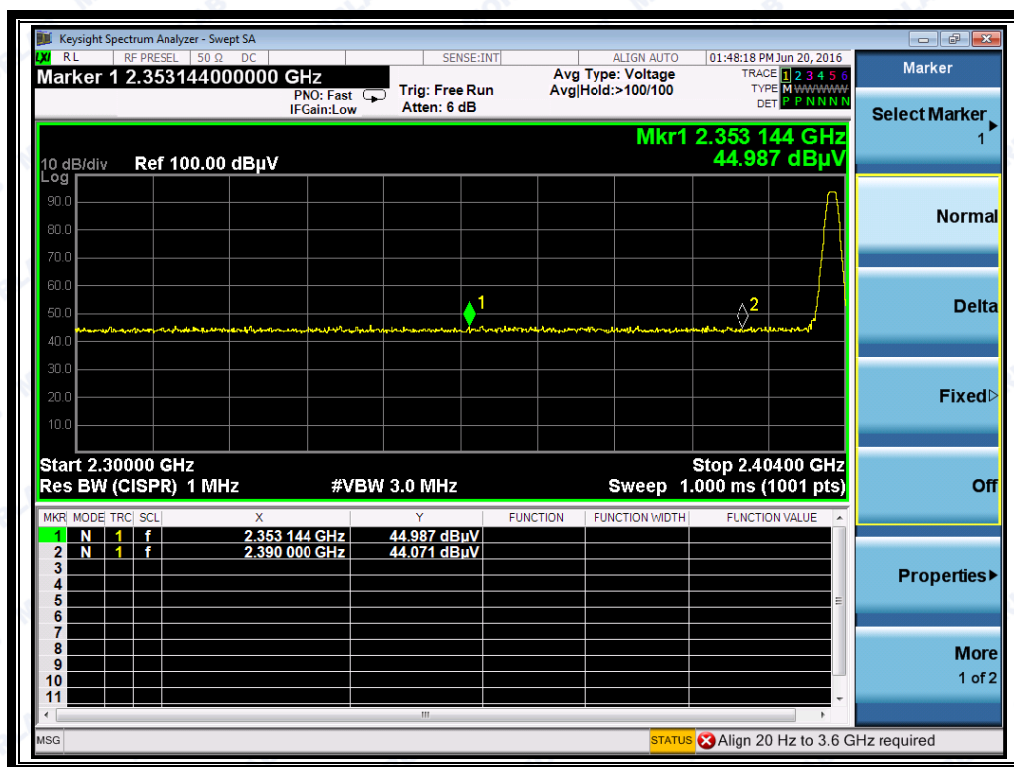
(Plot C1: Channel = 0 PEAK @ $\pi/4$ -DQPSK)



REPORT No.: SZ16050136W03

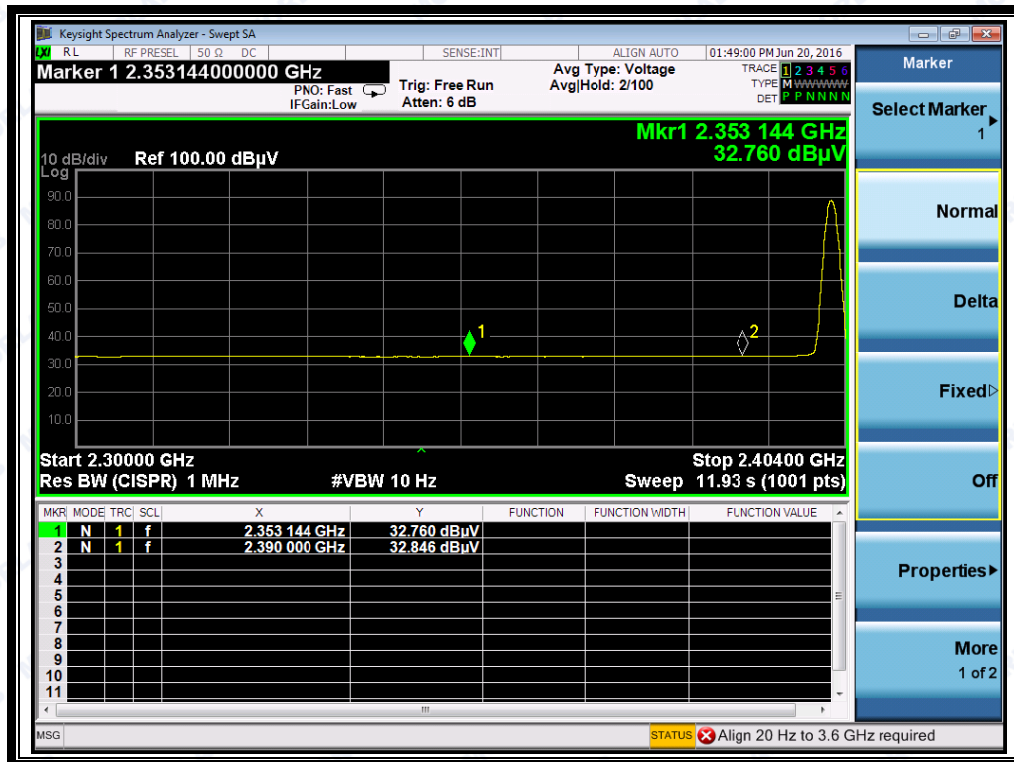

(Plot C2: Channel = 0 AVERAGE @ $\pi/4$ -DQPSK)

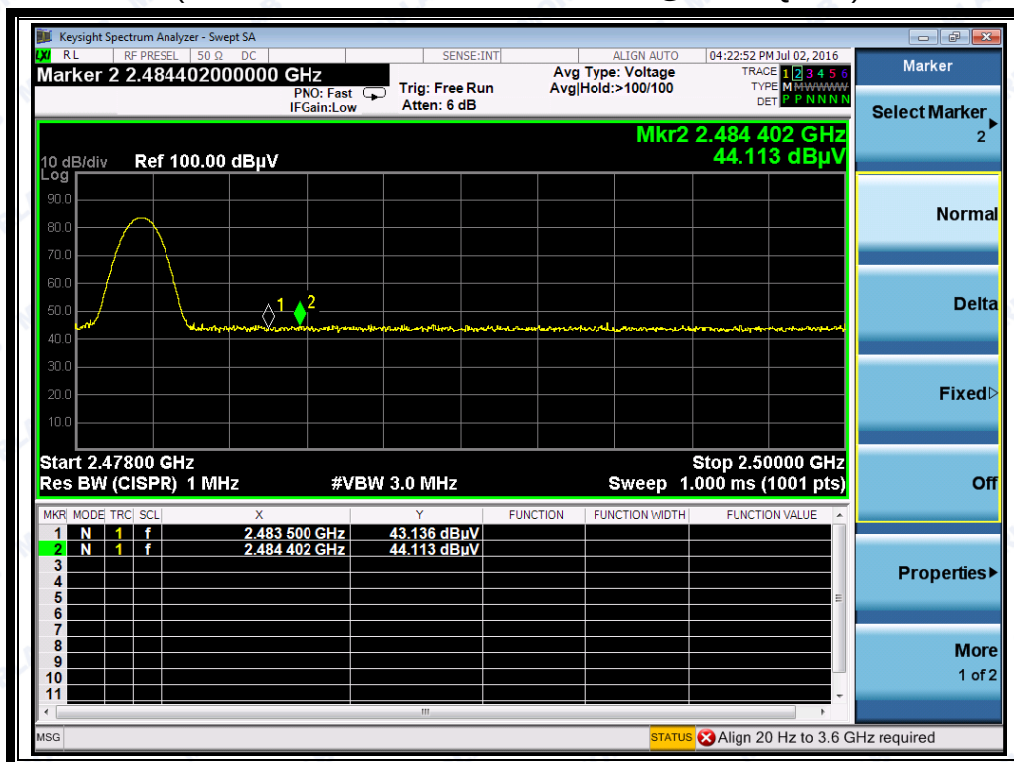

(Plot D1: Channel = 78 PEAK @ $\pi/4$ -DQPSK)



REPORT No.: SZ16050136W03



(Plot D2: Channel = 78 AVERAGE@ $\pi/4$ -DQPSK)

2.8.4.3 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2372.28	PK	44.43	-33.63	32.56	43.36	74	Pass
0	2372.28	AV	32.81	-33.63	32.56	31.74	54	Pass
78	2490.23	PK	44.65	-33.18	32.5	43.97	74	Pass
78	2486.36	AV	32.73	-33.18	32.5	32.05	54	Pass


B. Test Plots:



REPORT No.: SZ16050136W03

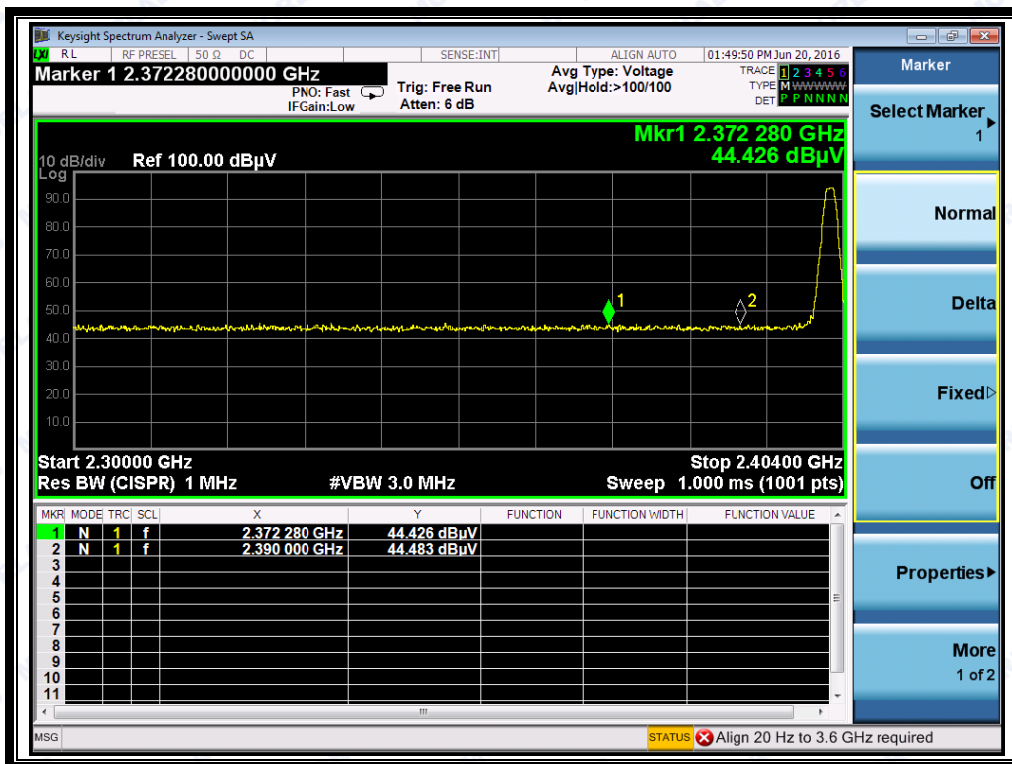

(Plot E1: Channel = 0 PEAK @ 8-DPSK Mode)

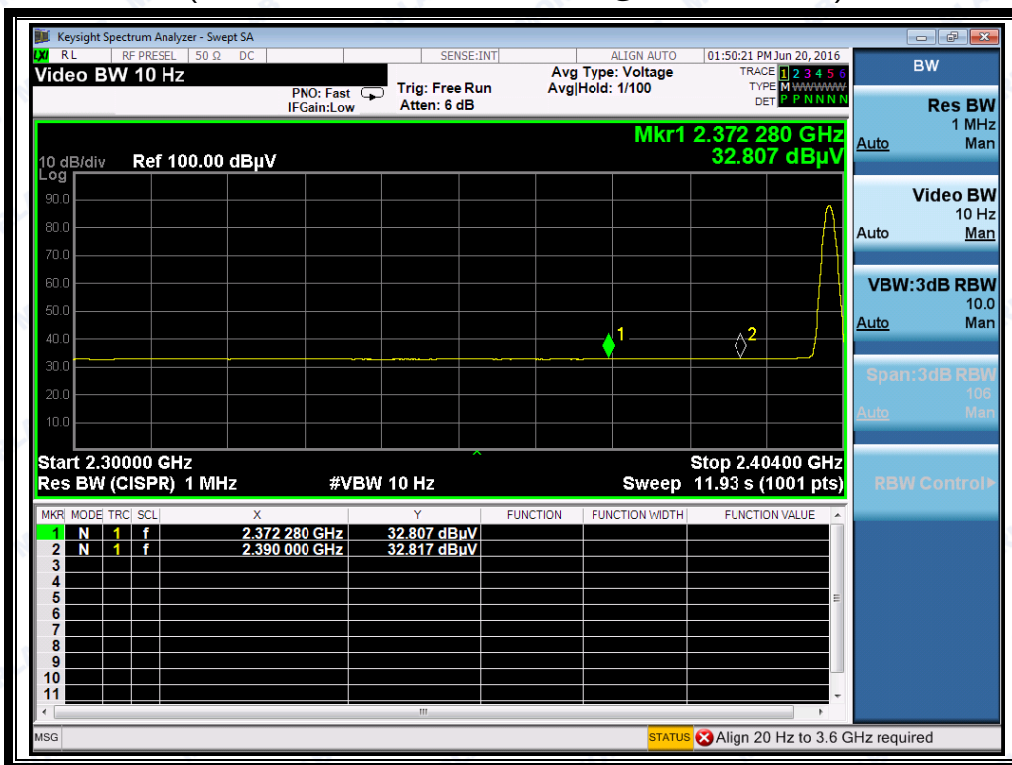


(Plot E2: Channel = 0 AVERAGE @ 8-DPSK Mode)



REPORT No.: SZ16050136W03



(Plot F1:Channel = 78 PEAK @ 8-DPSK Mode)

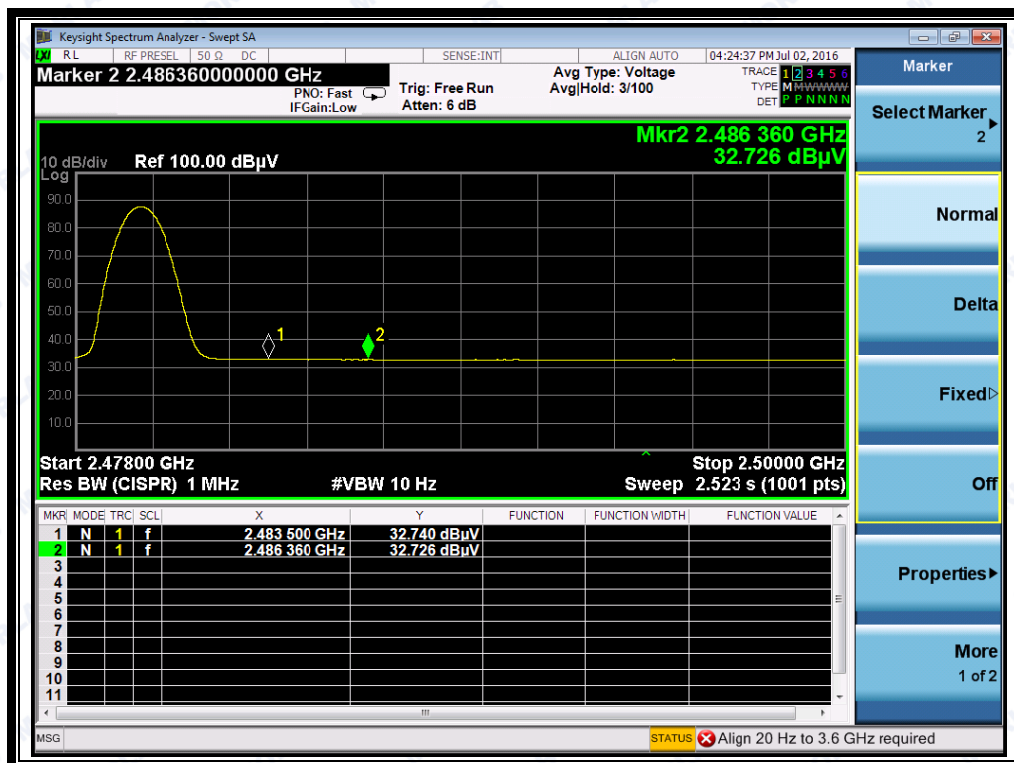

(Plot F2:Channel = 78 AVERAGE @ 8-DPSK Mode)

2.9 Conducted Emission

2.9.1 Requirement

According to RSS-GEN section 8.8, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2 Test Description

A. Test Setup:

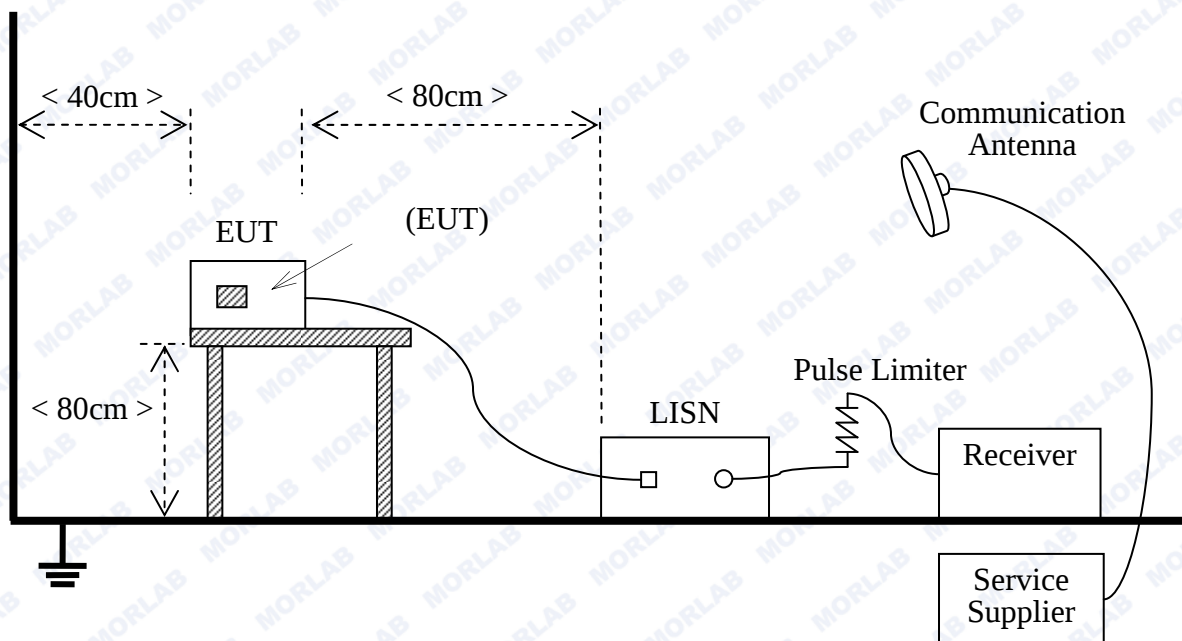

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2014

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at



maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).


2.9.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


B. Test Plots:

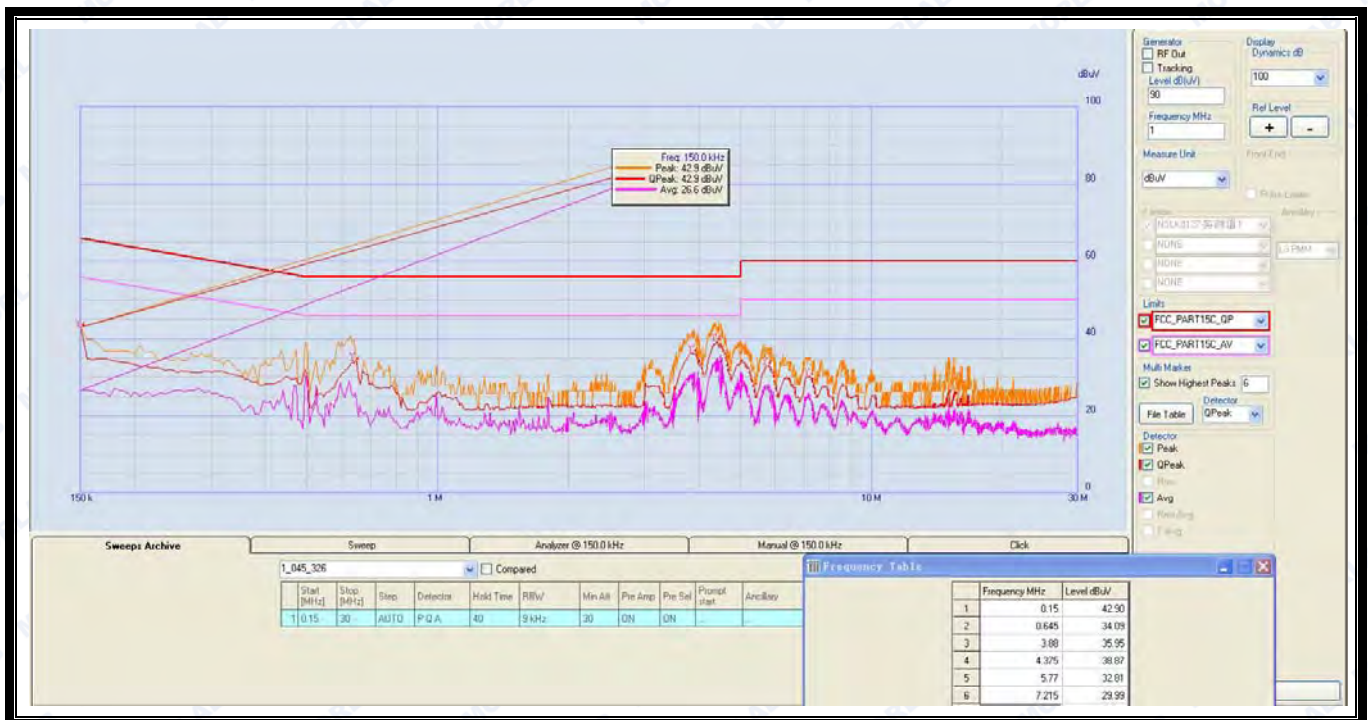

(Plot A: L Phase)



REPORT No.: SZ16050136W03

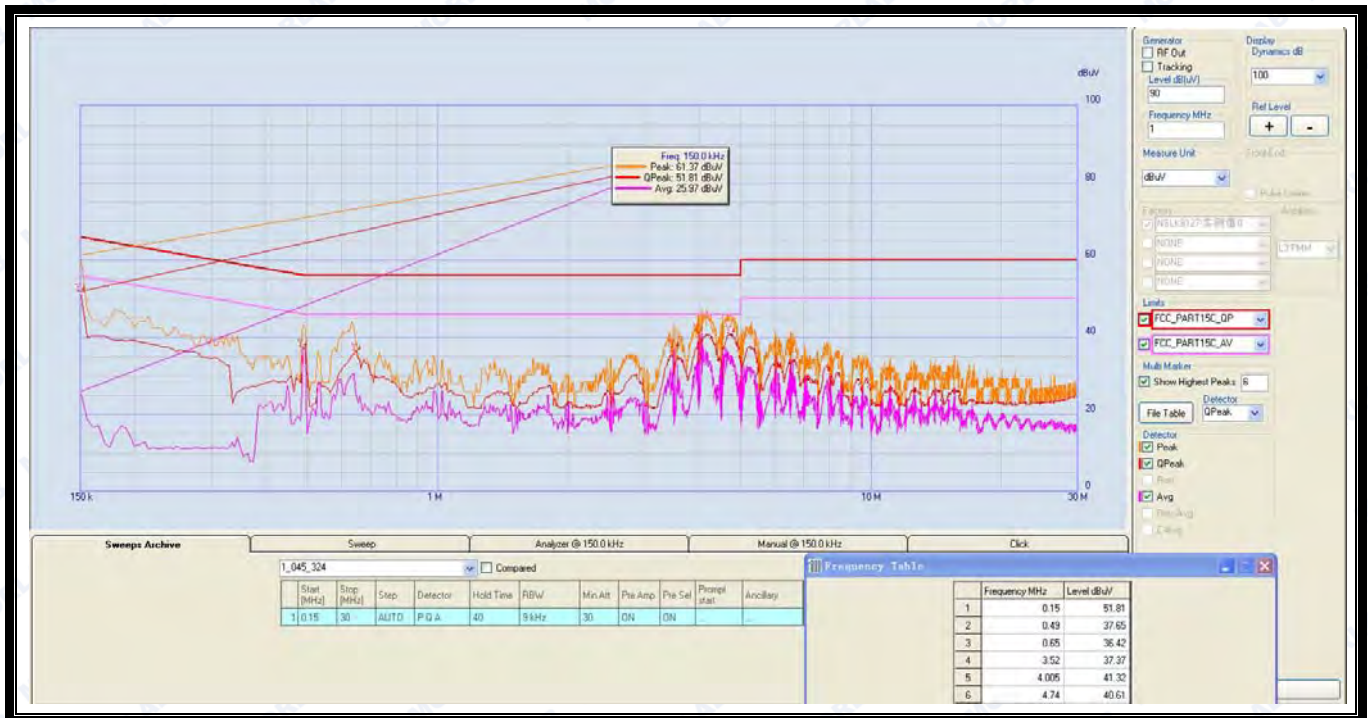

(Plot B: N Phase)



2.10 Radiated Emission

2.10.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

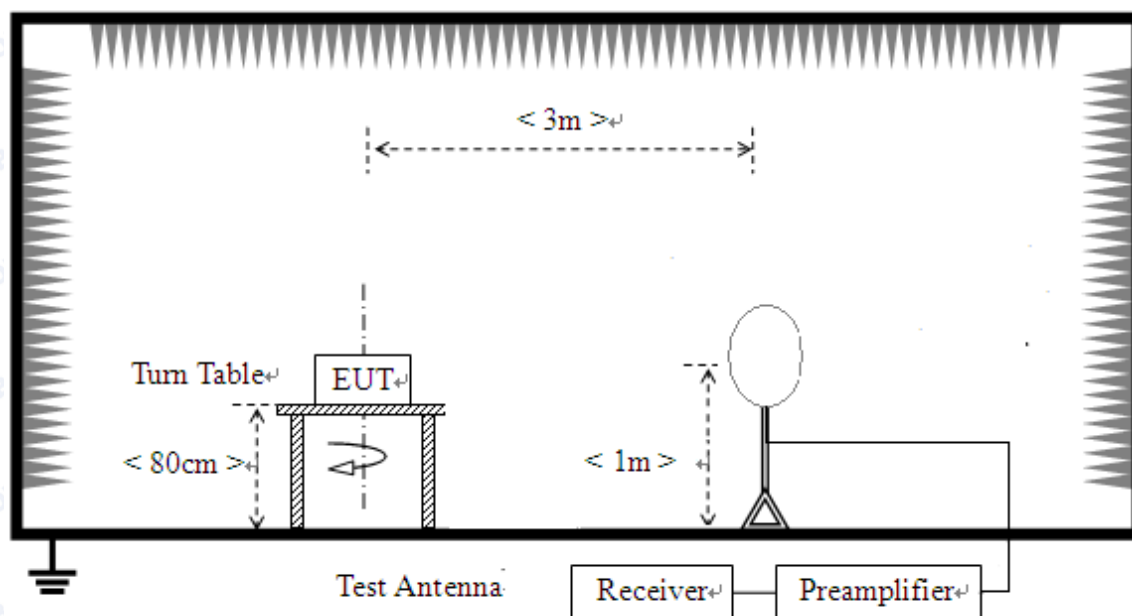

- 2) For radiated emissions from 30MHz to 1GHz

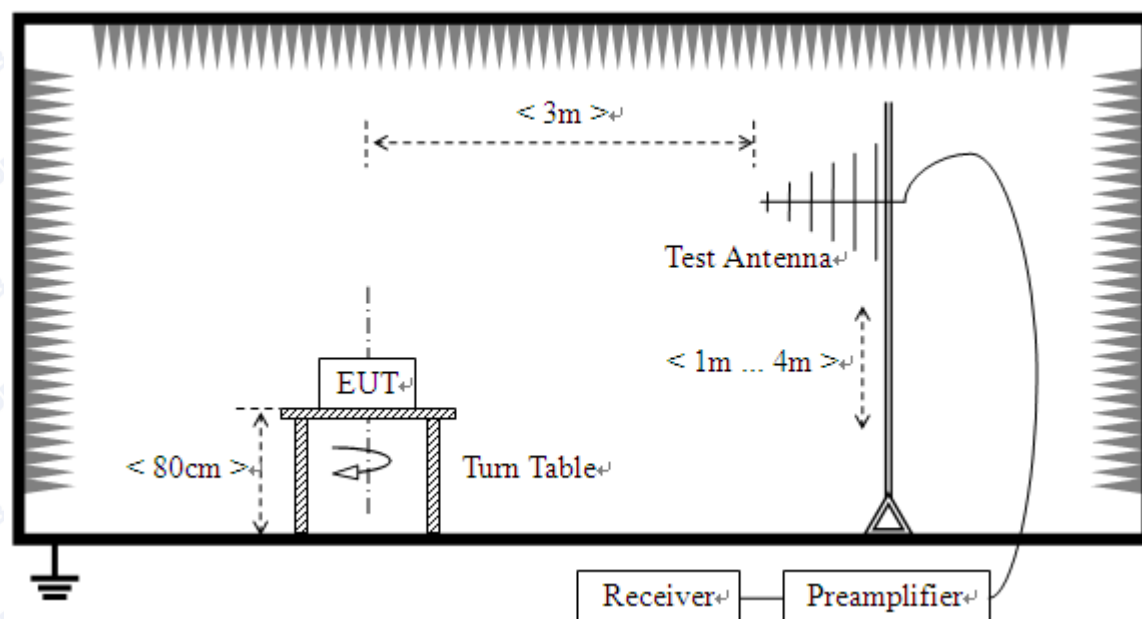

3) For radiated emissions above 1GHz

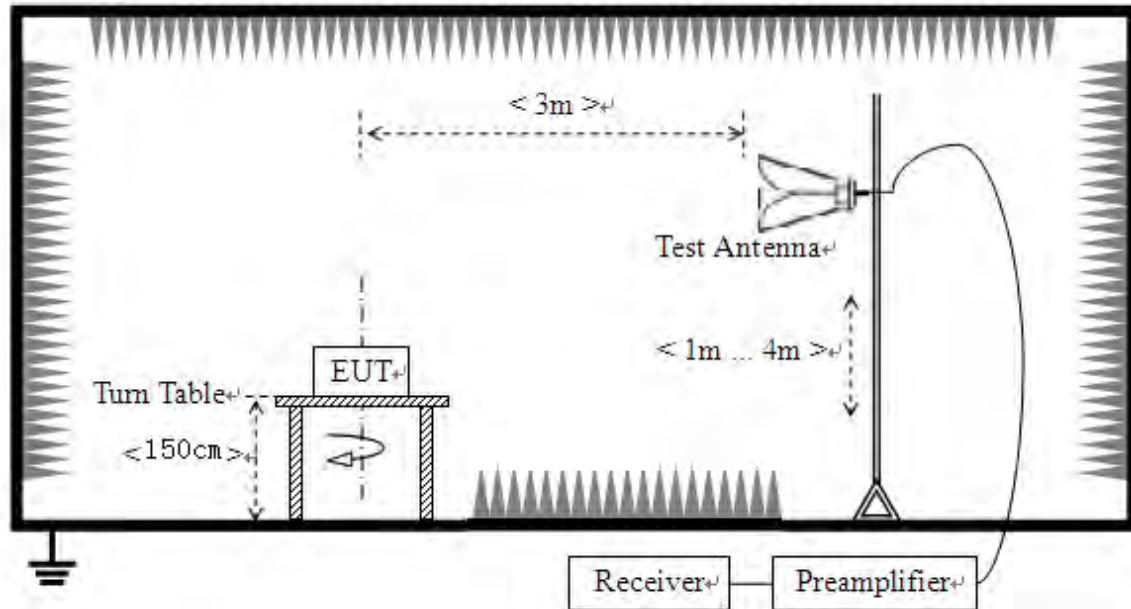

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.10.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

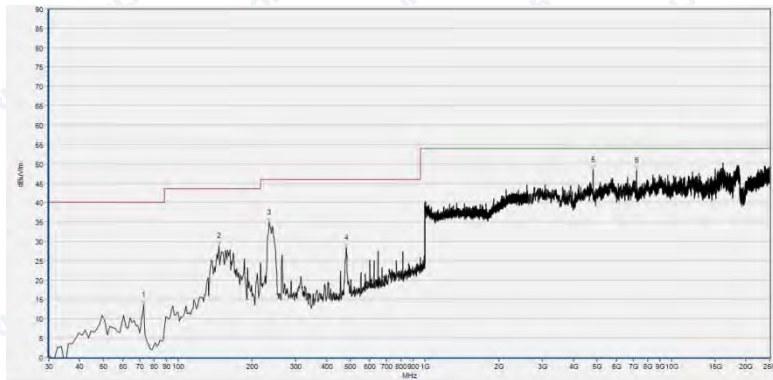**2.10.4.1 GFSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	13.60	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
146.546	28.78	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
233.955	34.88	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
480.401	28.41	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
4803.746	54.48	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
7207.092	48.30	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
48.210	14.80	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
161.114	22.91	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
238.811	29.26	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
647.935	27.41	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
4803.746	51.22	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
8416.912	48.10	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)



REPORT No.: SZ16050136W03

Plot for Channel = 39



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	15.35	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
150.188	30.59	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
237.597	35.66	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
481.615	36.05	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
4881.142	54.92	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
7321.149	48.75	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	14.94	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
236.383	26.32	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
480.401	32.45	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
3035.861	45.36	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
7321.149	49.23	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
15602.510	49.41	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)



REPORT No.: SZ16050136W03

Plot for Channel = 78




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	14.75	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
152.616	31.67	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
237.597	36.55	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
479.186	29.97	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
4962.611	55.31	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
7439.280	50.65	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
48.210	13.98	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
237.597	30.42	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
647.935	28.34	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
3080.669	44.35	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
4958.538	55.59	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
7439.280	50.15	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)

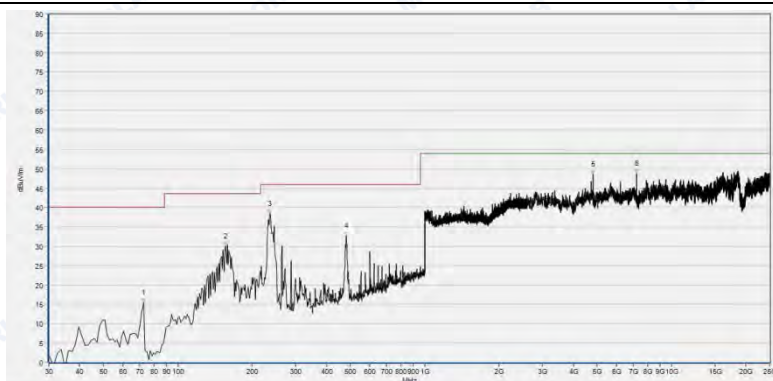
**2.10.4.2 $\pi/4$ -DQPSK Mode:****B. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	15.45	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
156.258	29.94	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
235.169	38.40	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
480.401	32.70	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
4803.746	61.56	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
7207.092	48.72	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 0)

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	15.36	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
235.169	27.82	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
477.972	33.71	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
647.935	29.95	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
4803.746	54.83	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
7207.092	48.18	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 0)

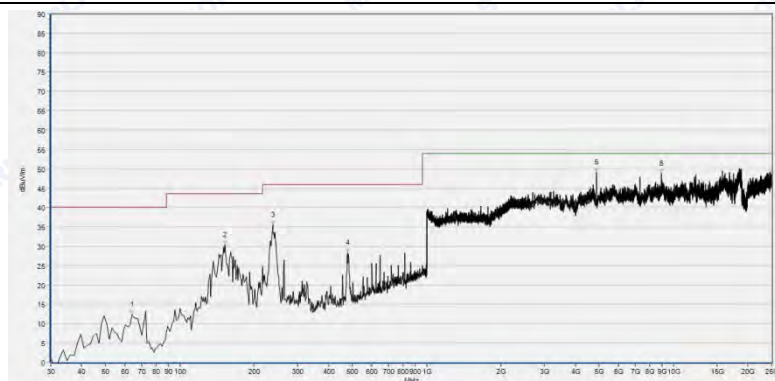
Plot for Channel = 39

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
63.992	12.36	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
152.616	30.26	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
237.597	35.58	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
477.972	28.37	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
4881.142	56.16	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
8938.316	48.79	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 39)

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
48.210	14.63	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
240.025	29.74	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
719.562	28.67	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
4881.142	53.43	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
5756.938	47.85	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
10148.136	47.40	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 39)

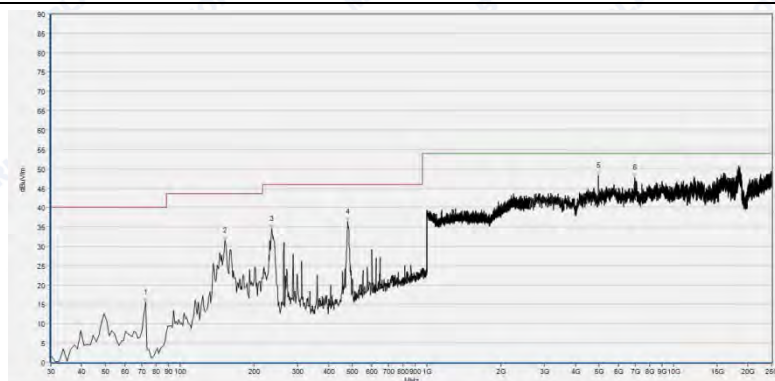
Plot for Channel = 78

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	15.53	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
152.616	31.52	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
235.169	34.45	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
479.186	36.34	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
4958.538	55.23	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
6950.464	47.78	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 78)


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	16.08	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
236.383	26.28	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
477.972	34.77	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2111.485	43.22	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
4962.611	55.60	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
7439.280	48.42	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 78)

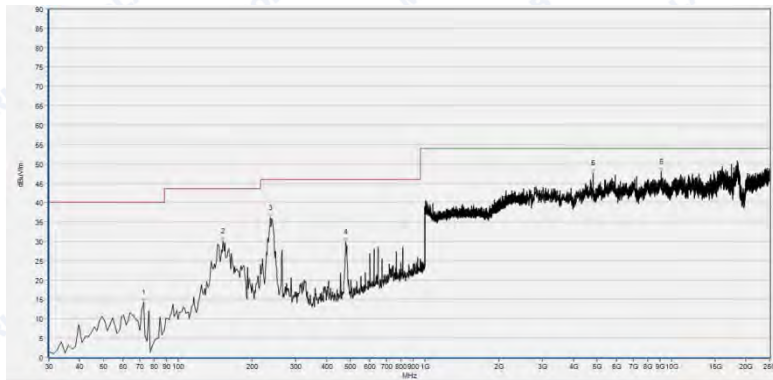**2.10.4.3 8-DPSK Mode:****C. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	14.17	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
152.616	29.95	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
236.383	36.06	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
479.186	29.86	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
4803.746	53.58	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
9064.594	47.90	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 0)

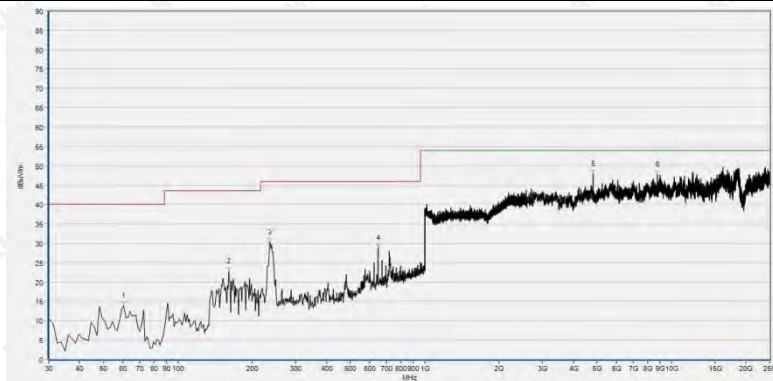

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
60.350	13.99	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
161.114	22.72	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
235.169	30.36	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
647.935	28.90	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
4803.746	53.39	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
8738.716	47.81	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 0)



REPORT No.: SZ16050136W03

Plot for Channel = 39



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	14.61	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
144.118	30.83	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
236.383	35.64	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
481.615	35.18	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
4881.142	55.44	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
7321.149	50.10	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 39)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	15.13	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
235.169	26.63	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
480.401	35.56	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
1345.738	40.45	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4881.142	54.94	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7321.149	48.88	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 39)



REPORT No.: SZ16050136W03

Plot for Channel = 78



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
72.491	14.40	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
152.616	31.29	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
237.597	37.29	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
475.544	32.11	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
4958.538	54.94	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
7439.280	50.26	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 78)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
48.210	14.75	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
176.896	21.06	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
238.811	32.97	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
647.935	28.67	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
4958.538	54.88	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7439.280	48.61	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 78)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Measurements	Frequency	Uncertainty
Conducted emissions	9KHz~30MHz	2.44dB
Radiated emissions	30MHz~200MHz	2.93
	200MHz~1000MHz	2.95
	1GHz~18GHz	2.26
	18GHz~40GHz	1.94

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



REPORT No.: SZ16050136W03

1.1 Test Equipments Utilized

1.1.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2016.03.02	2017.03.01
2	USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2016.03.02	2017.03.01
3	EXA Signal Analyzer	MY53470838	N9010A	Agilent	2015.08.26	2016.08.25
4	RF cable	CB01	RF01	Morlab	N/A	N/A
5	Attenuator	(n.a.)	10dB	Resnet	N/A	N/A
6	SMA connector Note	CN01	RF03	HUBER-SUHNER	N/A	N/A

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.

1.1.2 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB45360846	8960-E5515C	Agilent	2016.03.02	2017.03.01
2	Receiver	MY54130016	N9038A	Agilent	2016.03.02	2017.03.01
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2016.03.02	2017.03.01
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2016.03.02	2017.03.01
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2016.03.02	2017.03.01
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2016.03.02	2017.03.01
7	Coaxial cable(N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable(N male)	CB03	EMC03	Morlab	N/A	N/A
9	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01
10	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01

1.1.3 Climate Chamber

Climate Chamber



REPORT No.: SZ16050136W03

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2016.03.02	2017.03.01

1.1.4 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2016.03.02	2017.03.01

1.1.5 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2016.03.02	2017.03.01

1.1.6 Auxiliary Test Equipment

Auxiliary Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	N.A	PU500C	Asus	N.A	N.A

***** END OF REPORT *****

External Photos

1. EUT front view






2. EUT rear view





3. EUT left side view

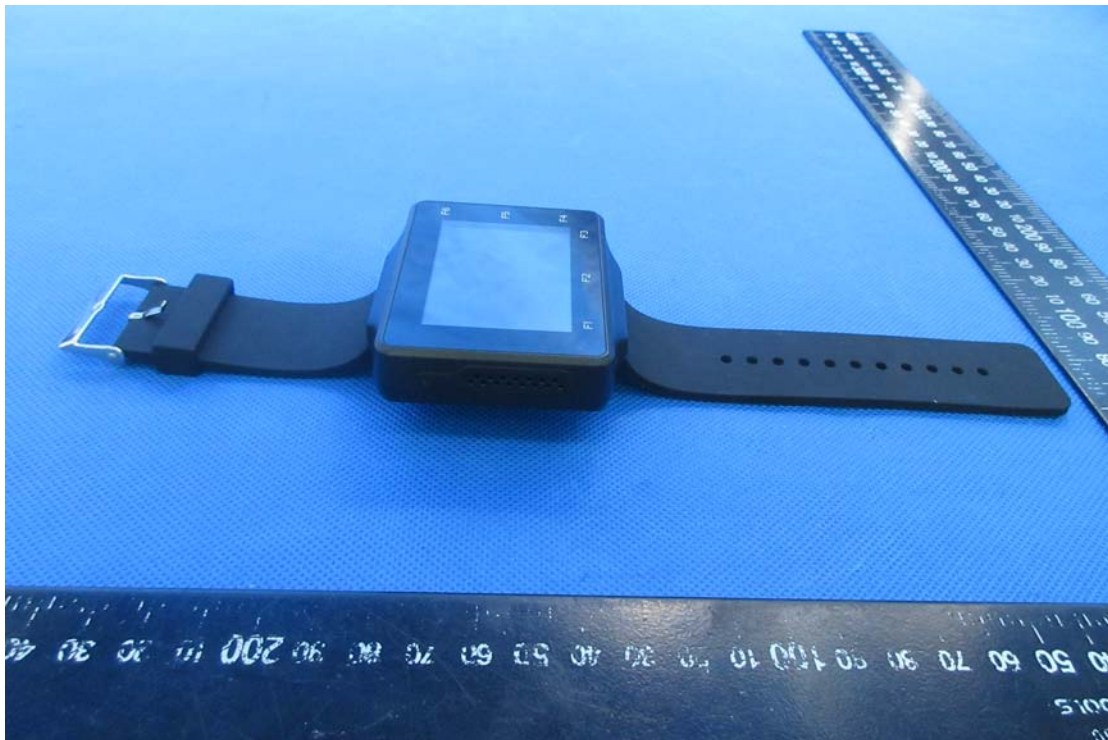





4. EUT right side view





5. EUT top view

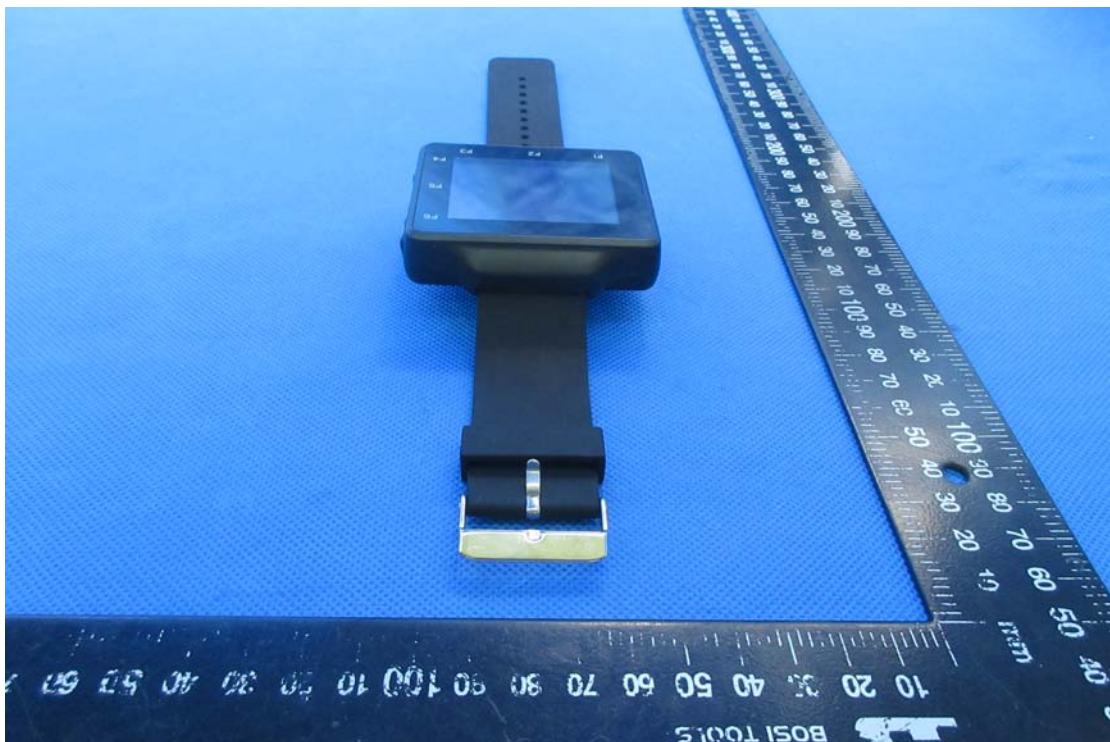

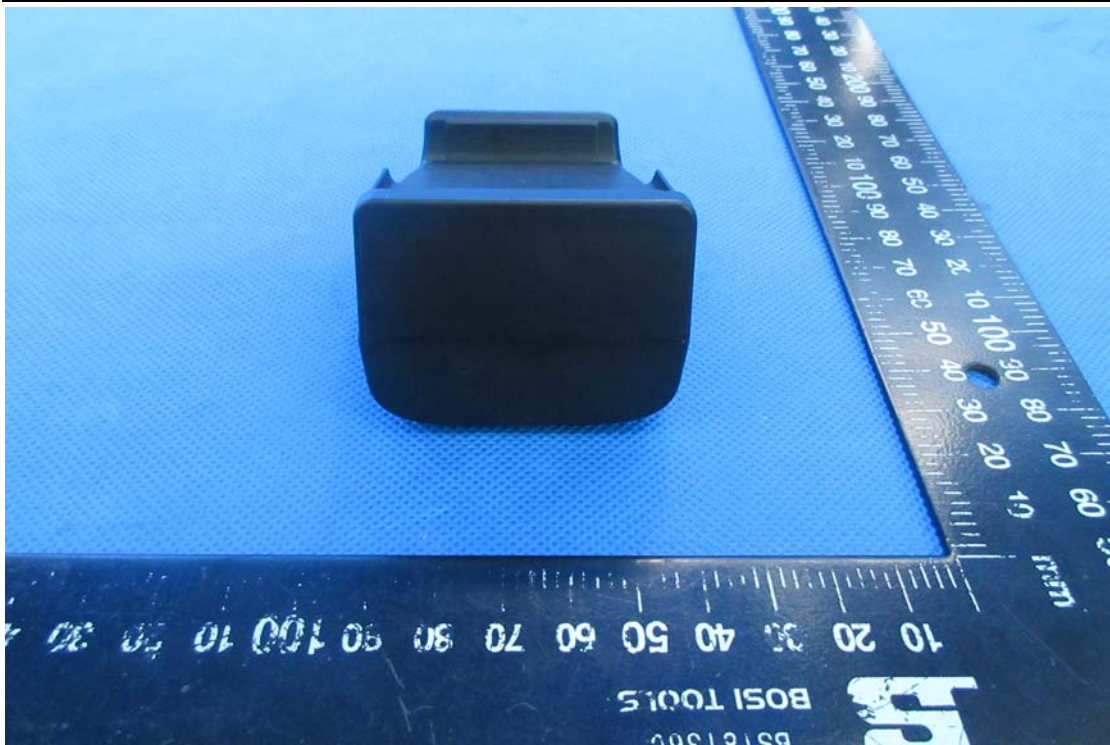

6. EUT bottom view








7. Accessories




Internal Photos


1. EUT uncover view

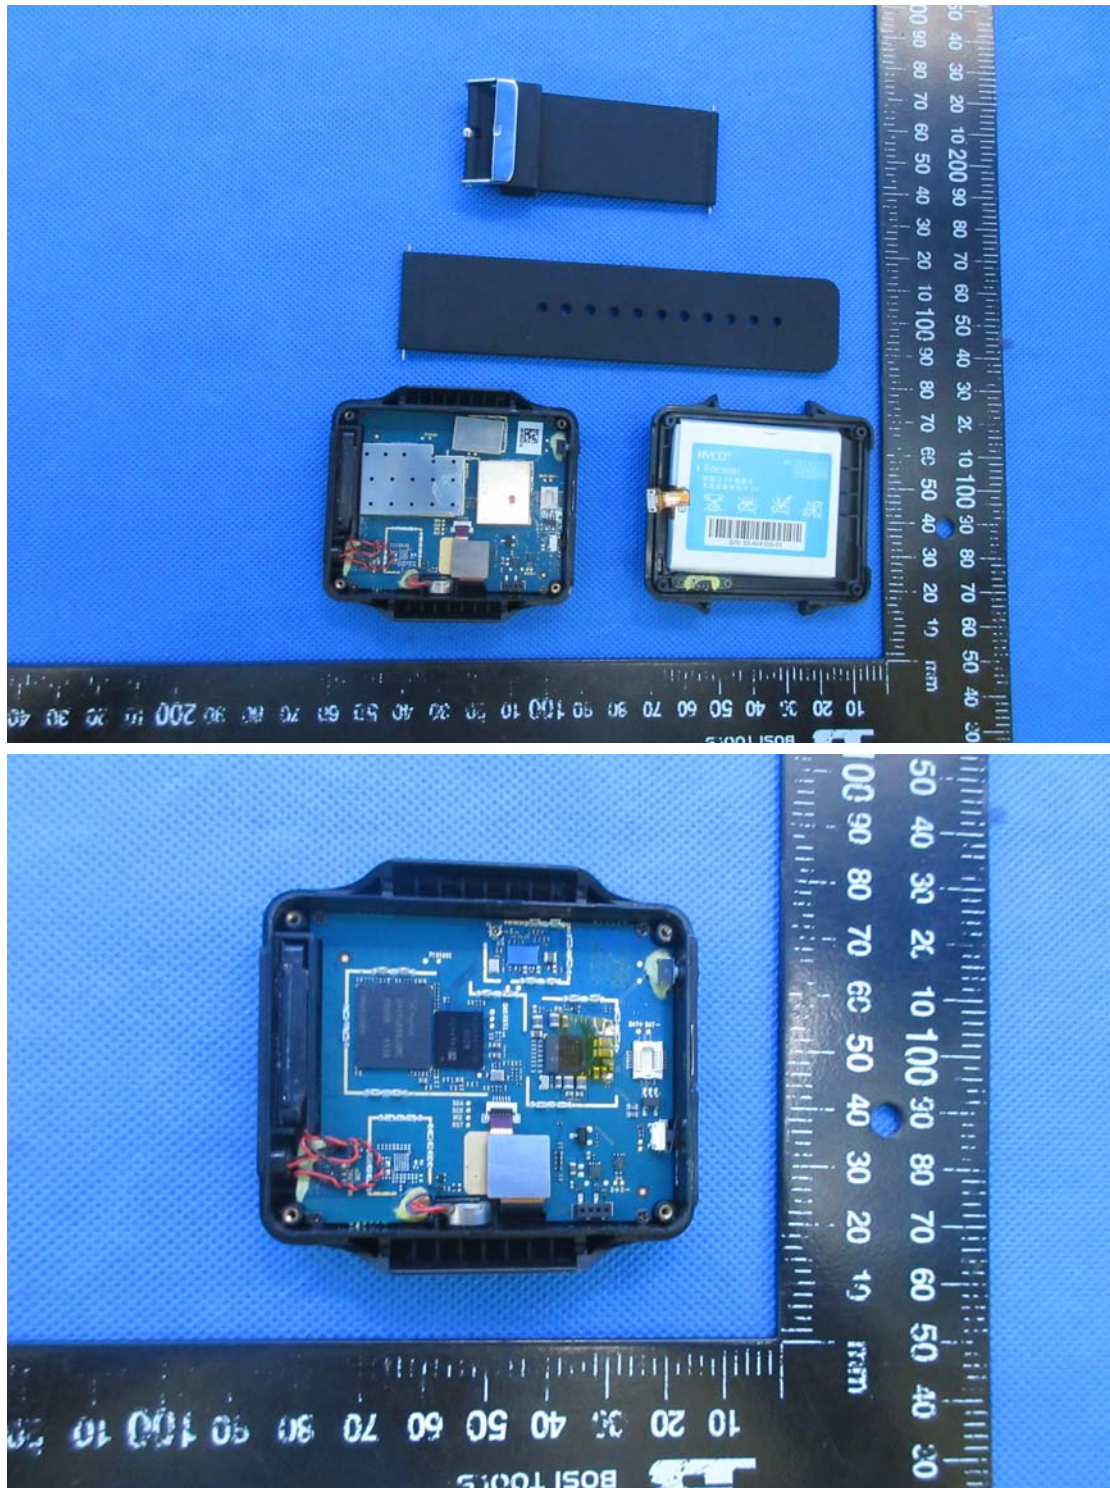

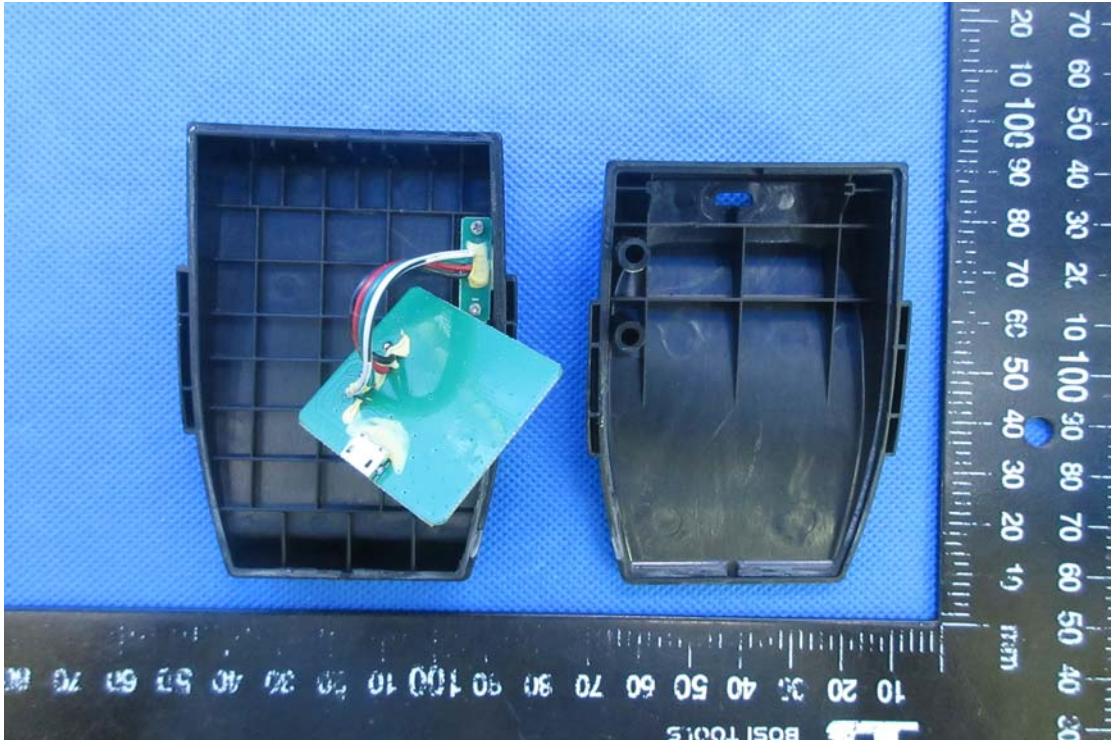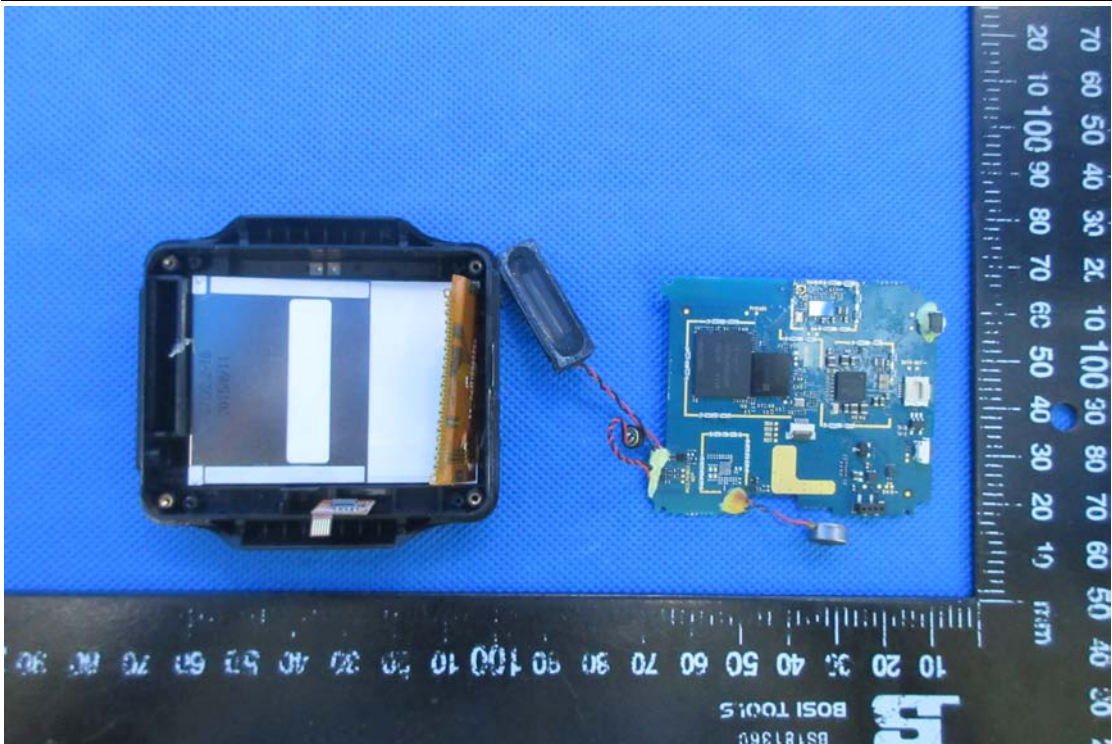

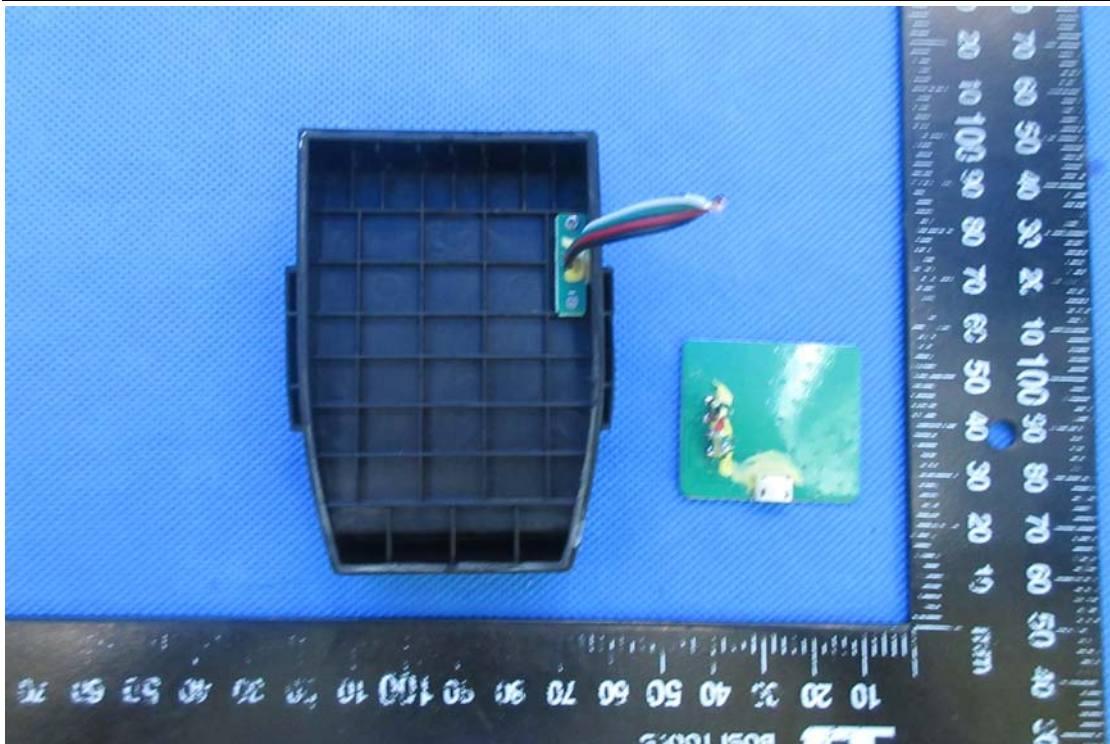



2. Mainboard front view

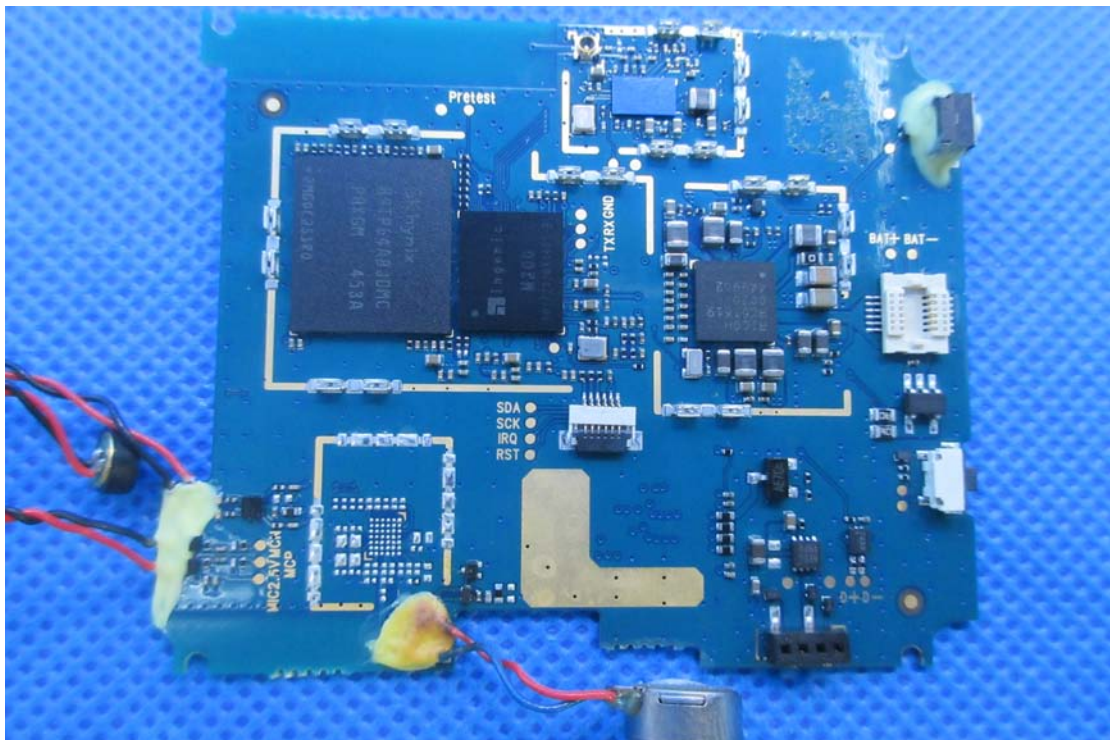



3. Mainboard rear view

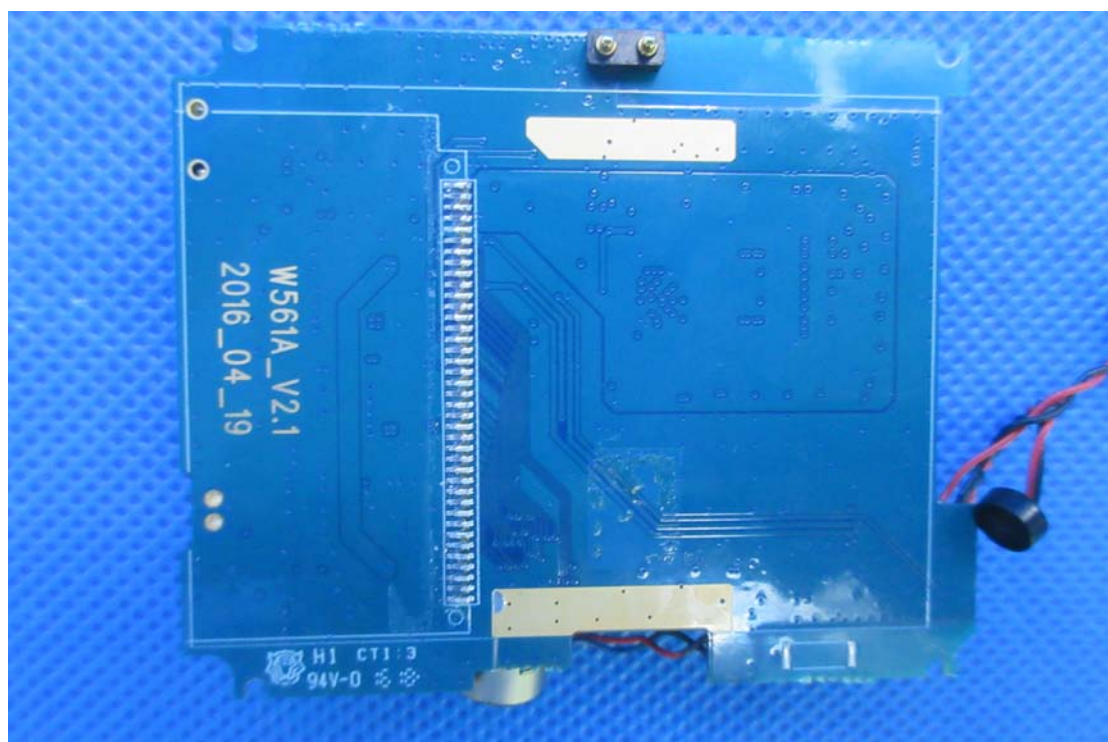

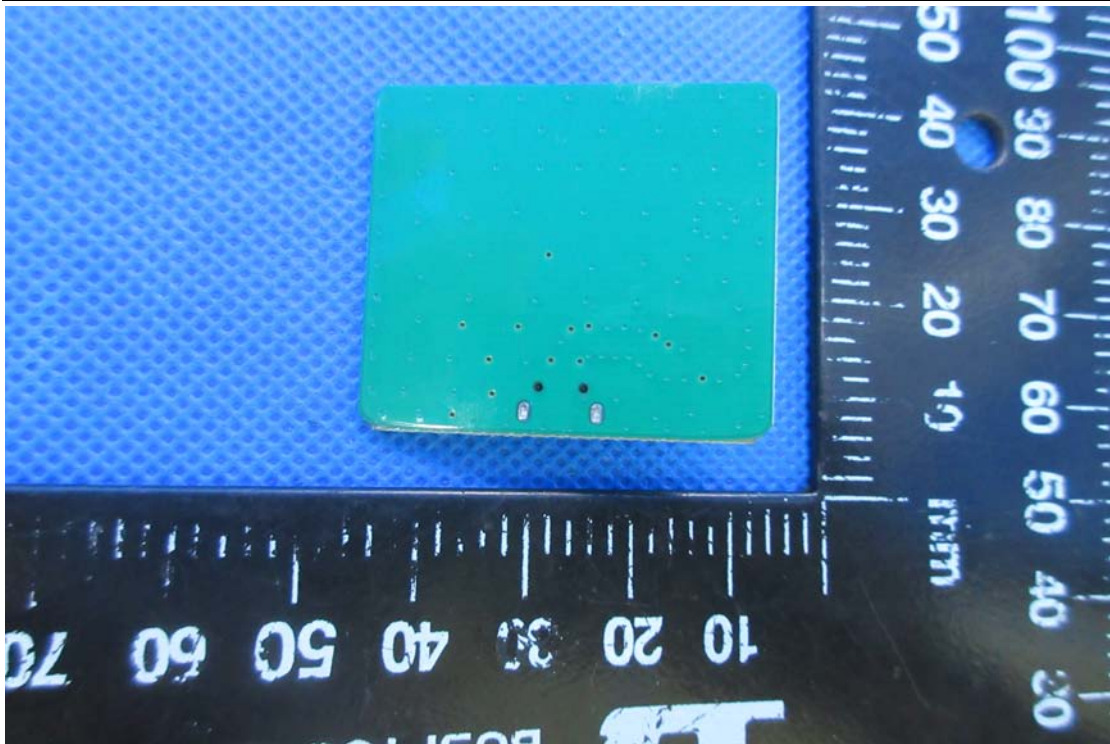

4. BT/WIFI antenna view

