



# TEST REPORT

*For*

**Applicant :** Alibaba.com Singapore E-Commerce Private Limited  
**Address :** 10 Collyer Quay, #10-01 Ocean Financial Centre,  
Singapore 049315

**Product Name :** TMALL TV

**Model Name :** M16I

**Brand Name :** N/A

**FCC ID :** 2AIK5-M16I

**Report No. :** MTE/DYY/S16050879

**Date of Issue :** May. 16, 2016

**Issued by :** Most Technology Service Co., Ltd.

**Address :** No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

**Tel :** 86-755-8602 6850

**Fax :** 86-755-2601 3350

*The report consists 66 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.*

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY.....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1 Product Information.....	5
2.2 Objective .....	5
2.3 Test Standards and Results.....	6
2.4 Environmental Conditions.....	6
<b>3. TEST METHODOLOGY.....</b>	<b>7</b>
3. 1TEST FACILITY .....	7
3.2 GENERAL TEST PROCEDURES .....	7
<b>4. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
4.1 SETUP CONFIGURATION OF EUT.....	8
4.2 SUPPORT EQUIPMENT .....	8
4.3 TEST EQUIPMENT LIST .....	9
5.1 ANTENNA REQUIREMENT .....	10
5.1.1 Applicable Standard .....	10
5.1.2 Evaluation Criteria.....	10
5.2.3 Result: Compliance. ....	10
5.2 AC Power Line Conducted Emission.....	11
5.2.1Requirement .....	11
5.2.2 Block Diagram of Test Setup .....	11
5.3.3 Test procedure .....	11
5.2.4 Test Result .....	11
5.3 Radiated Emission .....	14
5.3.1Requirement .....	14
5.3.2 Test Configuration .....	14
5.3.3 Test Procedure: .....	15
5.3.4 Test Result .....	16
5.4 Conducted Peak Output Power.....	29
5.4.1 Requirement .....	29
5.4.2 Block Diagram of Test Setup .....	29
5.4.3 Test Procedure .....	29
5.4.4 Test Result .....	29
5.5 6dB Emission Bandwidth .....	31
5.5.1 Test Requirement .....	31
5.5.2 Block Diagram of Test Setup .....	31
5.5.3 Test Procedure .....	31
5.5.4 Test Result .....	31
5.6 POWER SPECTRAL DENSITY.....	41
5.6.1 Applicable Standard .....	41
5.6.2 Block Diagram of Test Setup .....	41
5.6.3 Test Procedure .....	41
5.6.4 Test Result .....	41
5.7 Band Edge and Conducted Spurious Emissions .....	51
5.8.1 Test Requirement .....	51
5.7.2 Test Procedure .....	51
5.7.3 Test Result .....	51
5.8 Restricted Frequency Bands.....	58

5.9.1 Test Requirement .....	58
5.8.2 Test Configuration .....	58
5.8.3 Test Procedure: .....	58
5.8.4 Test Result .....	58

## 1. VERIFICATION OF CONFORMITY

<b>Equipment Under Test:</b>	TMALL TV
<b>Brand Name:</b>	N/A
<b>Model Number:</b>	M16I
<b>FCC ID:</b>	2AIK5-M16I
<b>Applicant:</b>	Alibaba.com Singapore E-Commerce Private Limited 10 Collyer Quay, #10-01 Ocean Financial Centre, Singapore 049315
<b>Manufacturer:</b>	Alibaba.com Singapore E-Commerce Private Limited 10 Collyer Quay, #10-01 Ocean Financial Centre, Singapore 049315
<b>Technical Standards:</b>	47 CFR Part 15 Subpart C
<b>File Number:</b>	MTE/DYY/S16050879
<b>Date of test:</b>	May 06, 2016 – May 16, 2016
<b>Deviation:</b>	None
<b>Condition of Test Sample:</b>	Normal
<b>Test Result:</b>	PASS

The above equipment was tested by Most Technology Service Co., Ltd. for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Prepared by (+ signature):

Helen Zhu

May. 06, 2016 – May. 16, 2016



Review by (+ signature):

Henry Chen

May. 16, 2016

Approved by (+ signature):

*Yvette Zhou*

Yvette Zhou (Manager)

May. 16, 2016

## 2. GENERAL INFORMATION

### 2.1 Product Information

<b>Product</b>	TMALL TV
<b>Brand Name</b>	N/A
<b>Model Number</b>	M16I
<b>Series Model Name:</b>	N/A
<b>Series Model Difference description:</b>	N/A
<b>Power Supply</b>	DC 5.2V by Adapter
<b>Frequency Range</b>	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
<b>Modulation Type:</b>	IEEE 802.11b mode: DSSS IEEE 802.11g mode: OFDM 802.11n Standard-20 MHz Channel mode: OFDM 802.11n Standard-40 MHz Channel mode: OFDM
<b>Channel Number</b>	802.11b/g/n(20MHz): 11 802.11n(40MHz): 7
<b>Antenna Type</b>	Internal Antenna, 2dBi
<b>Temperature Range</b>	0°C ~ +45°C

**NOTE:**

1. For a more detailed features description about the EUT, please refer to User's Manual.

### 2.2 Objective

The objective of the report is to perform tests according to FCC Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices
2	KDB 558074	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

## 2.3 Test Standards and Results

No.	Section	Test Items	Result	Date of Test
1	FCC 15.247 (i)	RF EXPOSURE	PASS	2016-05-10
2	FCC 15.203	Antenna Requirement	PASS	2016-05-10
3	FCC15.207 (a)	AC Power Line Conducted Emission	PASS	2016-05-07
4	FCC15.209, 15.247(d)	Radiated Emission	PASS	2016-05-07
5	FCC15.247(b)(3)	Conducted Peak Output Power	PASS	2016-05-10
6	FCC15.247(a)(2)	6dB Emission Bandwidth	PASS	2016-05-10
7	FCC15.247(e)	Power Spectral Density	PASS	2016-05-10
8	FCC15.247(d)	Band Edge and Conducted Spurious Emissions	PASS	2016-05-10
9	FCC15.247(d)	Restricted Frequency Bands	PASS	2016-05-07

*Note:* 1. The test result judgment is decided by the limit of measurement standard  
 2. The information of measurement uncertainty is available upon the customer's request.

## 2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

### 3. TEST METHODOLOGY

#### 3. 1 TEST FACILITY

**Test Site:** Most Technology Service Co., Ltd

**Location:** No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China

**Description:** There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013 and CISPR 16 requirements.

The FCC Registration Number is **490827**. The **IC** Registration Number is **7103A-1**.

**Site Filing:** The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

**Instrument** All measuring equipment is in accord with ANSI C63.10:2013 and CISPR 16

**Tolerance:** requirements that meet industry regulatory agency and accreditation agency requirement.

**Ground Plane:** Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

#### 3.2 GENERAL TEST PROCEDURES

##### Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.5 of ANSI C63.10:2013.

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10:2013, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

## 4. SETUP OF EQUIPMENT UNDER TEST

### 4.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 4.2 SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
---	---	---	---	---	---

*Remark:*

*All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

### 4.3 TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration Interval
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2016/03/10	1 Year
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2016/03/10	1 Year
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2016/03/07	1 Year
4	Terminator	Hubersuhner	50Ω	No.1	2016/03/07	1 Year
5	RF Cable	SchwarzBeck	N/A	No.1	2016/03/07	1 Year
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2016/03/10	1 Year
7	Bilog Antenna	Sunol	JB3	A121206	2016/03/14	1 Year
8	Horn Antenna	SCHWARZBECK	BBHA9120D	756	2016/03/14	1 Year
9	Horn Antenna	Penn Engineering	9034	8376	2016/03/14	1 Year
10	Cable	Resenberger	N/A	NO.1	2016/03/07	1 Year
11	Cable	SchwarzBeck	N/A	NO.2	2016/03/07	1 Year
12	Cable	SchwarzBeck	N/A	NO.3	2016/03/07	1 Year
13	DC Power Filter	DuoJi	DL2×30B	N/A	2016/03/07	1 Year
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2016/03/07	1 Year
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2016/03/07	1 Year
16	Test Receiver	Rohde & Schwarz	ESCI	100492	2016/03/10	1 Year
17	Absorbing Clamp	Luthi	MDS21	3635	2016/03/12	1 Year
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2016/03/07	1 Year
19	AC Power Source	Kikusui	AC40MA	LM003232	2016/03/10	1 Year
20	Test Analyzer	Kikusui	KHA1000	LM003720	2016/03/10	1 Year
21	Line Impedance Network	Kikusui	LIN40MA-PCR-L	LM002352	2016/03/10	1 Year
22	ESD Tester	Kikusui	KES4021	LM003537	2016/03/07	1 Year
23	EMCPRO System	EM Test	UCS-500-M4	V0648102026	2016/03/10	1 Year
24	Signal Generator	IFR	2032	203002/100	2016/03/10	1 Year
25	Amplifier	A&R	150W1000	301584	2016/03/14	1 Year
26	CDN	FCC	FCC-801-M2-25	47	2016/03/10	1 Year
27	CDN	FCC	FCC-801-M3-25	107	2016/03/10	1 Year
28	EM Injection Clamp	FCC	F-203I-23mm	403	2016/03/10	1 Year
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2016/03/10	1 Year
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2016/03/10	1 Year
31	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2016/03/10	1 Year
32	Telecommunication Test Equipment	R&S	CMU200	N/A	2016/03/07	1 Year
33	8 Loop Antenna	ARA	PLA-1030/B	1029	2016/01/10	1 Year

**NOTE:** Equipments listed above have been calibrated and are in the period of validation.

## **5.1 ANTENNA REQUIREMENT**

### **5.1.1 Applicable Standard**

According to FCC § 15.203 , An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **5.1.2 Evaluation Criteria**

- (a) Antenna must be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, Installer shall be responsible for verifying that the correct antenna is employed with the unit.

### **5.2.3 Result: Compliance.**

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 2 dBi, fulfill the requirement of this section.

## 5.2 AC Power Line Conducted Emission

### 5.2.1 Requirement


A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the 150 kHz-30 MHz, shall not exceed the limits in the following table:

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

**\*\*Note:** 1. the lower limit shall apply at the band edges.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 5.2.2 Block Diagram of Test Setup

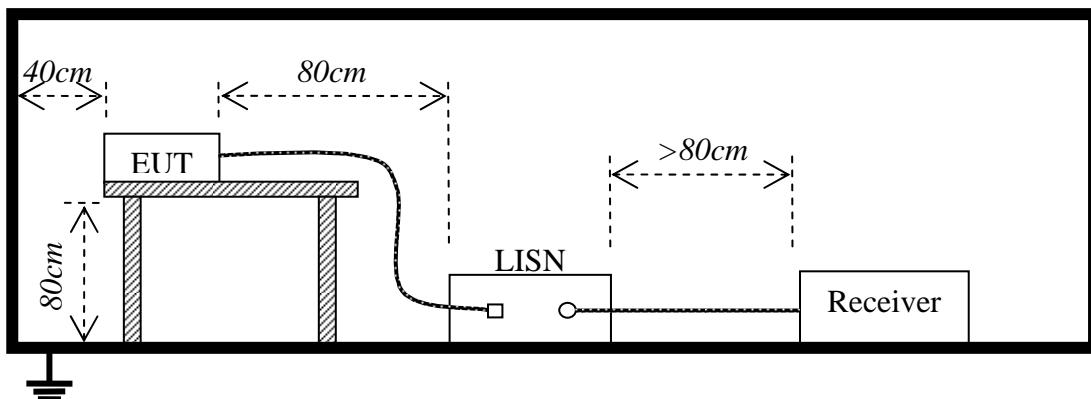

### 5.3.3 Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. Exploratory measurements were made to identify the frequency of the emission that has the highest amplitude relative to the limit;
3. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
4. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
5. The bandwidth of test receiver (ESCI) set at 9 KHz.
6. All data was recorded in the Quasi-peak and average detection mode.


### 5.2.4 Test Result

Pass

Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following pages.


EUT:	Tmall TV	M/N:	M16I
Mode:	Charging	Phase:	L
Test by:	John	Power:	DC 5.2V by Adapter
Temperature: / Humidity	24.4°C / 50.8%	Test date:	2016-05-07

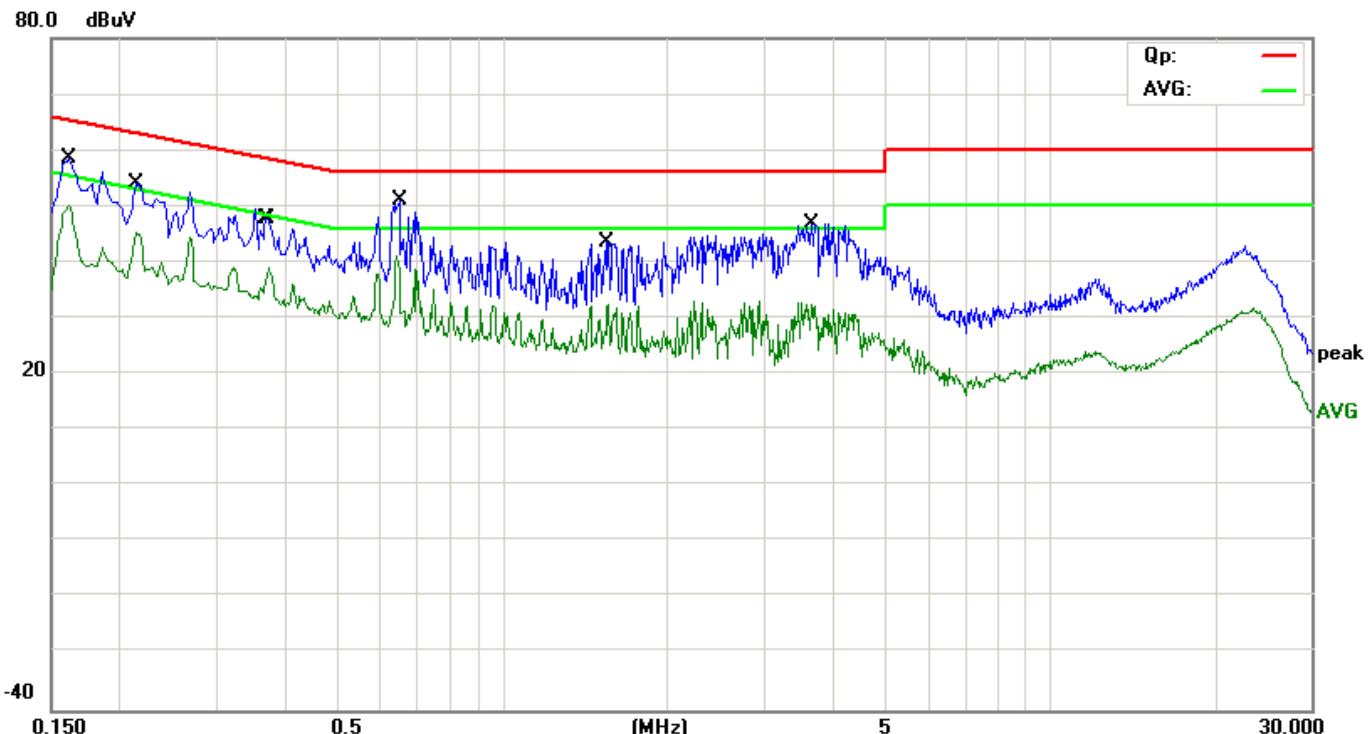

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1620	48.81	9.61	58.42	65.36	-6.94	QP	
2		0.1620	40.67	9.61	50.28	55.36	-5.08	AVG	
3		0.2140	44.32	9.60	53.92	63.05	-9.13	QP	
4		0.2140	35.60	9.60	45.20	53.05	-7.85	AVG	
5		0.3700	38.25	9.59	47.84	58.50	-10.66	QP	
6		0.3740	29.48	9.59	39.07	48.41	-9.34	AVG	
7	*	0.6420	31.46	9.59	41.05	46.00	-4.95	AVG	
8		0.6500	41.45	9.60	51.05	56.00	-4.95	QP	
9		1.5580	33.99	9.60	43.59	56.00	-12.41	QP	
10		1.5620	22.76	9.60	32.36	46.00	-13.64	AVG	
11		3.6700	37.25	9.62	46.87	56.00	-9.13	QP	
12		3.6700	22.96	9.62	32.58	46.00	-13.42	AVG	

\*:Maximum data    x:Over limit    !:over margin

EUT:	Tmall TV	M/N:	M16I
Mode:	Charging	Phase:	N
Test by:	John	Power:	DC 5.2V by Adapter
Temperature: / Humidity	24.4°C / 50.8%	Test date:	2016-05-07

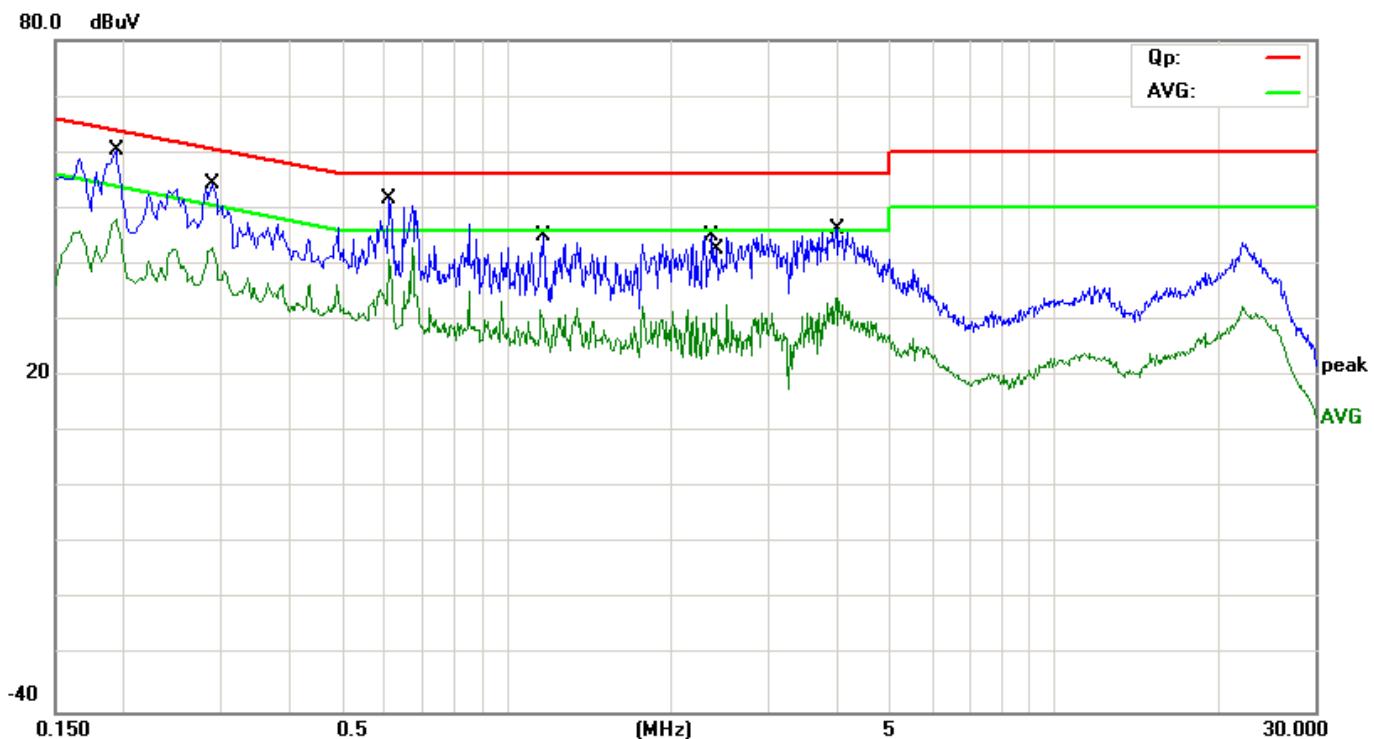

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1940	50.77	9.60	60.37	63.86	-3.49	QP	
2		0.1940	38.34	9.60	47.94	53.86	-5.92	AVG	
3		0.2900	44.70	9.59	54.29	60.52	-6.23	QP	
4		0.2900	33.44	9.59	43.03	50.52	-7.49	AVG	
5		0.6100	42.12	9.59	51.71	56.00	-4.29	QP	
6		0.6100	31.24	9.59	40.83	46.00	-5.17	AVG	
7		1.1580	22.18	9.60	31.78	46.00	-14.22	AVG	
8		1.1660	35.50	9.60	45.10	56.00	-10.90	QP	
9		2.3780	35.57	9.61	45.18	56.00	-10.82	QP	
10		2.4300	21.74	9.61	31.35	46.00	-14.65	AVG	
11		4.0220	36.73	9.62	46.35	56.00	-9.65	QP	
12		4.0220	24.38	9.62	34.00	46.00	-12.00	AVG	

\*:Maximum data    x:Over limit    !:over margin

## 5.3 Radiated Emission

### 5.3.1 Requirement

According to FCC section 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC section 15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3-meter)	Test Distance (m)	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ at 3-meter)
0.009 - 0.490	2400/F(kHz)	300	
0.490 - 1.705	24000/F(kHz)	30	
1.705-30	30	30	
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dB $\mu$ V/m@3m (AV) and 74dB $\mu$ V/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### 5.3.2 Test Configuration

#### Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

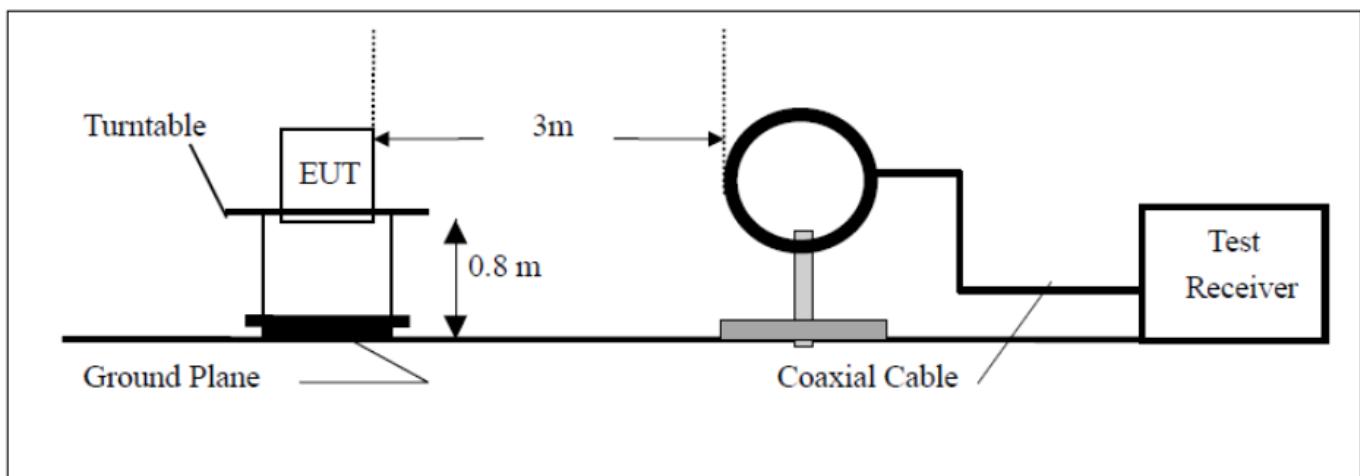

## 2) For radiated emissions from 30MHz to 1GHz

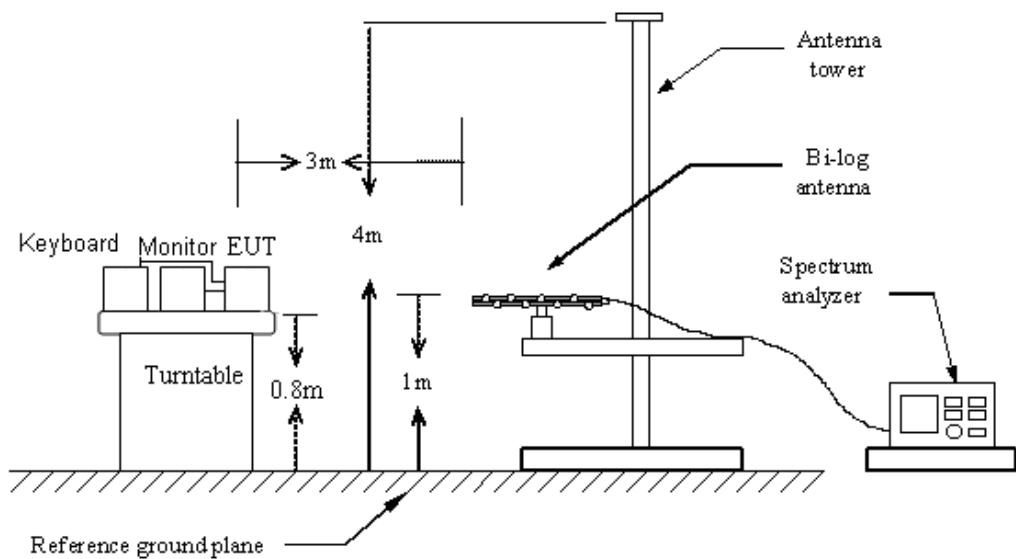

## 3) For radiated emissions above 1GHz

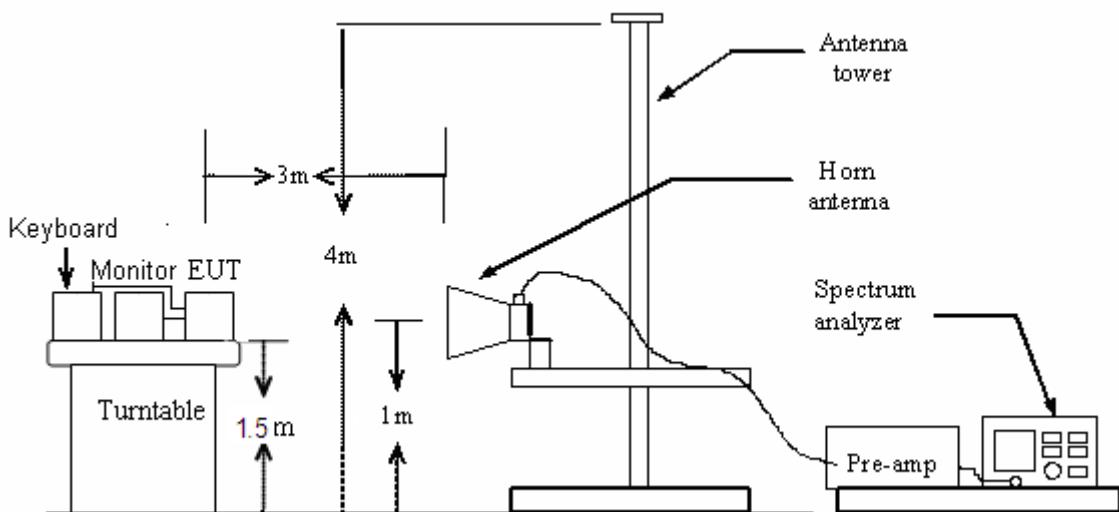**5.3.3 Test Procedure:**

1. For frequencies above 1GHz, the frequencies of maximum emission was recorded by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display.
2. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
3. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
4. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rote table was turned from 0 degrees to 360 degrees to find the maximum reading.

6. For frequencies above 1GHz, horn antenna mouth should face to the EUT all the time when rise or fall.
7. Set the spectrum analyzer in the following setting as:

Below 1GHz: PEAK: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO QP: RBW=120 kHz / Sweep=AUTO  
Above 1GHz: (a)PEAK: RBW=VBW=1MHz / Sweep=AUTO  
(b)AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

8. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### **5.3.4 Test Result**

Pass


**Remark:**

1. During the test, pre-scan the 802.11b, 802.11g, 802.11n(20M), 802.11n(40M) modulation, and found the 802.11b modulation which it is worse case in above 1GHz and the 802.11b Low channel modulation which it is worse case in below 1GHz.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Please refer the following pages.

**Below 1GHz****Antenna A:**

<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH1</b>	<b>Polarization:</b>	<b>Vertical</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.9°C / 51.1%</b>	<b>Test date:</b>	<b>2016-05-07</b>

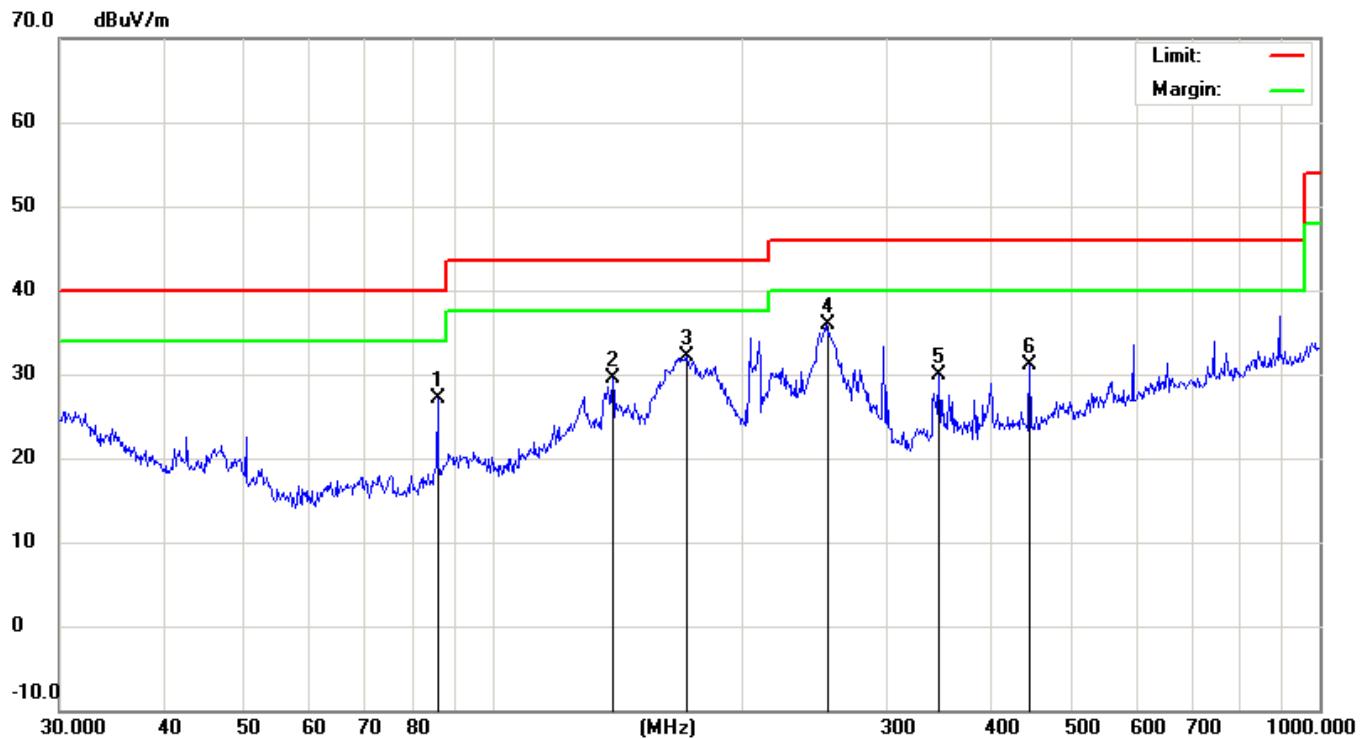

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		85.8983	15.62	11.40	27.02	40.00	-12.98	QP			
2		139.8508	12.37	17.21	29.58	43.50	-13.92	QP			
3		171.9946	14.97	17.10	32.07	43.50	-11.43	QP			
4	*	253.8367	18.39	17.48	35.87	46.00	-10.13	QP			
5		346.8092	12.28	17.58	29.86	46.00	-16.14	QP			
6		446.4140	10.93	20.17	31.10	46.00	-14.90	QP			

\*:Maximum data x:Over limit !:over margin

<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH1</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.9°C / 51.1%</b>	<b>Test date:</b>	<b>2016-05-07</b>




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table			
			Level	Factor	ment				Height	Degree		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		30.7455	9.56	22.66	32.22	40.00	-7.78	QP				
2		46.3402	19.84	12.39	32.23	40.00	-7.77	QP				
3	*	85.8983	23.23	11.40	34.63	40.00	-5.37	QP				
4		204.9551	16.87	16.66	33.53	43.50	-9.97	QP				
5		252.9481	18.13	17.46	35.59	46.00	-10.41	QP				
6		346.8092	12.33	17.58	29.91	46.00	-16.09	QP				

\*:Maximum data    x:Over limit    !:over margin

**Antenna B:**


<b>EUT:</b>	Tmall TV	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	802.11b-CH1	<b>Polarization:</b>	Vertical
<b>Test by:</b>	John	<b>Power:</b>	DC 5.2V by Adapter
<b>Temperature: / Humidity</b>	23.9°C/ 51.1%	<b>Test date:</b>	2016-05-07

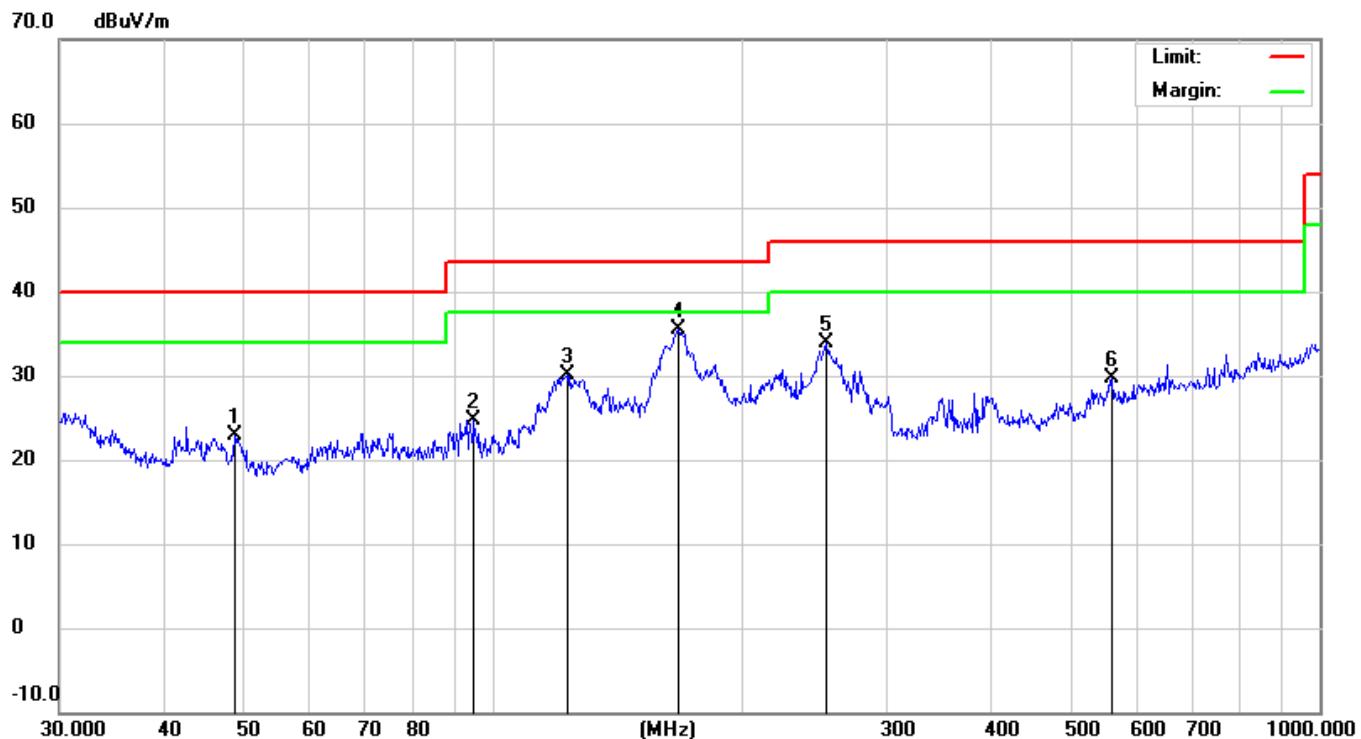

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		48.8428	12.07	10.88	22.95	40.00	-17.05	QP			
2		95.0929	12.47	12.32	24.79	43.50	-18.71	QP			
3		123.2653	12.48	17.57	30.05	43.50	-13.45	QP			
4	*	167.8242	18.19	17.23	35.42	43.50	-8.08	QP			
5		253.8366	16.39	17.48	33.87	46.00	-12.13	QP			
6		560.6928	6.94	22.72	29.66	46.00	-16.34	QP			

\*:Maximum data x:Over limit !:over margin

EUT:	Tmall TV	M/N:	M16I
Mode:	802.11b-CH1	Polarization:	Horizontal
Test by:	John	Power:	DC 5.2V by Adapter
Temperature: / Humidity	23.9°C / 51.1%	Test date:	2016-05-07

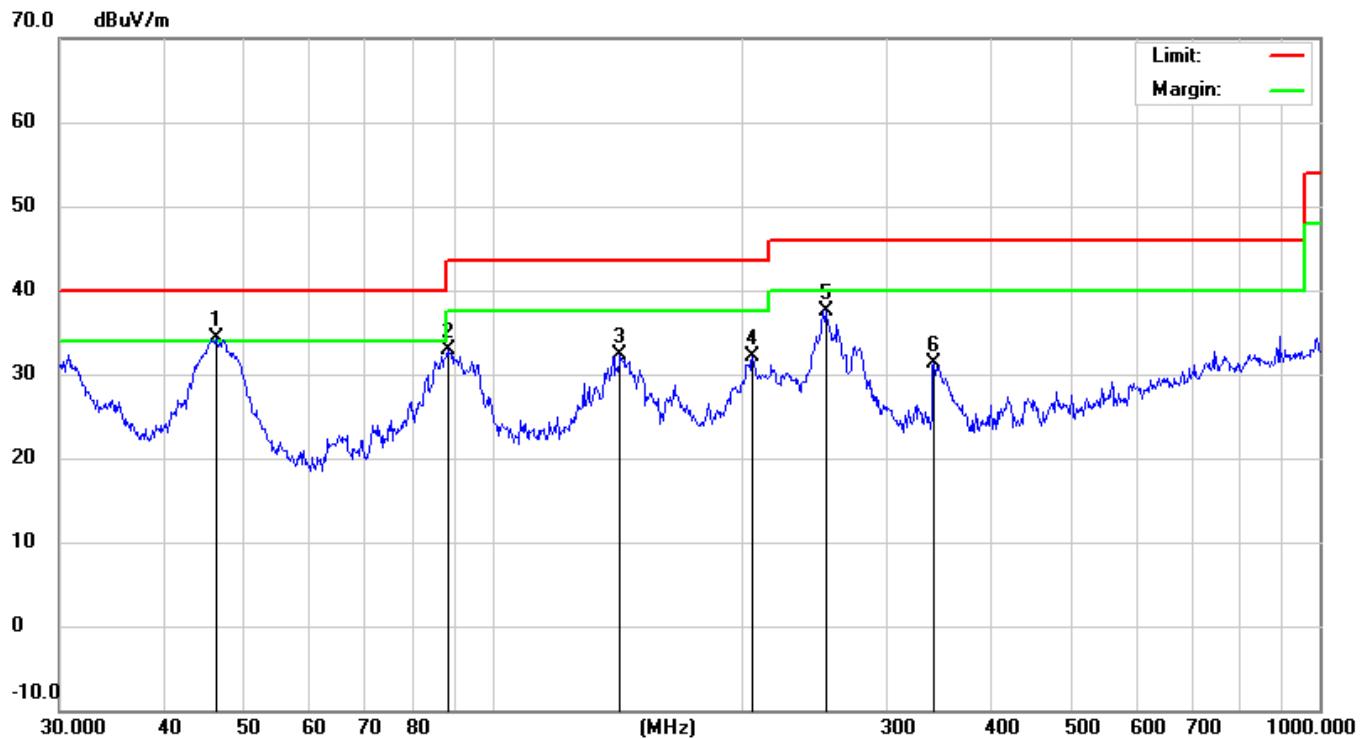


No.	Mk.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Freq.	Level	Factor				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	46.3402	21.84	12.39	34.23	40.00	-5.77	QP		
2		88.3421	21.50	11.40	32.90	43.50	-10.60	QP		
3		142.8242	15.26	17.00	32.26	43.50	-11.24	QP		
4		206.3975	15.59	16.44	32.03	43.50	-11.47	QP		
5		252.9481	20.13	17.46	37.59	46.00	-8.41	QP		
6		341.9786	14.00	17.24	31.24	46.00	-14.76	QP		

\*:Maximum data    x:Over limit    !:over margin

**Above 1GHz****Antenna A:**


<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH1</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C / 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

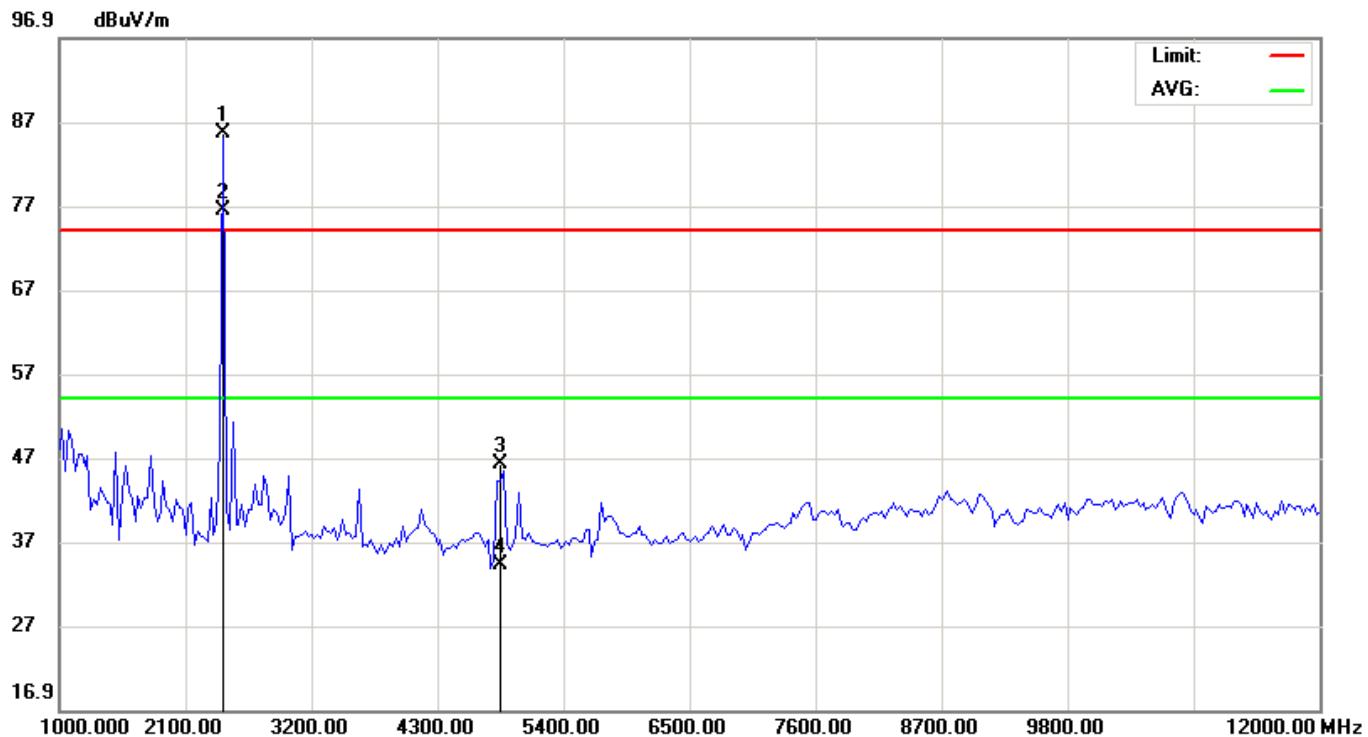

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	X	2412.100	94.01	-8.41	85.60	74.00	11.60	peak			
2	*	2412.100	84.86	-8.41	76.45	54.00	22.45	AVG			
3		4824.000	52.06	-5.91	46.15	74.00	-27.85	peak			
4		4824.000	40.05	-5.91	34.14	54.00	-19.86	AVG			

\*:Maximum data   x:Over limit   !:over margin


<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH1</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C / 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

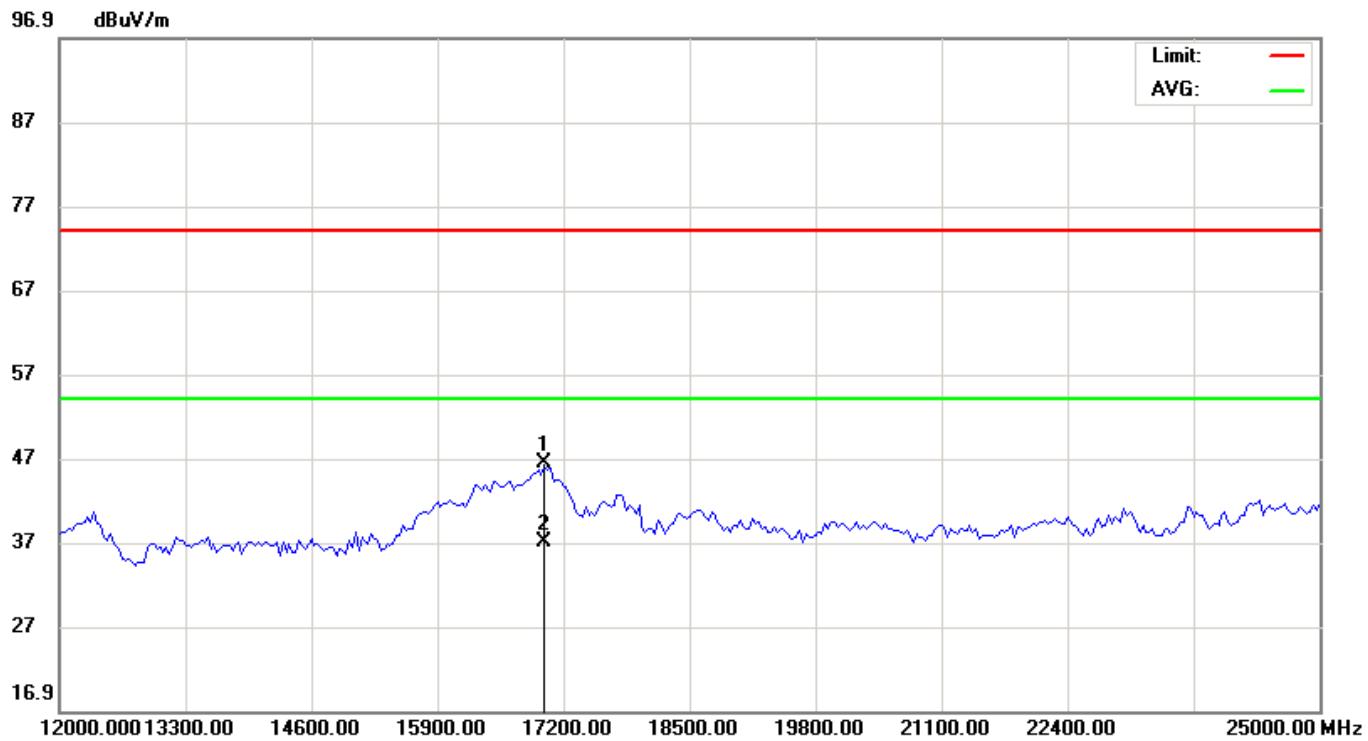

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		17005.00	39.42	6.90	46.32	74.00	-27.68	peak			
2	*	17005.00	30.06	6.90	36.96	54.00	-17.04	AVG			

\*:Maximum data    x:Over limit    !:over margin


EUT:	Tmall TV	M/N:	M16I
Mode:	802.11b-CH1	Polarization:	Vertical
Test by:	John	Power:	DC 5.2V by Adapter
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-05-07

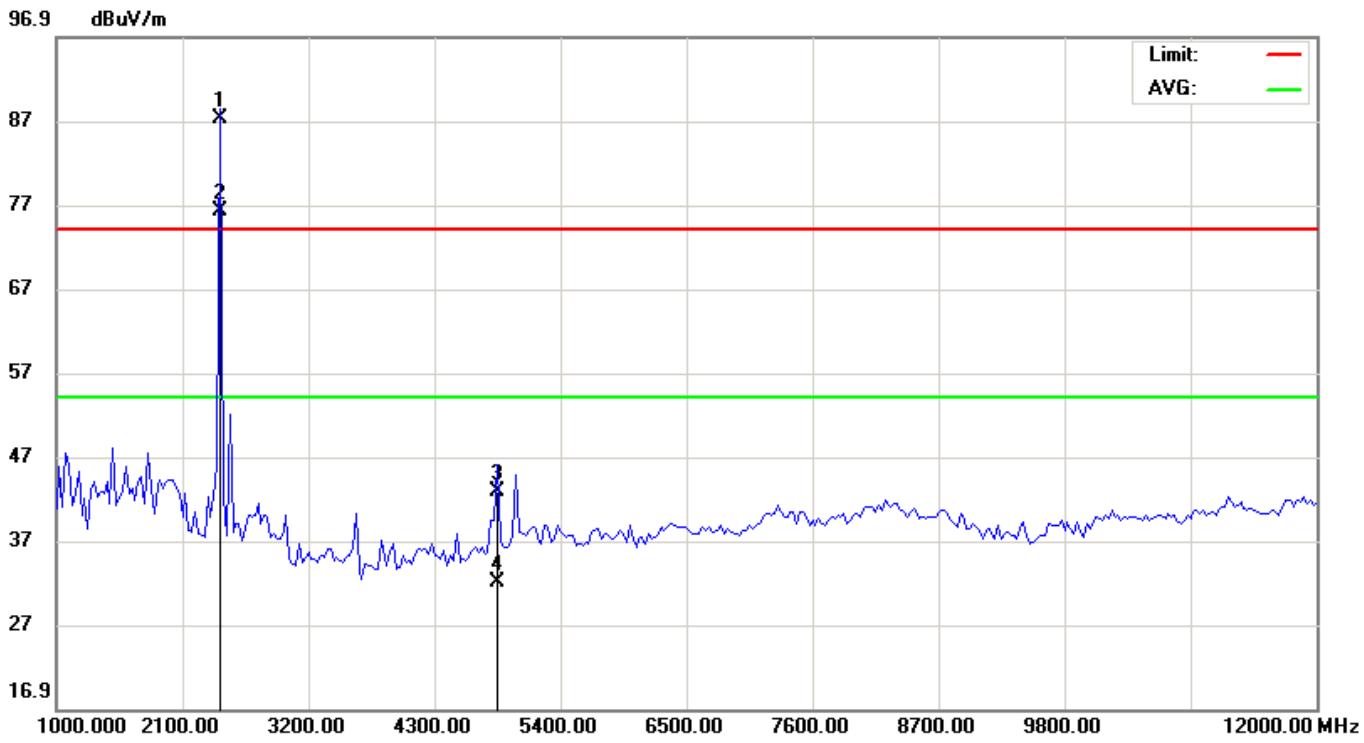

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	X	2412.000	95.66	-8.41	87.25	74.00	13.25	peak			
2	*	2412.000	84.67	-8.41	76.26	54.00	22.26	AVG			
3		4824.000	48.76	-5.91	42.85	74.00	-31.15	peak			
4		4824.000	37.98	-5.91	32.07	54.00	-21.93	AVG			

\*:Maximum data    x:Over limit    !:over margin


EUT:	Tmall TV	M/N:	M16I
Mode:	802.11b-CH1	Polarization:	Vertical
Test by:	John	Power:	DC 5.2V by Adapter
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-05-07

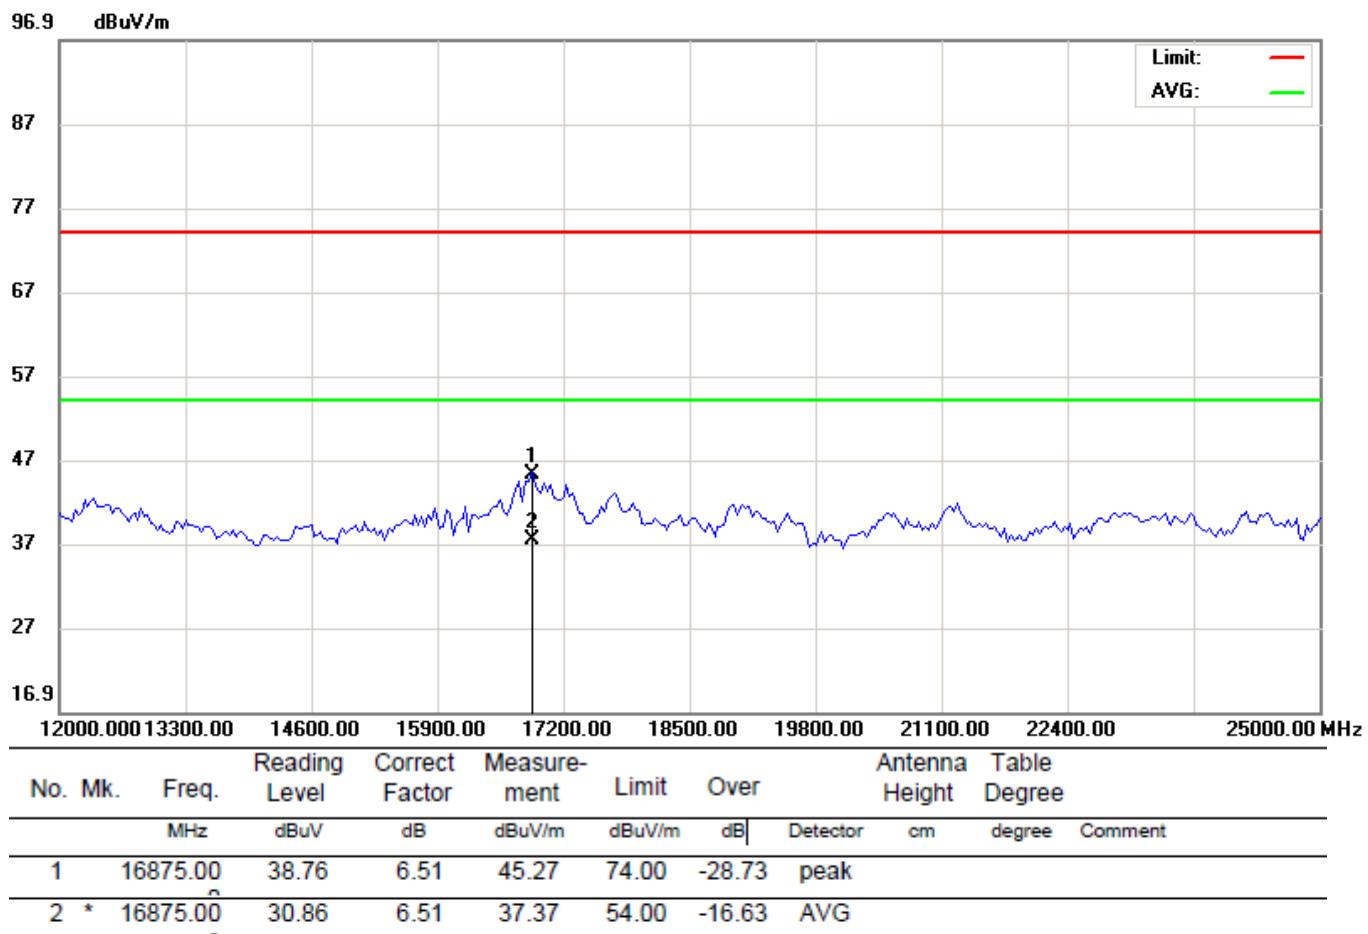

\*:Maximum data   x:Over limit   !:over margin

**Antenna B:**


<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH1</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C/ 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

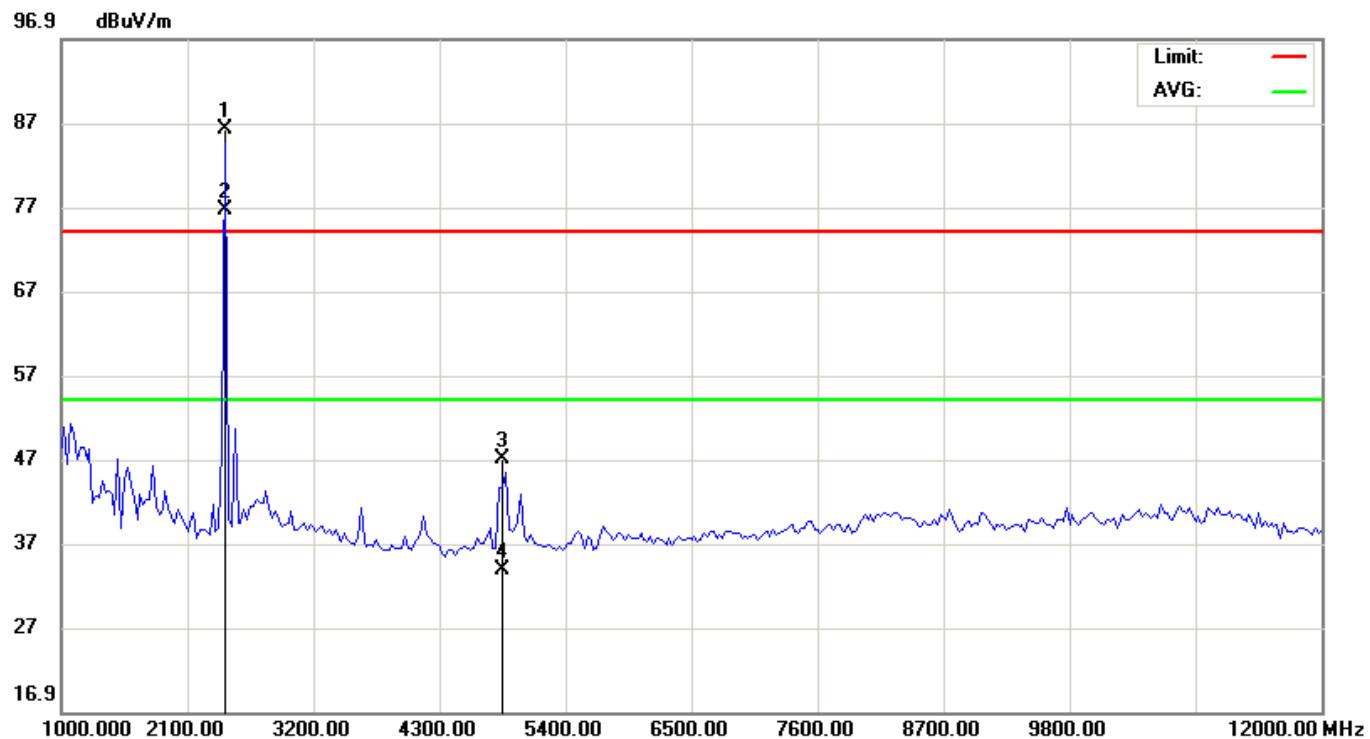

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment			Height	Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	X	2412.100	94.53	-8.41	86.12	74.00	12.12	peak		
2	*	2412.100	85.03	-8.41	76.62	54.00	22.62	AVG		
3		4824.000	53.01	-5.91	47.10	74.00	-26.90	peak		
4		4824.000	39.68	-5.91	33.77	54.00	-20.23	AVG		


\*:Maximum data   x:Over limit   !:over margin

<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH1</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C/ 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

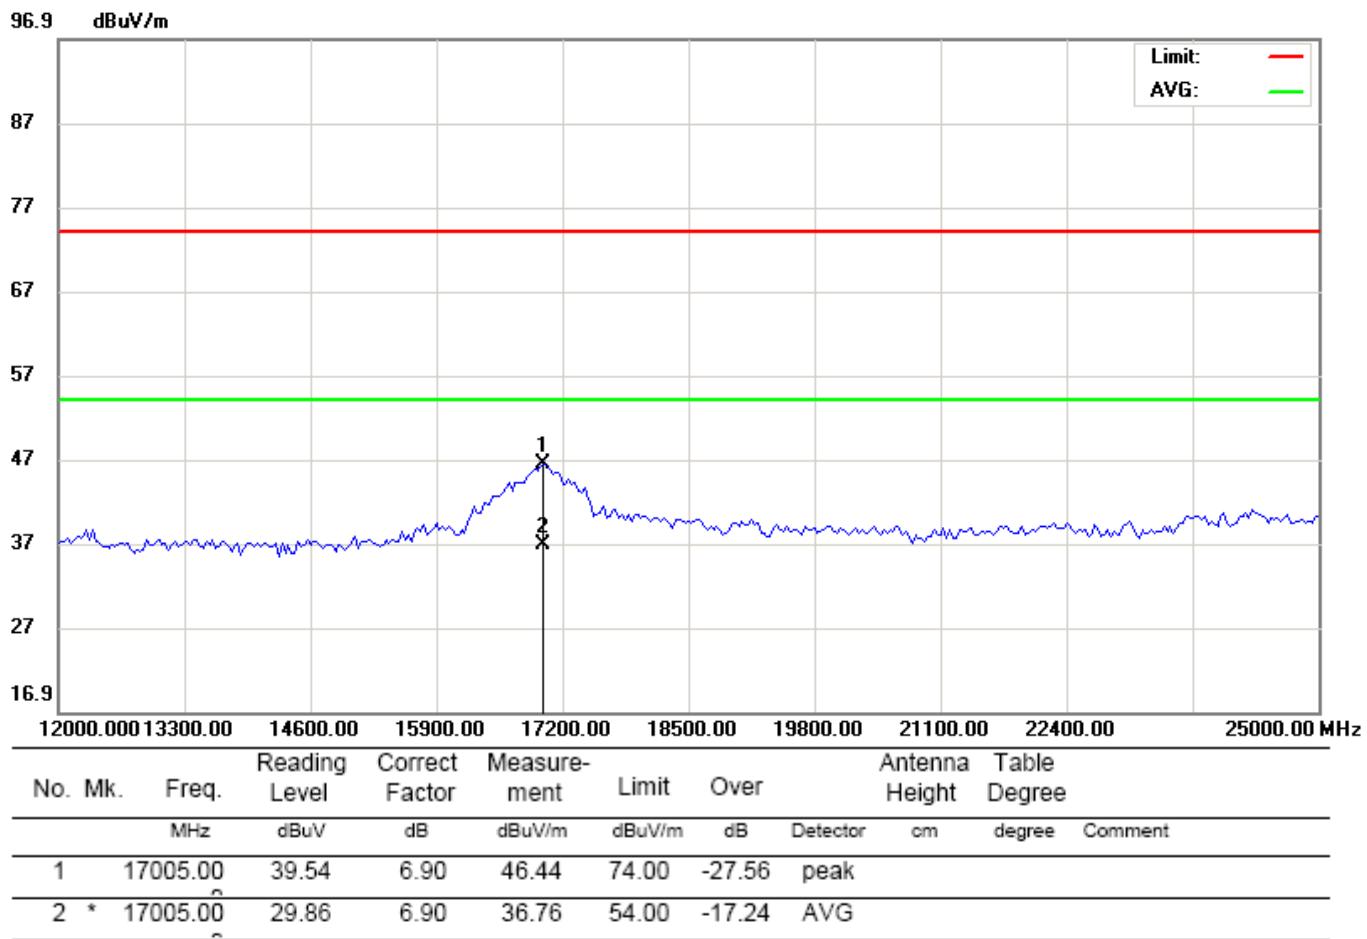

\*:Maximum data   x:Over limit   !:over margin


EUT:	Tmall TV	M/N:	M16I
Mode:	802.11b-CH1	Polarization:	Vertical
Test by:	John	Power:	DC 5.2V by Adapter
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-05-07

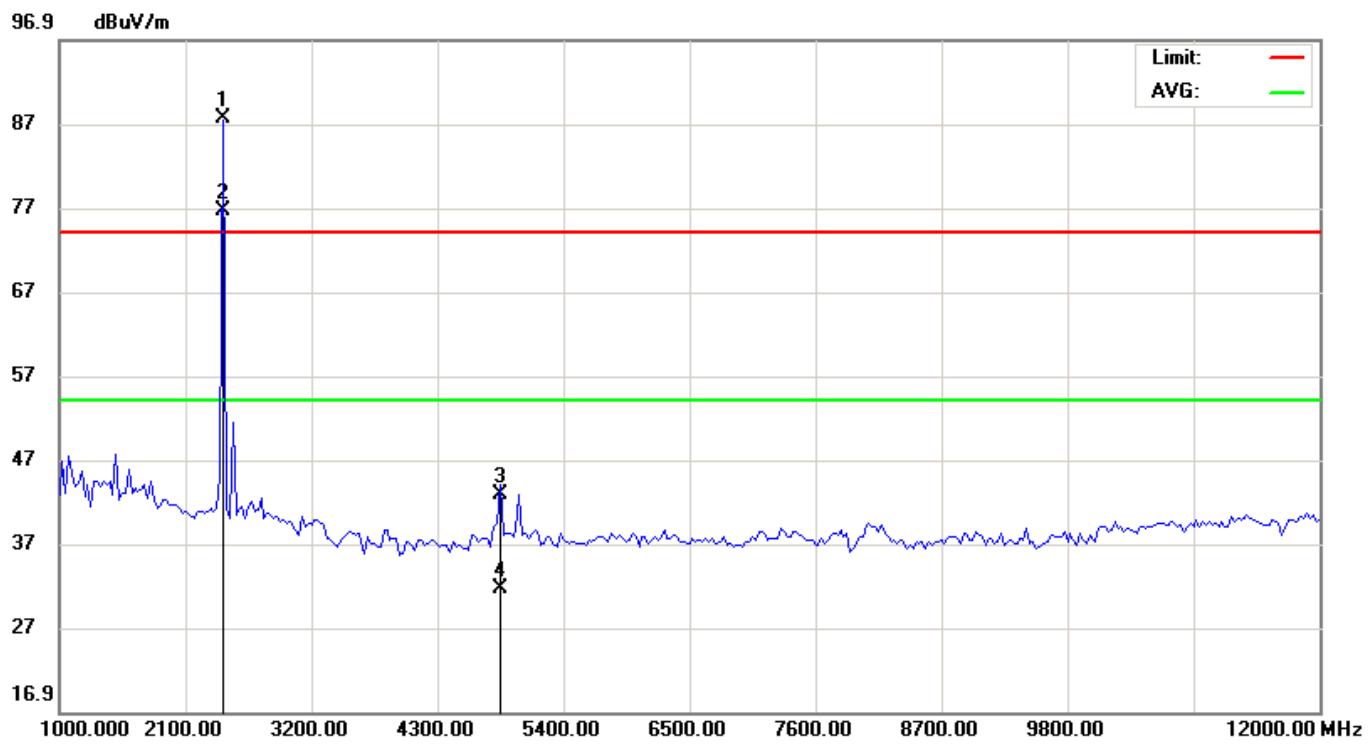

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	X	2412.000	96.01	-8.41	87.60	74.00	13.60	peak			
2	*	2412.000	85.03	-8.41	76.62	54.00	22.62	AVG			
3		4824.000	48.76	-5.91	42.85	74.00	-31.15	peak			
4		4824.000	37.56	-5.91	31.65	54.00	-22.35	AVG			

\*:Maximum data    x:Over limit    !:over margin

<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH1</b>	<b>Polarization:</b>	<b>Vertical</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C / 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

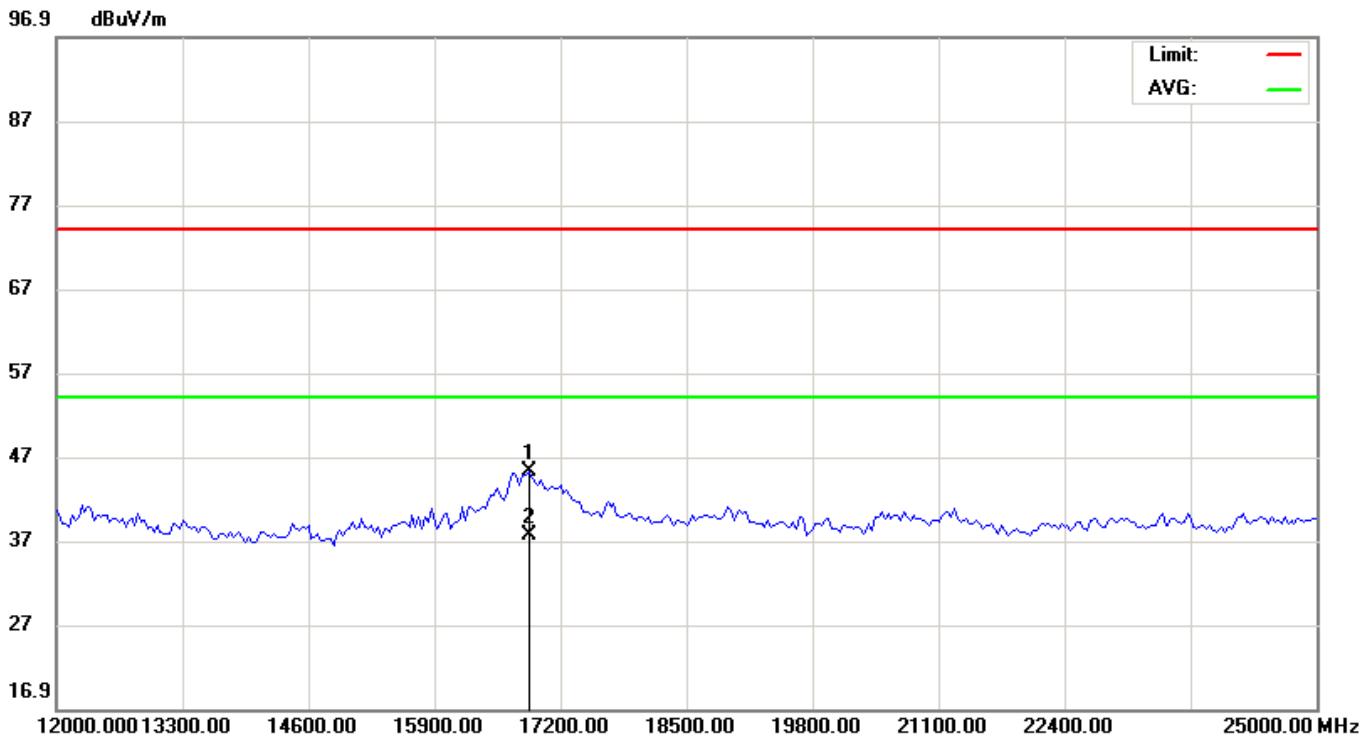

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		16875.00	38.76	6.51	45.27	74.00	-28.73	peak			
2	*	16875.00	31.01	6.51	37.52	54.00	-16.48	AVG			


\*:Maximum data    x:Over limit    !:over margin

## 5.4 Conducted Peak Output Power

### 5.4.1 Requirement

According to FCC section 15.247(b)(3), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### 5.4.2 Block Diagram of Test Setup

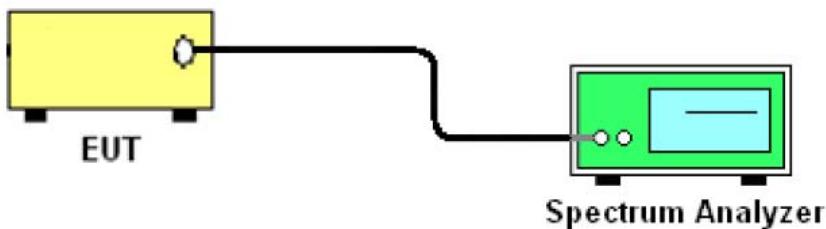

### 5.4.3 Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
3. Add a correction factor to the reading.

### 5.4.4 Test Result

Test Item:	Peak Output Power	Temperature :	20°C
Test Engineer:	John	Relative Humidity :	55%

#### Antenna A:

Mode	Channel	Frequency (MHz)	Peak Output Power(dBm)	Limit		Pass/Fail
				(mW)	(dBm)	
802.11b	Low	2412	10.90	1000	30	Pass
	Middle	2437	11.13	1000	30	Pass
	High	2462	11.40	1000	30	Pass
802.11g	Low	2412	9.69	1000	30	Pass
	Middle	2437	9.19	1000	30	Pass
	High	2462	8.92	1000	30	Pass
802.11n (20MHz)	Low	2412	8.97	1000	30	Pass
	Middle	2437	8.81	1000	30	Pass
	High	2462	8.45	1000	30	Pass
802.11n (40MHz)	Low	2422	10.47	1000	30	Pass
	Middle	2437	10.42	1000	30	Pass
	High	2452	10.34	1000	30	Pass

**Antenna B:**


Mode	Channel	Frequency (MHz)	Peak Output Power(dBm)	Limit		Pass/Fail
				(mW)	(dBm)	
802.11b	Low	2412	10.61	1000	30	Pass
	Middle	2437	11.32	1000	30	Pass
	High	2462	11.84	1000	30	Pass
802.11g	Low	2412	9.13	1000	30	Pass
	Middle	2437	9.78	1000	30	Pass
	High	2462	9.96	1000	30	Pass
802.11n (20MHz)	Low	2412	9.90	1000	30	Pass
	Middle	2437	9.24	1000	30	Pass
	High	2462	9.47	1000	30	Pass
802.11n (40MHz)	Low	2422	10.90	1000	30	Pass
	Middle	2437	10.94	1000	30	Pass
	High	2452	11.62	1000	30	Pass

## 5.5 6dB Emission Bandwidth

### 5.5.1 Test Requirement

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.5.2 Block Diagram of Test Setup

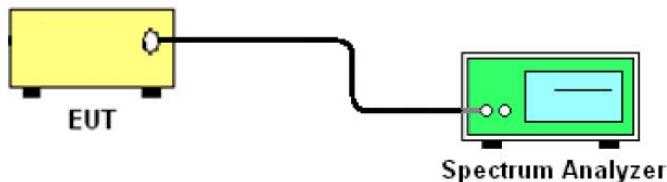

### 5.5.3 Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.5.4 Test Result

Pass




<b>Test Item:</b>	6dB Emission Bandwidth	<b>Temperature :</b>	23°C
<b>Test Engineer:</b>	John	<b>Relative Humidity :</b>	55%

**Antenna A:**


Mode	Channel	Frequency (MHz)	6dB Bandwidth(MHz)	Limit(KHz)
802.11b	Low	2412	10.047	≥500
	Middle	2437	10.033	≥500
	High	2462	10.029	≥500
802.11g	Low	2412	16.454	≥500
	Middle	2437	16.433	≥500
	High	2462	16.438	≥500
802.11n (20MHz)	Low	2412	17.618	≥500
	Middle	2437	17.599	≥500
	High	2462	17.609	≥500
802.11n (40MHz)	Low	2422	36.048	≥500
	Middle	2437	35.862	≥500
	High	2452	35.994	≥500

**Antenna B:**


Mode	Channel	Frequency (MHz)	6dB Bandwidth(MHz)	Limit(KHz)
802.11b	Low	2412	10.071	≥500
	Middle	2437	10.055	≥500
	High	2462	10.038	≥500
802.11g	Low	2412	16.462	≥500
	Middle	2437	16.393	≥500
	High	2462	16.369	≥500
802.11n (20MHz)	Low	2412	17.626	≥500
	Middle	2437	17.618	≥500
	High	2462	17.629	≥500
802.11n (40MHz)	Low	2422	35.751	≥500
	Middle	2437	35.623	≥500
	High	2452	35.763	≥500

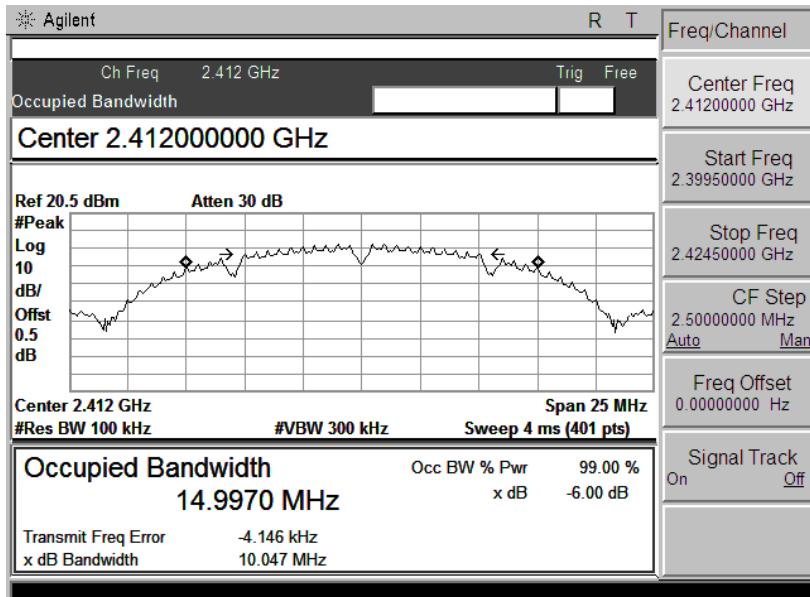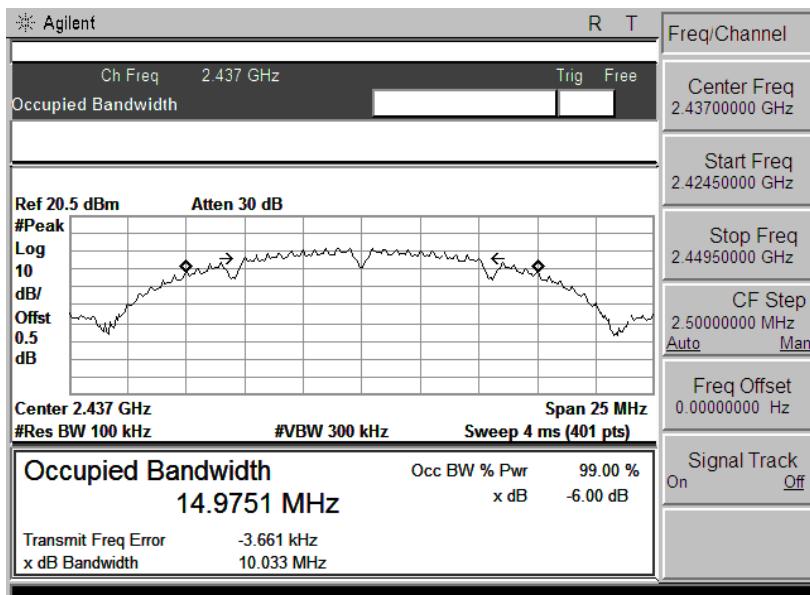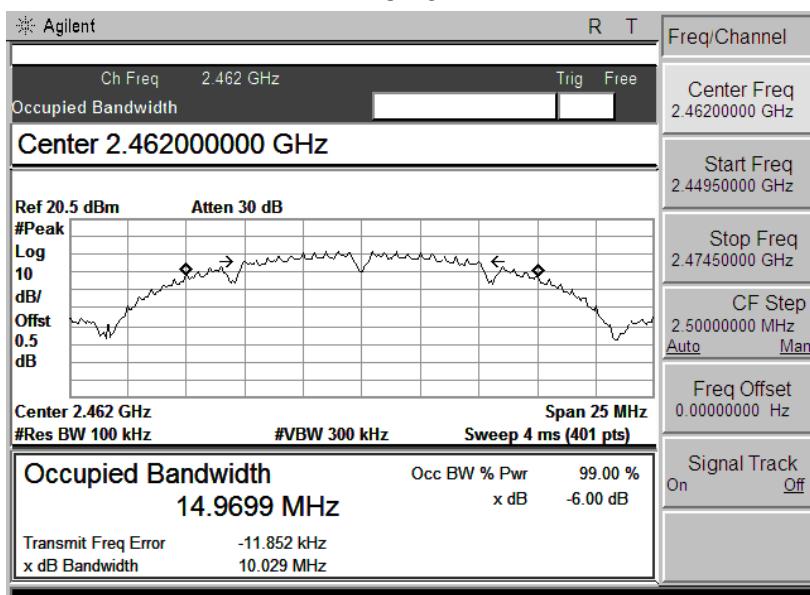**Antenna A:****802.11 b Mode****Ch 1****Ch 6****Ch 11**


## 802.11 g Mode

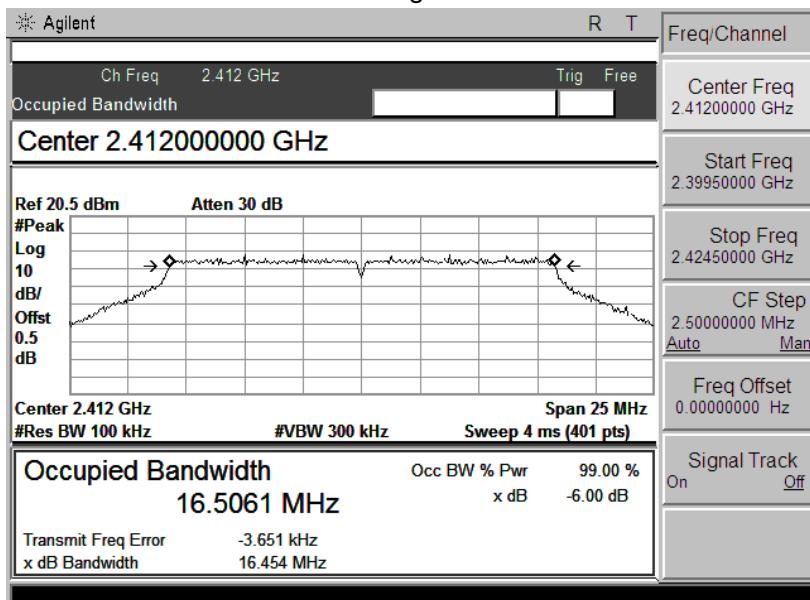

Ch 1

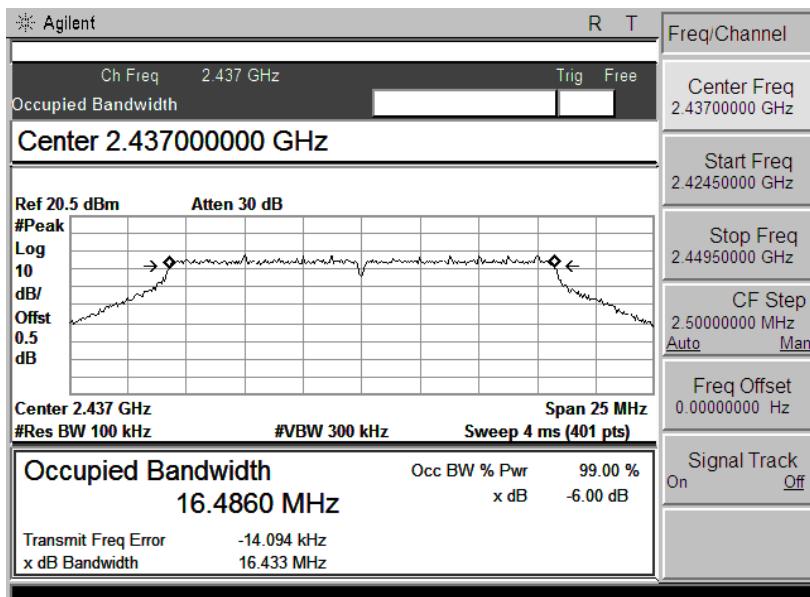


Ch 6

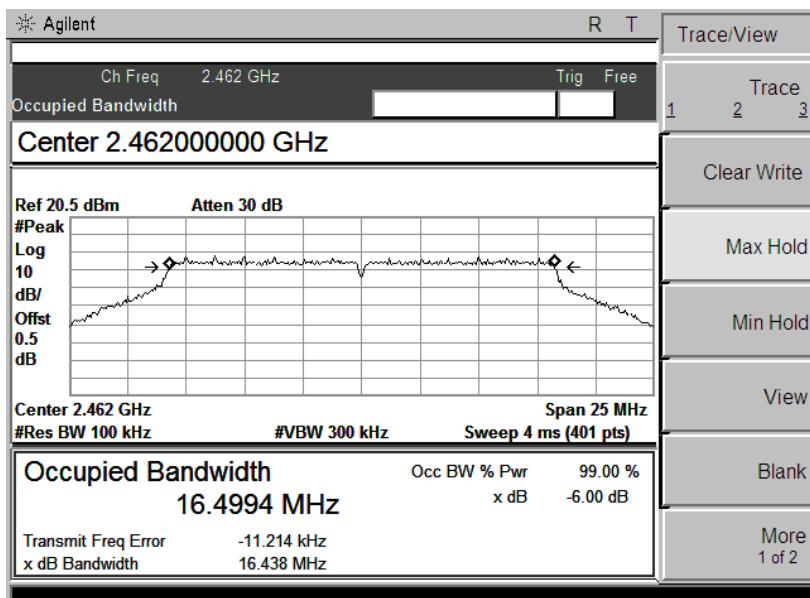


Ch 11


## 802.11 n(20M) Mode

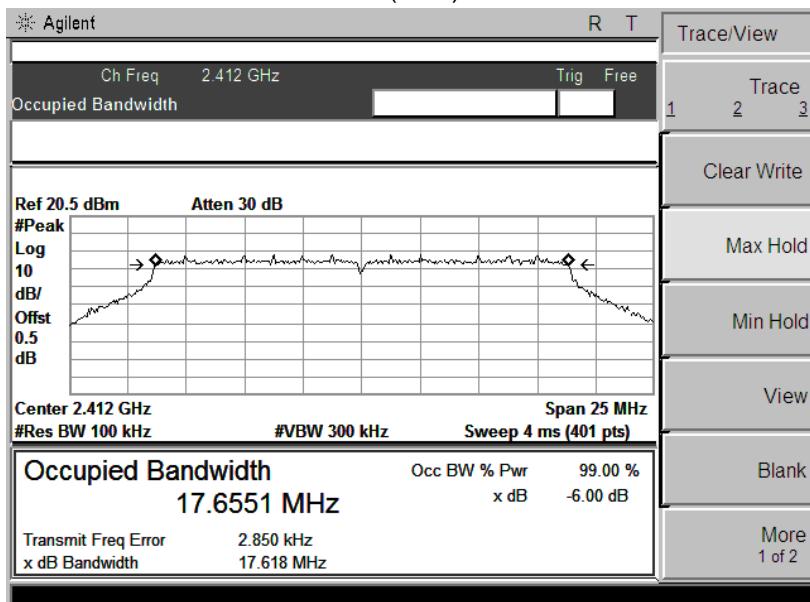

Ch 1

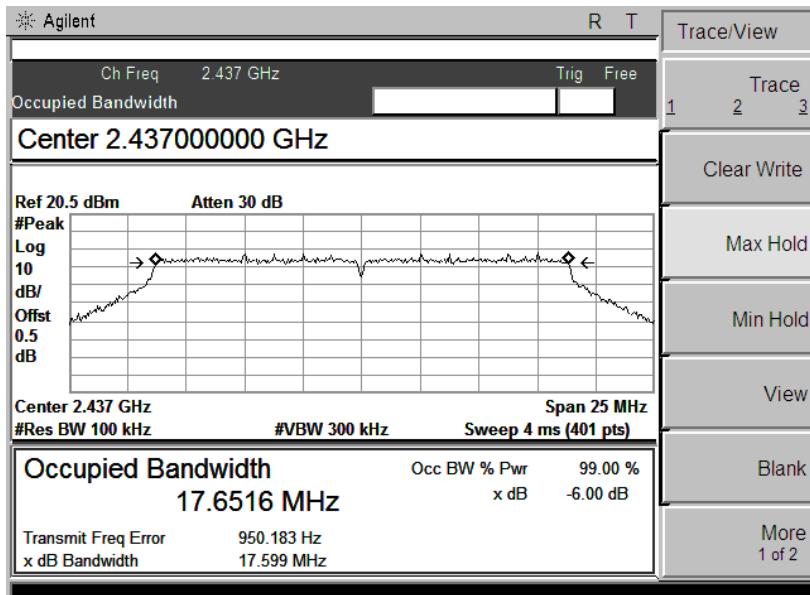


Ch 6

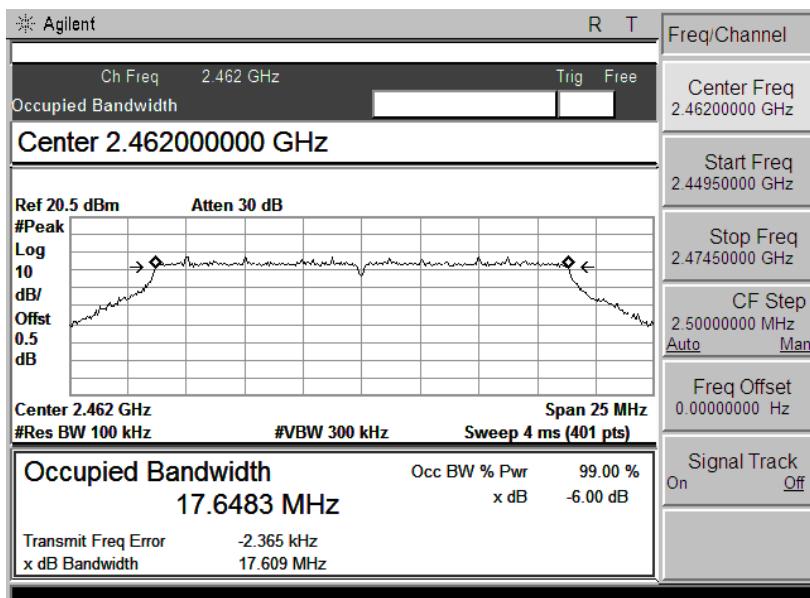


Ch 11


## 802.11 n(40M) Mode

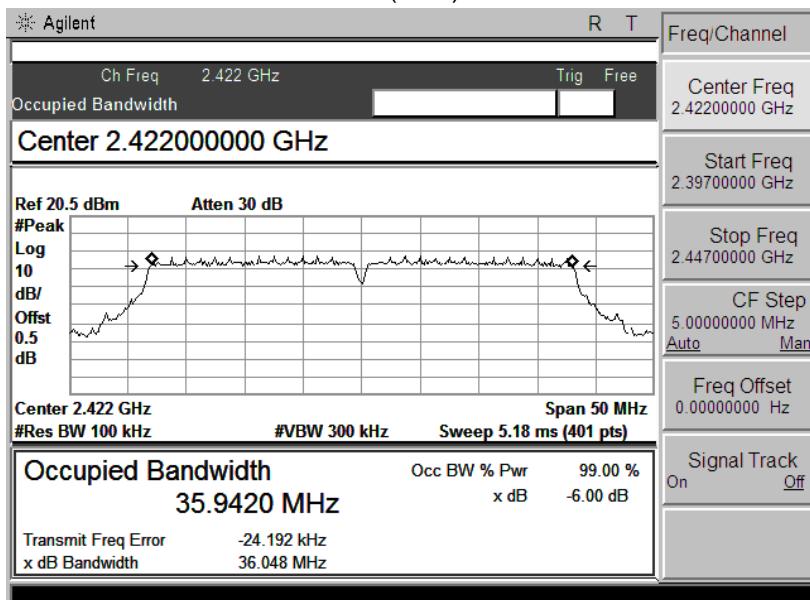


Ch 3

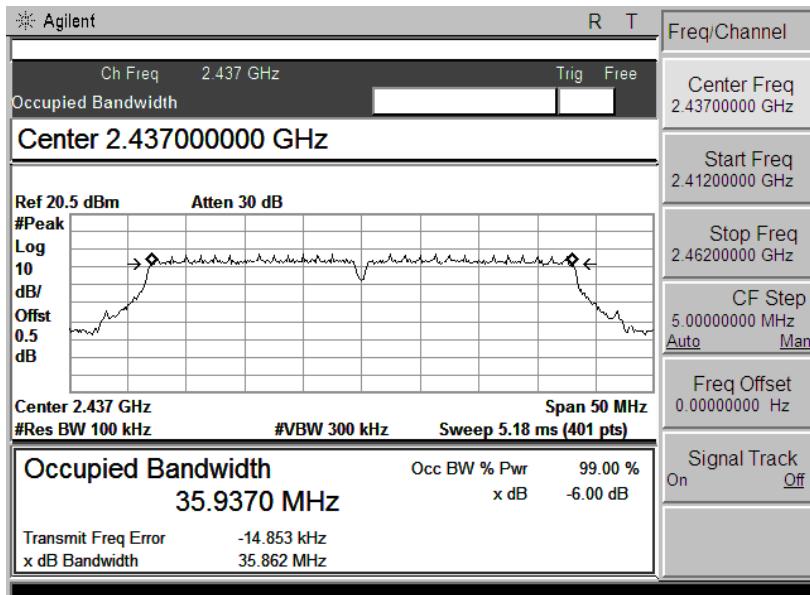


Ch 6

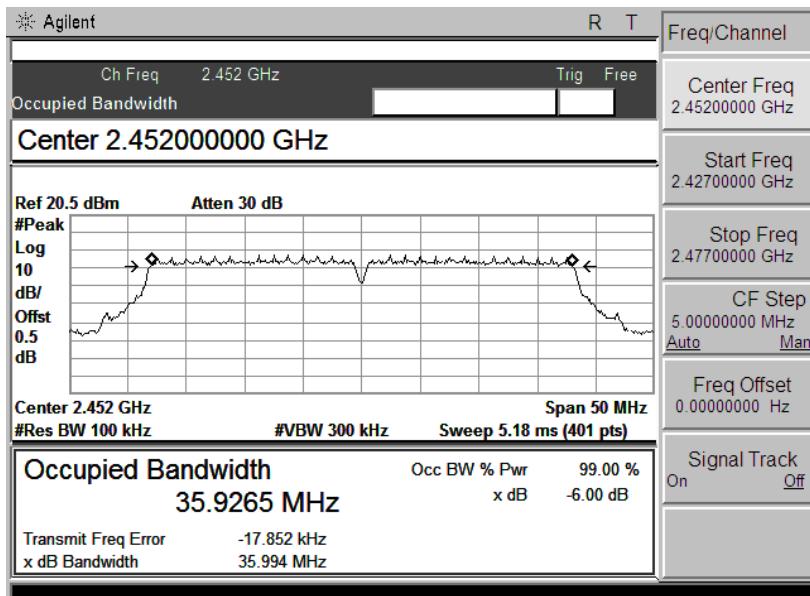


Ch 9

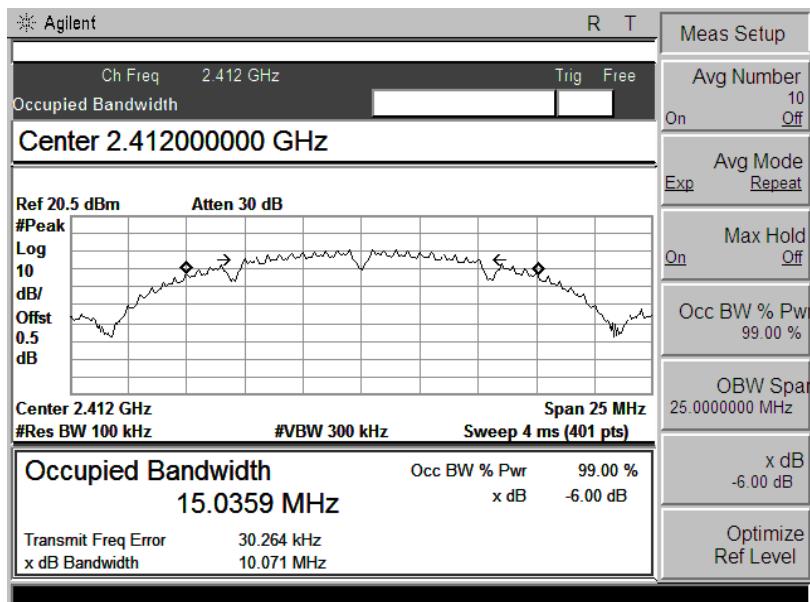**Antenna B:**

Ch 1

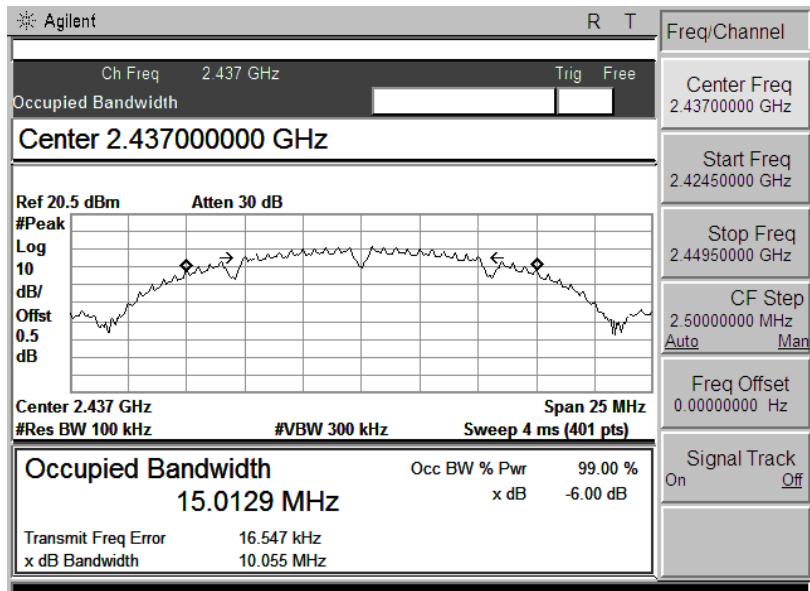


Ch 6

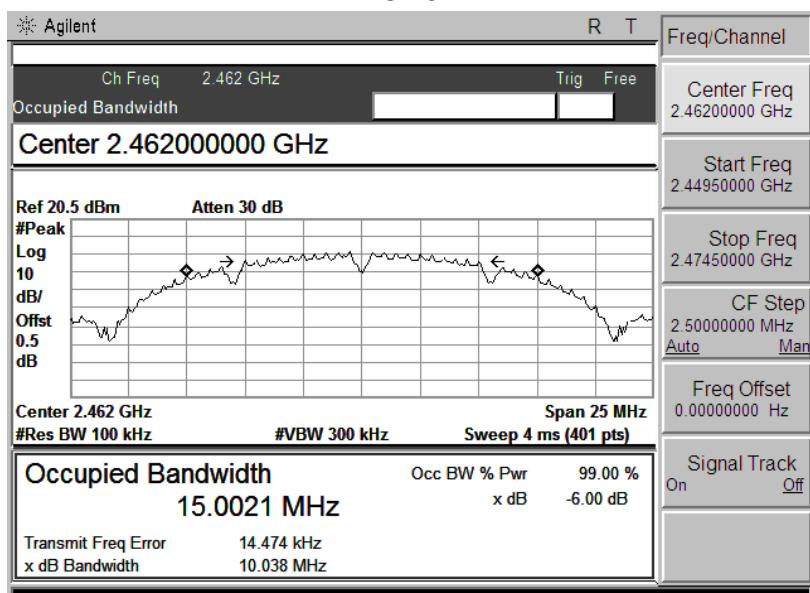


Ch 11


## 802.11 g Mode

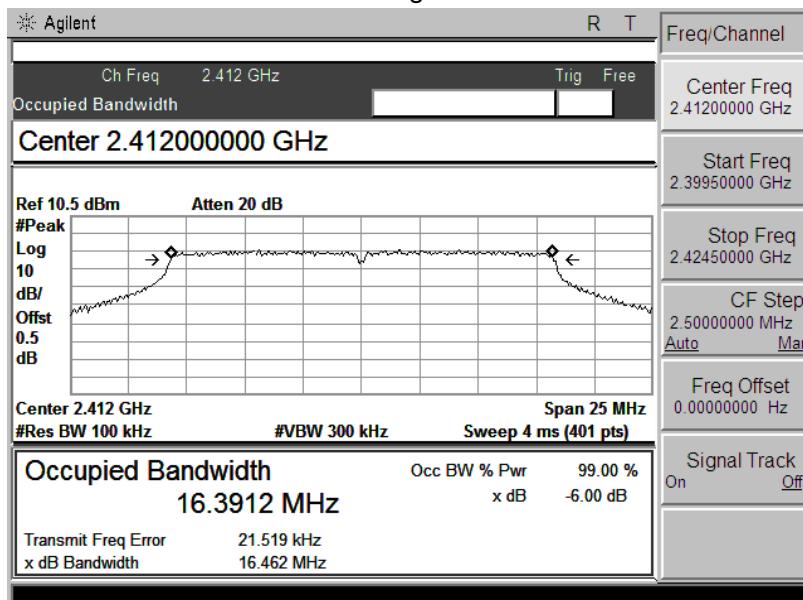

Ch 1

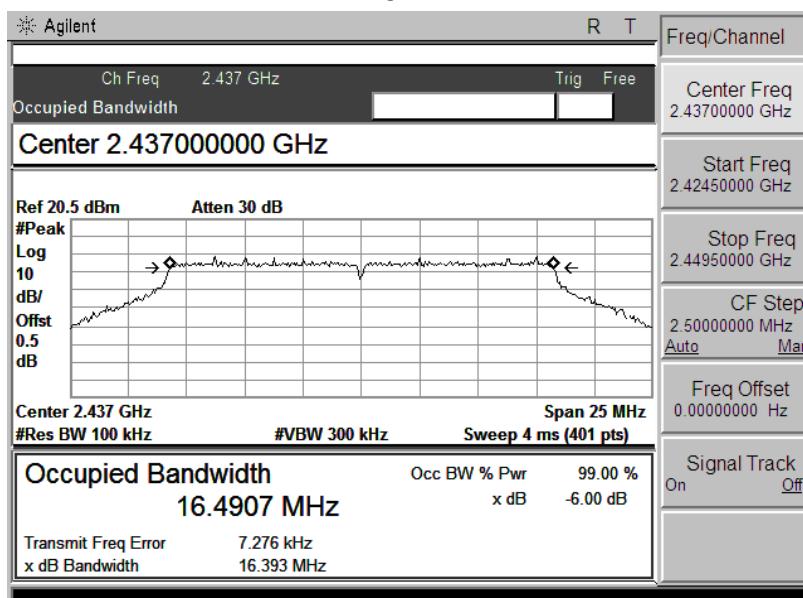


Ch 6

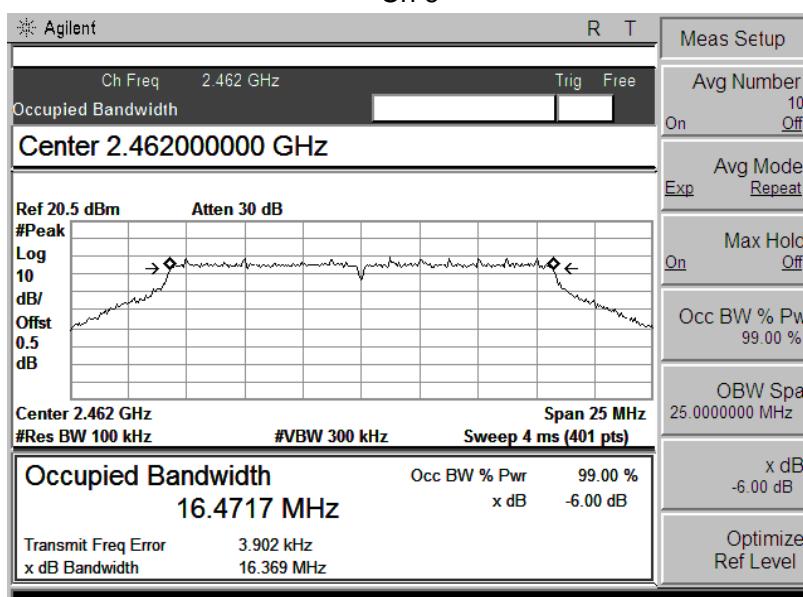


Ch 11


## 802.11 n(20M) Mode

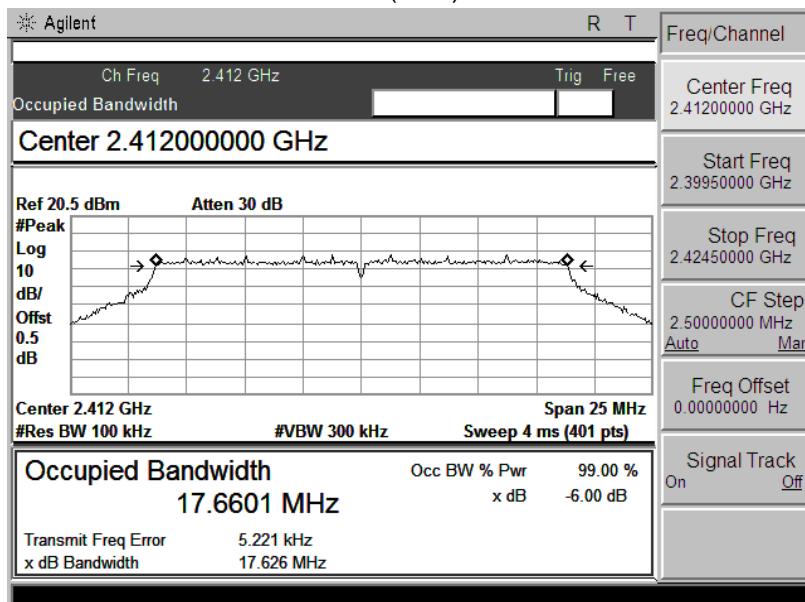

Ch 1

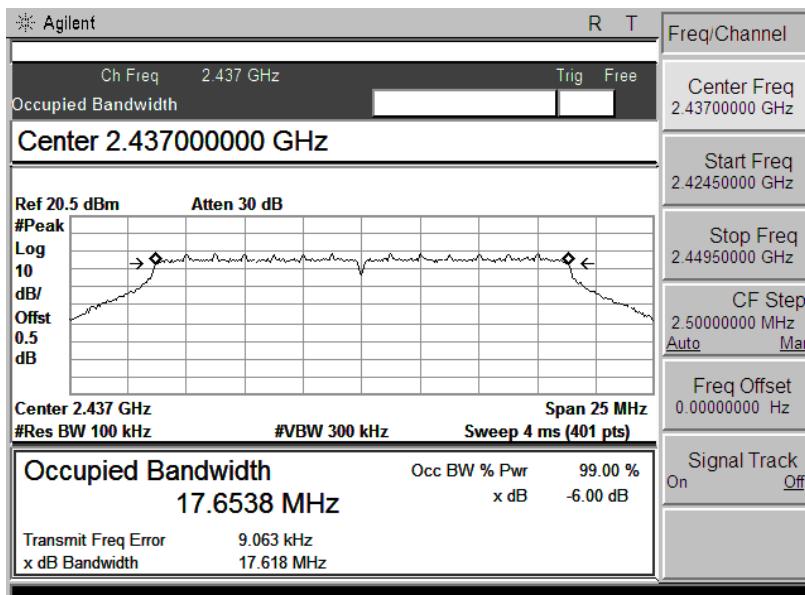


Ch 6

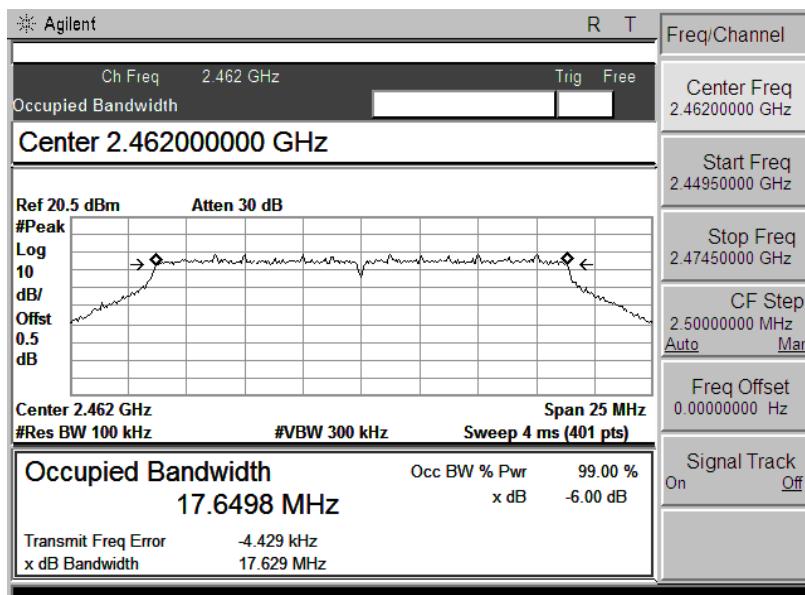


Ch 11


## 802.11 n(40M) Mode

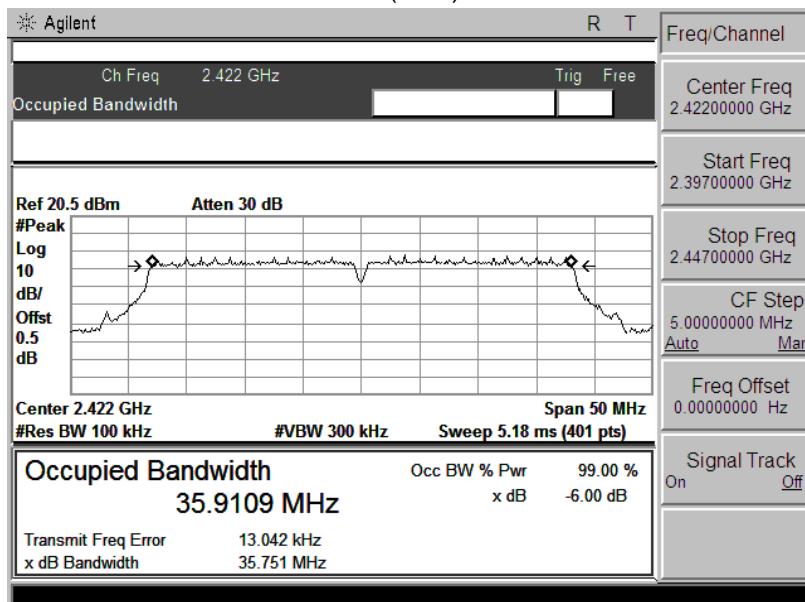

Ch 3

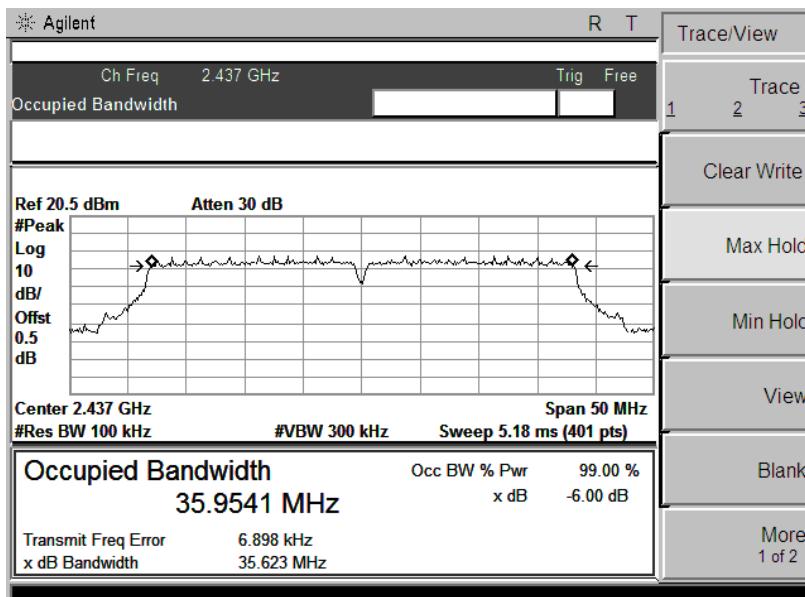

Ch 6

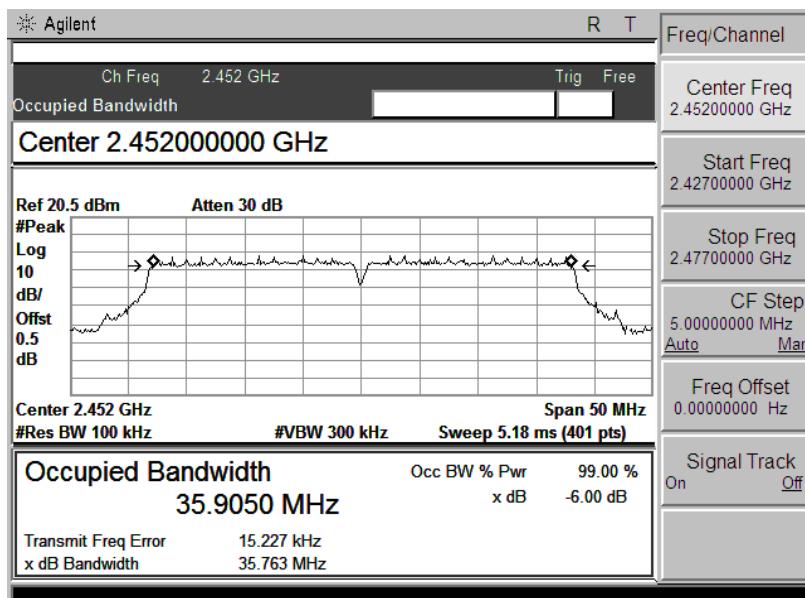

Ch 9

## 5.6 POWER SPECTRAL DENSITY

### 5.6.1 Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 5.6.2 Block Diagram of Test Setup



### 5.6.3 Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01clause10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.6.4 Test Result

<b>Test Item:</b>	POWER SPECTRAL DENSITY	<b>Temperature :</b>	20°C
<b>Test Engineer:</b>	John	<b>Relative Humidity :</b>	55%

**Antenna A:**




<b>Mode</b>	<b>Channel</b>	<b>Frequency (MHz)</b>	<b>PSD (dBm/3kHz)</b>	<b>Limit (dBm/3kHz)</b>	<b>Result</b>
802.11b	Low	2412	-10.62	≤8	Pass
	Middle	2437	-10.62	≤8	Pass
	High	2462	-11.56	≤8	Pass
802.11g	Low	2412	-14.23	≤8	Pass
	Middle	2437	-15.14	≤8	Pass
	High	2462	-15.22	≤8	Pass
802.11n (20MHz)	Low	2412	-14.46	≤8	Pass
	Middle	2437	-11.62	≤8	Pass
	High	2462	-11.92	≤8	Pass
802.11n (20MHz)	Low	2422	-16.62	≤8	Pass
	Middle	2437	-16.27	≤8	Pass
	High	2452	-15.33	≤8	Pass

**Antenna B:**

<b>Mode</b>	<b>Channel</b>	<b>Frequency (MHz)</b>	<b>PSD (dBm/100kHz)</b>	<b>Limit (dBm/100kHz)</b>	<b>Result</b>
802.11b	Low	2412	-10.42	≤8	Pass
	Middle	2437	-10.75	≤8	Pass
	High	2462	-8.807	≤8	Pass
802.11g	Low	2412	-14.28	≤8	Pass
	Middle	2437	-13.76	≤8	Pass
	High	2462	-13.75	≤8	Pass
802.11n (20MHz)	Low	2412	-14.55	≤8	Pass
	Middle	2437	-12.85	≤8	Pass
	High	2462	-14.19	≤8	Pass
802.11n (20MHz)	Low	2422	-15.74	≤8	Pass
	Middle	2437	-17.16	≤8	Pass
	High	2452	-14.62	≤8	Pass


## Antenna A:

802.11 b Mode

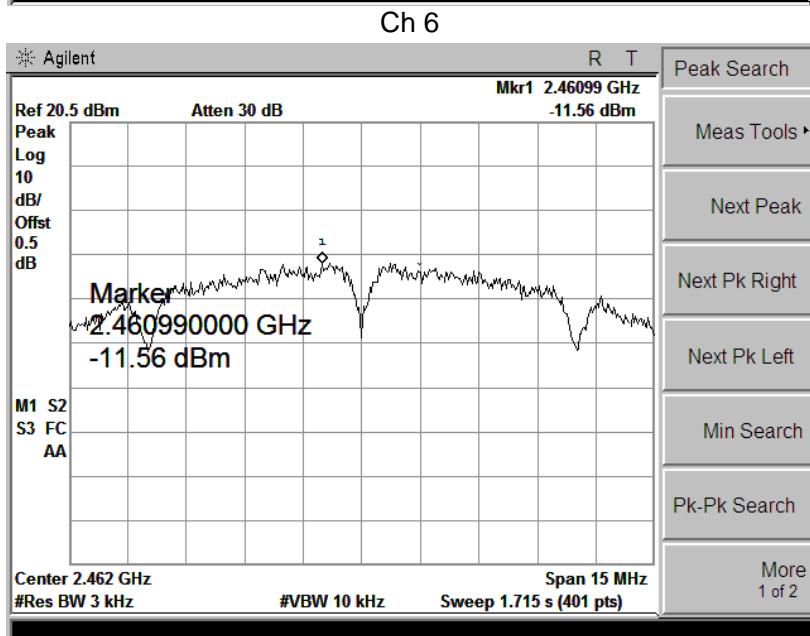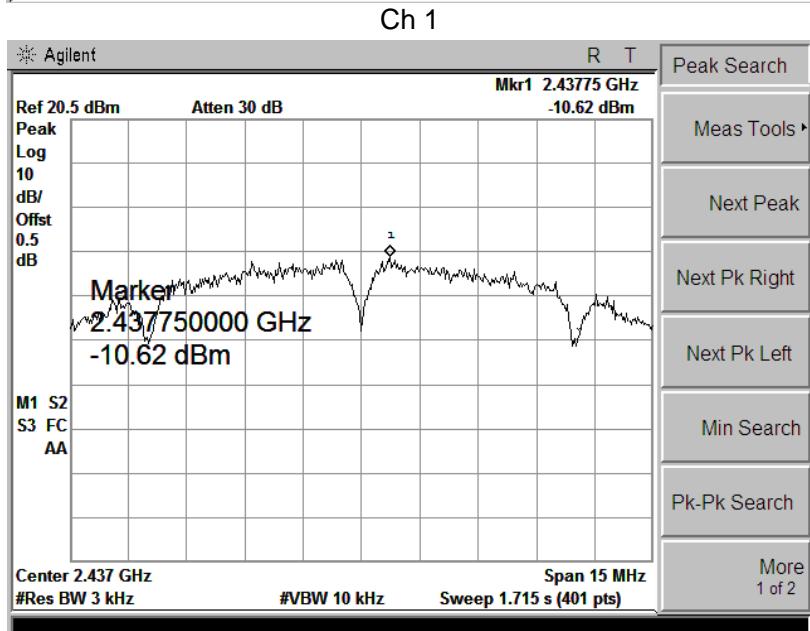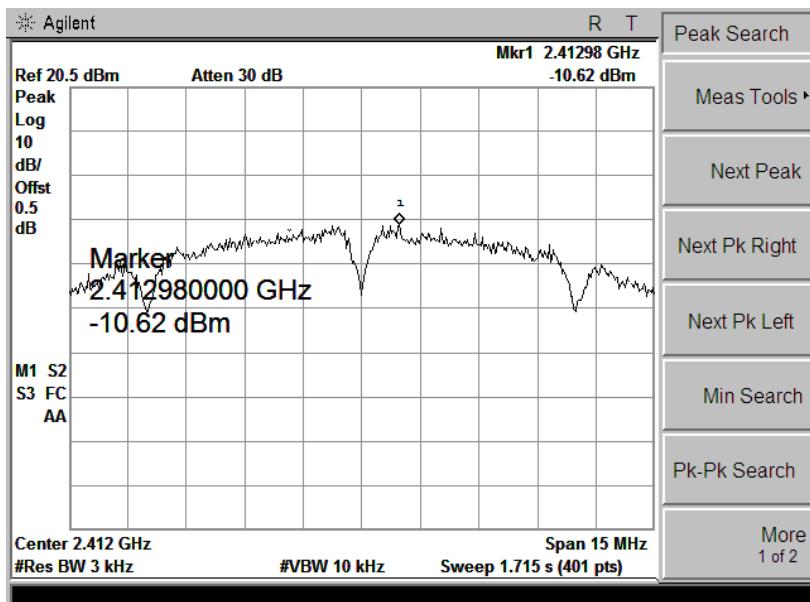


Ch 11


## 802.11 g Mode

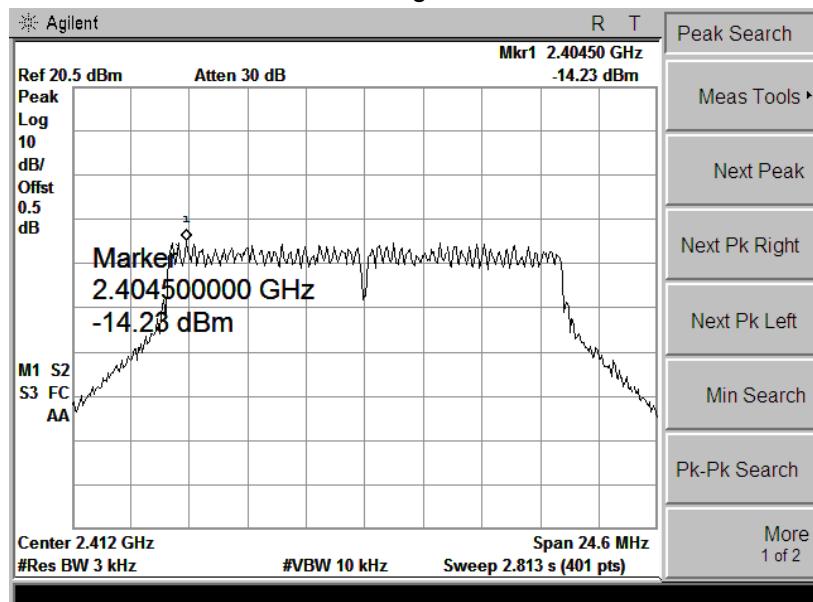

Ch 1



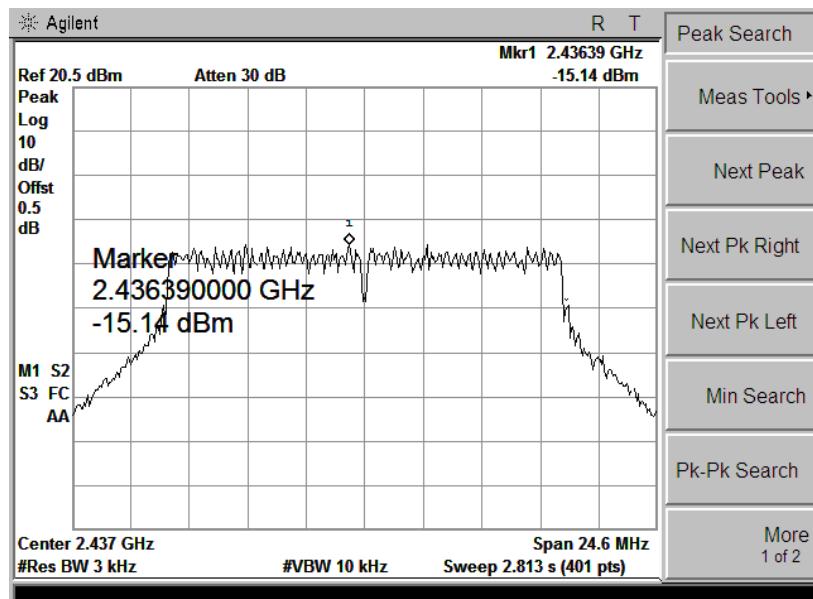


Ch 6

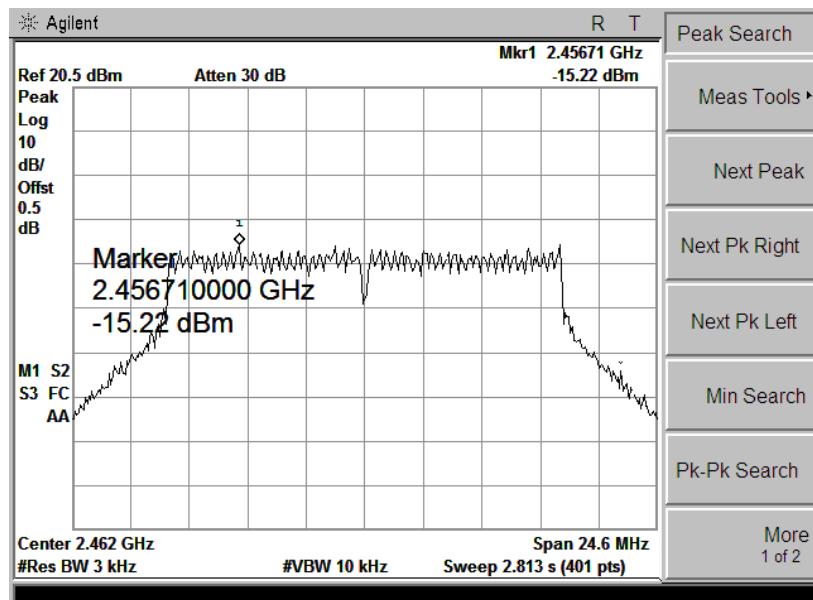


Ch 11


## 802.11 n(20M) Mode

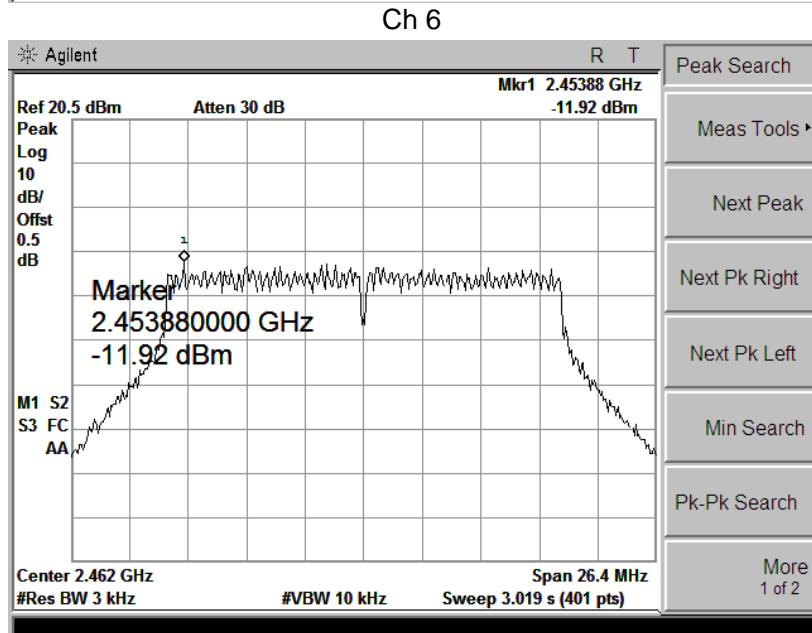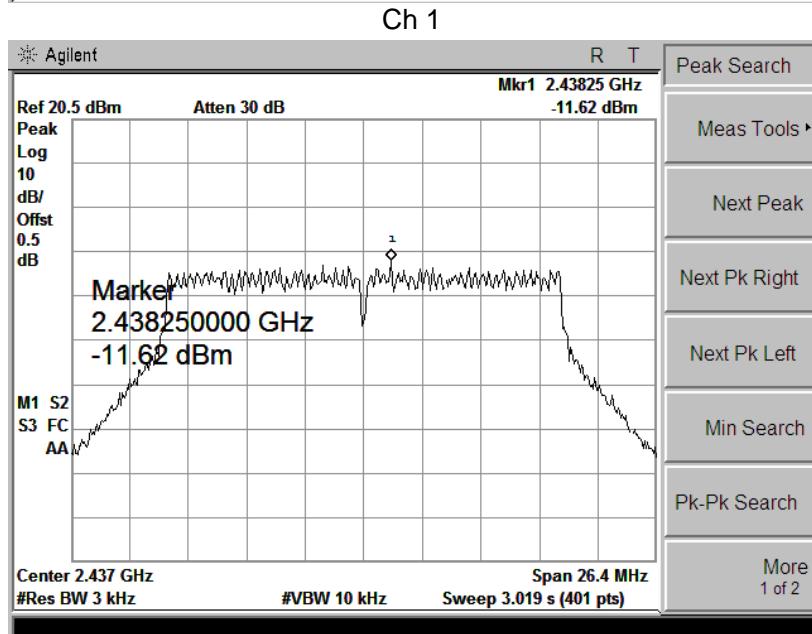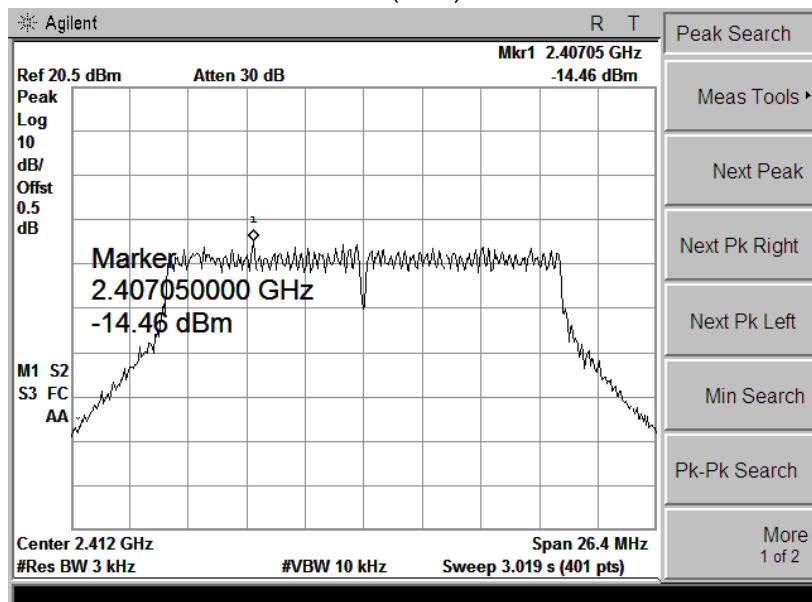


## 802.11 n(40M) Mode

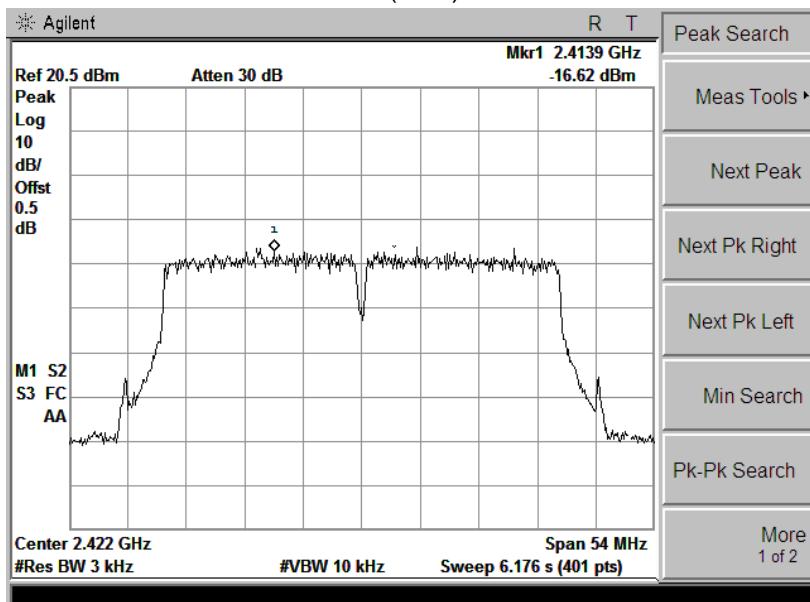

Ch 1

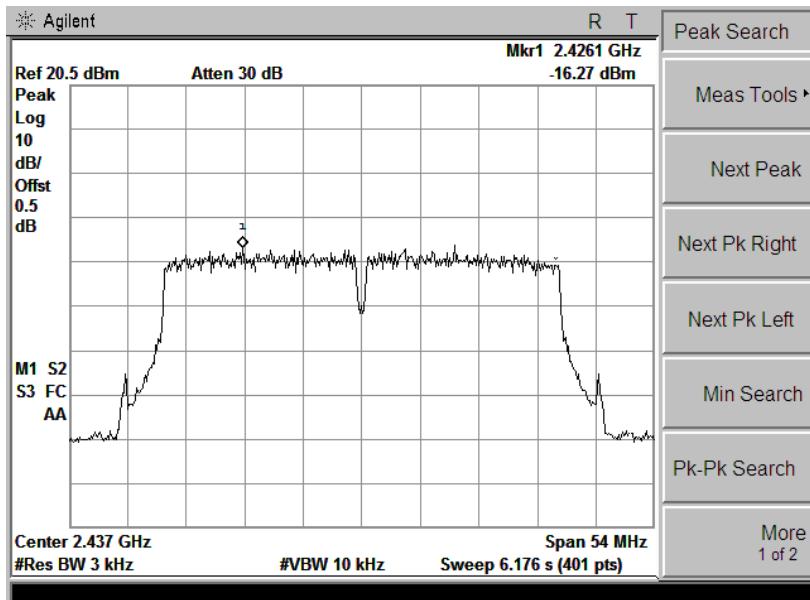




Ch 6

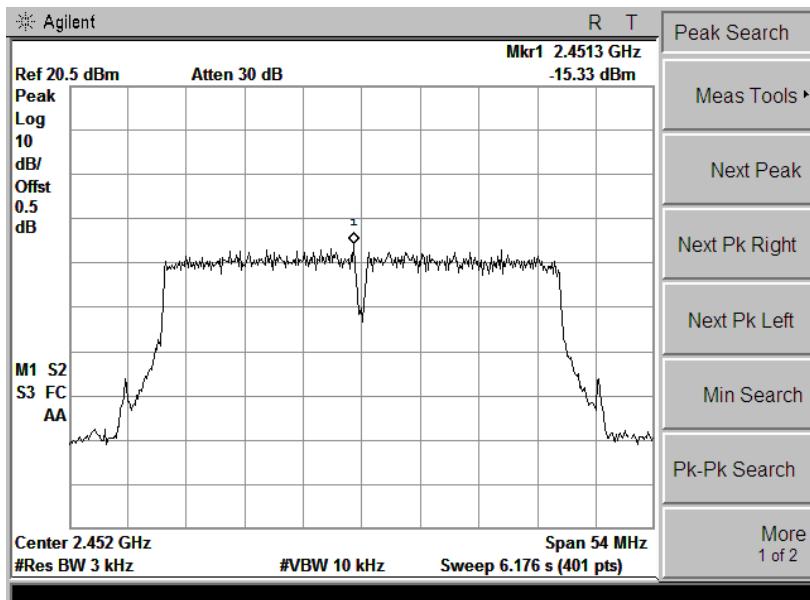

Ch 9


## Antenna B:

802.11 b Mode

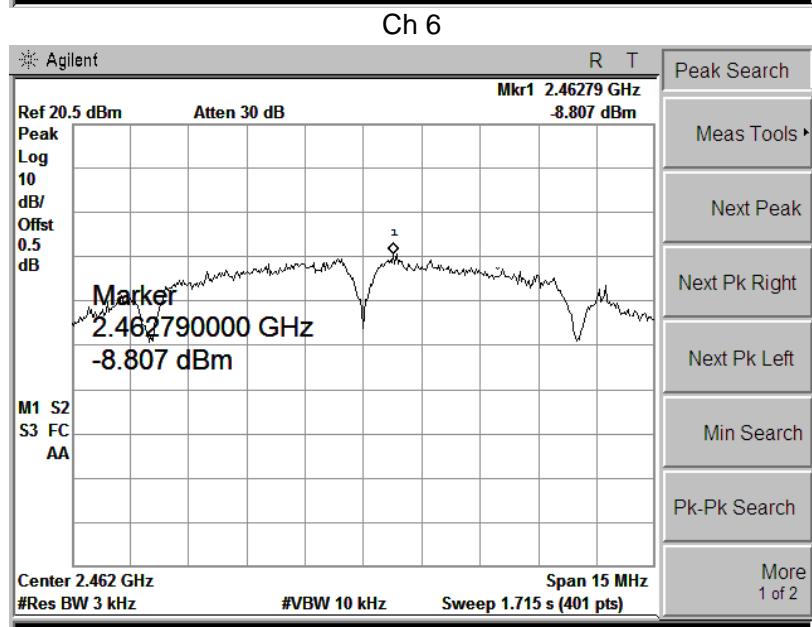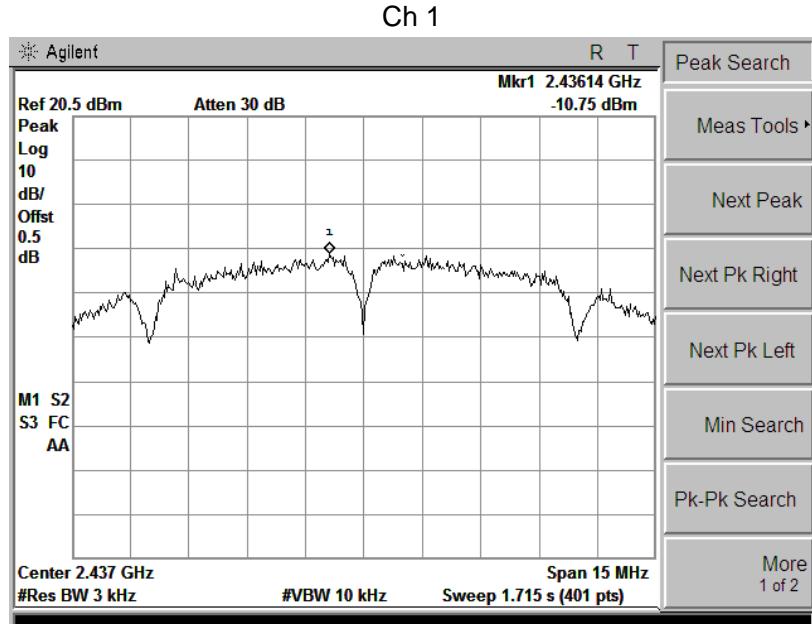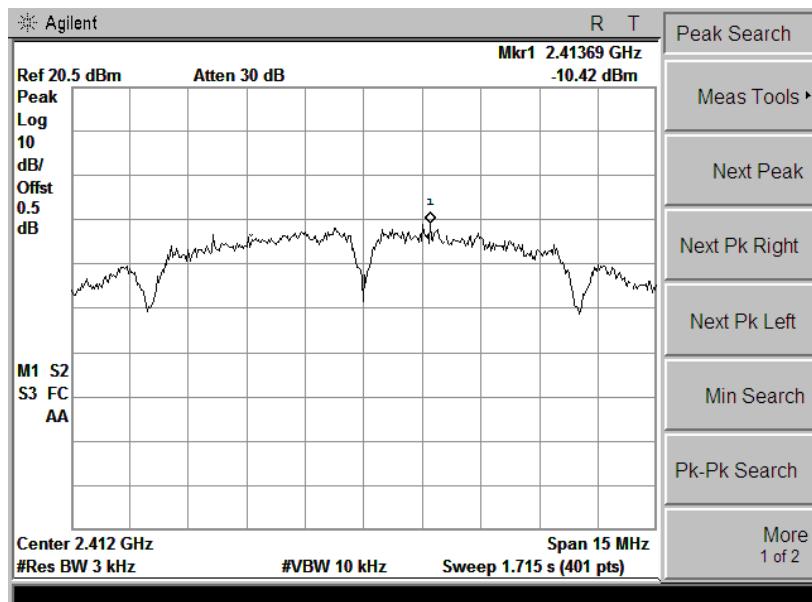


Ch 11


## 802.11 g Mode

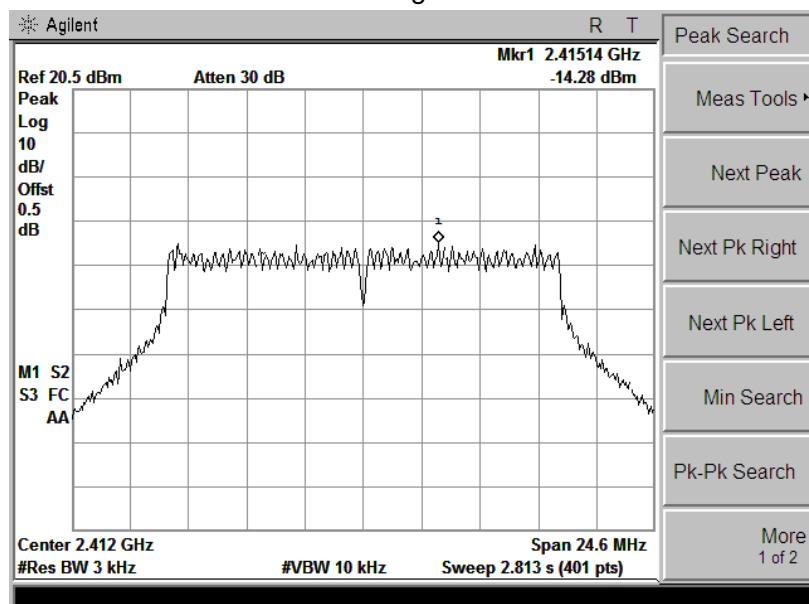

Ch 1

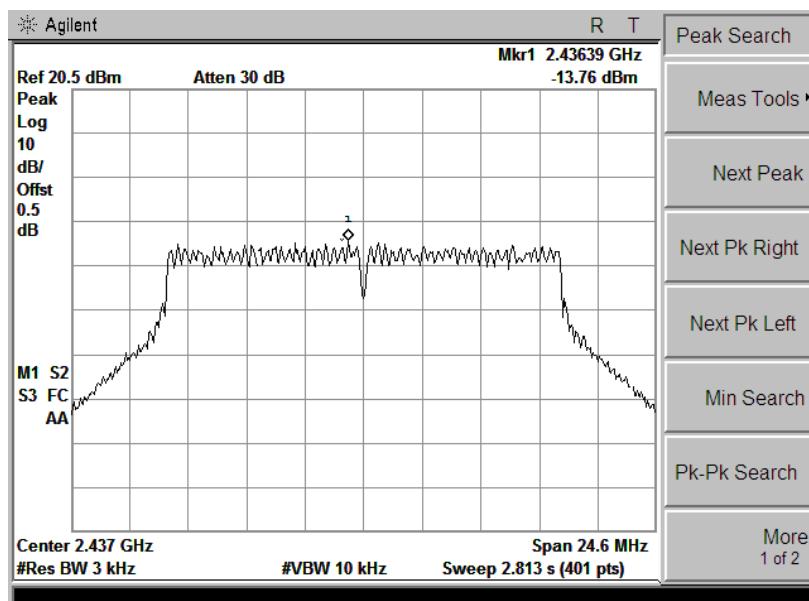


Ch 6

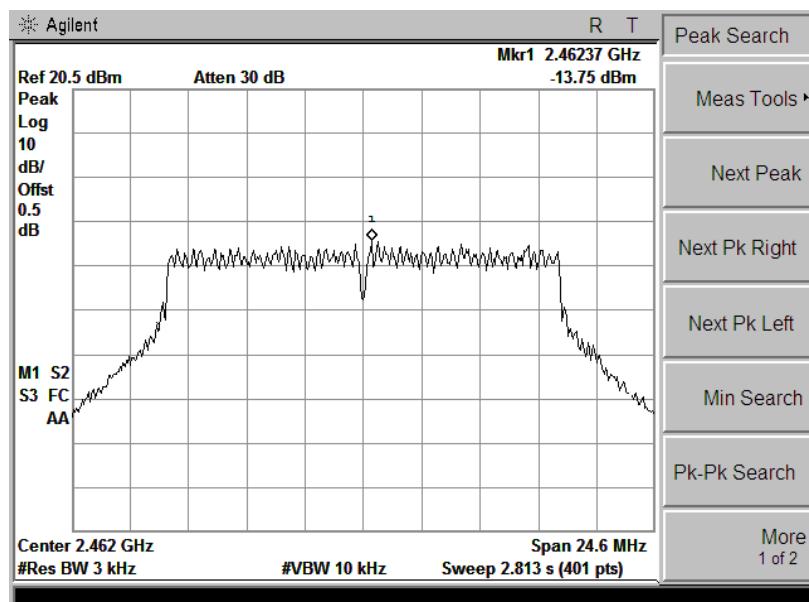


Ch 11


## 802.11 n(20M) Mode

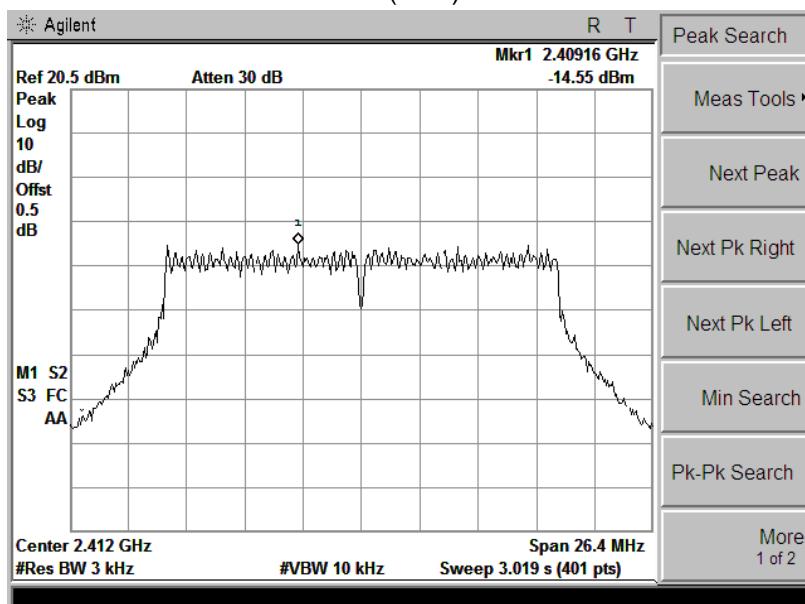

Ch 1



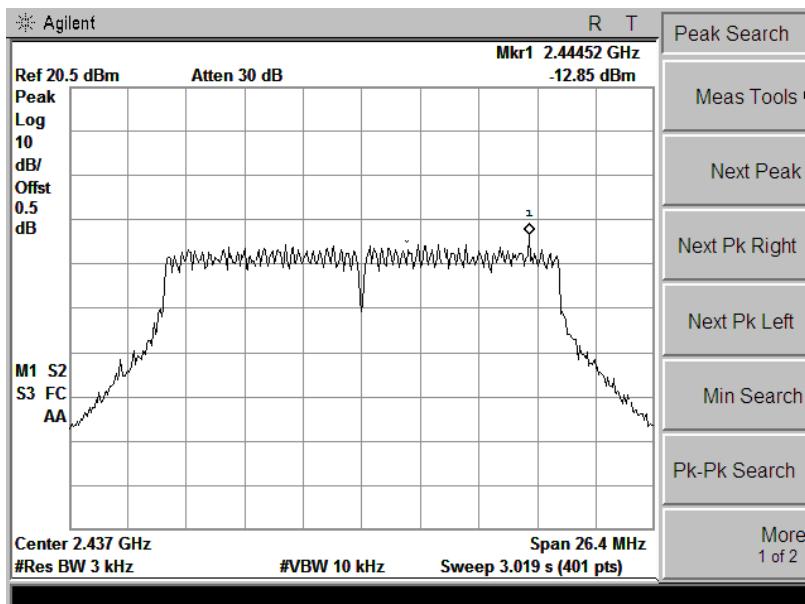


Ch 6

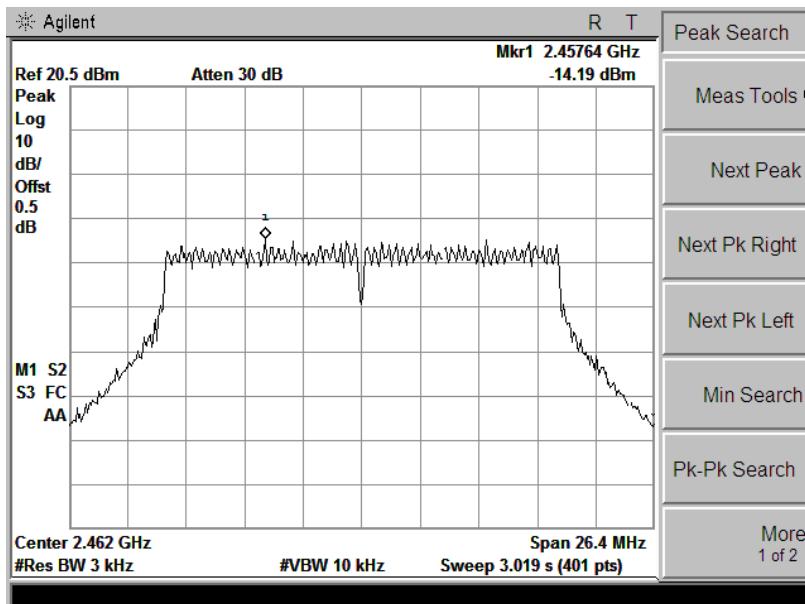

Ch 11

## 802.11 n(40M) Mode

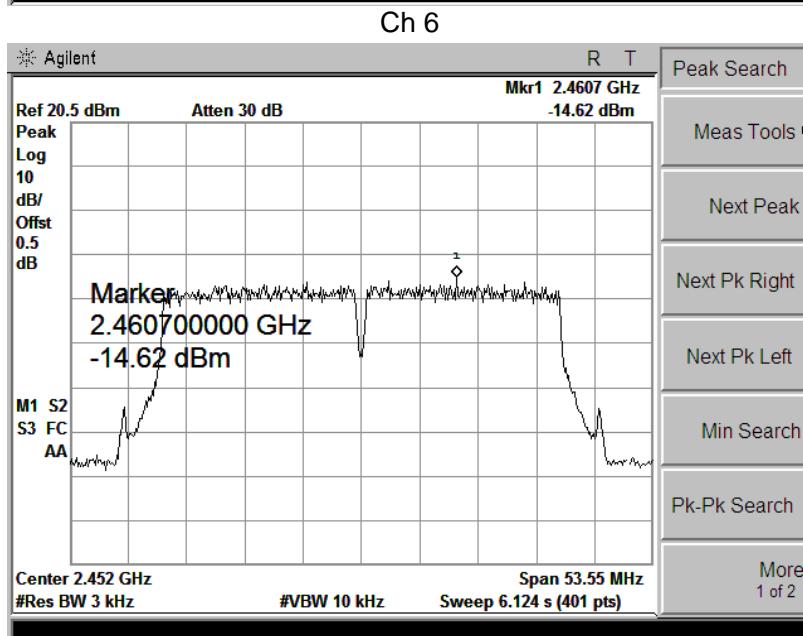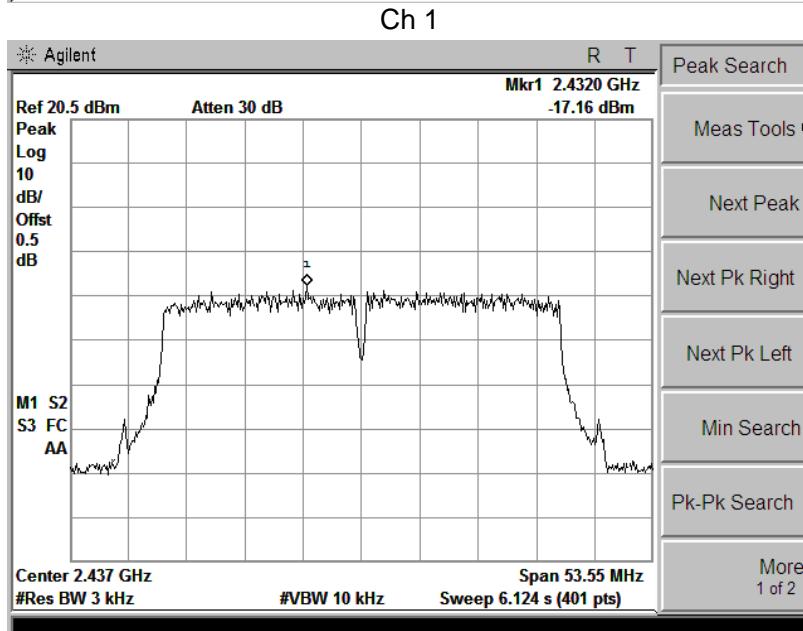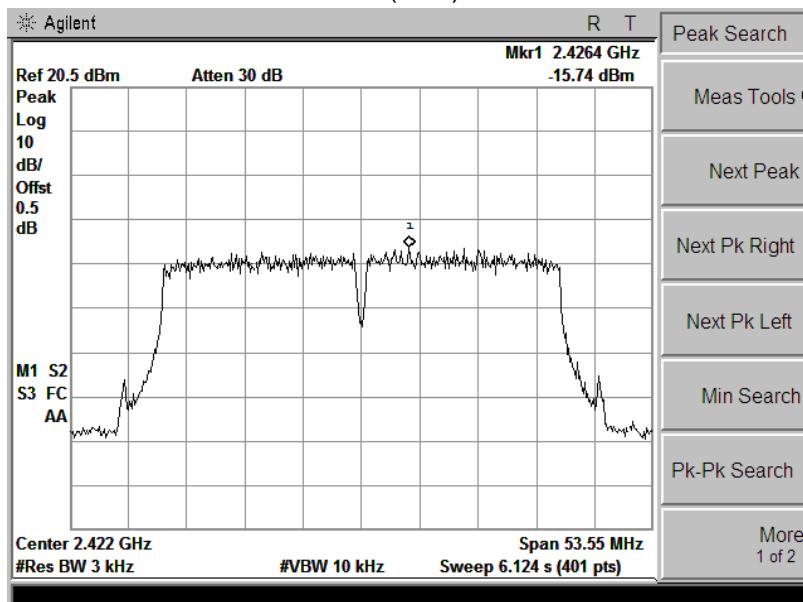

Ch 9

## 5.7 Band Edge and Conducted Spurious Emissions

### 5.8.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### 5.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 5.7.3 Test Result


Pass

#### Remark:


During the Conducted Spurious Emissions test, pre-scan the 802.11b, 802.11g, 802.11n(20/40)modulation, and found the 802.11b modulation which it is worse case.

<b>Test Item:</b>	Band Edge	<b>Temperature :</b>	23°C
<b>Test Engineer:</b>	John	<b>Relative Humidity :</b>	65%

## Antenna A:

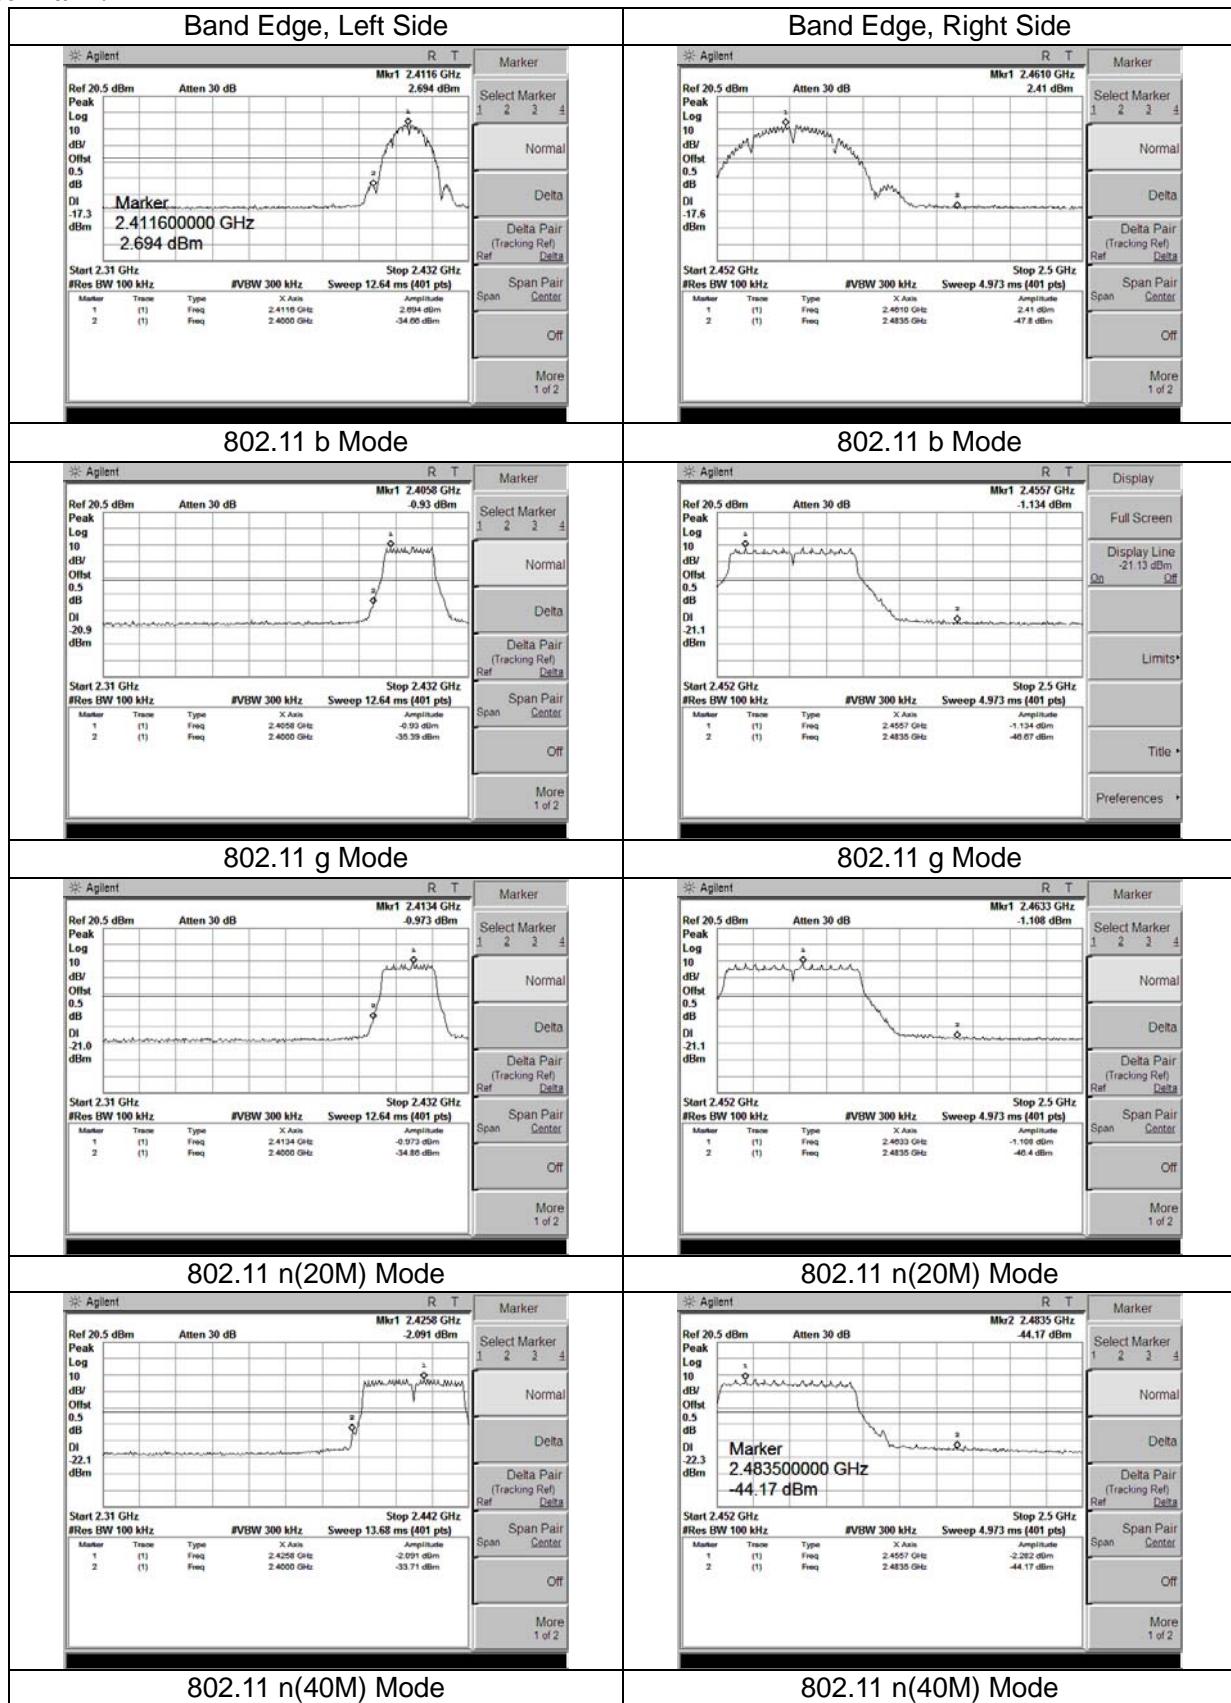


## Antenna B:

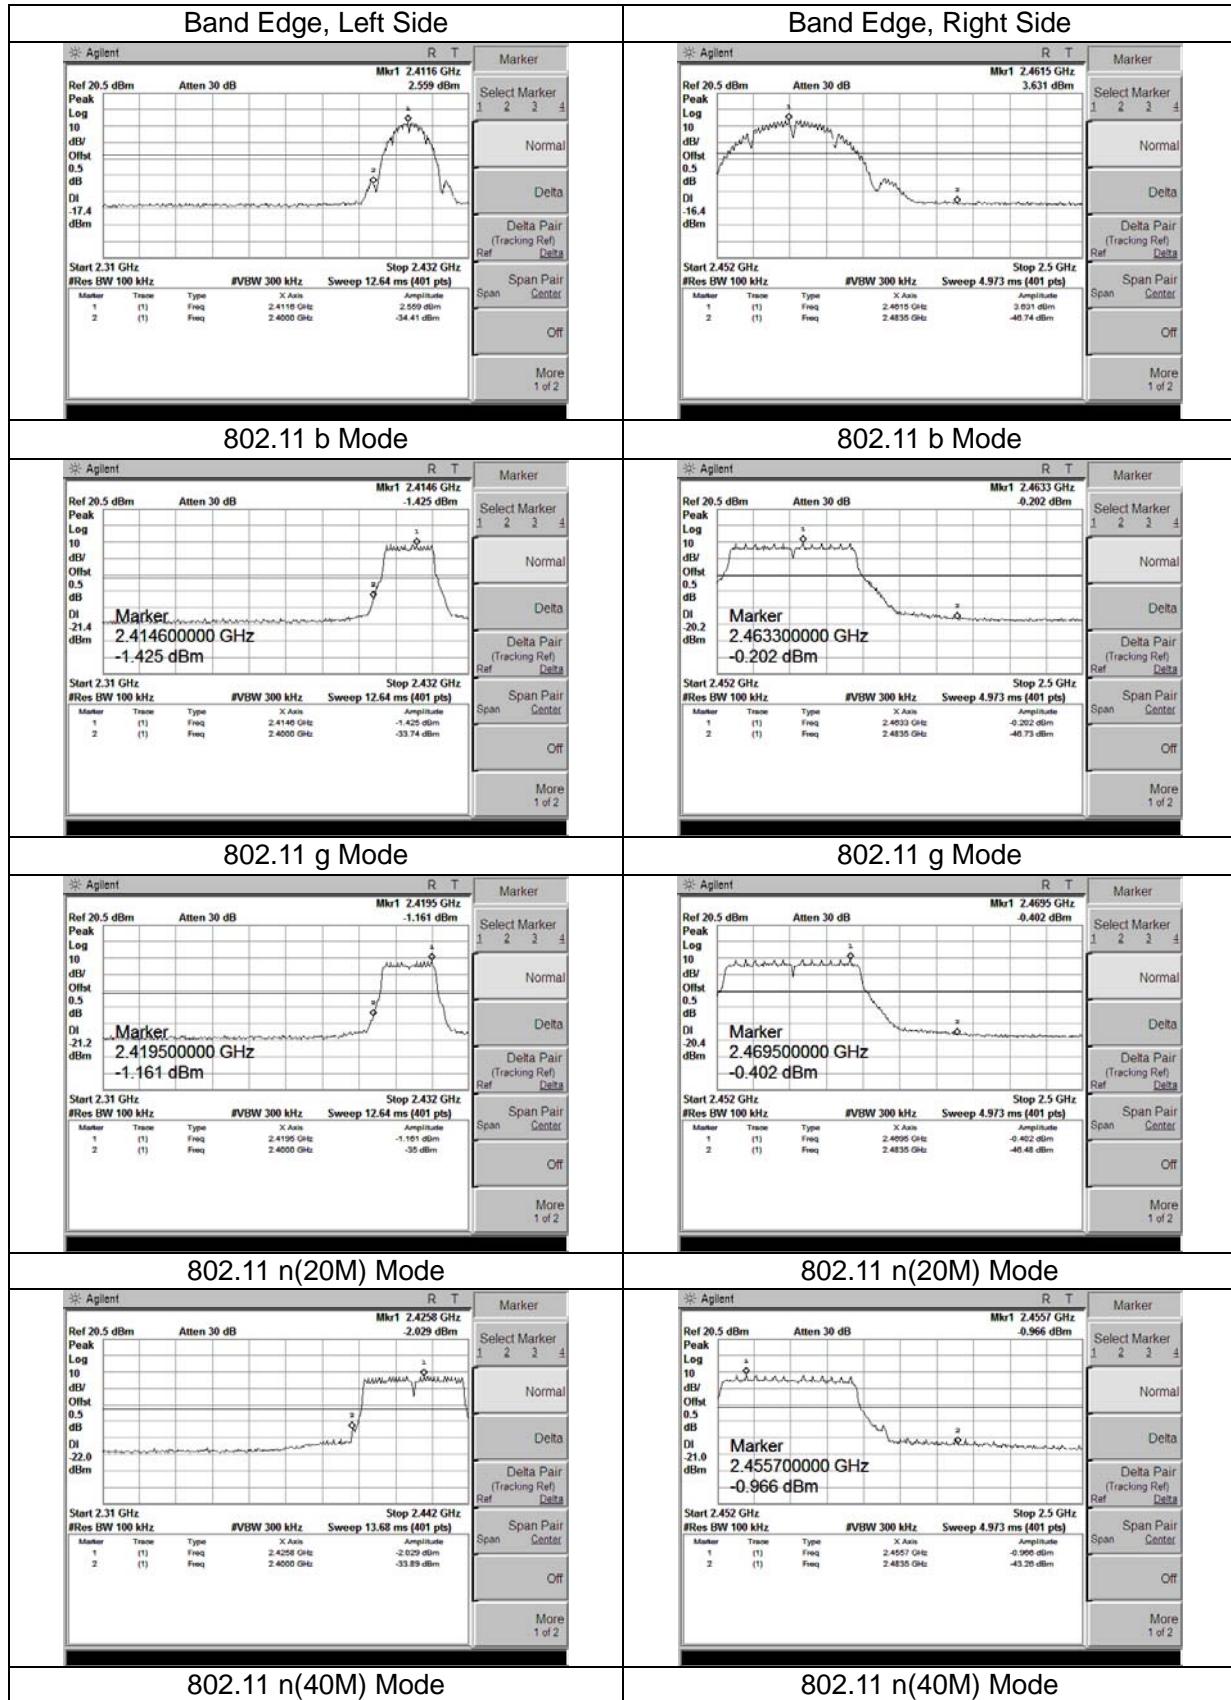

## Antenna A:

## Conducted Spurious Emissions

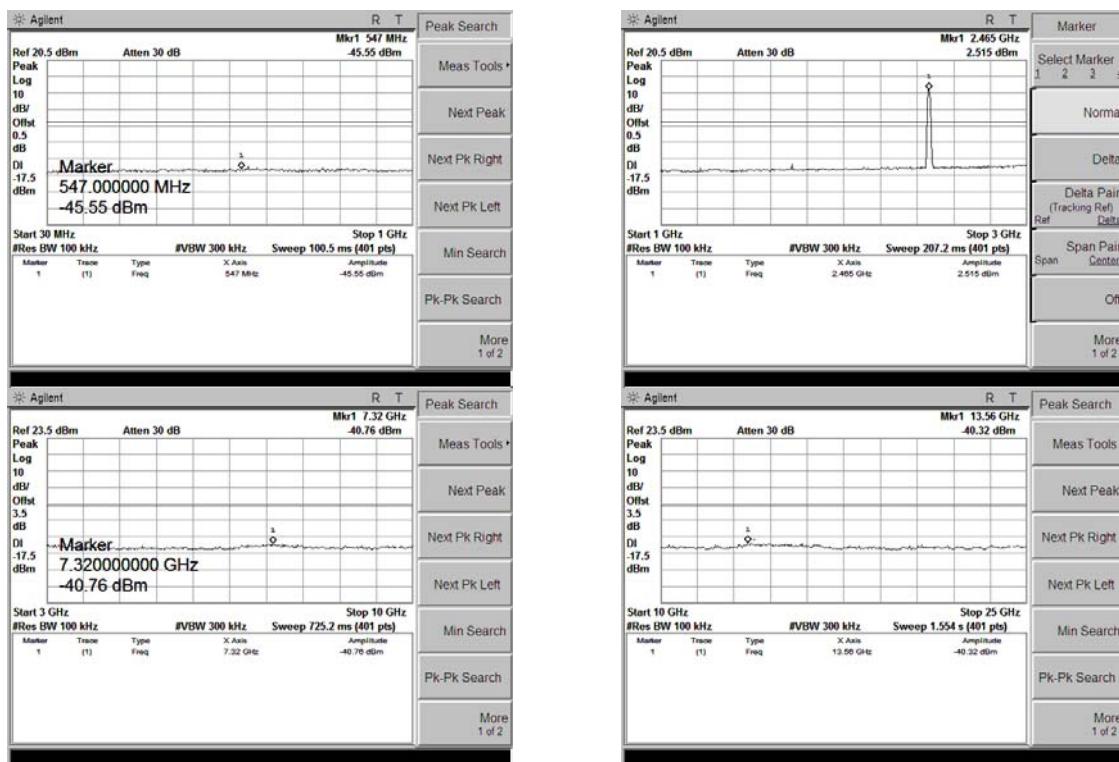

802.11b Mode, Ch1



802.11b Mode, Ch6

## Conducted Spurious Emissions




802.11b Mode, Ch11

## Antenna B:

## Conducted Spurious Emissions




802.11b Mode, Ch1

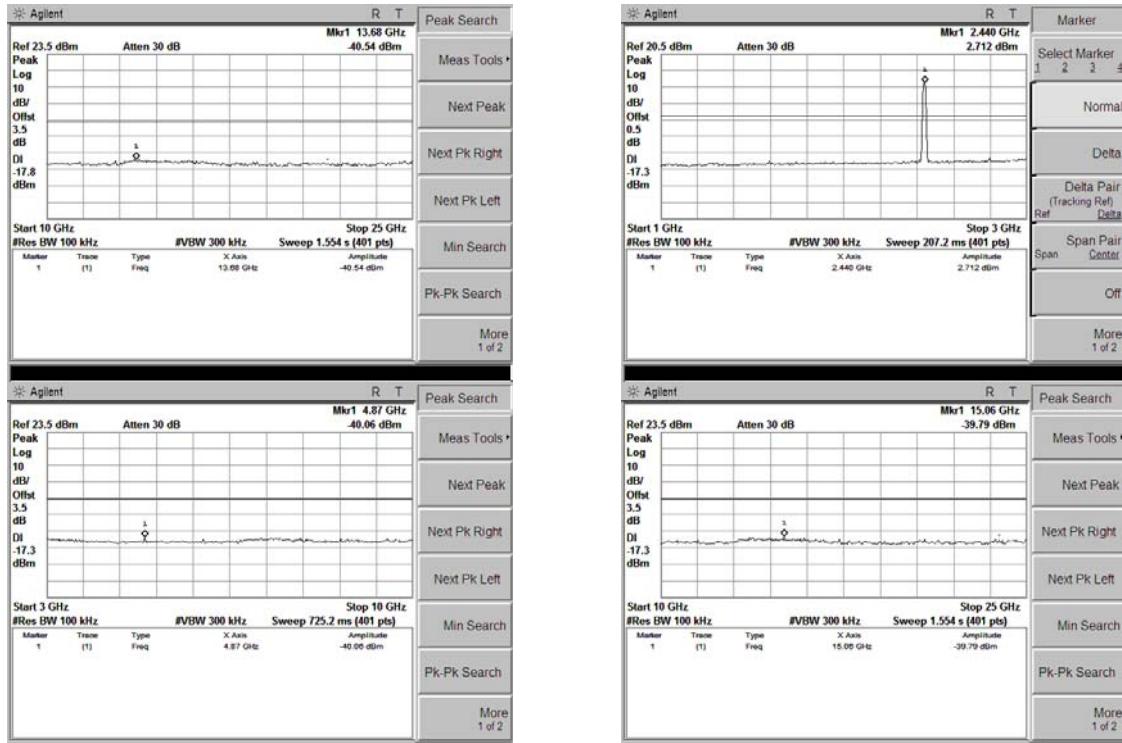

802.11b Mode, Ch6

## Conducted Spurious Emissions

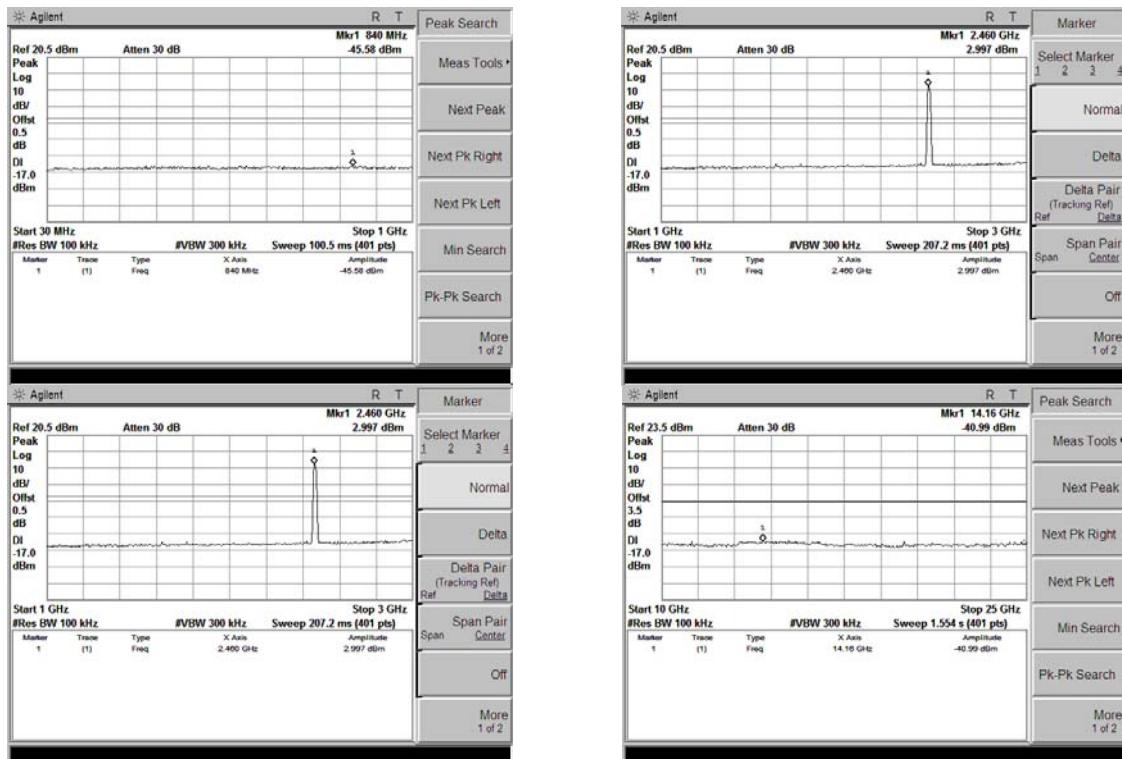

802.11b Mode, Ch11


## 5.8 Restricted Frequency Bands

### 5.9.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.8.2 Test Configuration

#### Test Setup:

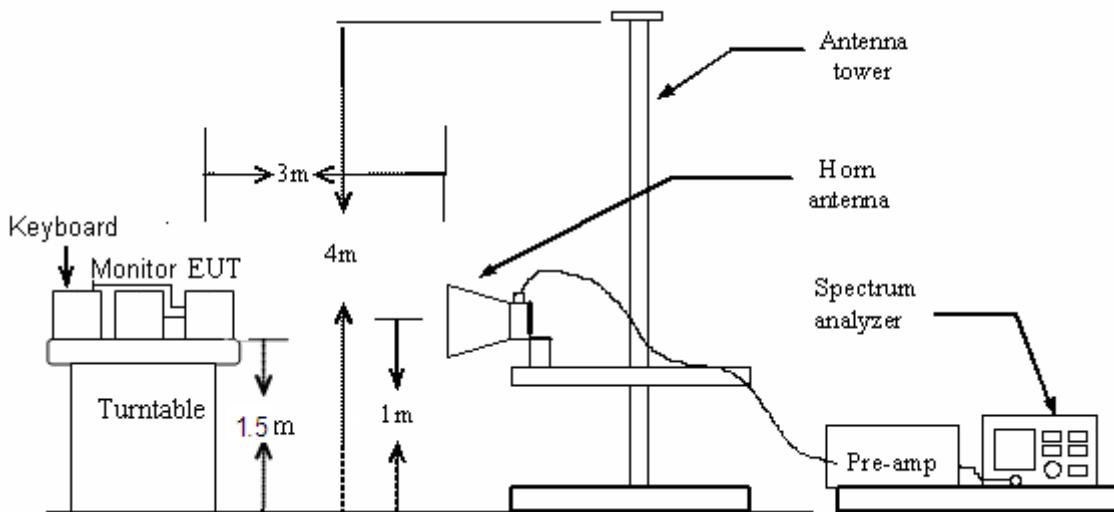

### 5.8.3 Test Procedure:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.

### 5.8.4 Test Result

Pass


Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following plots.

**Antenna A:**

<b>EUT:</b>	Tmall TV	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	802.11b-CH1	<b>Phase:</b>	<b>Vertical</b>
<b>Test by:</b>	John	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C / 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>


106.0 dBuV/m

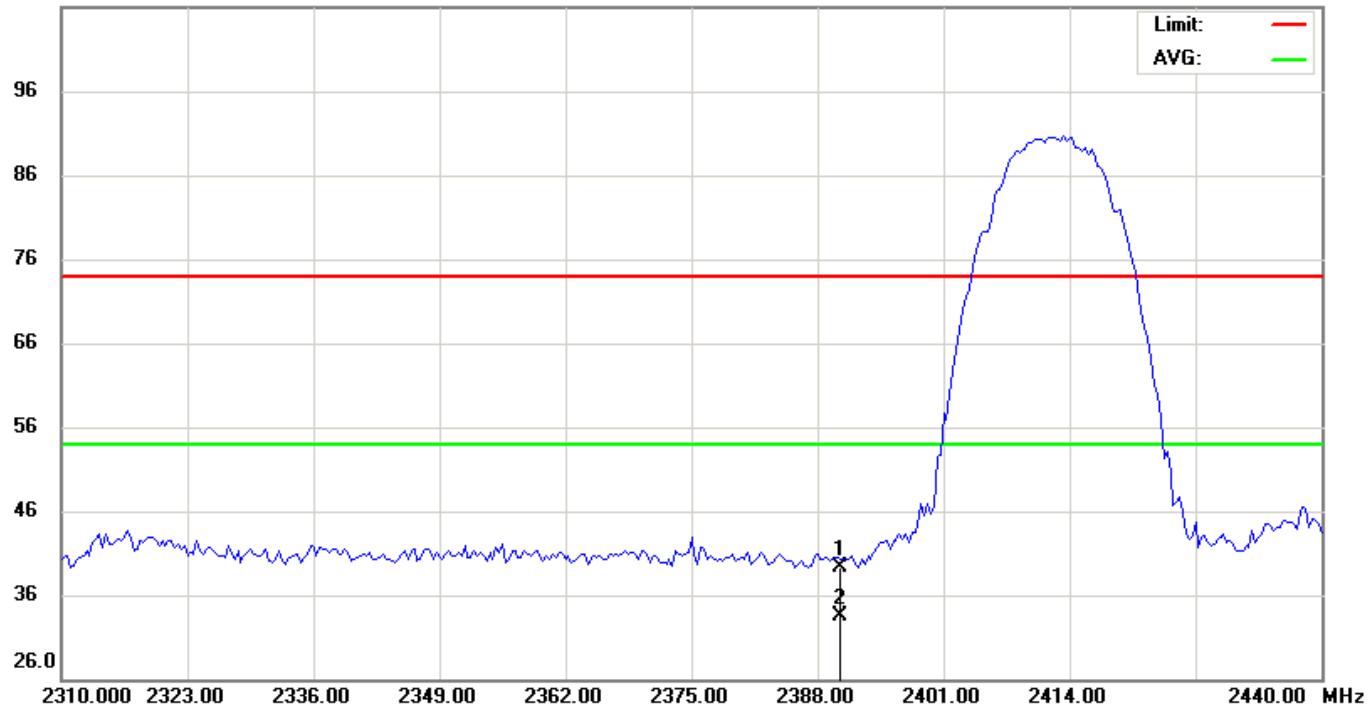

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2390.000	47.68	-8.43	39.25	74.00	-34.75	peak			
2	*	2390.000	41.94	-8.43	33.51	54.00	-20.49	AVG			

\*:Maximum data   x:Over limit   !:over margin


EUT:	Tmall TV	M/N:	M16I
Mode:	802.11b-CH1	Phase:	Horizontal
Test by:	John	Power:	DC 5.2V by Adapter
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-05-07

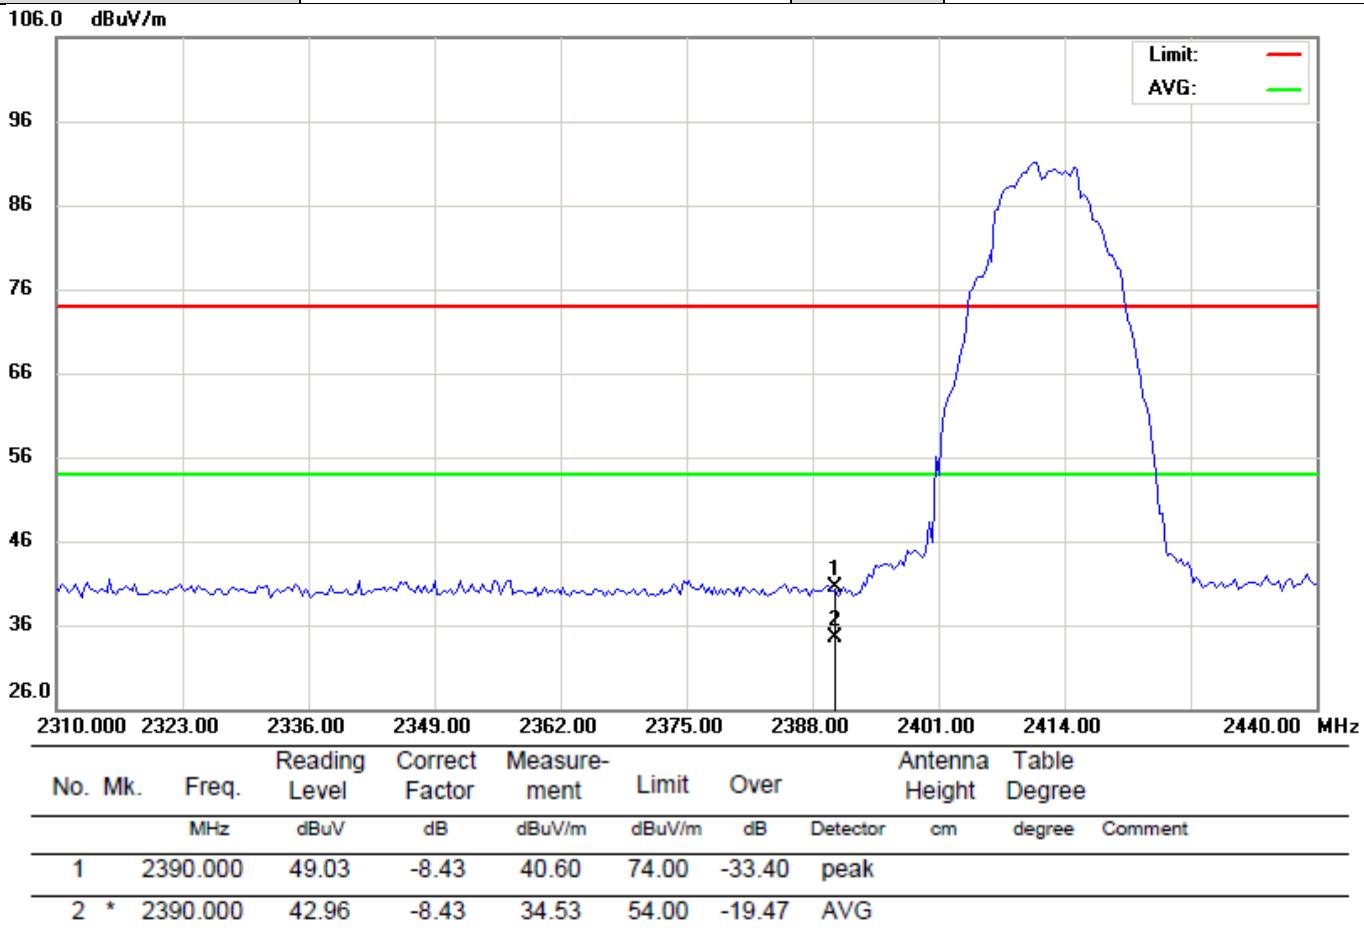

\*:Maximum data    x:Over limit    !:over margin

<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH19</b>	<b>Phase:</b>	<b>Vertical</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C / 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

111.0 dBuV/m

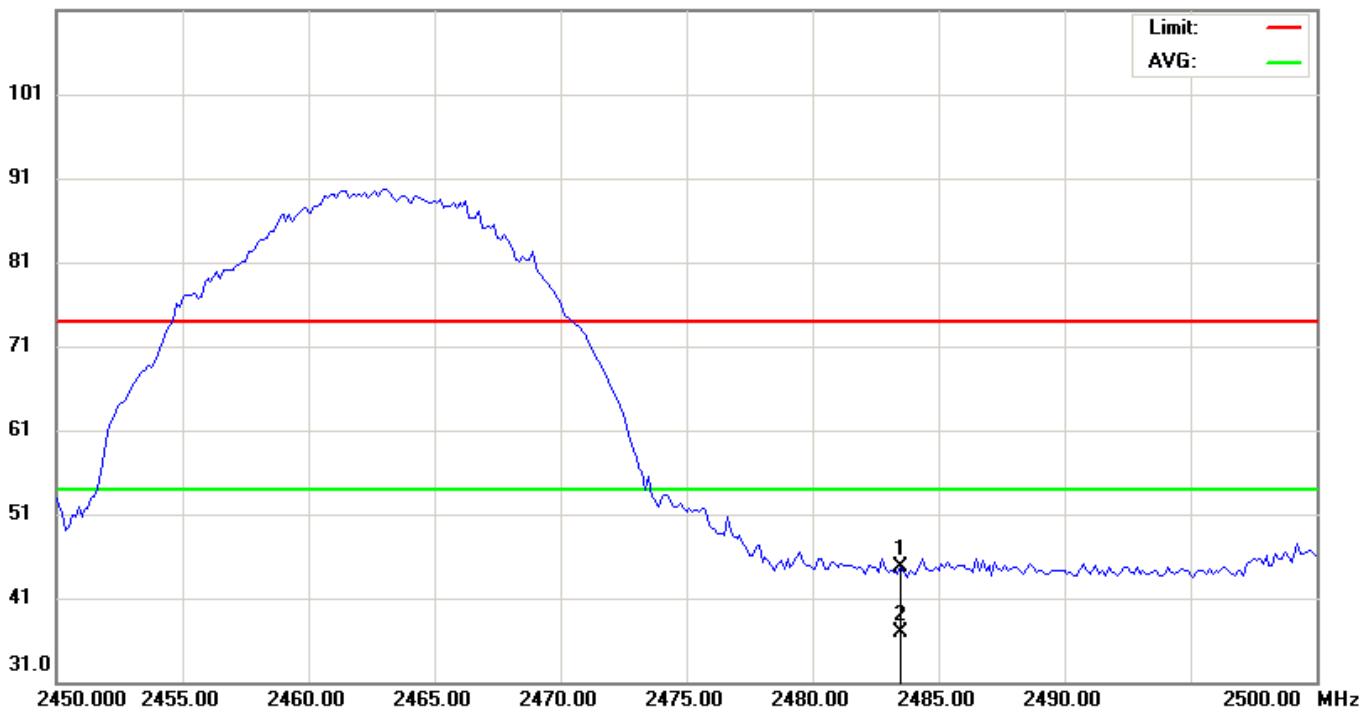


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2483.500	52.96	-8.29	44.67	74.00	-29.33	peak			
2	*	2483.500	45.23	-8.29	36.94	54.00	-17.06	AVG			

\*:Maximum data   x:Over limit   !:over margin

EUT:	Tmall TV	M/N:	M16I
Mode:	802.11b-CH19	Phase:	Horizontal
Test by:	John	Power:	DC 5.2V by Adapter
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-05-07

111.0 dBuV/m

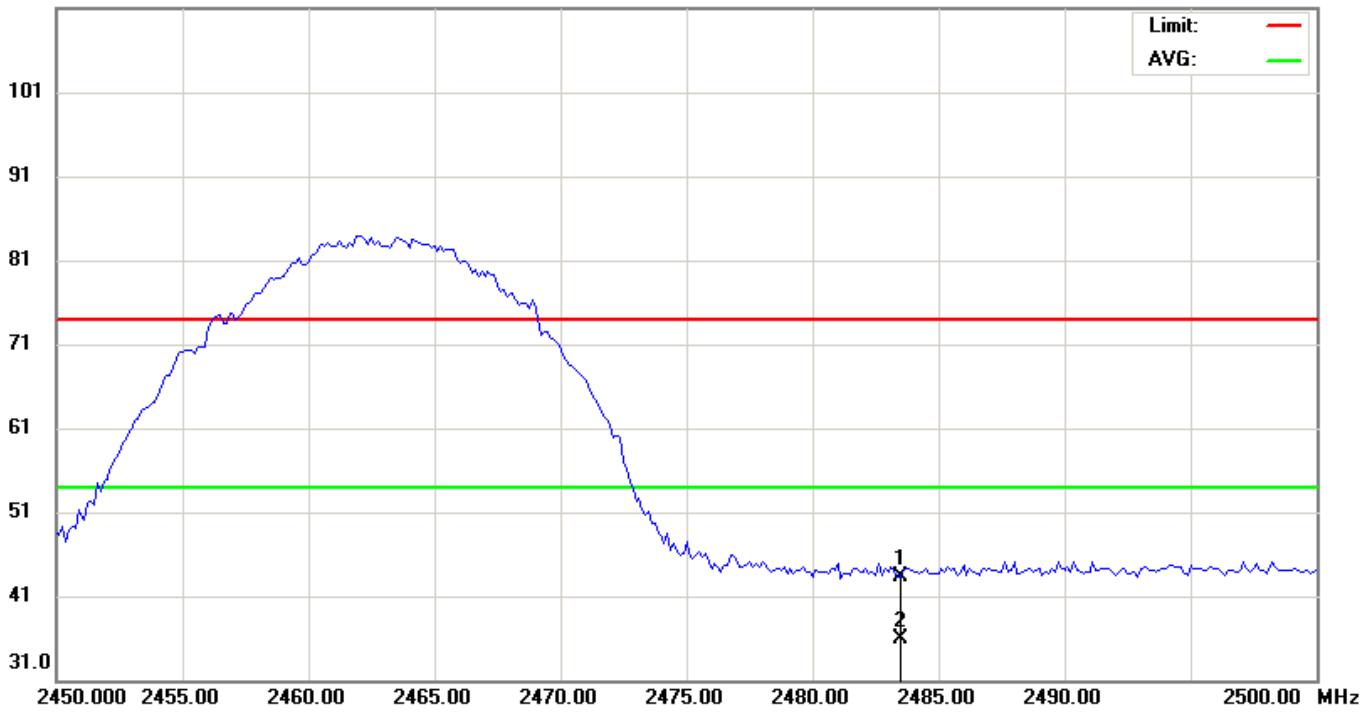


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
			Level	Factor	ment			Height	Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm
1		2483.500	51.68	-8.29	43.39	74.00	-30.61	peak	degree
2	*	2483.500	44.10	-8.29	35.81	54.00	-18.19	AVG	Comment

\*:Maximum data x:Over limit !:over margin

**Antenna B:**

<b>EUT:</b>	Tmall TV	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	802.11b-CH1	<b>Phase:</b>	<b>Vertical</b>
<b>Test by:</b>	John	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C / 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

106.0 dBuV/m

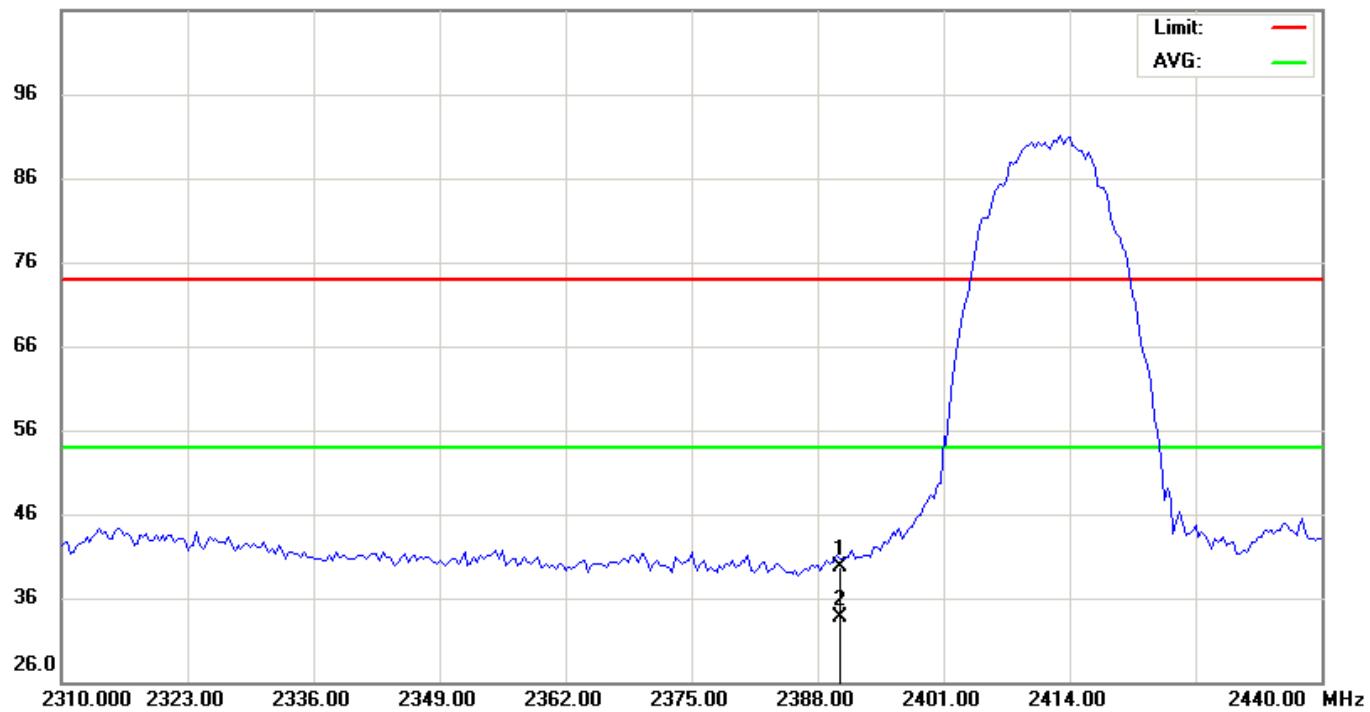


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment			Height	Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2390.000	48.06	-8.43	39.63	74.00	-34.37	peak		
2	*	2390.000	42.13	-8.43	33.70	54.00	-20.30	AVG		

\*:Maximum data   x:Over limit   !:over margin

<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH1</b>	<b>Phase:</b>	<b>Horizontal</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C / 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

106.0 dBuV/m

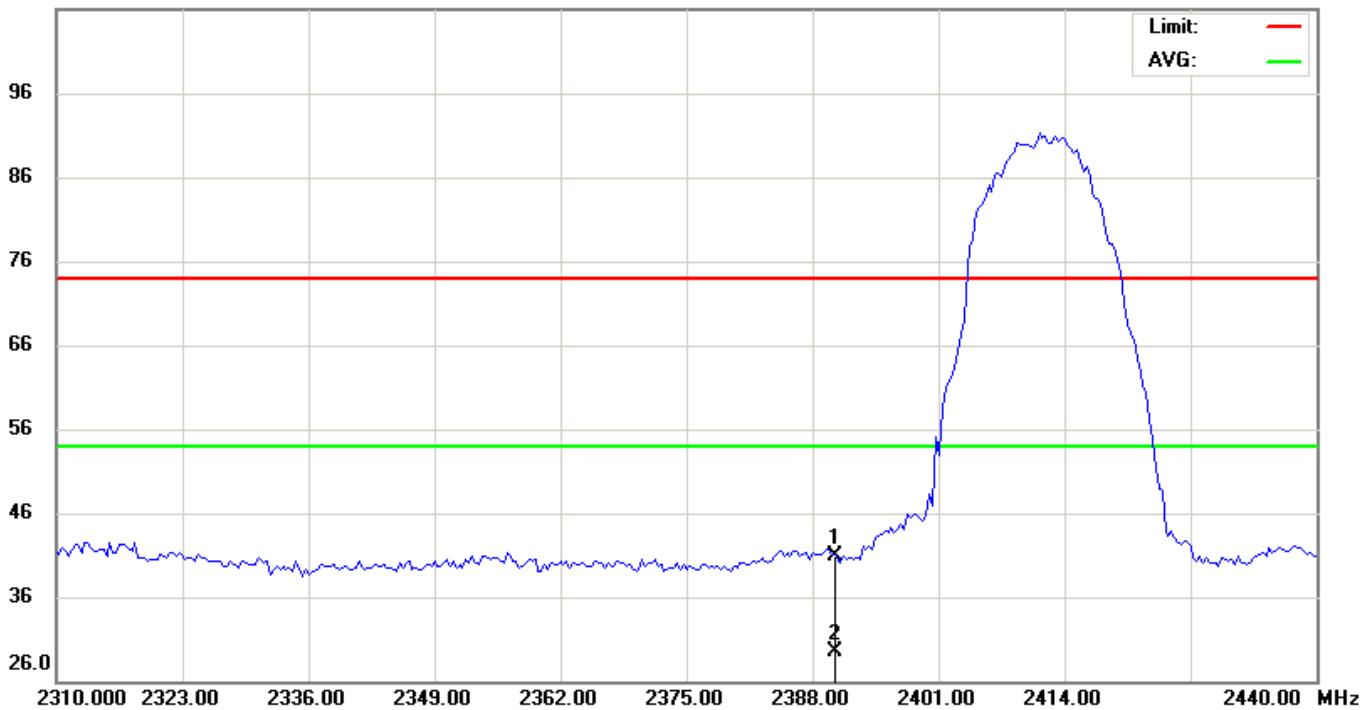


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2390.000	49.26	-8.43	40.83	74.00	-33.17	peak			
2	*	2390.000	37.86	-8.43	29.43	54.00	-24.57	AVG			

\*:Maximum data   x:Over limit   !:over margin

<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH19</b>	<b>Phase:</b>	<b>Vertical</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C / 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

111.0 dBuV/m

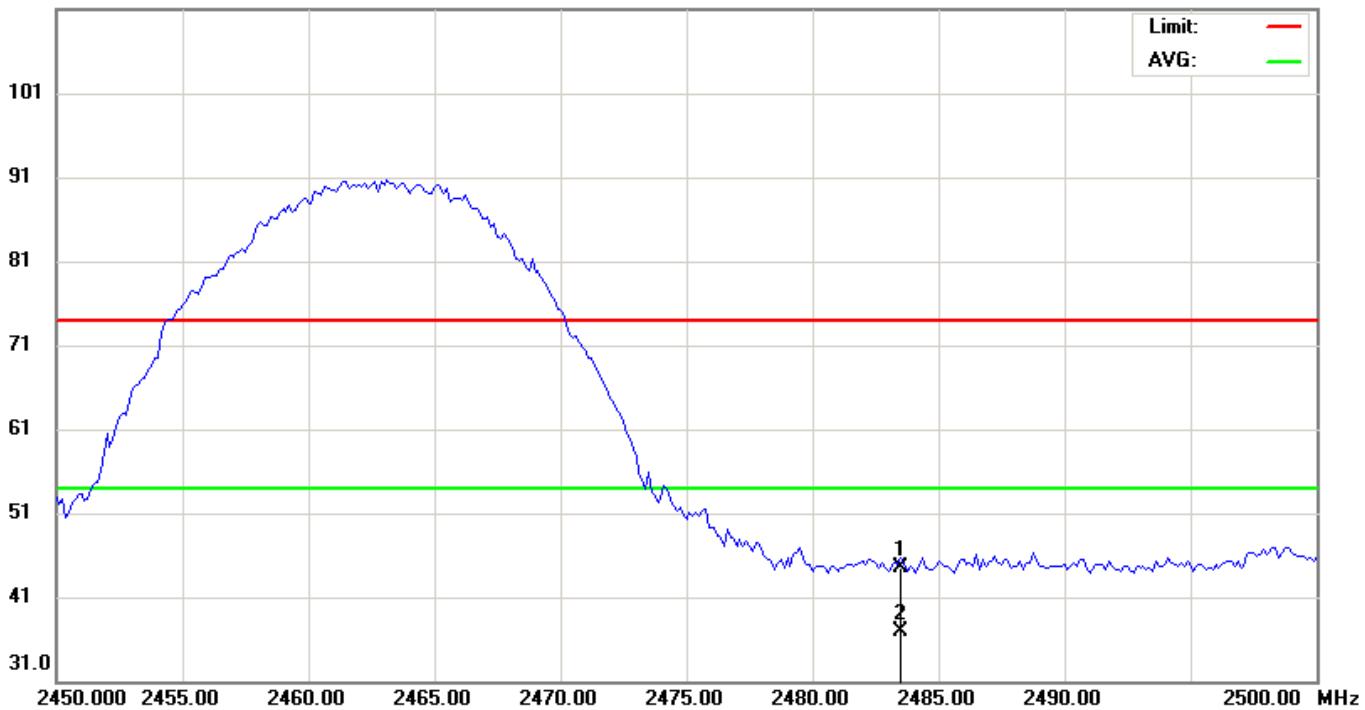


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	2483.500	52.73	-8.29	44.44	74.00	-29.56	peak			
2	*	2483.500	45.21	-8.29	36.92	54.00	-17.08	AVG		

\*:Maximum data x:Over limit !:over margin

<b>EUT:</b>	<b>Tmall TV</b>	<b>M/N:</b>	<b>M16I</b>
<b>Mode:</b>	<b>802.11b-CH19</b>	<b>Phase:</b>	<b>Horizontal</b>
<b>Test by:</b>	<b>John</b>	<b>Power:</b>	<b>DC 5.2V by Adapter</b>
<b>Temperature: / Humidity</b>	<b>23.7°C / 51.6%</b>	<b>Test date:</b>	<b>2016-05-07</b>

111.0 dBuV/m

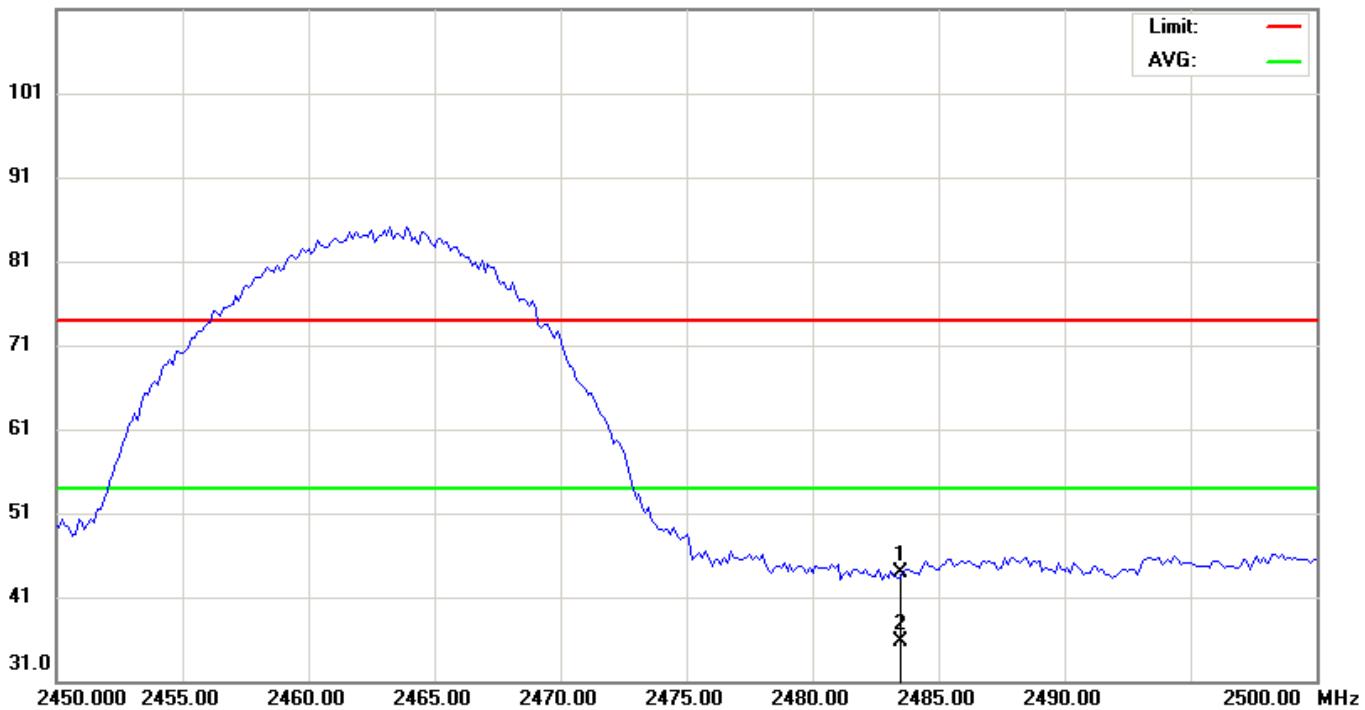

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
			MHz	dBuV	dB	dBuV/m	dBuV/m	Detector	cm	degree	Comment
1		2483.500	52.25	-8.29	43.96	74.00	-30.04	peak			
2	*	2483.500	44.01	-8.29	35.72	54.00	-18.28	AVG			

\*:Maximum data   x:Over limit   !:over margin

End of Report