



Appendix F

RF Test Data for 5.5GWIFI (Conducted Measurement)

Product Name: All-In-One laptop

Test Model: LAPBOOK A7 N4

Environmental Conditions

Temperature:	24.3°C
Relative Humidity:	52.6%
ATM Pressure:	100.0 kPa
Test Engineer:	Can Kun
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



F.1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant1	27.335	---	Pass
NVNT	a	5580	Ant1	27.483	---	Pass
NVNT	a	5700	Ant1	27.219	---	Pass
NVNT	n20	5500	Ant1	29.189	---	Pass
NVNT	n20	5580	Ant1	28.356	---	Pass
NVNT	n20	5700	Ant1	28.315	---	Pass
NVNT	n40	5510	Ant1	45.261	---	Pass
NVNT	n40	5550	Ant1	50.963	---	Pass
NVNT	n40	5670	Ant1	45.492	---	Pass
NVNT	ac20	5500	Ant1	28.095	---	Pass
NVNT	ac20	5580	Ant1	29.682	---	Pass
NVNT	ac20	5700	Ant1	28.186	---	Pass
NVNT	ac40	5510	Ant1	45.662	---	Pass
NVNT	ac40	5550	Ant1	42.709	---	Pass
NVNT	ac40	5670	Ant1	44.424	---	Pass
NVNT	ac80	5530	Ant1	86.51	---	Pass
NVNT	ac80	5610	Ant1	86.657	---	Pass








Test Graphs



-26dB Bandwidth NVNT a 5500MHz Ant1


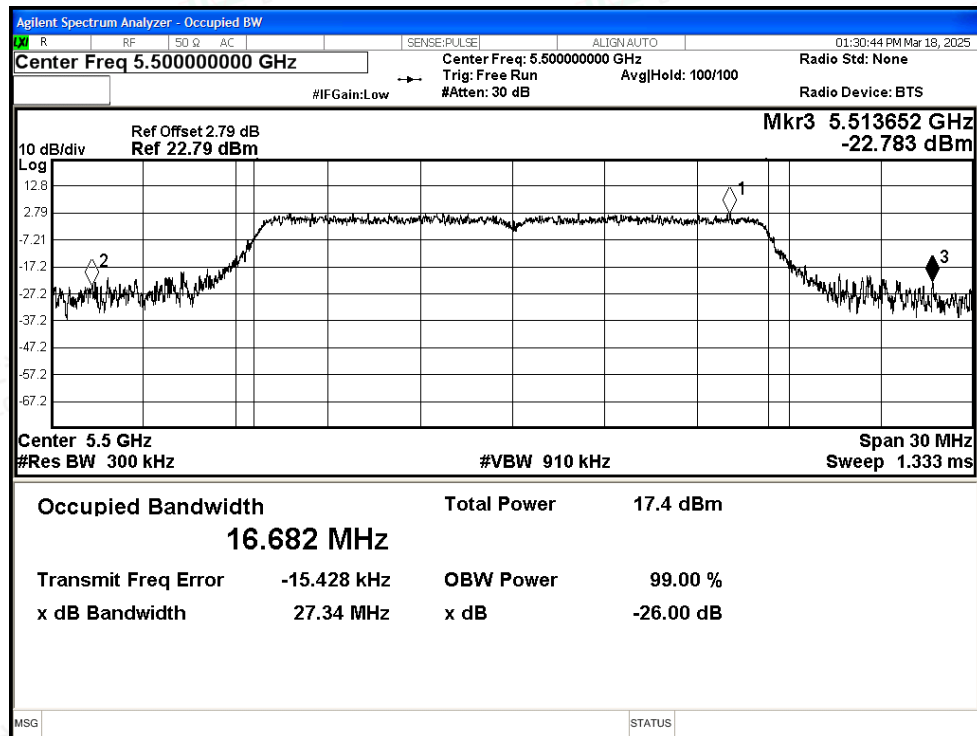




-26dB Bandwidth NVNT a 5580MHz Ant1


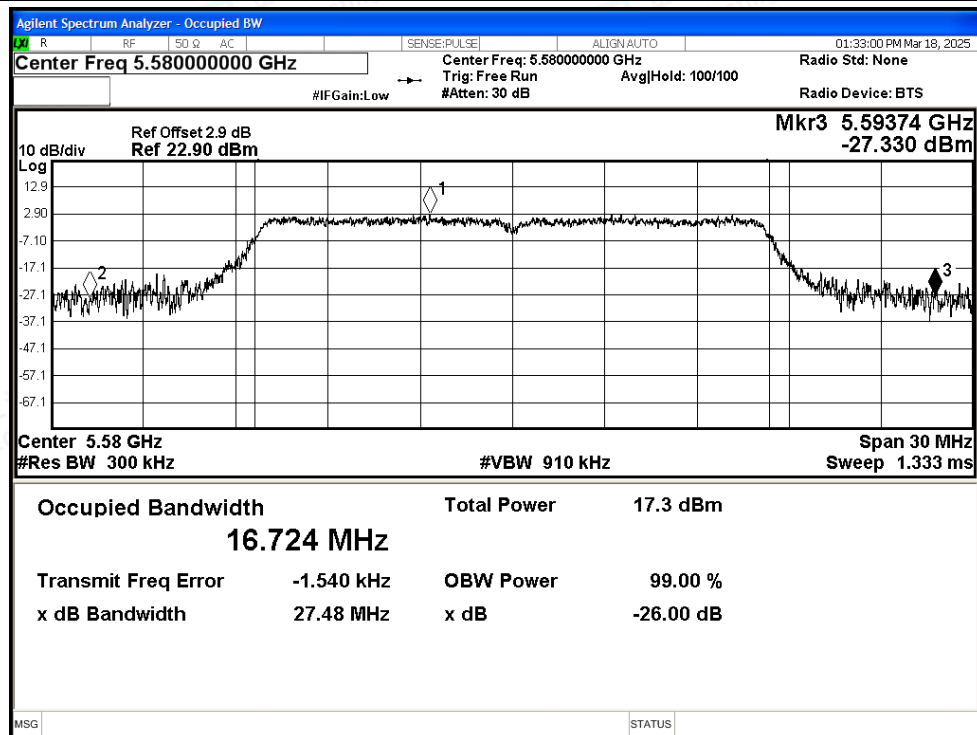


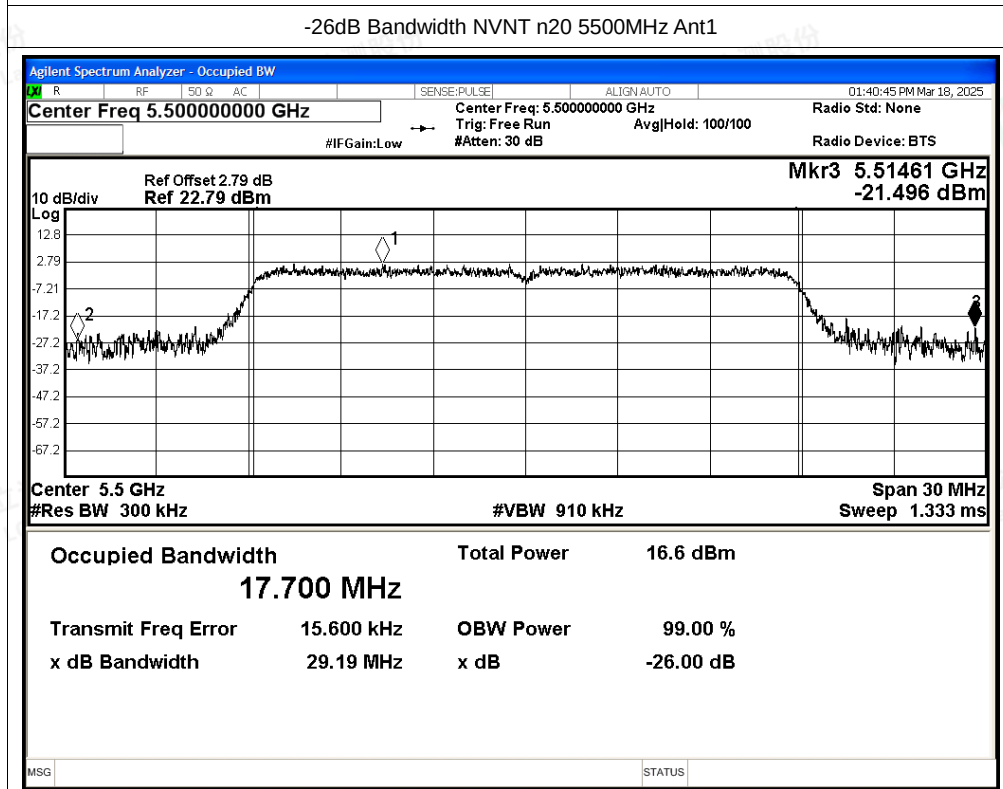
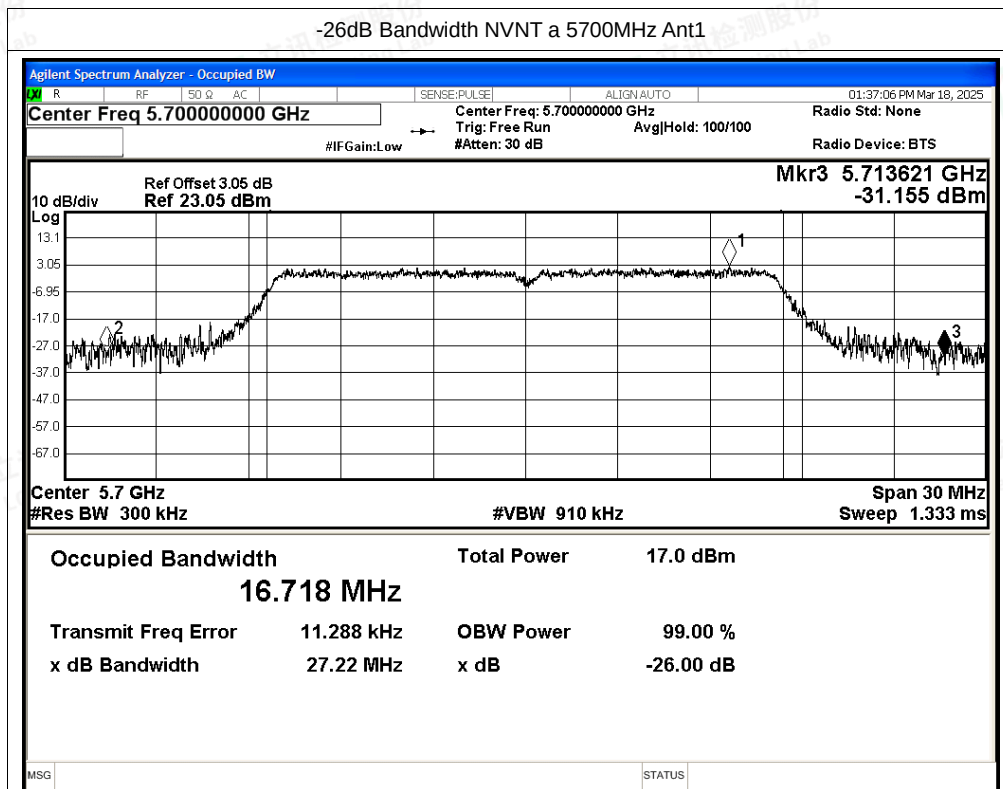


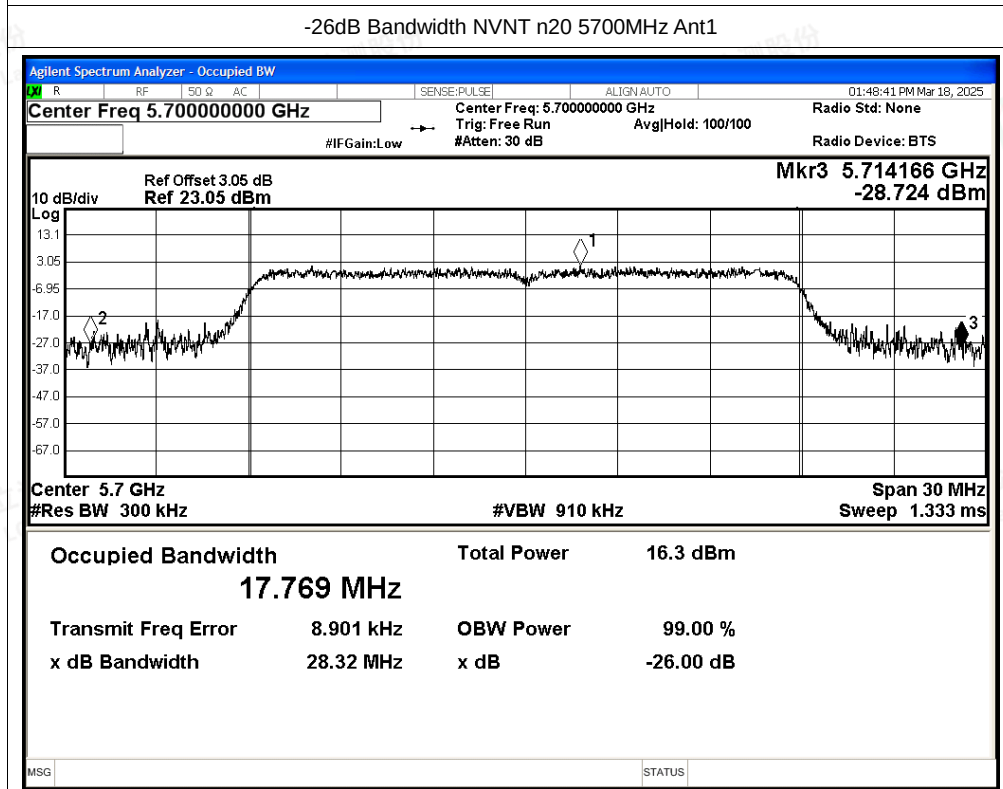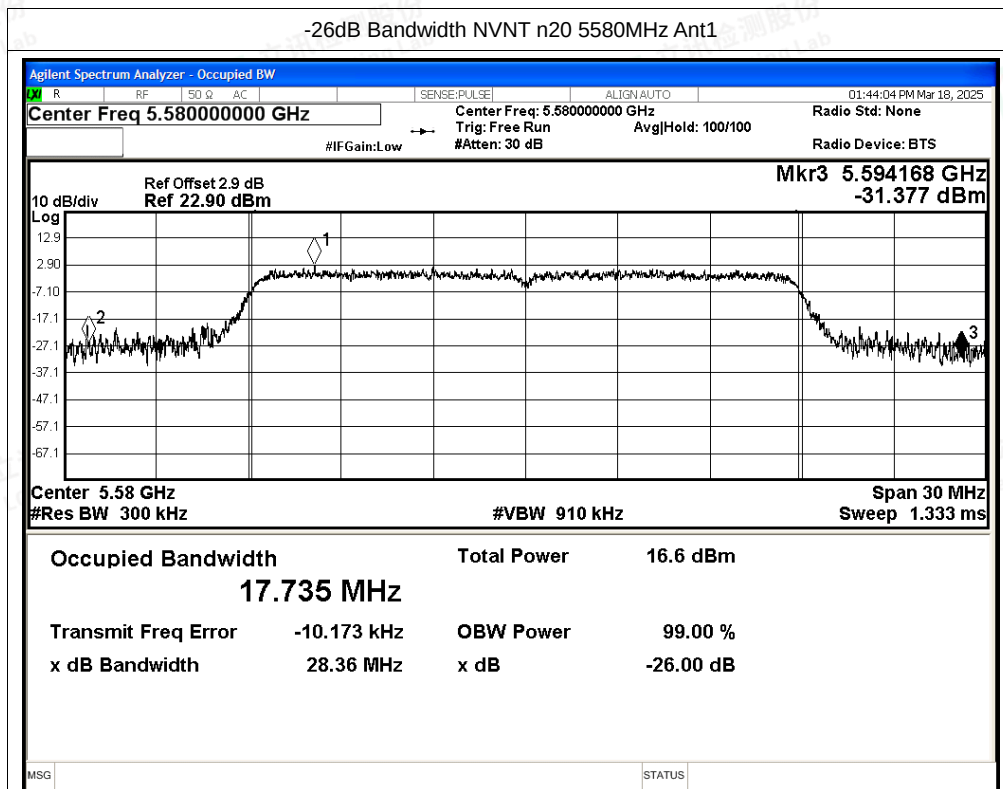

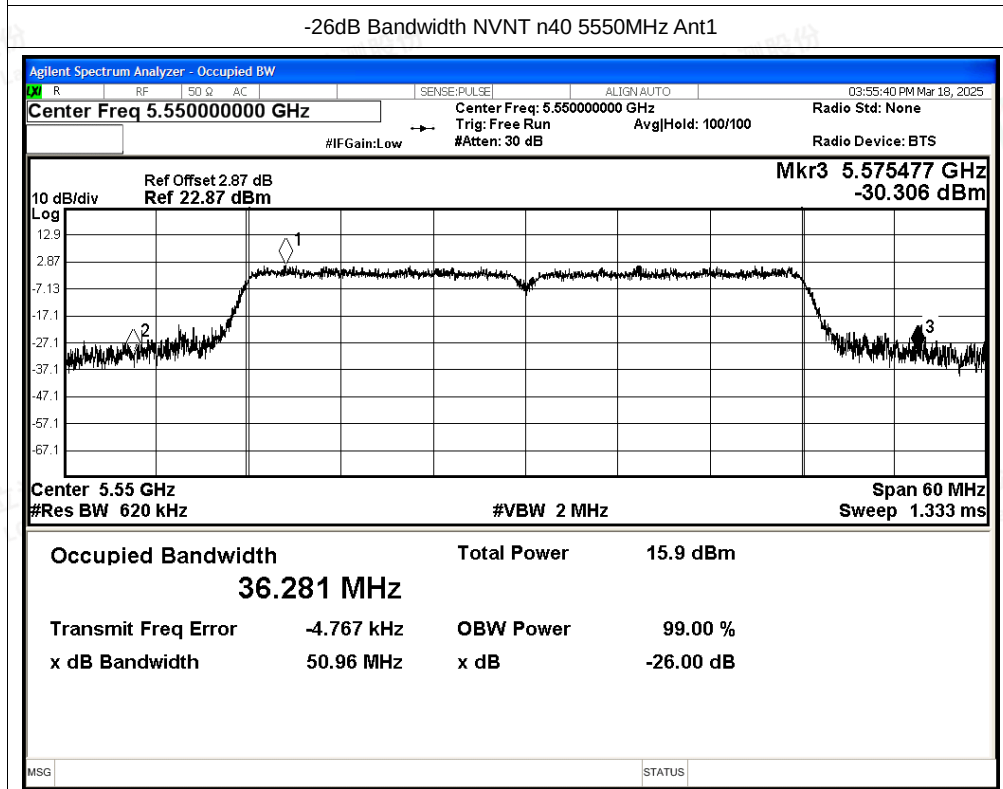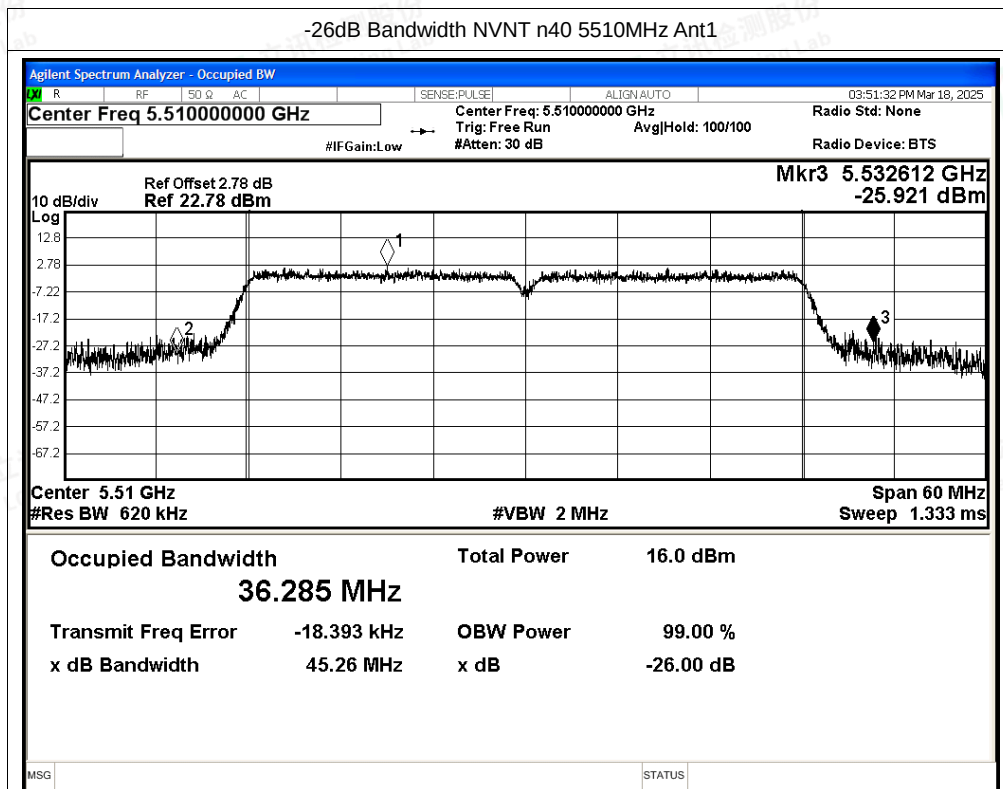

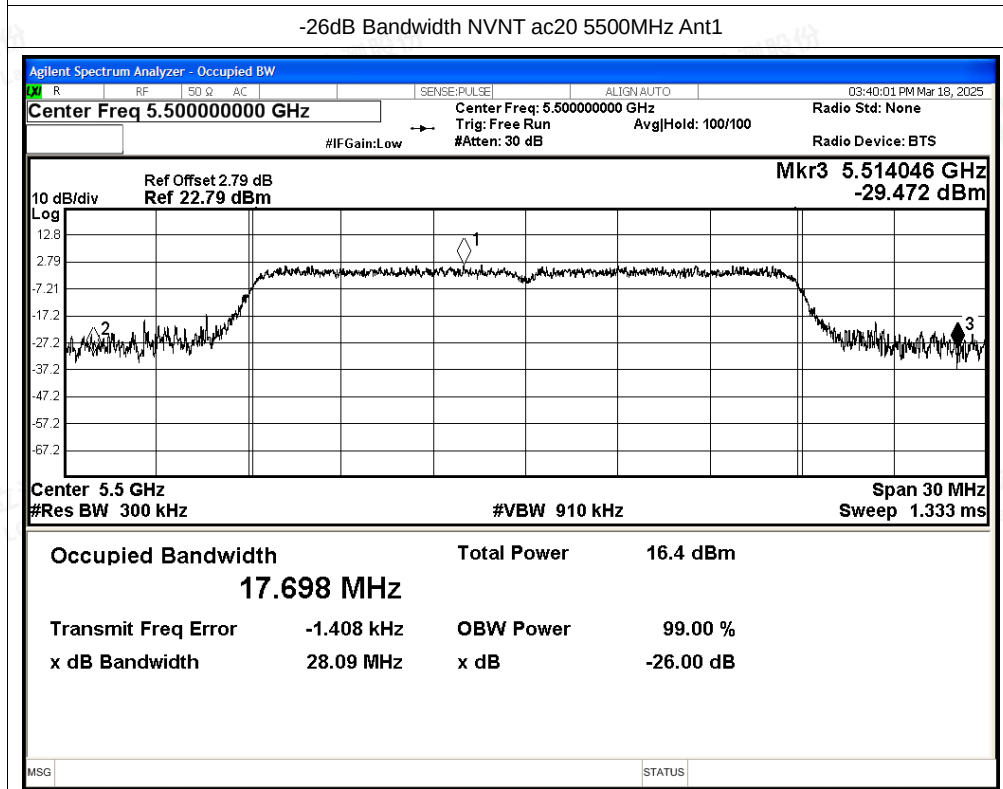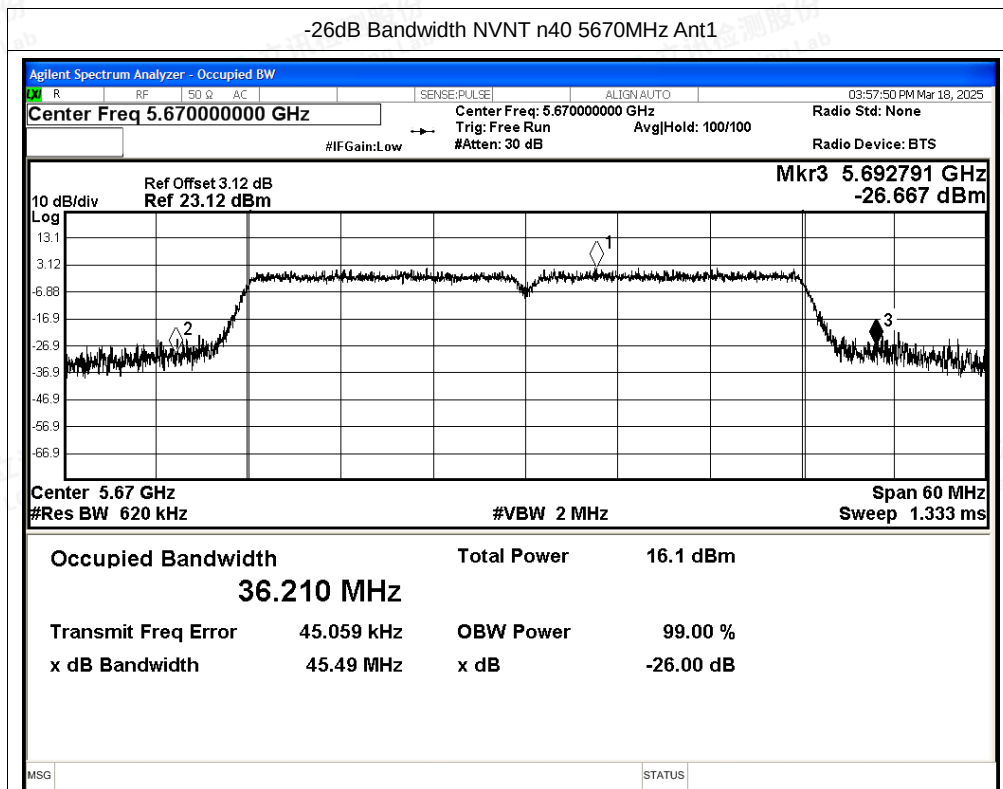


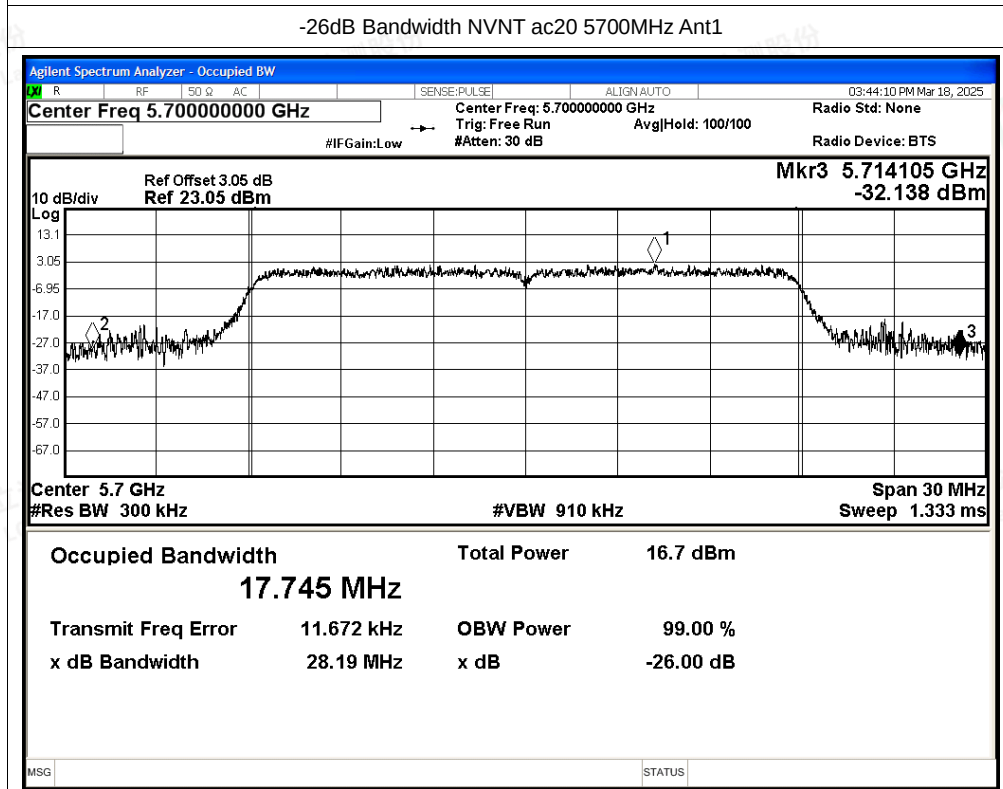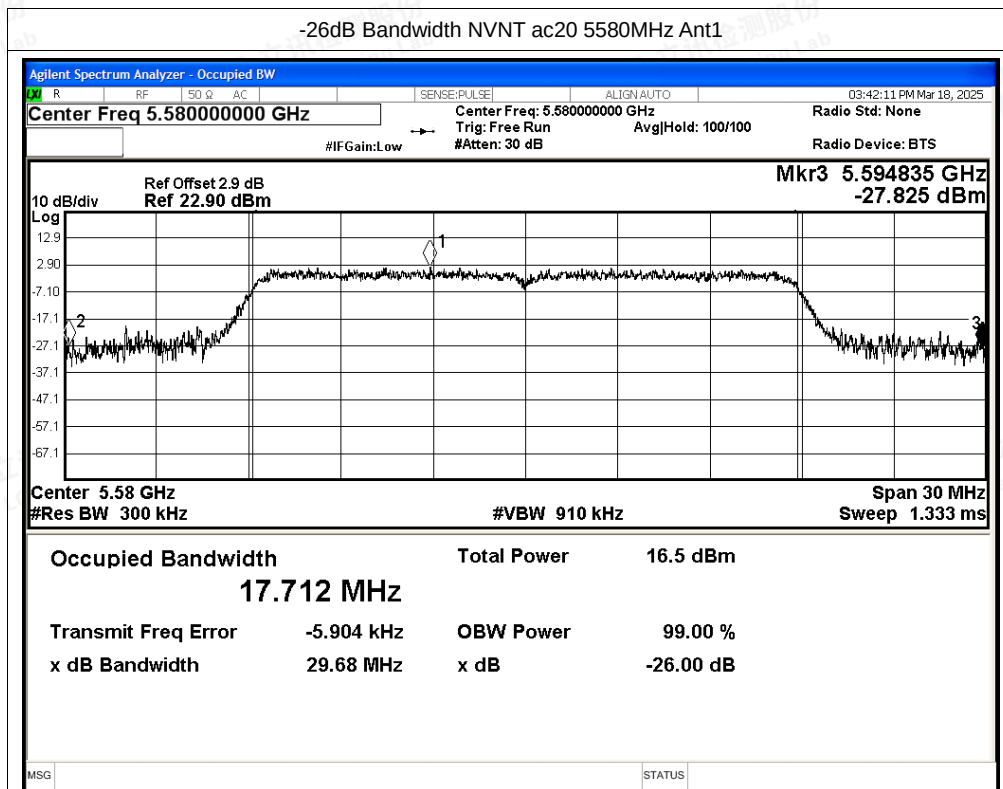

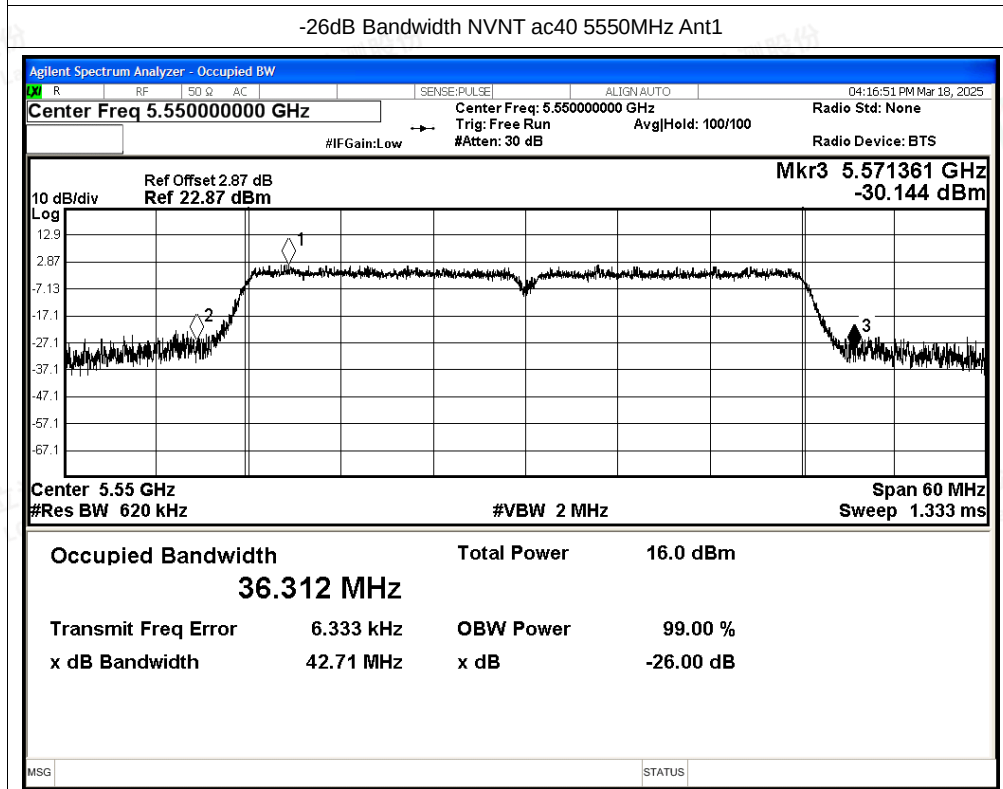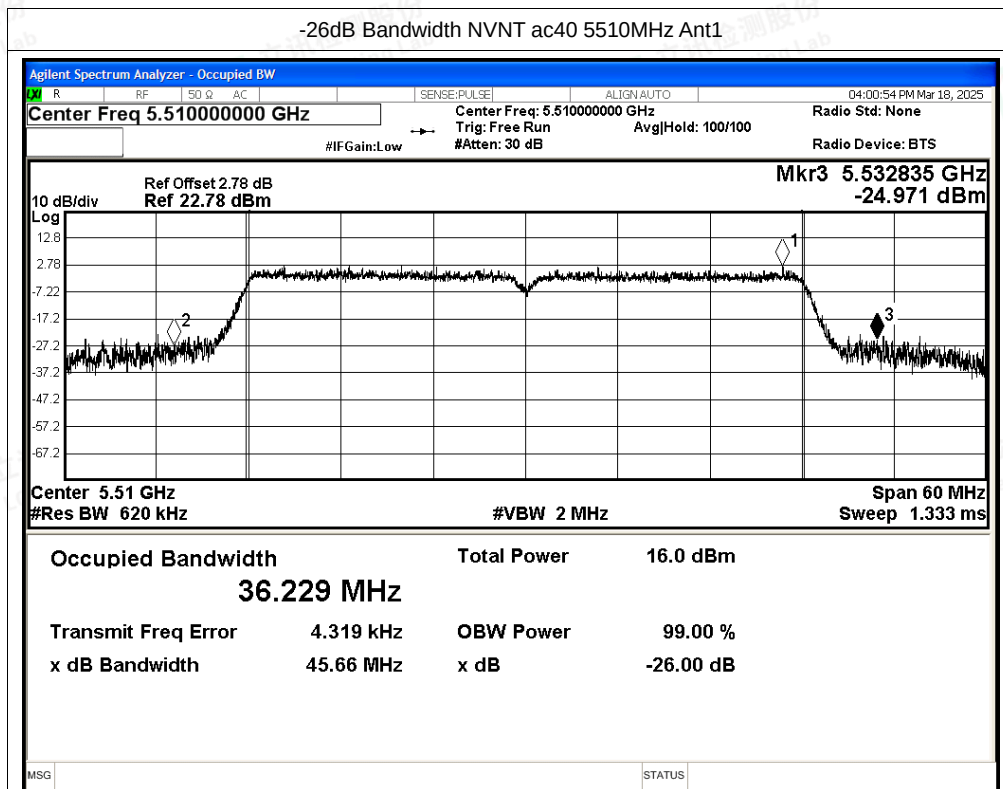





-26dB Bandwidth NVNT ac40 5670MHz Ant1

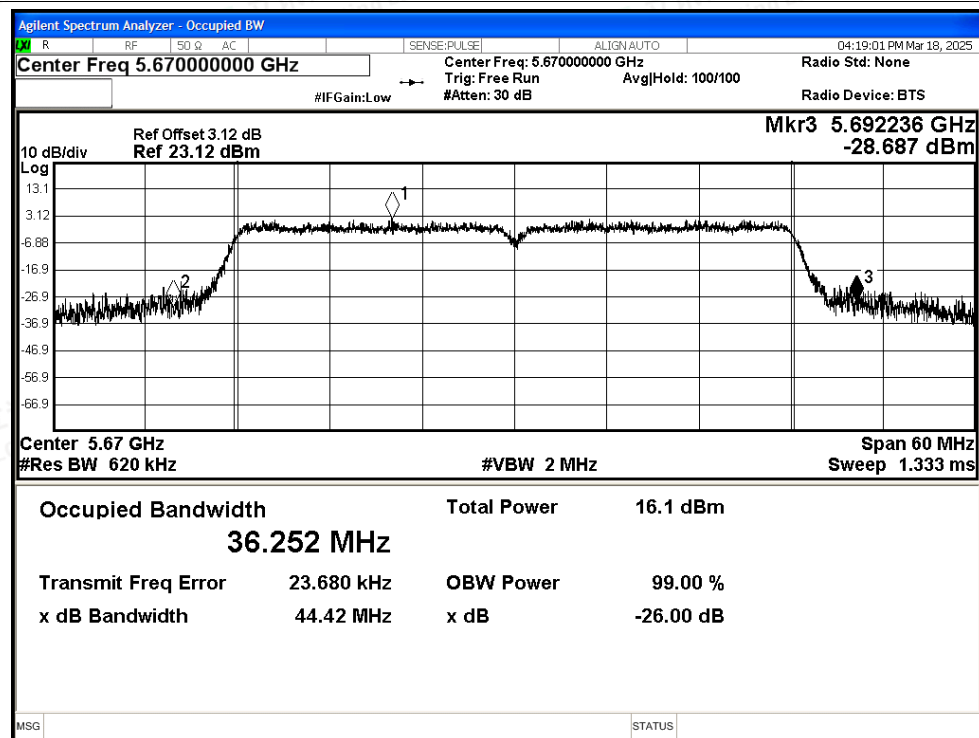

-26dB Bandwidth NVNT ac80 5530MHz Ant1

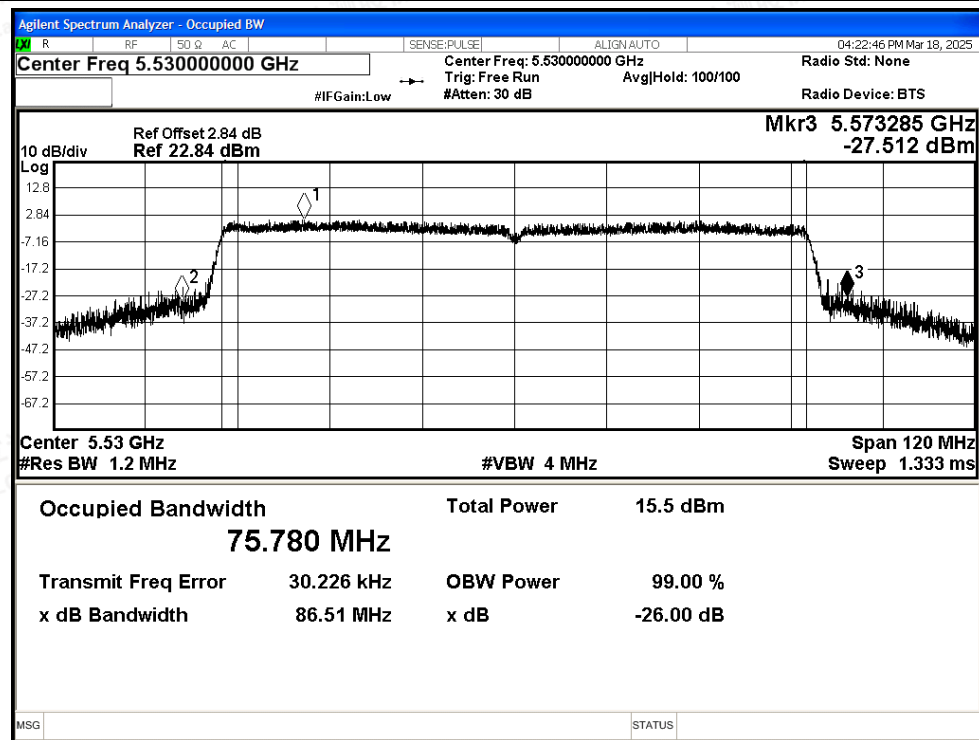

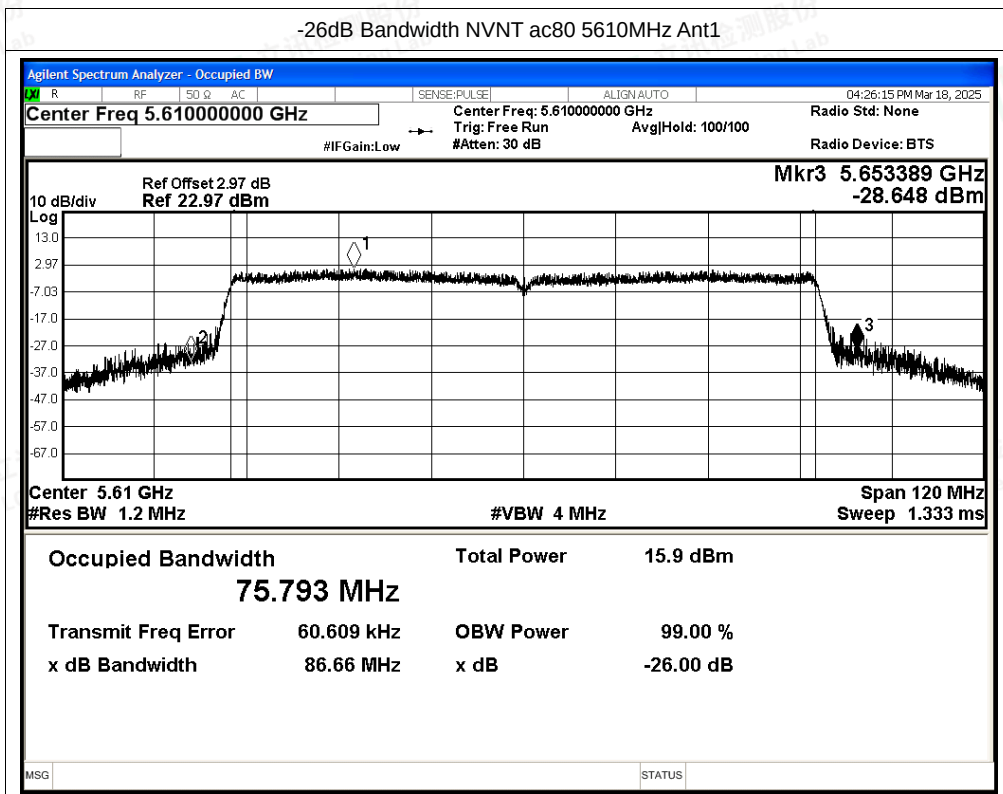




Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant2	26.88	≥ 0.5	Pass
NVNT	a	5580	Ant2	25.914	≥ 0.5	Pass
NVNT	a	5700	Ant2	28.002	≥ 0.5	Pass
NVNT	n20	5500	Ant2	27.755	≥ 0.5	Pass
NVNT	n20	5580	Ant2	28.382	≥ 0.5	Pass
NVNT	n20	5700	Ant2	27.713	≥ 0.5	Pass
NVNT	n40	5510	Ant2	48.054	≥ 0.5	Pass
NVNT	n40	5550	Ant2	45.484	≥ 0.5	Pass
NVNT	n40	5670	Ant2	48.694	≥ 0.5	Pass
NVNT	ac20	5500	Ant2	28.658	≥ 0.5	Pass
NVNT	ac20	5580	Ant2	27.474	≥ 0.5	Pass
NVNT	ac20	5700	Ant2	28.992	≥ 0.5	Pass
NVNT	ac40	5510	Ant2	49.061	≥ 0.5	Pass
NVNT	ac40	5550	Ant2	43.543	≥ 0.5	Pass
NVNT	ac40	5670	Ant2	45.539	≥ 0.5	Pass
NVNT	ac80	5530	Ant2	85.138	≥ 0.5	Pass
NVNT	ac80	5610	Ant2	83.619	≥ 0.5	Pass








Test Graphs



-26dB Bandwidth NVNT a 5500MHz Ant2


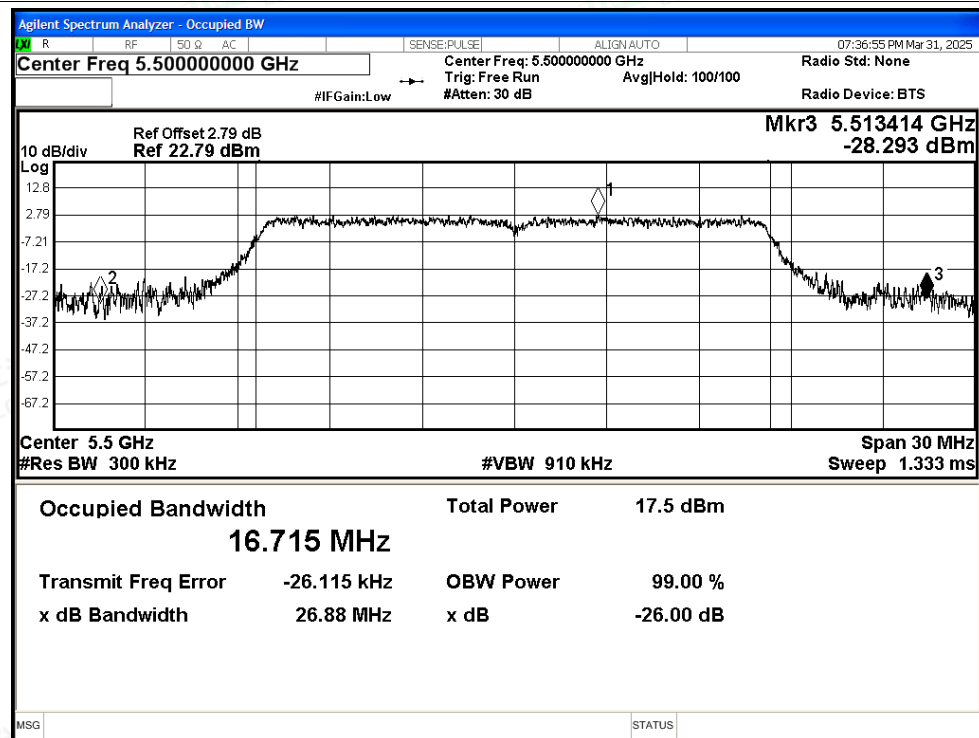




-26dB Bandwidth NVNT a 5580MHz Ant2


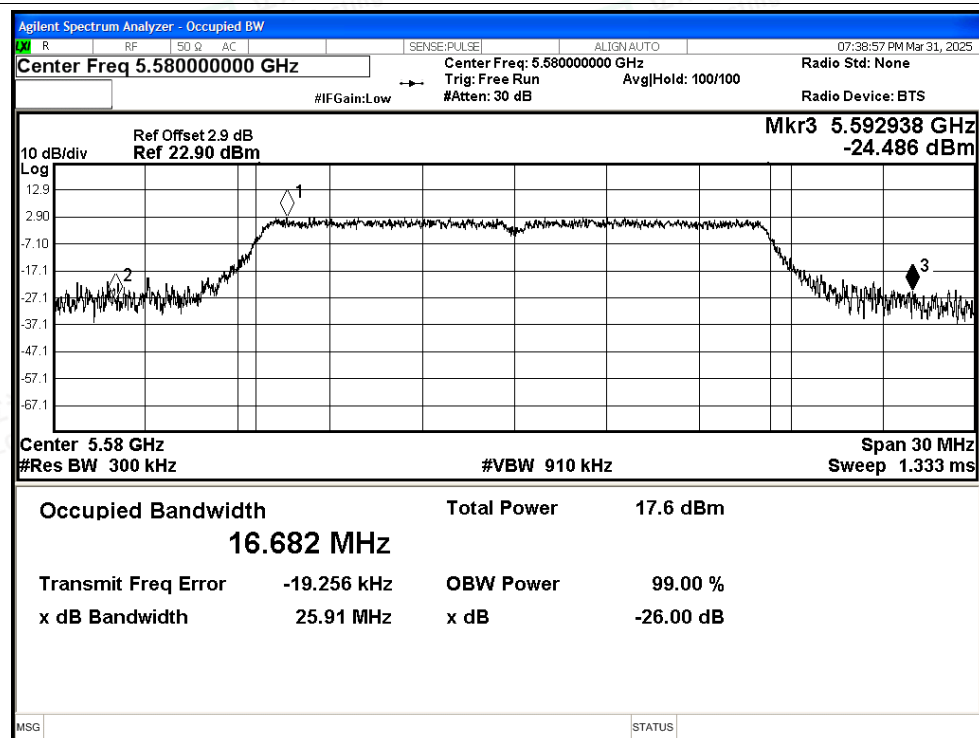


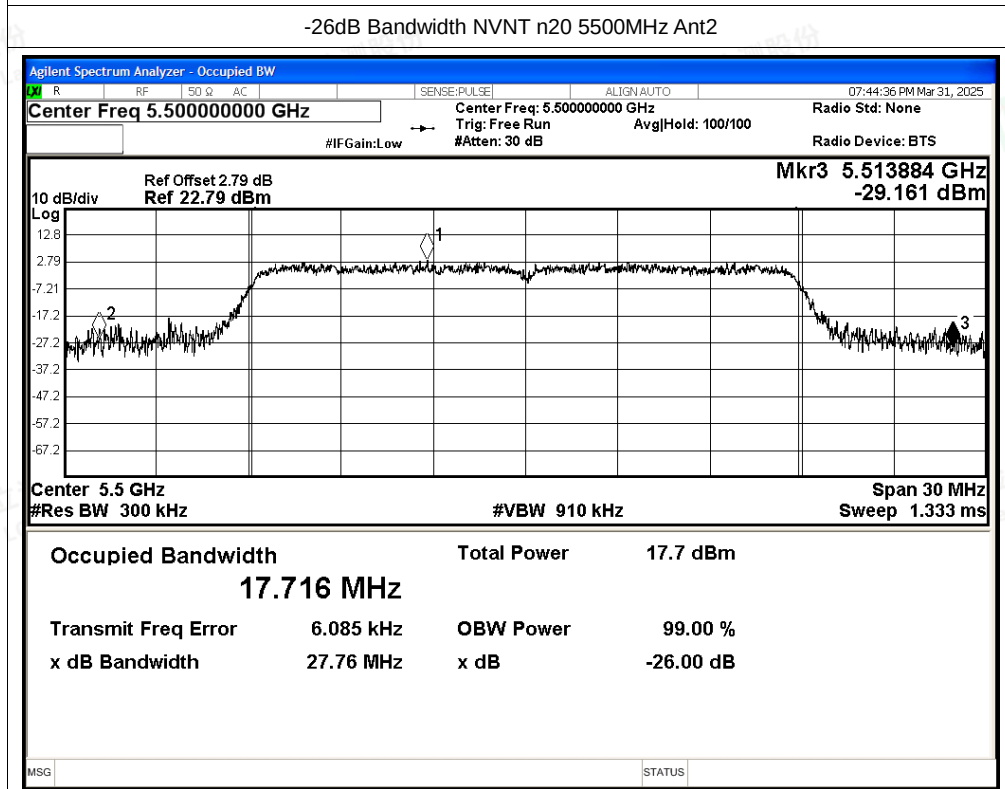
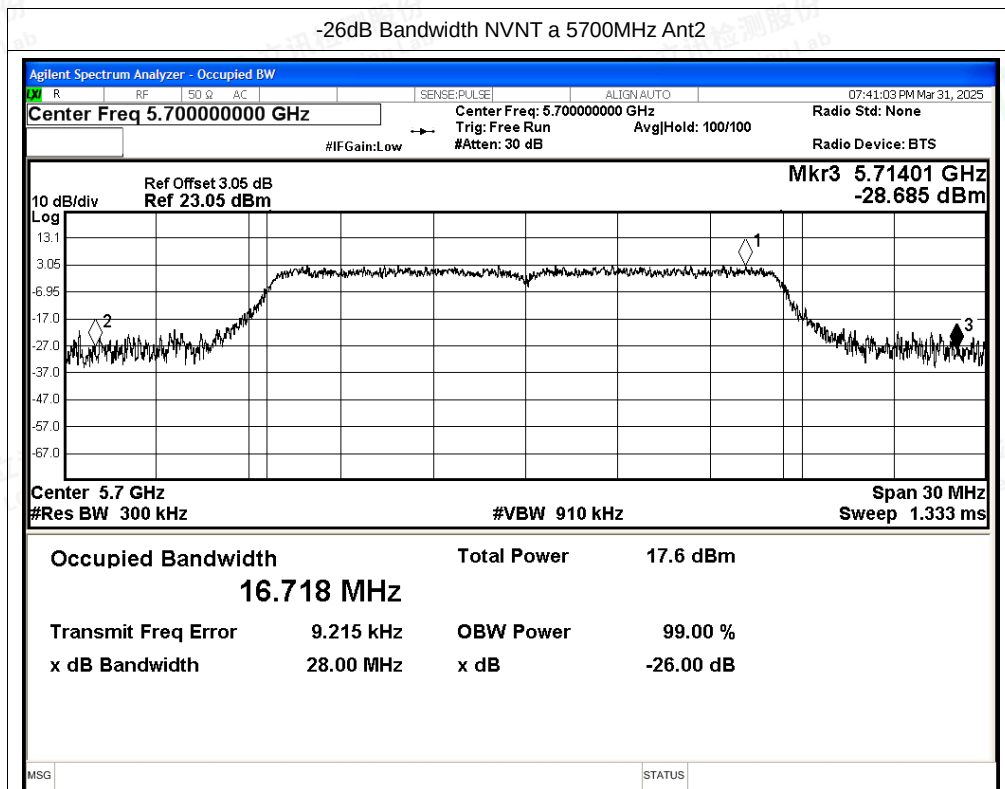


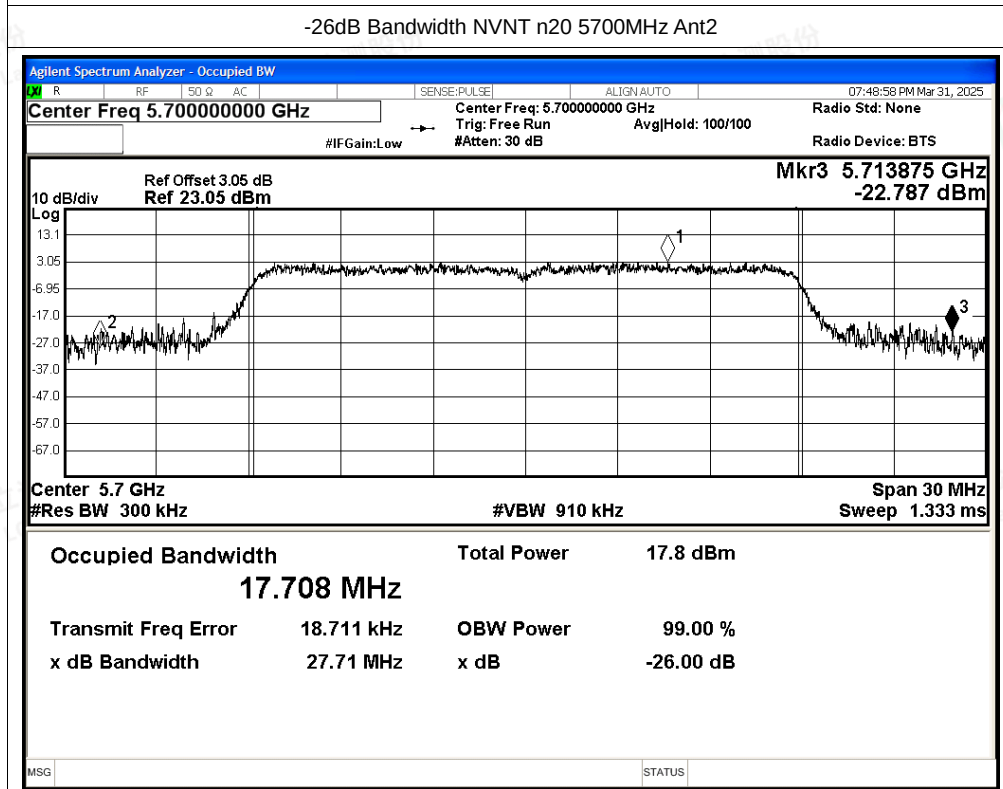
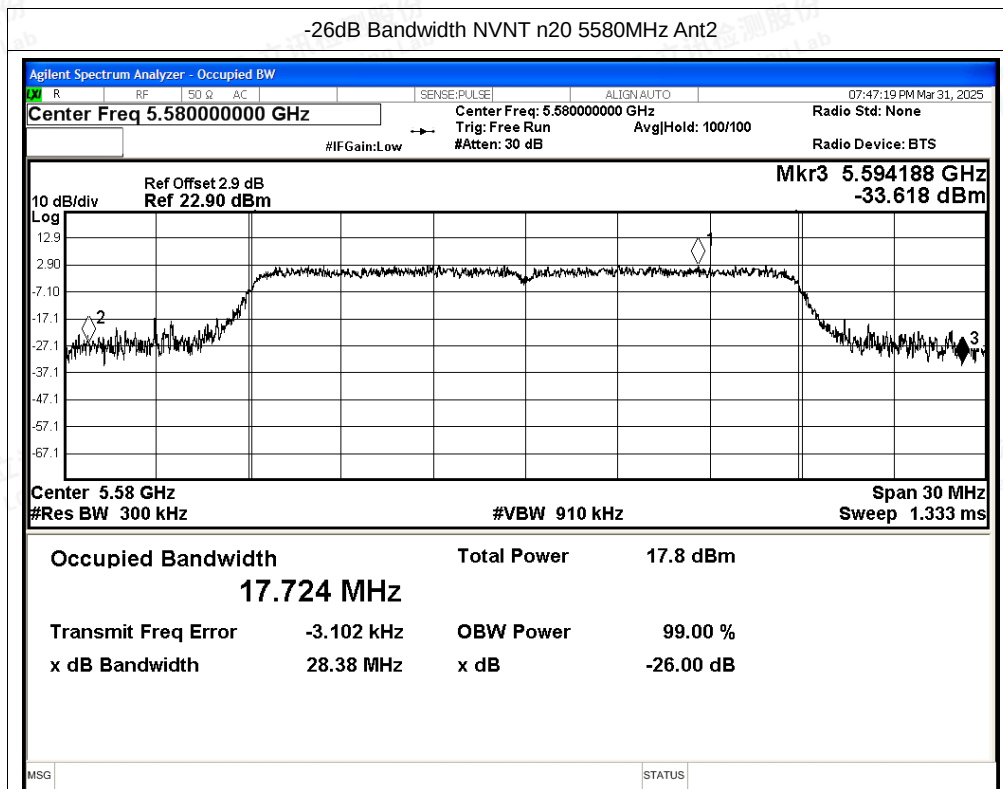


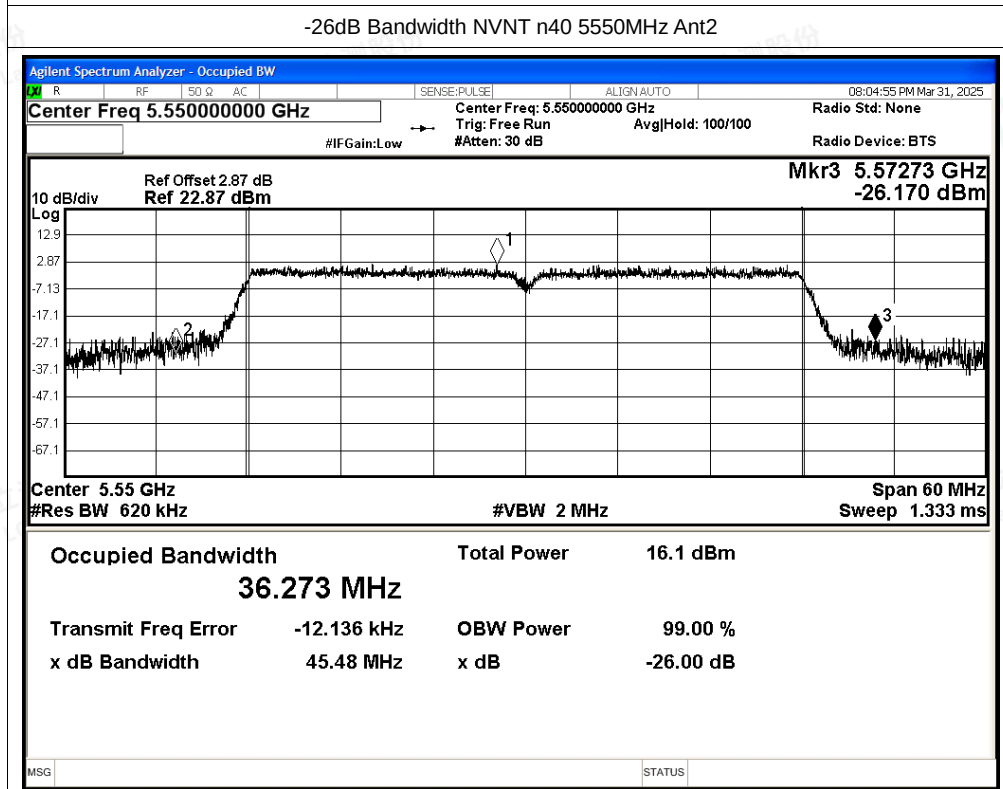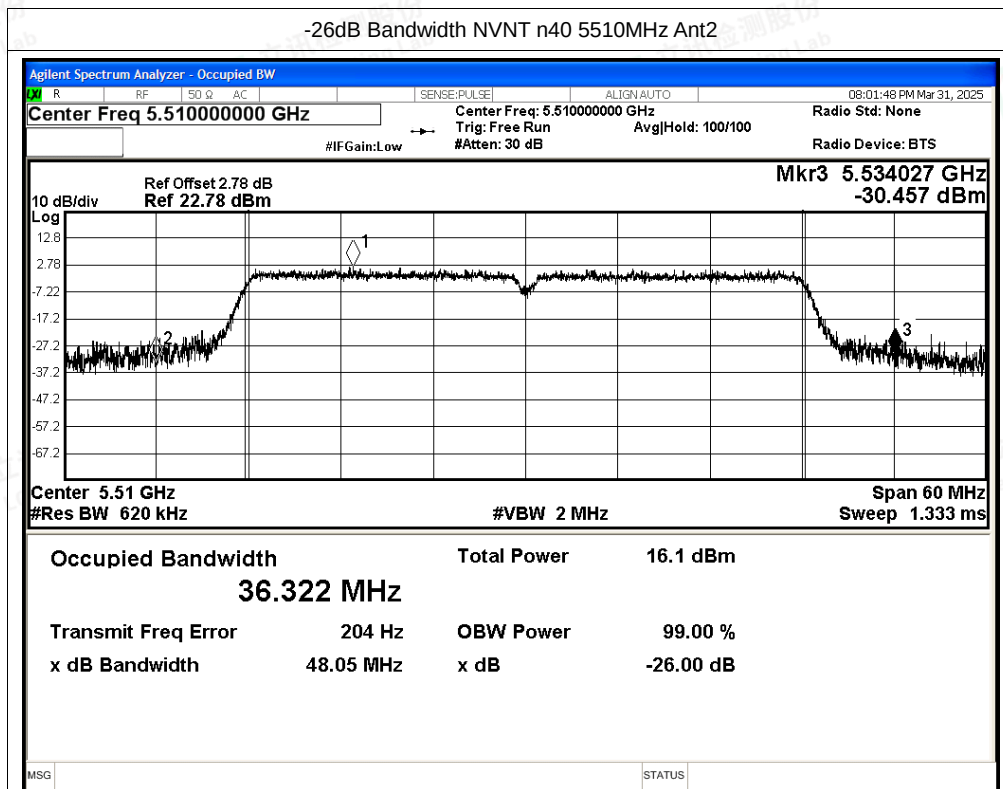


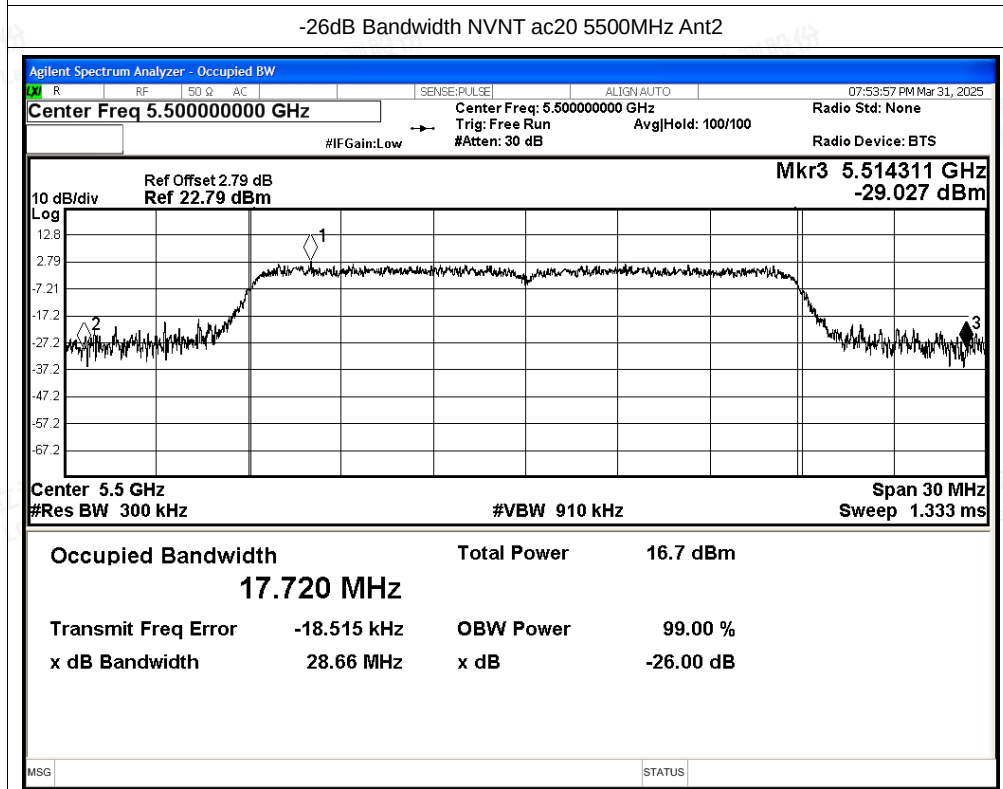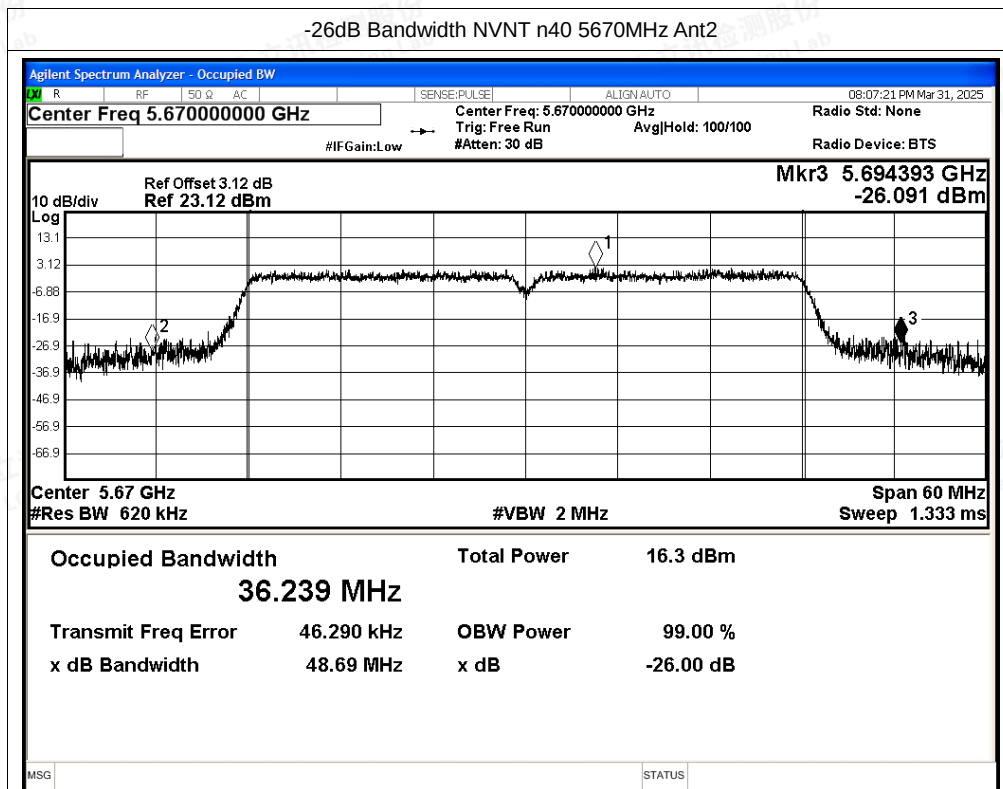

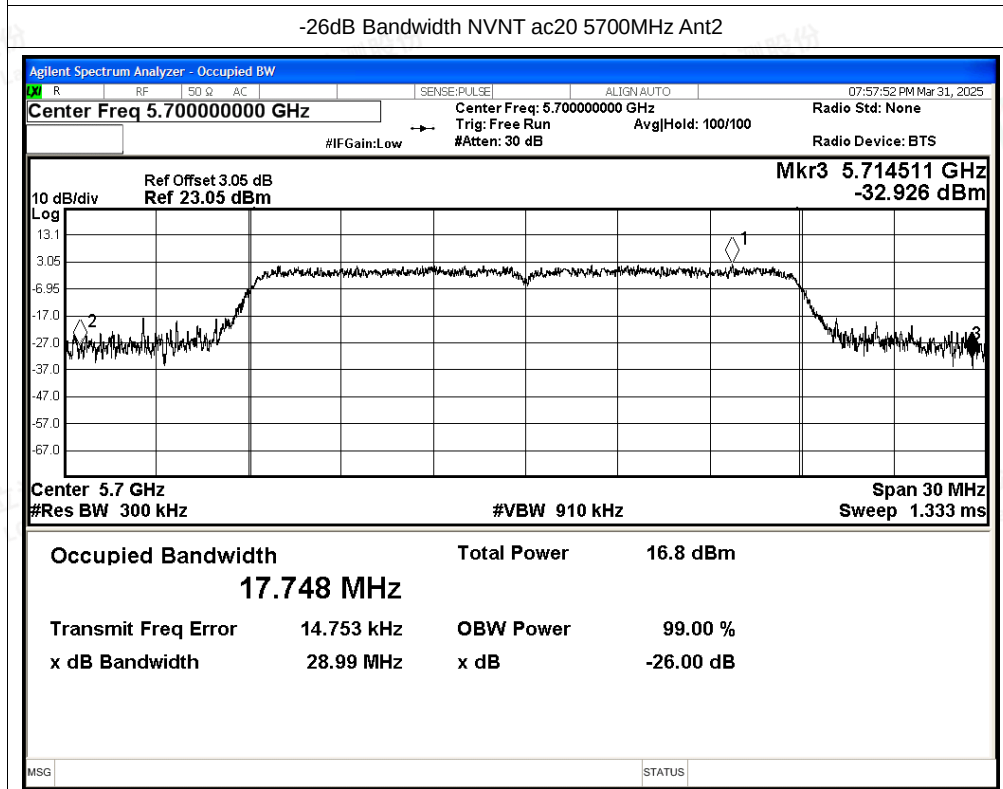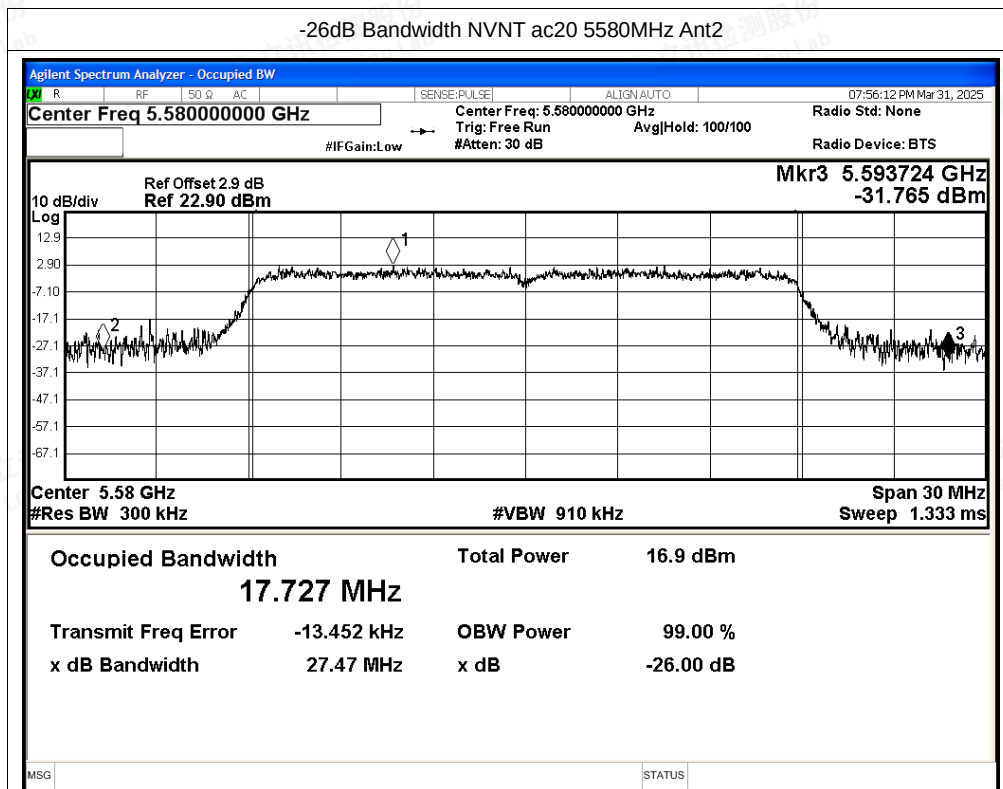

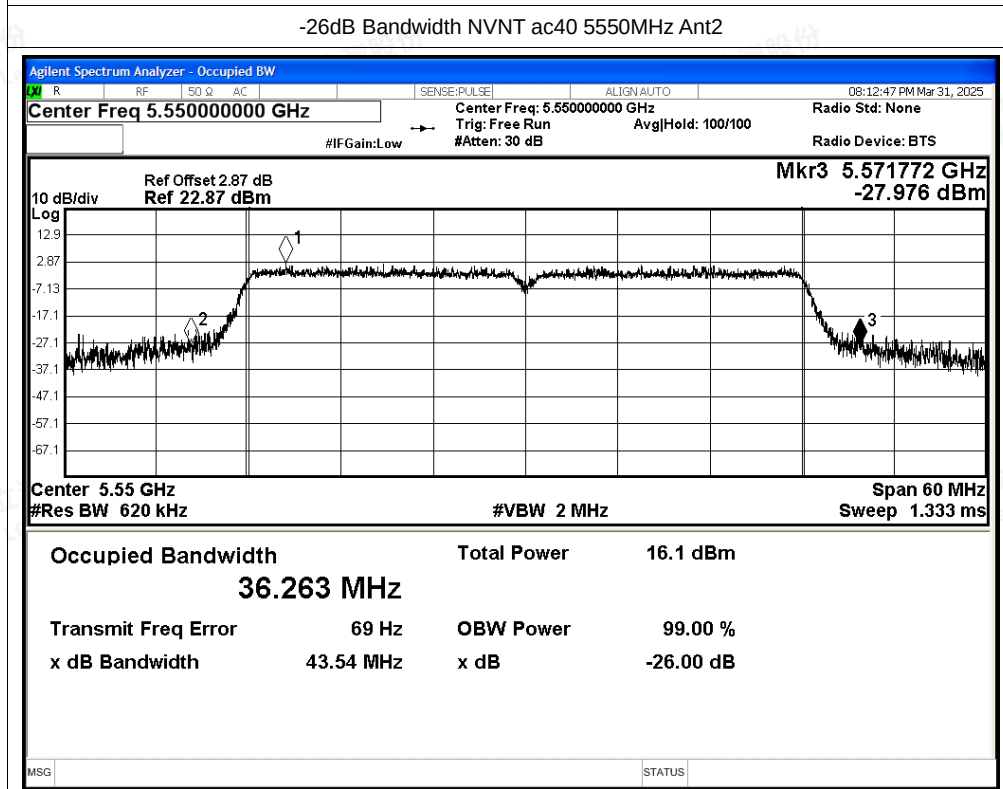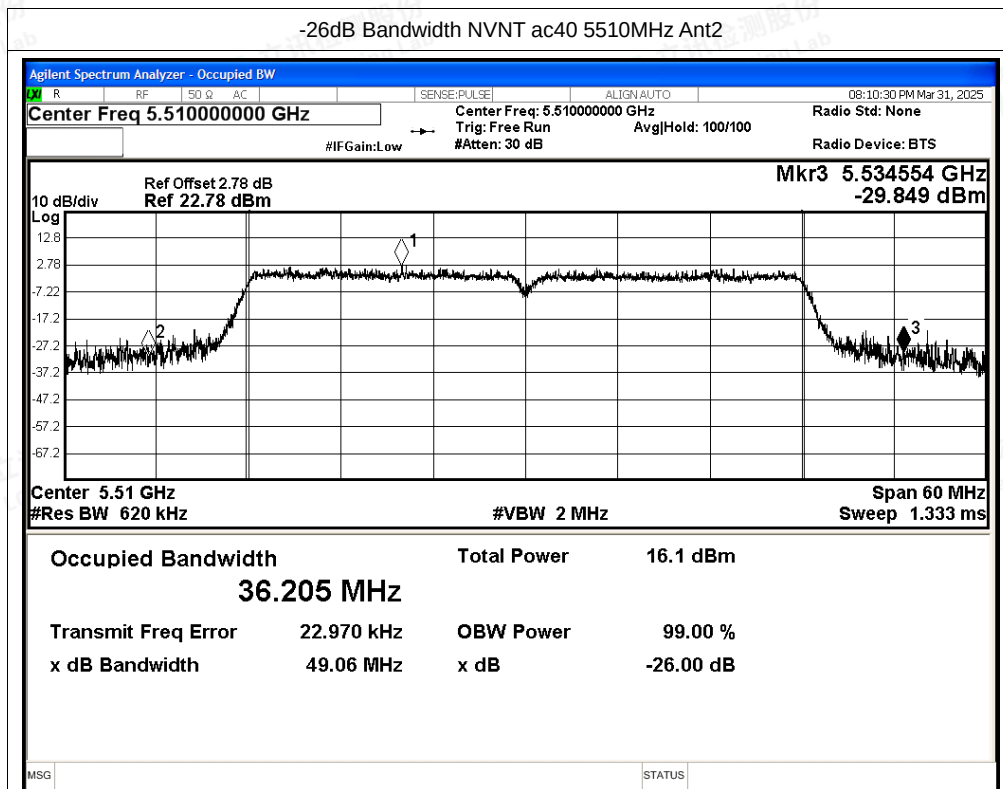

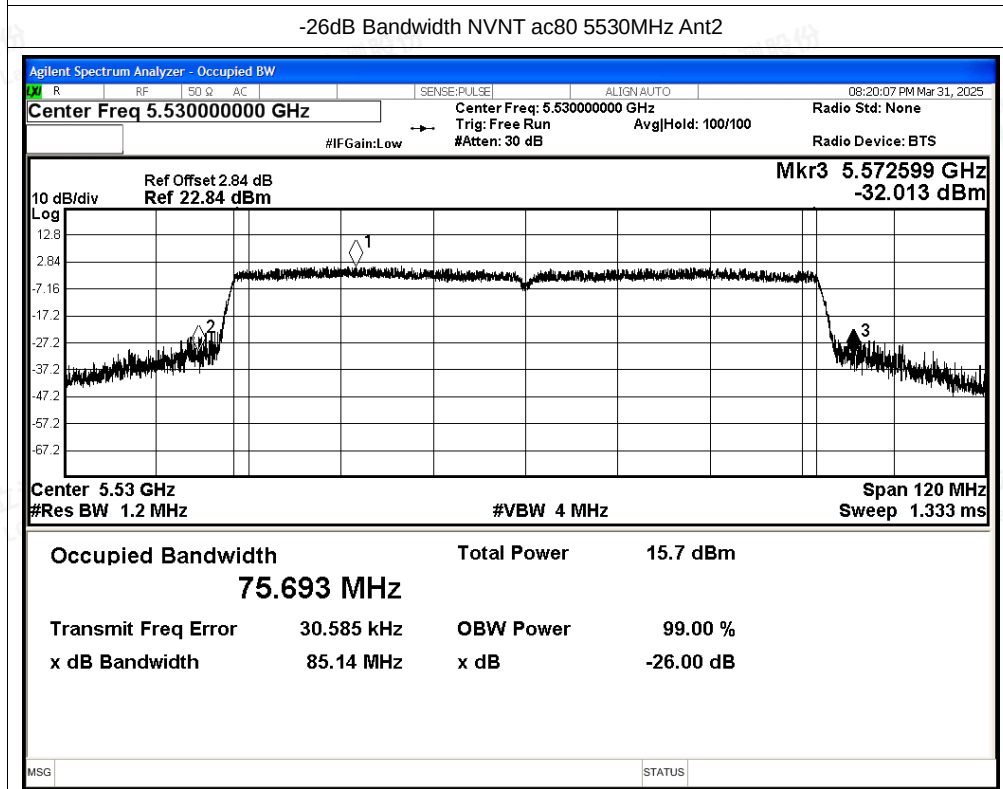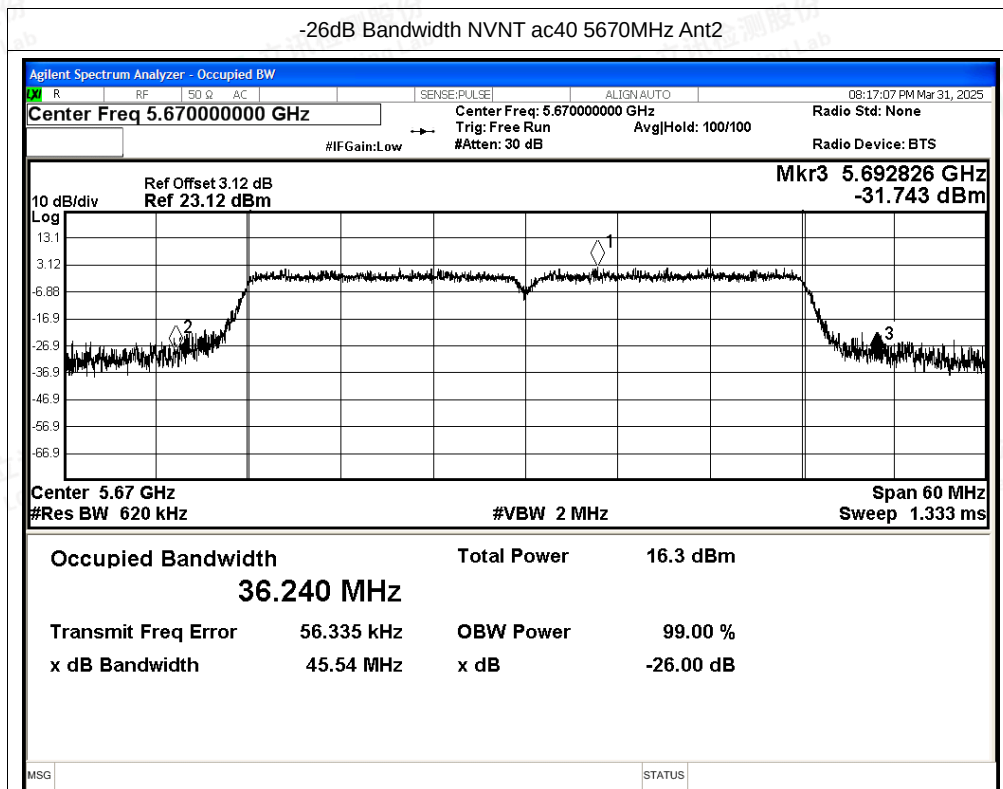

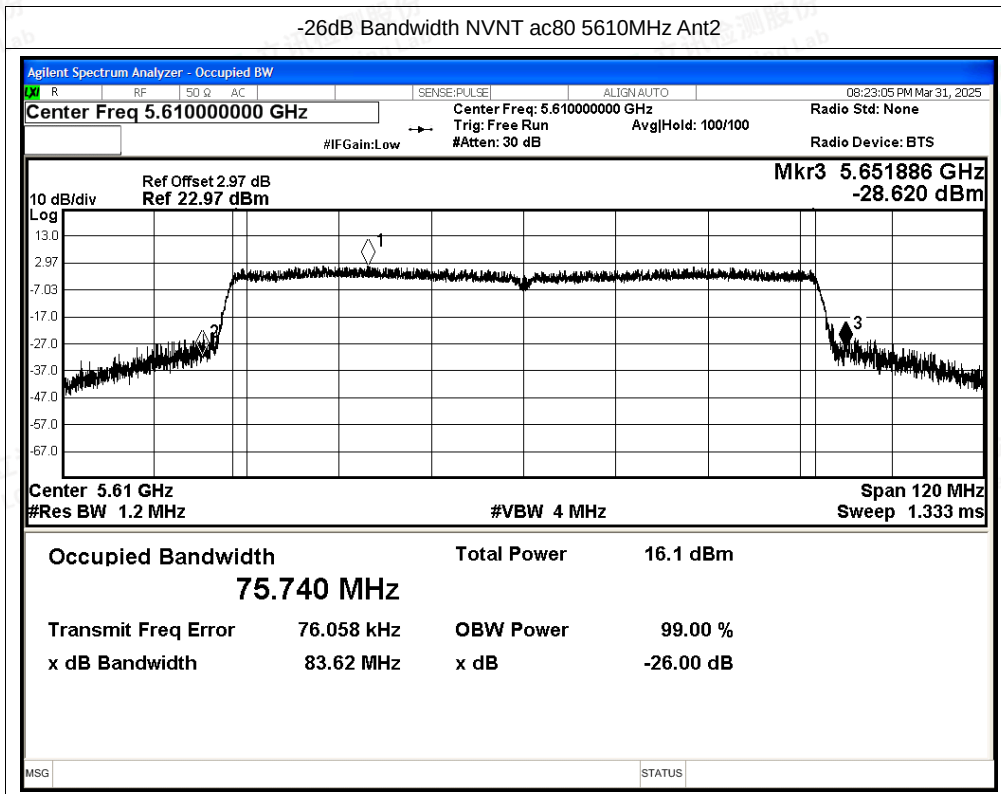



F.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	11.71	0.1	11.81	24	Pass
NVNT	a	5580	Ant1	11.74	0.1	11.84	24	Pass
NVNT	a	5700	Ant1	11.4	0.1	11.5	24	Pass
NVNT	n20	5500	Ant1	10.98	0.12	11.1	24	Pass
NVNT	n20	5580	Ant1	11.09	0.12	11.21	24	Pass
NVNT	n20	5700	Ant1	10.8	0.12	10.92	24	Pass
NVNT	n40	5510	Ant1	9.84	0.12	9.96	24	Pass
NVNT	n40	5550	Ant1	9.81	0.12	9.93	24	Pass
NVNT	n40	5670	Ant1	9.89	0.12	10.01	24	Pass
NVNT	ac20	5500	Ant1	10.99	0.12	11.11	24	Pass
NVNT	ac20	5580	Ant1	11.04	0.12	11.16	24	Pass
NVNT	ac20	5700	Ant1	11.11	0.12	11.23	24	Pass
NVNT	ac40	5510	Ant1	9.77	0.12	9.89	24	Pass
NVNT	ac40	5550	Ant1	9.74	0.12	9.86	24	Pass
NVNT	ac40	5670	Ant1	9.93	0.12	10.05	24	Pass
NVNT	ac80	5530	Ant1	8.7	0.25	8.95	24	Pass
NVNT	ac80	5610	Ant1	9.12	0.25	9.37	24	Pass





Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant2	11.76	0.24	12	24	Pass
NVNT	a	5580	Ant2	11.9	0.24	12.14	24	Pass
NVNT	a	5700	Ant2	11.82	0.24	12.06	24	Pass
NVNT	n20	5500	Ant2	11.92	0.28	12.2	24	Pass
NVNT	n20	5580	Ant2	12.08	0.28	12.36	24	Pass
NVNT	n20	5700	Ant2	12.09	0.28	12.37	24	Pass
NVNT	n40	5510	Ant2	9.98	0.12	10.1	24	Pass
NVNT	n40	5550	Ant2	10	0.12	10.12	24	Pass
NVNT	n40	5670	Ant2	10.1	0.12	10.22	24	Pass
NVNT	ac20	5500	Ant2	11.01	0.28	11.29	24	Pass
NVNT	ac20	5580	Ant2	11.2	0.28	11.48	24	Pass
NVNT	ac20	5700	Ant2	11.21	0.28	11.49	24	Pass
NVNT	ac40	5510	Ant2	9.88	0.12	10	24	Pass
NVNT	ac40	5550	Ant2	9.9	0.12	10.02	24	Pass
NVNT	ac40	5670	Ant2	10.11	0.12	10.23	24	Pass
NVNT	ac80	5530	Ant2	8.99	0.25	9.24	24	Pass
NVNT	ac80	5610	Ant2	9.33	0.25	9.58	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



F.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	Ant1	1.12	0.1	1.22	11	Pass
NVNT	a	5580	Ant1	1.49	0.1	1.59	11	Pass
NVNT	a	5700	Ant1	0.83	0.1	0.93	11	Pass
NVNT	n20	5500	Ant1	0.61	0.12	0.73	11	Pass
NVNT	n20	5580	Ant1	0.26	0.12	0.38	11	Pass
NVNT	n20	5700	Ant1	0.25	0.12	0.37	11	Pass
NVNT	n40	5510	Ant1	-3.87	0.12	-3.75	11	Pass
NVNT	n40	5550	Ant1	-3.92	0.12	-3.8	11	Pass
NVNT	n40	5670	Ant1	-3.59	0.12	-3.47	11	Pass
NVNT	ac20	5500	Ant1	0.01	0.12	0.13	11	Pass
NVNT	ac20	5580	Ant1	0.29	0.12	0.41	11	Pass
NVNT	ac20	5700	Ant1	0.48	0.12	0.6	11	Pass
NVNT	ac40	5510	Ant1	-3.51	0.12	-3.39	11	Pass
NVNT	ac40	5550	Ant1	-3.99	0.12	-3.87	11	Pass
NVNT	ac40	5670	Ant1	-3.99	0.12	-3.87	11	Pass
NVNT	ac80	5530	Ant1	-7.8	0.25	-7.55	11	Pass
NVNT	ac80	5610	Ant1	-7.64	0.25	-7.39	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	Ant2	1.36	0.24	1.6	11	Pass
NVNT	a	5580	Ant2	1.52	0.24	1.76	11	Pass
NVNT	a	5700	Ant2	1.3	0.24	1.54	11	Pass
NVNT	n20	5500	Ant2	1.15	0.28	1.43	11	Pass
NVNT	n20	5580	Ant2	1.46	0.28	1.74	11	Pass
NVNT	n20	5700	Ant2	1.47	0.28	1.75	11	Pass
NVNT	n40	5510	Ant2	-3.55	0.12	-3.43	11	Pass
NVNT	n40	5550	Ant2	-3.31	0.12	-3.19	11	Pass
NVNT	n40	5670	Ant2	-3.38	0.12	-3.26	11	Pass
NVNT	ac20	5500	Ant2	0.17	0.28	0.45	11	Pass
NVNT	ac20	5580	Ant2	0.55	0.28	0.83	11	Pass
NVNT	ac20	5700	Ant2	0.47	0.28	0.75	11	Pass
NVNT	ac40	5510	Ant2	-3.81	0.12	-3.69	11	Pass
NVNT	ac40	5550	Ant2	-3.77	0.12	-3.65	11	Pass
NVNT	ac40	5670	Ant2	-3.81	0.12	-3.69	11	Pass
NVNT	ac80	5530	Ant2	-7.56	0.25	-7.31	11	Pass
NVNT	ac80	5610	Ant2	-7.53	0.25	-7.28	11	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity






Test Graphs



PSD NVNT a 5500MHz Ant1


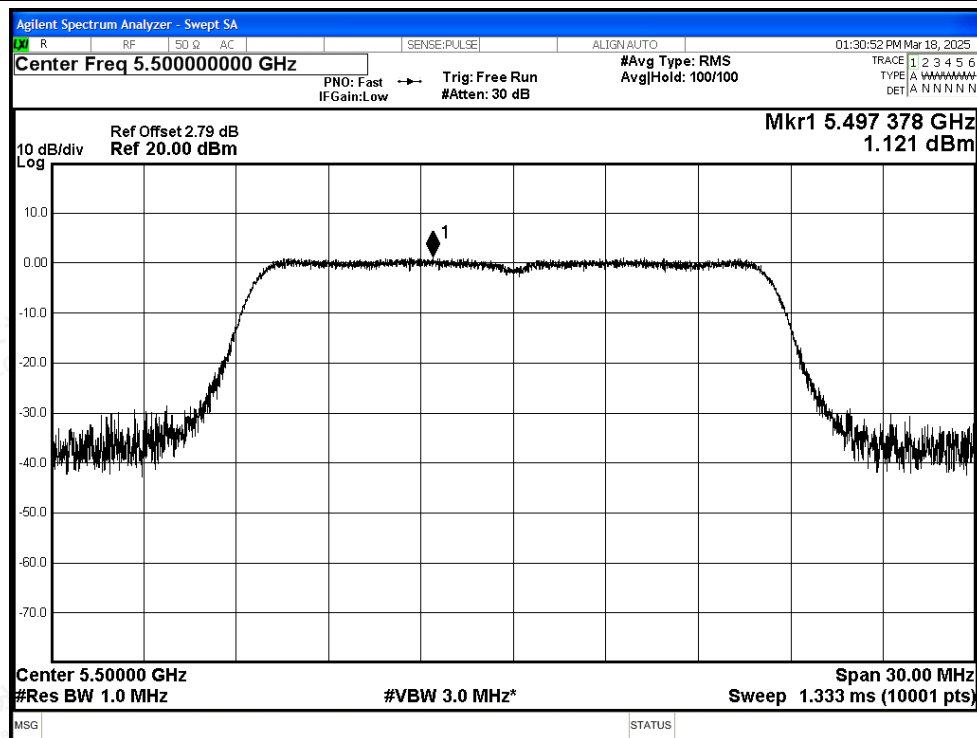




PSD NVNT a 5580MHz Ant1


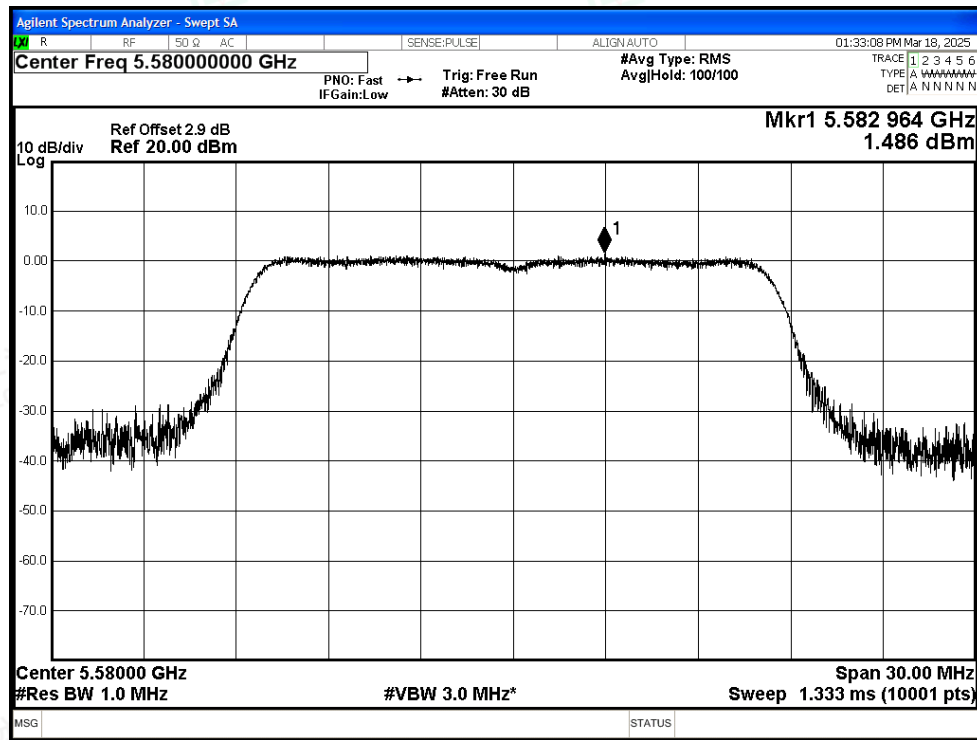


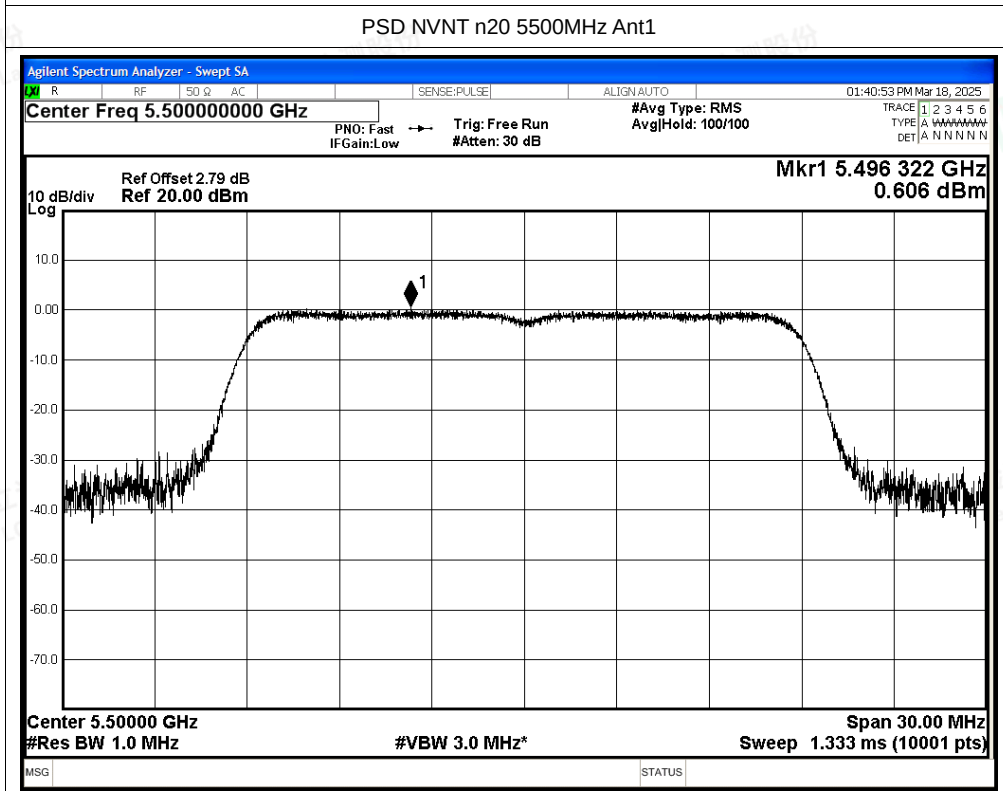
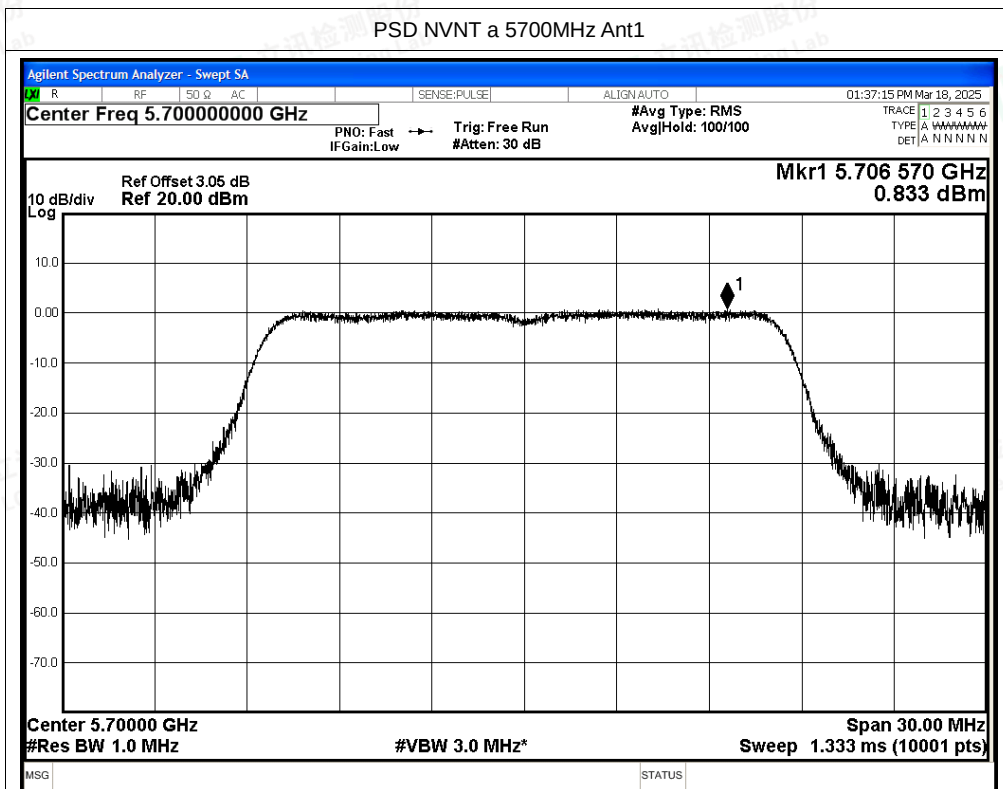


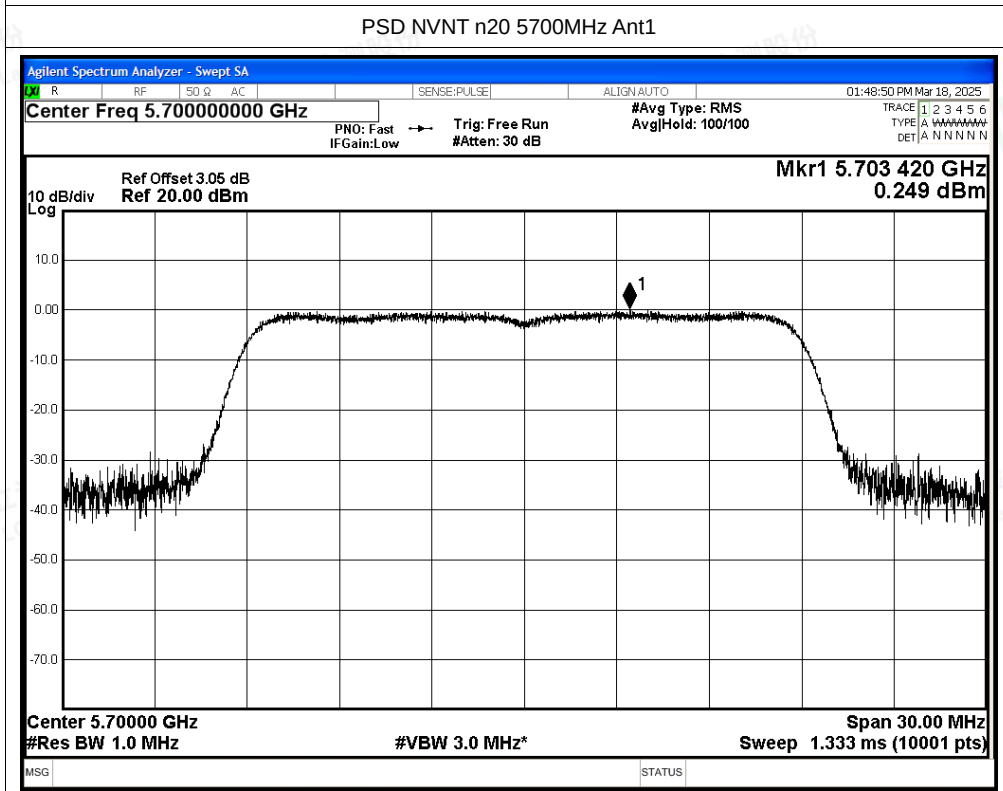
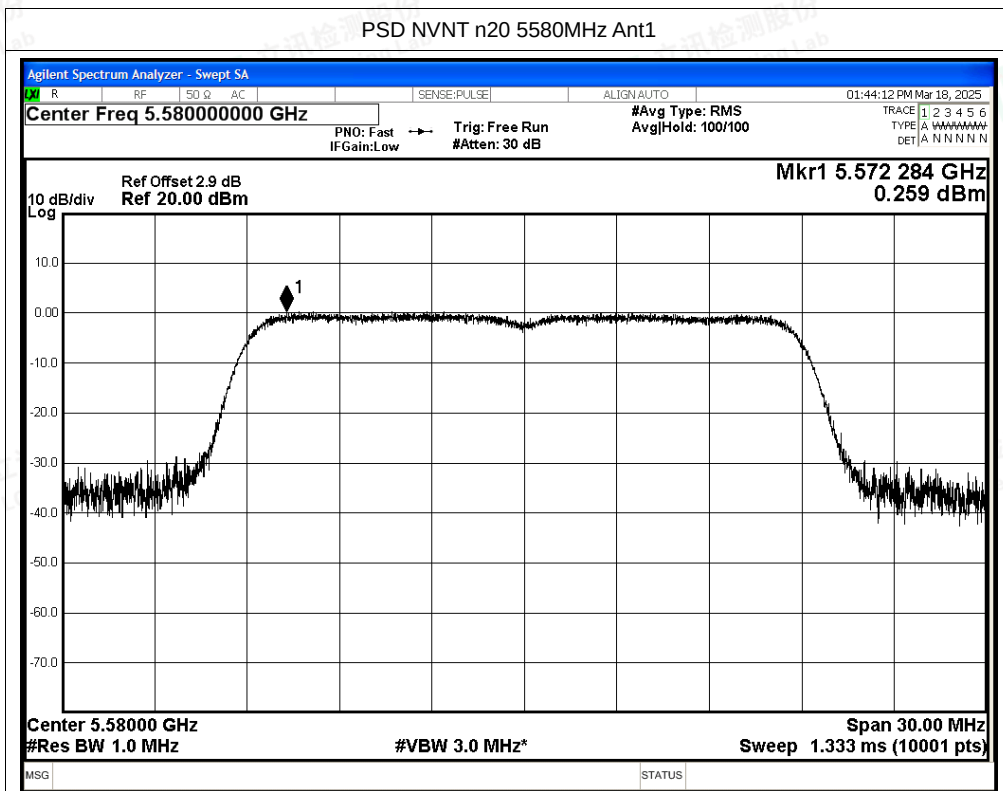


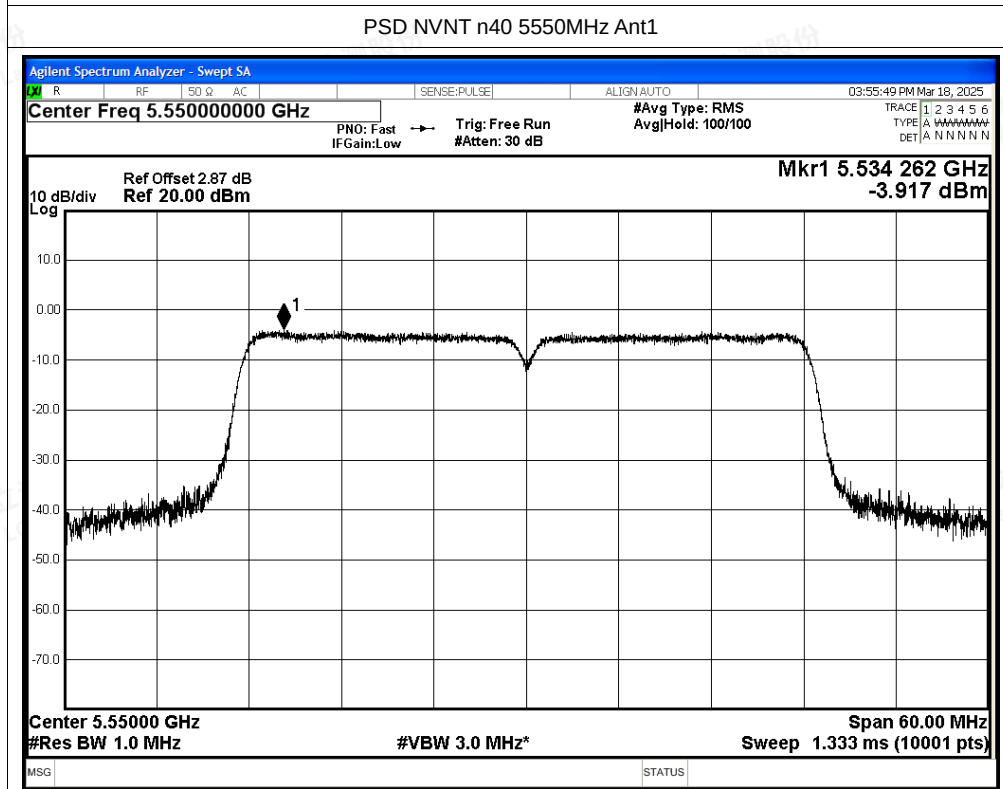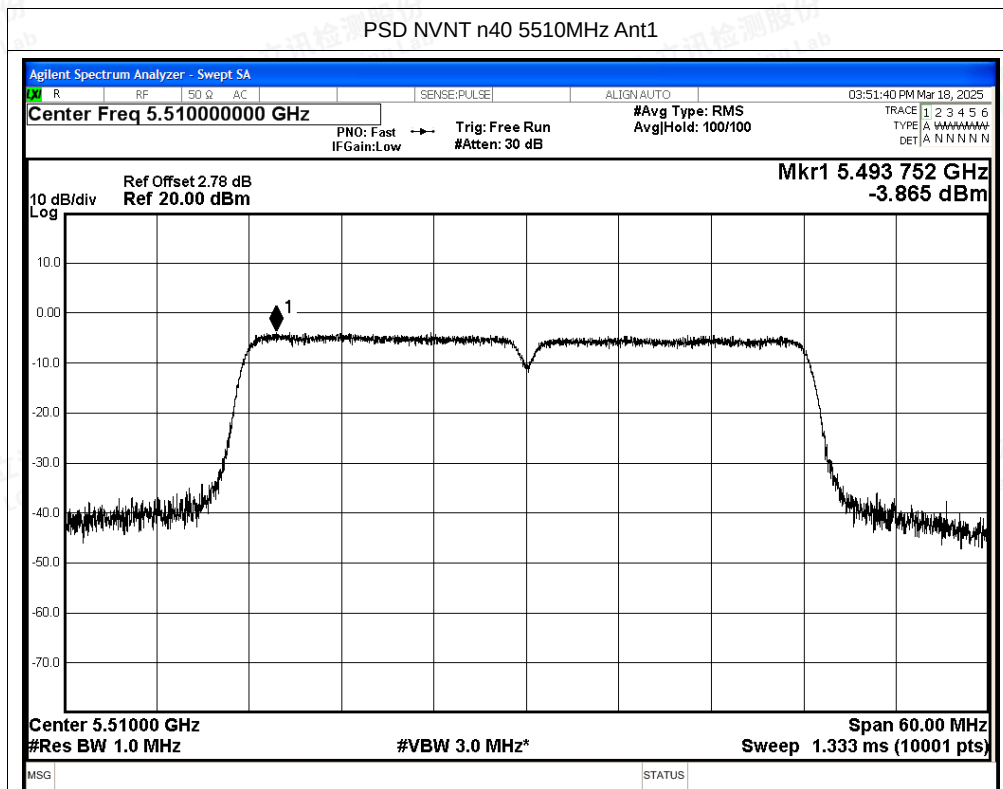


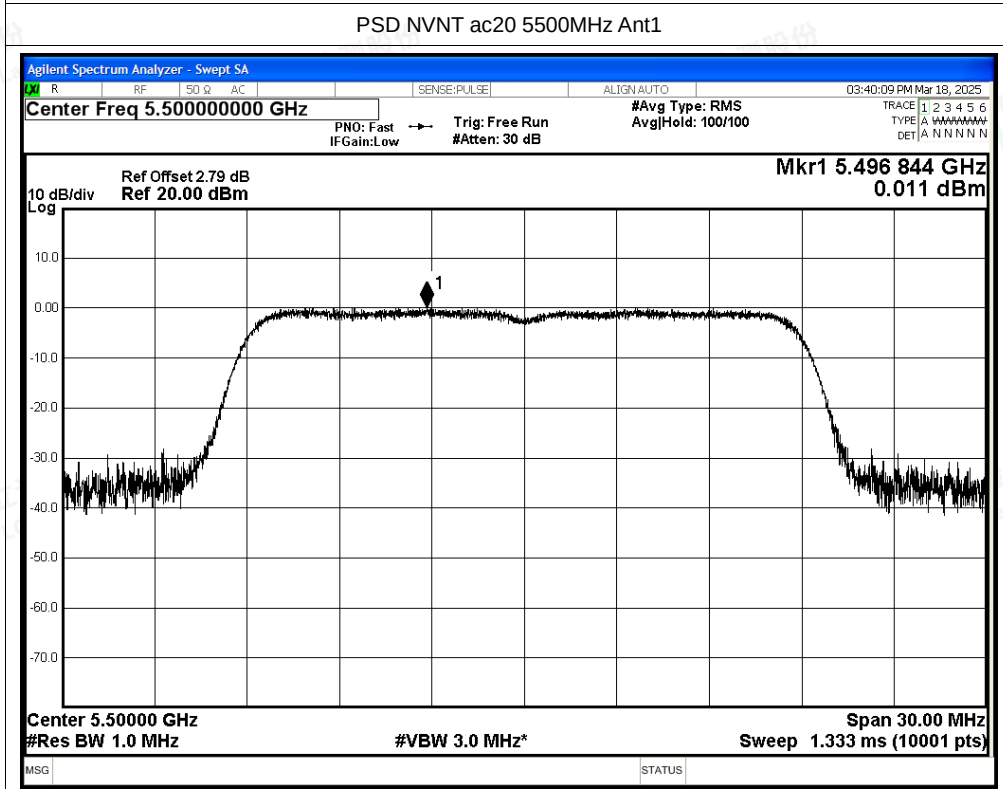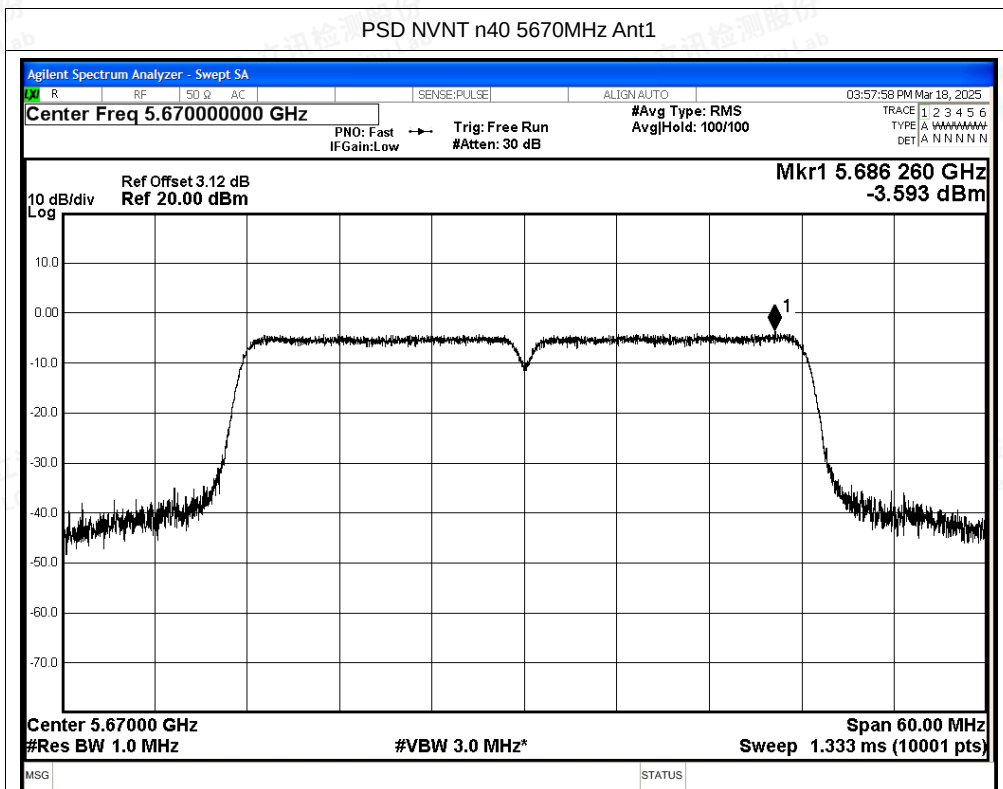

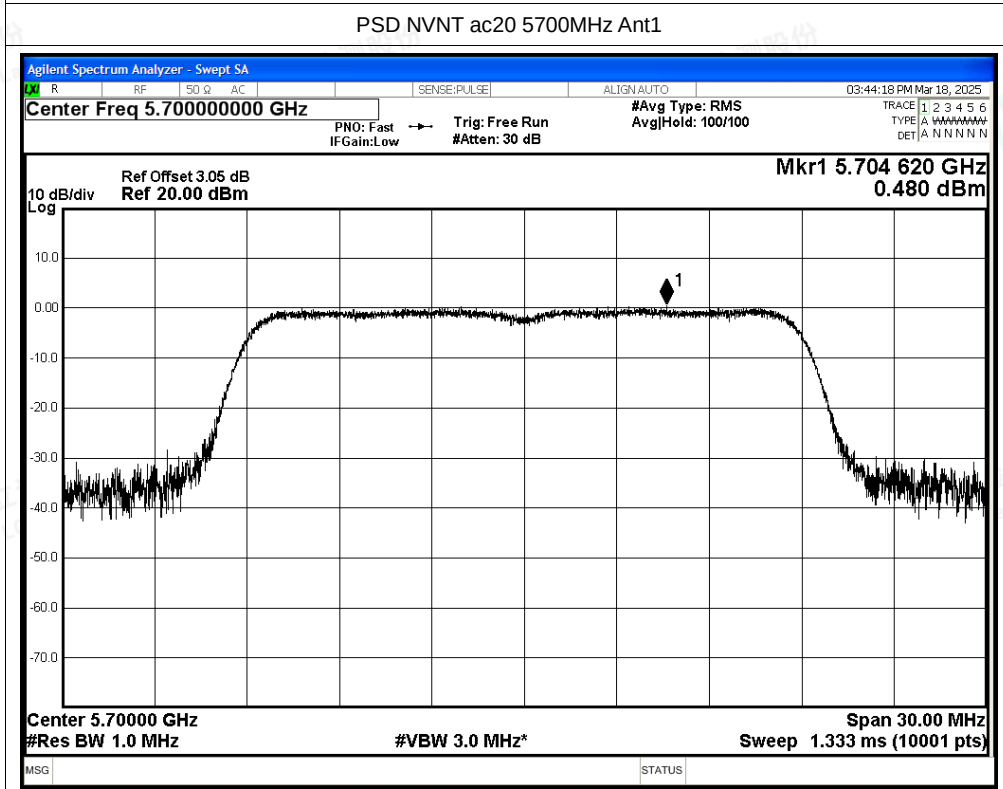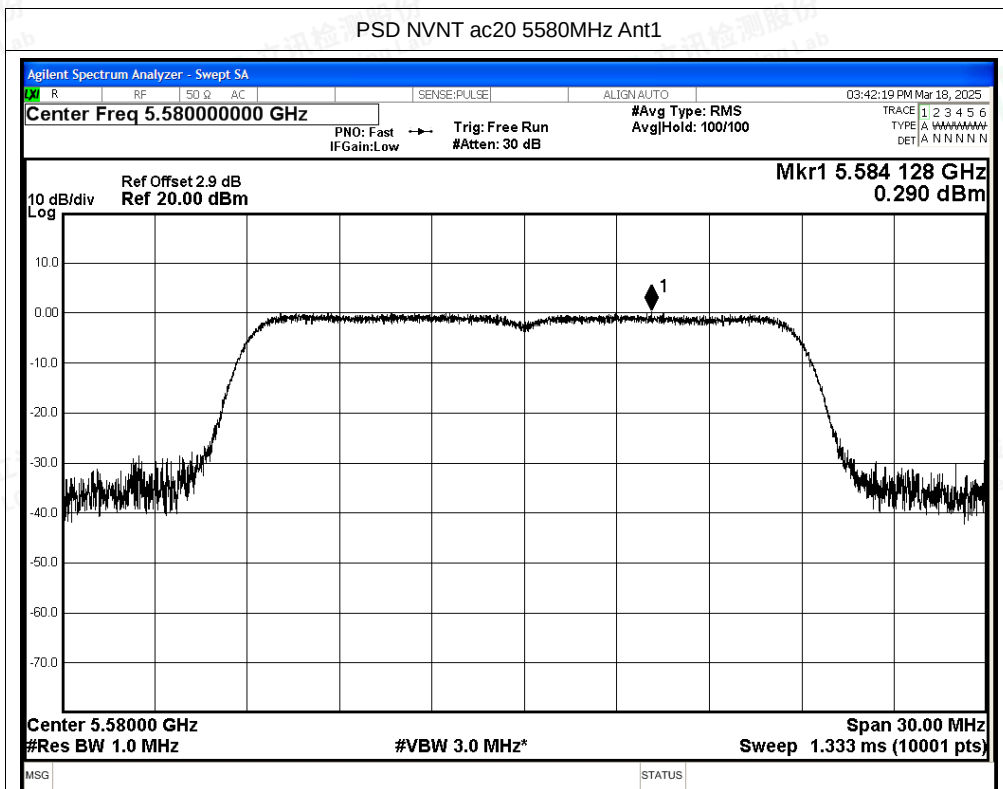

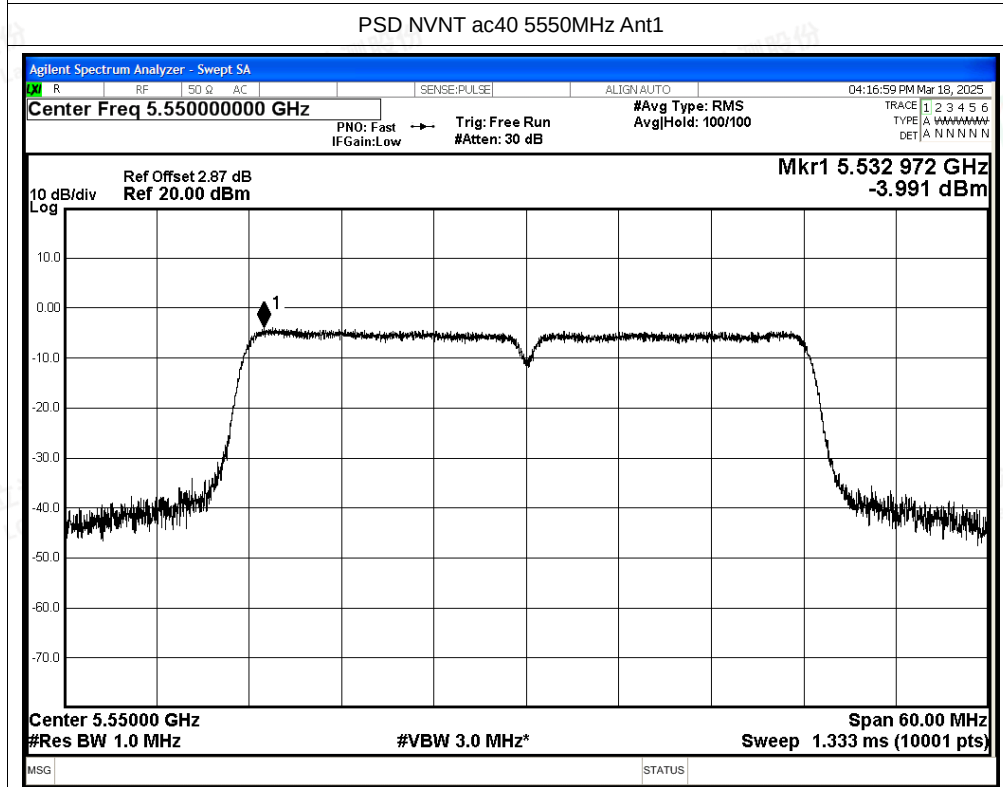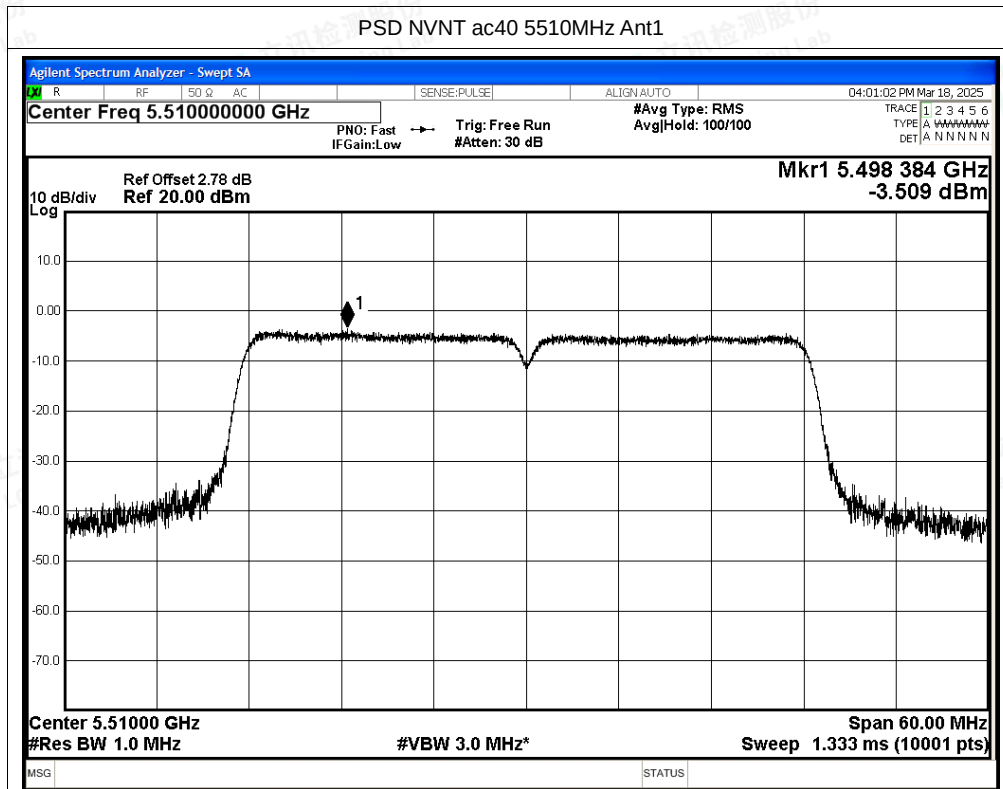

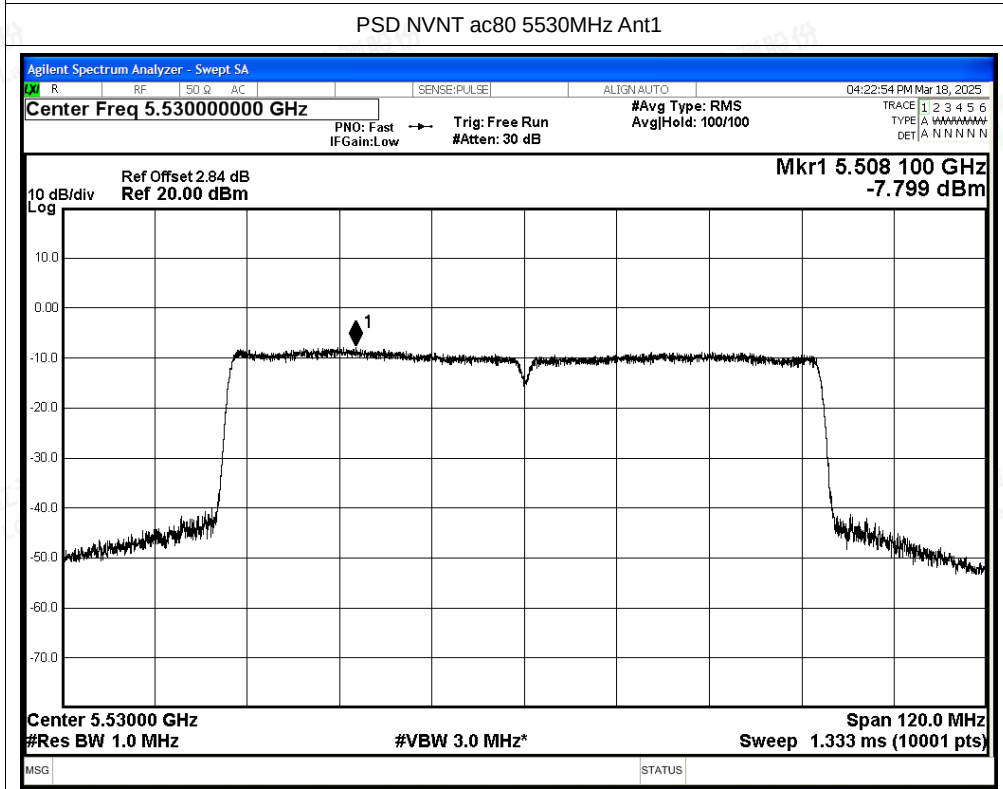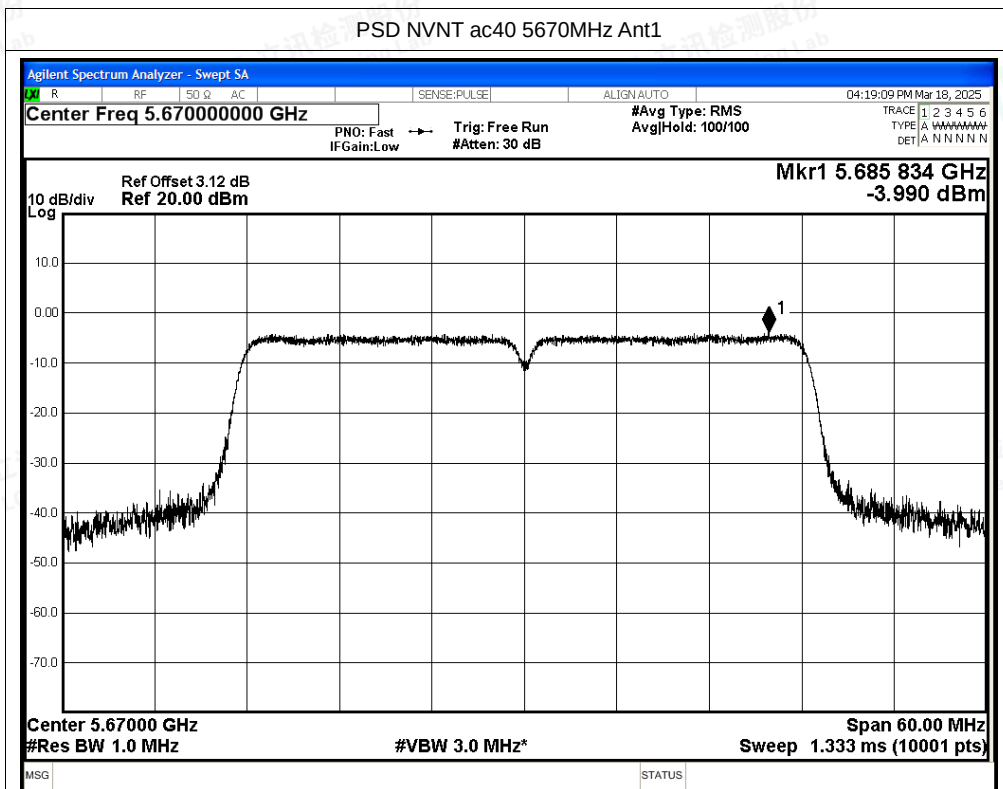


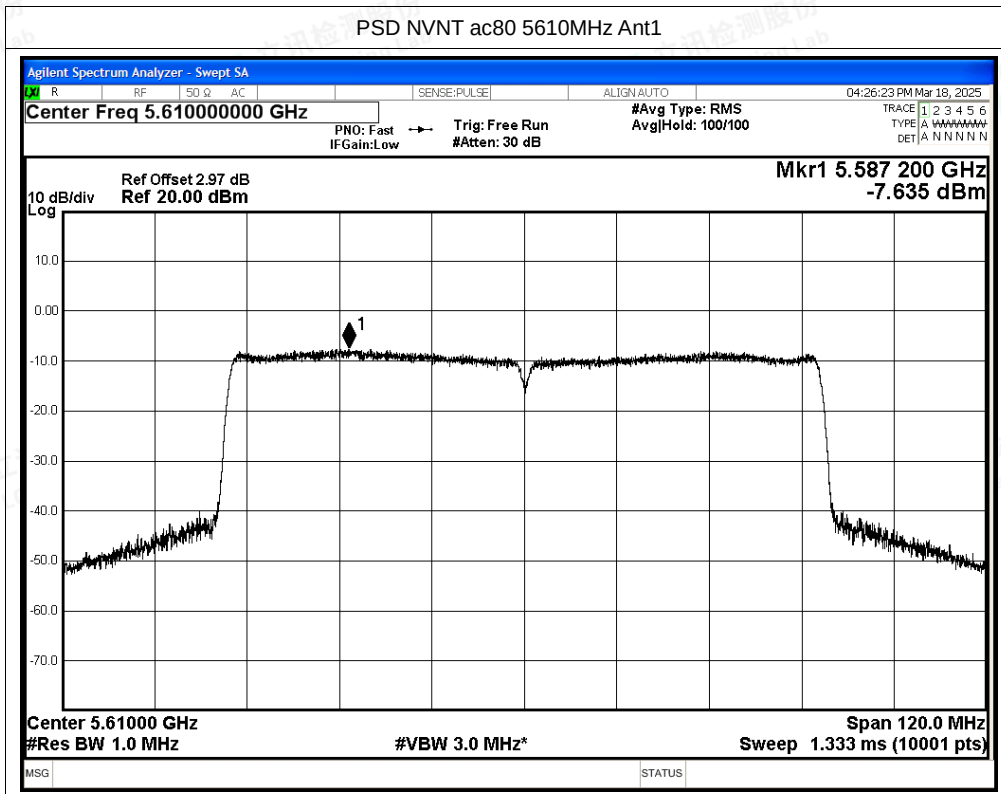






Test Graphs



PSD NVNT a 5500MHz Ant2


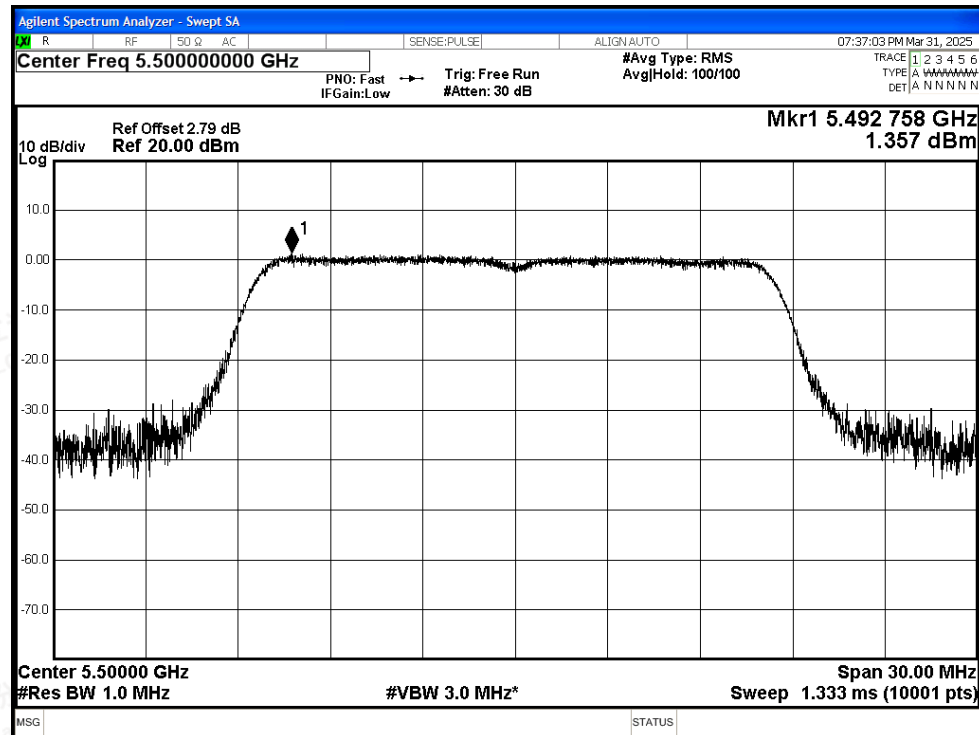




PSD NVNT a 5580MHz Ant2


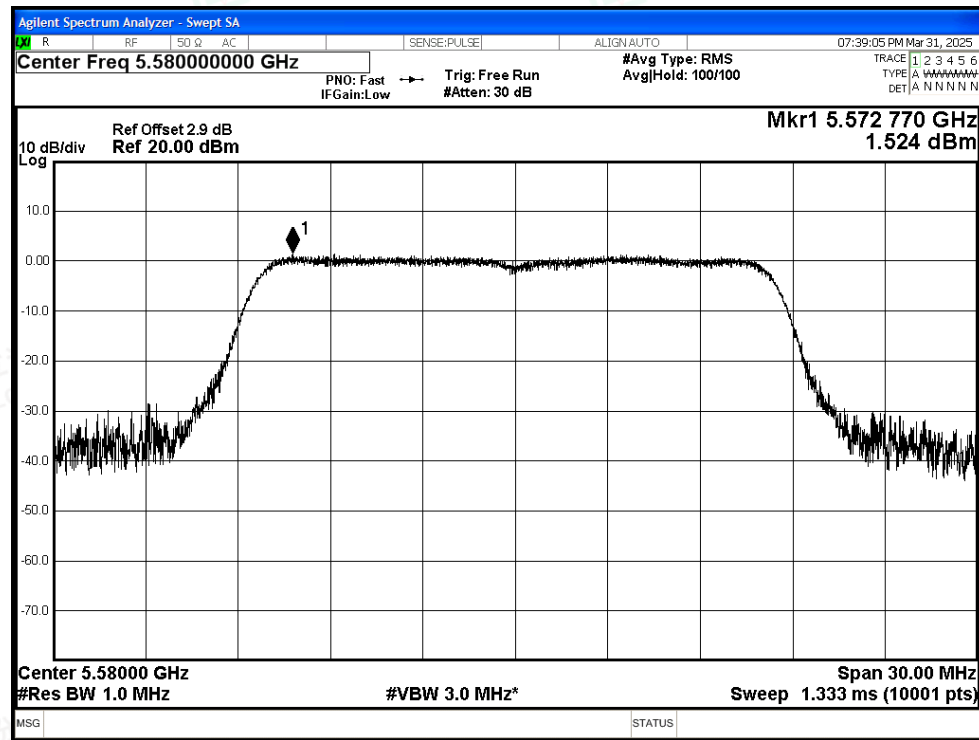


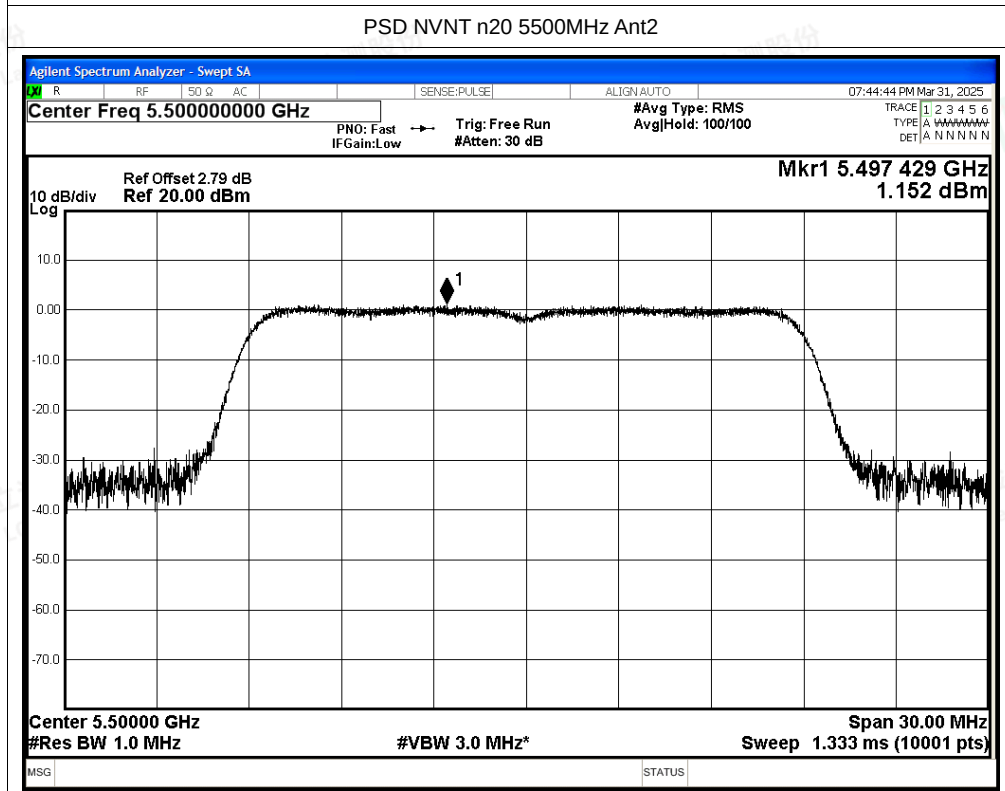
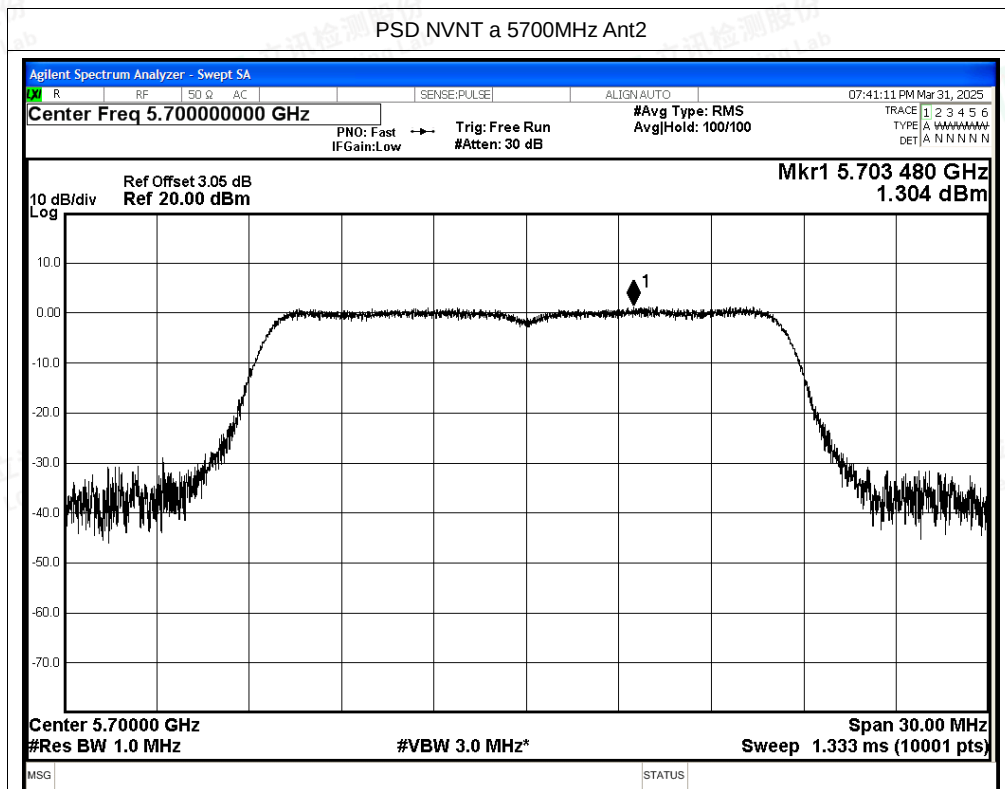


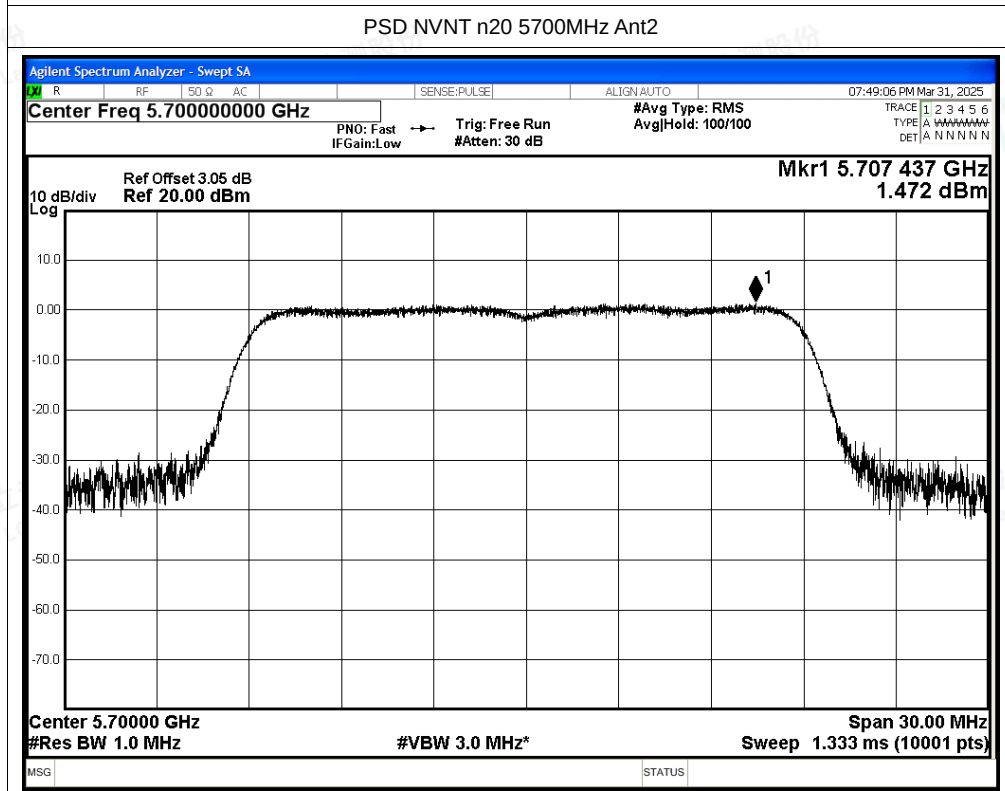
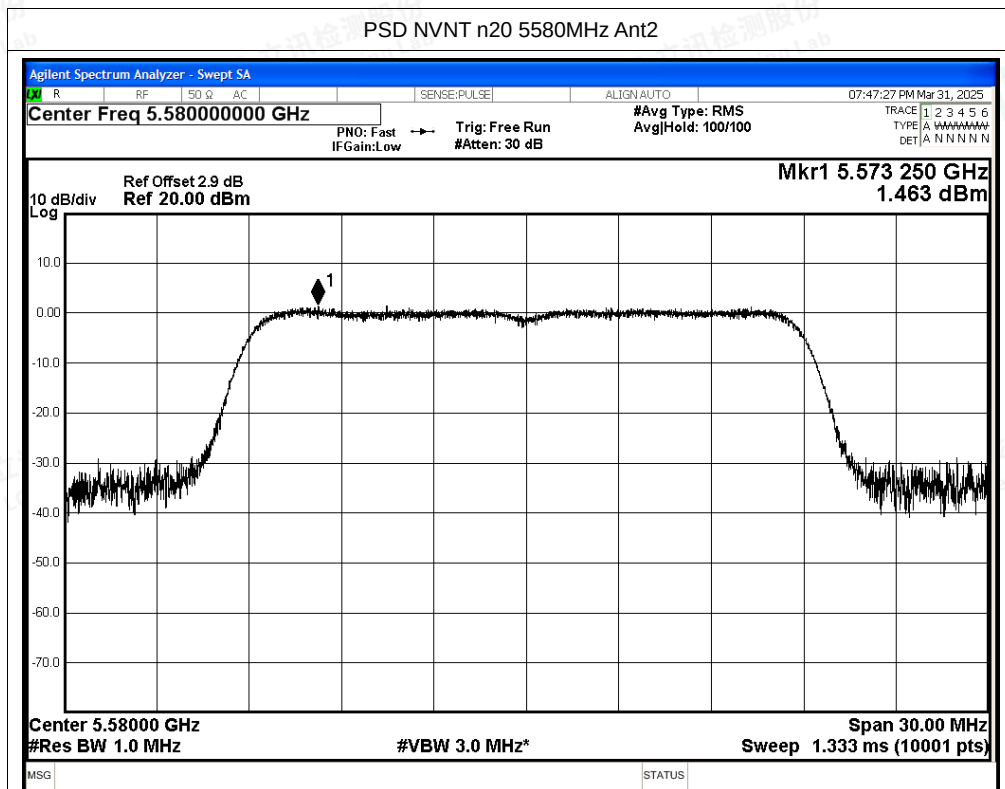


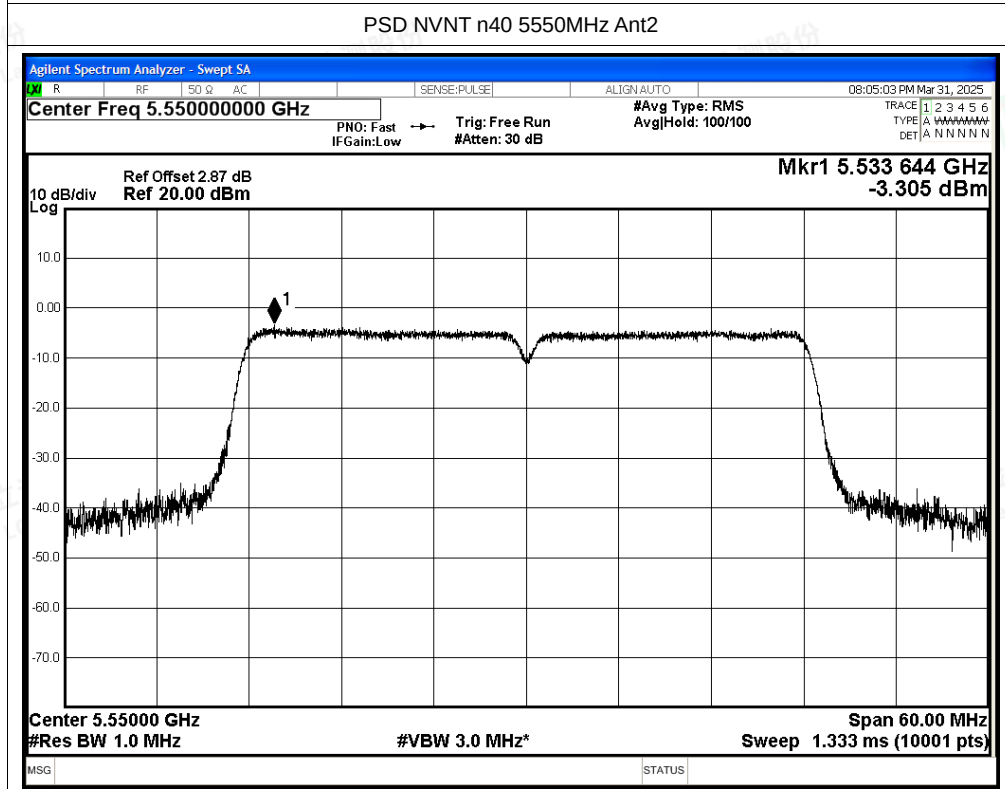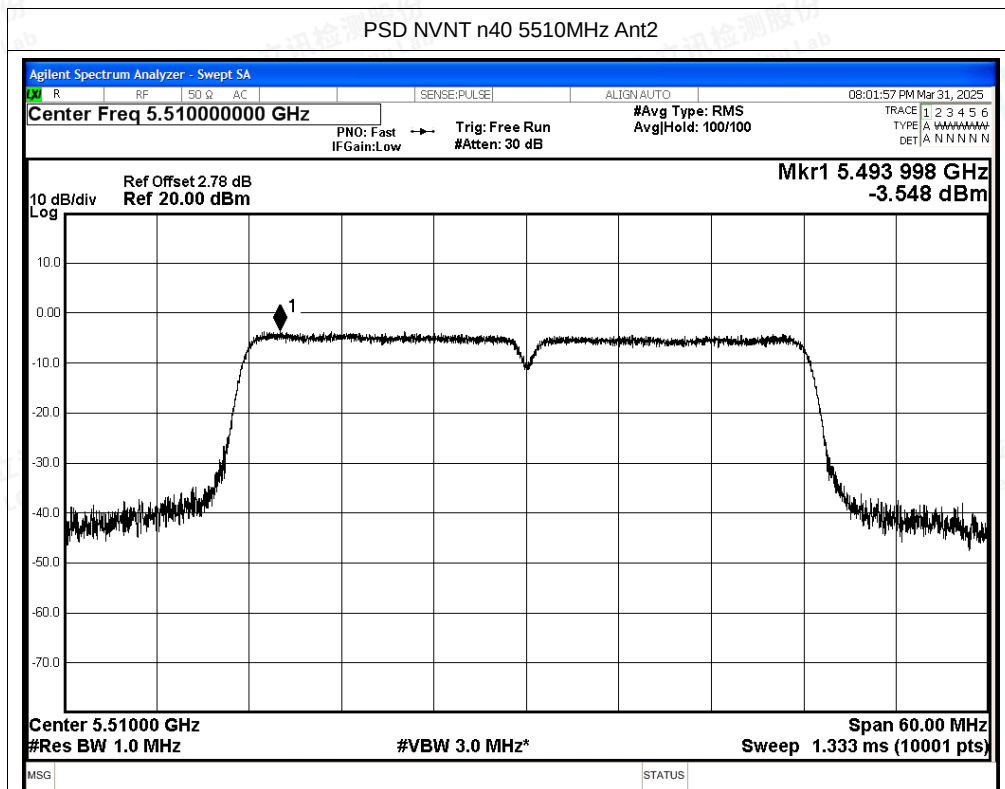


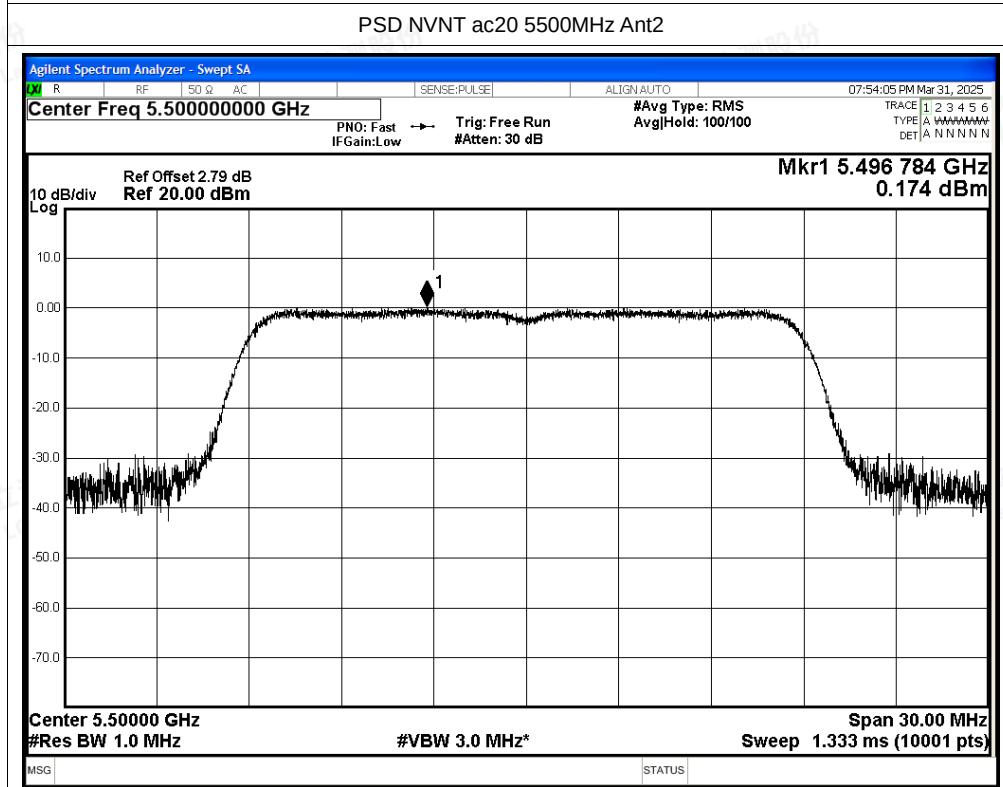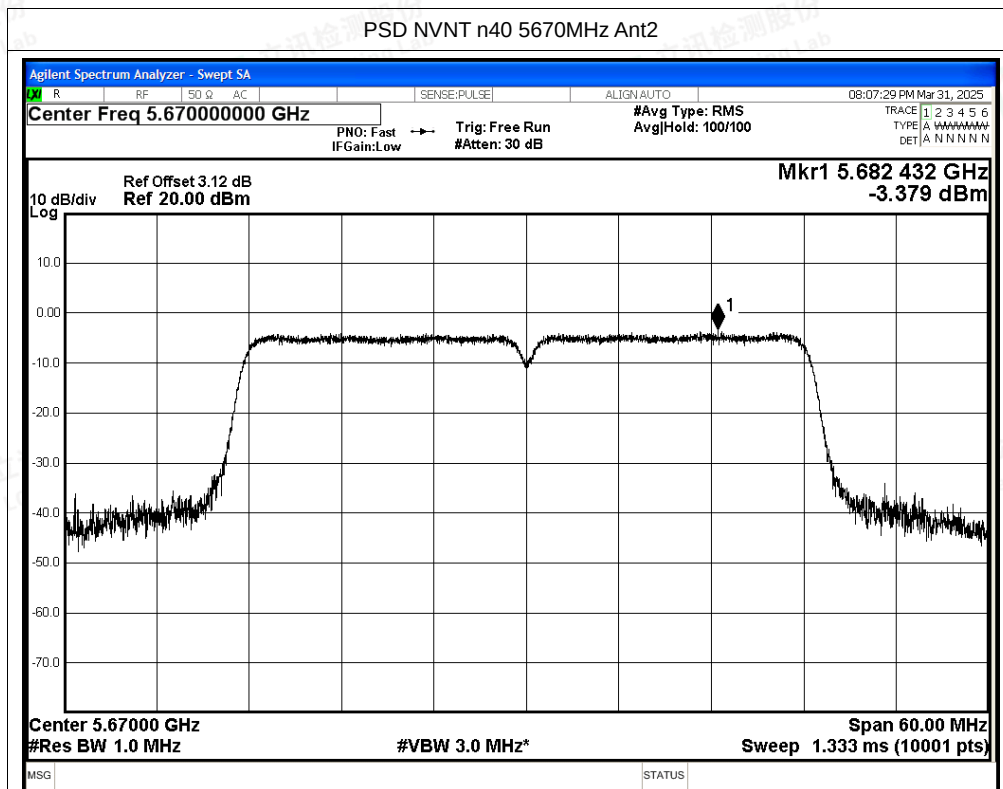

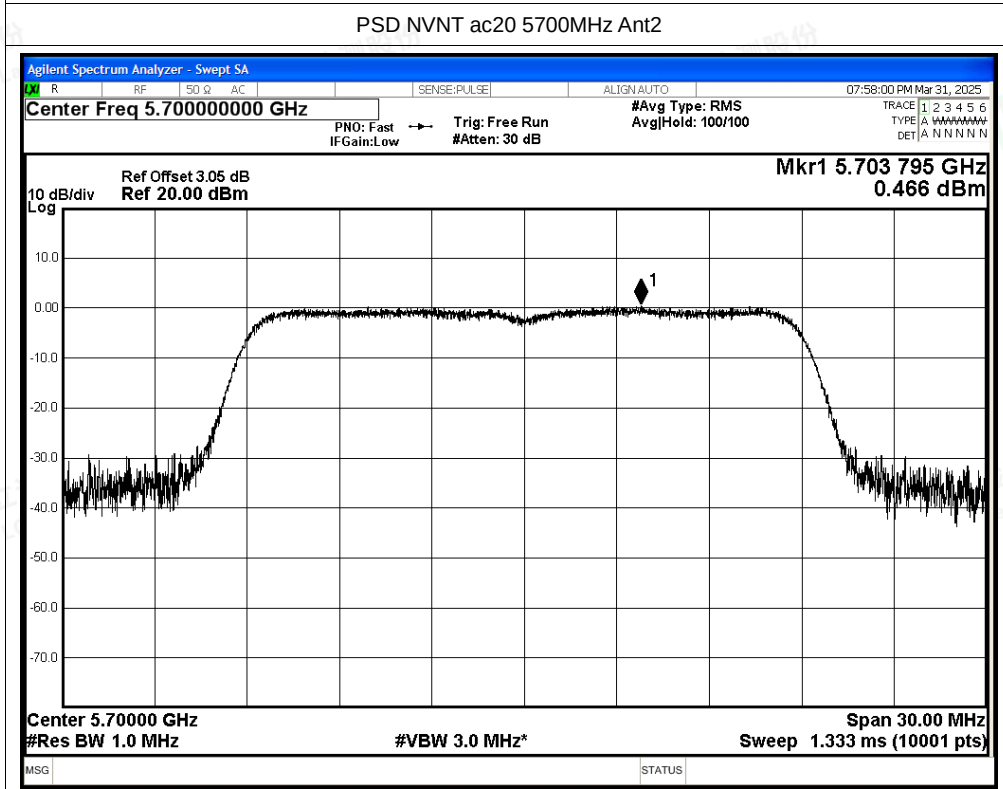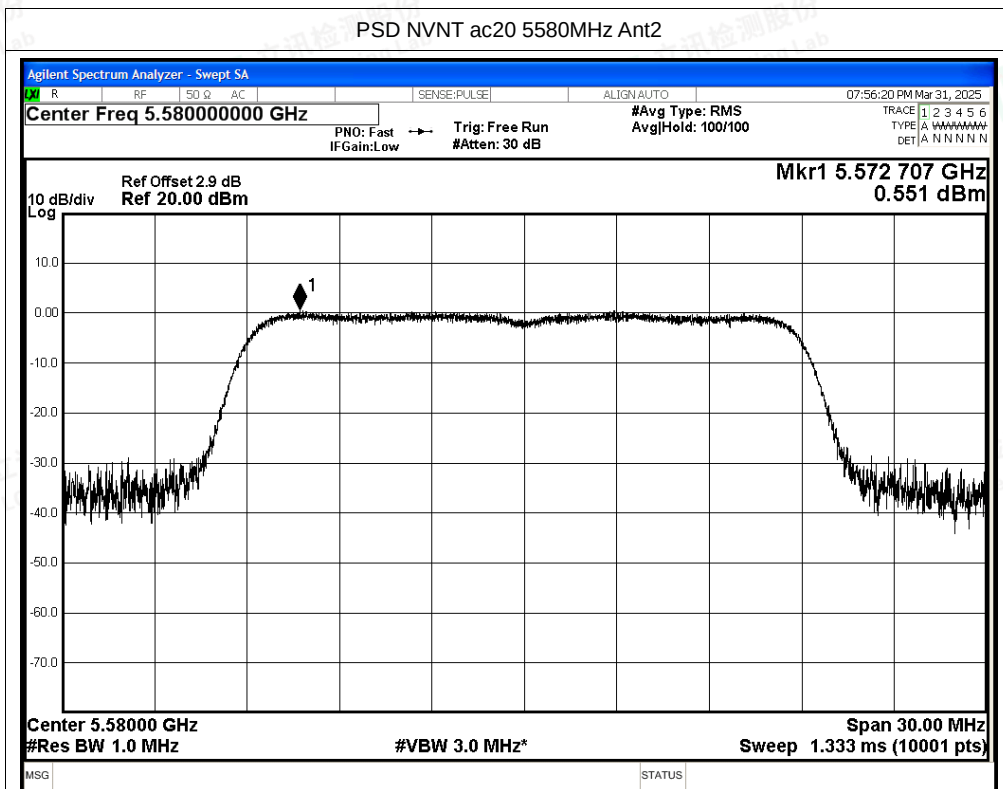

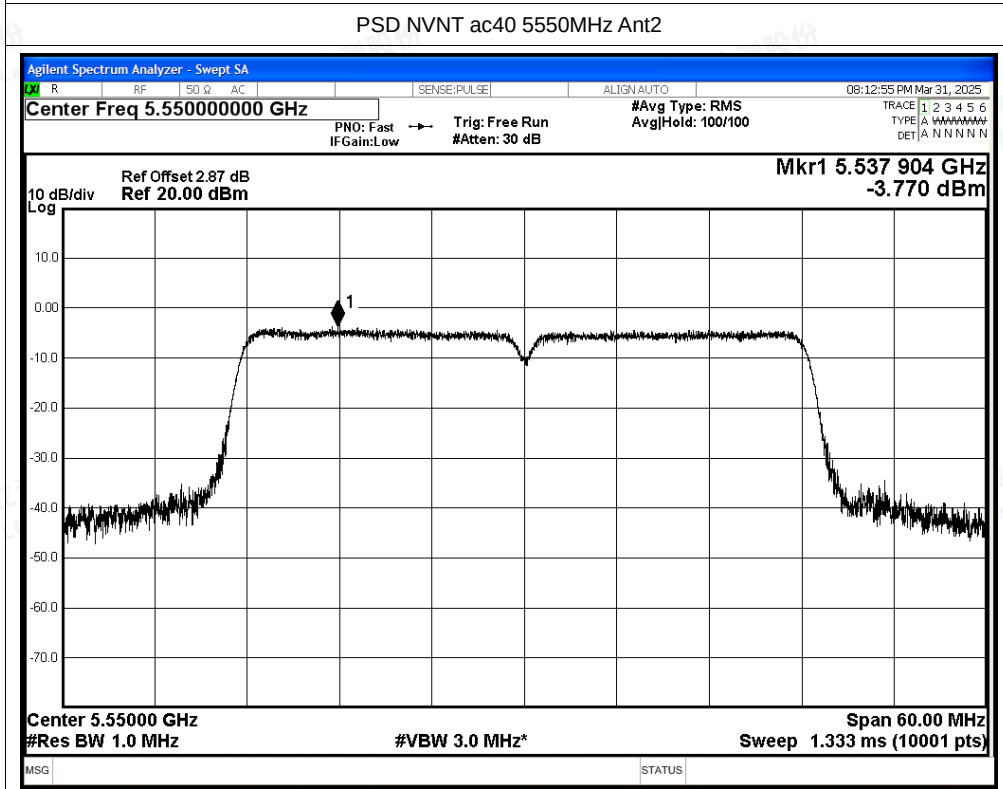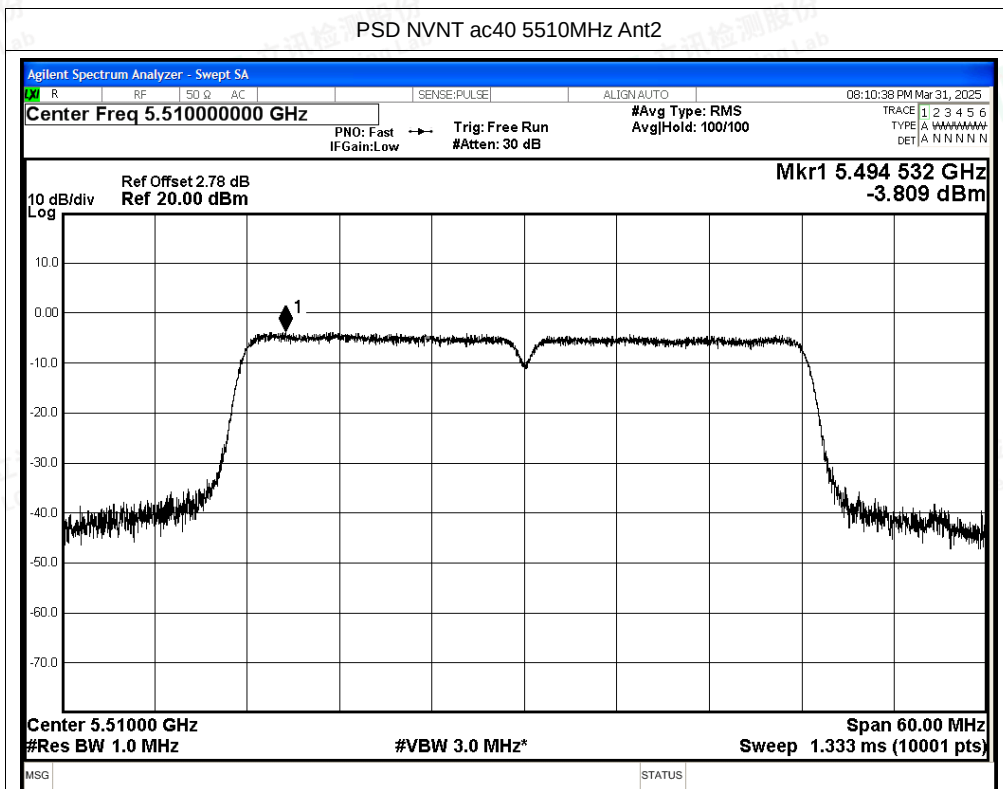

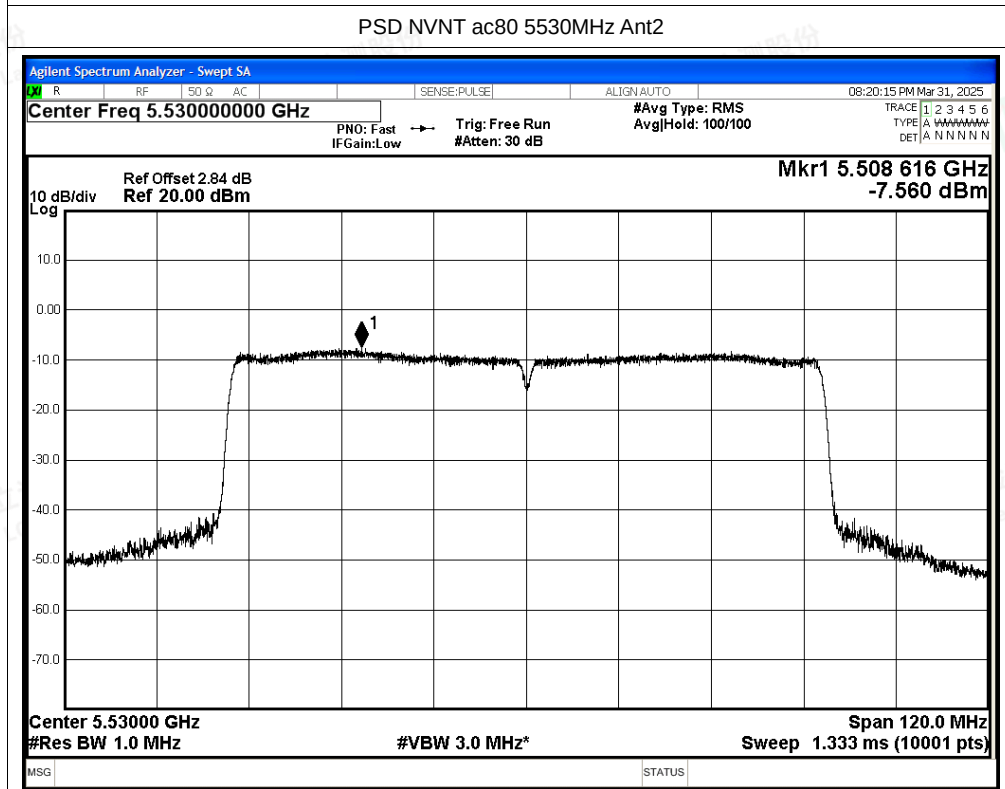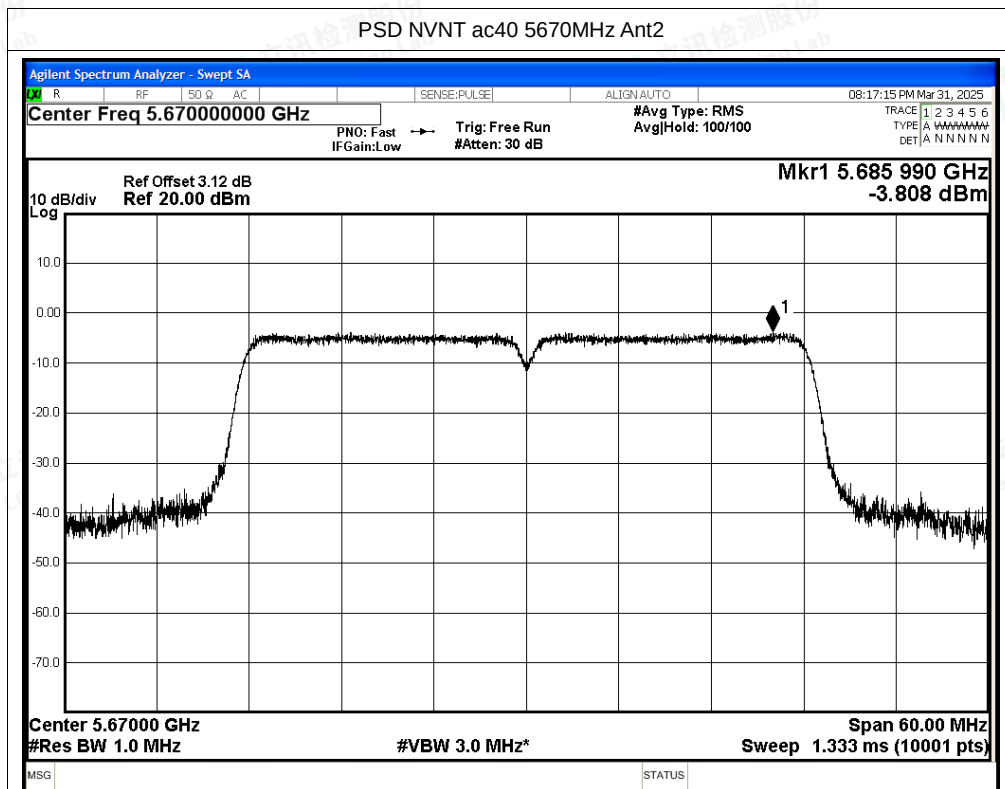

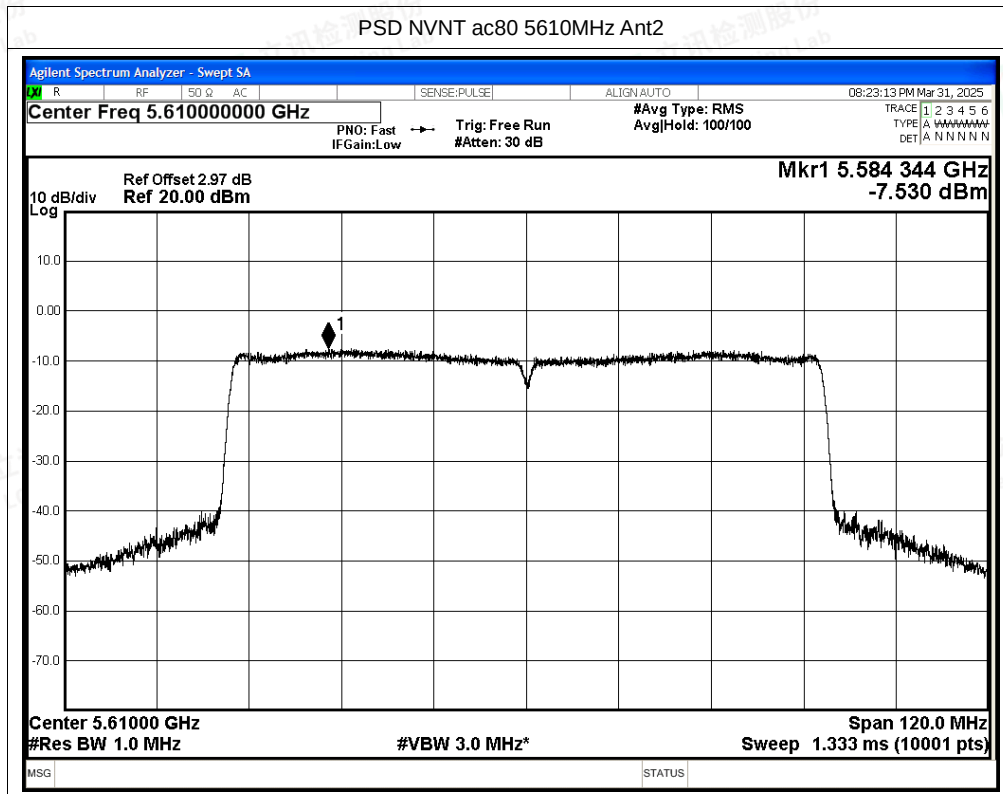



F.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5500	Ant1	5460	-46.28	2	-	50.95	Peak	68.2	Pass
NVNT	a	5500	Ant1	5460	-54.66	2	0.1	42.67	Average	54	Pass
NVNT	a	5500	Ant1	5470	-30.41	2	-	66.82	Peak	68.2	Pass
NVNT	a	5500	Ant1	5468.6	-49.84	2	0.1	47.49	Average	54	Pass
NVNT	a	5500	Ant1	5470	-30.41	2	-	66.82	Peak	68.2	Pass
NVNT	a	5500	Ant1	5470	-49.91	2	0.1	47.42	Average	54	Pass
NVNT	a	5700	Ant1	5725	-33.03	2	-	64.2	Peak	68.2	Pass
NVNT	a	5700	Ant1	5725	-46.49	2	0.1	50.84	Average	54	Pass
NVNT	a	5700	Ant1	5725	-33.03	2	-	64.2	Peak	68.2	Pass
NVNT	a	5700	Ant1	5725.4	-46.2	2	0.1	51.13	Average	54	Pass
NVNT	a	5700	Ant1	5735	-45.47	2	-	51.76	Peak	68.2	Pass
NVNT	a	5700	Ant1	5735	-54.14	2	0.1	43.19	Average	54	Pass
NVNT	n20	5500	Ant1	5460	-46.26	2	-	50.97	Peak	68.2	Pass
NVNT	n20	5500	Ant1	5460	-54.89	2	0.12	42.46	Average	54	Pass
NVNT	n20	5500	Ant1	5469.4	-34.78	2	-	62.45	Peak	68.2	Pass
NVNT	n20	5500	Ant1	5470	-49.03	2	0.12	48.32	Average	54	Pass
NVNT	n20	5500	Ant1	5470	-38.55	2	-	58.68	Peak	68.2	Pass
NVNT	n20	5500	Ant1	5470	-49.03	2	0.12	48.32	Average	54	Pass
NVNT	n20	5700	Ant1	5725	-32.21	2	-	65.02	Peak	68.2	Pass
NVNT	n20	5700	Ant1	5725	-45.06	2	0.12	52.29	Average	54	Pass
NVNT	n20	5700	Ant1	5729.12	-31.78	2	-	65.45	Peak	68.2	Pass
NVNT	n20	5700	Ant1	5725.67	-46.13	2	0.12	51.22	Average	54	Pass
NVNT	n20	5700	Ant1	5735	-45.59	2	-	51.64	Peak	68.2	Pass
NVNT	n20	5700	Ant1	5735	-54.12	2	0.12	43.23	Average	54	Pass
NVNT	n40	5510	Ant1	5460	-45.39	2	-	51.84	Peak	68.2	Pass
NVNT	n40	5510	Ant1	5460	-52.37	2	0.12	44.98	Average	54	Pass
NVNT	n40	5510	Ant1	5469.4	-32.18	2	-	65.05	Peak	68.2	Pass
NVNT	n40	5510	Ant1	5469.8	-48.6	2	0.12	48.75	Average	54	Pass
NVNT	n40	5510	Ant1	5470	-38.17	2	-	59.06	Peak	68.2	Pass
NVNT	n40	5510	Ant1	5470	-48.63	2	0.12	48.72	Average	54	Pass
NVNT	n40	5670	Ant1	5725	-46.96	2	-	50.27	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5725	-55.68	2	0.12	41.67	Average	54	Pass
NVNT	n40	5670	Ant1	5728.4	-46.53	2	-	50.7	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5731.4	-55.55	2	0.12	41.8	Average	54	Pass
NVNT	n40	5670	Ant1	5735	-48.86	2	-	48.37	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5735	-56.59	2	0.12	40.76	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




NVNT	ac20	5500	Ant1	5460	-45.26	2	-	51.97	Peak	68.2	Pass
NVNT	ac20	5500	Ant1	5460	-53.72	2	0.12	43.63	Average	54	Pass
NVNT	ac20	5500	Ant1	5468.8	-35.63	2	-	61.6	Peak	68.2	Pass
NVNT	ac20	5500	Ant1	5469.2	-49.09	2	0.12	48.26	Average	54	Pass
NVNT	ac20	5500	Ant1	5470	-36.88	2	-	60.35	Peak	68.2	Pass
NVNT	ac20	5500	Ant1	5470	-49.57	2	0.12	47.78	Average	54	Pass
NVNT	ac20	5700	Ant1	5725	-29.4	2	-	67.83	Peak	68.2	Pass
NVNT	ac20	5700	Ant1	5725	-44.73	2	0.12	52.62	Average	54	Pass
NVNT	ac20	5700	Ant1	5727.6	-29.13	2	-	68.1	Peak	68.2	Pass
NVNT	ac20	5700	Ant1	5726.8	-44.64	2	0.12	52.71	Average	54	Pass
NVNT	ac20	5700	Ant1	5735	-42.21	2	-	55.02	Peak	68.2	Pass
NVNT	ac20	5700	Ant1	5735	-54.07	2	0.12	43.28	Average	54	Pass
NVNT	ac40	5510	Ant1	5460	-43.67	2	-	53.56	Peak	68.2	Pass
NVNT	ac40	5510	Ant1	5460	-53.19	2	0.12	44.16	Average	54	Pass
NVNT	ac40	5510	Ant1	5468.8	-33.22	2	-	64.01	Peak	68.2	Pass
NVNT	ac40	5510	Ant1	5467.4	-48.92	2	0.12	48.43	Average	54	Pass
NVNT	ac40	5510	Ant1	5470	-37.79	2	-	59.44	Peak	68.2	Pass
NVNT	ac40	5510	Ant1	5470	-50.24	2	0.12	47.11	Average	54	Pass
NVNT	ac40	5670	Ant1	5725	-47.38	2	-	49.85	Peak	68.2	Pass
NVNT	ac40	5670	Ant1	5725	-55.85	2	0.12	41.5	Average	54	Pass
NVNT	ac40	5670	Ant1	5726.8	-45.55	2	-	51.68	Peak	68.2	Pass
NVNT	ac40	5670	Ant1	5725.2	-55.78	2	0.12	41.57	Average	54	Pass
NVNT	ac40	5670	Ant1	5735	-48.38	2	-	48.85	Peak	68.2	Pass
NVNT	ac40	5670	Ant1	5735	-57.2	2	0.12	40.15	Average	54	Pass
NVNT	ac80	5530	Ant1	5460	-40.67	2	-	56.56	Peak	68.2	Pass
NVNT	ac80	5530	Ant1	5460	-50.4	2	0.25	47.08	Average	54	Pass
NVNT	ac80	5530	Ant1	5468	-34.9	2	-	62.33	Peak	68.2	Pass
NVNT	ac80	5530	Ant1	5461	-49.72	2	0.25	47.76	Average	54	Pass
NVNT	ac80	5530	Ant1	5470	-38.43	2	-	58.8	Peak	68.2	Pass
NVNT	ac80	5530	Ant1	5470	-49.84	2	0.25	47.64	Average	54	Pass
NVNT	ac80	5610	Ant1	5725	-48.93	2	-	48.3	Peak	68.2	Pass
NVNT	ac80	5610	Ant1	5725	-57.53	2	0.25	39.95	Average	54	Pass
NVNT	ac80	5610	Ant1	5734.59	-46.7	2	-	50.53	Peak	68.2	Pass
NVNT	ac80	5610	Ant1	5726.8	-56.67	2	0.25	40.81	Average	54	Pass
NVNT	ac80	5610	Ant1	5735	-50.79	2	-	46.44	Peak	68.2	Pass
NVNT	ac80	5610	Ant1	5735	-57.87	2	0.25	39.61	Average	54	Pass








Test Graphs



Restrict Band NVNT a 5500MHz Ant1 Peak


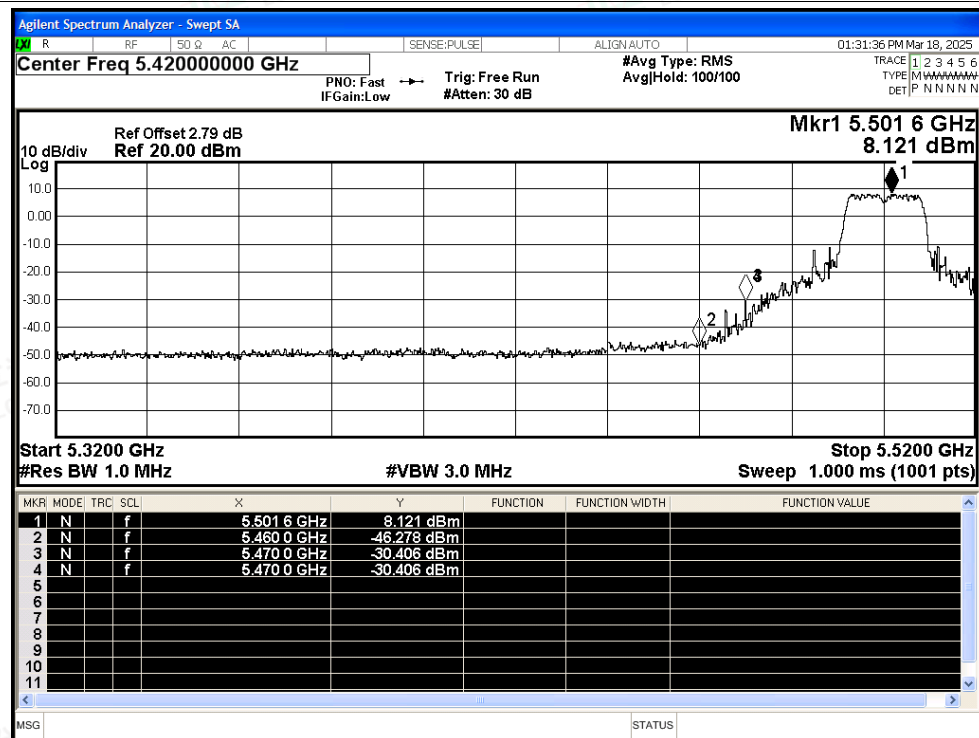




Restrict Band NVNT a 5500MHz Ant1 Average


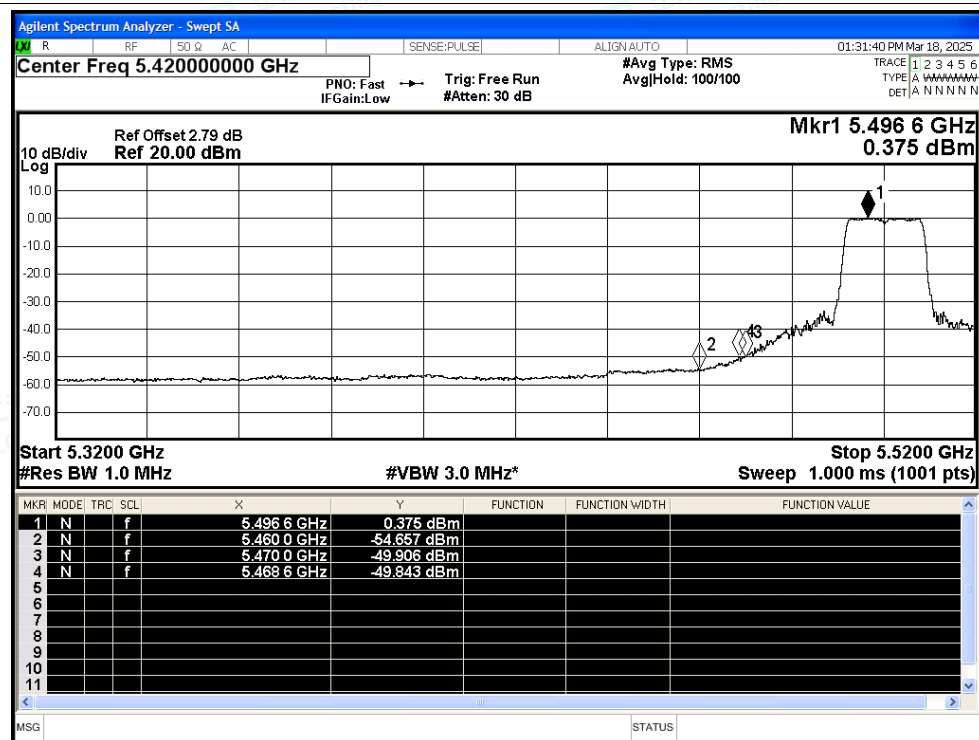


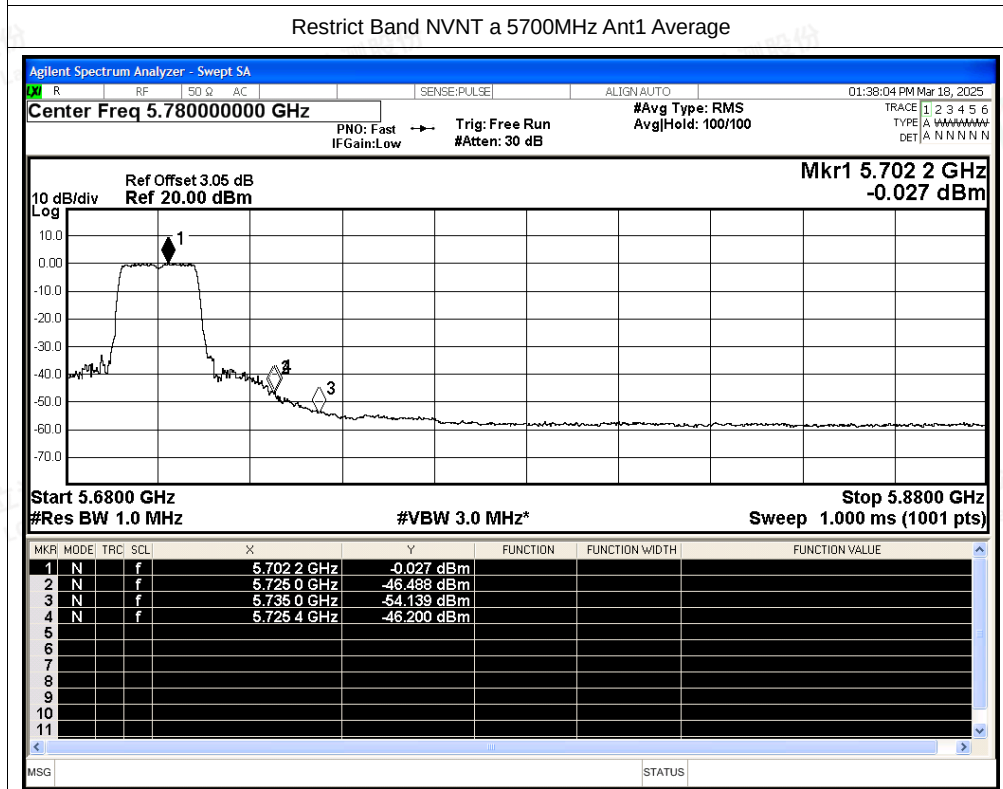
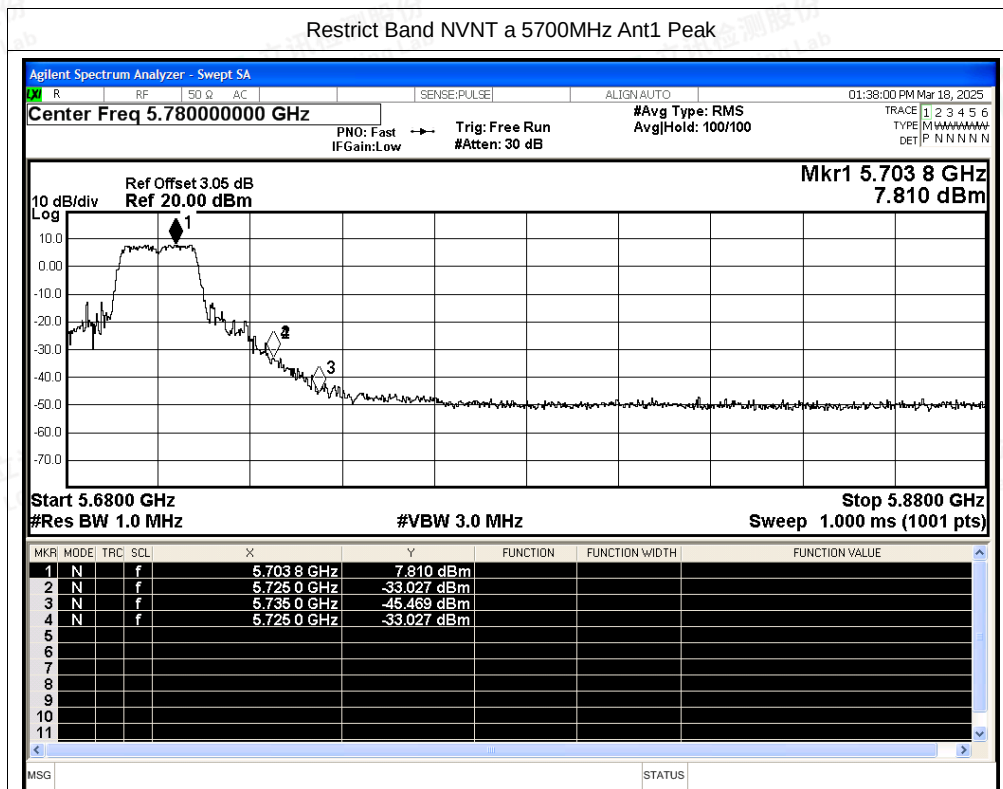


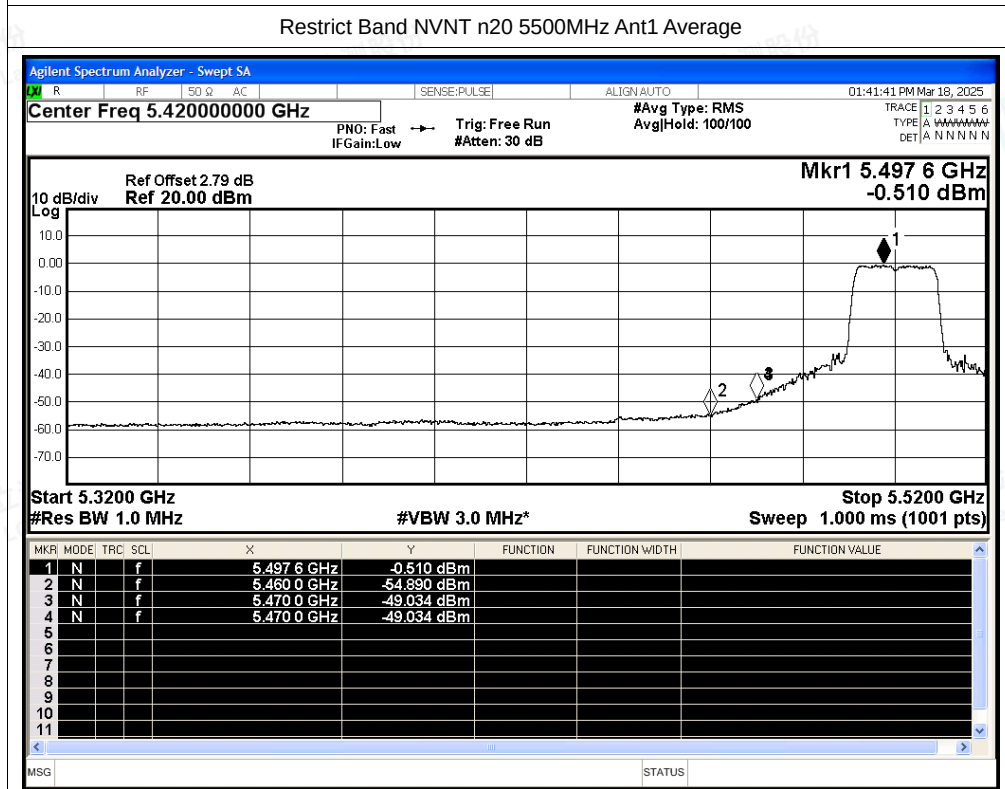
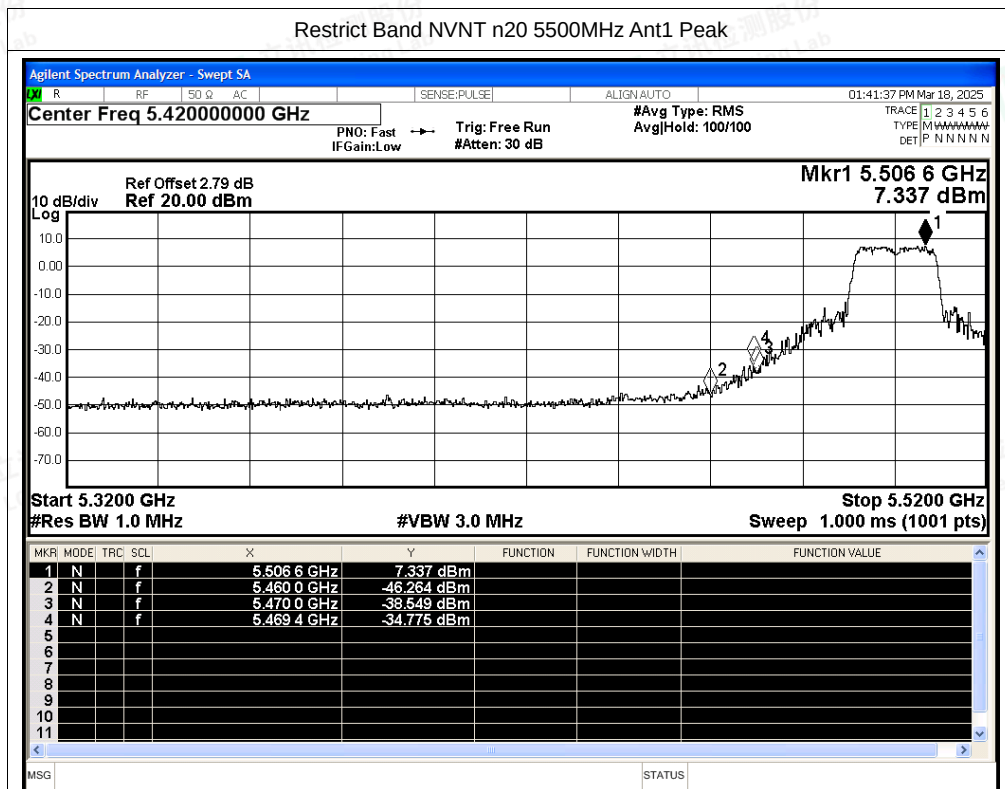


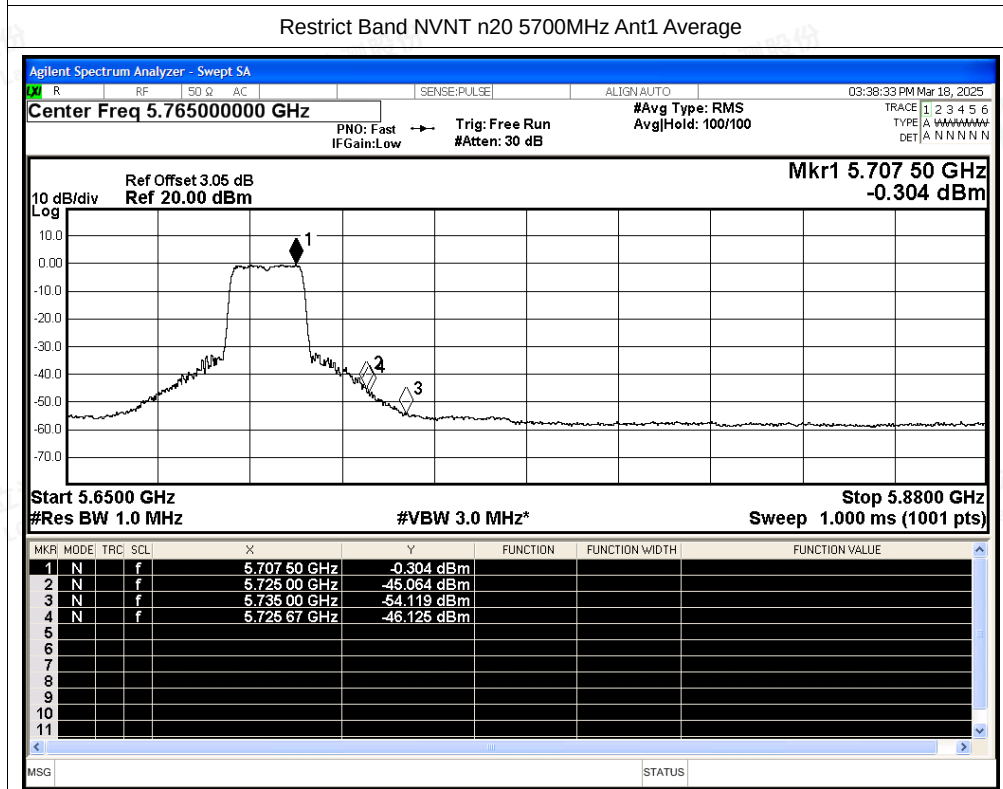
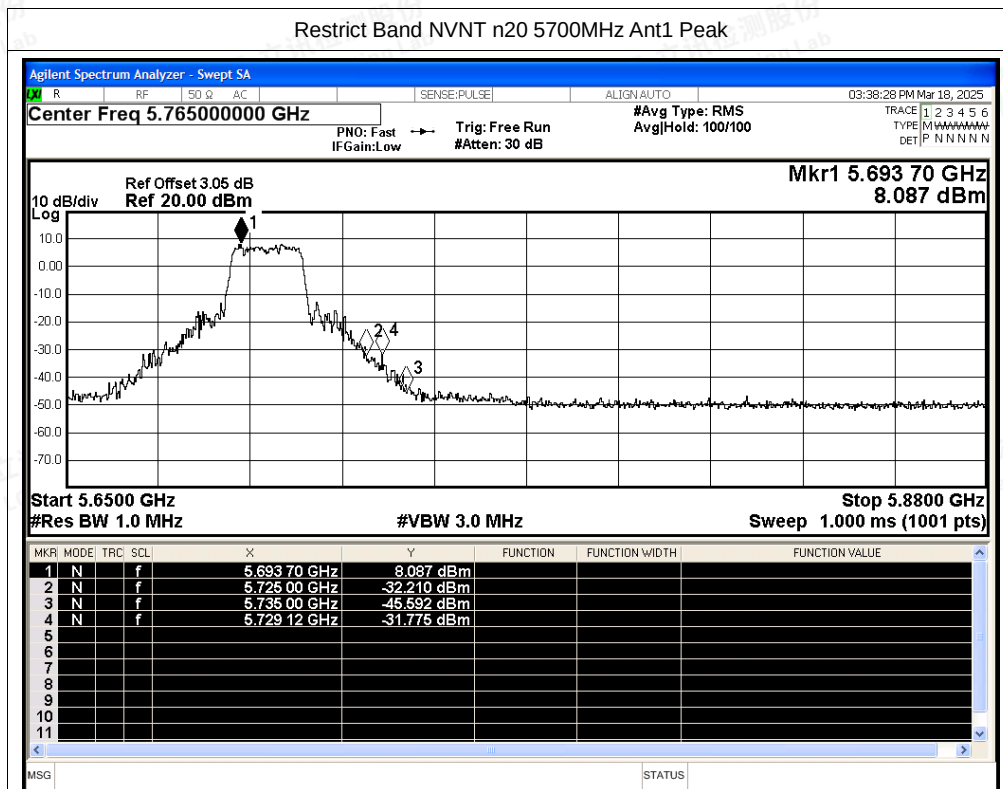


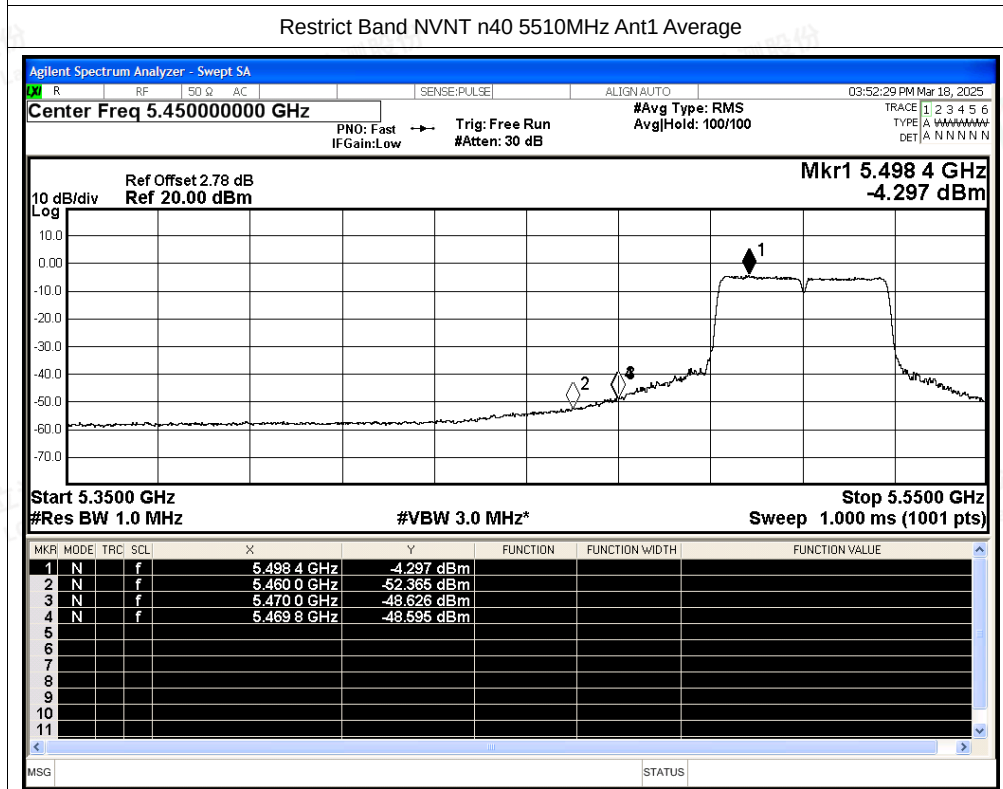
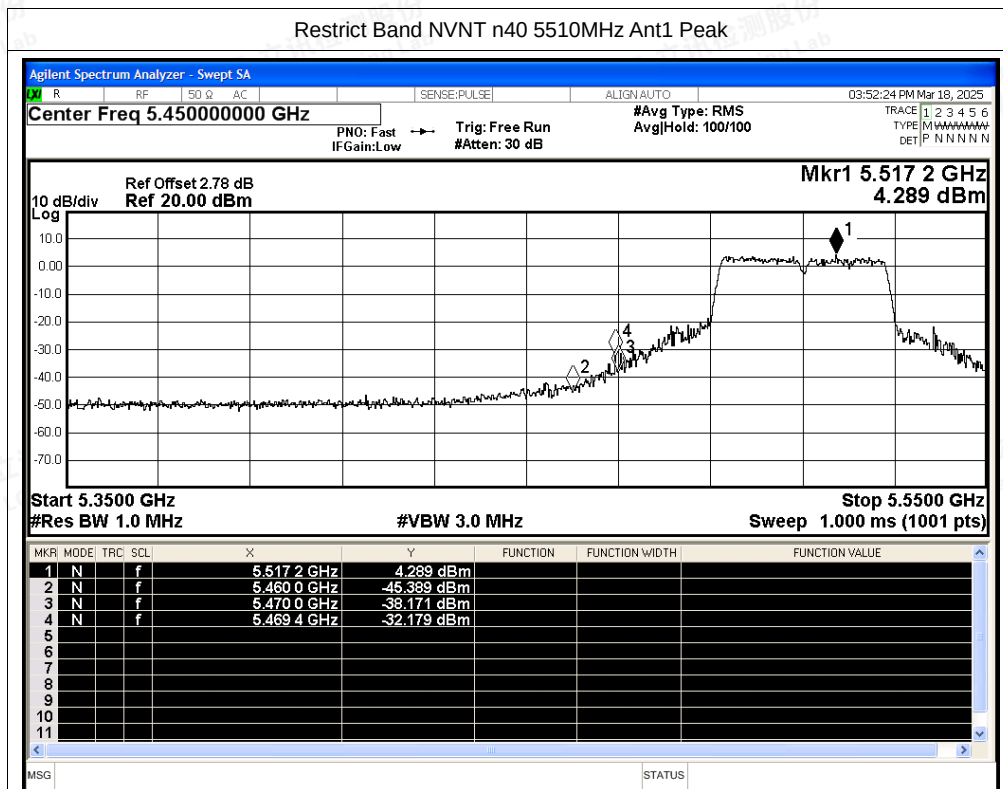


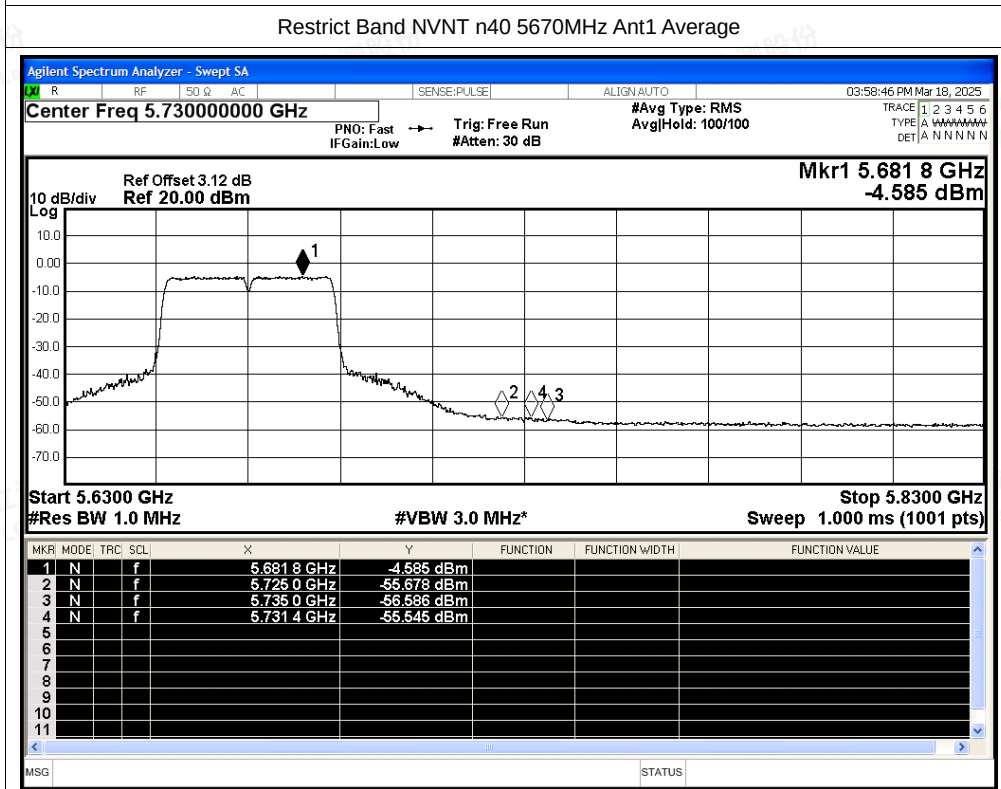
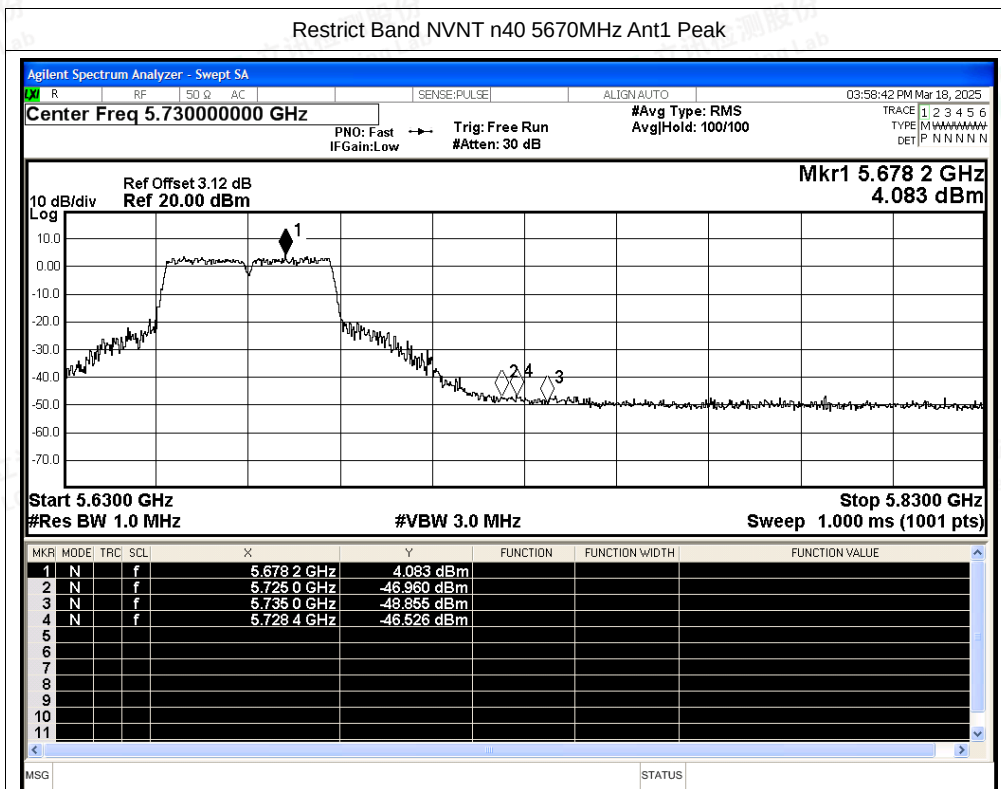


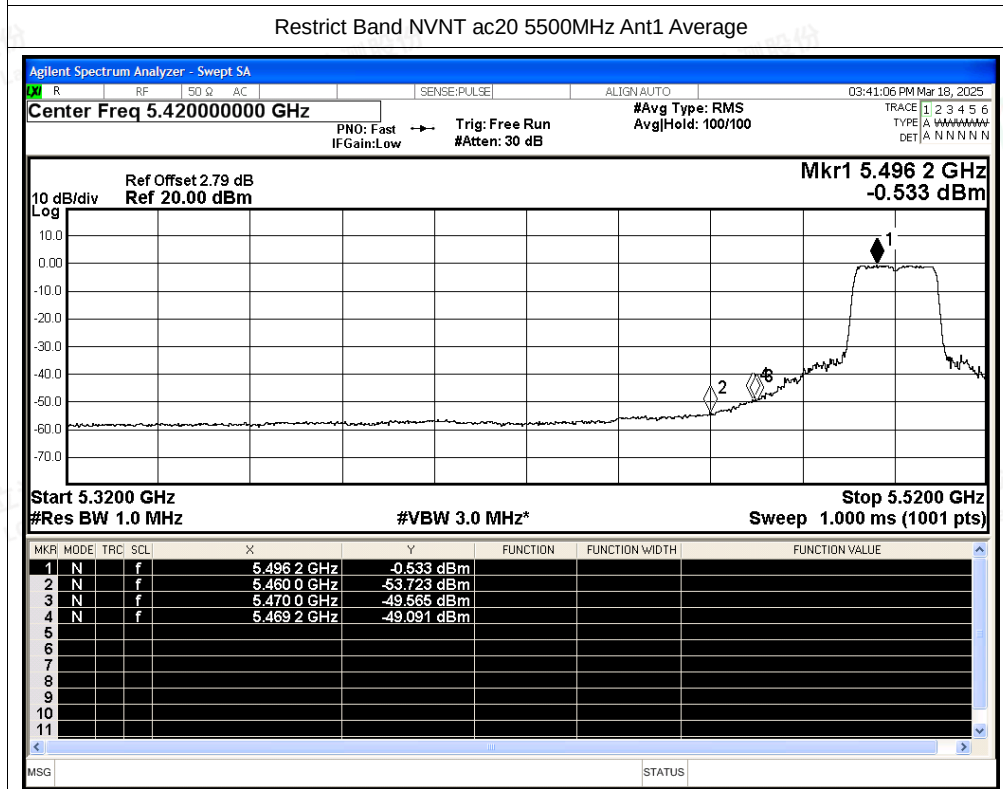
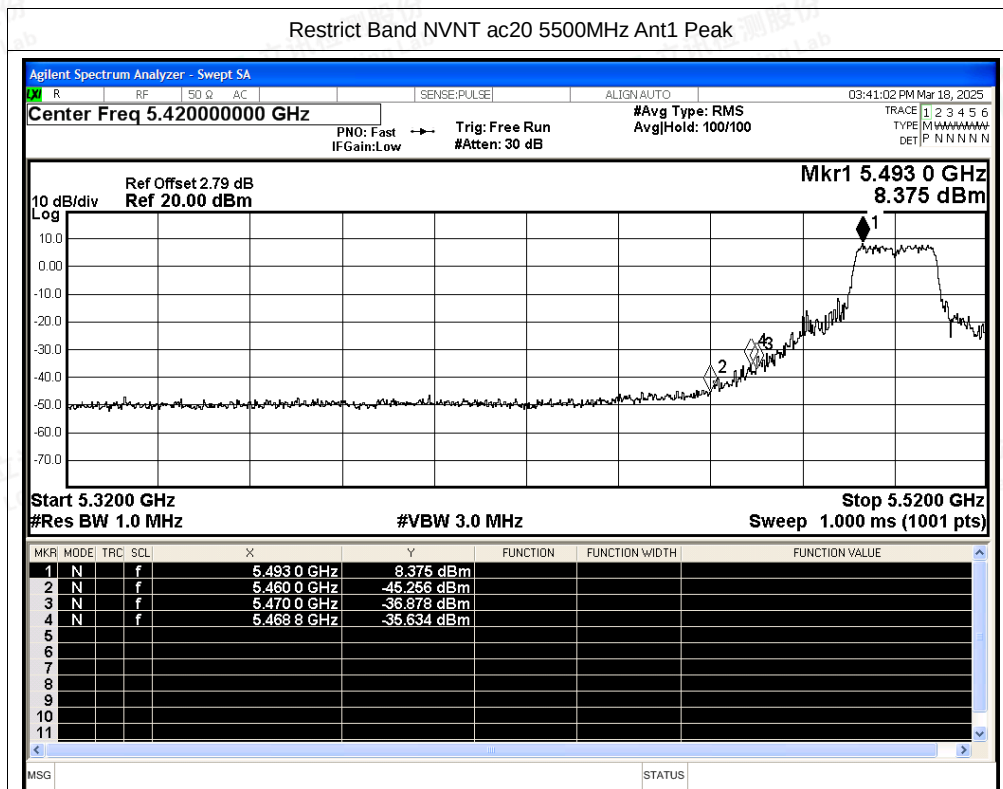


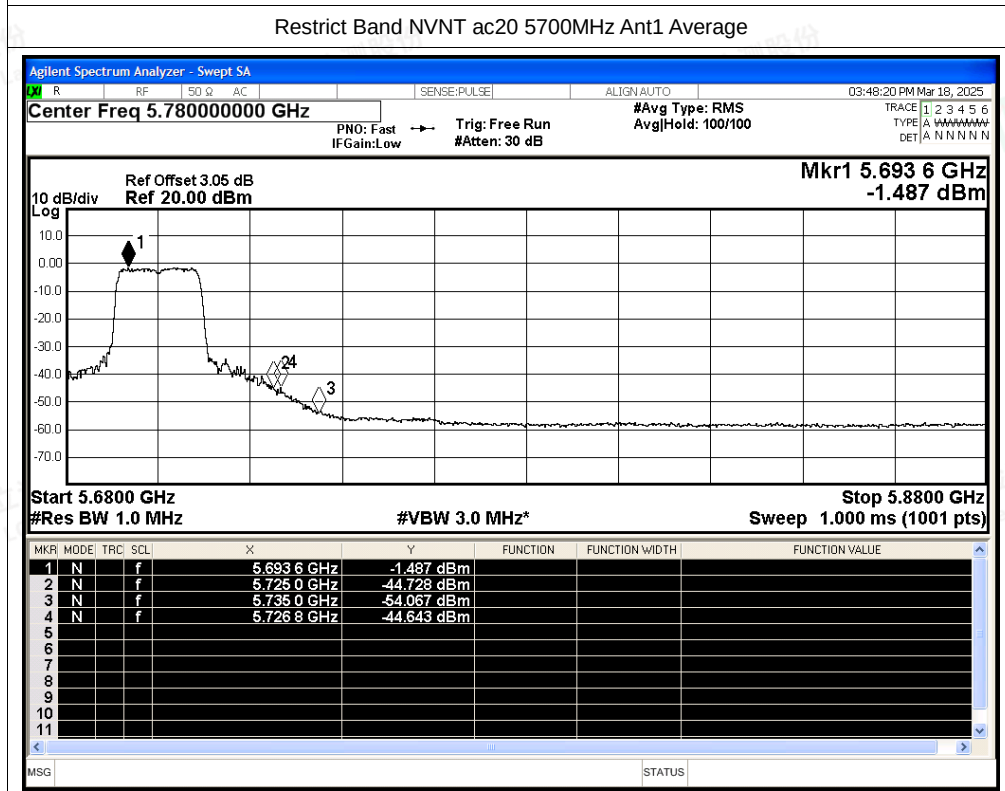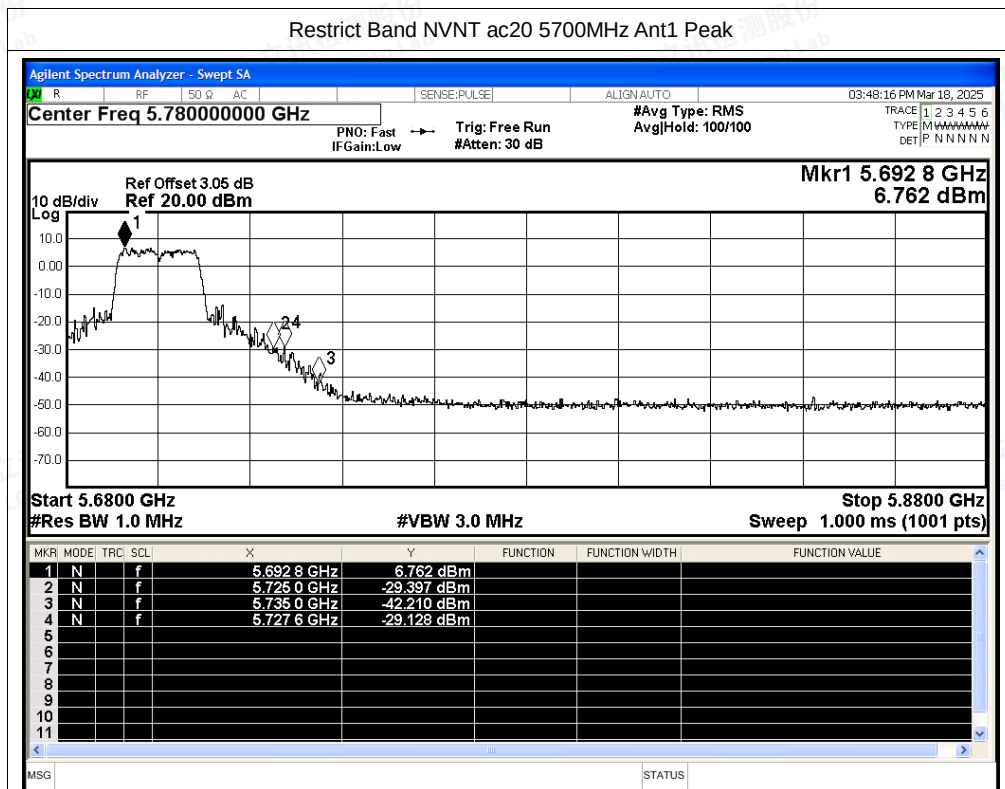

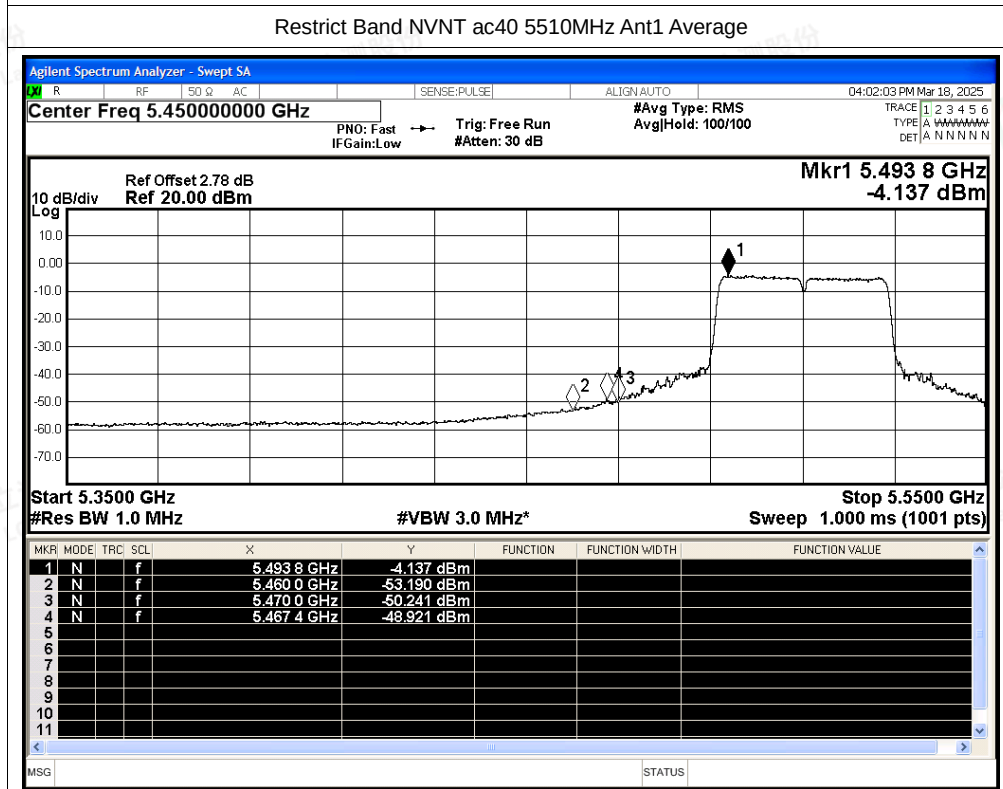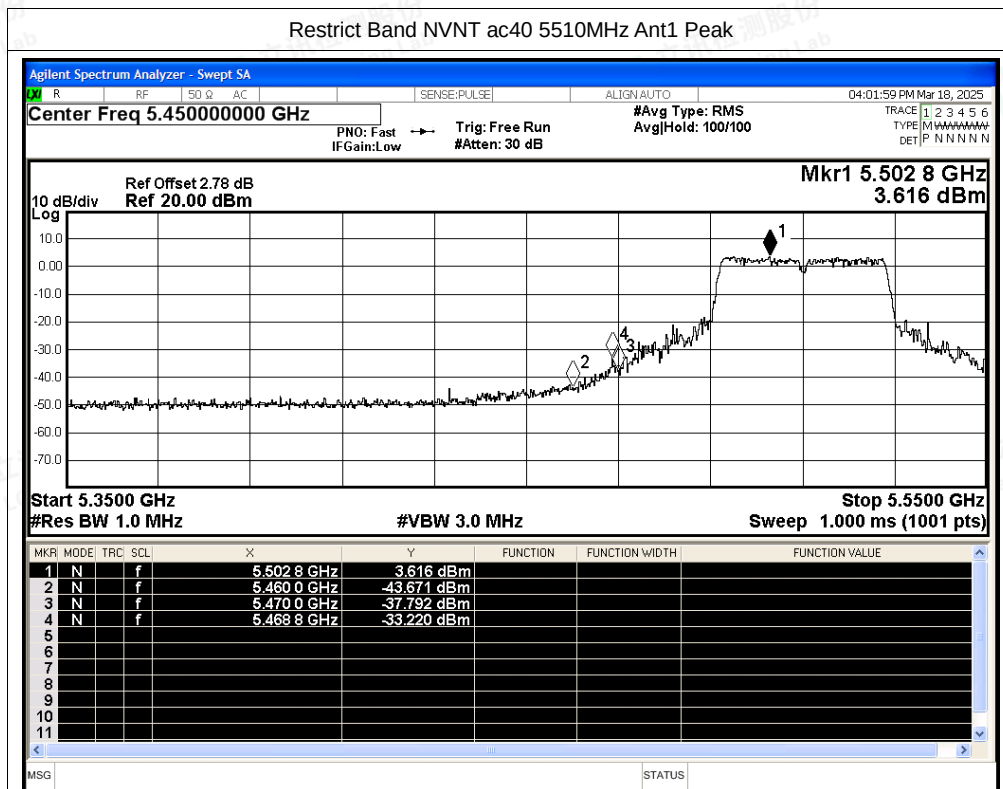

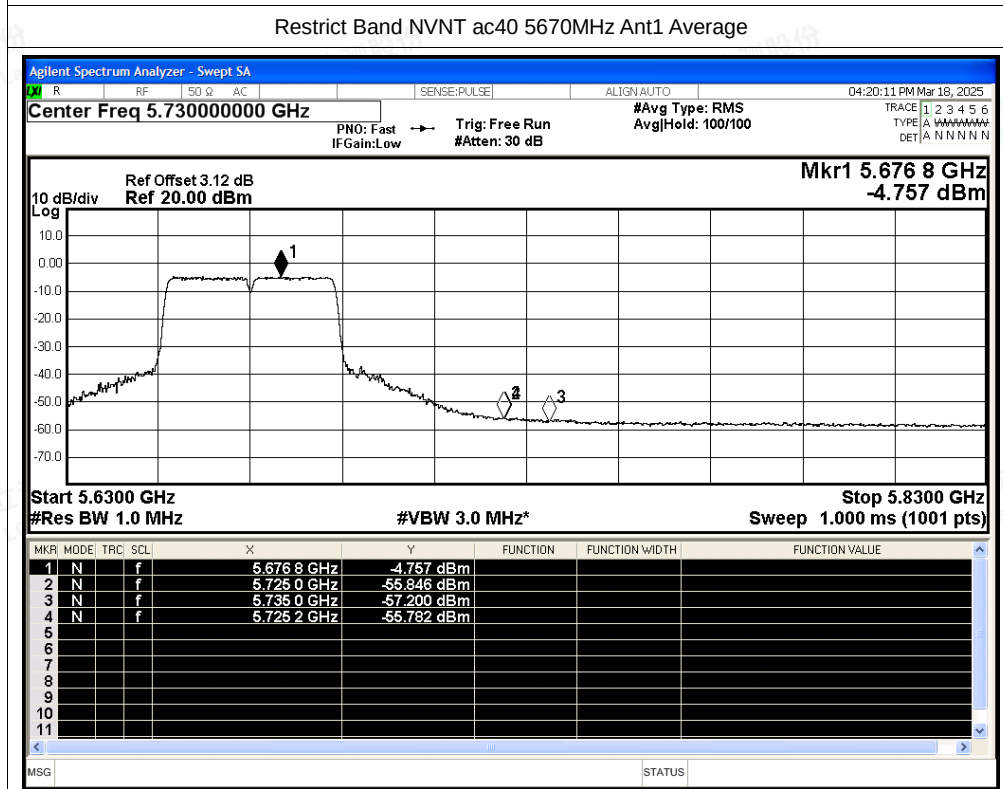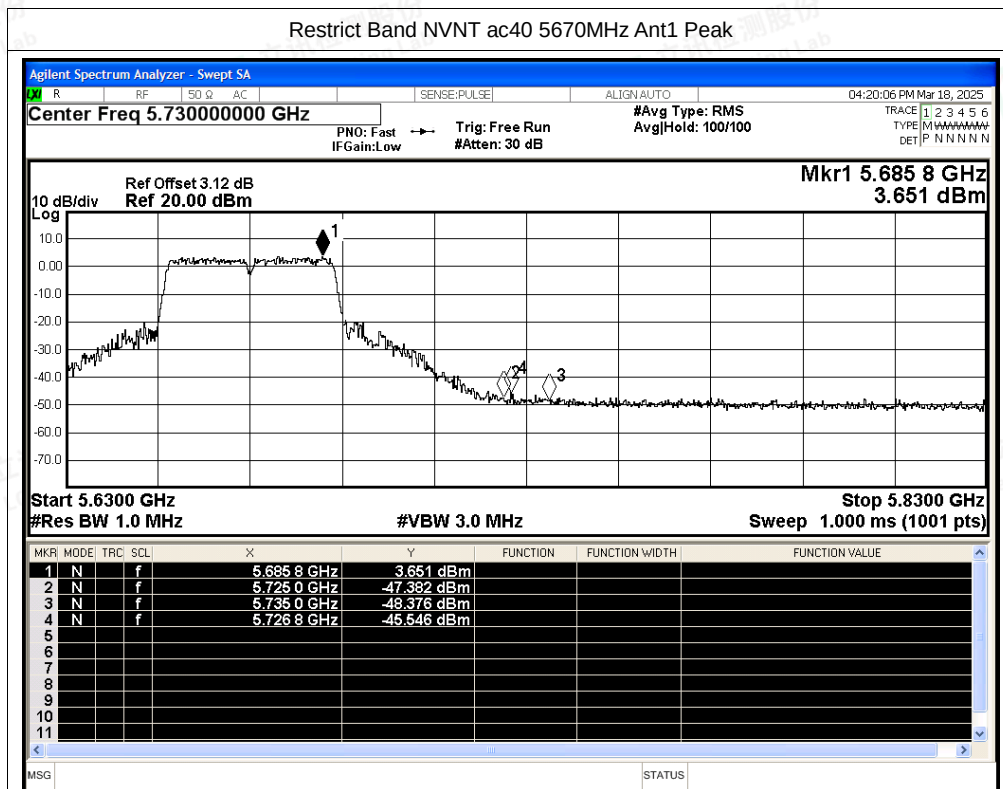

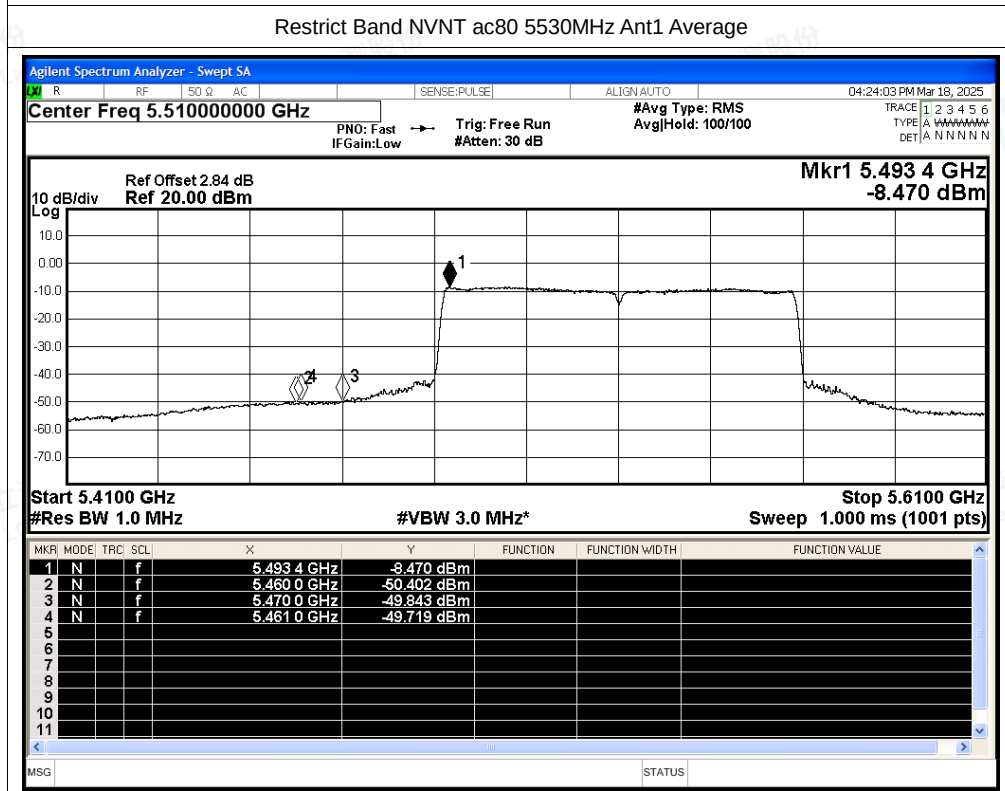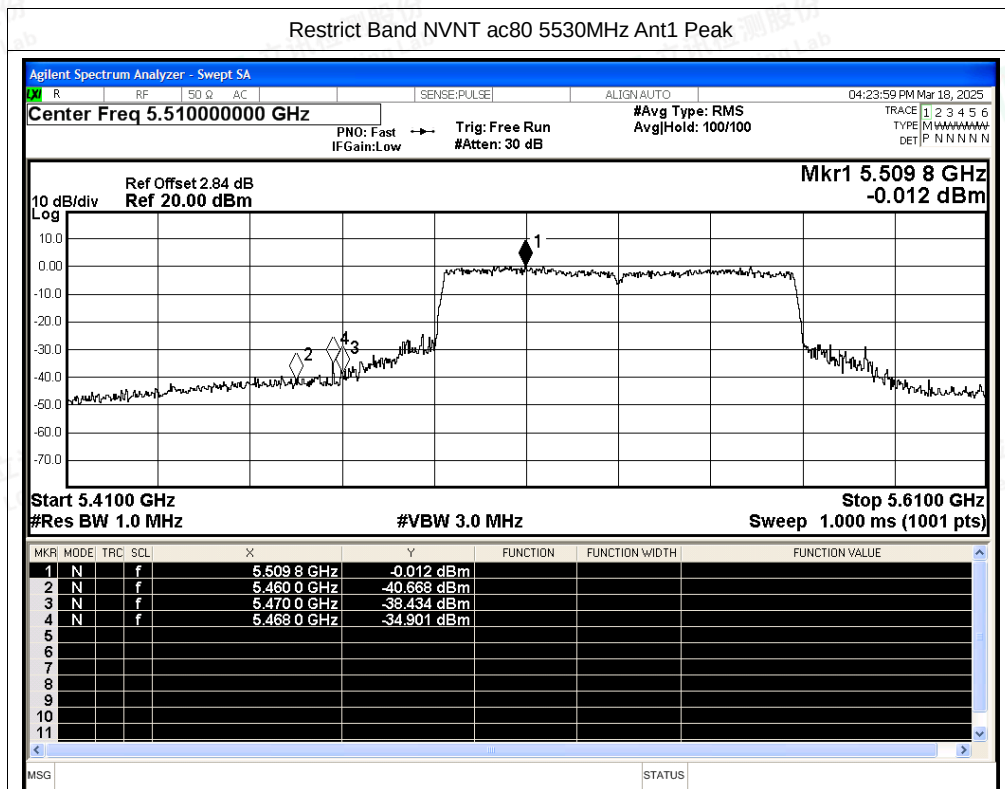

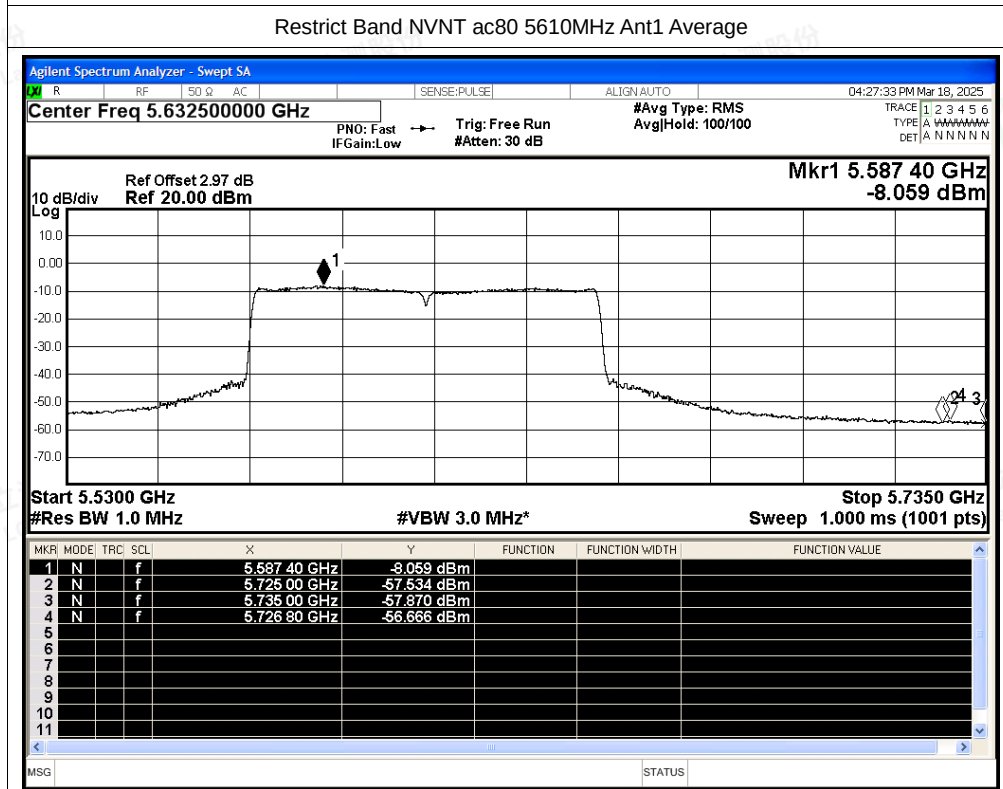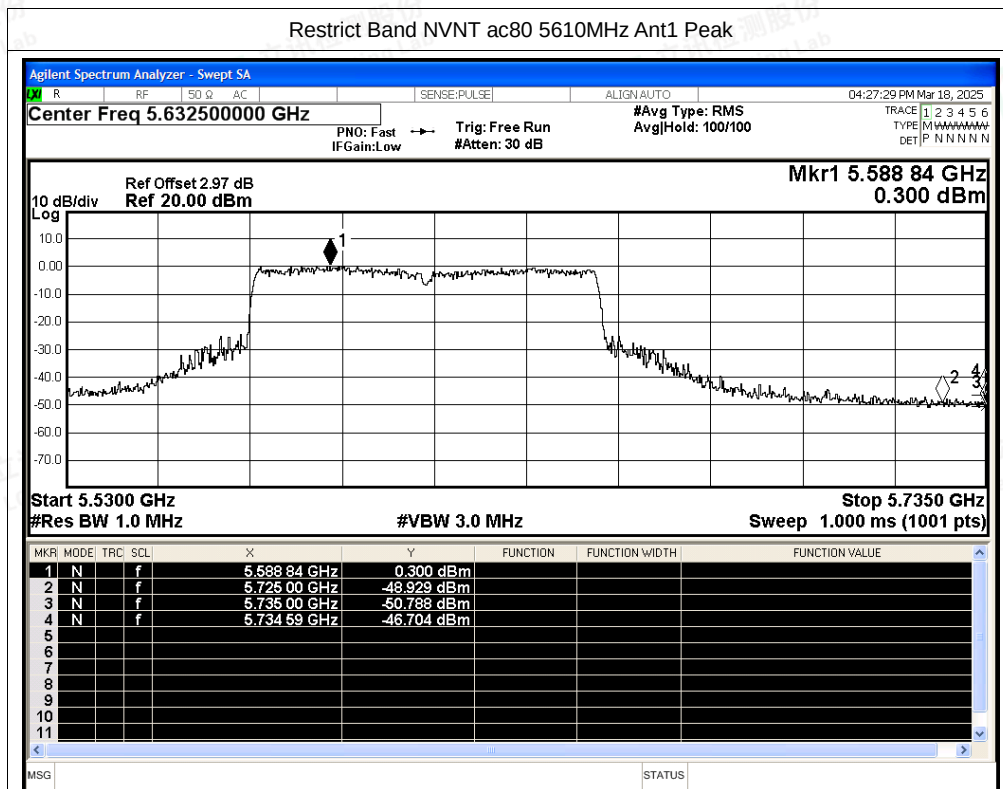



Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5500	Ant2	5460	-41.92	2	-	55.31	Peak	68.2	Pass
NVNT	a	5500	Ant2	5460	-54.79	2	0.24	42.68	Average	54	Pass
NVNT	a	5500	Ant2	5469.2	-33.13	2	-	64.1	Peak	68.2	Pass
NVNT	a	5500	Ant2	5469.4	-49.41	2	0.24	48.06	Average	54	Pass
NVNT	a	5500	Ant2	5470	-37.35	2	-	59.88	Peak	68.2	Pass
NVNT	a	5500	Ant2	5470	-50.72	2	0.24	46.75	Average	54	Pass
NVNT	a	5700	Ant2	5725	-36.41	2	-	60.82	Peak	68.2	Pass
NVNT	a	5700	Ant2	5725	-51.01	2	0.24	46.46	Average	54	Pass
NVNT	a	5700	Ant2	5726.4	-30.43	2	-	66.8	Peak	68.2	Pass
NVNT	a	5700	Ant2	5725.2	-50.79	2	0.24	46.68	Average	54	Pass
NVNT	a	5700	Ant2	5735	-48.8	2	-	48.43	Peak	68.2	Pass
NVNT	a	5700	Ant2	5735	-56.47	2	0.24	41	Average	54	Pass
NVNT	n20	5500	Ant2	5460	-43.74	2	-	53.49	Peak	68.2	Pass
NVNT	n20	5500	Ant2	5460	-53.87	2	0.28	43.64	Average	54	Pass
NVNT	n20	5500	Ant2	5466.8	-30.16	2	-	67.07	Peak	68.2	Pass
NVNT	n20	5500	Ant2	5468	-47.52	2	0.28	49.99	Average	54	Pass
NVNT	n20	5500	Ant2	5470	-32.57	2	-	64.66	Peak	68.2	Pass
NVNT	n20	5500	Ant2	5470	-48.26	2	0.28	49.25	Average	54	Pass
NVNT	n20	5700	Ant2	5725	-35.59	2	-	61.64	Peak	68.2	Pass
NVNT	n20	5700	Ant2	5725	-48.57	2	0.28	48.94	Average	54	Pass
NVNT	n20	5700	Ant2	5725.2	-31.93	2	-	65.3	Peak	68.2	Pass
NVNT	n20	5700	Ant2	5725	-48.57	2	0.28	48.94	Average	54	Pass
NVNT	n20	5700	Ant2	5735	-43.94	2	-	53.29	Peak	68.2	Pass
NVNT	n20	5700	Ant2	5735	-56.49	2	0.28	41.02	Average	54	Pass
NVNT	n40	5510	Ant2	5460	-42.28	2	-	54.95	Peak	68.2	Pass
NVNT	n40	5510	Ant2	5460	-51.9	2	0.12	45.45	Average	54	Pass
NVNT	n40	5510	Ant2	5465	-34.27	2	-	62.96	Peak	68.2	Pass
NVNT	n40	5510	Ant2	5469	-48.76	2	0.12	48.59	Average	54	Pass
NVNT	n40	5510	Ant2	5470	-37.67	2	-	59.56	Peak	68.2	Pass
NVNT	n40	5510	Ant2	5470	-48.79	2	0.12	48.56	Average	54	Pass
NVNT	n40	5670	Ant2	5725	-48.33	2	-	48.9	Peak	68.2	Pass
NVNT	n40	5670	Ant2	5725	-55.84	2	0.12	41.51	Average	54	Pass
NVNT	n40	5670	Ant2	5726.4	-46.23	2	-	51	Peak	68.2	Pass
NVNT	n40	5670	Ant2	5726.2	-55.64	2	0.12	41.71	Average	54	Pass
NVNT	n40	5670	Ant2	5735	-48.04	2	-	49.19	Peak	68.2	Pass
NVNT	n40	5670	Ant2	5735	-56.84	2	0.12	40.51	Average	54	Pass
NVNT	ac20	5500	Ant2	5460	-47.46	2	-	49.77	Peak	68.2	Pass






NVNT	ac20	5500	Ant2	5460	-54.51	2	0.28	43	Average	54	Pass
NVNT	ac20	5500	Ant2	5469.4	-30.93	2	-	66.3	Peak	68.2	Pass
NVNT	ac20	5500	Ant2	5469.6	-48.77	2	0.28	48.74	Average	54	Pass
NVNT	ac20	5500	Ant2	5470	-32.01	2	-	65.22	Peak	68.2	Pass
NVNT	ac20	5500	Ant2	5470	-49.76	2	0.28	47.75	Average	54	Pass
NVNT	ac20	5700	Ant2	5725	-32.14	2	-	65.09	Peak	68.2	Pass
NVNT	ac20	5700	Ant2	5725	-49.15	2	0.28	48.36	Average	54	Pass
NVNT	ac20	5700	Ant2	5735	-44.55	2	-	52.68	Peak	68.2	Pass
NVNT	ac20	5700	Ant2	5735	-56.59	2	0.28	40.92	Average	54	Pass
NVNT	ac20	5700	Ant2	5735	-44.55	2	-	52.68	Peak	68.2	Pass
NVNT	ac20	5700	Ant2	5735	-56.59	2	0.28	40.92	Average	54	Pass
NVNT	ac40	5510	Ant2	5460	-44.44	2	-	52.79	Peak	68.2	Pass
NVNT	ac40	5510	Ant2	5460	-52.93	2	0.12	44.42	Average	54	Pass
NVNT	ac40	5510	Ant2	5468.6	-33.31	2	-	63.92	Peak	68.2	Pass
NVNT	ac40	5510	Ant2	5469.4	-48.52	2	0.12	48.83	Average	54	Pass
NVNT	ac40	5510	Ant2	5470	-36.13	2	-	61.1	Peak	68.2	Pass
NVNT	ac40	5510	Ant2	5470	-49.4	2	0.12	47.95	Average	54	Pass
NVNT	ac40	5670	Ant2	5725	-47.93	2	-	49.3	Peak	68.2	Pass
NVNT	ac40	5670	Ant2	5725	-55.56	2	0.12	41.79	Average	54	Pass
NVNT	ac40	5670	Ant2	5729.4	-45.67	2	-	51.56	Peak	68.2	Pass
NVNT	ac40	5670	Ant2	5728.4	-55.54	2	0.12	41.81	Average	54	Pass
NVNT	ac40	5670	Ant2	5735	-47	2	-	50.23	Peak	68.2	Pass
NVNT	ac40	5670	Ant2	5735	-56.57	2	0.12	40.78	Average	54	Pass
NVNT	ac80	5530	Ant2	5460	-41.52	2	-	55.71	Peak	68.2	Pass
NVNT	ac80	5530	Ant2	5460	-50.25	2	0.25	47.23	Average	54	Pass
NVNT	ac80	5530	Ant2	5467.6	-37.11	2	-	60.12	Peak	68.2	Pass
NVNT	ac80	5530	Ant2	5463.8	-49.32	2	0.25	48.16	Average	54	Pass
NVNT	ac80	5530	Ant2	5470	-43.23	2	-	54	Peak	68.2	Pass
NVNT	ac80	5530	Ant2	5470	-50.65	2	0.25	46.83	Average	54	Pass
NVNT	ac80	5610	Ant2	5725	-49.05	2	-	48.18	Peak	68.2	Pass
NVNT	ac80	5610	Ant2	5725	-57.01	2	0.25	40.47	Average	54	Pass
NVNT	ac80	5610	Ant2	5732.335	-47.27	2	-	49.96	Peak	68.2	Pass
NVNT	ac80	5610	Ant2	5726.8	-56.76	2	0.25	40.72	Average	54	Pass
NVNT	ac80	5610	Ant2	5735	-49.12	2	-	48.11	Peak	68.2	Pass
NVNT	ac80	5610	Ant2	5735	-57.63	2	0.25	39.85	Average	54	Pass





Test Graphs

Restrict Band NVNT a 5500MHz Ant2 Peak

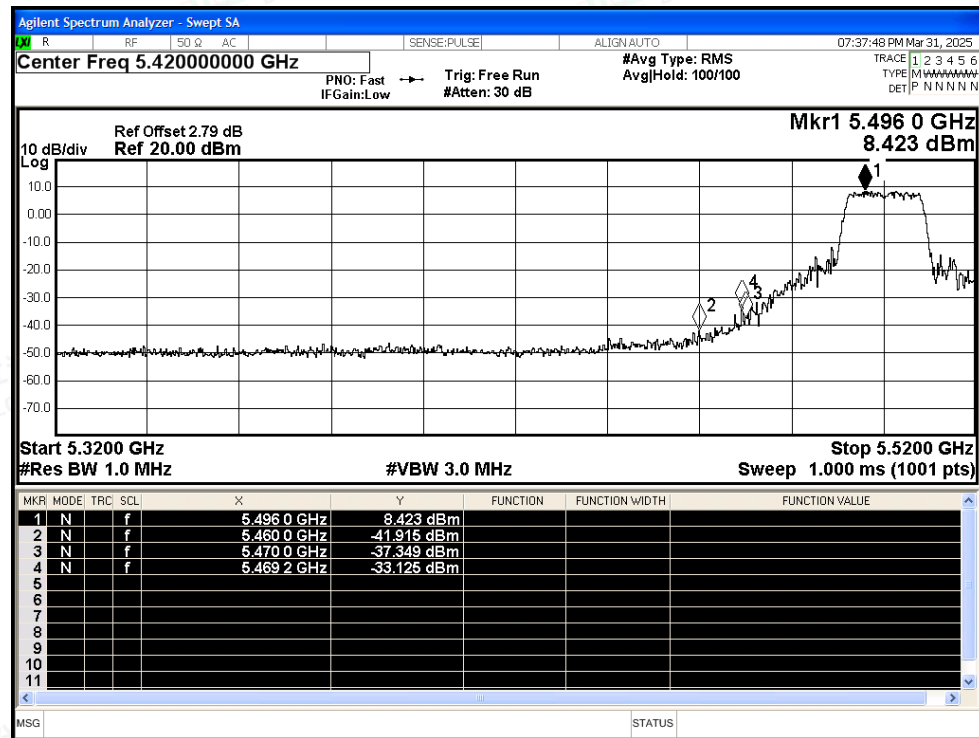

Restrict Band NVNT a 5500MHz Ant2 Average

