

TEST REPORT

FCC ID.	2AIKX-M7CM16QF6
Test Report No.	TCT220429E054
Date of issue	Jul. 12, 2022
Testing laboratory	SHENZHEN TONGCE TESTING LAB
Testing location/ address:	2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China
Applicant's name	F5CS LTD
Address	19C Trolley Sq Wilmington, Delaware 19806, United States
Manufacturer's name	F5CS LTD
Address	19C Trolley Sq Wilmington, Delaware 19806, United States
Standard(s)	FCC CFR Title 47 Part 15 Subpart E Section 15.407 KDB 662911 D01 Multiple Transmitter Output v02r01 KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Product Name	Tablet PC
Trade Mark	Fusion5
Model/Type reference	F202_US, F203, F204, F205
Rating(s)	Refer to EUT description of page 3
Date of receipt of test item	Apr. 29, 2022
Date (s) of performance of test	Apr. 29, 2022 - Jul. 12, 2022
Tested by (+signature)	Brews XU
Check by (+signature)	Beryl ZHAO
Approved by (+signature) :	Tomsin


General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	3
1.3. Test Frequency	4
2. Test Result Summary	5
3. General Information.....	6
3.1. Test environment and mode.....	6
3.2. Description of Support Units.....	7
4. Facilities and Accreditations	8
4.1. Facilities	8
4.2. Location	8
4.3. Measurement Uncertainty.....	8
5. Test Results and Measurement Data	9
5.1. Antenna requirement	9
5.2. Conducted Emission.....	10
5.3. Maximum Conducted Output Power	14
5.4. 6dB Emission Bandwidth.....	16
5.5. 26dB Bandwidth and 99% Occupied Bandwidth	17
5.6. Power Spectral Density.....	18
5.7. Band edge	19
5.8. Unwanted Emissions	34
5.9. Frequency Stability Measurement	55

Appendix A: Test Result of Conducted Test**Appendix B: Photographs of Test Setup****Appendix C: Photographs of EUT**

1. General Product Information

1.1. EUT description

Product Name.....	Tablet PC
Model/Type reference.....	F202_US
Sample Number.....	TCT220429E014-0101
Operation Frequency	Band 1: 5180 MHz ~ 5240 MHz Band 2A: 5260 MHz ~ 5320 MHz Band 2C: 5500 MHz ~ 5700 MHz Band 3: 5745 MHz ~ 5825 MHz
Channel Bandwidth.....	802.11a: 20MHz 802.11n: 20MHz, 40MHz 802.11ac: 20MHz, 40MHz, 80MHz
Modulation Technology	Orthogonal Frequency Division Multiplexing(OFDM)
Modulation Type	256QAM, 64QAM, 16QAM, BPSK, QPSK
Antenna Type.....	Internal Antenna
Antenna Gain.....	2dBi
Rating(s).....	Adapter Information: MODEL: TEKA-UCA20US INPUT: AC 100-240V, 50/60Hz, 0.35A MAX OUTPUT: DC 5.0V, 2.0A Rechargeable Li-ion Battery DC 3.7V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

No.	Model No.	Tested with
1	F202_US	<input checked="" type="checkbox"/>
Other models	F203, F204, F205	<input type="checkbox"/>

Note: F202_US is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names. So the test data of F202_US can represent the remaining models.

1.3. Test Frequency

Band 1

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230		
48	5240				

Band 2A

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Frequency	Channel	Frequency
52	5260	54	5270	58	5290
60	5300	62	5310		
64	5320				

Band 2C

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Frequency	Channel	Frequency
100	5500	102	5510	106	5530
120	5600	118	5590	122	5610
140	5700	134	5670		

Band 3

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745	151	5755	155	5775
157	5785	159	5795		
165	5825				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	PASS
6dB Emission Bandwidth	§15.407(a)	PASS
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a)	PASS
Power Spectral Density	§15.407(a)	PASS
Restricted Bands around fundamental frequency	§15.407(b)	PASS
Radiated Emission	§15.407(b)	PASS
Frequency Stability	§15.407(g)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. For the band 5.15-5.25GHz, EUT meet the requirements of 15.407(a)(ii).

3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Software:	
Software Information:	Engineer mode
Power Level:	16
Test Mode:	
Engineer mode:	Keep the EUT in continuous transmitting by select channel and modulations with max. duty cycle.
<p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	6.5 Mbps
802.11n(HT40)	13.5 Mbps
802.11ac(VHT20)	6.5 Mbps
802.11ac(VHT40)	13.5 Mbps
802.11ac(VHT80)	29.3 Mbps

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098
SHENZHEN TONGCE TESTING LAB
Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1
SHENZHEN TONGCE TESTING LAB
CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict,

Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339


4.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

5. Test Results and Measurement Data

5.1. Antenna requirement

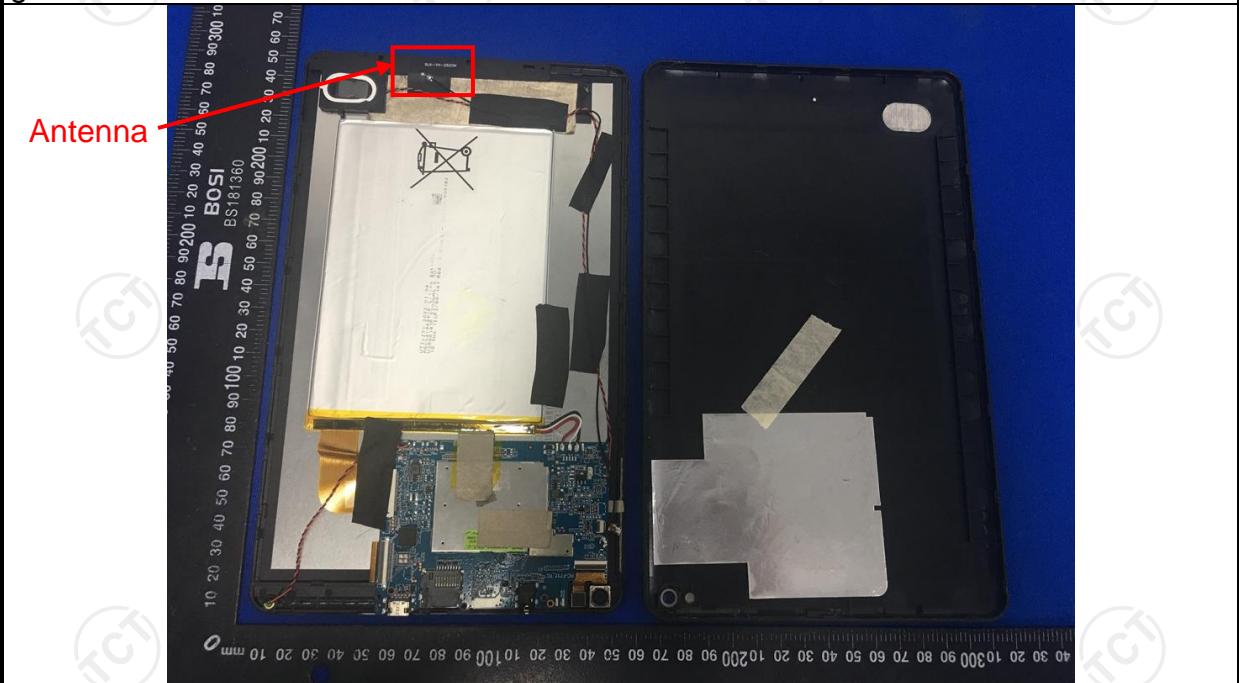Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The EUT antenna is internal antenna which permanently attached, and the best case gain of the antenna is 2dBi.	
	

5.2. Conducted Emission

5.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p>Reference Plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Charging + Transmitting Mode														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	PASS														


5.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI3	100898	Jul. 04, 2023
Line Impedance Stabilisation Newtork(LISN)	Schwarzbeck	NSLK 8126	8126453	Feb. 24, 2023
Line-5	TCT	CE-05	N/A	Jul. 04, 2023
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

5.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

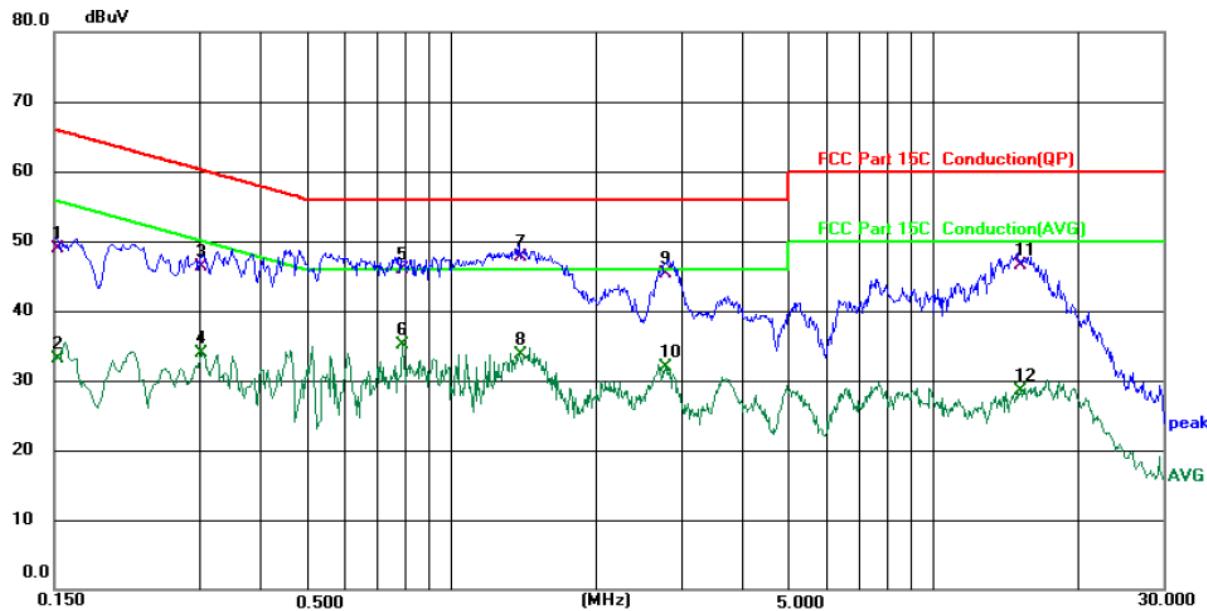

Site 844 Shielding Room

Phase: **L1**

Temperature: 25.3 (°C)

Humidity: 43 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over	Detector	Comment
1	0.1524	38.40	10.58	48.98	65.87	-16.89	QP		
2	0.1524	22.62	10.58	33.20	55.87	-22.67	AVG		
3	0.3019	36.08	10.29	46.37	60.19	-13.82	QP		
4	0.3019	23.53	10.29	33.82	50.19	-16.37	AVG		
5	0.7940	35.72	10.14	45.86	56.00	-10.14	QP		
6	0.7940	24.96	10.14	35.10	46.00	-10.90	AVG		
7	*	37.51	10.11	47.62	56.00	-8.38	QP		
8	1.3856	23.51	10.11	33.62	46.00	-12.38	AVG		
9	2.7820	35.31	10.08	45.39	56.00	-10.61	QP		
10	2.7820	21.91	10.08	31.99	46.00	-14.01	AVG		
11	15.2217	36.18	10.36	46.54	60.00	-13.46	QP		
12	15.2217	18.18	10.36	28.54	50.00	-21.46	AVG		

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

QP. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

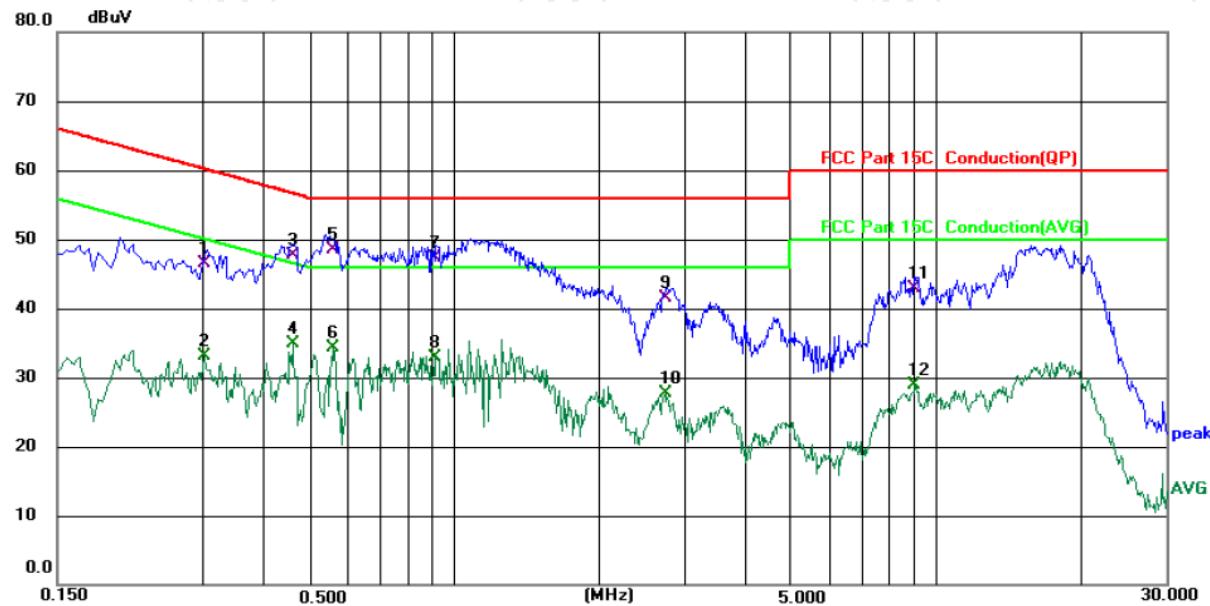

Site 844 Shielding Room

Phase: **N**

Temperature: 25.3 (°C)

Humidity: 43 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level dBuV	Factor dB	ment dBuV				
1		0.3019	36.29	10.29	46.58	60.19	-13.61	QP	
2		0.3019	22.89	10.29	33.18	50.19	-17.01	AVG	
3		0.4620	37.48	10.21	47.69	56.66	-8.97	QP	
4		0.4620	24.74	10.21	34.95	46.66	-11.71	AVG	
5 *		0.5580	38.41	10.16	48.57	56.00	-7.43	QP	
6		0.5580	24.06	10.16	34.22	46.00	-11.78	AVG	
7		0.9140	37.24	10.14	47.38	56.00	-8.62	QP	
8		0.9140	22.74	10.14	32.88	46.00	-13.12	AVG	
9		2.7378	31.41	10.18	41.59	56.00	-14.41	QP	
10		2.7378	17.48	10.18	27.66	46.00	-18.34	AVG	
11		9.0419	32.54	10.32	42.86	60.00	-17.14	QP	
12		9.0419	18.63	10.32	28.95	50.00	-21.05	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

QP. =Quasi-Peak


AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80) and the worst case Mode (Lowest channel and 802.11n(HT40)) was submitted only.

5.3. Maximum Conducted Output Power

5.3.1. Test Specification

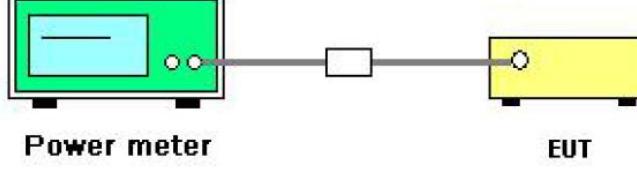
Test Requirement:	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046										
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E										
Limit:	<table border="1"> <thead> <tr> <th>Frequency Band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5180 - 5240</td> <td>24dBm(250mW) for client device</td> </tr> <tr> <td>5260 - 5320</td> <td>24dBm(250mW) or $11 \text{ dBm} + 10 \log B$, B is the 26 dB emission bandwidth in megahertz</td> </tr> <tr> <td>5470 - 5725</td> <td>24dBm(250mW) or $11 \text{ dBm} + 10 \log B$, B is the 26 dB emission bandwidth in megahertz</td> </tr> <tr> <td>5745 - 5825</td> <td>30dBm(1W)</td> </tr> </tbody> </table>	Frequency Band (MHz)	Limit	5180 - 5240	24dBm(250mW) for client device	5260 - 5320	24dBm(250mW) or $11 \text{ dBm} + 10 \log B$, B is the 26 dB emission bandwidth in megahertz	5470 - 5725	24dBm(250mW) or $11 \text{ dBm} + 10 \log B$, B is the 26 dB emission bandwidth in megahertz	5745 - 5825	30dBm(1W)
Frequency Band (MHz)	Limit										
5180 - 5240	24dBm(250mW) for client device										
5260 - 5320	24dBm(250mW) or $11 \text{ dBm} + 10 \log B$, B is the 26 dB emission bandwidth in megahertz										
5470 - 5725	24dBm(250mW) or $11 \text{ dBm} + 10 \log B$, B is the 26 dB emission bandwidth in megahertz										
5745 - 5825	30dBm(1W)										
Test Setup:	 <p>The diagram illustrates the test setup. A green rectangular box labeled "Power meter" is connected to a yellow rectangular box labeled "EUT" (Equipment Under Test) via a black horizontal line representing an RF cable. A small white square labeled "attenuator" is placed on the line between the power meter and the EUT.</p>										
Test Mode:	Transmitting mode with modulation										
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 5. Measure the conducted output power and record the results in the test report. 										
Test Result:	PASS										
Remark:	Conducted output power= measurement power + $10\log(1/x)$ X is duty cycle=1, so $10\log(1/1)=0$ Conducted output power= measurement power										

5.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Power Meter	Agilent	E4418B	GB43312526	Jul. 04, 2023
Power Sensor	Agilent	E9301A	MY41497725	Jul. 04, 2023
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 04, 2023

5.4. 6dB Emission Bandwidth

5.4.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	>500kHz
Test Setup:	 <p>The diagram illustrates the test setup. A green 'Spectrum Analyzer' is connected to a yellow 'EUT' (Equipment Under Test) via a grey cable. The connection point on the EUT is marked with a TNC connector symbol.</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

5.4.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 04, 2023

5.5. 26dB Bandwidth and 99% Occupied Bandwidth


5.5.1. Test Specification

5.5.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 04, 2023

5.6. Power Spectral Density

5.6.1. Test Specification

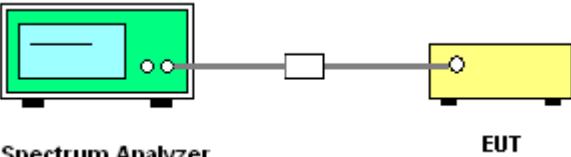
Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	<p>≤11.00dBm/MHz for Band 1 5150MHz-5250MHz(client device)</p> <p>≤11.00dBm/MHz for Band 2A&2C 5250-5350&5470-5725</p> <p>≤30.00dBm/500KHz for Band 3 5725MHz-5850MHz</p> <p>The e.i,r,p spectral density for Band 1 5150MHz – 5250 MHz should not exceed 10dBm/MHz</p>
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW \geq 3*RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

5.6.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Combiner Box	Ascentest	AT890-RFB	N/A	Jul. 04, 2023

5.7. Band edge

5.7.1. Test Specification

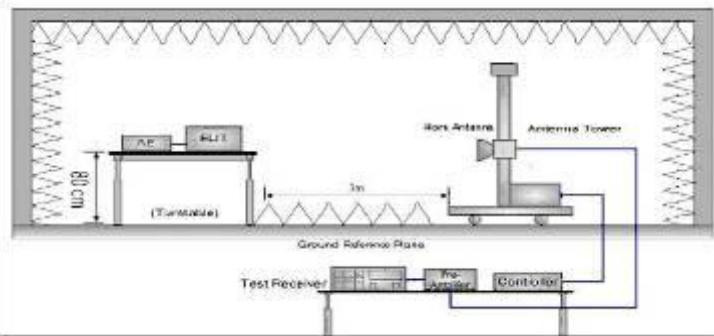Test Requirement:	FCC CFR47 Part 15E Section 15.407																										
Test Method:	ANSI C63.10 2013																										
Limit:	<p>In un-restricted band: For Band 1&2A&2C: -27dBm/MHz For Band 3:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Limit (dBm/MHz)</th> <th>Frequency (MHz)</th> <th>Limit (dBm/MHz)</th> </tr> </thead> <tbody> <tr> <td>< 5650</td> <td>-27</td> <td>5850~5855</td> <td>27~15.6</td> </tr> <tr> <td>5650~5700</td> <td>-27~10</td> <td>5855~5875</td> <td>15.6~10</td> </tr> <tr> <td>5700~5720</td> <td>10~15.6</td> <td>5875~5925</td> <td>10~27</td> </tr> <tr> <td>5720~5725</td> <td>15.6~27</td> <td>> 5925</td> <td>-27</td> </tr> </tbody> </table> <p>$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 @ 3\text{m}$</p> <p>In restricted band:</p> <table border="1"> <thead> <tr> <th>Detector</th> <th>Limit@3m</th> </tr> </thead> <tbody> <tr> <td>Peak</td> <td>74dBμV/m</td> </tr> <tr> <td>AVG</td> <td>54dBμV/m</td> </tr> </tbody> </table>	Frequency (MHz)	Limit (dBm/MHz)	Frequency (MHz)	Limit (dBm/MHz)	< 5650	-27	5850~5855	27~15.6	5650~5700	-27~10	5855~5875	15.6~10	5700~5720	10~15.6	5875~5925	10~27	5720~5725	15.6~27	> 5925	-27	Detector	Limit@3m	Peak	74dB μ V/m	AVG	54dB μ V/m
Frequency (MHz)	Limit (dBm/MHz)	Frequency (MHz)	Limit (dBm/MHz)																								
< 5650	-27	5850~5855	27~15.6																								
5650~5700	-27~10	5855~5875	15.6~10																								
5700~5720	10~15.6	5875~5925	10~27																								
5720~5725	15.6~27	> 5925	-27																								
Detector	Limit@3m																										
Peak	74dB μ V/m																										
AVG	54dB μ V/m																										
Test Setup:																											
Test Mode:	Transmitting mode with modulation																										
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold 																										


	<p>Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.</p>
Test Result:	PASS

5.7.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESIB7	100197	Jul. 04, 2023
Spectrum Analyzer	R&S	FSQ40	200061	Jul. 04, 2023
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 18, 2022
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Feb. 24, 2023
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Feb. 24, 2023
Pre-amplifier	HP	8447D	2727A05017	Jul. 04, 2023
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 05, 2022
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Apr. 10, 2023
Coaxial cable	SKET	RC_DC18G-N	N/A	Feb. 24, 2023
Coaxial cable	SKET	RC-DC18G-N	N/A	Feb. 24, 2023
Coaxial cable	SKET	RC-DC40G-N	N/A	Jul. 04, 2023
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A


5.7.3. Test Data

AC20-5180

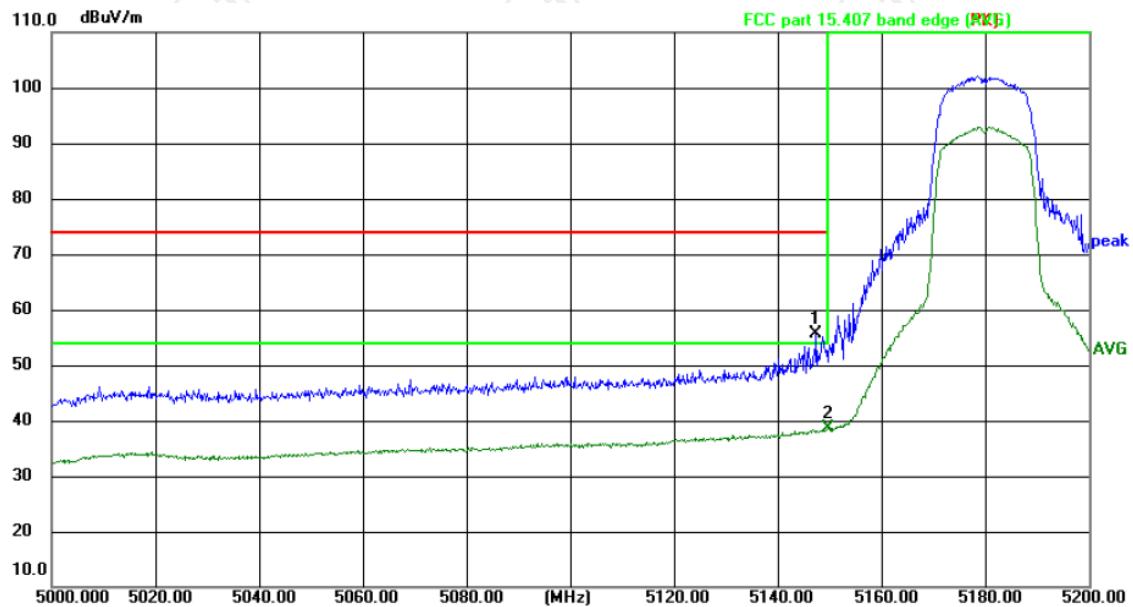

Site Polarization: **Horizontal** Temperature: 24(°C)
Limit: FCC part 15.407 band edge (PK) Power: DC 3.7 V Humidity: 52 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5147.500	64.07	-8.48	55.59	74.00	-18.41	peak	P	
2 *	5150.000	47.11	-8.48	38.63	54.00	-15.37	AVG	P	

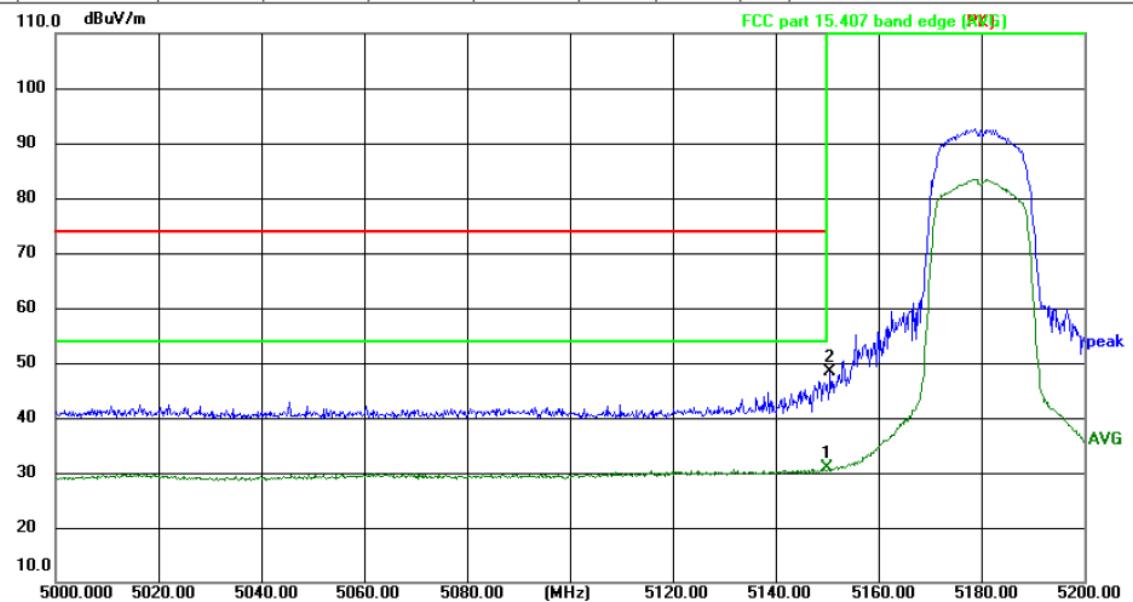

Site Polarization: **Vertical** Temperature: 24(°C)
Limit: FCC part 15.407 band edge (PK) Power: DC 3.7 V Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5150.000	39.26	-8.48	30.78	54.00	-23.22	AVG	P	
2	5150.700	56.74	-8.48	48.26	122.20	-73.94	peak	P	

AC20-5320

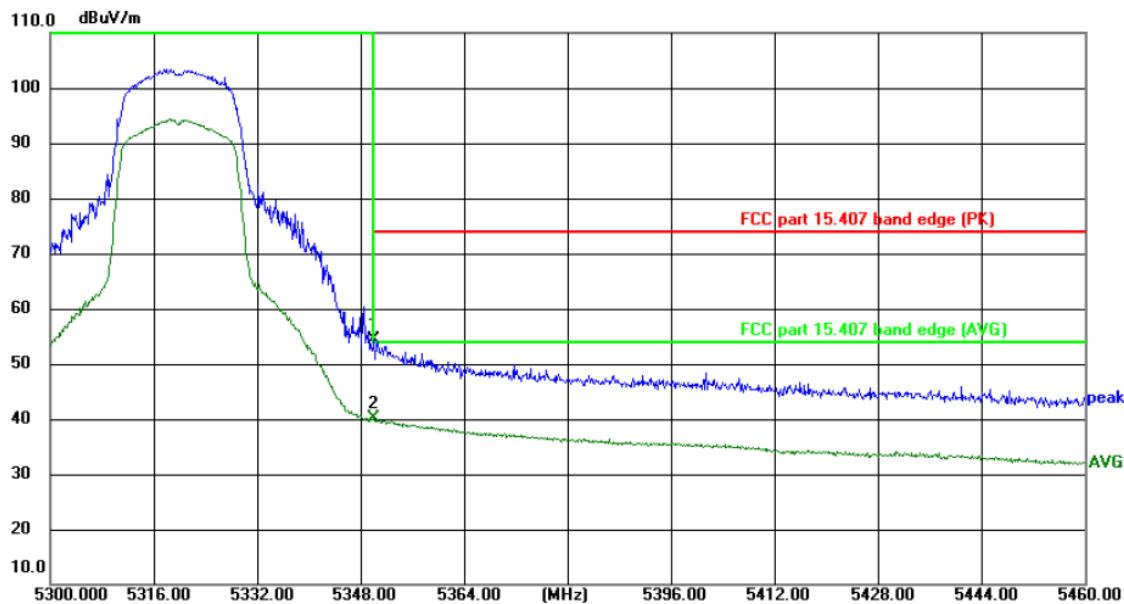

Site

Polarization: **Horizontal**


Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.160	62.83	-8.40	54.43	74.00	-19.57	peak	P	
2 *	5350.160	48.42	-8.40	40.02	54.00	-13.98	AVG	P	

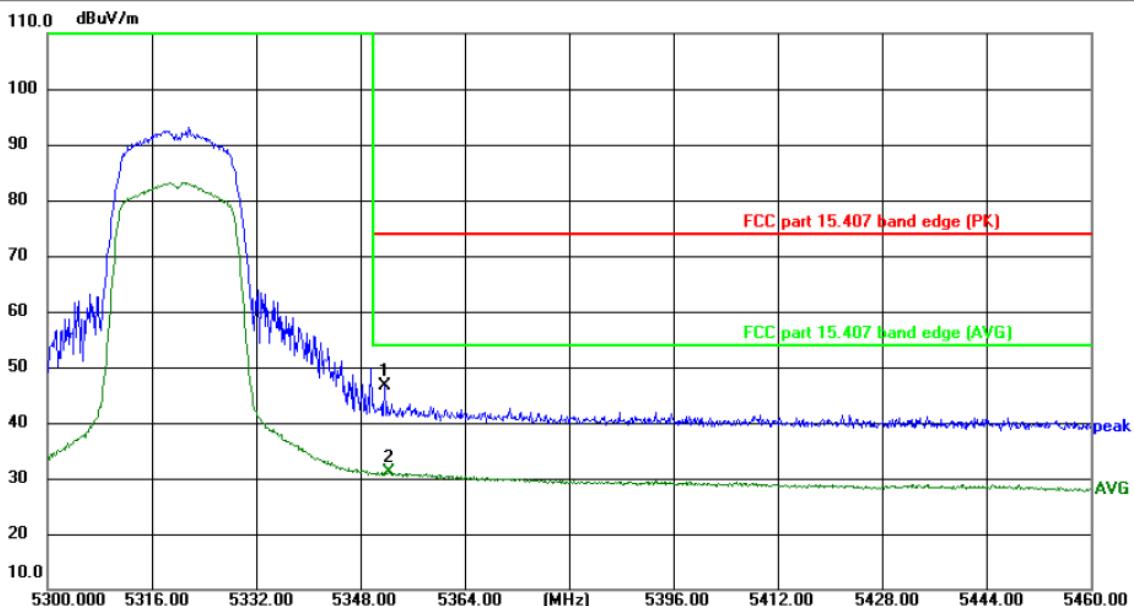

Site

Polarization: **Vertical**



Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)


Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5351.760	54.95	-8.40	46.55	74.00	-27.45	peak	P	
2 *	5352.400	39.43	-8.40	31.03	54.00	-22.97	AVG	P	

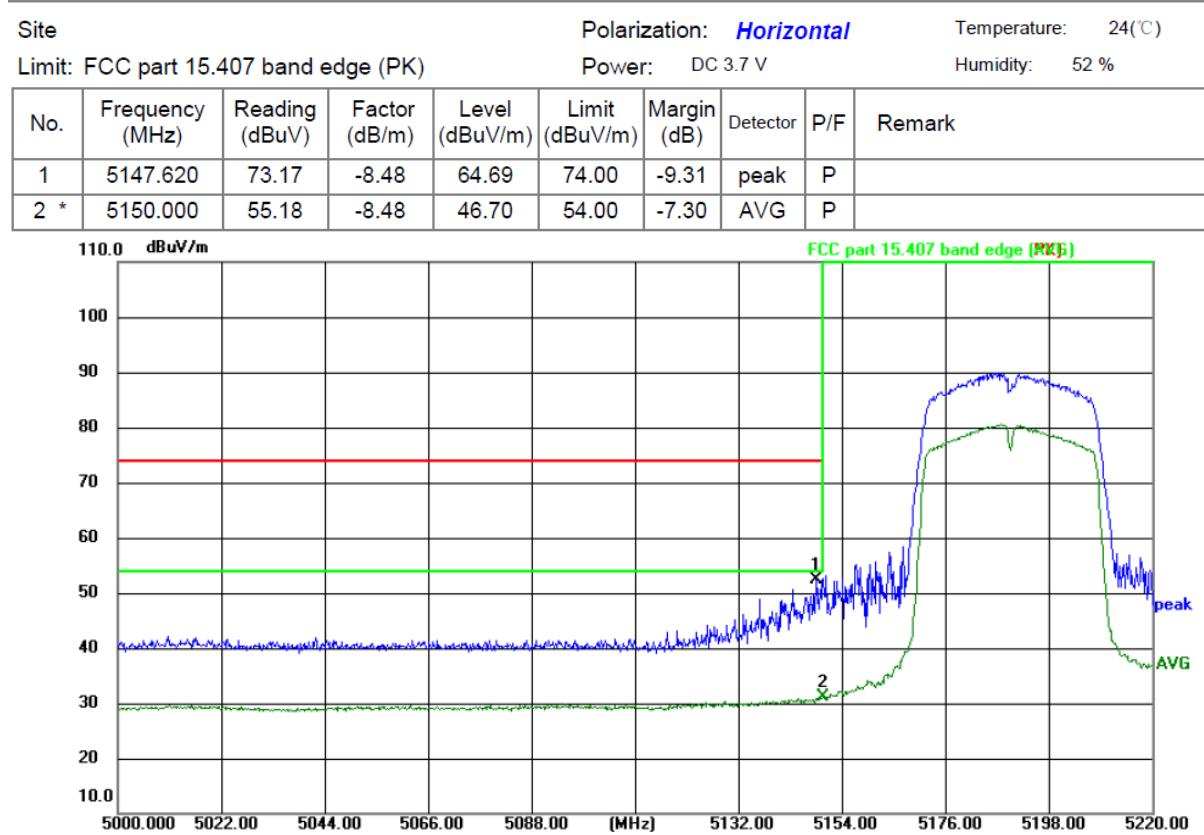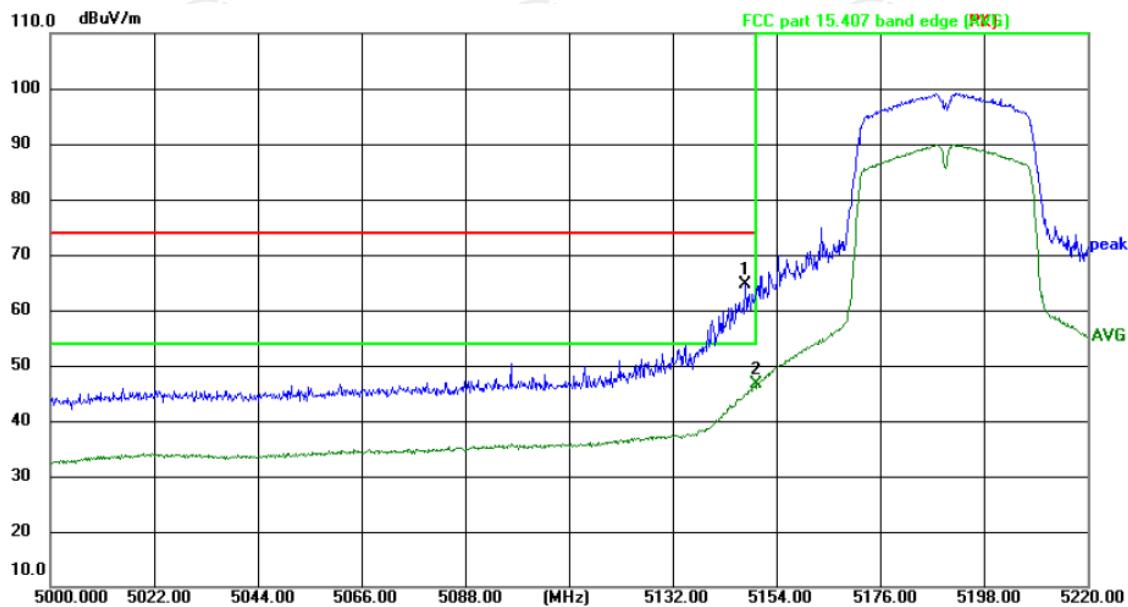AC40-5190


AC40-5310

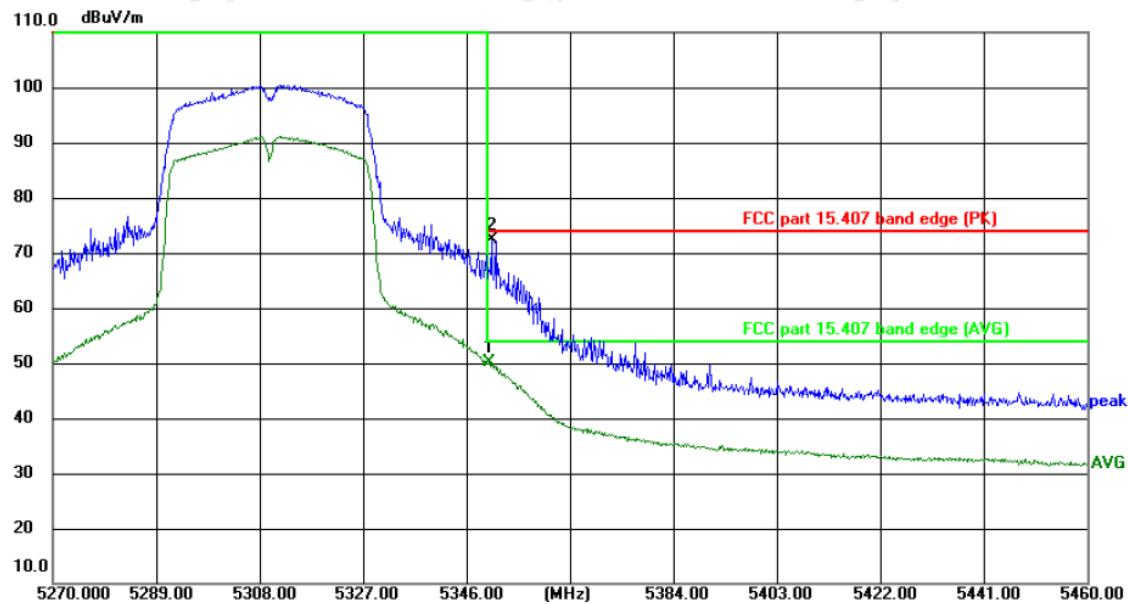

Site

 Polarization: **Horizontal**


Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.180	58.55	-8.40	50.15	54.00	-3.85	AVG	P	
2 *	5350.655	80.87	-8.40	72.47	74.00	-1.53	peak	P	

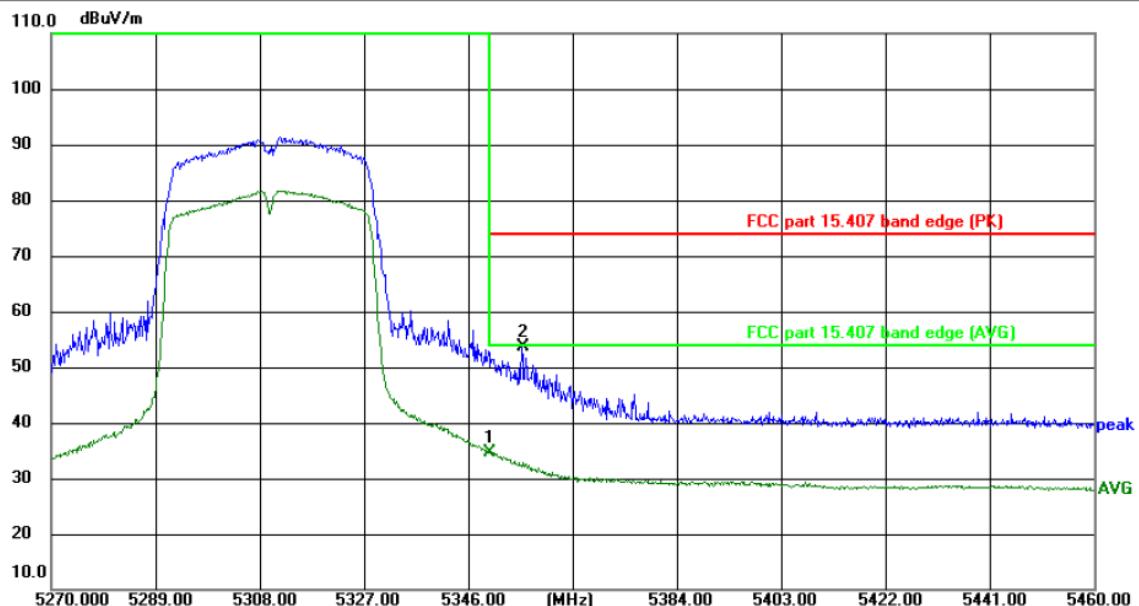

Site

 Polarization: **Vertical**

Temperature: 24(°C)


Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5350.085	43.11	-8.40	34.71	54.00	-19.29	AVG	P	
2	5355.785	62.09	-8.40	53.69	74.00	-20.31	peak	P	

AC80-5210

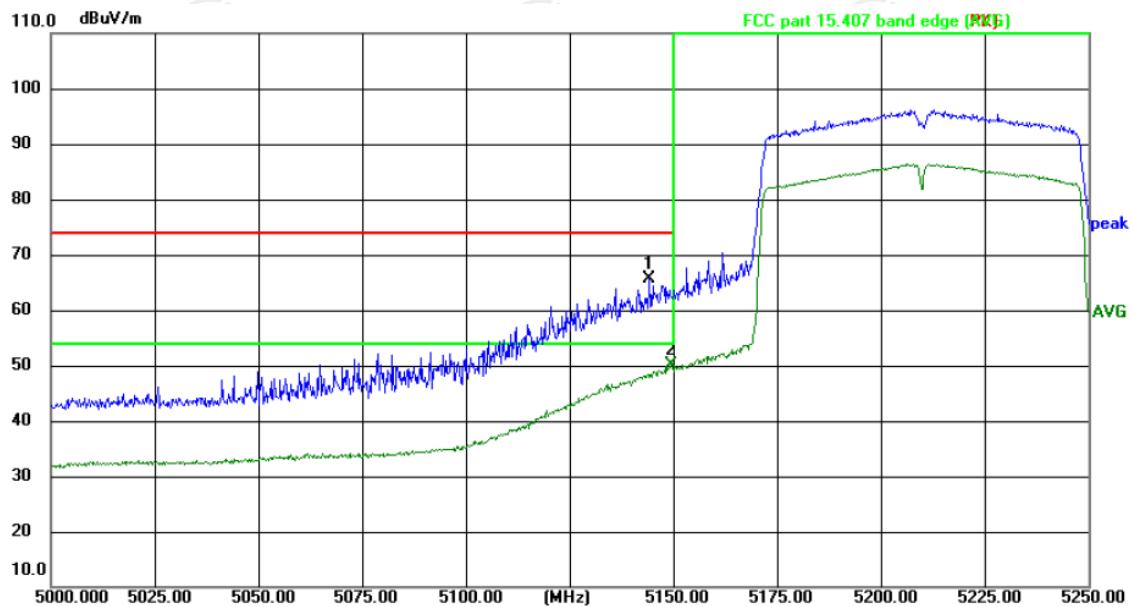

Site

 Polarization: **Horizontal**


Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5144.375	74.02	-8.48	65.54	74.00	-8.46	peak	P	
2 *	5149.625	58.62	-8.48	50.14	54.00	-3.86	AVG	P	

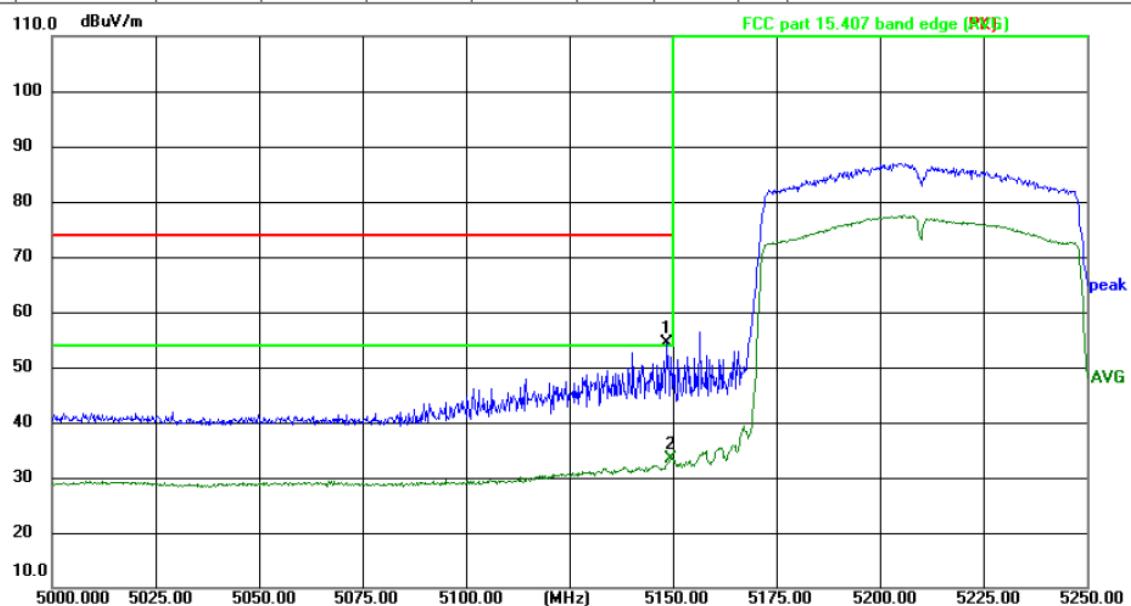

Site

 Polarization: **Vertical**

Temperature: 24(°C)


Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5148.625	62.88	-8.48	54.40	74.00	-19.60	peak	P	
2	5149.625	41.84	-8.48	33.36	54.00	-20.64	AVG	P	

AC80-5290

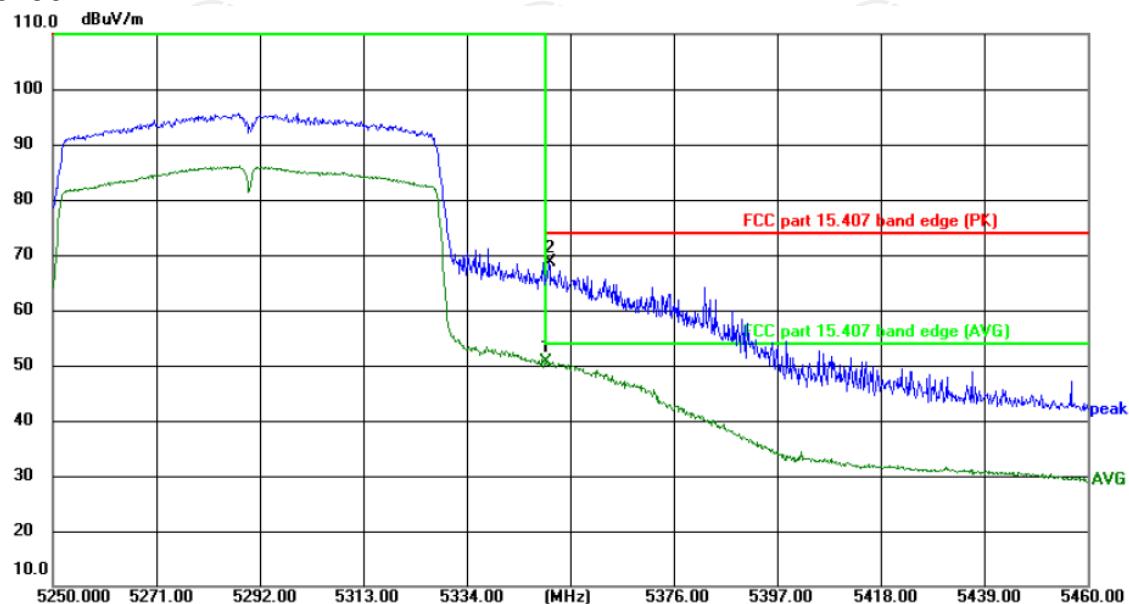

Site

 Polarization: **Horizontal**


Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5350.170	59.10	-8.40	50.70	54.00	-3.30	AVG	P	
2	5350.695	76.95	-8.40	68.55	74.00	-5.45	peak	P	

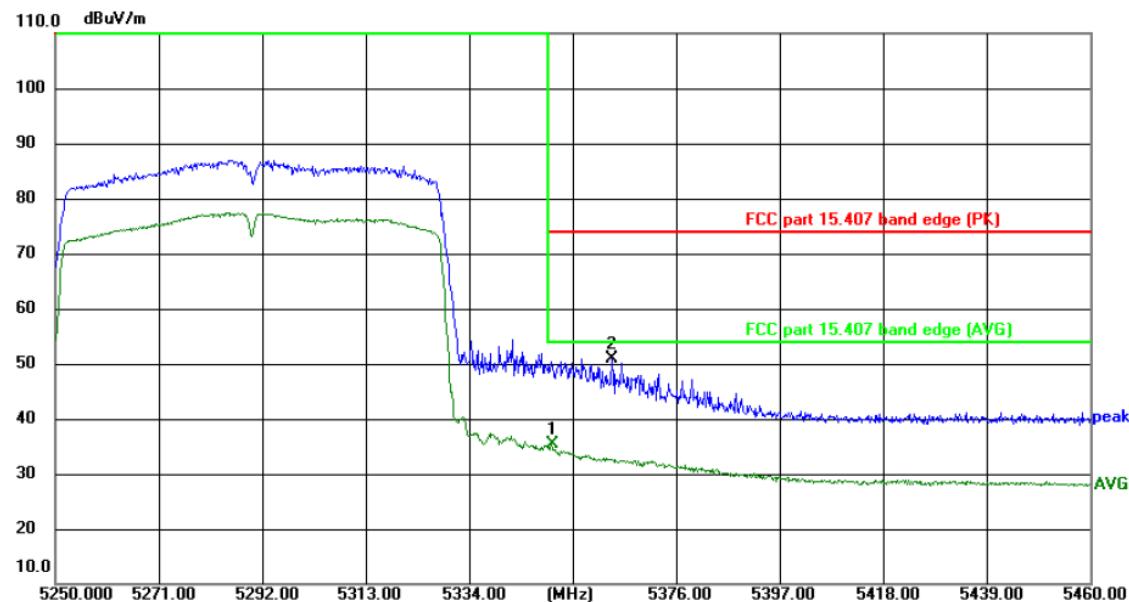

Site

 Polarization: **Vertical**

Temperature: 24(°C)


Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5350.695	43.88	-8.40	35.48	54.00	-18.52	AVG	P	
2	5362.980	59.27	-8.40	50.87	74.00	-23.13	peak	P	

AC20-5500

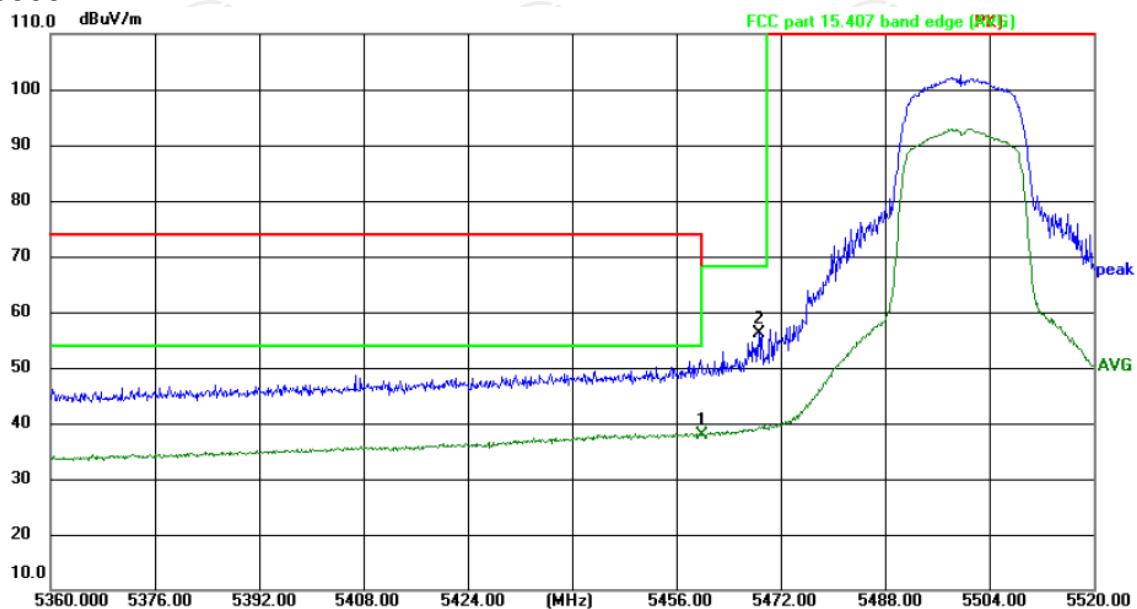

Site Polarization: **Horizontal** Temperature: 24(°C)
Limit: FCC part 15.407 band edge (PK) Power: DC 3.7 V Humidity: 52 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	46.23	-8.35	37.88	54.00	-16.12	AVG	P	
2 *	5468.800	64.58	-8.35	56.23	68.20	-11.97	peak	P	

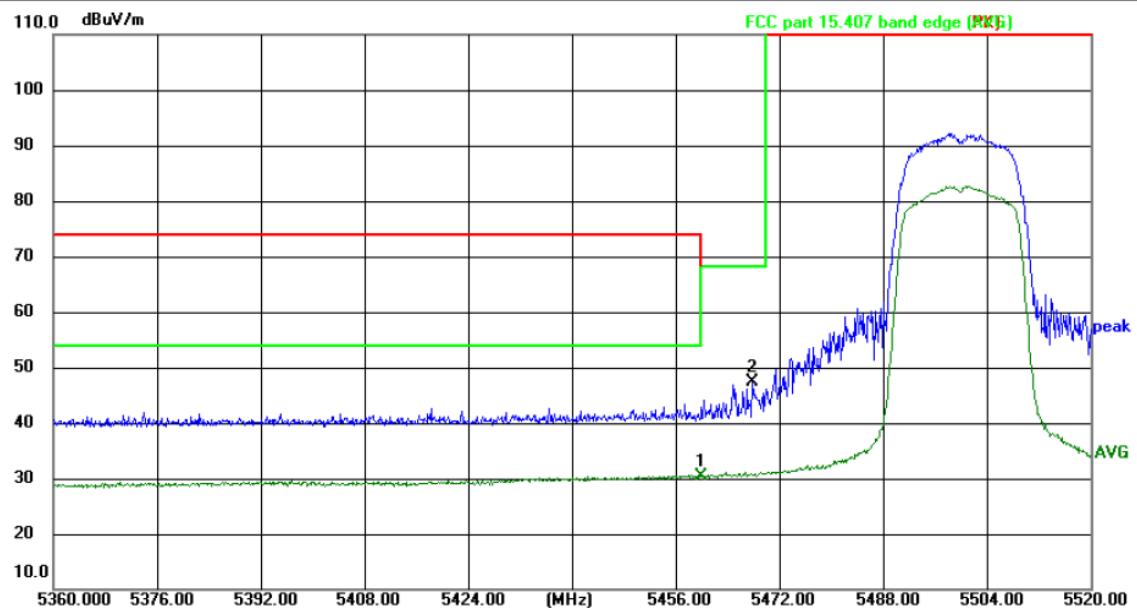

Site Polarization: **Vertical** Temperature: 24(°C)
Limit: FCC part 15.407 band edge (PK) Power: DC 3.7 V Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	38.71	-8.35	30.36	54.00	-23.64	AVG	P	
2 *	5467.840	55.74	-8.35	47.39	68.20	-20.81	peak	P	

AC20-5825

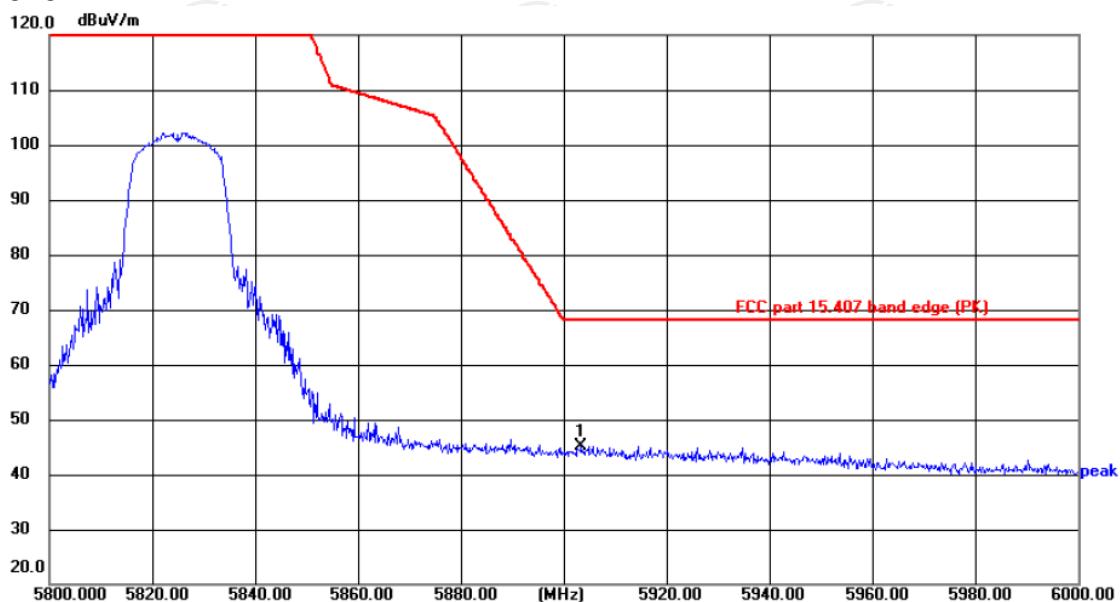

Site

Polarization: **Horizontal**


Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5903.400	52.15	-7.05	45.10	68.20	-23.10	peak	P	

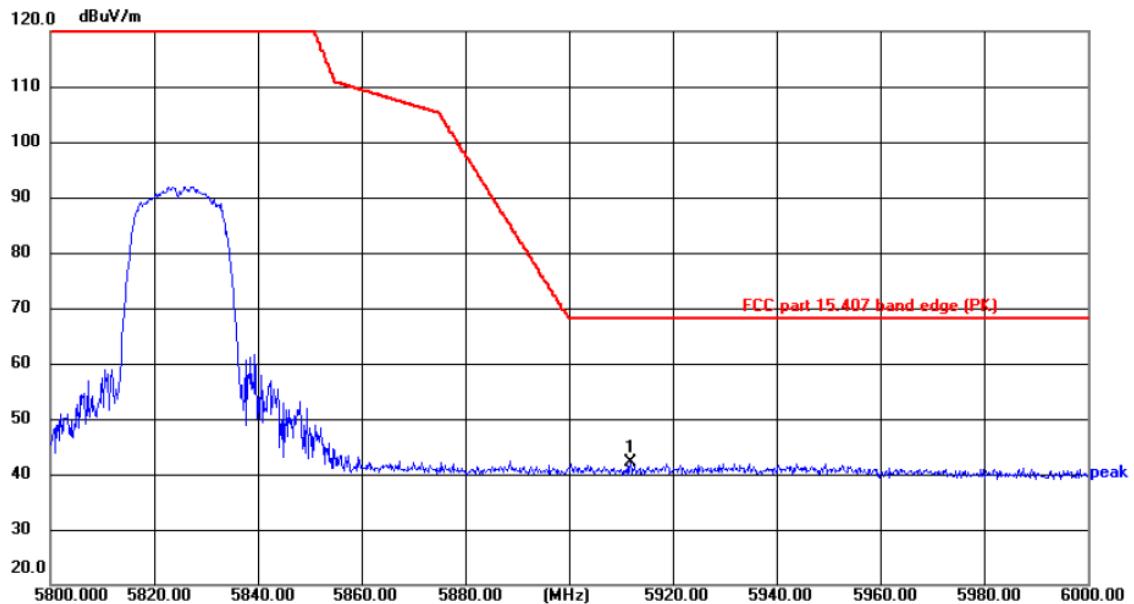

Site

Polarization: **Vertical**

Temperature: 24(°C)


Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5911.800	49.04	-7.03	42.01	68.20	-26.19	peak	P	

AC40-5510

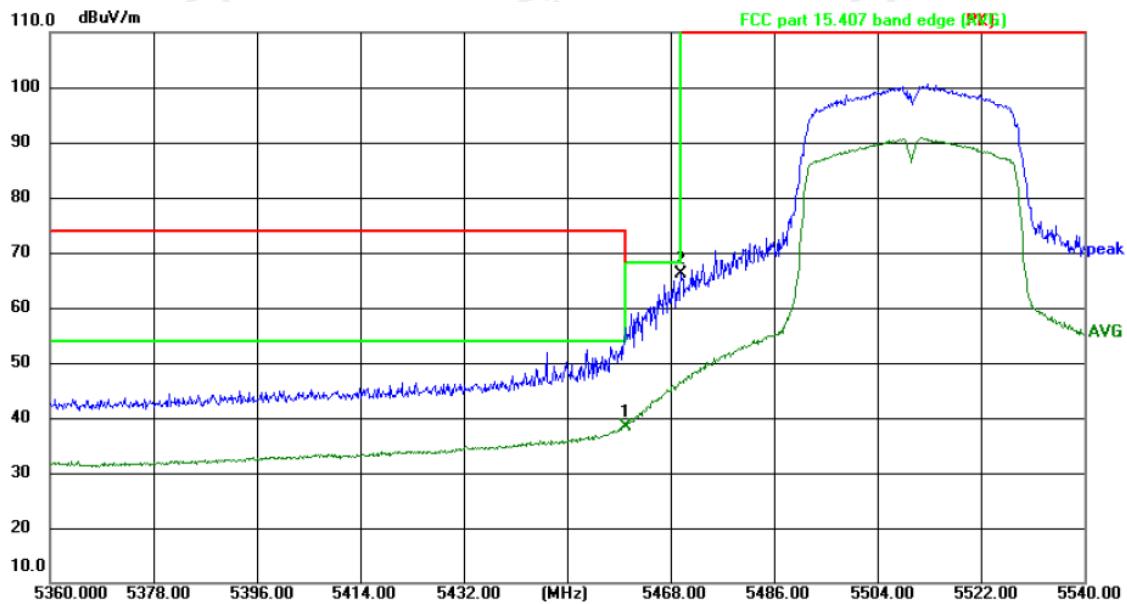

Site

 Polarization: **Horizontal**


Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	46.64	-8.35	38.29	54.00	-15.71	AVG	P	
2 *	5469.890	74.41	-8.35	66.06	68.20	-2.14	peak	P	

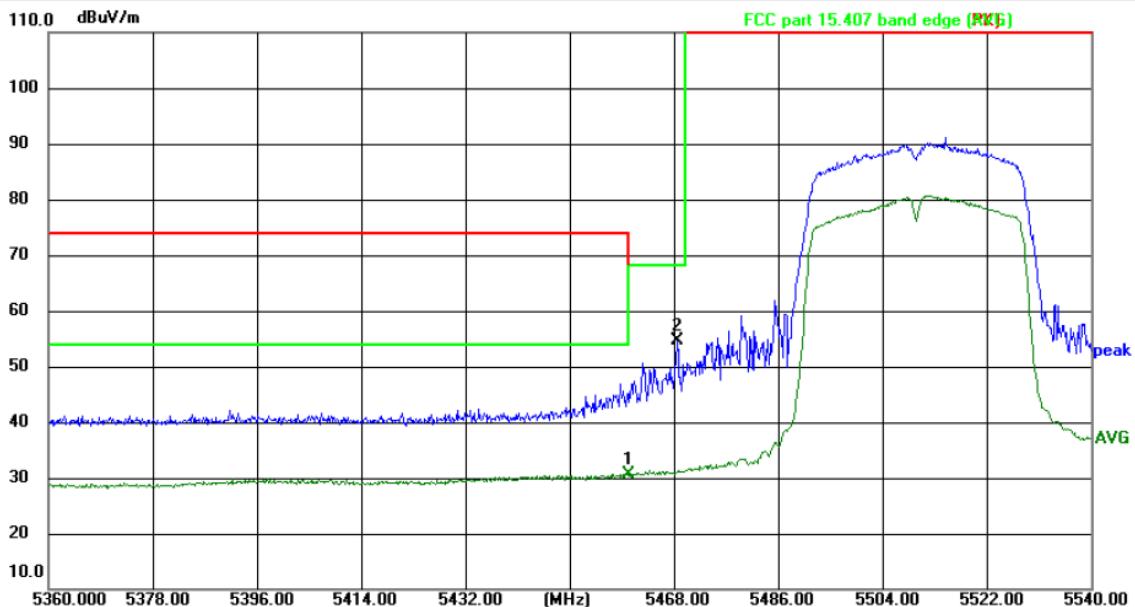

Site

 Polarization: **Vertical**

Temperature: 24(°C)


Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	39.02	-8.35	30.67	54.00	-23.33	AVG	P	
2 *	5468.630	62.90	-8.35	54.55	68.20	-13.65	peak	P	

AC40-5795

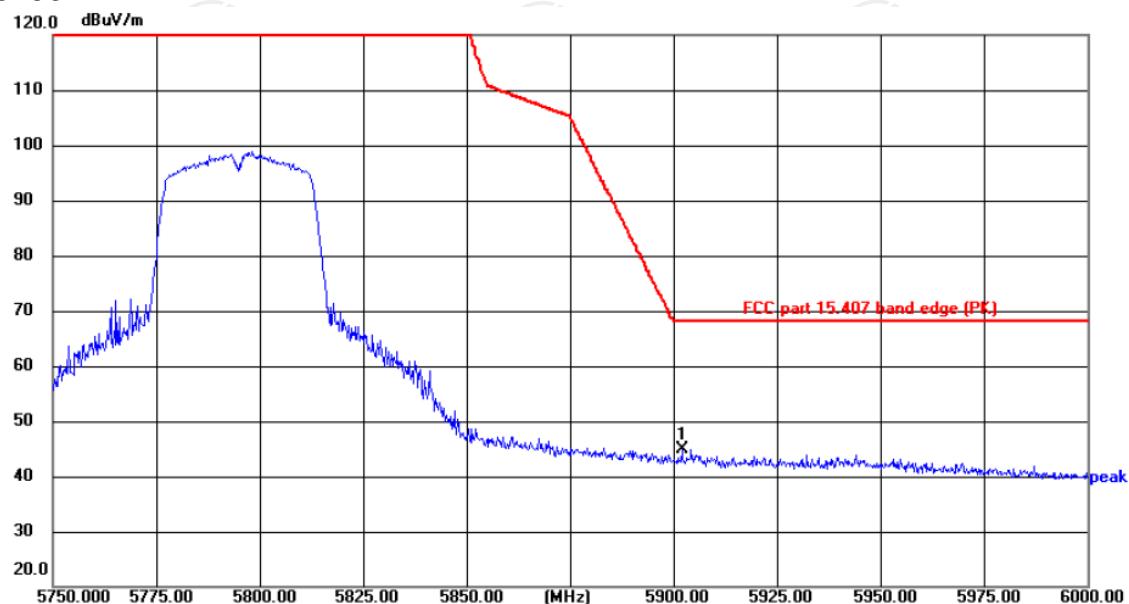

Site

Polarization: **Horizontal**


Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5902.000	51.98	-7.05	44.93	68.20	-23.27	peak	P	

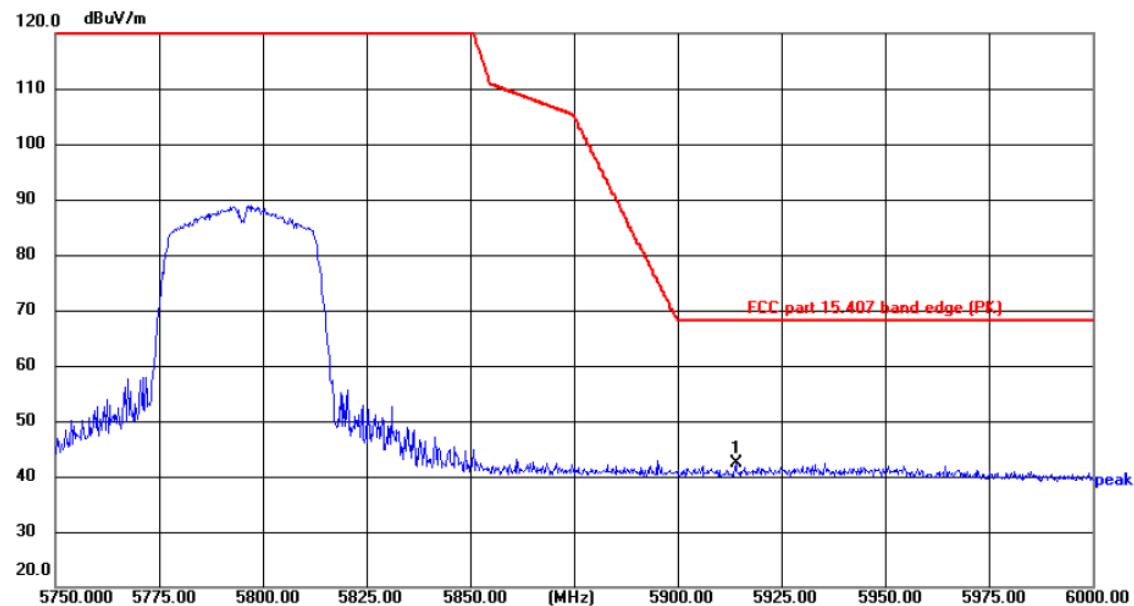

Site

Polarization: **Vertical**

Temperature: 24(°C)


Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5914.000	49.33	-7.02	42.31	68.20	-25.89	peak	P	

AC80-5530

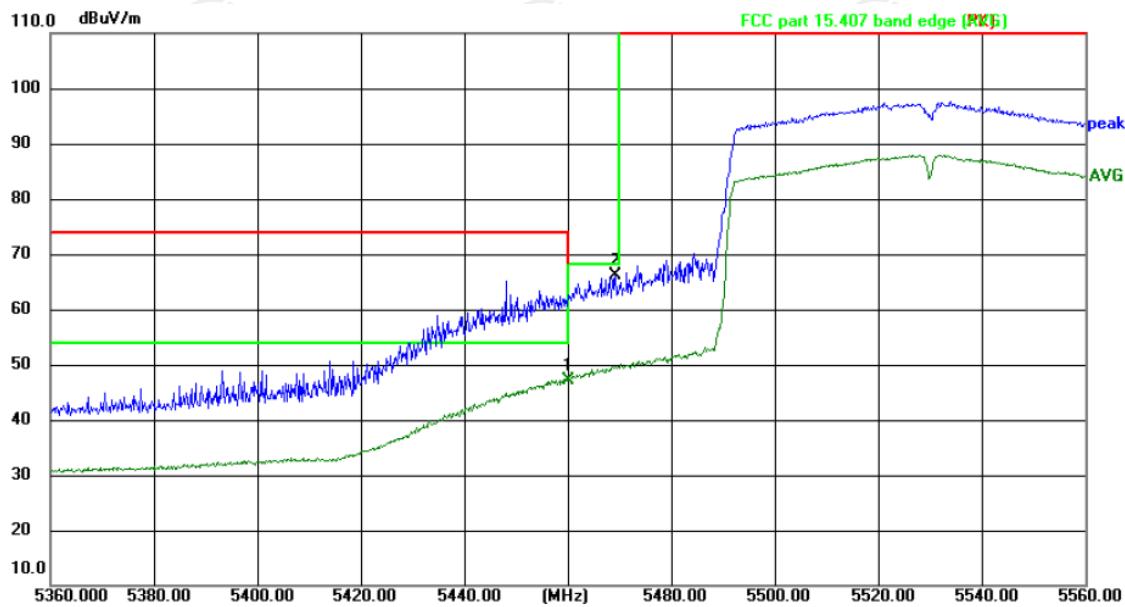

Site

 Polarization: **Horizontal**


Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	55.49	-8.35	47.14	54.00	-6.86	AVG	P	
2 *	5469.300	74.57	-8.35	66.22	68.20	-1.98	peak	P	

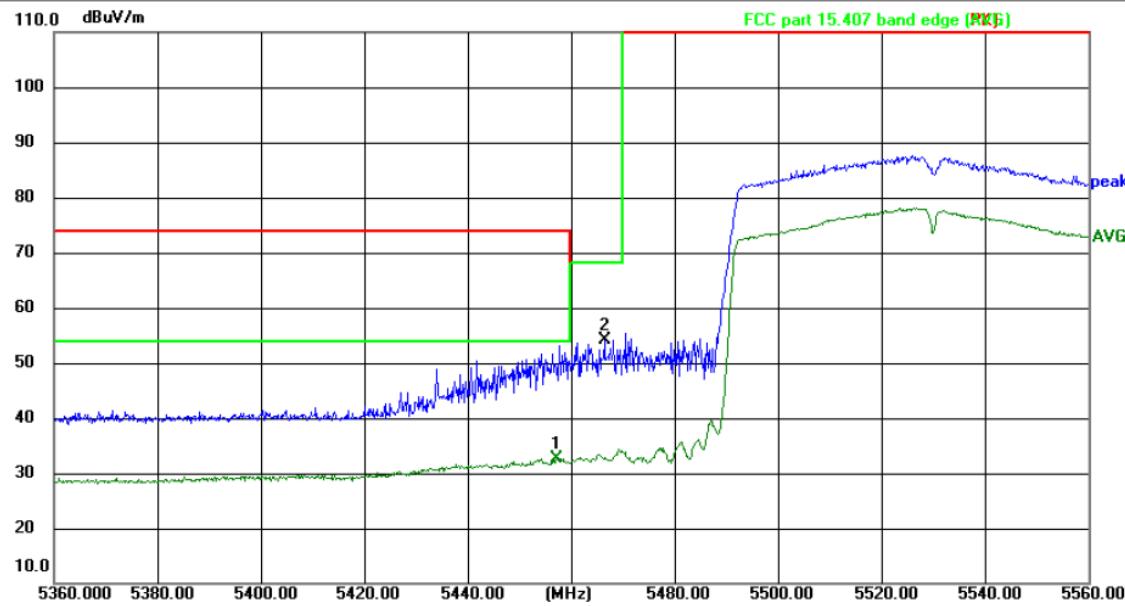

Site

 Polarization: **Vertical**

Temperature: 24(°C)


Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5457.400	41.04	-8.36	32.68	54.00	-21.32	AVG	P	
2 *	5466.500	62.46	-8.35	54.11	68.20	-14.09	peak	P	

AC80-5775

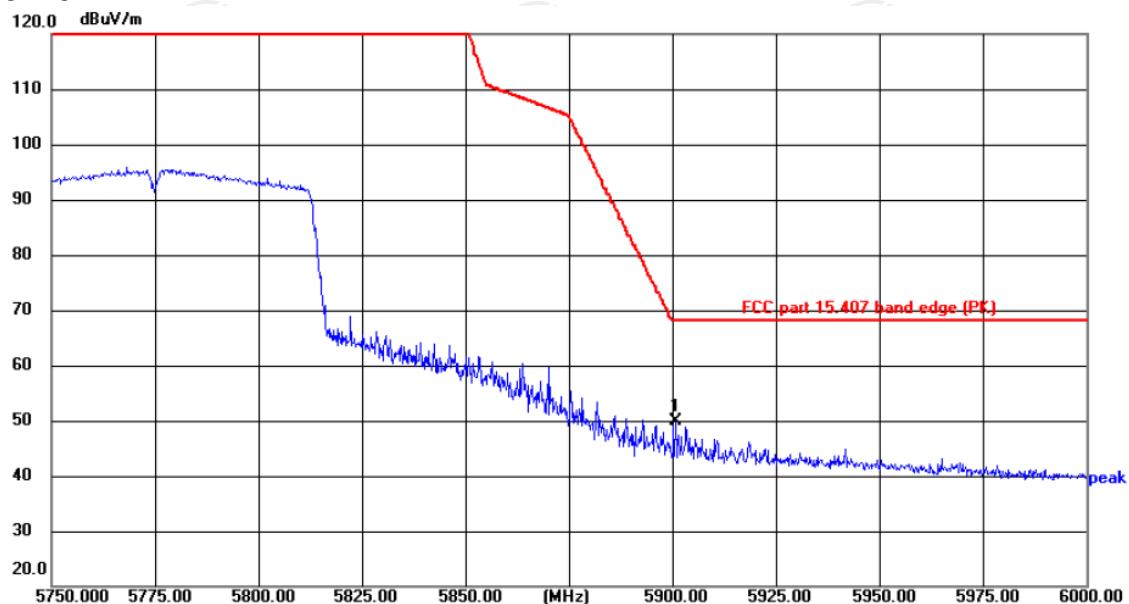

Site

 Polarization: **Horizontal**


Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5900.750	56.97	-7.06	49.91	68.20	-18.29	peak	P	

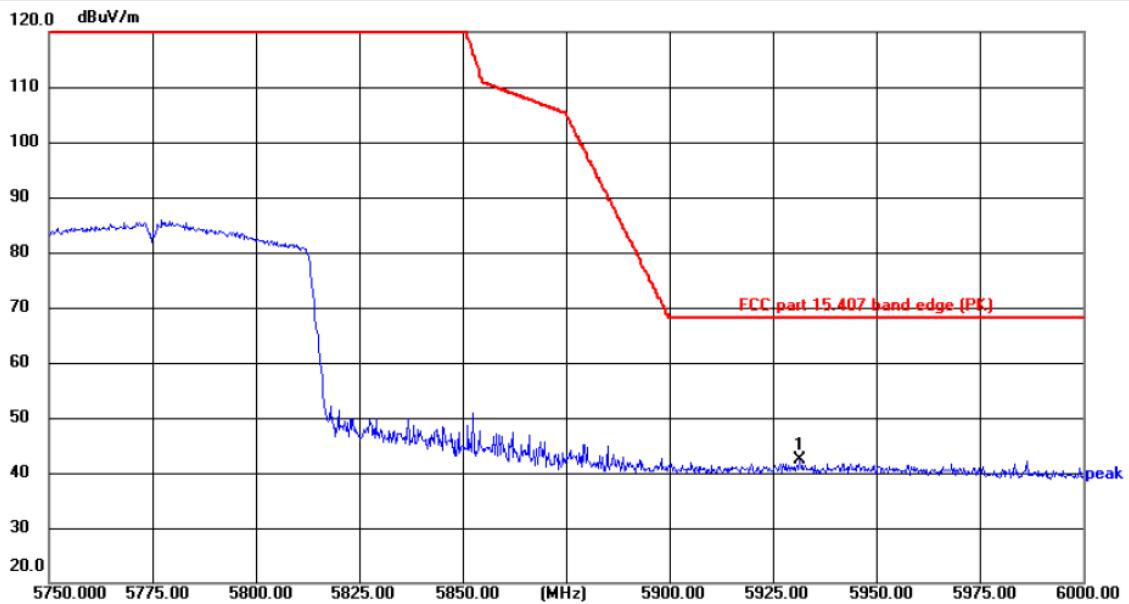

Site

 Polarization: **Vertical**

Temperature: 24(°C)

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.7 V


Humidity: 52 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5931.625	49.35	-6.97	42.38	68.20	-25.82	peak	P	

Note: All modulation (802.11a, 802.11n, 802.11ac) have been tested, only the worst case in 802.11ac be reported.


5.8. Unwanted Emissions

5.8.1. Test Specification

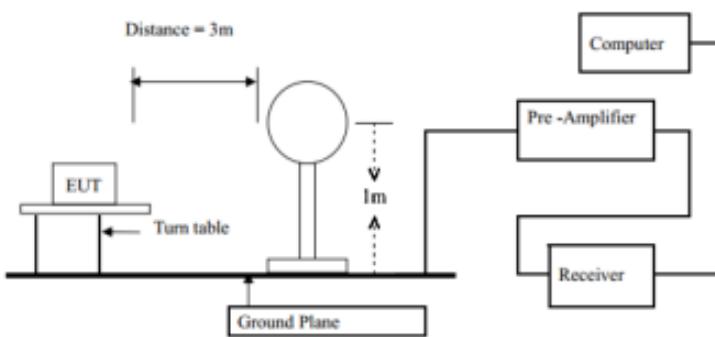Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205																																				
Test Method:	KDB 789033 D02 v02r01																																				
Frequency Range:	9kHz to 40GHz																																				
Measurement Distance:	3 m																																				
Antenna Polarization:	Horizontal & Vertical																																				
Operation mode:	Transmitting mode with modulation																																				
Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value			
Frequency	Detector	RBW	VBW	Remark																																	
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																	
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																	
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																																	
Above 1GHz	Peak	1MHz	3MHz	Peak Value																																	
	Peak	1MHz	10Hz	Average Value																																	
Limit:	<p>Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,</p> <p>In restricted bands:</p> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>Limit@3m</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1G</td><td>Peak</td> <td>74dBμV/m</td> </tr> <tr> <td>AVG</td> <td>54dBμV/m</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>3</td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>In un-restricted bands: 68.2dBμV/m</p>					Frequency	Detector	Limit@3m	Above 1G	Peak	74dB μ V/m	AVG	54dB μ V/m	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	3	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3
Frequency	Detector	Limit@3m																																			
Above 1G	Peak	74dB μ V/m																																			
	AVG	54dB μ V/m																																			
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																																			
0.009-0.490	2400/F(KHz)	300																																			
0.490-1.705	24000/F(KHz)	3																																			
1.705-30	30	30																																			
30-88	100	3																																			
88-216	150	3																																			
216-960	200	3																																			
Above 960	500	3																																			
Test setup:	<p>For radiated emissions below 30MHz</p>  <p>Distance = 3m</p> <p>Turn table</p> <p>EUT</p> <p>Computer</p> <p>Pre -Amplifier</p> <p>Receiver</p> <p>Ground Plane</p> <p>1m</p> <p>30MHz to 1GHz</p>																																				

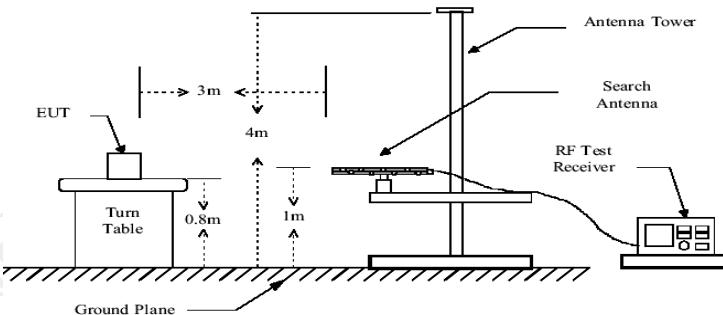

Above 1GHz

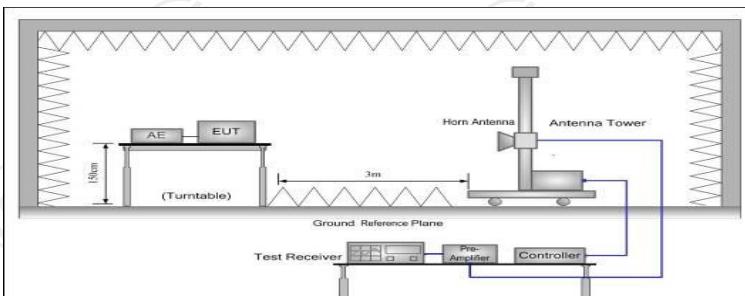

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Procedure:

Test results:

PASS

5.8.2. Test Data

Please refer to following diagram for individual

Below 1GHz

Horizontal:



Site #2 3m Anechoic Chamber

Polarization: **Horizontal**

Temperature: 24.4(C) Humidity: 51 %

Limit: FCC Part 15C RE_3m

Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	60.4917	9.83	13.03	22.86	40.00	-17.14	QP	P	
2	96.4360	13.94	10.00	23.94	43.50	-19.56	QP	P	
3	125.8863	12.43	12.35	24.78	43.50	-18.72	QP	P	
4	230.9067	17.50	12.14	29.64	46.00	-16.36	QP	P	
5	327.8872	19.16	14.69	33.85	46.00	-12.15	QP	P	
6 *	480.5276	17.48	18.97	36.45	46.00	-9.55	QP	P	

Vertical:



Site #2 3m Anechoic Chamber

 Polarization: **Vertical**

Temperature: 24.4(C) Humidity: 51 %

Limit: FCC Part 15C RE_3m

Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	30.6375	19.83	12.12	31.95	40.00	-8.05	QP	P	
2	40.8444	14.67	14.00	28.67	40.00	-11.33	QP	P	
3	115.7256	19.90	11.64	31.54	43.50	-11.96	QP	P	
4	239.9873	25.46	12.75	38.21	46.00	-7.79	QP	P	
5	480.5276	15.68	18.97	34.65	46.00	-11.35	QP	P	
6 *	721.7258	15.76	23.36	39.12	46.00	-6.88	QP	P	

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80) and the worst case Mode (Lowest channel and 802.11n(HT40)) was submitted only.

3. Measurement (dB μ V) = Reading level + Correction Factor , correction Factor= Antenna Factor + Cable loss - Pre-amplifier.

Modulation Type: Band 1									
11a CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10360	H	38.15	---	8.02	46.17	---	68.2	---	-22.03
15540	H	38.47	---	9.87	48.34	---	74	54	-5.66
---	H	---	---	---	---	---	---	---	---
10360	V	38.03	---	8.02	46.05	---	68.2	---	-22.15
15540	V	38.72	---	9.87	48.59	---	74	54	-5.41
11a CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10400	H	39.75	---	7.97	47.72	---	68.2	---	-20.48
15600	H	38.32	---	9.83	48.15	---	74	54	-5.85
---	H	---	---	---	---	---	---	---	---
10400	V	40.86	---	7.97	48.83	---	68.2	---	-19.37
15600	V	38.14	---	9.83	47.97	---	74	54	-6.03
---	V	---	---	---	---	---	---	---	---
11a CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10480	H	38.47	---	7.97	46.44	---	68.2	---	-21.76
15720	H	37.96	---	9.83	47.79	---	74	54	-6.21
---	H	---	---	---	---	---	---	---	---
10480	V	38.02	---	7.97	45.99	---	68.2	---	-22.21
15720	V	36.45	---	9.83	46.28	---	74	54	-7.72
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10360	H	41.74	---	8.02	49.76	---	68.2	---	-18.44
15540	H	37.51	---	9.87	47.38	---	74	54	-6.62
---	H	---	---	---	---	---	---	---	---
10360	V	42.37	---	8.02	50.39	---	68.2	---	-17.81
15540	V	37.04	---	9.87	46.91	---	74	54	-7.09
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10400	H	40.35	---	7.97	48.32	---	68.2	---	-19.88
15600	H	38.61	---	9.83	48.44	---	74	54	-5.56
---	H	---	---	---	---	---	---	---	---
10400	V	40.74	---	7.97	48.71	---	68.2	---	-19.49
15600	V	37.82	---	9.83	47.65	---	74	54	-6.35
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10480	H	41.25	---	7.97	49.22	---	68.2	---	-18.98
15720	H	39.08	---	9.83	48.91	---	74	54	-5.09
---	H	---	---	---	---	---	---	---	---
10480	V	40.56	---	7.97	48.53	---	68.2	---	-19.67
15720	V	39.12	---	9.83	48.95	---	74	54	-5.05
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH38: 5190MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10380	H	39.71	---	7.75	47.46	---	68.2	---	-20.74
15570	H	37.05	---	9.87	46.92	---	74	54	-7.08
---	H	---	---	---	---	---	---	---	---
10380	V	40.63	---	7.75	48.38	---	68.2	---	-19.82
15570	V	37.92	---	9.87	47.79	---	74	54	-6.21
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH46: 5230MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10460	H	41.78	---	7.97	49.75	---	68.2	---	-18.45
15690	H	38.41	---	9.83	48.24	---	74	54	-5.76
---	H	---	---	---	---	---	---	---	---
10460	V	41.25	---	7.97	49.22	---	68.2	---	-18.98
15690	V	38.98	---	9.83	48.81	---	74	54	-5.19
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10360	H	40.63	---	8.02	48.65	---	68.2	---	-19.55
15540	H	37.52	---	9.87	47.39	---	74	54	-6.61
---	H	---	---	---	---	---	---	---	---
11ac(VHT20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10400	H	39.91	---	7.97	47.88	---	68.2	---	-20.32
15600	H	38.42	---	9.83	48.25	---	74	54	-5.75
---	H	---	---	---	---	---	---	---	---
10400	V	39.26	---	7.97	47.23	---	68.2	---	-20.97
15600	V	38.38	---	9.83	48.21	---	74	54	-5.79
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH48:5240									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10480	H	37.25	---	7.97	45.22	---	68.2	---	-22.98
15720	H	37.71	---	9.83	47.54	---	74	54	-6.46
---	H	---	---	---	---	---	---	---	---
10480	V	38.44	---	7.97	46.41	---	68.2	---	-21.79
15720	V	38.85	---	9.83	48.68	---	74	54	-5.32
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH38:5190									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10380	H	40.64	---	7.75	48.39	---	68.2	---	-19.81
15570	H	39.21	---	9.87	49.08	---	74	54	-4.92
---	H	---	---	---	---	---	---	---	---
10380	V	38.03	---	7.75	45.78	---	68.2	---	-22.42
15570	V	38.91	---	9.87	48.78	---	74	54	-5.22
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH46:5230									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10460	H	38.82	---	7.97	46.79	---	68.2	---	-21.41
15690	H	38.14	---	9.83	47.97	---	74	54	-6.03
---	H	---	---	---	---	---	---	---	---
10460	V	39.75	---	7.97	47.72	---	68.2	---	-20.48
15690	V	37.36	---	9.83	47.19	---	74	54	-6.81
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) CH42:5210									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10420	H	41.53	---	7.96	49.49	---	68.2	---	-18.71
15630	H	39.41	---	9.84	49.25	---	74	54	-4.75
---	H	---	---	---	---	---	---	---	---
10420	V	41.69	---	7.96	49.65	---	68.2	---	-18.55
15630	V	39.72	---	9.84	49.56	---	74	54	-4.44
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Modulation Type: Band 2A									
11a CH52: 5260MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10520	H	38.92	---	7.97	46.89	---	68.2	---	-21.31
15780	H	36.24	---	9.83	46.07	---	74	54	-7.93
---	H	---	---	---	---	---	---	---	---
10520	V	41.81	---	7.97	49.78	---	68.2	---	-18.42
15780	V	38.45	---	9.83	48.28	---	74	54	-5.72
11a CH60: 5300MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10600	H	38.85	---	7.98	46.83	---	74	54	-7.17
15900	H	38.23	---	9.85	48.08	---	74	54	-5.92
---	H	---	---	---	---	---	---	---	---
10600	V	39.41	---	7.98	47.39	---	74	54	-6.61
15900	V	37.96	---	9.85	47.81	---	74	54	-6.19
---	V	---	---	---	---	---	---	---	---
11a CH64: 5320MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10640	H	40.33	---	7.98	48.31	---	74	54	-5.69
15960	H	37.27	---	9.85	47.12	---	74	54	-6.88
---	H	---	---	---	---	---	---	---	---
10640	V	39.69	---	7.98	47.67	---	74	54	-6.33
15960	V	35.71	---	9.85	45.56	---	74	54	-8.44
---	V	---	---	---	---	---	---	---	---
11n(HT20) C52: 5260MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10520	H	41.36	---	7.97	49.33	---	68.2	---	-18.87
15780	H	38.12	---	9.83	47.95	---	74	54	-6.05
---	H	---	---	---	---	---	---	---	---
10520	V	38.58	---	7.97	46.55	---	68.2	---	-21.65
15780	V	35.63	---	9.83	45.46	---	74	54	-8.54
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH60: 5300MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10600	H	38.71	---	7.98	46.69	---	74	54	-7.31
15900	H	37.62	---	9.85	47.47	---	74	54	-6.53
---	H	---	---	---	---	---	---	---	---
11n(HT20) CH64: 5320MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10640	H	37.45	---	7.98	45.43	---	74	54	-8.57
15960	H	35.61	---	9.85	45.46	---	74	54	-8.54
---	H	---	---	---	---	---	---	---	---
10640	V	39.43	---	7.98	47.41	---	74	54	-6.59
15960	V	39.97	---	9.85	49.82	---	74	54	-4.18
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH54: 5270MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10540	H	41.85	---	7.97	49.82	---	68.2	---	-18.38
15810	H	37.02	---	9.83	46.85	---	74	54	-7.15
---	H	---	---	---	---	---	---	---	---
10540	V	37.14	---	7.97	45.11	---	68.2	---	-23.09
15810	V	36.38	---	9.83	46.21	---	74	54	-7.79
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH62: 5310MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10620	H	40.66	---	7.98	48.64	---	74	54	-5.36
15930	H	38.81	---	9.85	48.66	---	74	54	-5.34
---	H	---	---	---	---	---	---	---	---
10620	V	38.25	---	7.98	46.23	---	74	54	-7.77
15930	V	36.37	---	9.85	46.22	---	74	54	-7.78
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) C52: 5260MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10520	H	40.47	---	7.97	48.44	---	68.2	---	-19.76
15780	H	39.51	---	9.83	49.34	---	74	54	-4.66
---	H	---	---	---	---	---	---	---	---
10520	V	40.78	---	7.97	48.75	---	68.2	---	-19.45
15780	V	37.02	---	9.83	46.85	---	74	54	-7.15
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH60: 5300MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10600	H	38.71	---	7.98	46.69	---	74	54	-7.31
15900	H	37.38	---	9.85	47.23	---	74	54	-6.77
---	H	---	---	---	---	---	---	---	---
10600	V	37.65	---	7.98	45.63	---	74	54	-8.37
15900	V	36.48	---	9.85	46.33	---	74	54	-7.67
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH64: 5320MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10640	H	40.53	---	7.98	48.51	---	74	54	-5.49
15960	H	39.14	---	9.85	48.99	---	74	54	-5.01
---	H	---	---	---	---	---	---	---	---
10640	V	40.25	---	7.98	48.23	---	74	54	-5.77
15960	V	35.63	---	9.85	45.48	---	74	54	-8.52
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH54: 5270MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10540	H	40.61	---	7.97	48.58	---	68.2	---	-19.62
15810	H	37.58	---	9.83	47.41	---	74	54	-6.59
---	H	---	---	---	---	---	---	---	---
10540	V	39.17	---	7.97	47.14	---	68.2	---	-21.06
15810	V	37.26	---	9.83	47.09	---	74	54	-6.91
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH62: 5310MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10620	H	38.36	---	7.98	46.34	---	74	54	-7.66
15930	H	36.91	---	9.85	46.76	---	74	54	-7.24
---	H	---	---	---	---	---	---	---	---
10620	V	39.27	---	7.98	47.25	---	74	54	-6.75
15930	V	37.43	---	9.85	47.28	---	74	54	-6.72
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) C58:5290MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10580	H	41.81	---	7.98	49.79	---	74	54	-4.21
15870	H	39.19	---	9.85	49.04	---	74	54	-4.96
---	H	---	---	---	---	---	---	---	---
10580	V	40.34	---	7.98	48.32	---	74	54	-5.68
15870	V	37.78	---	9.85	47.63	---	74	54	-6.37
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Modulation Type: Band 2C									
11a CH100: 5500MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11000	H	39.35	---	8.03	47.38	---	74	54	-6.62
16500	H	39.92	---	9.76	49.68	---	68.2	---	-18.52
---	H	---	---	---	---	---	---	---	---
11000	V	40.58	---	8.03	48.61	---	74	54	-5.39
16500	V	40.36	---	9.76	50.12	---	68.2	---	-18.08
11a CH120: 5600MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11200	H	40.02	---	8.04	48.06	---	74	54	-5.94
16800	H	40.37	---	9.74	50.11	---	68.2	---	-18.09
---	H	---	---	---	---	---	---	---	---
11200	V	38.22	---	8.04	46.26	---	74	54	-7.74
16800	V	39.58	---	9.74	49.32	---	68.2	---	-18.88
---	V	---	---	---	---	---	---	---	---
11a CH140: 5700MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11400	H	38.61	---	8.05	46.66	---	74	54	-7.34
17100	H	40.43	---	9.72	50.15	---	68.2	---	-18.05
---	H	---	---	---	---	---	---	---	---
11400	V	38.52	---	8.05	46.57	---	74	54	-7.43
17100	V	40.96	---	9.72	50.68	---	68.2	---	-17.52
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH100: 5500MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11000	H	40.72	---	8.03	48.75	---	74	54	-5.25
16500	H	39.15	---	9.76	48.91	---	68.2	---	-19.29
---	H	---	---	---	---	---	---	---	---
11000	V	38.38	---	8.03	46.41	---	74	54	-7.59
16500	V	41.41	---	9.76	51.17	---	68.2	---	-17.03
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH120: 5600MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11200	H	39.81	---	8.04	47.85	---	74	54	-6.15
16800	H	40.34	---	9.74	50.08	---	68.2	---	-18.12
---	H	---	---	---	---	---	---	---	---
11200	V	38.72	---	8.04	46.76	---	74	54	-7.24
16800	V	39.15	---	9.74	48.89	---	68.2	---	-19.31
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH140: 5700MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11400	H	39.62	---	8.05	47.67	---	74	54	-6.33
17100	H	40.03	---	9.72	49.75	---	68.2	---	-18.45
---	H	---	---	---	---	---	---	---	---
11400	V	38.72	---	8.05	46.77	---	74	54	-7.23
17100	V	39.99	---	9.72	49.71	---	68.2	---	-18.49
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH102: 5510MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11020	H	39.28	---	8.03	47.31	---	74	54	-6.69
16530	H	39.41	---	9.76	49.17	---	68.2	---	-19.03
---	H	---	---	---	---	---	---	---	---
11020	V	39.39	---	8.03	47.42	---	74	54	-6.58
16530	V	37.61	---	9.76	47.37	---	68.2	---	-20.83
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH118: 5590MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11180	H	39.38	---	8.04	47.42	---	74	54	-6.58
16770	H	39.17	---	9.74	48.91	---	68.2	---	-19.29
---	H	---	---	---	---	---	---	---	---
11180	V	37.82	---	8.04	45.86	---	74	54	-8.14
16770	V	41.03	---	9.74	50.77	---	68.2	---	-17.43
---	V	---	---	---	---	---	---	---	---

11n(HT40) CH134: 5670MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11340	H	40.76	---	8.05	48.81	---	74	54	-5.19
17010	H	41.91	---	9.72	51.63	---	68.2	---	-16.57
---	H	---	---	---	---	---	---	---	---
11ac(VHT20) CH100: 5500MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11000	H	37.91	---	8.03	45.94	---	74	54	-8.06
16500	H	39.72	---	9.76	49.48	---	68.2	---	-18.72
---	H	---	---	---	---	---	---	---	---
11000	V	39.05	---	8.03	47.08	---	74	54	-6.92
16500	V	39.43	---	9.76	49.19	---	68.2	---	-19.01
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH120: 5600MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11200	H	40.22	---	8.04	48.26	---	74	54	-5.74
16800	H	39.61	---	9.74	49.35	---	68.2	---	-18.85
---	H	---	---	---	---	---	---	---	---
11200	V	39.58	---	8.04	47.62	---	74	54	-6.38
16800	V	39.73	---	9.74	49.47	---	68.2	---	-18.73
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH140: 5700MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11400	H	39.88	---	8.05	47.93	---	74	54	-6.07
17100	H	38.71	---	9.72	48.43	---	68.2	---	-19.77
---	H	---	---	---	---	---	---	---	---
11400	V	40.26	---	8.05	48.31	---	74	54	-5.69
17100	V	39.34	---	9.72	49.06	---	68.2	---	-19.14
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH102: 5510MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11020	H	38.14	---	8.03	46.17	---	74	54	-7.83
16530	H	39.22	---	9.76	48.98	---	68.2	---	-19.22
---	H	---	---	---	---	---	---	---	---
11ac(VHT40) CH118: 5590MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11180	H	38.65	---	8.04	46.69	---	74	54	-7.31
16770	H	36.71	---	9.74	46.45	---	68.2	---	-21.75
---	H	---	---	---	---	---	---	---	---
11180	V	38.82	---	8.04	46.86	---	74	54	-7.14
16770	V	37.47	---	9.74	47.21	---	68.2	---	-20.99
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH134: 5670MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11340	H	37.71	---	8.05	45.76	---	74	54	-8.24
17010	H	36.05	---	9.72	45.77	---	68.2	---	-22.43
---	H	---	---	---	---	---	---	---	---
11340	V	37.83	---	8.05	45.88	---	74	54	-8.12
17010	V	39.32	---	9.72	49.04	---	68.2	---	-19.16
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) CH106: 5530MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11060	H	39.44	---	8.03	47.47	---	74	54	-6.53
16590	H	40.72	---	9.75	50.47	---	68.2	---	-17.73
---	H	---	---	---	---	---	---	---	---
11060	V	40.03	---	8.03	48.06	---	74	54	-5.94
16590	V	41.58	---	9.75	51.33	---	68.2	---	-16.87
---	V	---	---	---	---	---	---	---	---

11ac(VHT80) CH122: 5610MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correc \circ tion Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11220	H	41.42	---	8.05	49.47	---	74	54	-4.53
16830	H	38.59	---	9.72	48.31	---	68.2	---	-19.89
---	H	---	---	---	---	---	---	---	---
11220	V	39.21	---	8.05	47.26	---	74	54	-6.74
16830	V	39.94	---	9.72	49.66	---	68.2	---	-18.54
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Modulation Type: Band 3									
11a CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11490	H	37.82	---	8.09	45.91	---	74	54	-8.09
17235	H	37.24	---	9.67	46.91	---	68.2	---	-21.29
---	H	---	---	---	---	---	---	---	---
11490	V	40.35	---	8.09	48.44	---	74	54	-5.56
17235	V	38.17	---	9.67	47.84	---	68.2	---	-20.36
11a CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11570	H	39.22	---	8.10	47.32	---	74	54	-6.68
17355	H	38.68	---	9.65	48.33	---	68.2	---	-19.87
---	H	---	---	---	---	---	---	---	---
11570	V	38.04	---	8.10	46.14	---	74	54	-7.86
17355	V	39.97	---	9.65	49.62	---	68.2	---	-18.58
---	V	---	---	---	---	---	---	---	---
11a CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11650	H	37.45	---	8.12	45.57	---	74	54	-8.43
17475	H	36.91	---	9.62	46.53	---	68.2	---	-21.67
---	H	---	---	---	---	---	---	---	---
11650	V	38.74	---	8.12	46.86	---	74	54	-7.14
17475	V	38.03	---	9.62	47.65	---	68.2	---	-20.55
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11490	H	38.15	---	8.09	46.24	---	74	54	-7.76
17235	H	38.64	---	9.67	48.31	---	68.2	---	-19.89
---	H	---	---	---	---	---	---	---	---
11490	V	39.78	---	8.09	47.87	---	74	54	-6.13
17235	V	37.24	---	9.67	46.91	---	68.2	---	-21.29
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11570	H	38.03	---	8.10	46.13	---	74	54	-7.87
17355	H	39.71	---	9.65	49.36	---	68.2	---	-18.84
---	H	---	---	---	---	---	---	---	---
11n(HT20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11650	H	38.23	---	8.12	46.35	---	74	54	-7.65
17475	H	37.74	---	9.62	47.36	---	68.2	---	-20.84
---	H	---	---	---	---	---	---	---	---
11650	V	38.51	---	8.12	46.63	---	74	54	-7.37
17475	V	39.49	---	9.62	49.11	---	68.2	---	-19.09
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11510	H	40.52	---	8.09	48.61	---	74	54	-5.39
17265	H	37.74	---	9.67	47.41	---	68.2	---	-20.79
---	H	---	---	---	---	---	---	---	---
11510	V	41.02	---	8.09	49.11	---	74	54	-4.89
17265	V	38.38	---	9.67	48.05	---	68.2	---	-20.15
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11590	H	38.14	---	8.10	46.24	---	74	54	-7.76
17385	H	38.65	---	9.65	48.3	---	68.2	---	-19.9
---	H	---	---	---	---	---	---	---	---
11590	V	38.37	---	8.10	46.47	---	74	54	-7.53
17385	V	37.72	---	9.65	47.37	---	68.2	---	-20.83
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11490	H	40.12	---	8.09	48.21	---	74	54	-5.79
17235	H	37.65	---	9.67	47.32	---	68.2	---	-20.88
---	H	---	---	---	---	---	---	---	---
11ac(VHT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11570	H	38.23	---	8.10	46.33	---	74	54	-7.67
17355	H	36.71	---	9.65	46.36	---	68.2	---	-21.84
---	H	---	---	---	---	---	---	---	---
11570	V	37.05	---	8.10	45.15	---	74	54	-8.85
17355	V	38.48	---	9.65	48.13	---	68.2	---	-20.07
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11650	H	40.02	---	8.12	48.14	---	74	54	-5.86
17475	H	38.84	---	9.62	48.46	---	68.2	---	-19.74
---	H	---	---	---	---	---	---	---	---
11650	V	38.91	---	8.12	47.03	---	74	54	-6.97
17475	V	40.45	---	9.62	50.07	---	68.2	---	-18.13
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11510	H	39.66	---	8.09	47.75	---	74	54	-6.25
17265	H	37.45	---	9.67	47.12	---	68.2	---	-21.08
---	H	---	---	---	---	---	---	---	---
11510	V	40.59	---	8.09	48.68	---	74	54	-5.32
17265	V	36.12	---	9.67	45.79	---	68.2	---	-22.41
---	V	---	---	---	---	---	---	---	---


11ac(VHT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11590	H	40.02	---	8.10	48.12	---	74	54	-5.88
17385	H	37.18	---	9.65	46.83	---	68.2	---	-21.37
---	H	---	---	---	---	---	---	---	---
11ac(VHT80) CH155: 5775MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11550	H	40.25	---	8.09	48.34	---	74	54	-5.66
17325	H	38.83	---	9.66	48.49	---	68.2	---	-19.71
---	H	---	---	---	---	---	---	---	---
11550	V	41.02	---	8.09	49.11	---	74	54	-4.89
17325	V	38.68	---	9.66	48.34	---	68.2	---	-19.86
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5.9. Frequency Stability Measurement

5.9.1. Test Specification

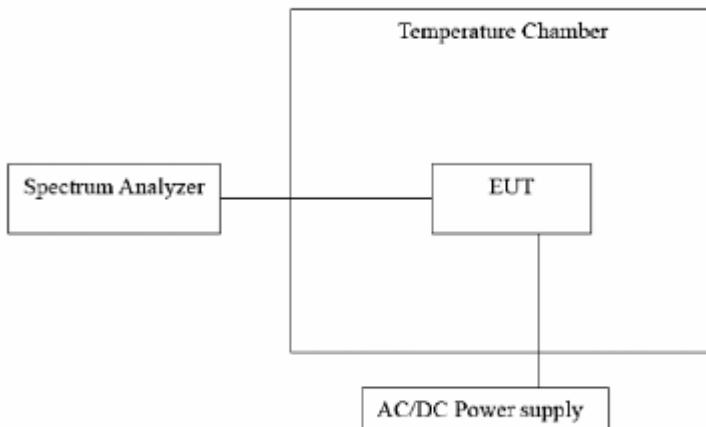Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	 <pre> graph LR SA[Spectrum Analyzer] --- EUT[EUT] EUT --- ACDC[AC/DC Power supply] EUT --- TC[Temperature Chamber] </pre>
Test Procedure:	<p>The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage.</p> <ol style="list-style-type: none"> Turn the EUT on and couple its output to a spectrum analyzer. Turn the EUT off and set the chamber to the highest temperature specified. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	Pre-scan was performed at all models(11a,11n,11ac), the worst case (11ac) was found and test data was shown in this report.

Test plots as follows:

Test mode:		802.11ac(HT20)	Frequency(MHz):	5180
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5179.924	-76000	PASS
35		5179.924	-76000	PASS
25		5179.924	-76000	PASS
15		5179.924	-76000	PASS
5		5179.924	-76000	PASS
0		5179.924	-76000	PASS
25		3V	5179.924	-76000
	3.7V	5179.924	-76000	PASS
	4.2V	5179.924	-76000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5200
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5199.926	-74000	PASS
35		5199.925	-75000	PASS
25		5199.925	-75000	PASS
15		5199.925	-75000	PASS
5		5199.925	-75000	PASS
0		5199.925	-75000	PASS
25		3V	5199.926	-74000
	3.7V	5199.925	-75000	PASS
	4.2V	5199.926	-74000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5240
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5239.923	-77000	PASS
35		5239.923	-77000	PASS
25		5239.923	-77000	PASS
15		5239.923	-77000	PASS
5		5239.923	-77000	PASS
0		5239.923	-77000	PASS
25		3V	5239.923	-77000
	3.7V	5239.923	-77000	PASS
	4.2V	5239.923	-77000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5745
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5744.92	-80000	PASS
35		5744.94	-60000	PASS
25		5744.88	-120000	PASS
15		5744.92	-80000	PASS
5		5744.96	-40000	PASS
0		5744.92	-80000	PASS
25	3V	5744.90	-100000	PASS
	3.7V	5744.90	-100000	PASS
	4.2V	5744.90	-100000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5785
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5784.915	-85000	PASS
35		5784.915	-85000	PASS
25		5784.915	-85000	PASS
15		5784.915	-85000	PASS
5		5784.915	-85000	PASS
0		5784.915	-85000	PASS
25	3V	5784.915	-85000	PASS
	3.7V	5784.915	-85000	PASS
	4.2V	5784.915	-85000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5825
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5824.915	-85000	PASS
35		5824.915	-85000	PASS
25		5824.915	-85000	PASS
15		5824.915	-85000	PASS
5		5824.915	-85000	PASS
0		5824.915	-85000	PASS
25	3V	5824.915	-85000	PASS
	3.7V	5824.916	-84000	PASS
	4.2V	5824.916	-84000	PASS

Test mode:		802.11ac(HT40)	Frequency(MHz):	5190
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5189.924	-76000	PASS
35		5189.924	-76000	PASS
25		5189.924	-76000	PASS
15		5189.924	-76000	PASS
5		5189.924	-76000	PASS
0		5189.925	-75000	PASS
25	3V	5189.924	-76000	PASS
	3.7V	5189.924	-76000	PASS
	4.2V	5189.924	-76000	PASS

Test mode:		802.11ac(HT40)	Frequency(MHz):	5230
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5229.924	-76000	PASS
35		5229.924	-76000	PASS
25		5229.924	-76000	PASS
15		5229.924	-76000	PASS
5		5229.639	-361000	PASS
0		5229.875	-125000	PASS
25	3V	5229.924	-76000	PASS
	3.7V	5229.924	-76000	PASS
	4.2V	5229.924	-76000	PASS

Test mode:		802.11ac(HT40)	Frequency(MHz):	5755
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5754.919	-81000	PASS
35		5754.919	-81000	PASS
25		5754.919	-81000	PASS
15		5754.919	-81000	PASS
5		5754.919	-81000	PASS
0		5754.919	-81000	PASS
25	3V	5754.919	-81000	PASS
	3.7V	5754.918	-82000	PASS
	4.2V	5754.919	-81000	PASS

Test mode:		802.11ac(HT40)	Frequency(MHz):	5795
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5794.916	-84000	PASS
35		5794.916	-84000	PASS
25		5794.916	-84000	PASS
15		5794.916	-84000	PASS
5		5794.916	-84000	PASS
0		5794.916	-84000	PASS
25	3V	5794.916	-84000	PASS
	3.7V	5794.916	-84000	PASS
	4.2V	5794.916	-84000	PASS

Test mode:		802.11ac(VHT80)	Frequency(MHz):	5210
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5209.923	-77000	PASS
35		5209.923	-77000	PASS
25		5209.923	-77000	PASS
15		5209.923	-77000	PASS
5		5209.923	-77000	PASS
0		5209.923	-77000	PASS
25	3V	5209.924	-76000	PASS
	3.7V	5209.923	-77000	PASS
	4.2V	5209.923	-77000	PASS

Test mode:		802.11ac(VHT80)	Frequency(MHz):	5775
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.7V	5774.918	-82000	PASS
35		5774.918	-82000	PASS
25		5774.918	-82000	PASS
15		5774.918	-82000	PASS
5		5774.918	-82000	PASS
0		5774.918	-82000	PASS
25	3V	5774.917	-83000	PASS
	3.7V	5774.918	-82000	PASS
	4.2V	5774.918	-82000	PASS

**Appendix A: Test Result of Conducted Test
Duty Cycle**

Condition	Mode	Frequency (MHz)	Duty Cycle (%)
NVNT	a	5180	100
NVNT	a	5200	100
NVNT	a	5240	100
NVNT	n20	5180	100
NVNT	n20	5200	100
NVNT	n20	5240	100
NVNT	n40	5190	100
NVNT	n40	5230	100
NVNT	ac20	5180	100
NVNT	ac20	5200	100
NVNT	ac20	5240	100
NVNT	ac40	5190	100
NVNT	ac40	5230	100
NVNT	ac80	5210	100
NVNT	a	5260	100
NVNT	a	5300	100
NVNT	a	5320	100
NVNT	n20	5260	100
NVNT	n20	5300	100
NVNT	n20	5320	100
NVNT	n40	5270	100
NVNT	n40	5310	100
NVNT	ac20	5260	100
NVNT	ac20	5300	100
NVNT	ac20	5320	100
NVNT	ac40	5270	100
NVNT	ac40	5310	100
NVNT	ac80	5290	100
NVNT	a	5500	100
NVNT	a	5600	100
NVNT	a	5700	100
NVNT	n20	5500	100
NVNT	n20	5600	100
NVNT	n20	5700	100
NVNT	n40	5510	100
NVNT	n40	5590	100
NVNT	n40	5670	100
NVNT	ac20	5500	100
NVNT	ac20	5600	100
NVNT	ac20	5700	100
NVNT	ac40	5510	100
NVNT	ac40	5590	100
NVNT	ac40	5670	100
NVNT	ac80	5530	100

NVNT	ac80	5610	100
NVNT	a	5745	100
NVNT	a	5785	100
NVNT	a	5825	100
NVNT	n20	5745	100
NVNT	n20	5785	100
NVNT	n20	5825	100
NVNT	n40	5755	100
NVNT	n40	5795	100
NVNT	ac20	5745	100
NVNT	ac20	5785	100
NVNT	ac20	5825	100
NVNT	ac40	5755	100
NVNT	ac40	5795	100
NVNT	ac80	5775	100

