



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 Fax: +86-755-26636041

# TEST REPORT

## 47 CFR FCC Part 15 Subpart C 15.231

Report Reference No. ....: CTL1605131676-WF

Compiled by: ( position+printed name+signature)	Jacky Chen (File administrators)	
Tested by: ( position+printed name+signature)	Allen Wang (Test Engineer)	
Approved by: ( position+printed name+signature)	Tracy Qi (Manager)	

**Product Name**.....: Infrared Induction Doorbell

**Model/Type reference** .....: HT002

**List Model(s)**.....: HT001, HT021, HT023, HT024

**Trade Mark**.....: taieran

**FCC ID** .....: 2AIL6-HCKP958

**Applicant's name** .....: Ruian Huatai Electronics Manufacturing Co., Ltd

**Address of applicant** .....: Xinghua Road, Baotian Nanhe, Tangxia Town, Ruian City, China

**Test Firm** .....: Shenzhen CTL Testing Technology Co., Ltd.

**Address of Test Firm** .....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

**Test specification** .....

Standard.....: 47 CFR FCC Part 15 Subpart C 15.231

TRF Originator .....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF .....: Dated 2011-01

**Date of Receipt** .....: May 23, 2016

**Date of Test Date** .....: May 23, 2016 –May 30, 2016

**Data of Issue** .....: May 30, 2016

**Result** .....: Pass

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

<b>Test Report No. :</b>	<b>CTL1605131676-WF</b>	May 30, 2016
<b>Date of issue</b>		

Equipment under Test : Infrared Induction Doorbell

Model /Type : HT002

Listed Models : HT001, HT021, HT023, HT024

**Applicant** : **Rui'an Huatai Electronics Manufacturing Co., Ltd**

Address : Xinghua Road, Baotian Nanhe, Tangxia Town, Rui'an City, China

**Manufacturer** : **Rui'an Huatai Electronics Manufacturing Co., Ltd**

Address : Xinghua Road, Baotian Nanhe, Tangxia Town, Rui'an City, China

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## \*\* Modified History \*\*


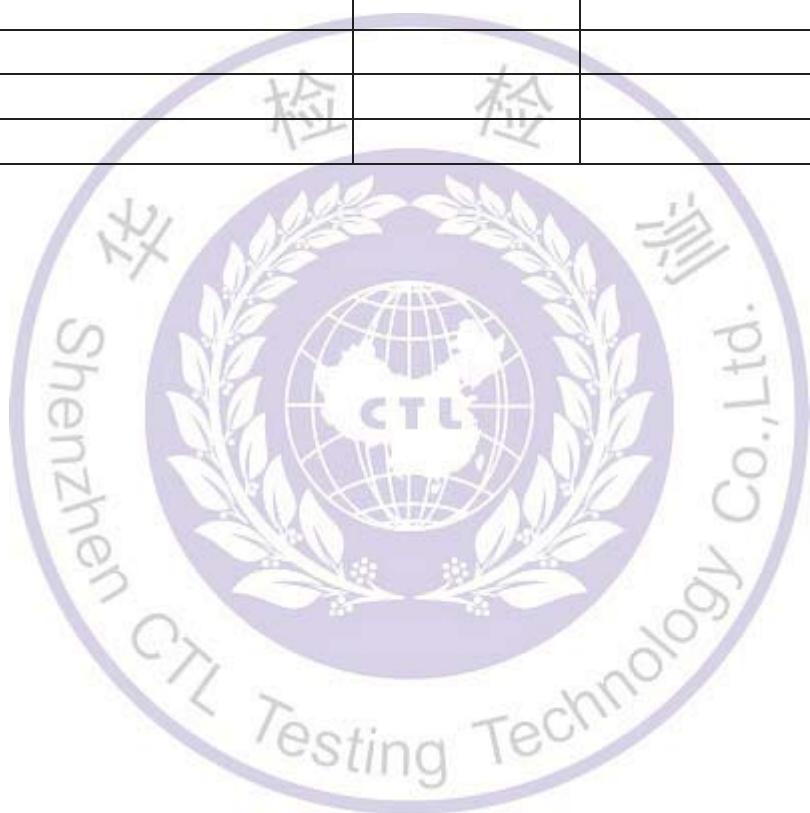


Table of Contents		Page
1. SUMMARY.....		5
1.1. TEST STANDARDS .....		5
1.2. TEST DESCRIPTION.....		5
1.3. TEST FACILITY .....		6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....		6
2. GENERAL INFORMATION.....		7
2.1. ENVIRONMENTAL CONDITIONS .....		7
2.2. GENERAL DESCRIPTION OF EUT.....		7
2.3. DESCRIPTION OF TEST MODES .....		7
2.4. EQUIPMENTS USED DURING THE TEST .....		7
2.5. RELATED SUBMITTAL(s) / GRANT(s).....		8
2.6. MODIFICATIONS.....		8
3. TEST CONDITIONS AND RESULTS .....		9
3.1. CONDUCTED EMISSIONS TEST .....		9
3.2. RADIATED EMISSIONS.....		10
3.3. OCCUPIED BANDWIDTH MEASUREMENT .....		15
3.4. DEACTIVATION TIME .....		16
3.5. ANTENNA REQUIREMENT.....		17
4. TEST SETUP PHOTOS OF THE EUT .....		18
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....		19

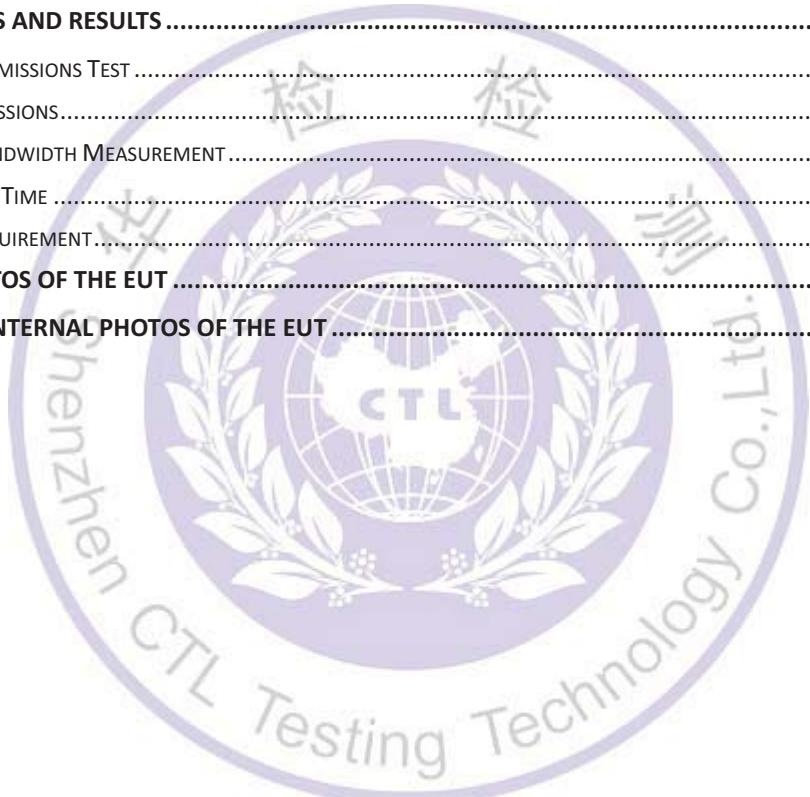

## 1. SUMMARY

### TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.231: Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

ANSI C63.10:2013

ANSI C63.4:2014

### Test Description

FCC and IC Requirements		
FCC Part 15.207	Conducted Emission	N/A
FCC Part 15.231(a)(2)	Automatically Deactivate	PASS
FCC Part 15.231(b)	Electric Field Strength of Fundamental Emission	PASS
FCC Part 15.205 &15.209& 15.231(b)	Electric Field Strength of Spurious Emission	PASS
FCC Part 15.231(c)	-20dB bandwidth & 99% bandwidth	PASS



## Test Facility

### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

#### FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

## Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2. GENERAL INFORMATION

### Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### General Description of EUT

Product Name:	Infrared Induction Doorbell
Model/Type reference:	HT002
Power supply:	DC 9V from battery
Modulation:	ASK
Operation frequency:	433.92MHz
Channel number:	Signal Channel Device
Antenna type:	PCB Antenna
Antenna gain:	0dBi

Note: For more details, please refer to the user's manual of the EUT.

### Description of Test Modes

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

### Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2016/05/21	2017/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10-2700/X1	N/A	2016/05/20	2017/05/19

		2750-O/O			
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2016/05/20	2017/05/19
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-10M	10m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
RF Cable	Megalon	RF-A303	N/A	2015/06/02	2016/06/01

The calibration interval was one year

### Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: 2AIL6-HCKP958 filing to comply with Section 15.231 of the FCC Part 15, Subpart C.

### Modifications

No modifications were implemented to meet testing criteria.



### 3. TEST CONDITIONS AND RESULTS

#### Conducted Emissions Test


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

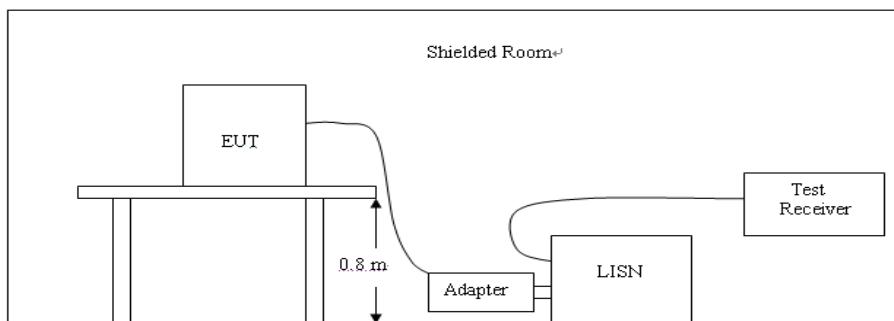

##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

##### TEST RESULTS

Not applicable for device which is battery supply.

## Radiated Emissions

### Limit

For intentional device, according to 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table.

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{kHz}))+40\log(300/3)$	$2400/F(\text{kHz})$
0.49-1.705	3	$20\log(24000/F(\text{kHz}))+40\log(30/3)$	$24000/F(\text{kHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

In addition to the provisions of 15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66–40.70	2,250 .....	225
70–130 .....	1,250 .....	125
130–174 .....	1,125 to 3,750 .....	1 125 to 375
174–260 .....	3,750 .....	375
260–470 .....	13,750 to 12,500 .....	1 375 to 1,250
Above 470	12,500 .....	1,250

<sup>1</sup> Linear interpolations.


[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 260-470 MHz,  $\mu$ V/m at 3 meters = $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

### TEST CONFIGURATION


#### (A) Radiated Emission Test Set-Up, Frequency Below 30MHz

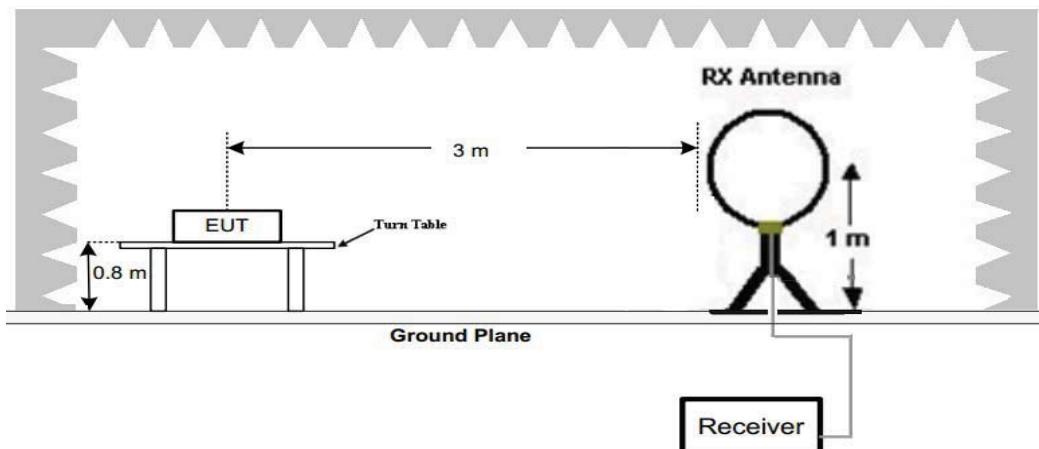

## (B) Radiated Emission Test Set-Up, Frequency below 1000MHz

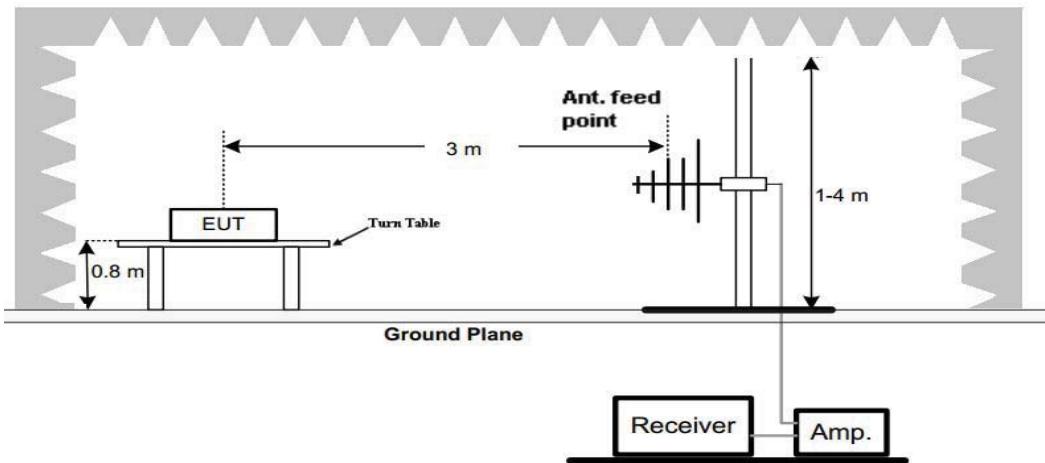

## (C) Radiated Emission Test Set-Up, Frequency above 1000MHz

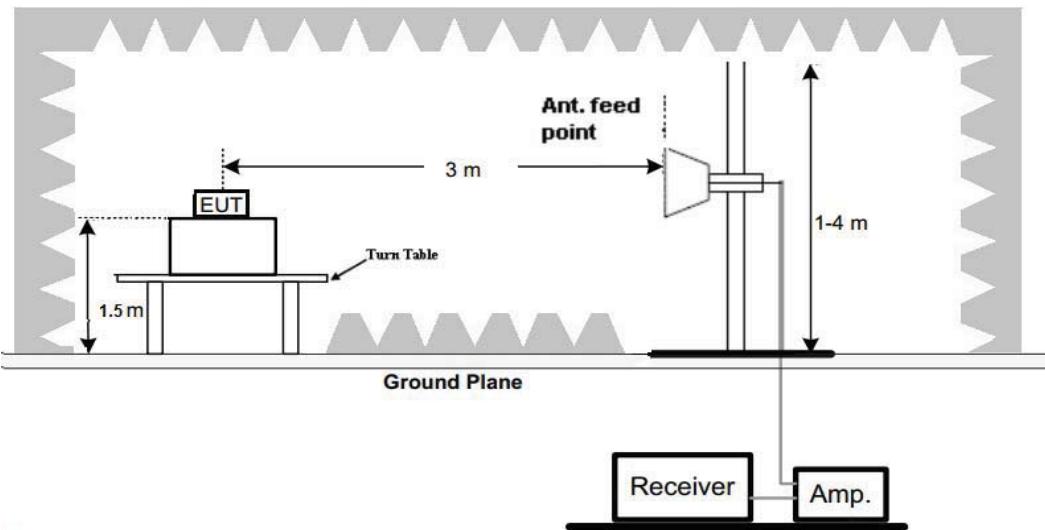**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. New battery is used during all test

## TEST RESULTS

The emissions from 30MHz to 5GHz are measured peak and average level, below 1 GHz measured QP level, detailed test data please see below. Besides, we tested 3 directions and recorded the worst data.

Emission Styles	Frequency (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Direction (H/V)
Fundamental	433.92	87.40	100.80	13.40	PK	H
Spurious	438.04	58.14	80.80	22.66	PK	H
Harmonics	867.84	65.07	80.80	15.73	PK	H
Harmonics	1735.68	59.29	80.80	21.51	PK	H
--	--	--	--	--	--	--
Fundamental	433.92	87.50	100.80	13.30	PK	V
Spurious	438.04	59.08	80.80	21.72	PK	V
Harmonics	867.84	65.41	80.80	15.39	PK	V
Harmonics	1735.68	60.37	80.80	20.43	PK	V
--	--	--	--	--	--	--

Emission Styles	Frequency (MHz)	PK Level (dBuV/m)	AV Factor (dB/m)	AV Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Direction (H/V)
Fundamental	433.92	87.40	-8.60	78.80	80.80	2.00	H
Spurious	438.04	58.14	-8.60	49.54	60.80	11.26	H
Harmonics	867.84	65.07	-8.60	56.47	60.80	4.33	H
Harmonics	1735.68	59.29	-8.60	50.69	60.80	10.11	H
--	--	--	--	--	--	--	--
Fundamental	433.92	87.50	-8.60	78.90	80.80	1.90	V
Spurious	438.04	59.08	-8.60	50.48	60.80	10.32	V
Harmonics	867.84	65.41	-8.60	56.81	60.80	3.99	V
Harmonics	1735.68	60.37	-8.60	51.77	60.80	9.03	V
--	--	--	--	--	--	--	--



Note:


1. AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dB)
2. In a 100ms observation period found 1.08ms burst 25 pcs, 0.34ms burst 30 pcs, the Duty Cycle can calculate as below:

$$\text{Duty Cycle} = (1.08\text{ms} * 25 + 0.34\text{ms} * 30) / 100\text{ms} = 0.372$$

$$\text{AV Factor} = 20 * \log(\text{Duty Cycle}) = 20 * \log(0.372) = -8.60$$

(The Data of Duty Cycle See the follow page)

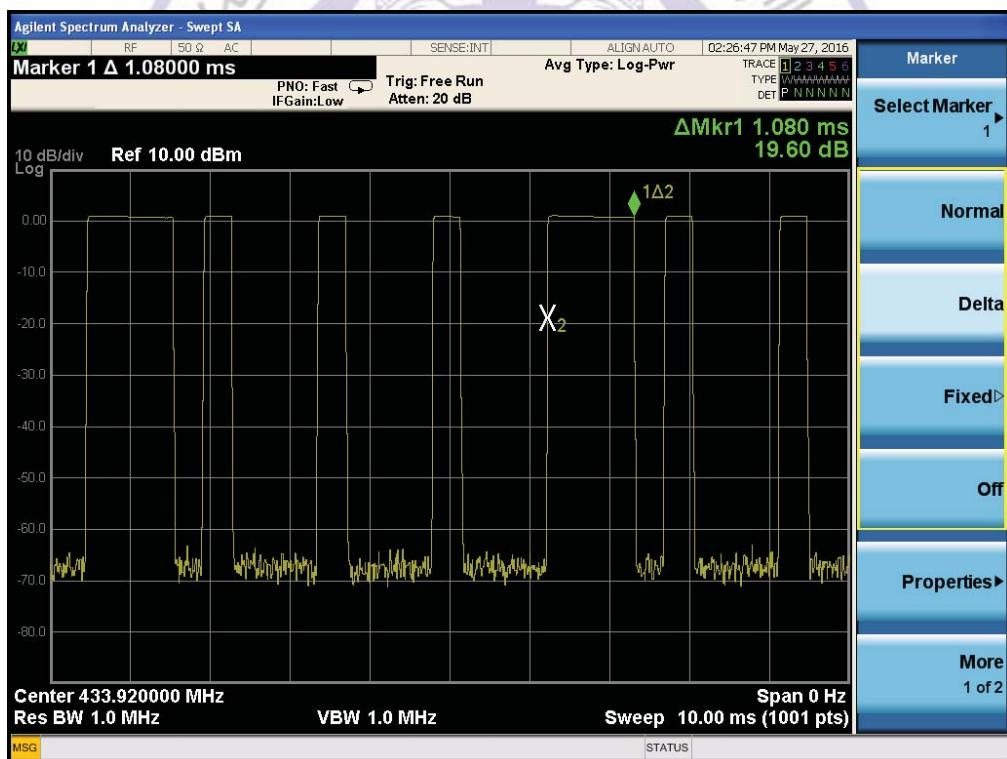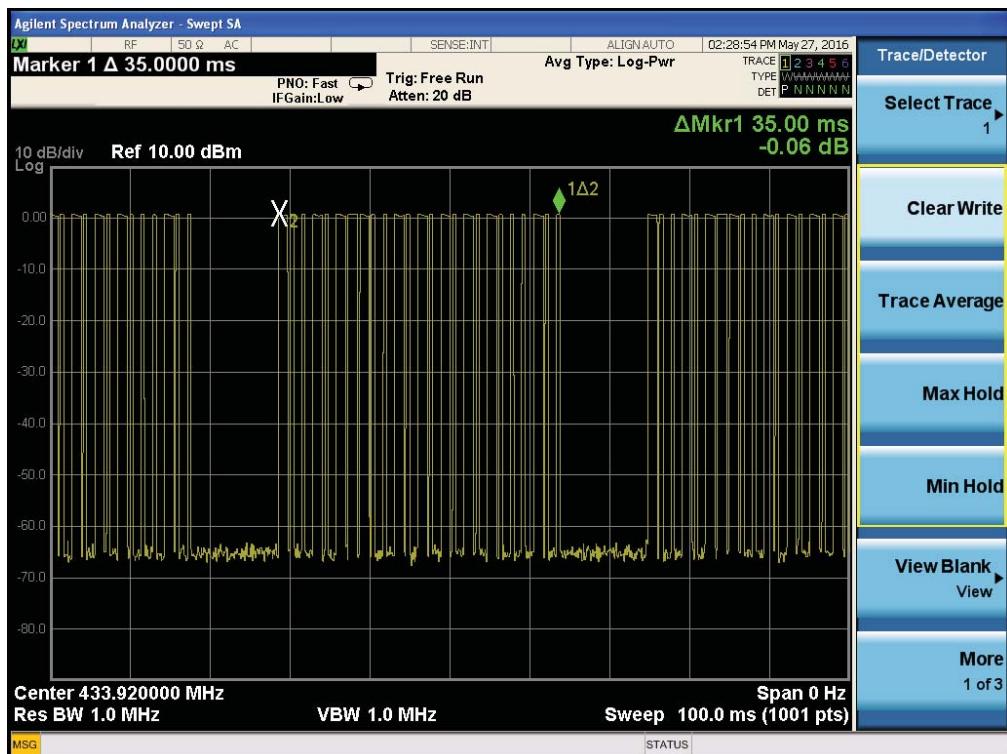

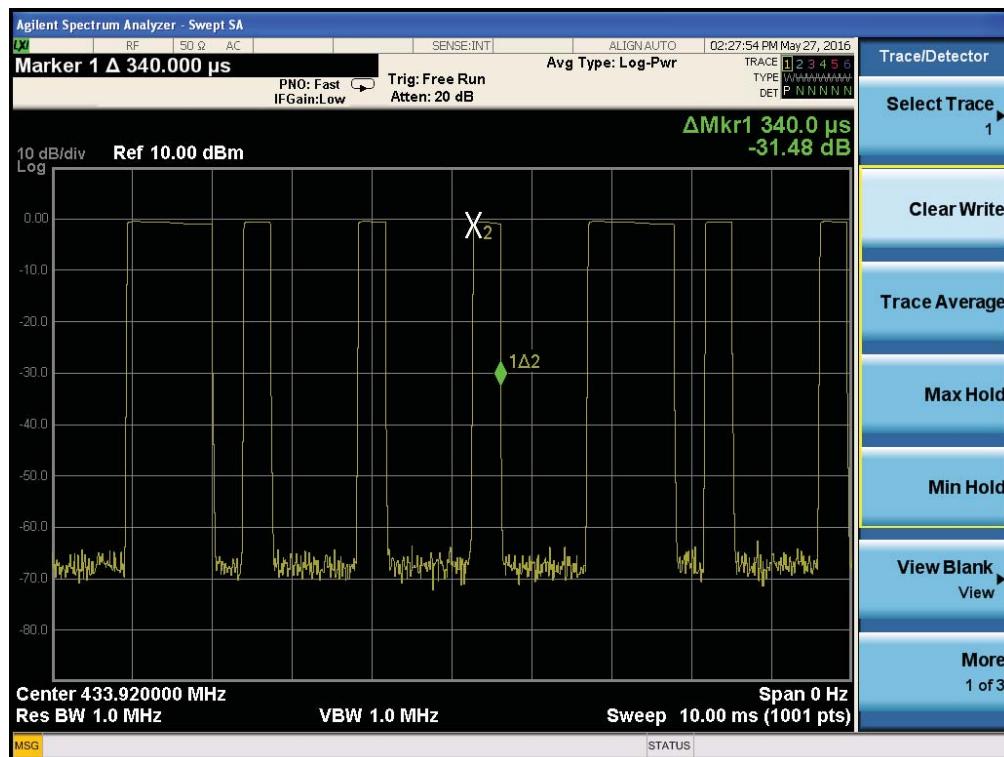


## Occupied Bandwidth Measurement

## Limit

According to 47 CFR 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

## Test Configuration

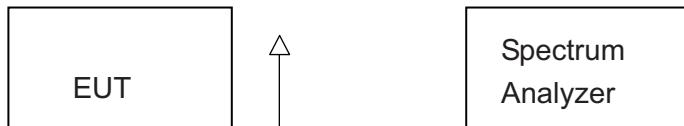

## Test Procedure


The 20dB bandwidth and 99% bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

## Test Results

Modulation	Channel Frequency (MHz)	20dB bandwidth (KHz)	Limit (KHz)	Result
ASK	433.92	23.44	$0.25\% * 433.92 = 1084.8$	Pass

**Test plot as follows:**

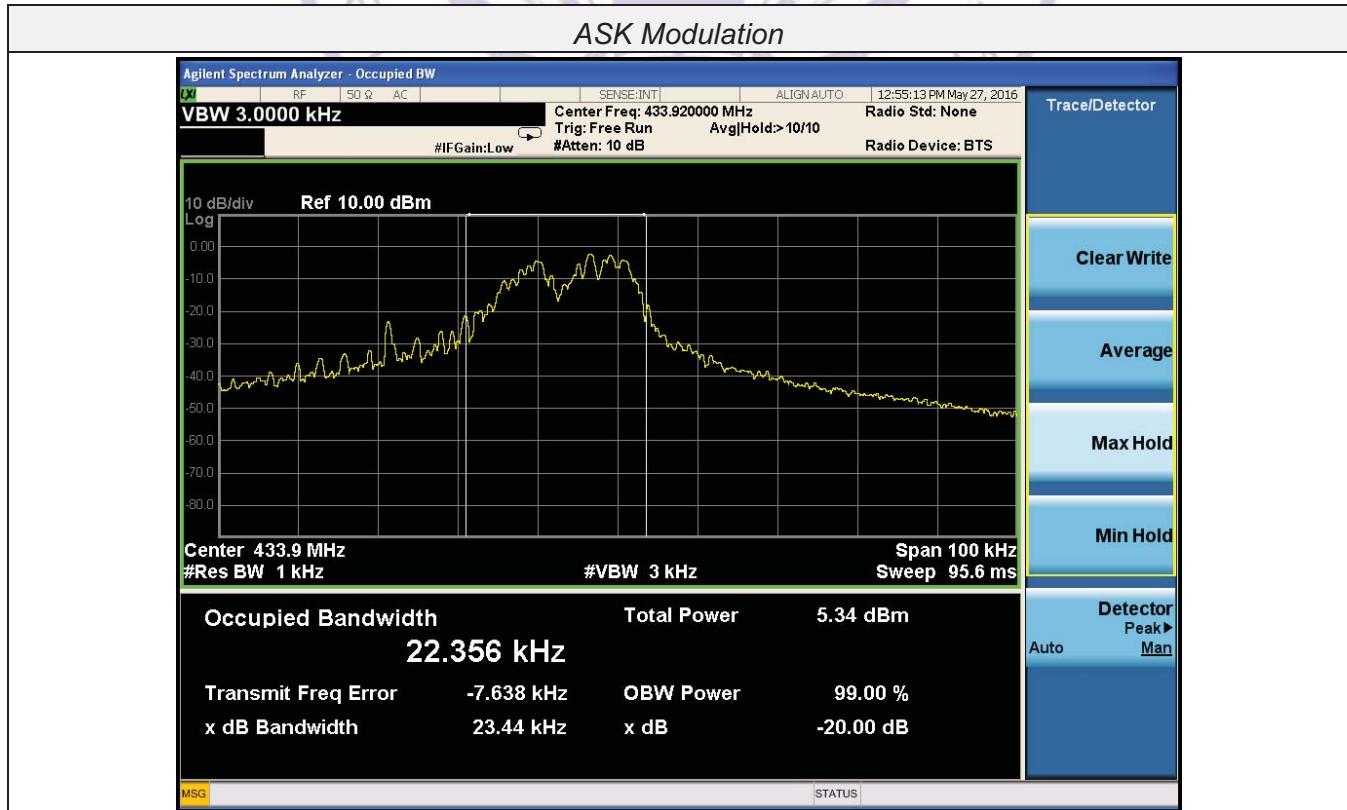


## Deactivation Time

### Limit

According to FCC §15.231(a) (2), A transmitter activated automatically shall cease transmission within 5 seconds after activation.

### Test Configuration

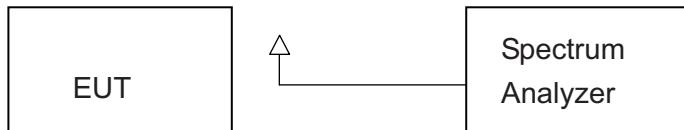


### Test Procedure

1. The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
2. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was set to 1 MHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

### TEST RESULTS

Note: The transmitter was automatically activated, and the carrier frequency 433.92MHz:

Frequency (MHz)	One transmission time (S)	Limit(S)	Result
433.92	1.520	5	Pass

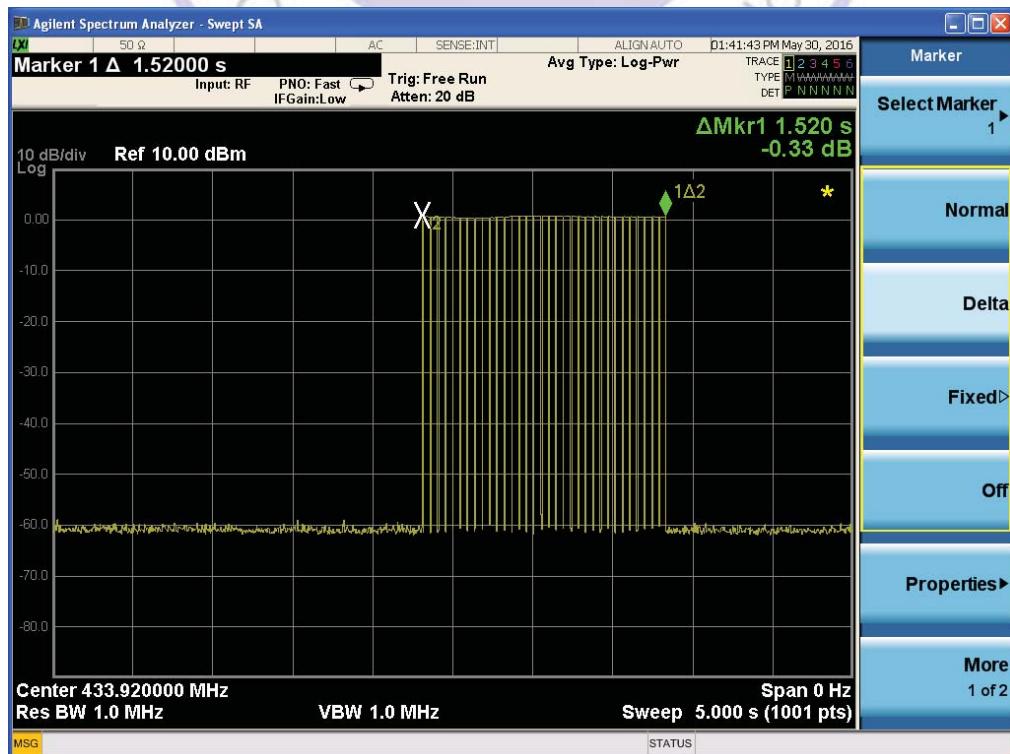

## Antenna Requirement

### Standard Applicable

According to FCC Part 15C 15.203


- a) An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b) The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Refer to statement below for compliance.**


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is an internal Antenna, The directional gains of antenna used for transmitting is 0 dBi.

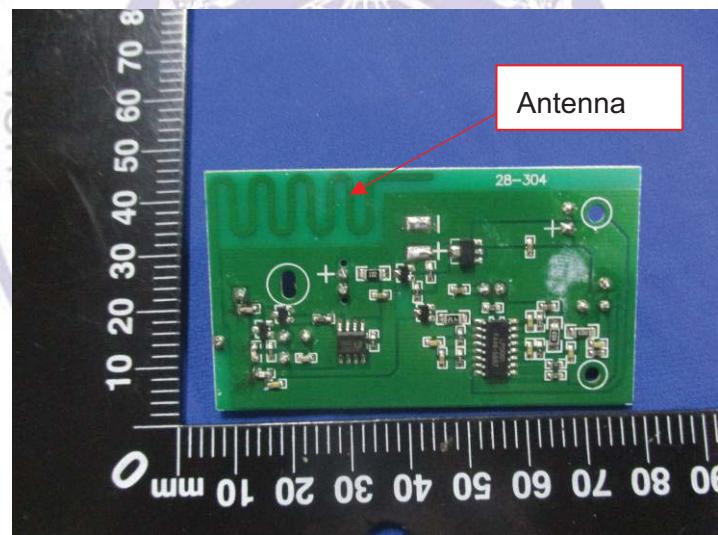

#### 4. Test Setup Photos of the EUT


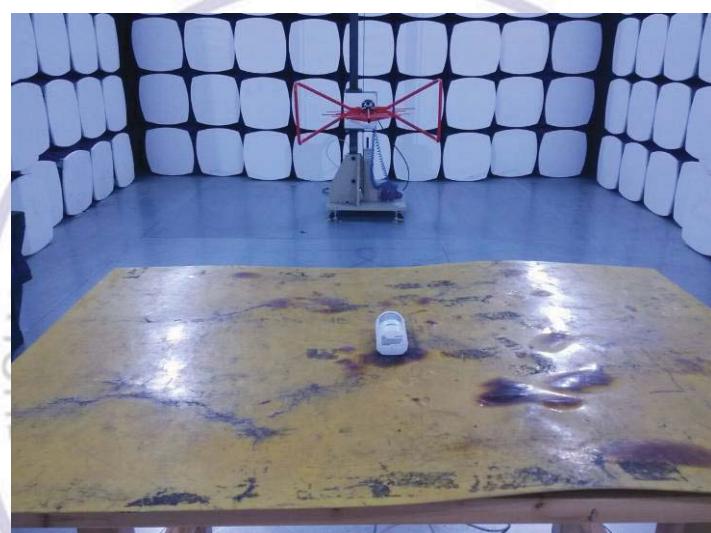




## 5. External and Internal Photos of the EUT

### External Photos of EUT



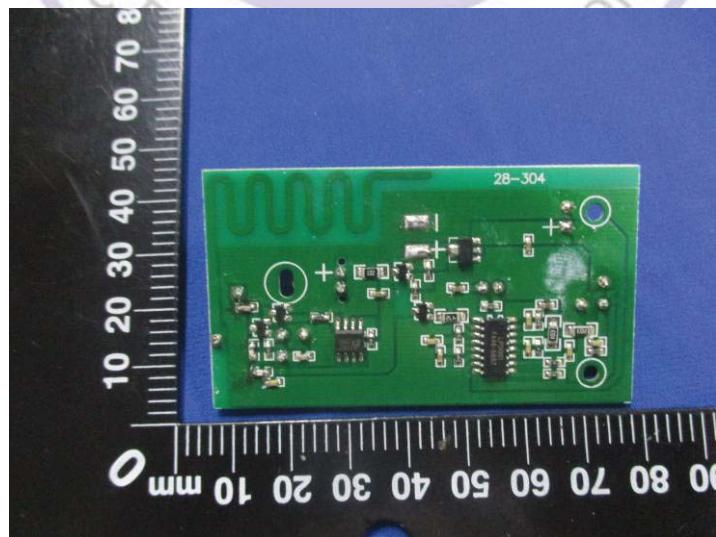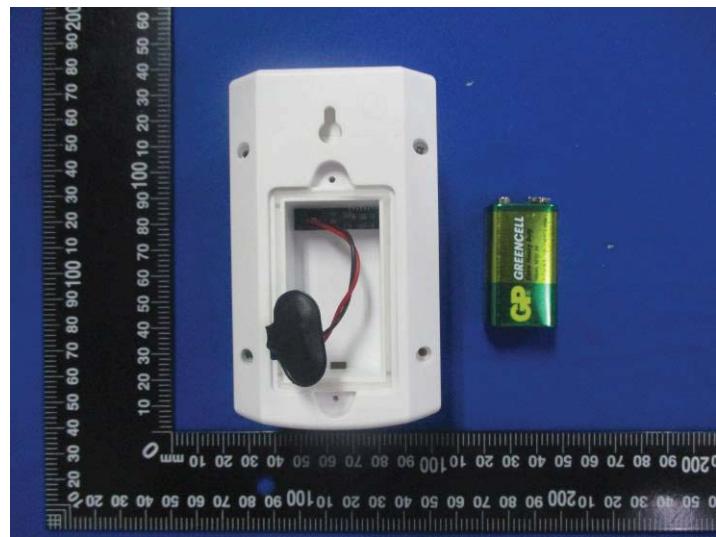

Internal Photos of EUT

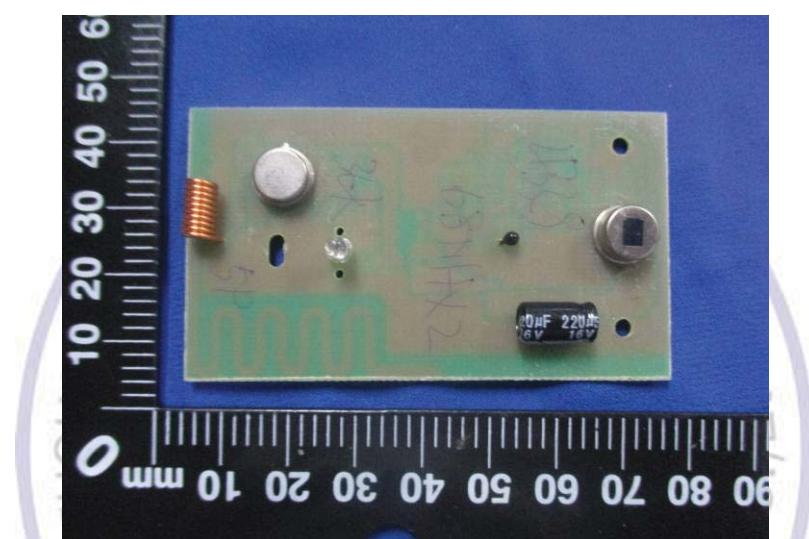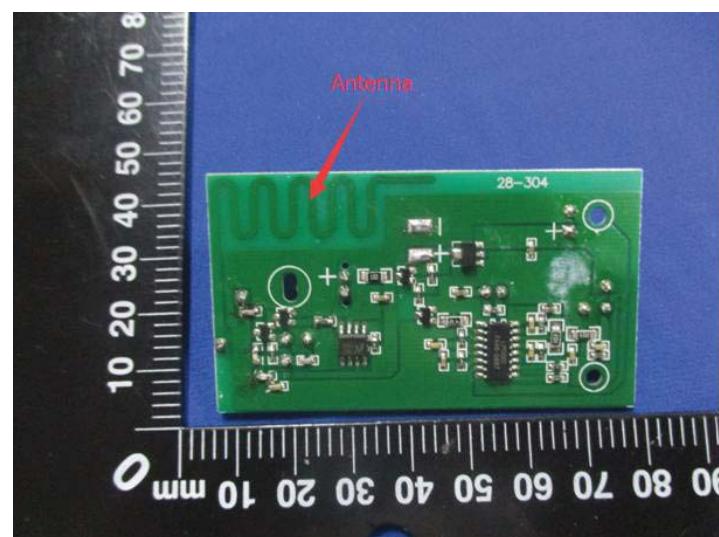

\*\*\*\*\* End of Report \*\*\*\*\*

