

FCC TEST REPORT

Product Name: Tablet
Trade Mark: N/A
Model No.: Shockwave
Report Number: 201021018RFC-3
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: 2AIMES20
Test Result: PASS
Date of Issue: February 24, 2021

Prepared for:

SMT TELECOMM HK LIMITED
UNIT C 8/F CHARMHILL CTR 50 HILLWOOD RD TST KL

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:



Henry Lu

Team Leader

Reviewed by:



Kevin Liang

Assistant Manager

Approved by:



Technical Director

Date:

February 24, 2021

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.1

Version

Version No.	Date	Description
V1.0	February 24, 2021	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.7 TEST LOCATION	6
1.8 TEST FACILITY	6
1.9 DEVIATION FROM STANDARDS	6
1.10 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.12 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT	9
4.2 TEST CHANNELS	9
4.3 EUT TEST STATUS	10
4.4 PRE-SCAN	10
4.4.1 WORST-CASE DATA RATES	10
4.5 TEST SETUP	11
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	11
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	12
4.5.3 FOR CONDUCTED RF TEST SETUP	13
4.6 SYSTEM TEST CONFIGURATION	13
4.7 DUTY CYCLE	14
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	16
5.1 REFERENCE DOCUMENTS FOR TESTING	16
5.2 ANTENNA REQUIREMENT	16
5.3 CONDUCTED PEAK OUTPUT POWER	18
5.4 6 dB BANDWIDTH	19
5.5 POWER SPECTRAL DENSITY	23
5.6 CONDUCTED OUT OF BAND EMISSION	27
5.7 RADIATED SPURIOUS EMISSIONS	40
5.8 BAND EDGE MEASUREMENTS (RADIATED)	47
5.9 CONDUCTED EMISSION	56
APPENDIX 1 PHOTOS OF TEST SETUP	59
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	59

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	SMT TELECOMM HK LIMITED
Address of Applicant:	UNIT C 8/F CHARMHILL CTR 50 HILLWOOD RD TST KL
Manufacturer:	SMT TELECOMM HK LIMITED
Address of Manufacturer:	UNIT C 8/F CHARMHILL CTR 50 HILLWOOD RD TST KL

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Tablet		
Model No.:	Shockwave		
Trade Mark:	N/A		
DUT Stage:	Production Unit		
EUT Supports Function:	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth 5.0	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
	NFC:	13.553 MHz to 13.567 MHz	
Sample Received Date:	October 21, 2020		
Sample Tested Date:	November 16, 2020 to December 28, 2020		

1.2.2 Description of Accessories

Adapter	
Model No.:	ASSA107A-050200
Input:	100-240 V~50/60 Hz 0.45 A
Output:	5 V $\equiv$ 2 A
DC Cable:	1.0 Meter, Unshielded without ferrite

Cable	
Connector:	USB Type-C Plug Cable
Cable Type:	Unshielded without ferrite
Length:	1.0 Meter

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz	
Frequency Range:	2412 MHz to 2462 MHz	
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20	
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM(64-QAM, 16-QAM, QPSK, BPSK)	
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS15	
Number of Channels:	IEEE 802.11b: 11 IEEE 802.11g: 11 IEEE 802.11n-HT20: 11	
Channel Separation:	5 MHz	
Antenna Type:	Chain 0	FPCB Antenna
	Chain 1	FPCB Antenna
Antenna Gain:	Chain 0	3.0dBi
	Chain 1	2.0 dBi
Directional gain:	5.52 dBi	
Maximum Peak Power:	SISO_ Chain 0	IEEE 802.11b:20.78 dBm IEEE 802.11g:24.00 dBm IEEE 802.11n-HT20: 22.92 dBm
	SISO_ Chain 1	IEEE 802.11b:20.10 dBm IEEE 802.11g: 22.41 dBm IEEE 802.11n-HT20: 20.80dBm
	MIMO_ Chain 0+1	IEEE 802.11g: 26.26 dBm IEEE 802.11n-HT20: 24.92 dBm
Normal Test Voltage:	3.8 Vdc	

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
Note: f is the operating frequency (MHz); k is the operating channel.	

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
-	-	-	-	-

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

1.7 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.8 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.9 DEVIATION FROM STANDARDS

None.

1.10 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.12 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.9 dB
5	Radiated emission 1GHz-18GHz	± 4.8 dB
6	Radiated emission 18GHz-26GHz	± 5.1 dB
7	Radiated emission 26GHz-40GHz	± 5.1 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.9 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	2.4 GHz: ± 6.5 x 10 ⁻⁸
12	Transmission Time	± 0.19 %

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013 Clause 11.8.1	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.13	PASS
Note:			
1) N/A: In this whole report not application.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021
☒	Receiver	R&S	ESIB26	100114	Nov. 18, 2020	Nov. 17, 2021
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 14, 2020	Nov. 13, 2021
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 14, 2020	Nov. 13, 2021
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 10, 2020	Nov. 9, 2021
☒	Preamplifier	HP	8447F	2805A02960	Nov. 10, 2020	Nov. 9, 2021
☐	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	May. 30, 2020	May. 29, 2021
☐	6dB Attenuator	Talent	RA6A5-N-18	18103002	Nov. 14, 2020	Nov. 13, 2021
☐	Horn Antenna	ETS-LINDGREN	3117	00164202	Nov. 14, 2020	Nov. 13, 2021
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May. 30, 2020	May. 29, 2021
☐	Horn Antenna	ETS-LINDGREN	3116C	00200180	Jun. 19, 2020	Jun. 18, 2021
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 17, 2020	Nov. 16, 2021
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Band Rejection Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G248	Nov. 10, 2020	Nov. 9, 2021
☐	Band Rejection Filter (5150MHz~5880MHz)	Micro-Tronics	BRM50716	G1868	Nov. 16, 2020	Nov. 15, 2021
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 18, 2020	Nov. 17, 2021
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 18, 2020	Nov. 17, 2021
☒	LISN	R&S	ESH2-Z5	860014/024	Nov. 18, 2020	Nov. 17, 2021
☐	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 18, 2020	Nov. 17, 2021
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Nov. 10, 2020	Nov. 9, 2021
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Nov. 10, 2020	Nov. 9, 2021
☐	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	Nov. 10, 2020	Nov. 9, 2021
☒	Spectrum analyzer	R&S	FSV40-N	101653	Jun. 18, 2020	Jun. 17, 2021

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	3.8	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
AC Power Line Conducted Emission	24.7	49	99.58	Tripp Jiang
Conducted Peak Output Power	24.5	51	99.80	Leo Li
6dB Bandwidth	24.5	51	99.80	Leo Li
Power Spectral Density	24.5	51	99.80	Leo Li
Conducted Out of Band Emission	24.5	51	99.80	Leo Li
Radiated Spurious Emissions	25.2	52	100.02	Andy Lin
Band Edge Measurements (Radiated)	25.2	52	100.02	Andy Lin

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT20	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz

4.3 EUT TEST STATUS

Mode	Tx Function	Description
IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20	1Tx	1. Keep the EUT in continuously transmitting with modulation test single.
IEEE 802.11n-HT20	2Tx	2. Keep the EUT in continuously transmitting with modulation test single.

Power Setting	
	Channel 1 -11
IEEE 802.11b	17
IEEE 802.11g	11
IEEE 802.11n-HT20	10

Test Software
Test software name: ADB command ;

4.4 PRE-SCAN

4.4.1 Worst-case data rates

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS8

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup



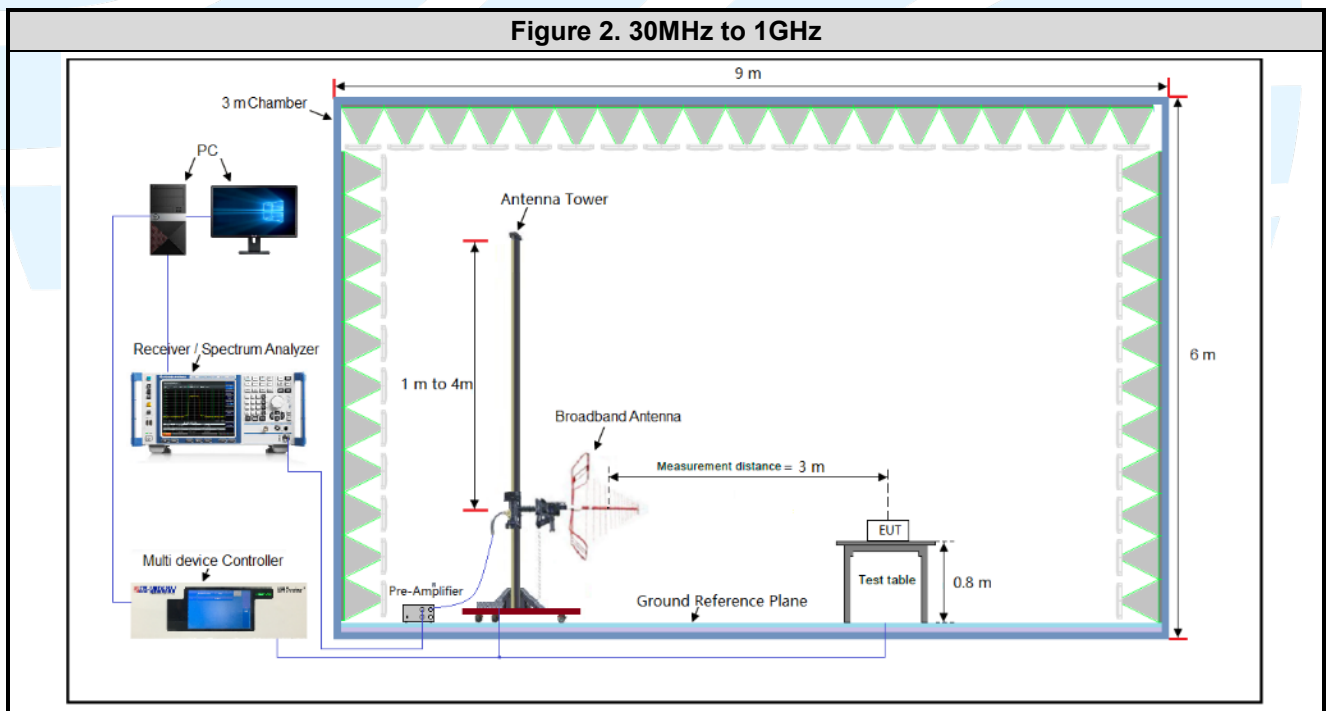


Figure 3. Above 1GHz

The diagram illustrates the experimental setup for measurements above 1 GHz within a 3 m chamber. The chamber dimensions are 9 m by 6 m. The setup includes an Antenna Tower (1 m to 4 m high) with a Horn Antenna and a Pre-Amplifier. The measurement distance is 3 m. A Ground Reference Plane is located at the base. The EUT (Equipment Under Test) is placed on a Test table (1.5 m high) which is mounted on a Turntable. The setup is connected to a PC, a Receiver / Spectrum Analyzer, and a Multi device Controller.

The diagram illustrates the experimental setup within a Shielding Room. On the left, a PC and a Receiver are connected to a Pulse Limiter. A Ground Reference Plane is established. Two LISN (Line Impedance Stabilization Network) units, LISN 1 and LISN 2, are connected to the AC Mains. The test setup consists of a Test table with two EUT/AE (Equipment Under Test/Accessory Equipment) units and a PSU (Power Supply Unit). The distance between the EUT/AE units is 10 cm, and the distance between the EUT/AE unit and the PSU is 10 cm. The Test table is elevated 40 cm from the floor, with Insulation ≤ 0.15 m. The distance from the AC Mains to LISN 1 is 80 cm, and from LISN 2 to the AC Mains is 80 cm.

4.5.3 For Conducted RF test setup

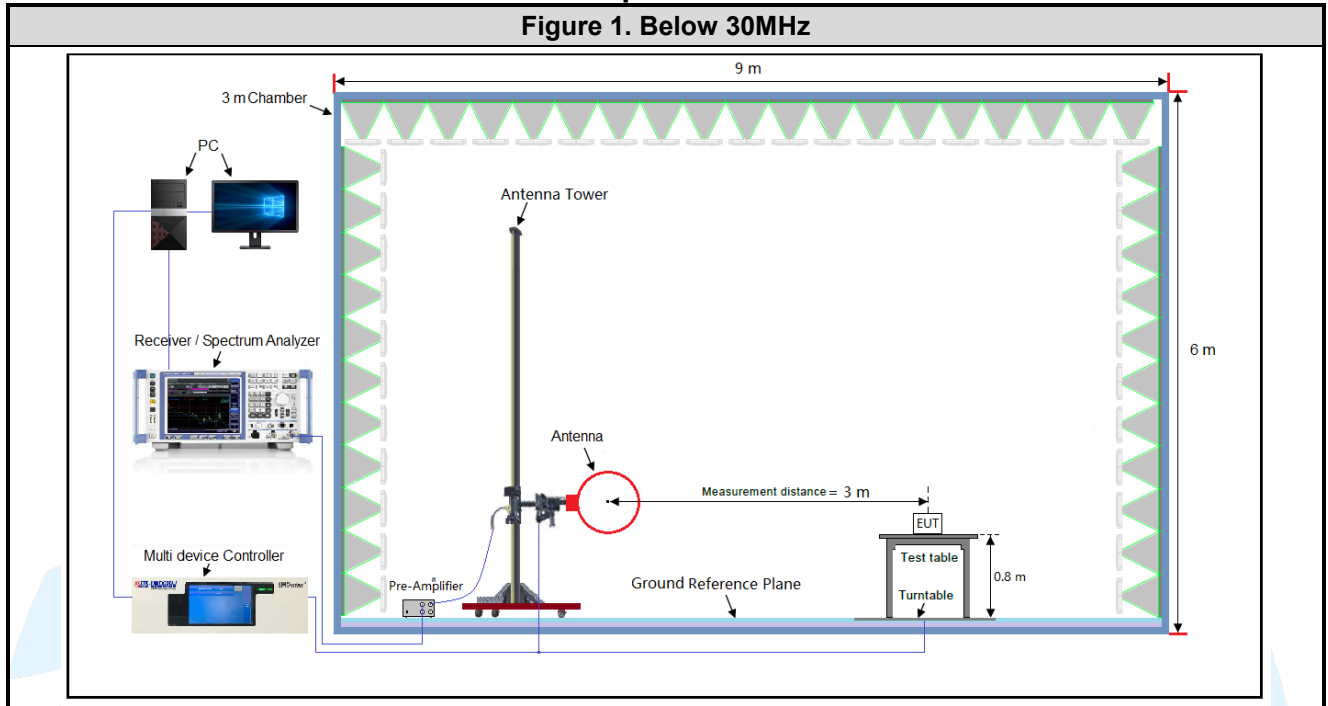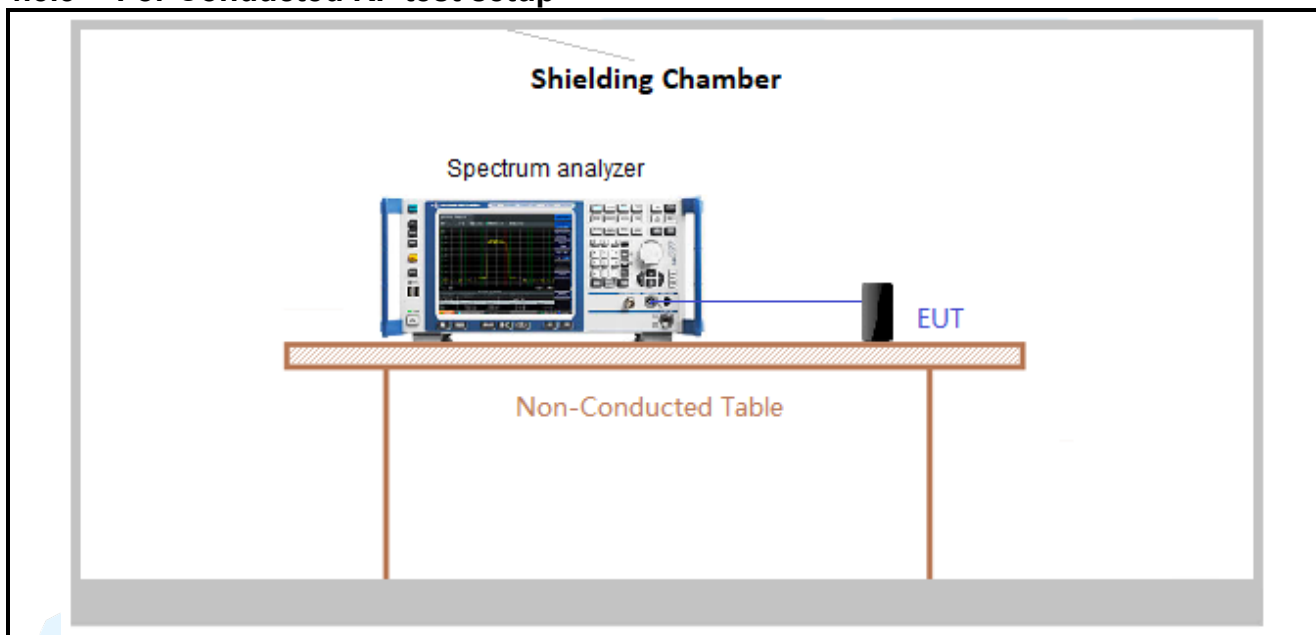

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8Vdc battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	Y axis
	1TX	Chain 1	Y axis
	2TX	Chain 0+1	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.1

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.

Test Results

Mode	Data rates (Mbps)	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	8.3888	8.4270	1.00	99.55	0.00	0.01	-0.04
IEEE 802.11g	6	1.3800	1.4400	0.96	95.83	0.18	0.72	-0.37
IEEE 802.11n-HT20	MCS8	1.3000	1.3600	0.96	95.59	0.20	0.77	-0.39

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plots as follows



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.1

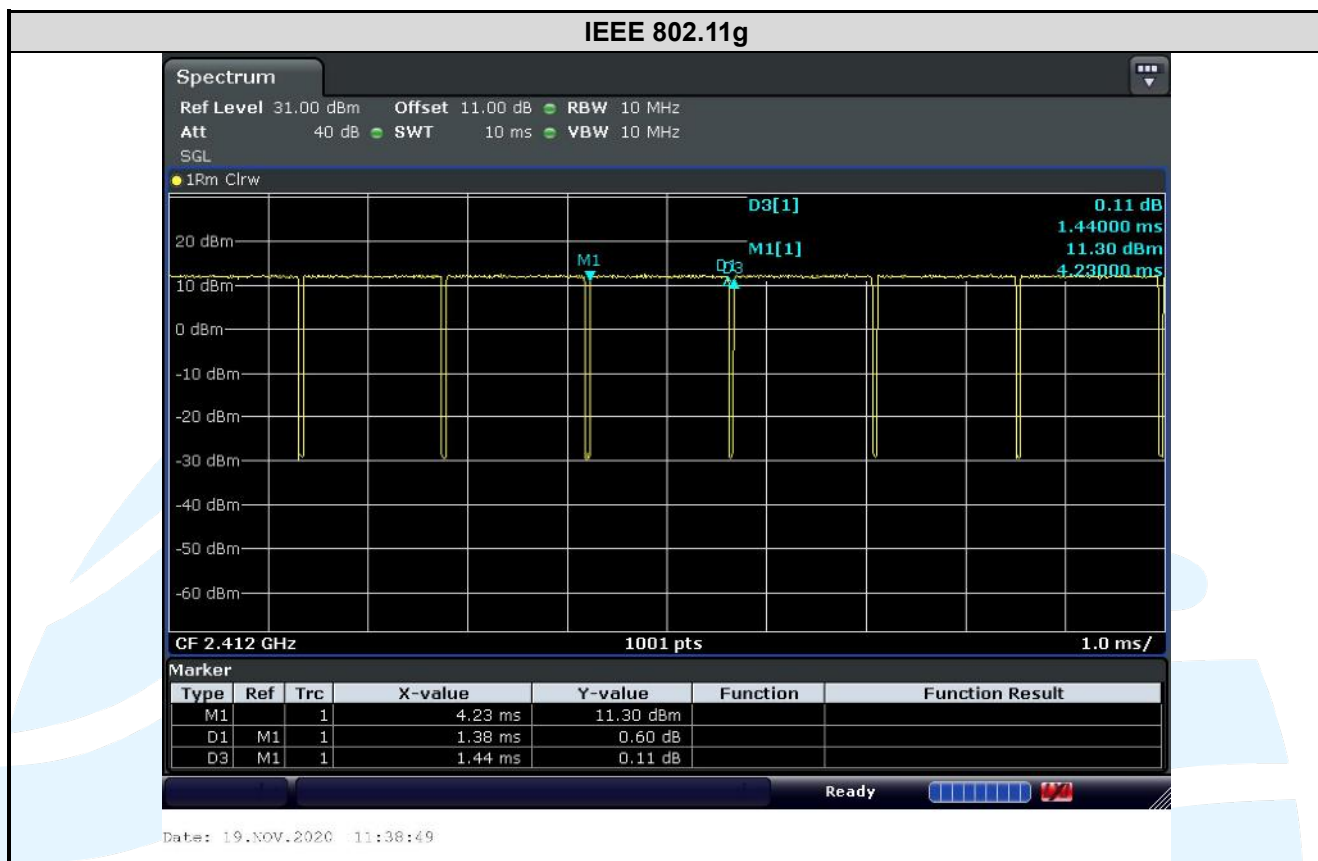

IEEE 802.11n-HT20

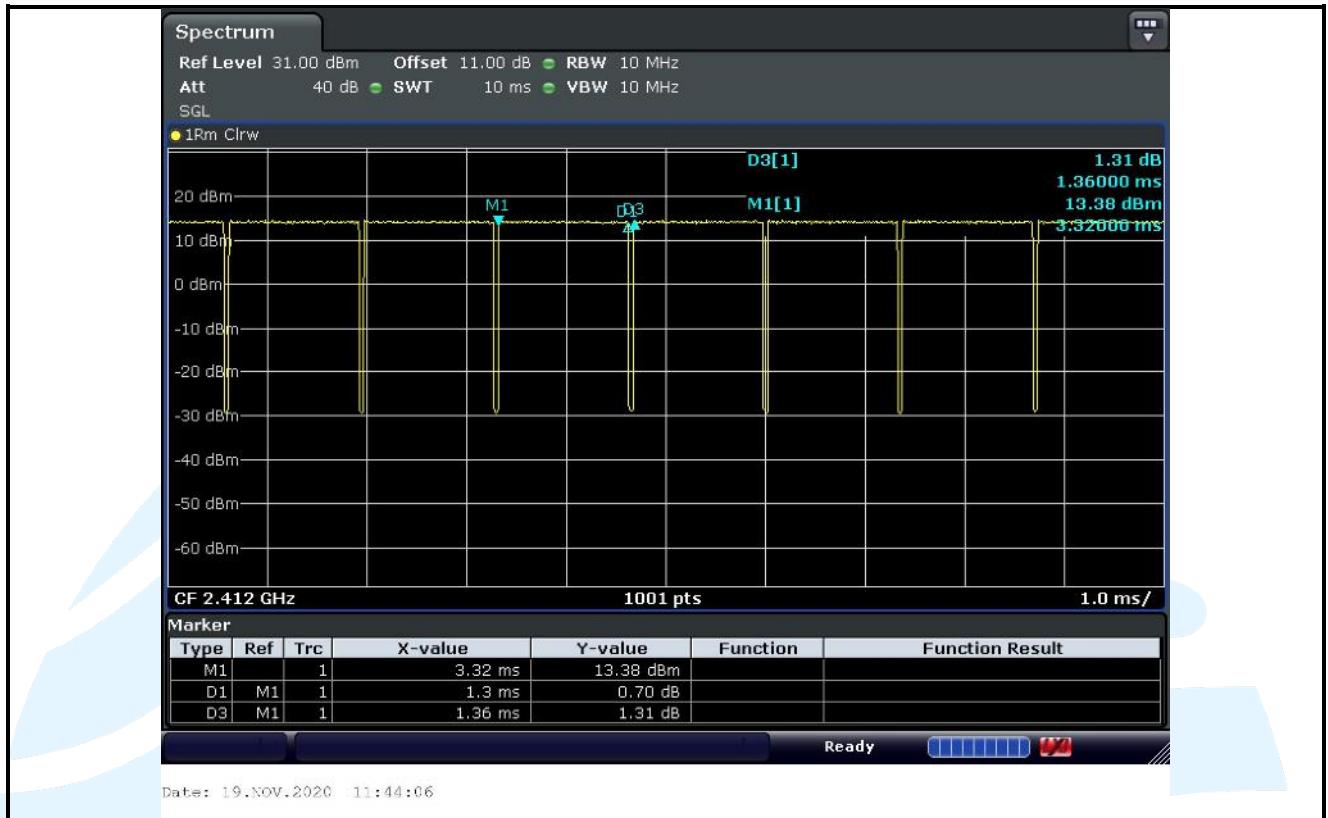

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules
5	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.1

EUT Antenna:

Both antenna in the interior of the equipment and no consideration of replacement. The transmit signals are correlated with each other and the antenna gain of both chains is completely no consistent, the best case directional gain of the antenna is 5.52 dBi (See section 5.3).



5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)

Test Method: ANSI C63.10-2013 Clause 11.9.1.3

Limit: For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

Mode	Channel/ Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)				
		SISO_ Chain 0	SISO_ Chain 1	Total Power MIMO_ Chain 0+1	Limit (dBm)	Pass / Fail
IEEE 802.11b	1(2412)	20.66	20.10	---	30	Pass
	6(2437)	20.78	19.85	---	30	Pass
	11(2462)	20.33	19.24	---	30	Pass
IEEE 802.11g	1(2412)	24.00	22.04	26.14	30	Pass
	6(2437)	23.95	22.41	26.26	30	Pass
	11(2462)	23.64	21.65	25.77	30	Pass
IEEE 802.11n-HT20	1(2412)	22.76	20.68	24.85	30	Pass
	6(2437)	22.92	20.58	24.92	30	Pass
	11(2462)	22.57	20.80	24.78	30	Pass

Remark:

1. Power with Duty Factor = Measured Power + Duty Cycle Factor
2. Total (Chain 0+1) = $10 \cdot \log[(10^{\text{Chain 0}/10}) + (10^{\text{Chain 1}/10})]$
3. Directional gain and the maximum conducted output power limit see table below:

Frequency Band	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Peak Power Limit (dBm)
2400 MHz to 2483.5 MHz	3.00	2.00	5.52	30.00

Unequal antenna gains, with equal transmit powers. Directional gain is to be computed as follows:
If transmit signals are correlated, then

$$\text{Directional gain} = 10 \log[(10^{G_1}/20 + 10^{G_2}/20 + \dots + 10^{G_N}/20)^2 / N \text{ANT}] \text{ dBi}$$

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

5.46 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)

Test Method: ANSI C63.10-2013 Clause 11.8.1

Limit: For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

a) Set RBW = 100 kHz.

b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Sweep = auto couple.

f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results:

Mode	Channel/ Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limit	Pass / Fail
Chain 0					
IEEE 802.11b	1(2412)	7.132	10.344	> 500 kHz	Pass
	6(2437)	7.135	10.327	> 500 kHz	Pass
	11(2462)	7.572	10.298	> 500 kHz	Pass
IEEE 802.11g	1(2412)	16.350	16.460	> 500 kHz	Pass
	6(2437)	16.340	16.448	> 500 kHz	Pass
	11(2462)	16.330	16.449	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	17.340	17.637	> 500 kHz	Pass
	6(2437)	17.580	17.629	> 500 kHz	Pass
	11(2462)	17.340	17.636	> 500 kHz	Pass
Chain 1					
IEEE 802.11b	1(2412)	7.116	10.206	> 500 kHz	Pass
	6(2437)	7.132	10.200	> 500 kHz	Pass
	11(2462)	7.082	10.171	> 500 kHz	Pass
IEEE 802.11g	1(2412)	16.390	16.438	> 500 kHz	Pass
	6(2437)	16.380	16.445	> 500 kHz	Pass
	11(2462)	16.380	16.445	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	17.610	17.621	> 500 kHz	Pass
	6(2437)	17.610	17.614	> 500 kHz	Pass
	11(2462)	17.610	17.607	> 500 kHz	Pass

The test plots as follows:

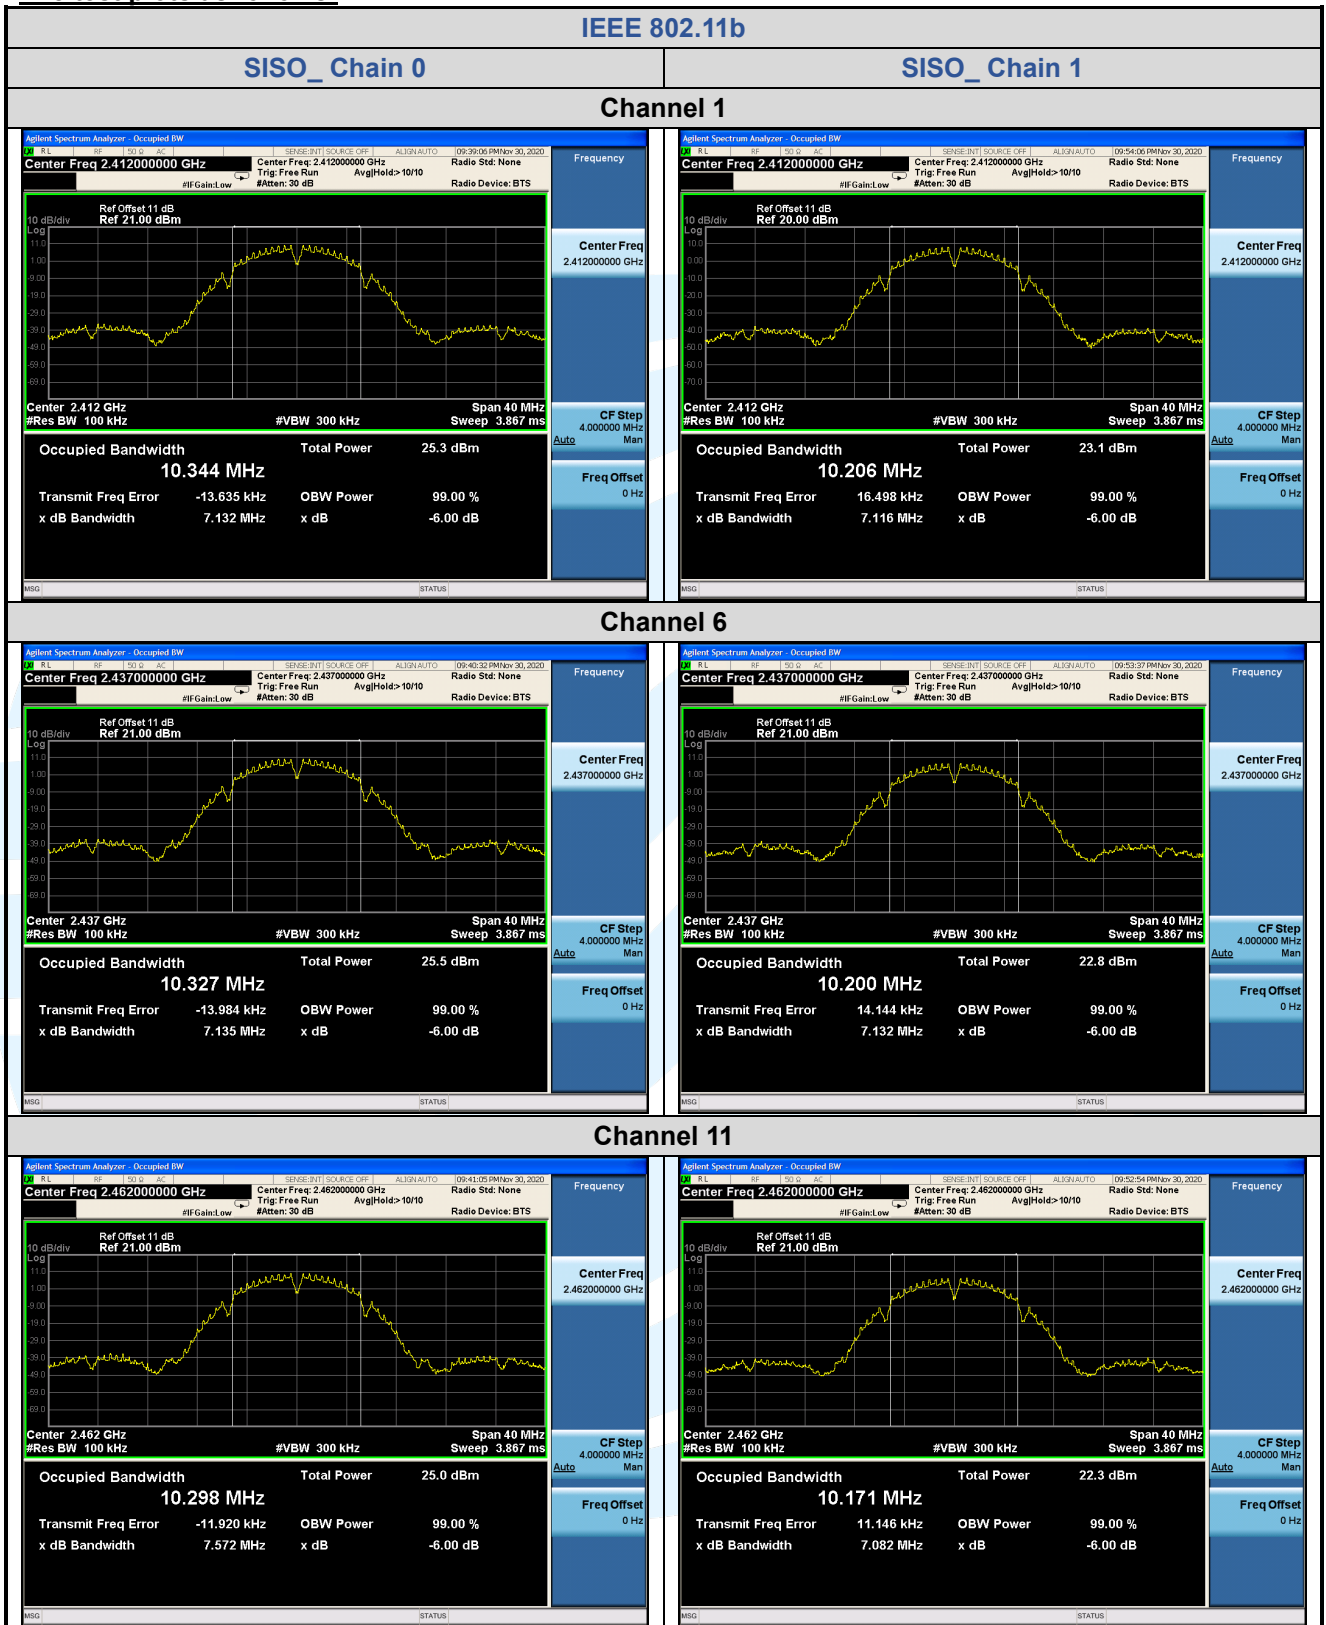

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

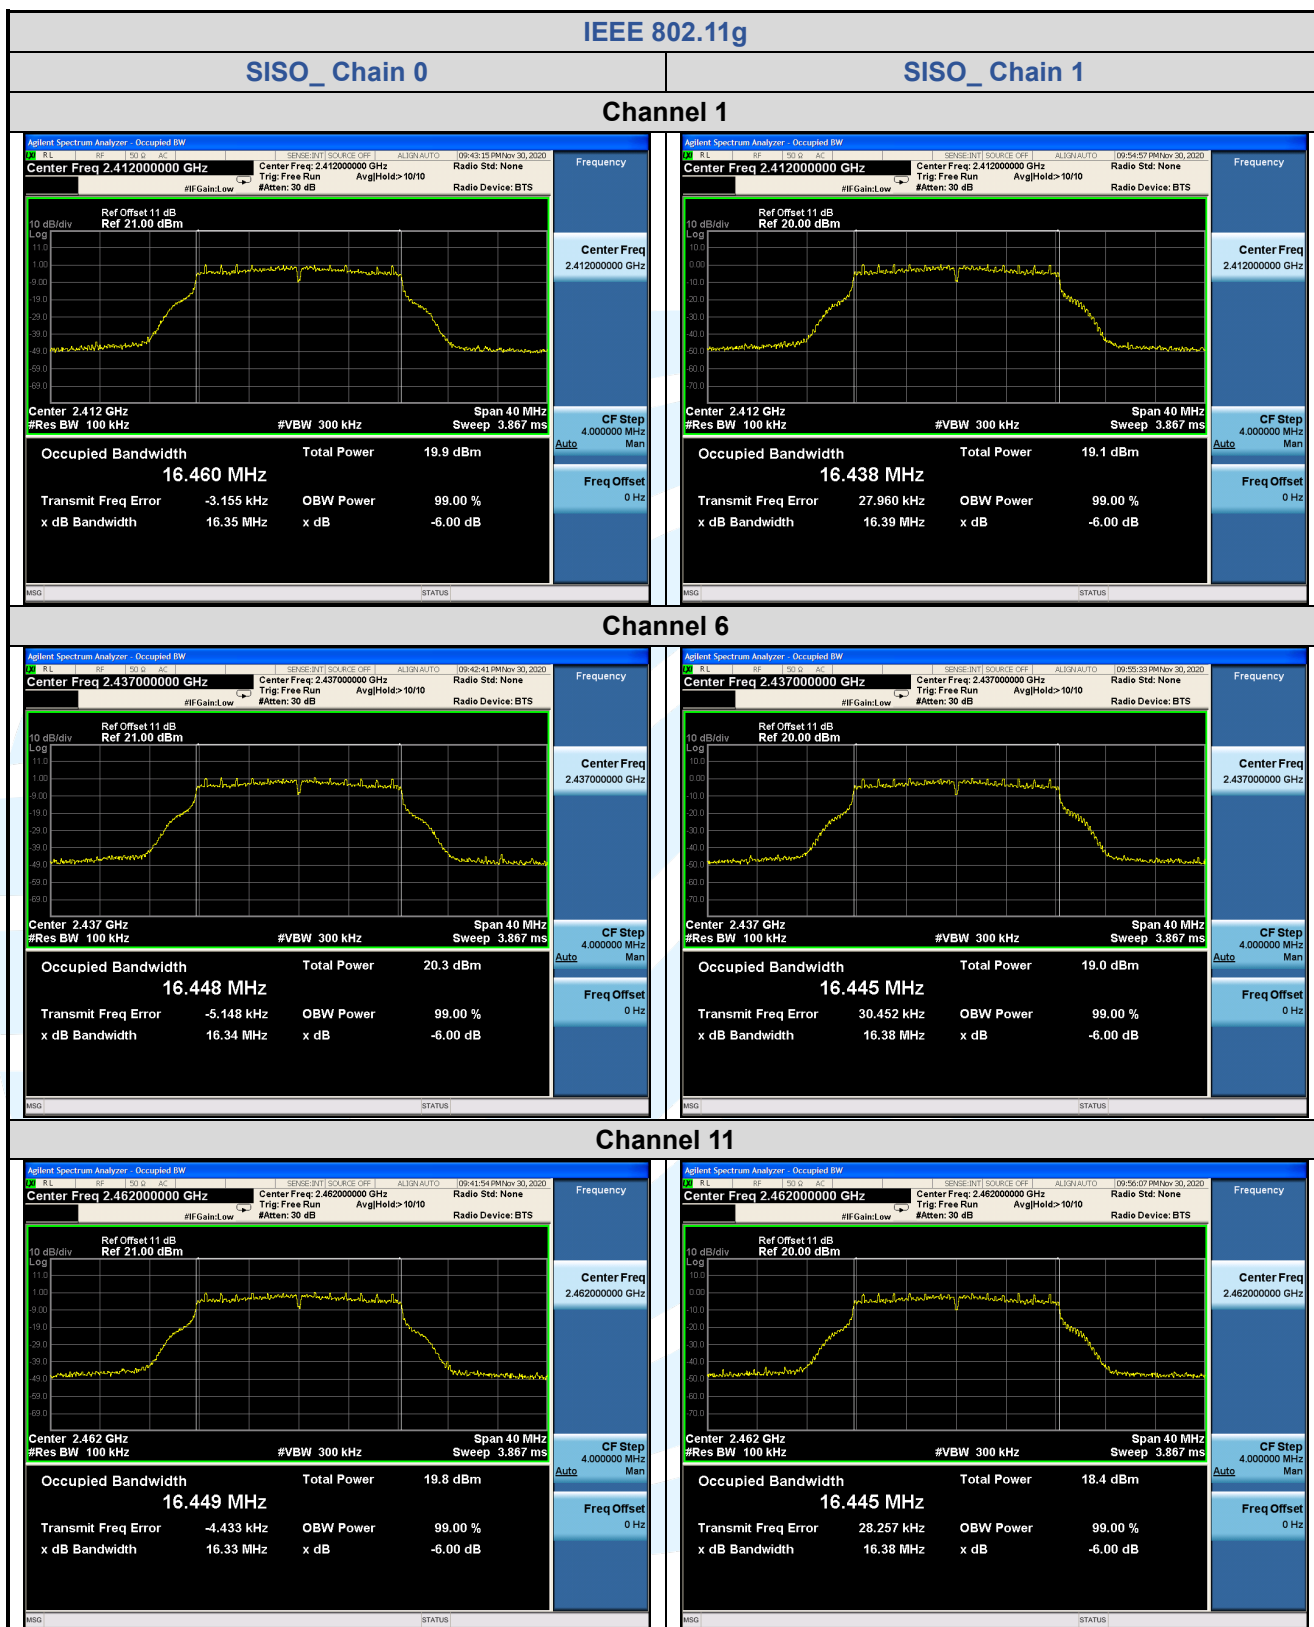

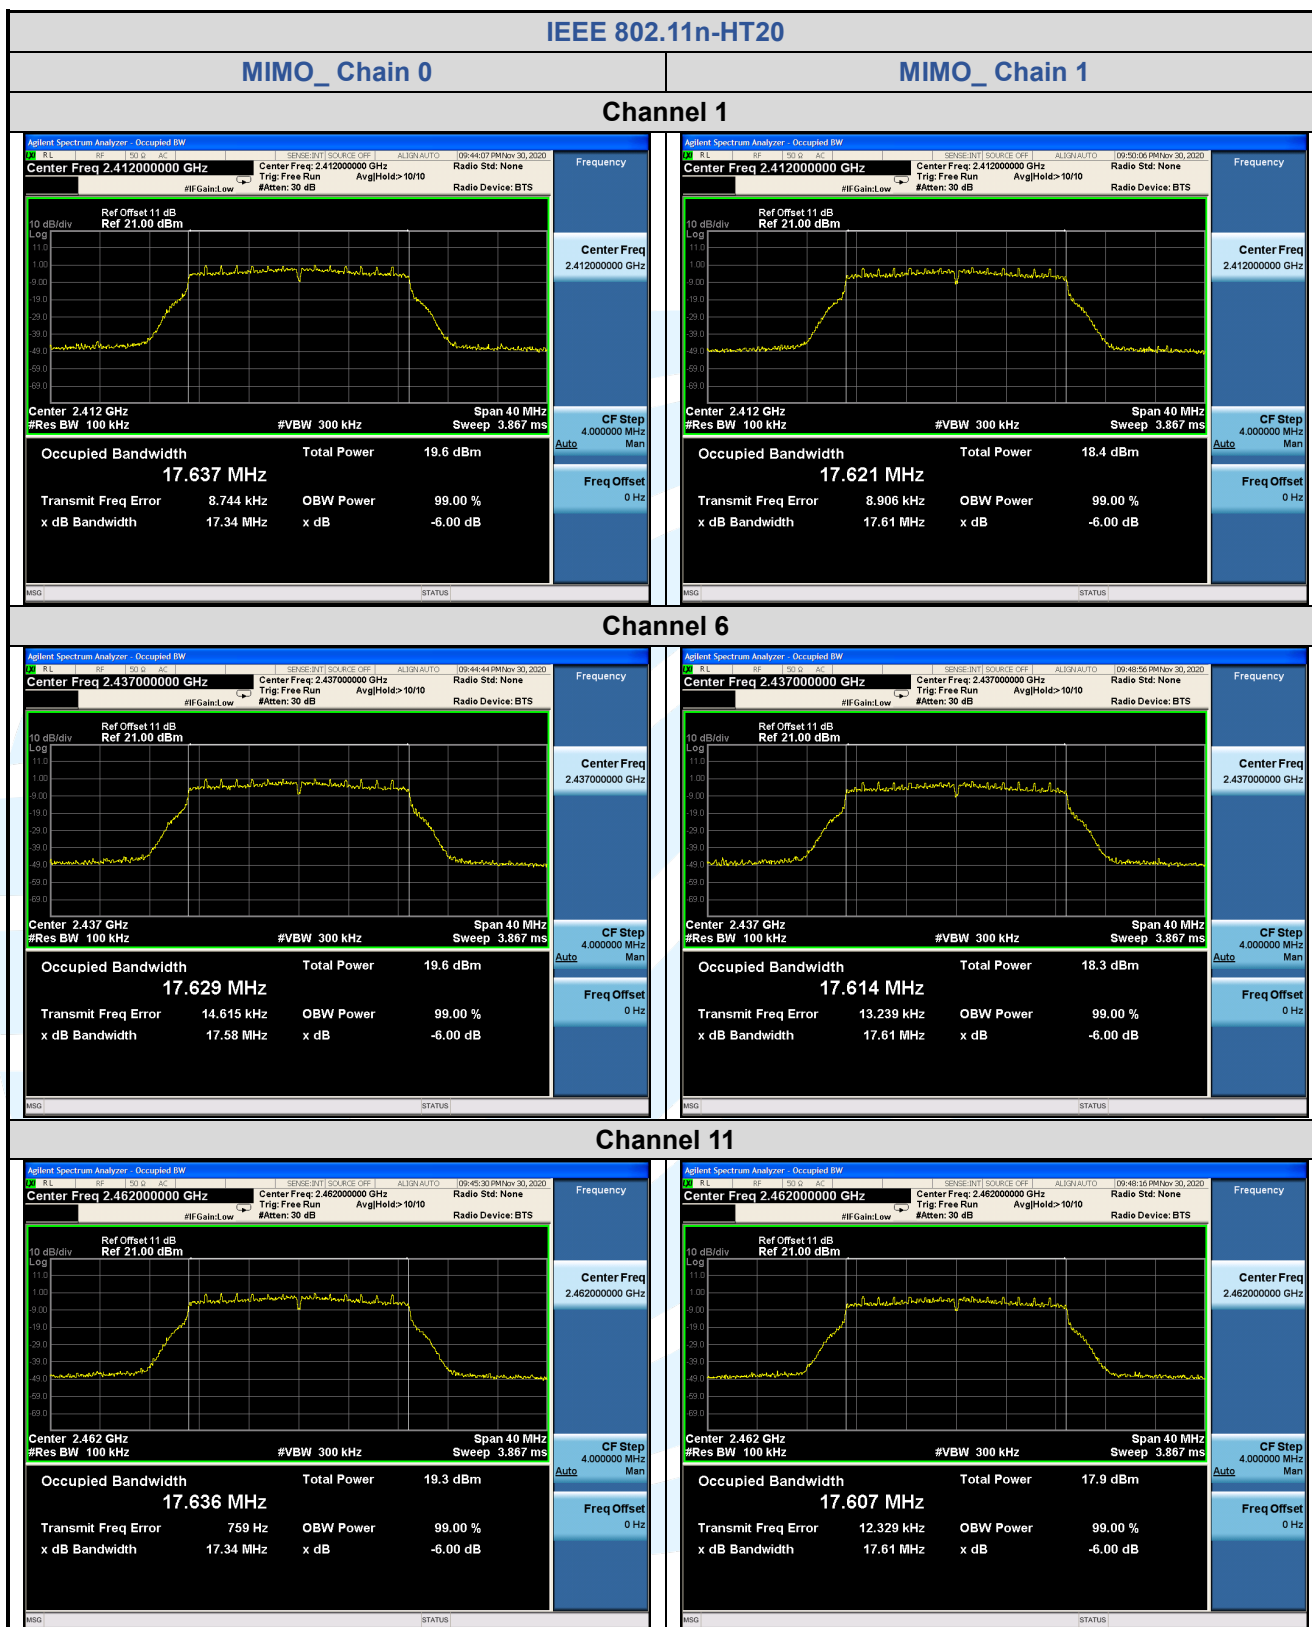

5.5 POWER SPECTRAL DENSITY

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (e)

Test Method: ANSI C63.10-2013 Clause 11.10.2

Limit: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results:

Mode	Channel/ Frequency (MHz)	Power spectral density (dBm/3kHz)				
		SISO_ Chain 0	SISO_ Chain 1	Total Power MIMO_ Chain 0+1	Limit @3kHz (dBm)	Pass / Fail
IEEE 802.11b	1(2412)	-3.573	-5.306	---	8	Pass
	6(2437)	-3.185	-6.553	---	8	Pass
	11(2462)	-3.496	-6.141	---	8	Pass
IEEE 802.11g	1(2412)	-10.940	-11.561	-8.23	8	Pass
	6(2437)	-10.99	-11.768	-8.35	8	Pass
	11(2462)	-11.136	-13.042	-8.97	8	Pass
IEEE 802.11n-HT20	1(2412)	-11.268	-12.735	-8.93	8	Pass
	6(2437)	-10.928	-13.766	-9.11	8	Pass
	11(2462)	-12.401	-13.239	-9.79	8	Pass

Remark:

1. Total (Chain 0+1) = $10 \cdot \log[(10^{\text{Chain 0/10}}) + (10^{\text{Chain 1/10}})]$

2. Directional gain and the maximum conducted power spectral density limit see table below:

Frequency Band	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Peak Power Limit (dBm)
2400 MHz to 2483.5 MHz	3.00	2.00	5.52	8.00
Unequal antenna gains, with equal transmit powers. Directional gain is to be computed as follows:				
If transmit signals are correlated, then				
Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]				

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.1

The test plots as follows:

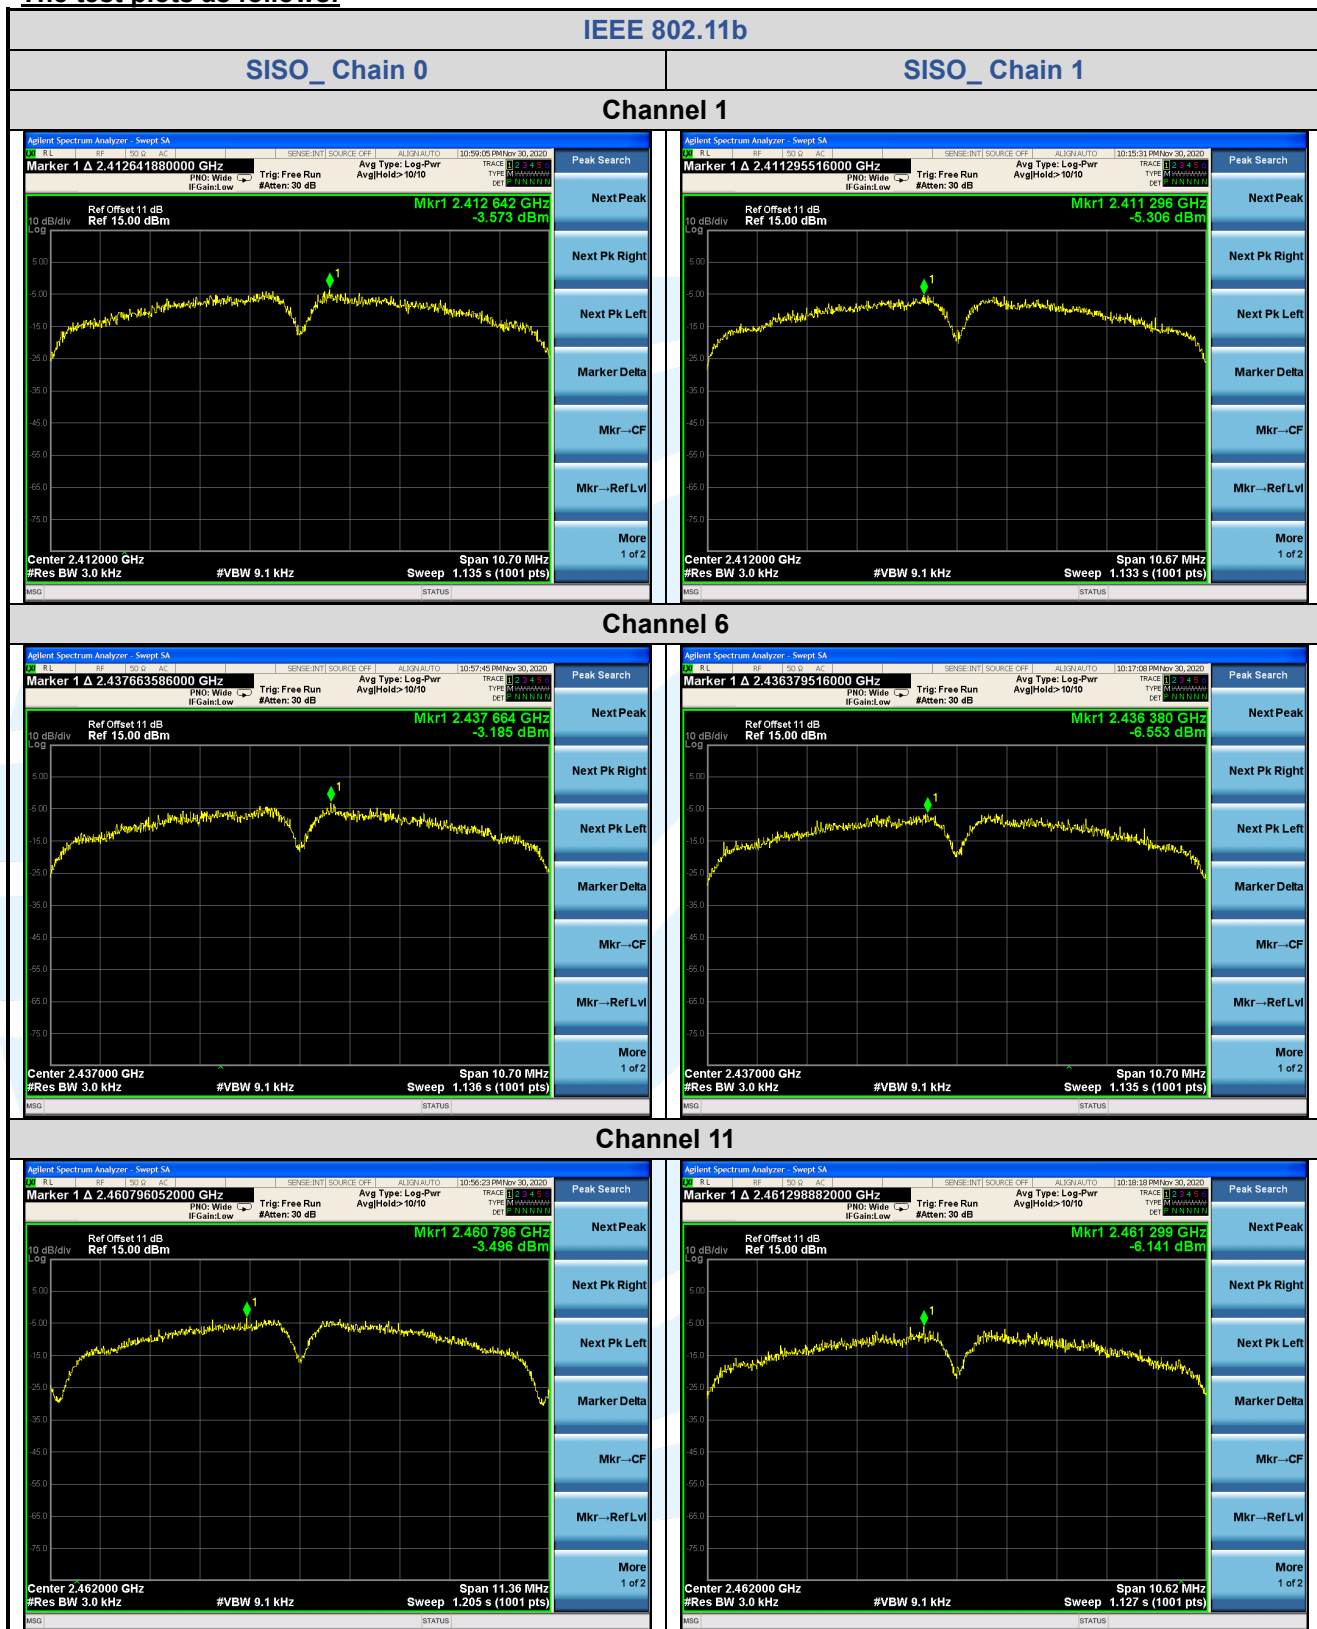

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

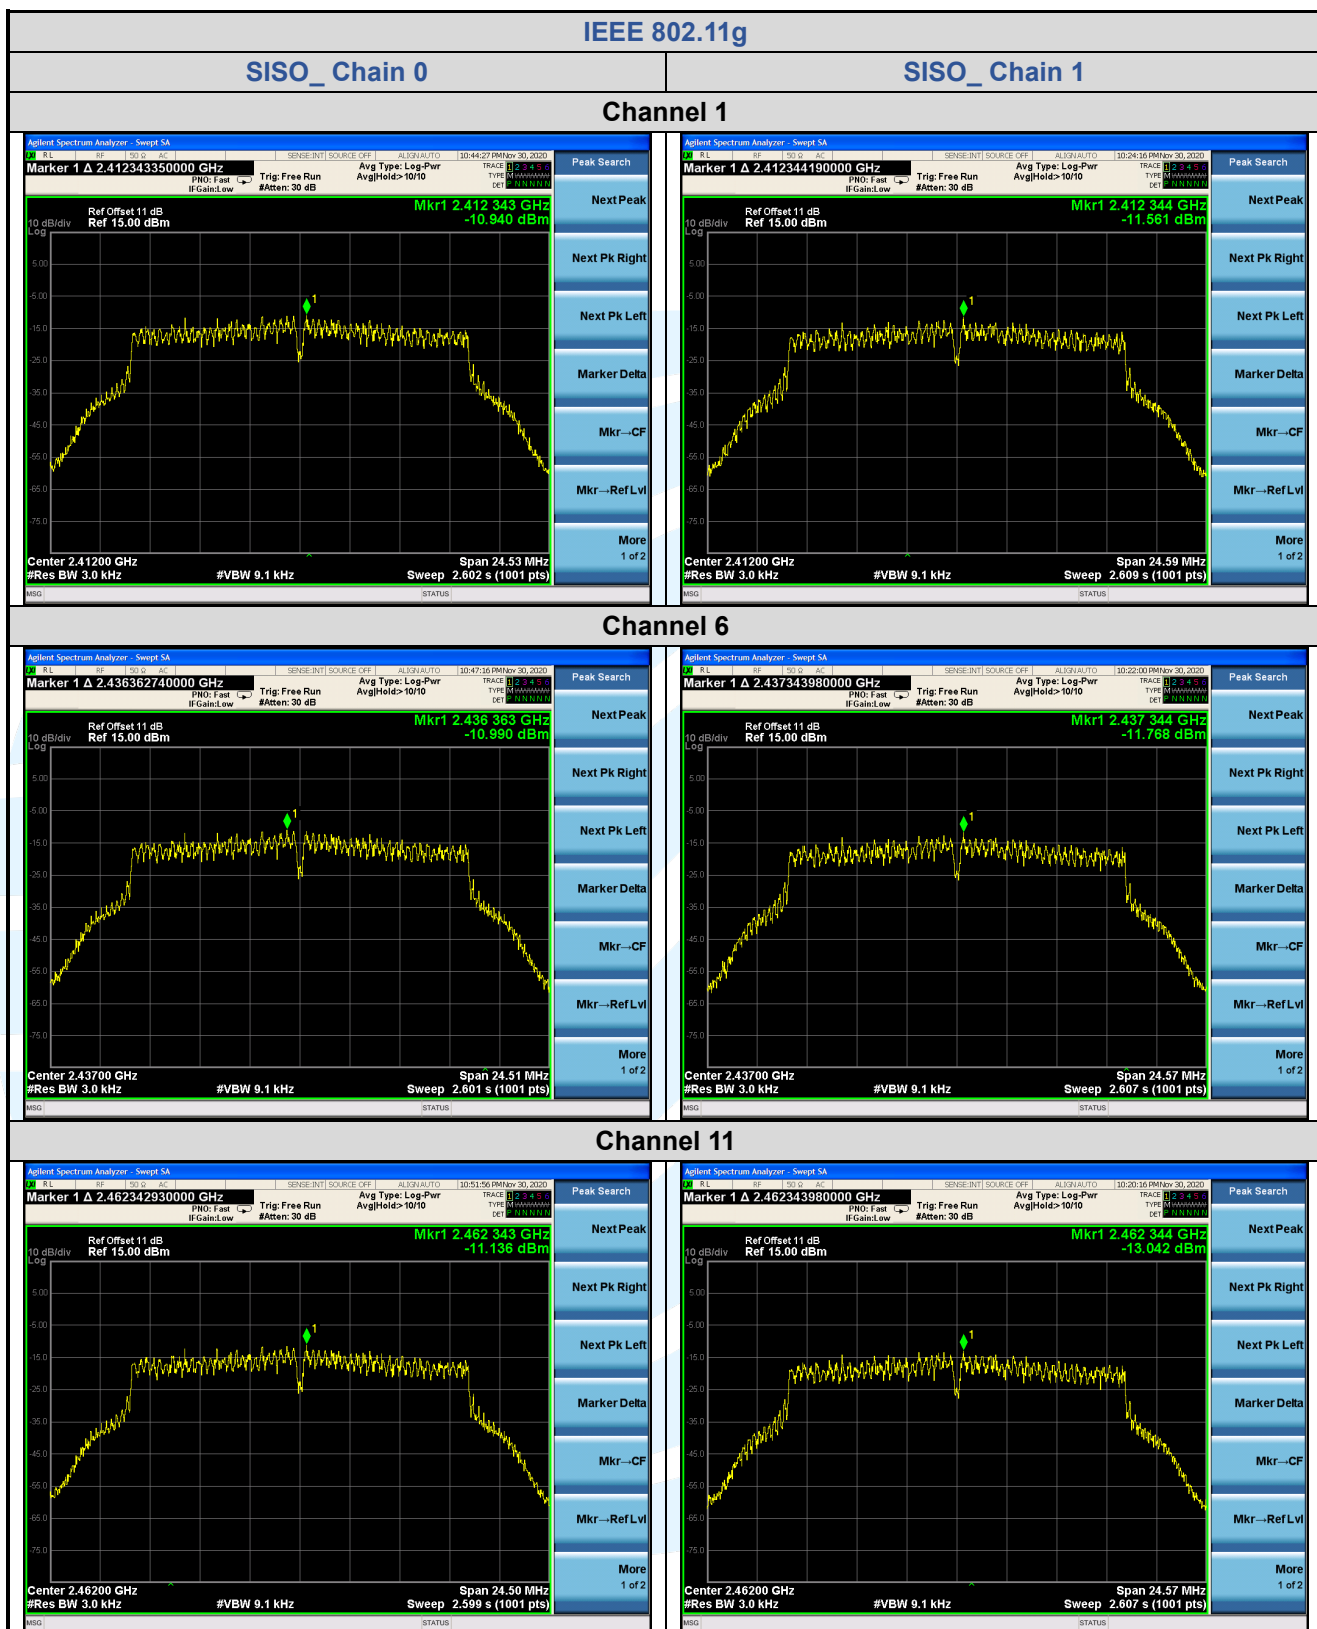

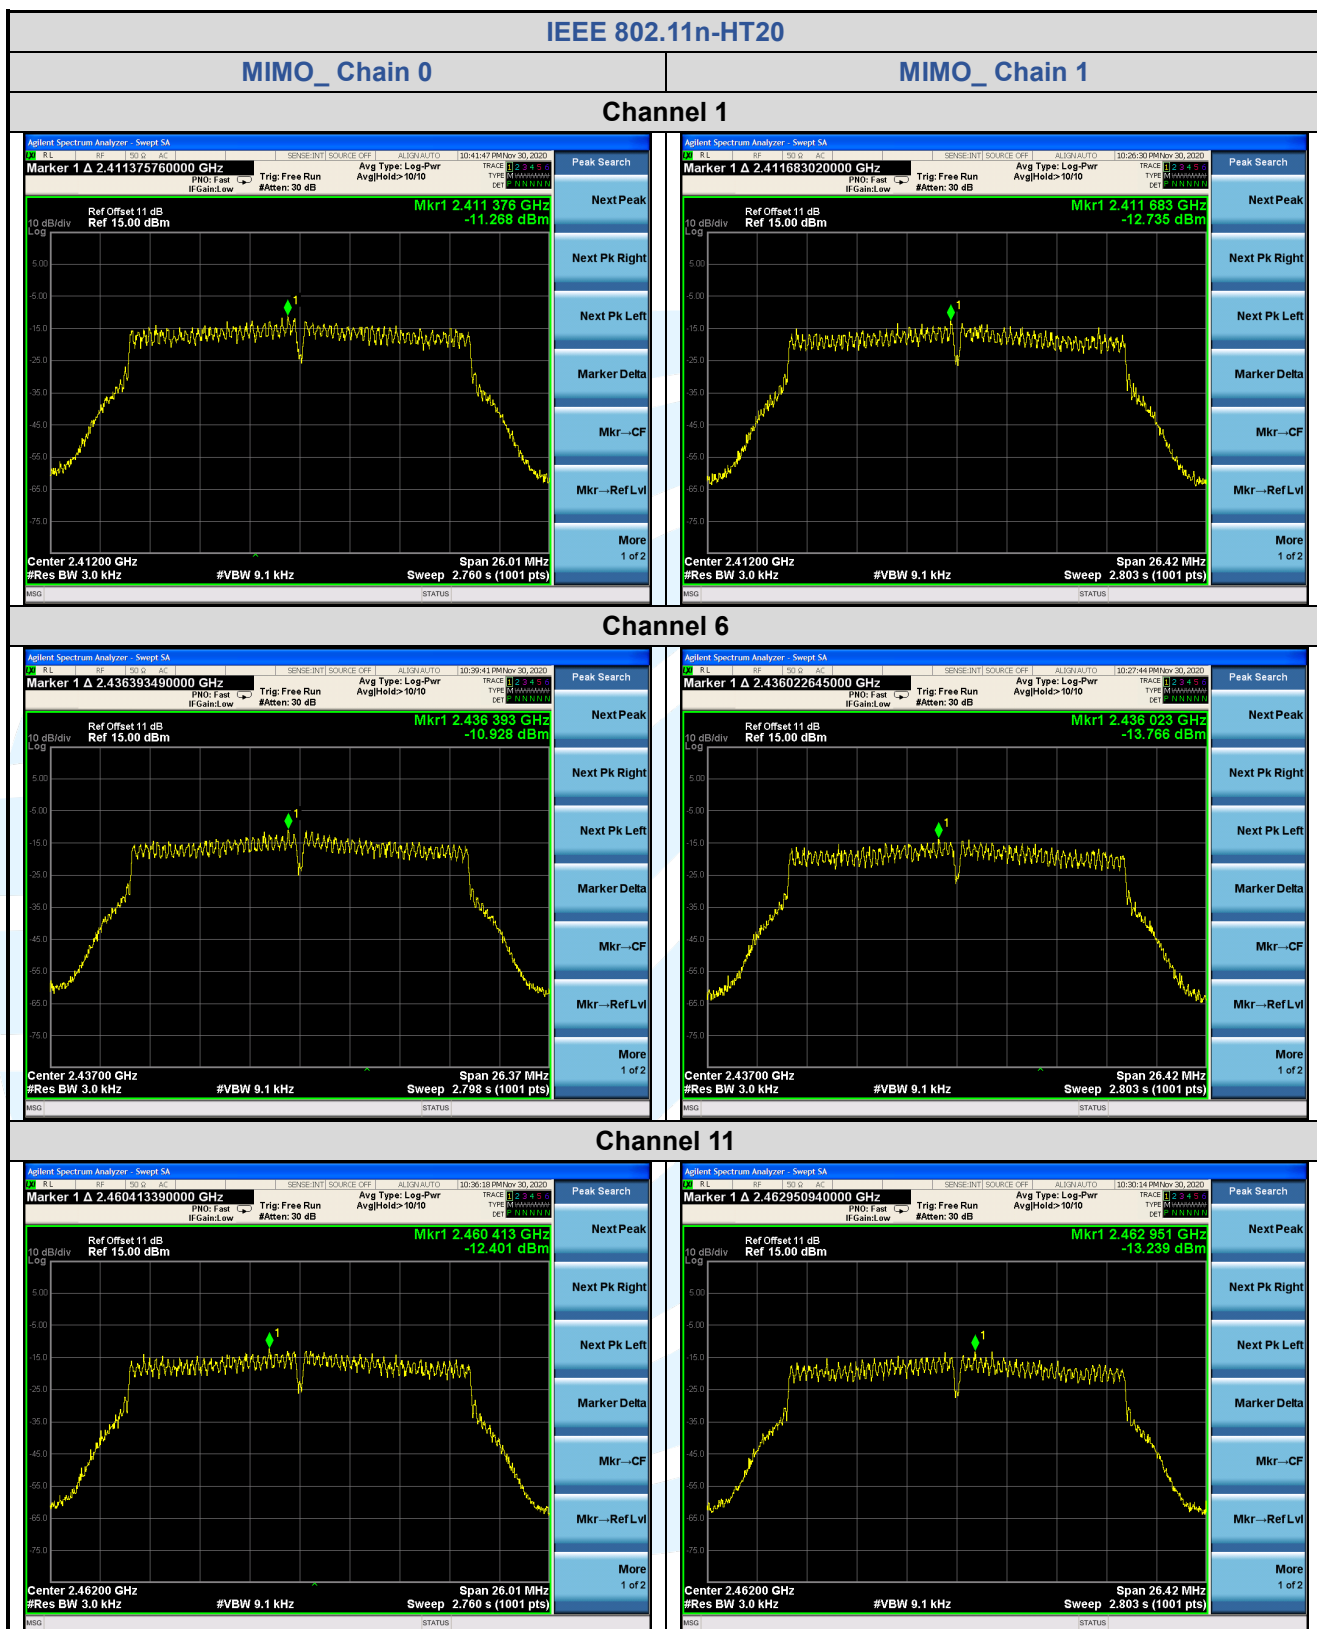

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(d)

Test Method: ANSI C63.10-2013 Clause 11.11

Limit: In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.
- j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Step 2: Measurement Procedure OOBE

- a) Set RBW = 100 kHz.
- b) Set VBW ≥ 300 kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

The test plots as follows:

