RF TEST REPORT



Report No.: 16070658-FCC-R2 Supersede Report No.: N/A

Applicant	SMT TELECOMM HK LIMITED			
Product Name	Mobile Pho	Mobile Phone		
Model No.	X325			
Serial No.	N/A			
Test Standard	FCC Part 1	5.247: 2015, ANSI C63.10: 2	013	
Test Date	April 23 to	April 23 to May 06, 2016		
Issue Date	June 07, 2016			
Test Result	Pass Fail			
Equipment complied with the specification				
Equipment did no	Equipment did not comply with the specification			
Winnie Zhang		Dewid Huang		
Winnie Zhang Test Engineer		David Huang Checked By		

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report	16070658-FCC-R2
Page	2 of 59

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report	16070658-FCC-R2
Page	3 of 59

This page has been left blank intentionally.



Test Report	16070658-FCC-R2
Page	4 of 59

CONTENTS

1.	REPORT REVISION HISTORY	5
2.	CUSTOMER INFORMATION	5
3.	TEST SITE INFORMATION	5
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5.	TEST SUMMARY	8
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
3.1	ANTENNA REQUIREMENT	9
6.2	CHANNEL SEPARATION	10
6.3	20DB BANDWIDTH	14
6.4	PEAK OUTPUT POWER	18
3.5	NUMBER OF HOPPING CHANNEL	22
6.6	TIME OF OCCUPANCY (DWELL TIME)	24
6.7	BAND EDGE	28
6.8	AC POWER LINE CONDUCTED EMISSIONS	36
6.9	RADIATED SPURIOUS EMISSIONS	42
ANI	NEX A. TEST INSTRUMENT	48
ANI	NEX B. EUT AND TEST SETUP PHOTOGRAPHS	49
ANI	NEX C. TEST SETUP AND SUPPORTING EQUIPMENT	54
ANI	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	58
ANI	NEX E. DECLARATION OF SIMILARITY	59



Test Report	16070658-FCC-R2
Page	5 of 59

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070658-FCC-R2	NONE	Original	June 07, 2016

2. Customer information

Applicant Name	SMT TELECOMM HK LIMITED
Applicant Add	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL
Manufacturer	SMT TELECOMM HK LIMITED
Manufacturer Add	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES	
3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park	
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China	
Lab Address		
	518108	
FCC Test Site No.	718246	
IC Test Site No.	4842E-1	
Test Software	Radiated Emission Program-To Shenzhen v2.0	



Test Report	16070658-FCC-R2
Page	6 of 59

4. Equipment under Test (EUT) Information

Description of EUT: Mobile Phone

Main Model: X325

Serial Model: N/A

Date EUT received: April 22, 2016

Test Date(s): April 23 to May 06, 2016

Equipment Category: DSS

GSM850: -2.22dBi

PCS1900: -1.14dBi

UMTS-FDD Band V: -2.22dBi

Antenna Gain: UMTS-FDD Band II: -1.14dBi

Bluetooth/BLE: 2.93dBi

WIFI: 2.93dBi GPS:0 dBi

GSM / GPRS: GMSK

EGPRS: GMSK

UMTS-FDD: QPSK, 16QAM

Type of Modulation: 802.11b/g/n: DSSS, OFDM

Bluetooth: GFSK, π /4DQPSK, 8DPSK

BLE: GFSK GPS:BPSK

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz

PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz

UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz

UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;

RF Operating Frequency (ies): RX: 1932.4 ~ 1987.6 MHz

WIFI:802.11b/g/n(20M): 2412-2462 MHz WIFI:802.11n(40M): 2422-2452 MHz Bluetooth& BLE: 2402-2480 MHz

GPS RX:1575.42 MHz



Test Report	16070658-FCC-R2
Page	7 of 59

Max. Output Power: 5.012dBm

GSM 850: 124CH PCS1900: 299CH

UMTS-FDD Band V: 102CH

UMTS-FDD Band II: 277CH

Number of Channels: WIFI:802.11b/g/n(20M): 11CH

WIFI:802.11n(40M): 7CH

Bluetooth: 79CH

BLE: 40CH GPS:1CH

Port: Power Port, Earphone Port, USB Port

Adapter:

Model:PC325

Input: AC 100-240V~50/60Hz,0.15A

Output: DC 5.0V,500mA

Input Power: Battery:

Model: BPX325

Spec:3.7V, 4.44Wh

Battery Capacity:1200mAh Limited charger voltage:4.2V

Trade Name: N/A

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: 2AIMEX325



Test Report	16070658-FCC-R2
Page	8 of 59

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions			
Test Item	Description	Uncertainty	
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB	
-	-	-	



Test Report	16070658-FCC-R2
Page	9 of 59

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is 2.93dBi for Bluetooth/BLE and WIFI, the gain is 0dBi for GPS.

A permanently attached PIFA antenna for GSM/PCS and UMTS, the gain is -2.22dBi for GSM850, -1.14dBi for PCS1900,-2.22dBi for UMTS-FDD Band V, -1.14dBi for UMTS-FDD Band II.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.



Test Report	16070658-FCC-R2
Page	10 of 59

6.2 Channel Separation

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	April 25, 2016
Tested By :	Winnie Zhang

Requirement(s):

Requirement(s):	·		T		
Spec	Item	Requirement	Applicable		
S 45 047/ \//\		Channel Separation < 20dB BW and 20dB BW < 25KHz; Channel Separation Limit=25KHz	V		
§ 15.247(a)(1)	a)	Chanel Separation < 20dB BW and 20dB BW >			
		25kHz; Channel Separation Limit=2/3 20dB BW			
Test Setup					
	The to	est follows FCC Public Notice DA 00-705 Measurement	Guidelines.		
	Use the following spectrum analyzer settings:				
	The EUT must have its hopping function enabled				
	-	Span = wide enough to capture the peaks of two adjac	ent		
		channels			
	- Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span				
Test Procedure	- Video (or Average) Bandwidth (VBW) ≥ RBW				
restriocedule	- Sweep = auto				
	- Detector function = peak				
	- Trace = max hold				
	- Allow the trace to stabilize. Use the marker-delta function to				
	determine the separation between the peaks of the adjacent				
		channels. The limit is specified in one of the subparagra	aphs of this		
		Section. Submit this plot.			



Test Report	16070658-FCC-R2
Page	11 of 59

Rema	rk				
Resu	lt	Pass	Fail		
Test Data	Yes	.	□ _{N/A}		
Test Plot	Ye	s (See below)	□ _{N/A}		

Channel Separation measurement result


Type/ Modulation	СН	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
	Low Channel	2402	1.0050	0.600	Desc
	Adjacency Channel	2403	1.0050	0.689	Pass
CH Separation	Mid Channel	2440	1.0050	0.604	Desc
GFSK	Adjacency Channel	2441	1.0050	0.691	Pass
	High Channel	2480	1.0050	0.691	Desc
	Adjacency Channel	2479	1.0050	0.691	Pass
	Low Channel	2402	1.0050	0.870	Desc
	Adjacency Channel	2403	1.0050	0.670	Pass
CH Separation	Mid Channel	2440	1.0050	0.871	Door
π /4 DQPSK	Adjacency Channel	2441	1.0050	0.671	Pass
	High Channel	2480	1.0050	0.873	Door
	Adjacency Channel	2479	1.0050	0.673	Pass
	Low Channel	2402	1.0050	0.874	Door
	Adjacency Channel	2403	1.0050	0.074	Pass
CH Separation	Mid Channel	2440	1.0050	0.067	Desc
8DPSK	Adjacency Channel	2441	1.0050	0.867	Pass
	High Channel	2480	1.0050	0.867	Door
	Adjacency Channel	2479	1.0000	0.007	Pass



Test Report	16070658-FCC-R2
Page	12 of 59


Test Plots

Channel Separation measurement result

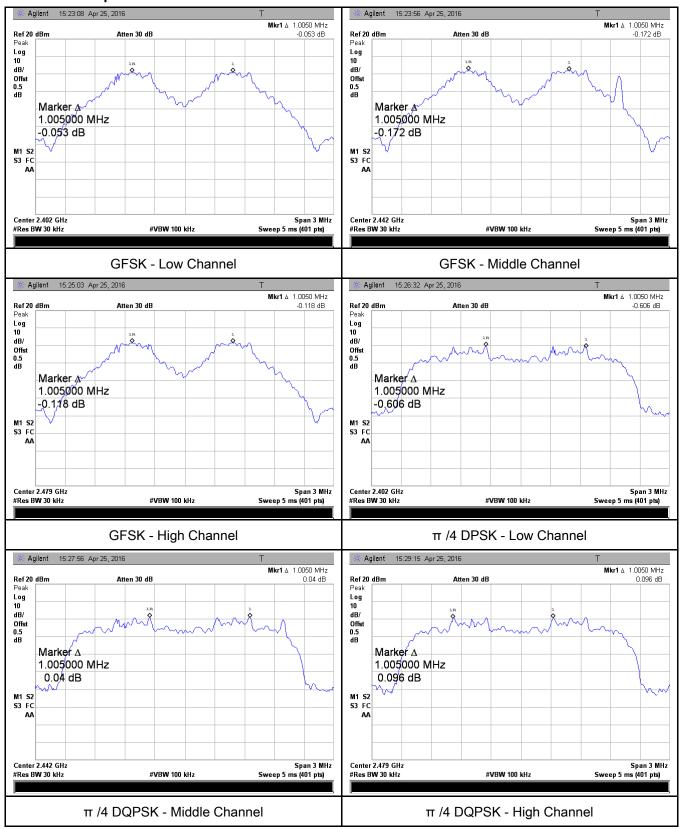



Test Report	16070658-FCC-R2
Page	13 of 59

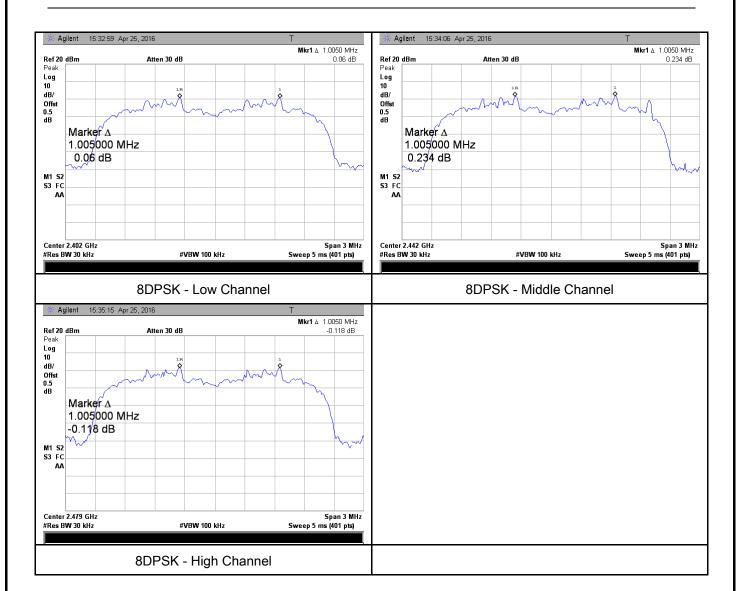



Test Report	16070658-FCC-R2
Page	14 of 59

6.3 20dB Bandwidth

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	April 25, 2016
Tested By:	Winnie Zhang

Requirement(s):			
Spec	Item Requirement Applicable		
§15.247(a) (1)	a)	>	
Test Setup			
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel RBW ≥ 1% of the 20 dB bandwidth VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold. The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-		
		delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the	



Test Report	16070658-FCC-R2
Page	15 of 59

_					
		marker level. The marker-delta reading at this point is the 20 dB			
		bandwid	bandwidth of the emission. If this value varies with different modes of		
		operatio	on (e.g., data rate, modulation format, etc.), repeat this test for		
		each va	riation. The limit is specified in one of the subparagraphs of		
		this Sec	tion. Submit this plot(s).		
Remark					
Result		Pass	Fail		
Test Data	Y	'es	□ _{N/A}		
Test Plot	V	es (See below)	□ _{N/A}		

Measurement result


Modulation	СН	CH Frog (MHz)	20dB Bandwidth	99% Occupied
Modulation	G	CH Freq (MHz)	(MHz)	Bandwidth (MHz)
	Low	2402	1.034	0.8970
GFSK	Mid	2441	1.036	0.9041
	High	2480	1.037	0.9035
	Low	2402	1.305	1.1745
π /4 DQPSK	Mid	2441	1.307	1.1737
	High	2480	1.309	1.1791
	Low	2402	1.311	1.1891
8-DPSK	Mid	2441	1.301	1.1779
	High	2480	1.301	1.1784



Test Report	16070658-FCC-R2
Page	16 of 59


Test Plots

20dB Bandwidth measurement result

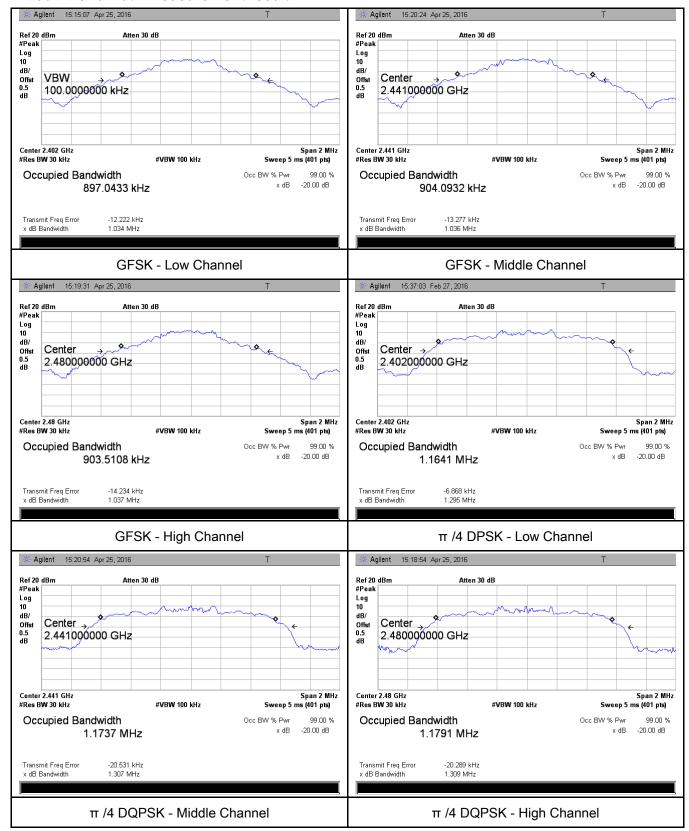



Test Report	16070658-FCC-R2
Page	17 of 59

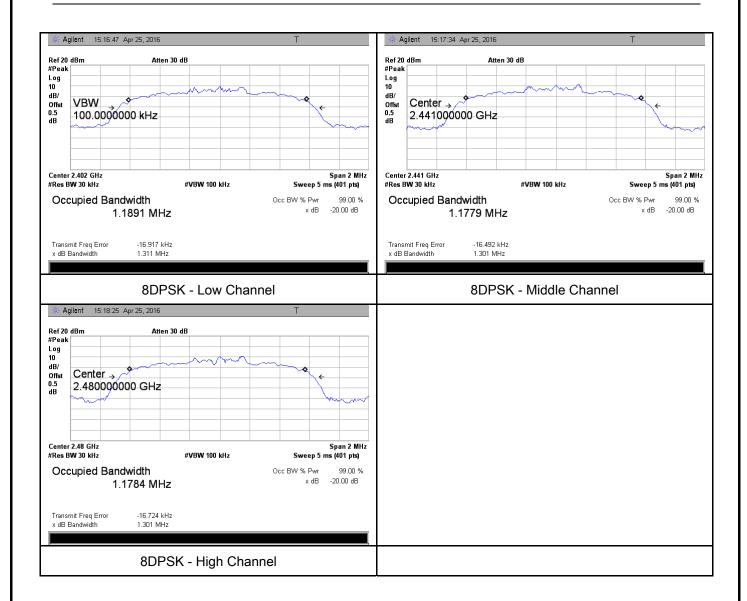



Test Report	16070658-FCC-R2
Page	18 of 59

6.4 Peak Output Power

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	April 25, 2016
Tested By:	Winnie Zhang

Requirement(s):

Spec	Item	Requirement Applicable		
	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1		
		Watt	>	
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt		
C4E 047/b)	٥)	For all other FHSS in the 2400-2483.5MHz band:		
§15.247(b)	c)	≤ 0.125 Watt.		
(3)	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt		
		FHSS in 902-928MHz with ≥ 25 & <50 channels:		
	e)	≤ 0.25 Watt		
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt		
Test Setup				
	The test follows FCC Public Notice DA 00-705 Measurement Guidelines.			
	Use the following spectrum analyzer settings:			
	- Span = approximately 5 times the 20 dB bandwidth, centered		ered on a	
	hopping channel			
Test	- RBW > the 20 dB bandwidth of the emission being measured			
Procedure	- VBW≥ RBW			
	- Sweep = auto			
	- Detector function = peak			
	- Trace = max hold			
	- Allow the trace to stabilize.			



Test Report	16070658-FCC-R2
Page	19 of 59

	- Use the marker-to-peak function to set the marker to the peak of the
	emission. The indicated level is the peak output power (see the note
	above regarding external attenuation and cable loss). The limit is
	specified in one of the subparagraphs of this Section. Submit this
	plot. A peak responding power meter may be used instead of a
	spectrum analyzer.
Remark	
Result	Pass Fail
Test Data	res N/A

Peak Output Power measurement result

Test Plot Yes (See below) N/A


Туре	Modulation	СН	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
		Low	2402	3.891	125	Pass
	GFSK	Mid	2441	5.012	125	Pass
		High	2480	4.960	125	Pass
O	π /4 DQPSK 8-DPSK	Low	2402	3.563	125	Pass
Output		Mid	2441	4.834	125	Pass
power		High	2480	4.740	125	Pass
		Low	2402	3.746	125	Pass
		Mid	2441	4.933	125	Pass
		High	2480	4.887	125	Pass



Test Report	16070658-FCC-R2
Page	20 of 59


Test Plots

Output Power measurement result

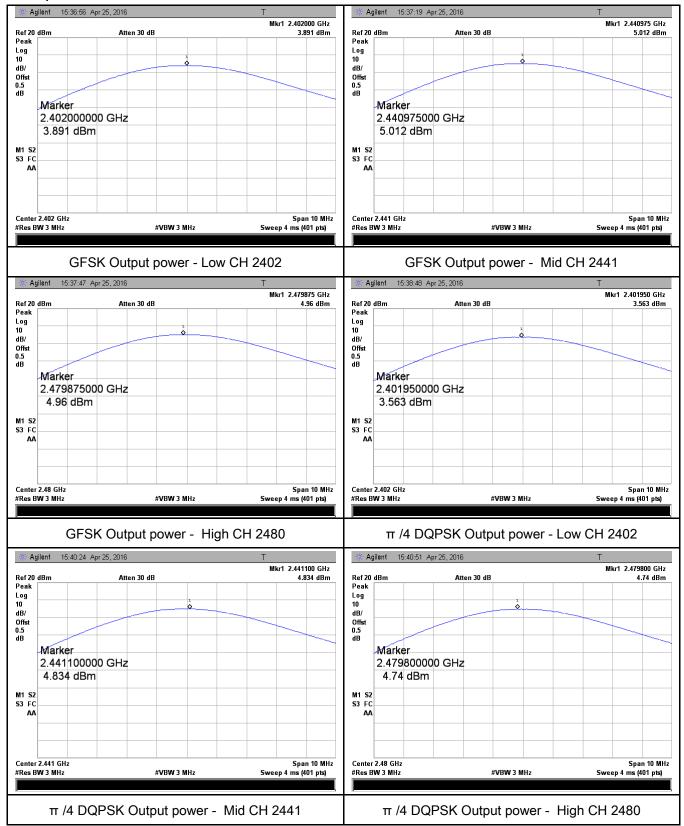



Test Report	16070658-FCC-R2
Page	21 of 59

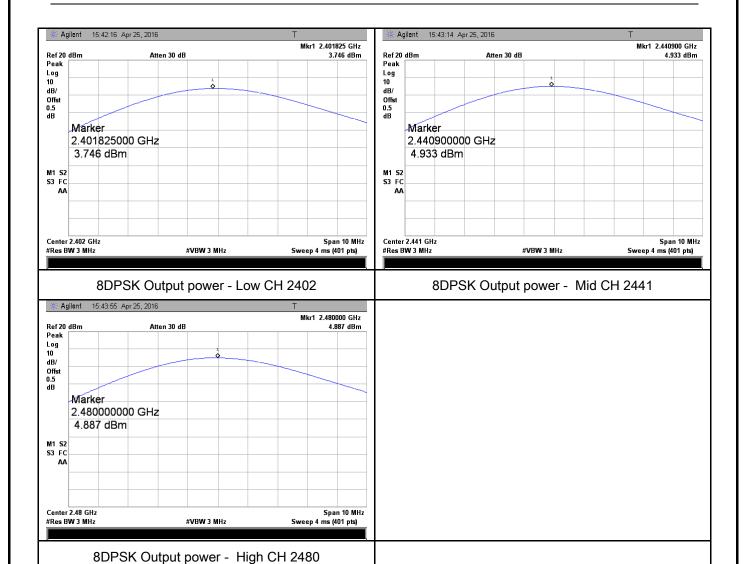



Test Report	16070658-FCC-R2
Page	22 of 59

6.5 Number of Hopping Channel

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	April 25, 2016
Tested By :	Winnie Zhang

Requirement(s):						
Spec	Item	Requirement	Applicable			
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	V			
Test Setup						
	The tes	st follows FCC Public Notice DA 00-705 Measurement Gu	ıidelines.			
	Use the	e following spectrum analyzer settings:				
	The El	JT must have its hopping function enabled.				
	-	Span = the frequency band of operation				
	-	- RBW ≥ 1% of the span				
	- VBW ≥ RBW					
Test	-	Sweep = auto				
Procedure	-	- Detector function = peak				
	-	- Trace = max hold				
	-	Allow trace to fully stabilize.				
	-	It may prove necessary to break the span up to sections,	in order to			
	clearly show all of the hopping frequencies. The limit is specified					
		one of the subparagraphs of this Section. Submit this plot	:(s).			
Remark						
Result	Pas	s Fail				
Test Data	Yes	□ _{N/A}				
Test Plot	Yes (See	e below) N/A				




Test Report	16070658-FCC-R2
Page	23 of 59

Number of Hopping Channel measurement result

Туре	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	π /4 DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots

Number of Hopping Channels measurement result

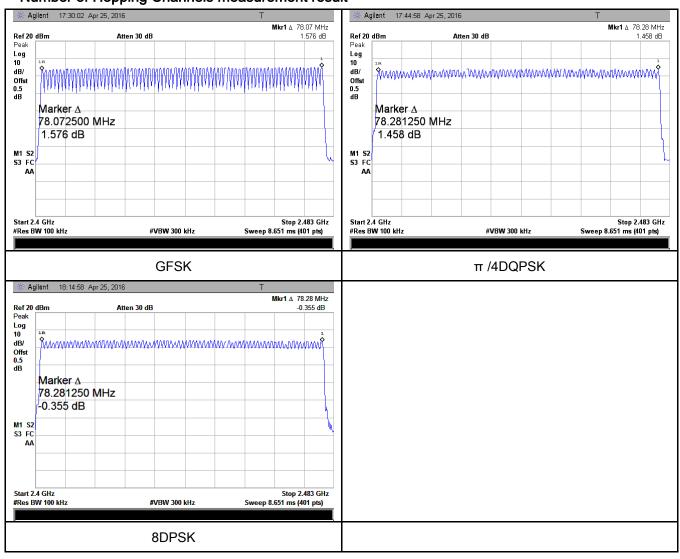



Test Report	16070658-FCC-R2
Page	24 of 59

6.6 Time of Occupancy (Dwell Time)

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	April 25, 2016
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable		
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	V		
Test Setup					
Test	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW				
Procedure	 Sweep = as necessary to capture the entire dwell time per hopping channel Detector function = peak Trace = max hold use the marker-delta function to determine the dwell time 				
Remark					
Result	Pas	s Fail			

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report	16070658-FCC-R2
Page	25 of 59

Dwell Time measurement result

Туре	Modulation	СН	Pulse Width	Dwell Time	Limit	Result
- 71-			(ms)	(ms)	(ms)	
		Low	2.875	306.667	400	Pass
	GFSK	Mid	2.875	306.667	400	Pass
			2.850	304.000	400	Pass
	π /4 DQPSK	Low	2.850	304.000	400	Pass
Dwell Time		Mid	2.875	306.667	400	Pass
		High	2.850	304.000	400	Pass
		Low	2.850	304.000	400	Pass
	8-DPSK	Mid	2.875	306.667	400	Pass
		High	2.875	306.667	400	Pass
Note: Dwell time - Dules Time (res) v (4600 + 6 + 70) v 24.6						


Note: Dwell time=Pulse Time (ms) \times (1600 ÷ 6 ÷ 79) \times 31.6



Test Report	16070658-FCC-R2
Page	26 of 59


Test Plots

Dwell Time measurement result

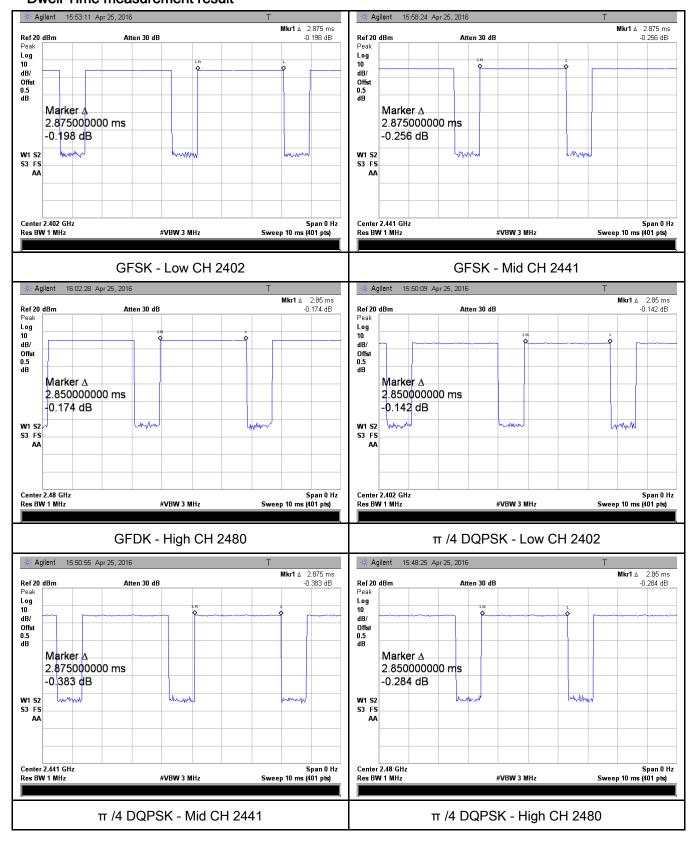



Test Report	16070658-FCC-R2
Page	27 of 59

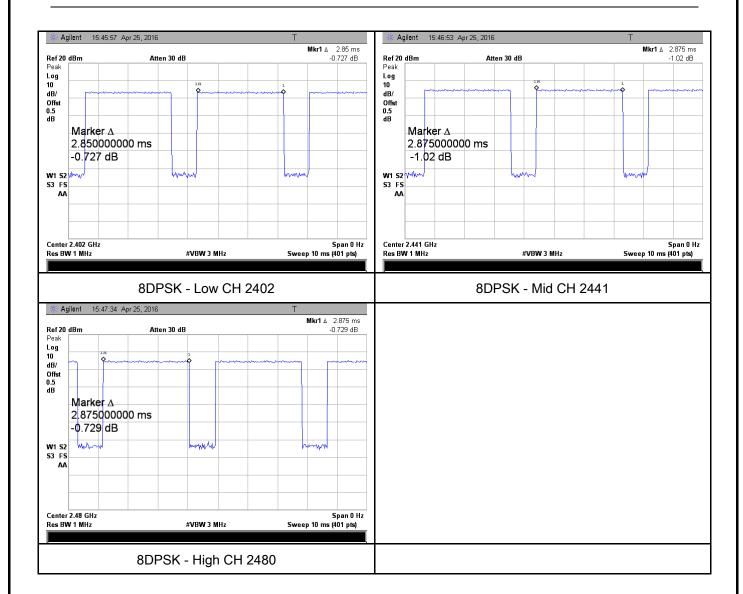



Test Report	16070658-FCC-R2
Page	28 of 59

6.7 Band Edge

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1005mbar
Test date :	May 05, 2016
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	\
Test Setup	Ant. Tower Support Units Ground Plane Test Receiver		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,		



Test Report	16070658-FCC-R2
Page	29 of 59


	and make sure the instrument is operated in its linear range.
	- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a
	convenient frequency span including 100kHz bandwidth from band edge, check
	the emission of EUT, if pass then set Spectrum Analyzer as below:
	a. The resolution bandwidth and video bandwidth of test receiver/spectrum
	analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
	b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and
	video bandwidth is 3MHz with Peak detection for Peak measurement at
	frequency above 1GHz.
	c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the
	video bandwidth is 10Hz with Peak detection for Average Measurement as
	below at frequency above 1GHz.
	4. Measure the highest amplitude appearing on spectral display and set it as a
	reference level. Plot the graph with marking the highest point and edge
	frequency.
	- 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	Pass Fail
Test Data	es N/A
Test Plot	es (See below)



Test Report	16070658-FCC-R2
Page	30 of 59


Test Plots

GFSK Mode:

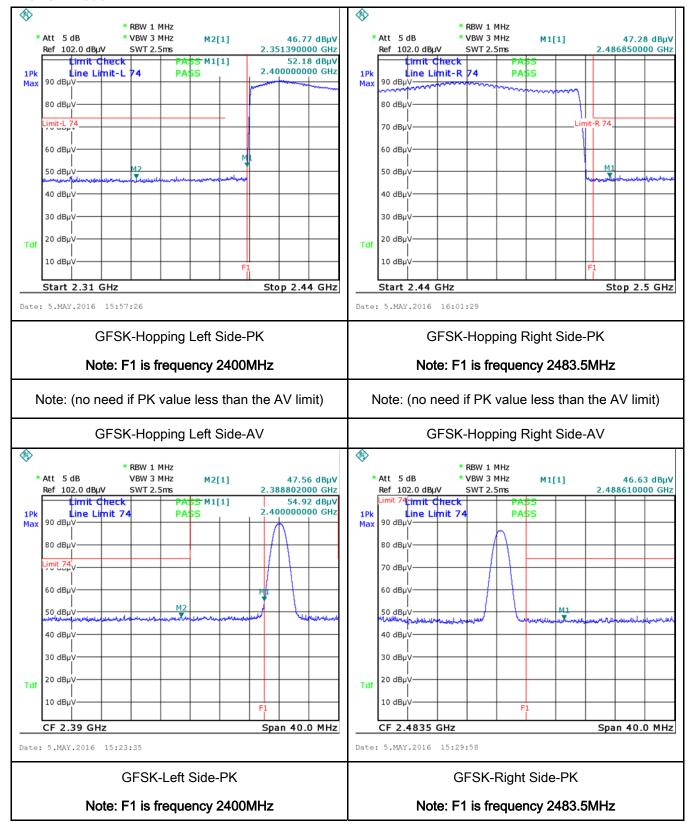




Test Report	16070658-FCC-R2
Page	31 of 59

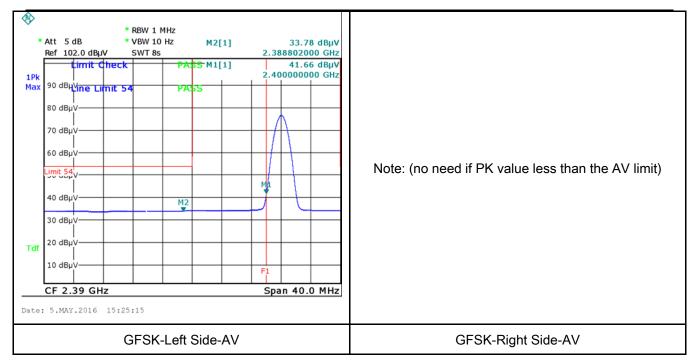




Test Report	16070658-FCC-R2	
Page	32 of 59	

π /4 DQPSK Mode:

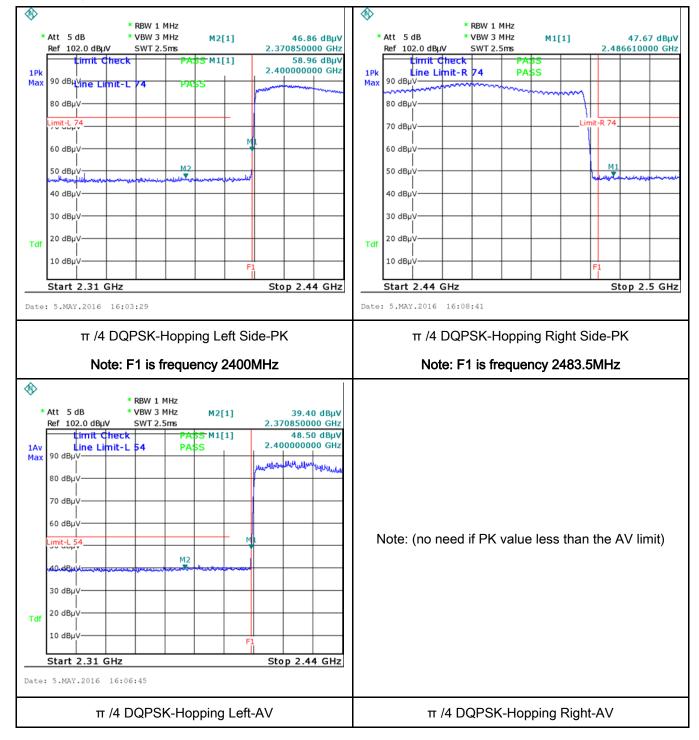




Test Report	16070658-FCC-R2	
Page	33 of 59	

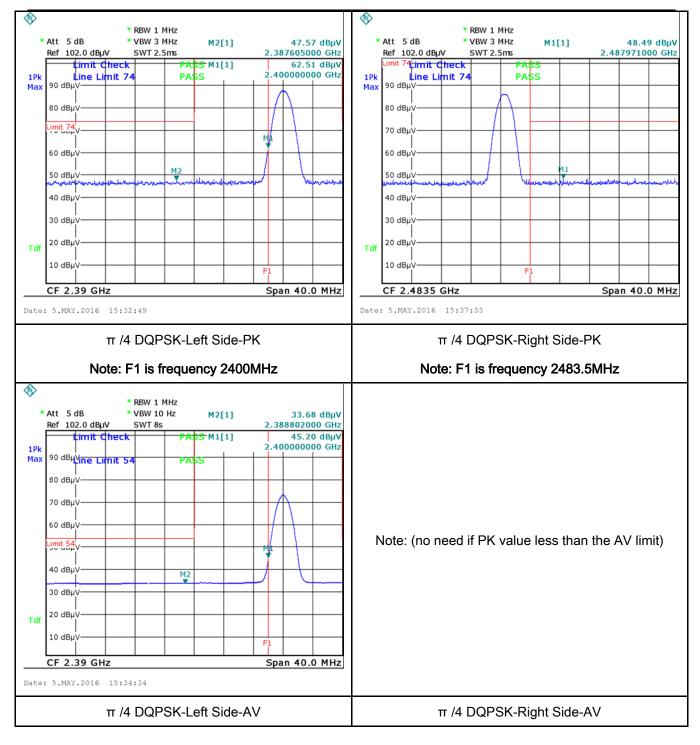




Test Report	16070658-FCC-R2	
Page	34 of 59	

8-DPSK Mode:

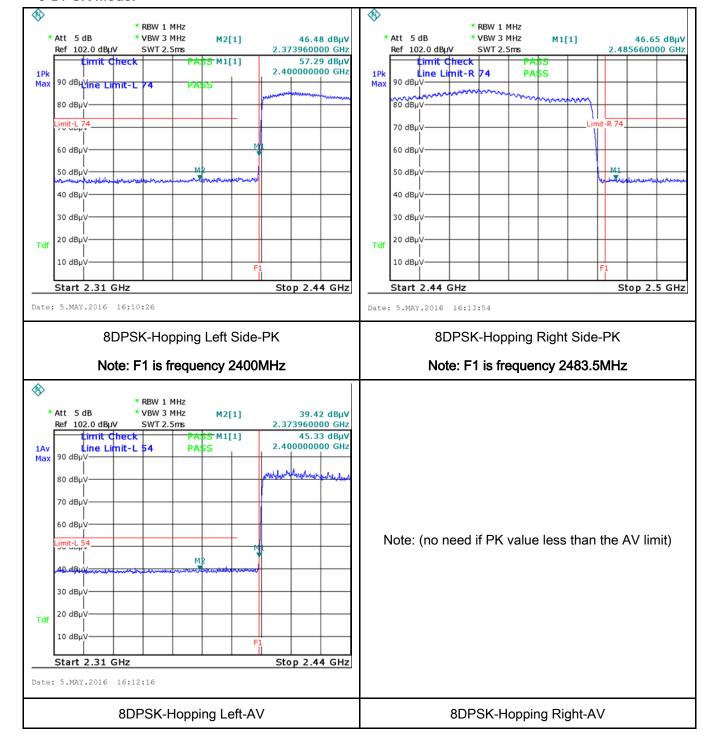



Test Report	16070658-FCC-R2	
Page	35 of 59	

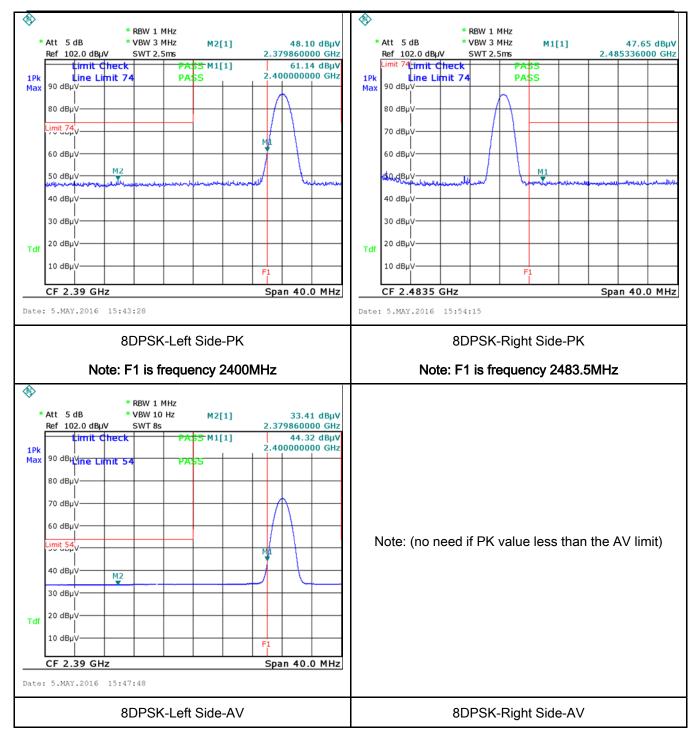



Test Report	16070658-FCC-R2	
Page	36 of 59	

6.8 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1003mbar
Test date :	May 03, 2016
Tested By:	Winnie Zhang

Requirement(s):

Spec	Item	Requirement			Applicable	
47CFR§15. 207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges. Frequency ranges Limit (dBµV) QP Average				
		0.15 ~ 0.5	66 – 56	56 – 46		
		0.5 ~ 5	56	46		
		5 ~ 30	60	50		
Test Setup	Vertical Ground Reference Plane Test Receiver Horizontal Ground Reference Plane					
	Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.					
Procedure	 The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. 					
;		The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-lo				



Test Report	16070658-FCC-R2
Page	37 of 59


	coaxial cable.
	4. All other supporting equipment were powered separately from another main supply.
	5. The EUT was switched on and allowed to warm up to its normal operating condition.
	6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power)
	over the required frequency range using an EMI test receiver.
	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the
	selected frequencies and the necessary measurements made with a receiver bandwidth
	setting of 10 kHz.
	8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	Pass Pail

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report	16070658-FCC-R2
Page	38 of 59

Bluetooth Mode	est Mode:
----------------	-----------

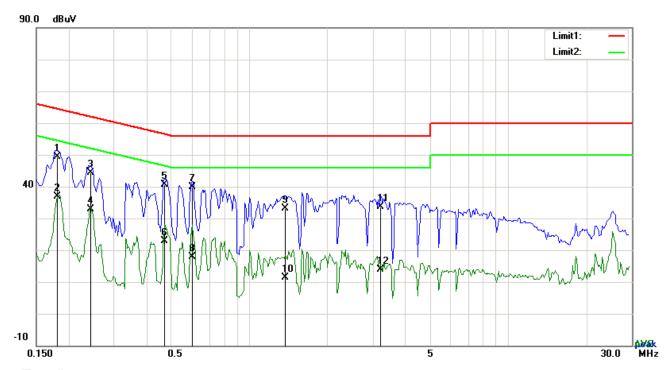


Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1812	39.47	QP	10.03	49.50	64.43	-14.93
2	L1	0.1812	26.74	AVG	10.03	36.77	54.43	-17.66
3	L1	0.2436	34.45	QP	10.03	44.48	61.97	-17.49
4	L1	0.2436	22.96	AVG	10.03	32.99	51.97	-18.98
5	L1	0.4698	30.52	QP	10.03	40.55	56.52	-15.97
6	L1	0.4698	12.95	AVG	10.03	22.98	46.52	-23.54
7	L1	0.6024	29.88	QP	10.03	39.91	56.00	-16.09
8	L1	0.6024	7.86	AVG	10.03	17.89	46.00	-28.11
9	L1	1.3746	23.11	QP	10.03	33.14	56.00	-22.86
10	L1	1.3746	1.40	AVG	10.03	11.43	46.00	-34.57
11	L1	3.2145	23.63	QP	10.06	33.69	56.00	-22.31
12	L1	3.2145	3.91	AVG	10.06	13.97	46.00	-32.03



Test Report	16070658-FCC-R2
Page	39 of 59

Test Mode:	Bluetooth Mode	
------------	----------------	--

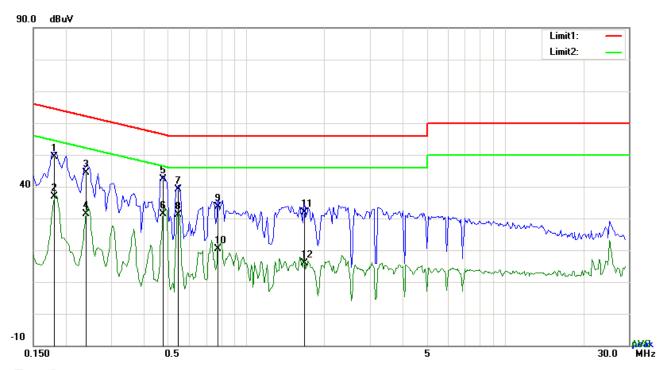


Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1812	39.40	QP	10.02	49.42	64.43	-15.01
2	N	0.1812	26.86	AVG	10.02	36.88	54.43	-17.55
3	N	0.2397	34.24	QP	10.02	44.26	62.11	-17.85
4	N	0.2397	21.33	AVG	10.02	31.35	52.11	-20.76
5	N	0.4776	32.28	QP	10.02	42.30	56.38	-14.08
6	N	0.4776	21.38	AVG	10.02	31.40	46.38	-14.98
7	N	0.5439	29.22	QP	10.02	39.24	56.00	-16.76
8	N	0.5439	21.19	AVG	10.02	31.21	46.00	-14.79
9	N	0.7779	23.70	QP	10.03	33.73	56.00	-22.27
10	N	0.7779	10.46	AVG	10.03	20.49	46.00	-25.51
11	N	1.6749	21.90	QP	10.04	31.94	56.00	-24.06
12	N	1.6749	5.88	AVG	10.04	15.92	46.00	-30.08



Test Report	16070658-FCC-R2
Page	40 of 59

Test Mode:

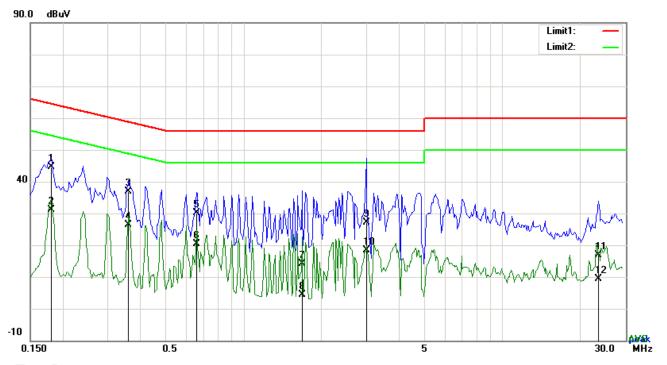


Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1812	34.69	QP	10.03	44.72	64.43	-19.71
2	L1	0.1812	21.13	AVG	10.03	31.16	54.43	-23.27
3	L1	0.3606	26.75	QP	10.03	36.78	58.71	-21.93
4	L1	0.3606	16.27	AVG	10.03	26.30	48.71	-22.41
5	L1	0.6609	19.98	QP	10.03	30.01	56.00	-25.99
6	L1	0.6609	10.30	AVG	10.03	20.33	46.00	-25.67
7	L1	1.6827	4.11	QP	10.04	14.15	56.00	-41.85
8	L1	1.6827	-5.54	AVG	10.04	4.50	46.00	-41.50
9	L1	2.9853	17.16	QP	10.05	27.21	56.00	-28.79
10	L1	2.9853	8.31	AVG	10.05	18.36	46.00	-27.64
11	L1	23.5569	6.47	QP	10.37	16.84	60.00	-43.16
12	L1	23.5569	-0.87	AVG	10.37	9.50	50.00	-40.50



Test Report	16070658-FCC-R2
Page	41 of 59

Test Mode:	Bluetooth Mode
	1

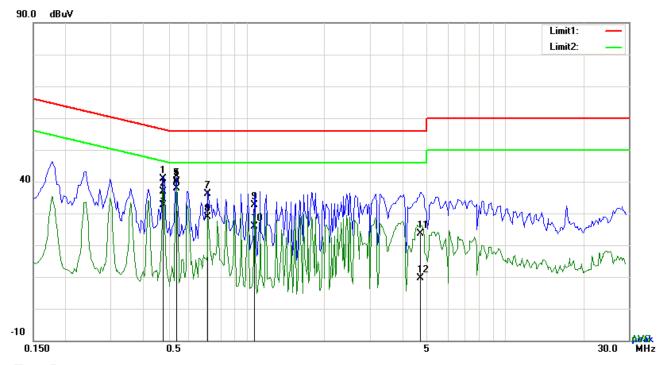

Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)	(dBuV)		(dBuV)	(dBuV)	(dB)
1	N	0.4776	30.87	QP	10.02	40.89	56.38	-15.49
2	N	0.4776	26.90	AVG	10.02	36.92	46.38	-9.46
3	N	0.4776	22.70	AVG	10.02	32.72	46.38	-13.66
4	N	0.5361	29.91	QP	10.02	39.93	56.00	-16.07
5	N	0.5361	30.13	QP	10.02	40.15	56.00	-15.85
6	N	0.5361	27.89	AVG	10.02	37.91	46.00	-8.09
7	N	0.7116	26.04	QP	10.02	36.06	56.00	-19.94
8	N	0.7116	18.90	AVG	10.02	28.92	46.00	-17.08
9	N	1.0743	22.66	QP	10.03	32.69	56.00	-23.31
10	N	1.0743	15.87	AVG	10.03	25.90	46.00	-20.10
11	N	4.7121	13.53	QP	10.07	23.60	56.00	-32.40
12	N	4.7121	-0.33	AVG	10.07	9.74	46.00	-36.26



Test Report	16070658-FCC-R2
Page	42 of 59

6.9 Radiated Spurious Emissions

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	April 25, 2016
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Requirement Applicable					
47CFR§15. 205, §15.209, §15.247(d)	a)	Except higher limit as specified elser emissions from the low-power radio-exceed the field strength levels specified elser the level of any unwanted emissions the fundamental emission. The tighteedges Frequency range (MHz) 30 - 88 88 - 216	V					
		216 960 Above 960	200 500					
Test Setup		Ant. Tower Support Units Turn Table Ground Plane Test Receiver						
Procedure	1.	condition.						



Test Report	16070658-FCC-R2
Page	43 of 59

		a.	Vertical or horizontal polarization (whichever gave the higher emission
			level over a full rotation of the EUT) was chosen.
		b.	The EUT was then rotated to the direction that gave the maximum
			emission.
		C.	Finally, the antenna height was adjusted to the height that gave the
			maximum emission.
	3.	The re	esolution bandwidth and video bandwidth of test receiver/spectrum analyzer is
		120 kl	Hz for Quasiy Peak detection at frequency below 1GHz.
	4.	The re	solution bandwidth of test receiver/spectrum analyzer is 1MHz and video
		bandw	ridth is 3MHz with Peak detection for Peak measurement at frequency above
		1GHz.	
		The re	esolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video
		bandv	vidth is 10Hz with Peak detection for Average Measurement as below at
		freque	ency above 1GHz.
	5.	Steps	2 and 3 were repeated for the next frequency point, until all selected
		freque	ency points were measured.
Remark			
Result	P	ass	■ Fail
	7		
Took Doto	- N/00		N1/A


Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report	16070658-FCC-R2
Page	44 of 59

Test Mode: Bluetooth Mode

Below 1GHz

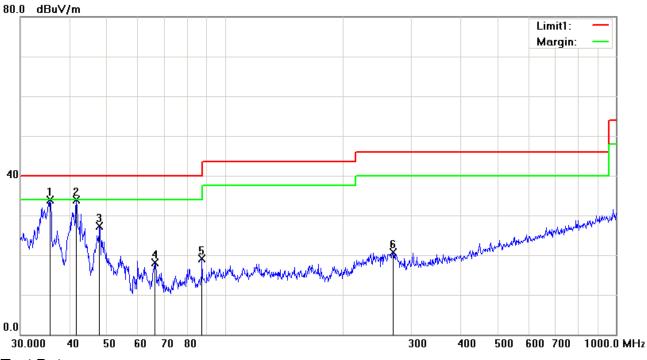

Test Data


Horizontal Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	Ι	35.7491	38.36	peak	-4.49	33.87	40.00	-6.13	100	198
2	Н	41.7130	42.57	peak	-8.73	33.84	40.00	-6.16	100	307
3	Н	47.8260	39.45	peak	-12.20	27.25	40.00	-12.75	100	186
4	Н	66.2662	32.00	peak	-13.87	18.13	40.00	-21.87	100	123
5	Н	87.4177	32.61	peak	-13.44	19.17	40.00	-20.83	100	359
6	Н	269.4284	29.02	peak	-8.31	20.71	46.00	-25.29	100	89



Test Report	16070658-FCC-R2
Page	45 of 59

Below 1GHz

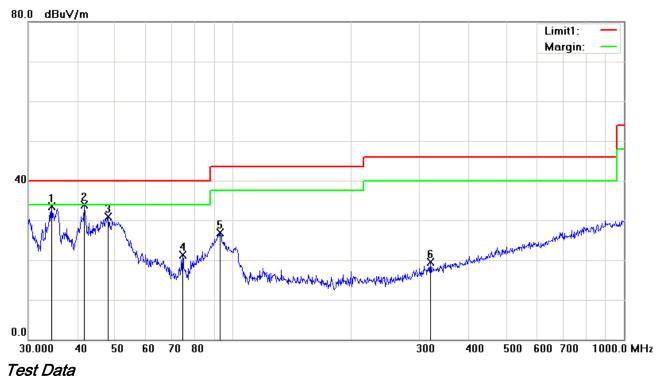

Vertical Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	>	34.3964	37.07	peak	-3.50	33.57	40.00	-6.43	100	143
2	٧	41.7130	42.58	peak	-8.73	33.85	40.00	-6.15	100	233
3	٧	47.9940	43.21	peak	-12.28	30.93	40.00	-9.07	100	79
4	٧	74.3955	35.09	peak	-13.73	21.36	40.00	-18.64	100	15
5	V	92.7872	39.54	peak	-12.68	26.86	43.50	-16.64	100	161
6	V	319.9370	25.80	peak	-6.32	19.48	46.00	-26.52	100	120



Test Report	16070658-FCC-R2
Page	46 of 59

Above 1GHz

Test Mode: Transmitting Mode

Mode: GFSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804	38.65	AV	V	33.83	6.86	31.72	47.62	54	-6.38
4804	38.39	AV	Н	33.83	6.86	31.72	47.36	54	-6.64
4804	48.33	PK	V	33.83	6.86	31.72	57.3	74	-16.7
4804	48.17	PK	Н	33.83	6.86	31.72	57.14	74	-16.86
2238	42.04	AV	V	31.15	5.52	31.98	46.73	54	-7.27
2238	41.86	AV	Н	31.15	5.52	31.98	46.55	54	-7.45
2238	50.21	PK	V	31.15	5.52	31.98	54.9	74	-19.1
2238	50.34	PK	Н	31.15	5.52	31.98	55.03	74	-18.97

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4882	38.52	AV	V	33.86	6.82	31.82	47.38	54	-6.62
4882	38.66	AV	Н	33.86	6.82	31.82	47.52	54	-6.48
4882	48.29	PK	V	33.86	6.82	31.82	57.15	74	-16.85
4882	48.05	PK	Н	33.86	6.82	31.82	56.91	74	-17.09
2234	42.11	AV	V	31.16	5.61	31.98	46.9	54	-7.1
2234	41.97	AV	Н	31.16	5.61	31.98	46.76	54	-7.24
2234	50.33	PK	V	31.16	5.61	31.98	55.12	74	-18.88
2234	50.48	PK	Н	31.16	5.61	31.98	55.27	74	-18.73



Test Report	16070658-FCC-R2
Page	47 of 59

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4960	38.48	AV	V	33.9	6.76	31.92	47.22	54	-6.78
4960	38.31	AV	Н	33.9	6.76	31.92	47.05	54	-6.95
4960	48.56	PK	٧	33.9	6.76	31.92	57.3	74	-16.7
4960	48.22	PK	Н	33.9	6.76	31.92	56.96	74	-17.04
2231	42.37	AV	٧	31.05	5.61	32.03	47	54	-7
2231	42.13	AV	Н	31.05	5.61	32.03	46.76	54	-7.24
2231	50.61	PK	V	31.05	5.61	32.03	55.24	74	-18.76
2231	50.38	PK	Н	31.05	5.61	32.03	55.01	74	-18.99

Note:

^{1,} The testing has been conformed to 10*2480MHz=24,800MHz 2, All other emissions more than 30 dB below the limit



Test Report	16070658-FCC-R2
Page	48 of 59

Annex A. TEST INSTRUMENT

Instrument	Model	Serial#	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<u> </u>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<u> </u>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	~
LISN	ISN T800	34373	09/25/2015	09/24/2016	~
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<u>\</u>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	V
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	~
Power Splitter	1#	1#	09/01/2015	08/31/2016	<u><</u>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<u><</u>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	~
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	~
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	V
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	V
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	V
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	N.
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	V



Test Report	16070658-FCC-R2
Page	49 of 59

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo





Test Report	16070658-FCC-R2
Page	50 of 59



EUT - Top View

EUT - Bottom View



EUT - Left View



EUT - Right View




Test Report	16070658-FCC-R2
Page	51 of 59

Annex B.ii. Photograph: EUT Internal Photo





Cover Off - Top View 1











Battery - Rear View

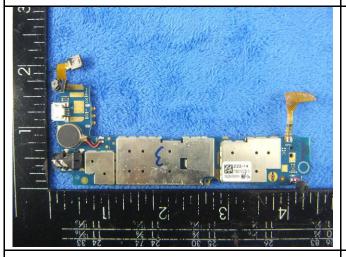


Mainboard with Shielding - Front View

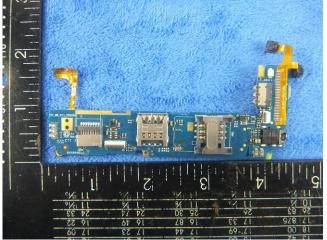

Mainboard with Shielding - Rear View




Test Report	16070658-FCC-R2
Page	52 of 59

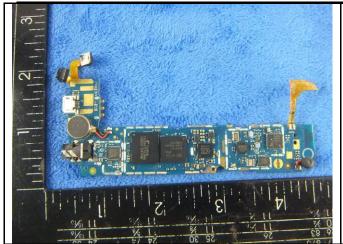

Mainboard without Shielding - Front View

LCD - Front View

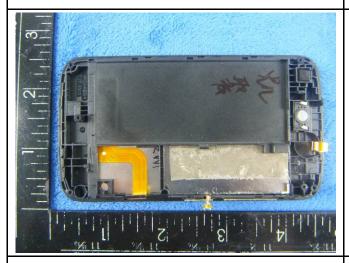



LCD - Rear View

GSM/PCS/UMTS-FDD Antenna View



WIFI/BT/BLE/GPS - Antenna View



Test Report	16070658-FCC-R2
Page	53 of 59

Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View



Radiated Spurious Emissions Test Setup Below 1GHz

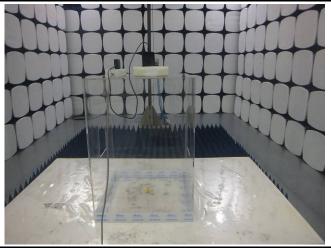

Radiated Spurious Emissions Test Setup Above 1GHz




Test Report	16070658-FCC-R2
Page	54 of 59

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

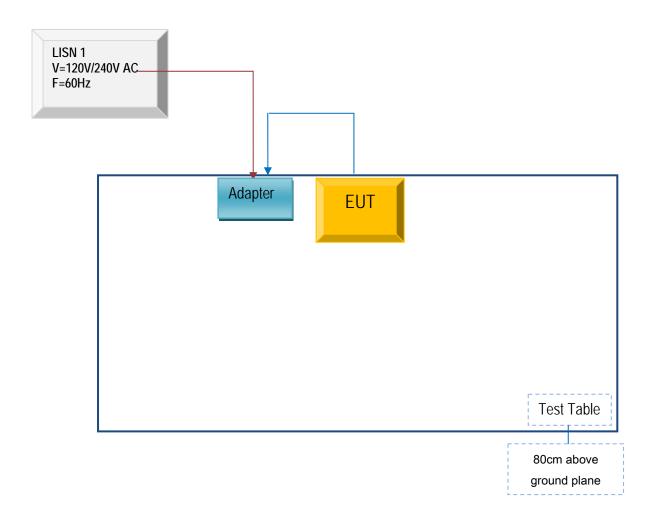



Test Report	16070658-FCC-R2
Page	55 of 59


Block Configuration Diagram for Radiated Emissions (Below 1GHz).

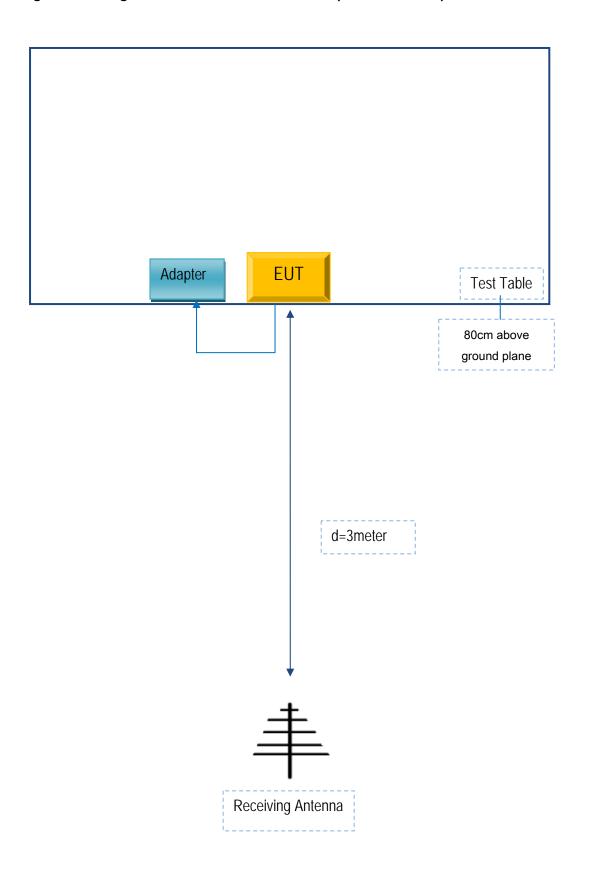



Test Report	16070658-FCC-R2
Page	56 of 59

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

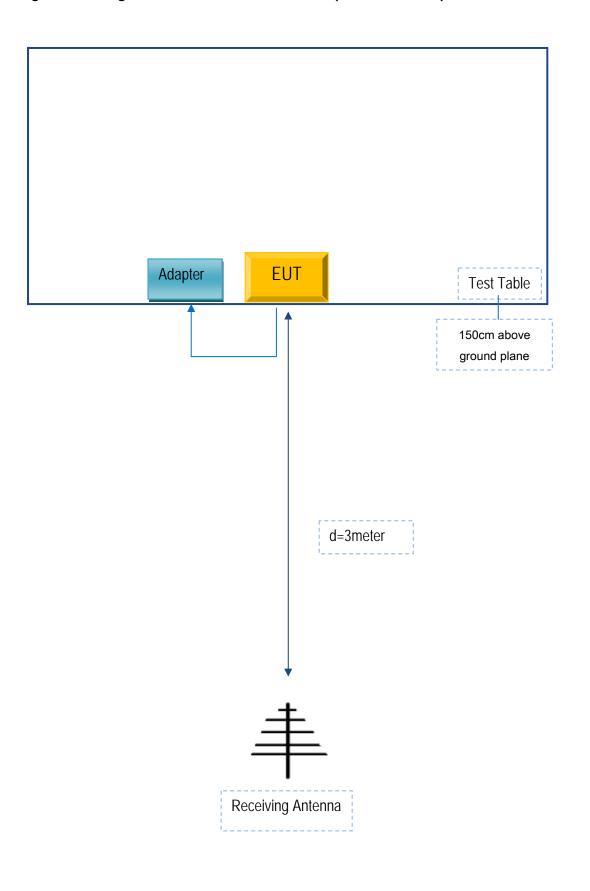



Test Report	16070658-FCC-R2
Page	57 of 59

Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
SMT TELECOMM HK LIMITED	Adapter	PC325	P010253

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	P010253



Test Report	16070658-FCC-R2
Page	58 of 59

Annex D. User Manual / Block Diagram / Schematics / Partlist

N/A



Test Report	16070658-FCC-R2
Page	59 of 59

Annex E. DECLARATION OF SIMILARITY

N/A