

RF TEST REPORT



Report No.: 16070720-FCC-R3

Supersede Report No.: N/A

Applicant	SMT TELECOMM HK LIMITED	
Product Name	Mobile Phone	
Model No.	X444	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	June 21 to July 20&22, 2016	
Issue Date	July 22, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Loren Luo	David Huang	
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	16070720-FCC-R3
Page	3 of 56

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 DTS (6 DB&20 DB) CHANNEL BANDWIDTH.....	10
6.3 MAXIMUM OUTPUT POWER	16
6.4 POWER SPECTRAL DENSITY.....	21
6.5 BAND-EDGE & UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS	25
6.6 AC POWER LINE CONDUCTED EMISSIONS.....	33
6.7 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND	39
ANNEX A. TEST INSTRUMENT.....	45
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	46
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	51
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	55
ANNEX E. DECLARATION OF SIMILARITY	56

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070720-FCC-R3	NONE	Original	July 12.2016
16070720-FCC-R3	V2	Changing the power of 802.11b and adding the plots of duty cycle.	July 20, 2016
16070720-FCC-R3	V3	Added the test data of the conducted method	July 22, 2016

2. Customer information

Applicant Name	SMT TELECOMM HK LIMITED
Applicant Add	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL
Manufacturer	SMT TELECOMM HK LIMITED
Manufacturer Add	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	X444
Serial Model:	N/A
Date EUT received:	June 20, 2016
Test Date(s):	June 21 to July 20&22, 2016
Equipment Category :	DTS
	GSM850: -1.5dBi
Antenna Gain:	PCS1900: -1.3dBi
	UMTS-FDD Band V: -1.5dBi
	UMTS-FDD Band II: -1.2dBi
	Bluetooth/BLE/WIFI: -2.5dBi
Antenna Type:	PIFA antenna
	GSM / GPRS: GMSK
Type of Modulation:	EGPRS: GMSK,8PSK
	UMTS-FDD: QPSK
	802.11b/g/n: DSSS, OFDM
	Bluetooth: GFSK, π /4DQPSK, 8DPSK
	BLE: GFSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz WIFI: 802.11b/g/n(20M): 2412-2462 MHz WIFI: 802.11n(40M): 2422-2452 MHz Bluetooth& BLE: 2402-2480 MHz

Max. Output Power:
802.11b: 9.16dBm
802.11g: 8.79dBm
802.11n(20M): 8.57dBm
802.11n(40M): 9.05dBm

Number of Channels:
GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V : 102CH
UMTS-FDD Band II : 277CH
WIFI :802.11b/g/n(20M): 11CH
WIFI :802.11n(40M): 7CH
Bluetooth: 79CH
BLE: 40CH

Port: Earphone Port, USB Port

Adapter:
Model:PC444
Input: AC 100-240V~50/60Hz;0.15A
Output: DC 5.0V,500mA
Input Power:
Battery:
Model:BPX444
Spec: 3.7V,1300mAh(4.81Wh)
Charge limited voltage: 4.2V

Trade Name : N/A

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: 2AIMEX444

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI, the gain is -2.5dBi .


A permanently attached PIFA antenna for GSM/PCS/UMTS, the gain is -1.5dBi for GSM850, -1.3dBi for PCS1900, -1.5dBi for UMTS-FDD Band V, -1.2dBi for UMTS-FDD Band II.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	July 08, 2016
Tested By :	Loren Luo

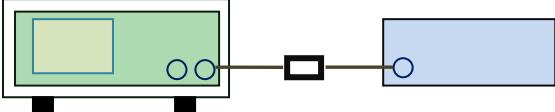Spec	Item	Requirement	Applicable
§ 15.247(a)(2) RSS Gen(4.6.1)	a)	6dB BW \geq 500kHz; 20dB BW \geq 500kHz;	<input checked="" type="checkbox"/>
	b)	99% BW: For FCC reference only; required by IC.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r03, 8.1 DTS bandwidth</p> <p><u>6dB bandwidth</u></p> <ol style="list-style-type: none"> Set RBW = 100 kHz. Set the video bandwidth (VBW) \geq $3 \times$ RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. <p><u>20dB bandwidth</u></p> <p>C63.10 Occupied Bandwidth (OBW=20dB bandwidth)</p> <ol style="list-style-type: none"> Set RBW = 1%-5% OBW. Set the video bandwidth (VBW) \geq $3 \times$ RBW. Set the span range between 2 times and 5 times of the OBW. Sweep time=Auto, Detector=PK, Trace=Max hold. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst- 		

	case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB levels with respect to the reference level.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Measurement result

Test mode	CH	Freq (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.07	16.69	≥ 0.5
	Mid	2437	10.09	16.33	≥ 0.5
	High	2462	10.06	16.68	≥ 0.5
802.11g	Low	2412	16.43	19.30	≥ 0.5
	Mid	2437	15.45	19.11	≥ 0.5
	High	2462	16.43	19.12	≥ 0.5
802.11n (20M)	Low	2412	17.62	19.54	≥ 0.5
	Mid	2437	17.63	19.48	≥ 0.5
	High	2462	17.62	19.43	≥ 0.5
802.11n (40M)	Low	2422	35.36	39.43	≥ 0.5
	Mid	2437	35.16	39.01	≥ 0.5
	High	2452	35.13	39.21	≥ 0.5



Test Plots

6dB Bandwidth measurement result

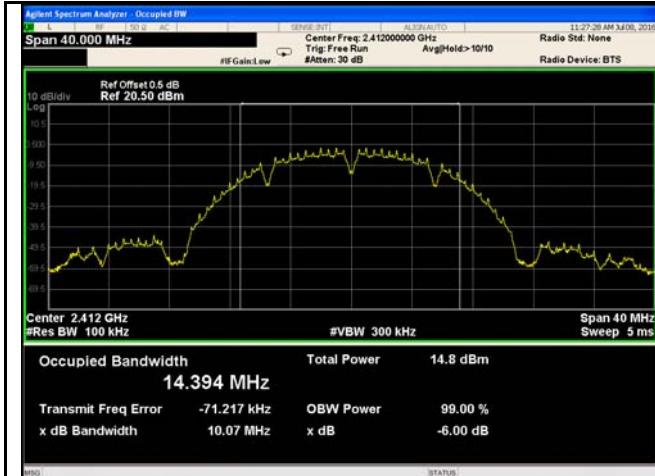



802.11b 6dB Bandwidth - Low CH 2412

802.11b 6dB Bandwidth - Mid CH 2437

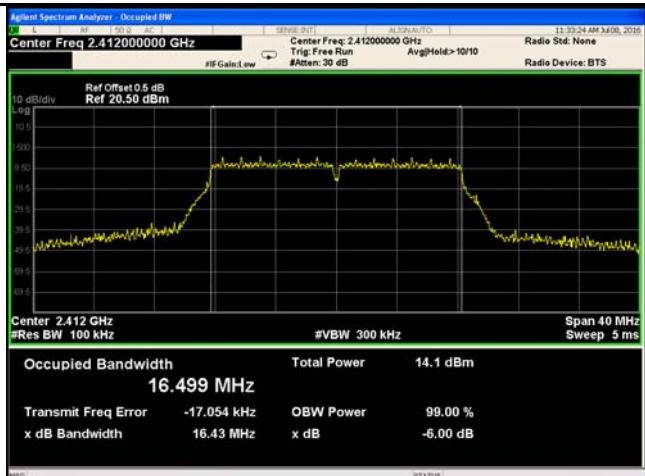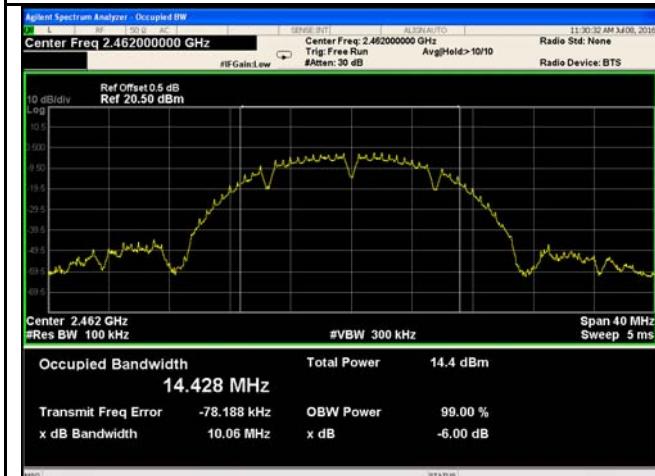

802.11b 6dB Bandwidth - High CH 2462



802.11q 6dB Bandwidth - Low CH 2412

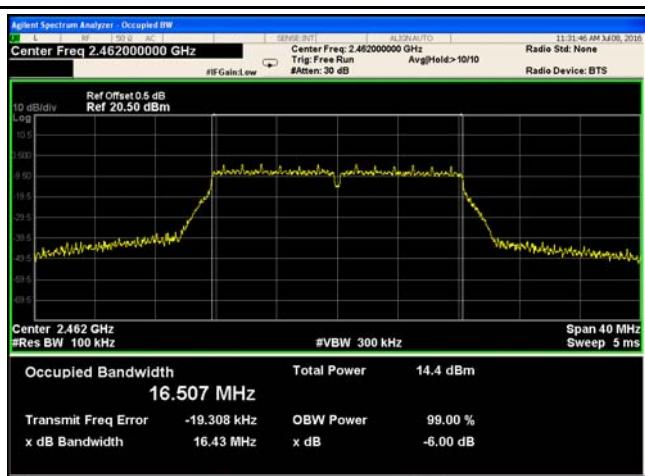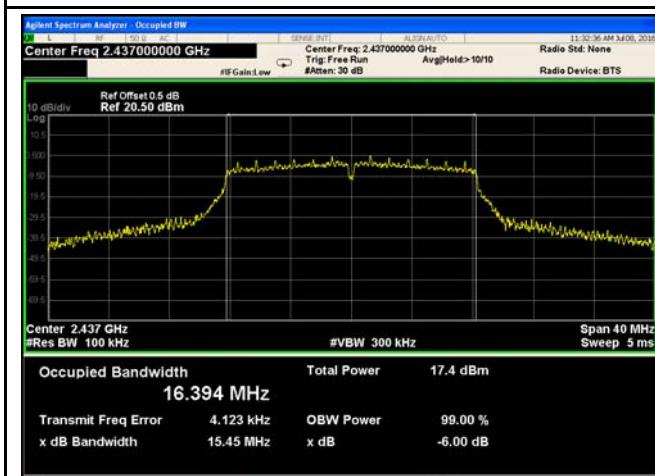

802.11g 6dB Bandwidth - Mid CH 2437



802.11g 6dB Bandwidth - High CH 2462

Test Report No.	16070720-FCC-R3
Page	13 of 56

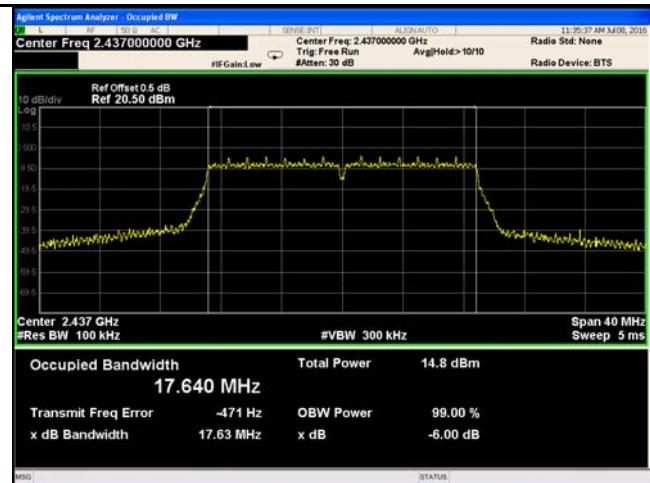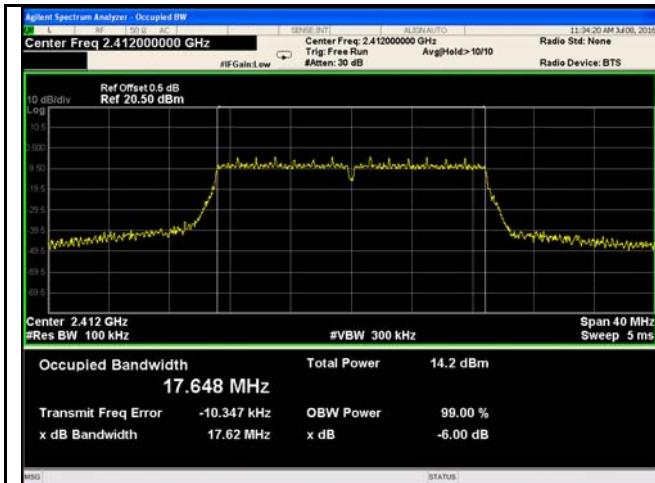



802.11n20 6dB Bandwidth - Low CH 2412

802.11n20 6dB Bandwidth - Mid CH 2437

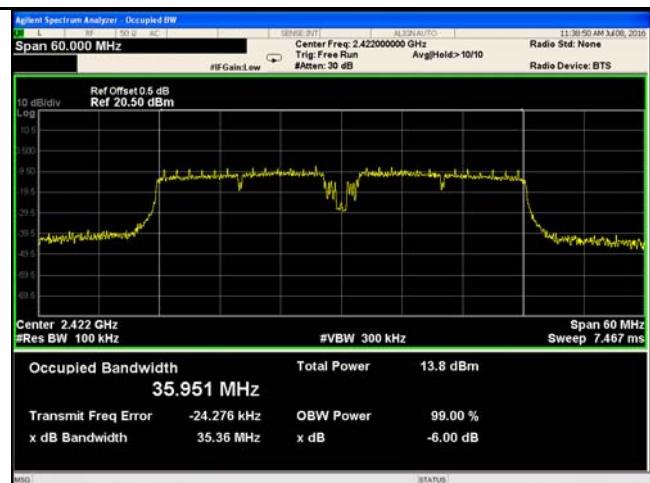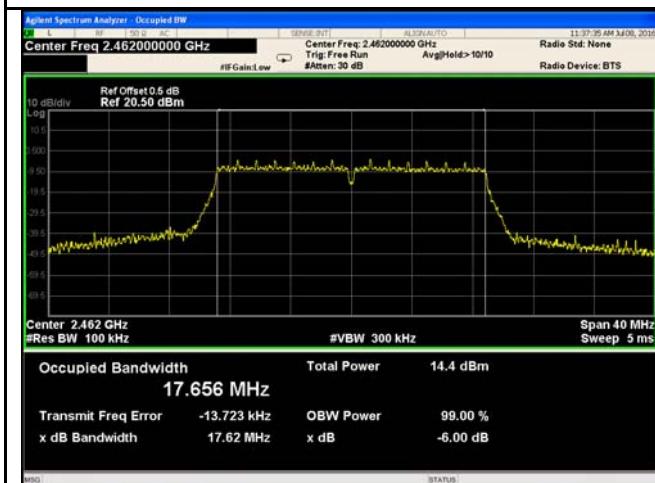

802.11n20 6dB Bandwidth - High CH 2462

802.11n40 6dB Bandwidth - Low CH 2422

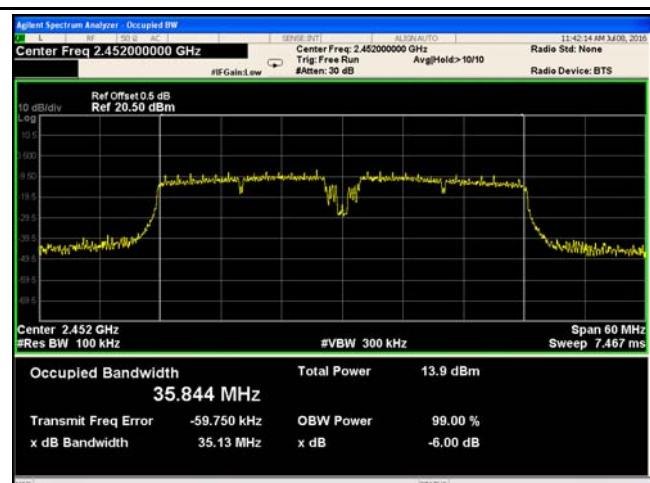
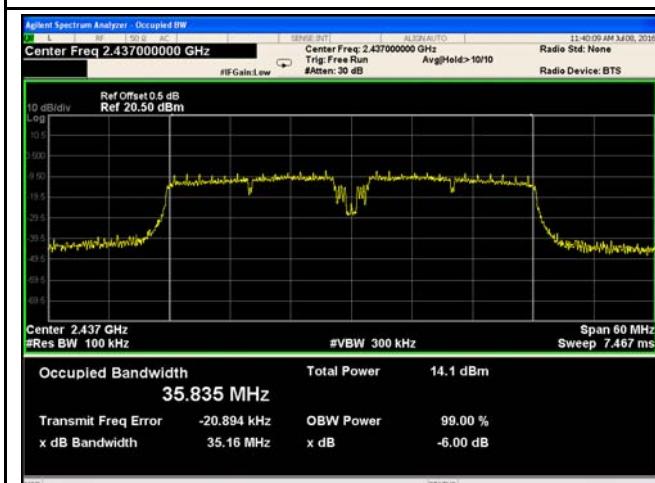


802.11n40 6dB Bandwidth - Mid CH 2437



802.11n40 6dB Bandwidth - High CH 2452

Test Report No.	16070720-FCC-R3
Page	14 of 56

20 dB Bandwidth measurement result

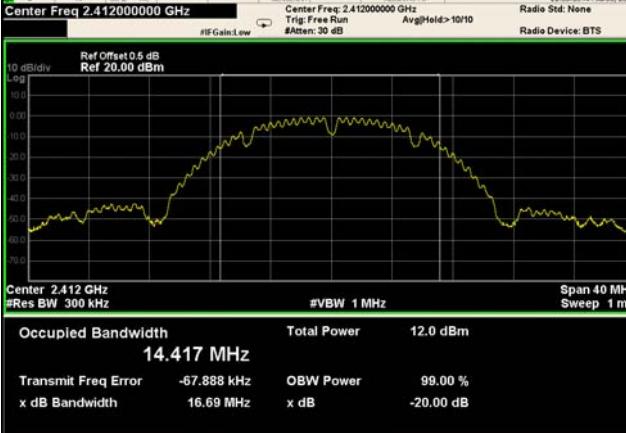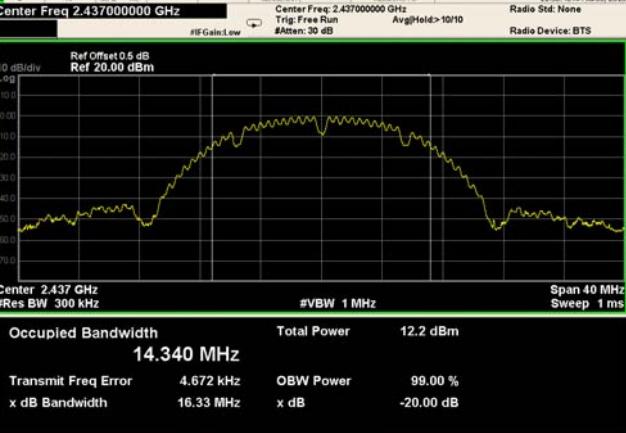
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center: 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth: 14.417 MHz</p> <p>Total Power: 12.0 dBm</p> <p>Transmit Freq Error: -67.888 kHz</p> <p>x dB Bandwidth: 16.69 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center: 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth: 14.340 MHz</p> <p>Total Power: 12.2 dBm</p> <p>Transmit Freq Error: 4.672 kHz</p> <p>x dB Bandwidth: 16.33 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>
<p>802.11b 20dB Bandwidth - Low CH 2412</p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center: 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth: 14.408 MHz</p> <p>Total Power: 11.9 dBm</p> <p>Transmit Freq Error: -80.782 kHz</p> <p>x dB Bandwidth: 16.68 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>	<p>802.11b 20dB Bandwidth - Mid CH 2437</p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center: 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth: 16.975 MHz</p> <p>Total Power: 15.2 dBm</p> <p>Transmit Freq Error: -13.190 kHz</p> <p>x dB Bandwidth: 19.30 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>
<p>802.11b 20dB Bandwidth - High CH 2462</p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center: 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth: 16.953 MHz</p> <p>Total Power: 15.5 dBm</p> <p>Transmit Freq Error: 2.695 kHz</p> <p>x dB Bandwidth: 19.11 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>	<p>802.11g 20dB Bandwidth - Low CH 2412</p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center: 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth: 16.957 MHz</p> <p>Total Power: 15.2 dBm</p> <p>Transmit Freq Error: -44.678 kHz</p> <p>x dB Bandwidth: 19.12 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>
<p>802.11g 20dB Bandwidth - Mid CH 2437</p>	<p>802.11g 20dB Bandwidth - High CH 2462</p>

Test Report No.	16070720-FCC-R3
Page	15 of 56

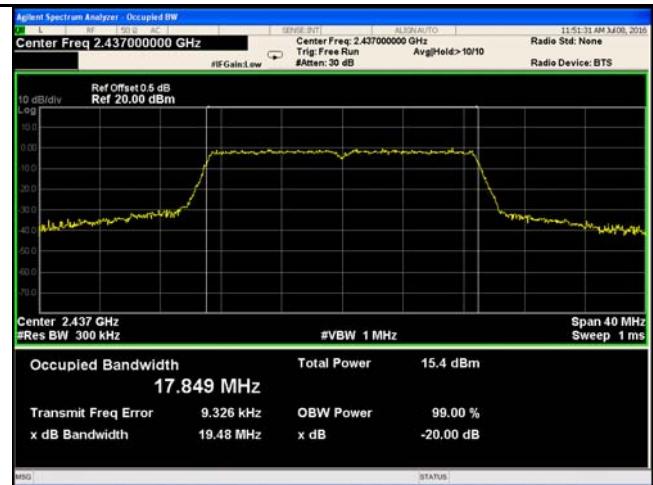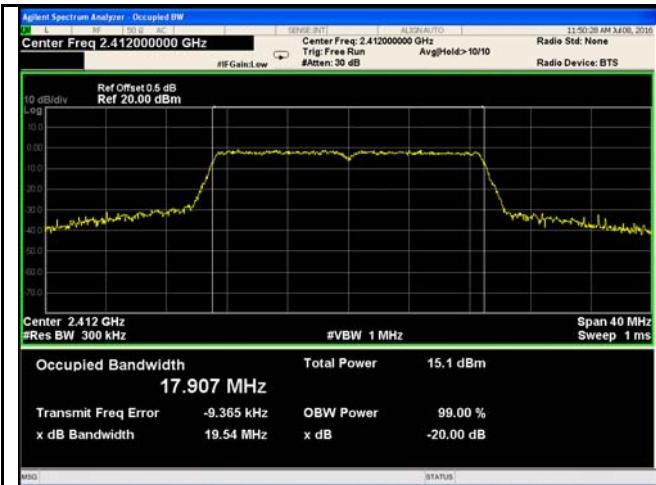



802.11n20 20dB Bandwidth - Low CH 2412

802.11n20 20dB Bandwidth - Mid CH 2437

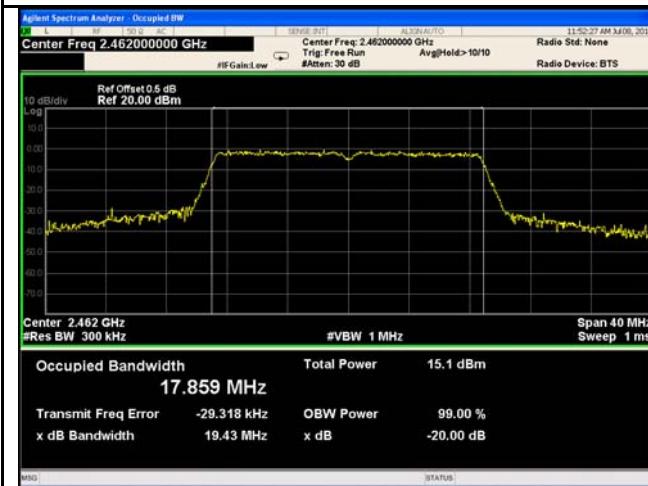

802.11n20 20dB Bandwidth - High CH 2462

802.11n40 20dB Bandwidth - Low CH 2422

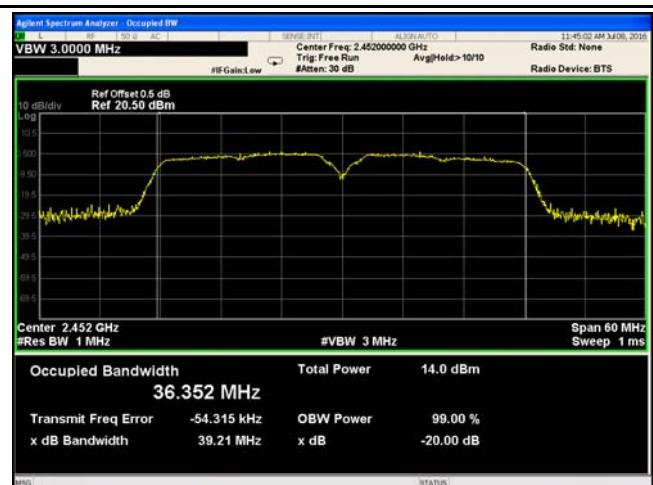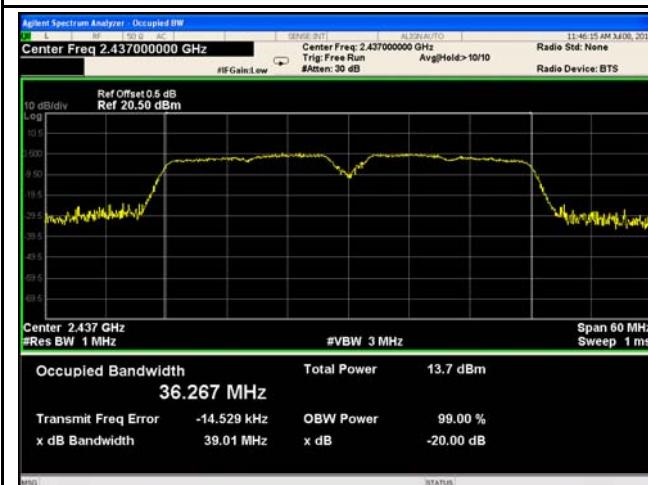


802.11n40 20dB Bandwidth - Mid CH 2437

802.11n40 20dB Bandwidth - High CH 2452

6.3 Maximum Output Power

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	July 08, 2016
Tested By :	Loren Luo

Requirement(s):

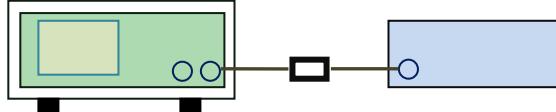Spec	Item	Requirement	Applicable
§15.247(b) (3), RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & < 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: \leq 1 Watt	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure		<p>558074 D01 DTS MEAS Guidance v03r03, 9.1.2 Integrated band power method</p> <p>Maximum output power measurement procedure</p> <ul style="list-style-type: none"> - a) Set span to at least 1.5 times the OBW. - b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz. - c) Set VBW \geq 3 x RBW. - d) Number of points in sweep \geq 2 x span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.) - e) Sweep time = auto. - f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. - g) If transmit duty cycle $<$ 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum 	

	<p>power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to " free run" .</p> <ul style="list-style-type: none"> - h) Trace average at least 100 traces in power averaging (i.e., RMS) mode. - i) Compute power by integrating the spectrum across the OBW of the signal using the instrument' s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Output Power measurement result

Type	Test mode	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output power	802.11b	Low	2412	8.66	30	Pass
		Mid	2437	9.16	30	Pass
		High	2462	9.13	30	Pass
	802.11g	Low	2412	8.79	30	Pass
		Mid	2437	8.76	30	Pass
		High	2462	8.59	30	Pass
	802.11n (20M)	Low	2412	8.35	30	Pass
		Mid	2437	8.57	30	Pass
		High	2462	8.35	30	Pass
	802.11n (40M)	Low	2422	8.63	30	Pass
		Mid	2437	9.05	30	Pass
		High	2452	8.42	30	Pass


Test Plots

The Average Power

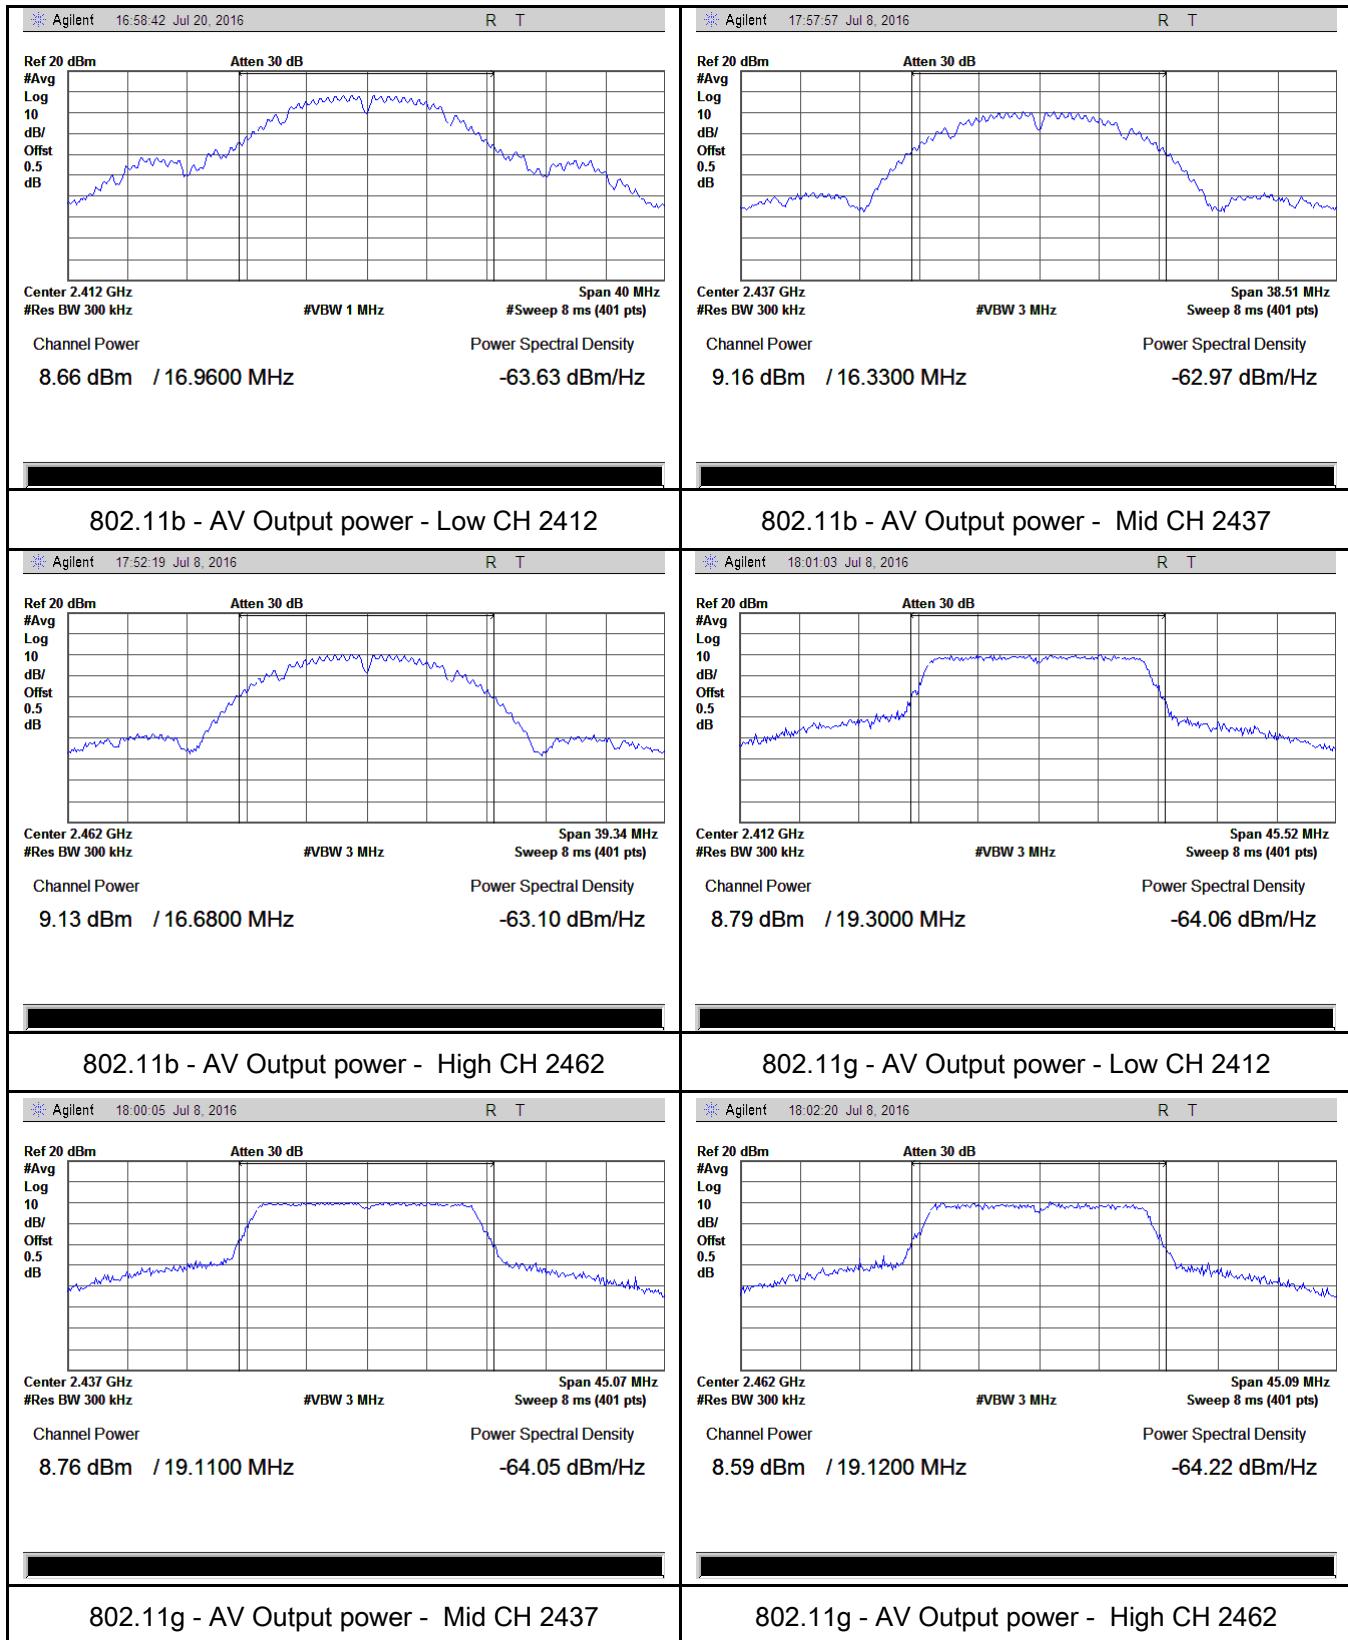

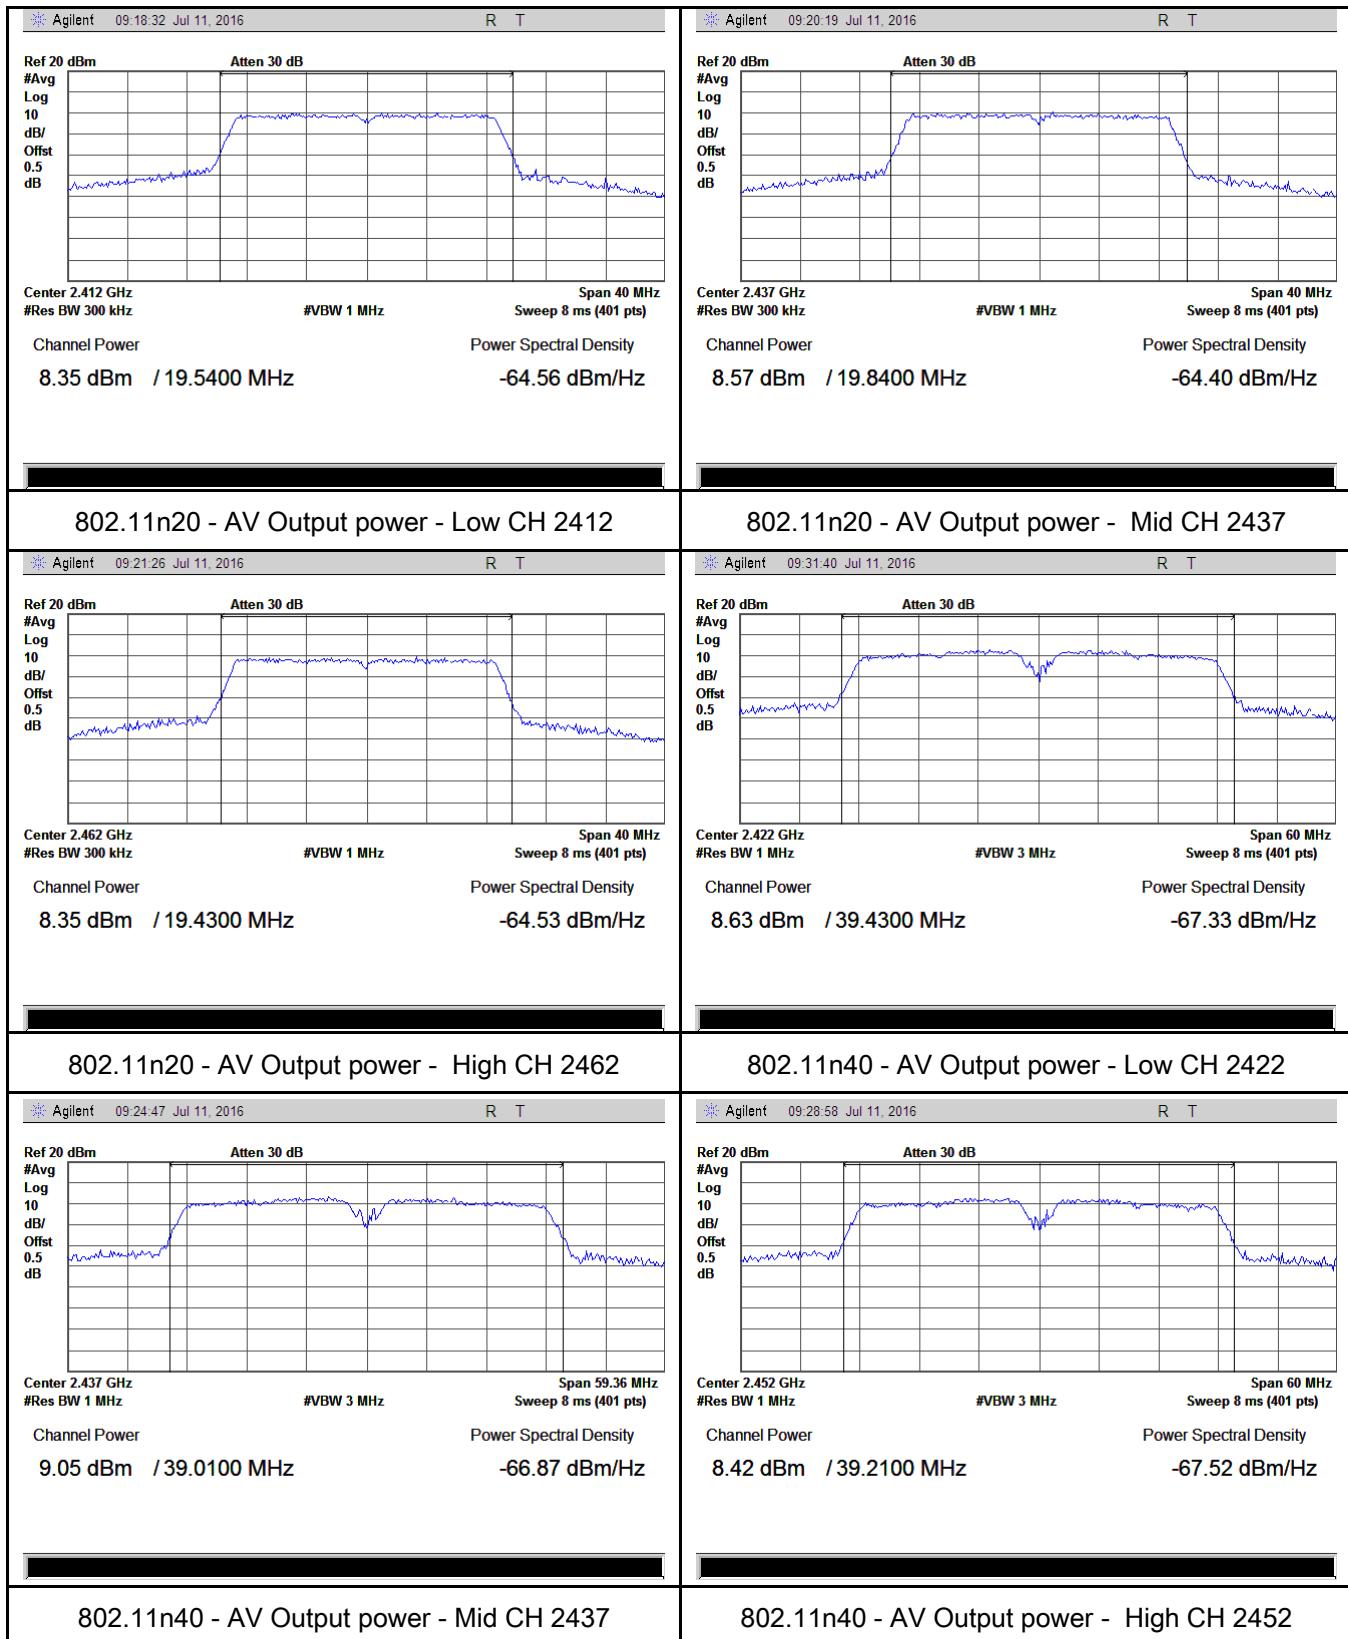


Duty cycle plots:

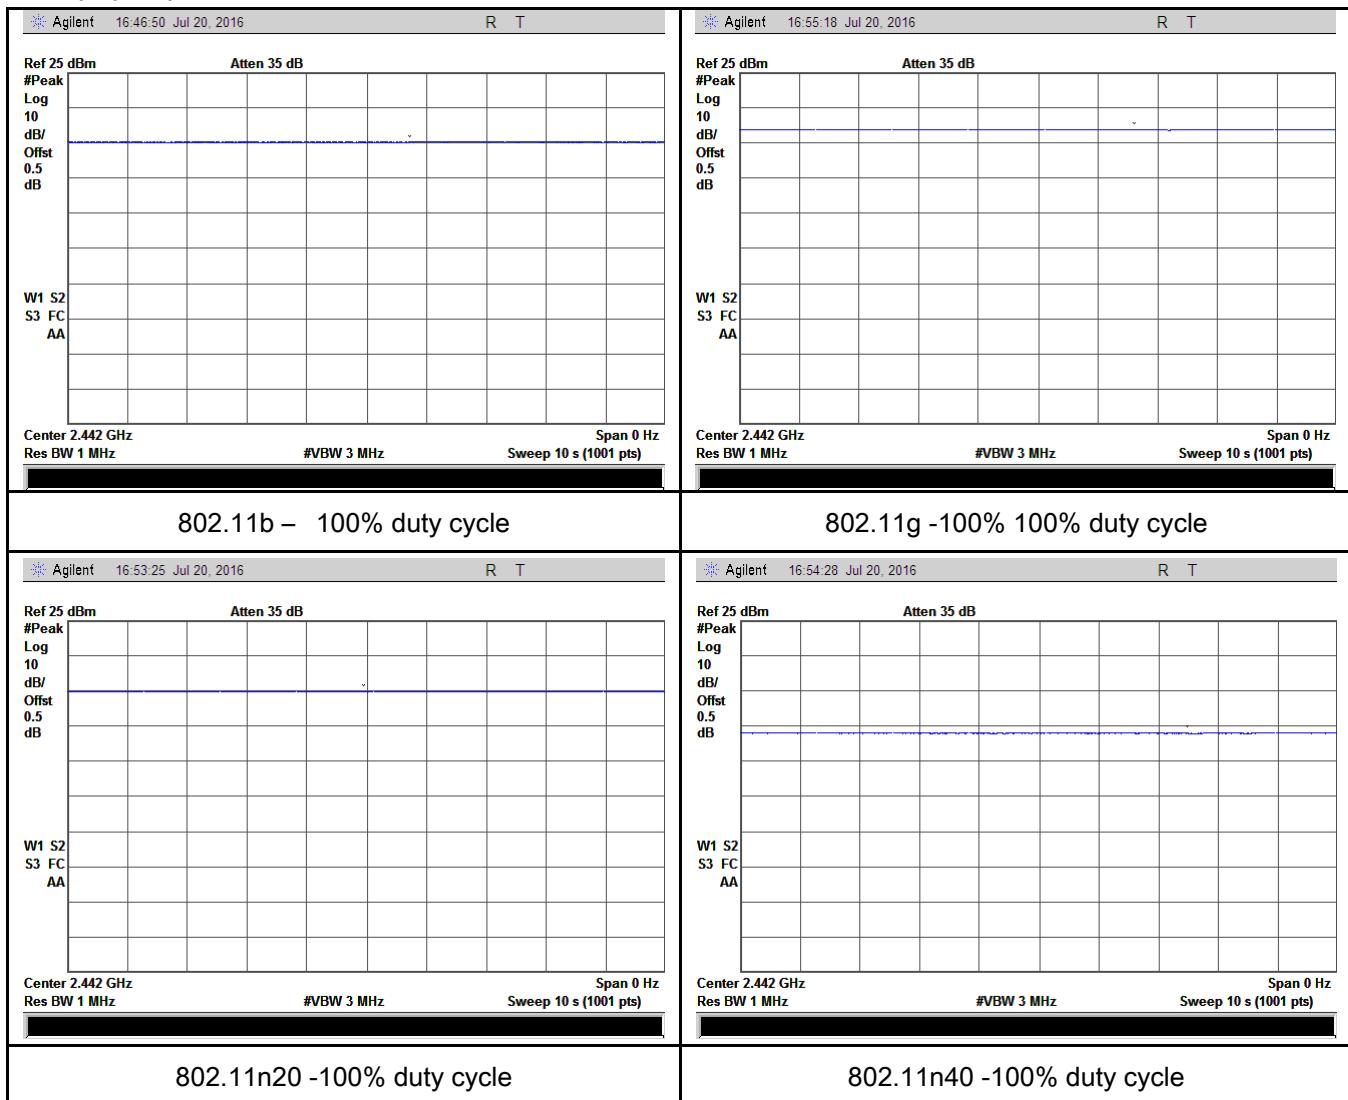

6.4 Power Spectral Density

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	July 08, 2016
Tested By :	Loren Luo

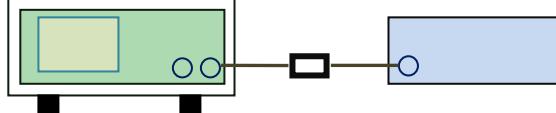Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r03, 10.2 power spectral density method power spectral density measurement procedure</p> <ul style="list-style-type: none"> - a) Set analyzer center frequency to DTS channel center frequency. - b) Set the span to 1.5 times the DTS bandwidth. - c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. - d) Set the VBW $\geq 3 \times \text{RBW}$. - e) Detector = peak. - f) Sweep time = auto couple. - g) Trace mode = max hold. - h) Allow trace to fully stabilize. - i) Use the peak marker function to determine the maximum amplitude level within the RBW. - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A



Power Spectral Density measurement result

Type	Test mode	CH	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
PSD	802.11b	Low	2412	-11.81	8	Pass
		Mid	2437	-9.76	8	Pass
		High	2462	-12.39	8	Pass
	802.11g	Low	2412	-12.25	8	Pass
		Mid	2437	-13.56	8	Pass
		High	2462	-12.56	8	Pass
	802.11n (20M)	Low	2412	-14.32	8	Pass
		Mid	2437	-13.92	8	Pass
		High	2462	-15.09	8	Pass
	802.11n (40M)	Low	2422	-17.34	8	Pass
		Mid	2437	-17.67	8	Pass
		High	2452	-17.17	8	Pass


Test Plots

Power Spectral Density measurement result

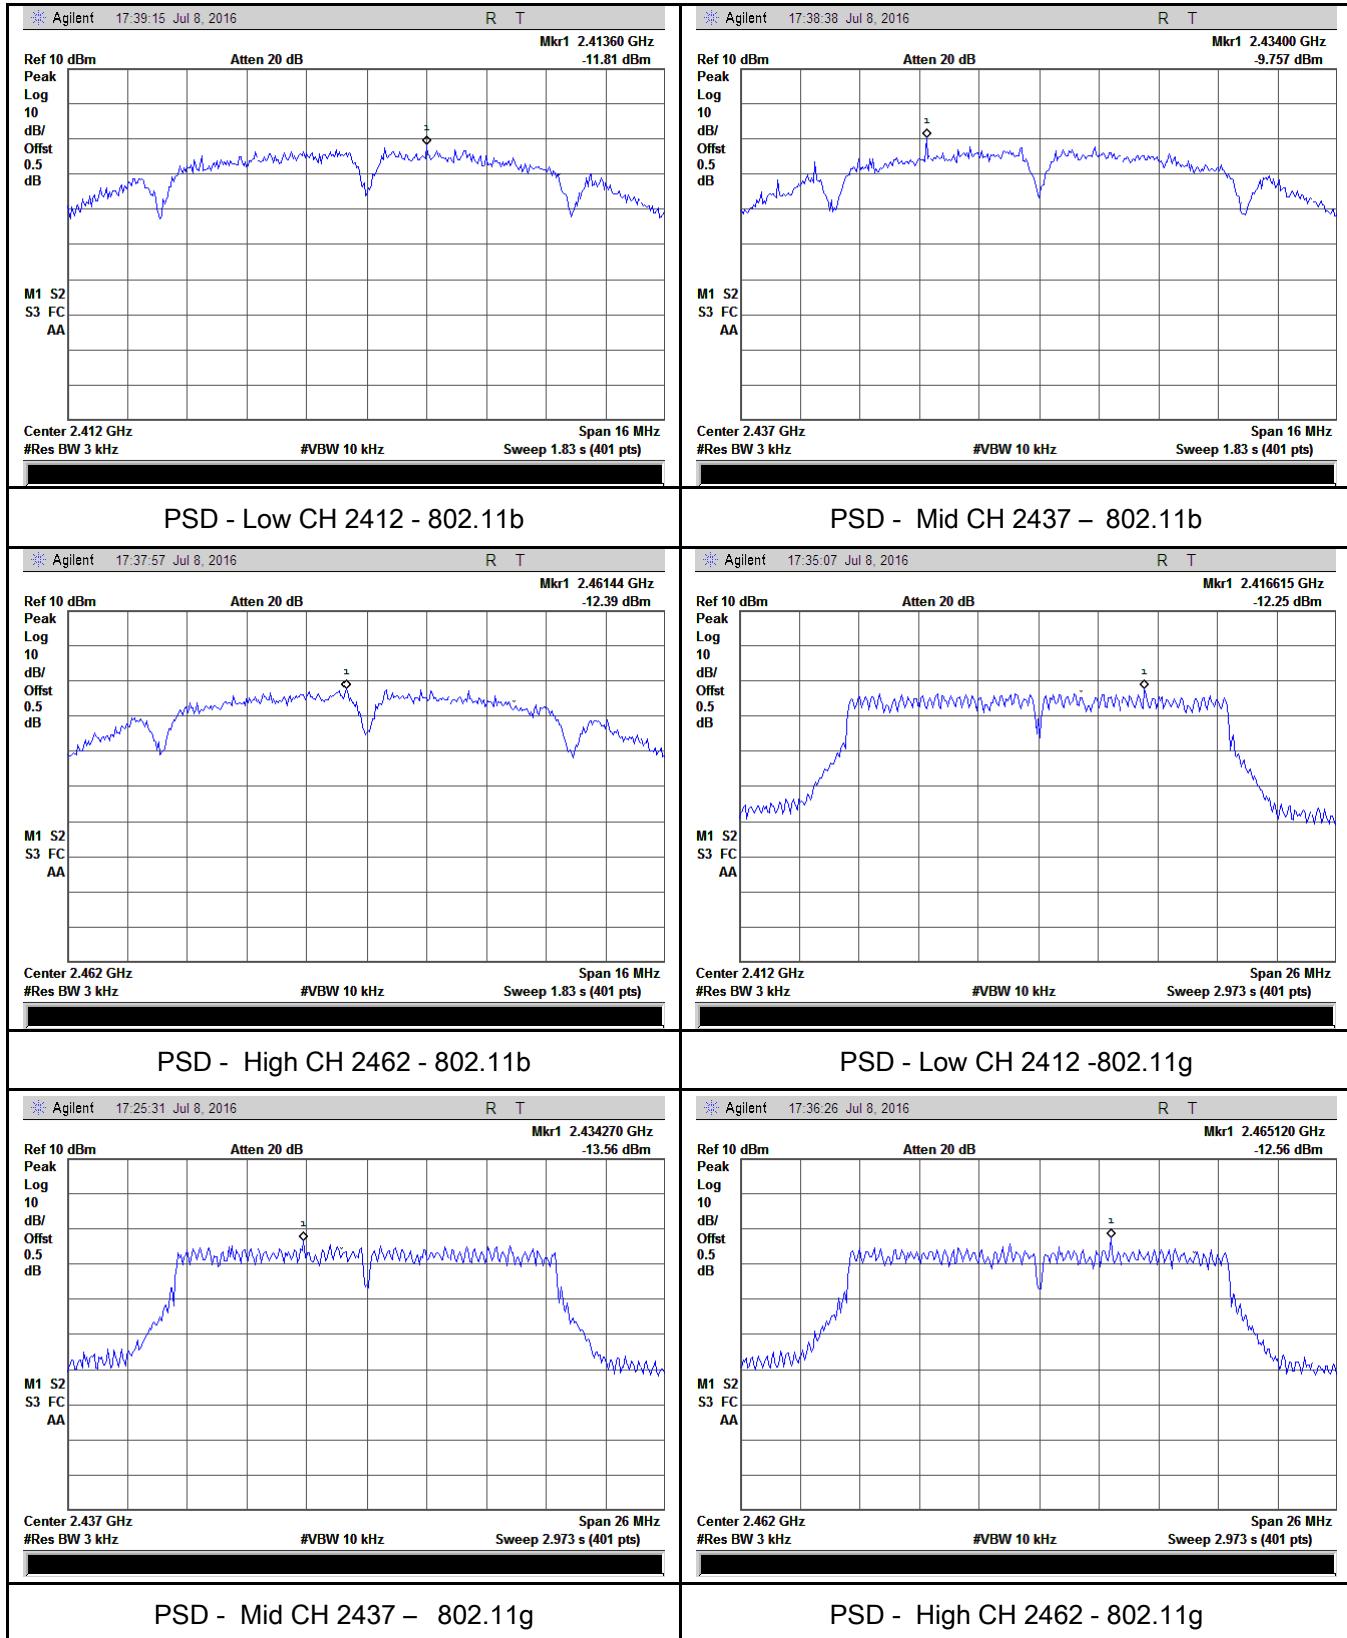


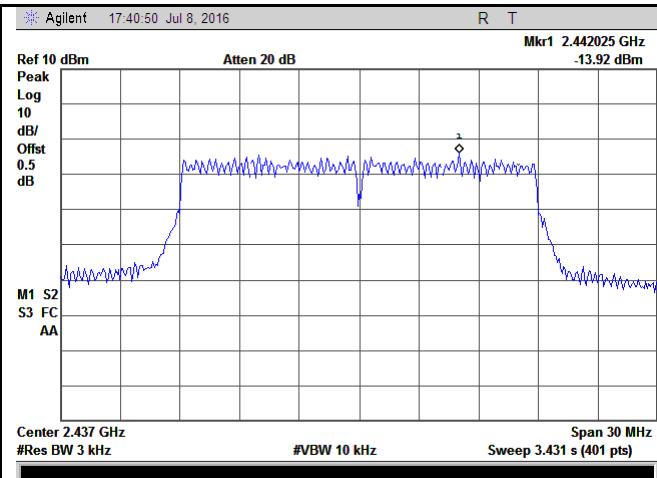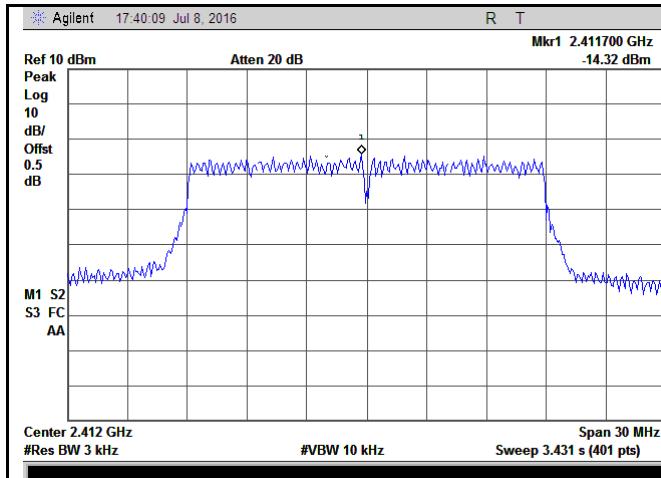


PSD - Low CH 2412 - 802.11n20

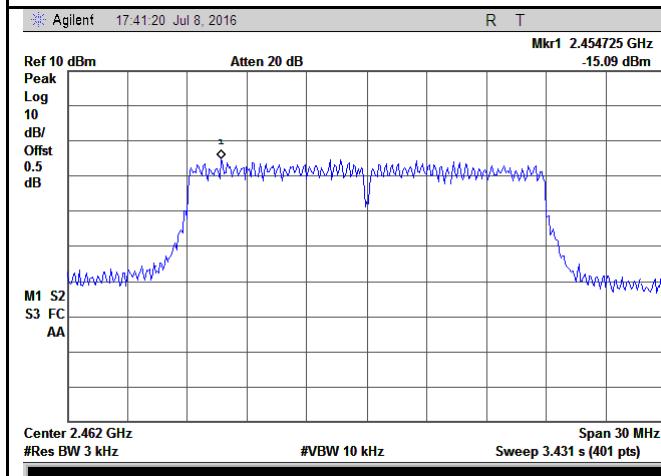


PSD - Mid CH 2437 – 802.11n20

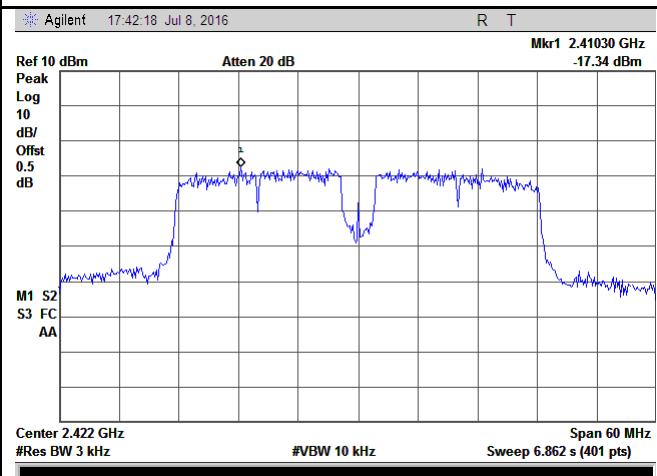

PSD - High CH 2472 - 802.11n20

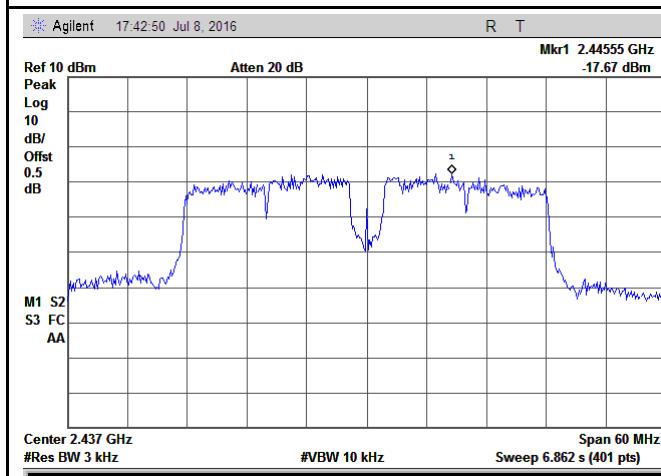

PSD - Low CH 2422 - 802.11n40

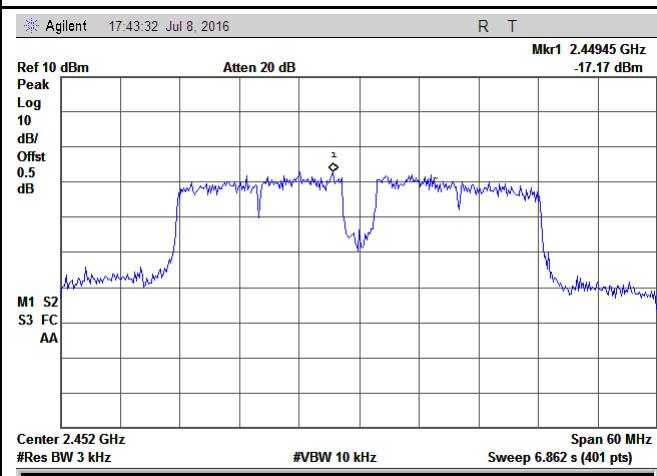


PSD - Mid CH 2437 – 802.11n40

PSD - High CH 2452 - 802.11n40

6.5 Band-Edge & Unwanted Emissions into Restricted Frequency Bands

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1005mbar
Test date :	July 05, 2016&July 22, 2016
Tested By :	Loren Luo

Requirement(s):

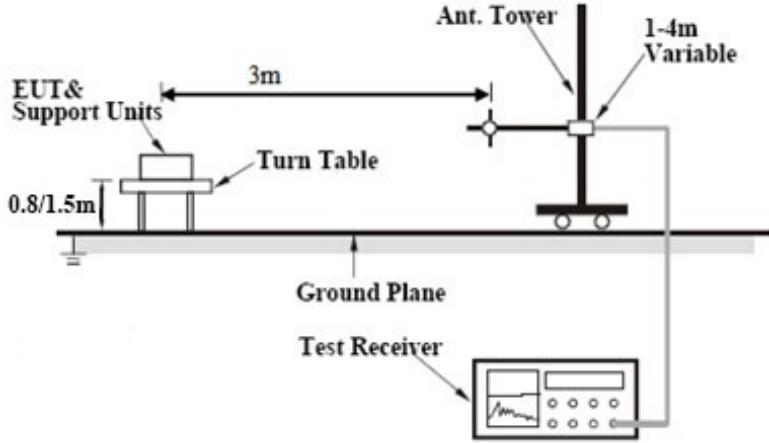Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An Ant. Tower is positioned 3m away from the EUT & Support Units, which are placed on a Turn Table. The Turn Table is mounted on a Ground Plane. A Test Receiver is connected to the system, with a 1-4m Variable cable connecting the Test Receiver to the Ant. Tower. The height of the EUT & Support Units is specified as 0.8/1.5m.</p>		
Test Procedure	<p>Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. 		

	<ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A


Test Plot Yes (See below) N/A





Radiated method:


Test Plots

Band Edge measurement result

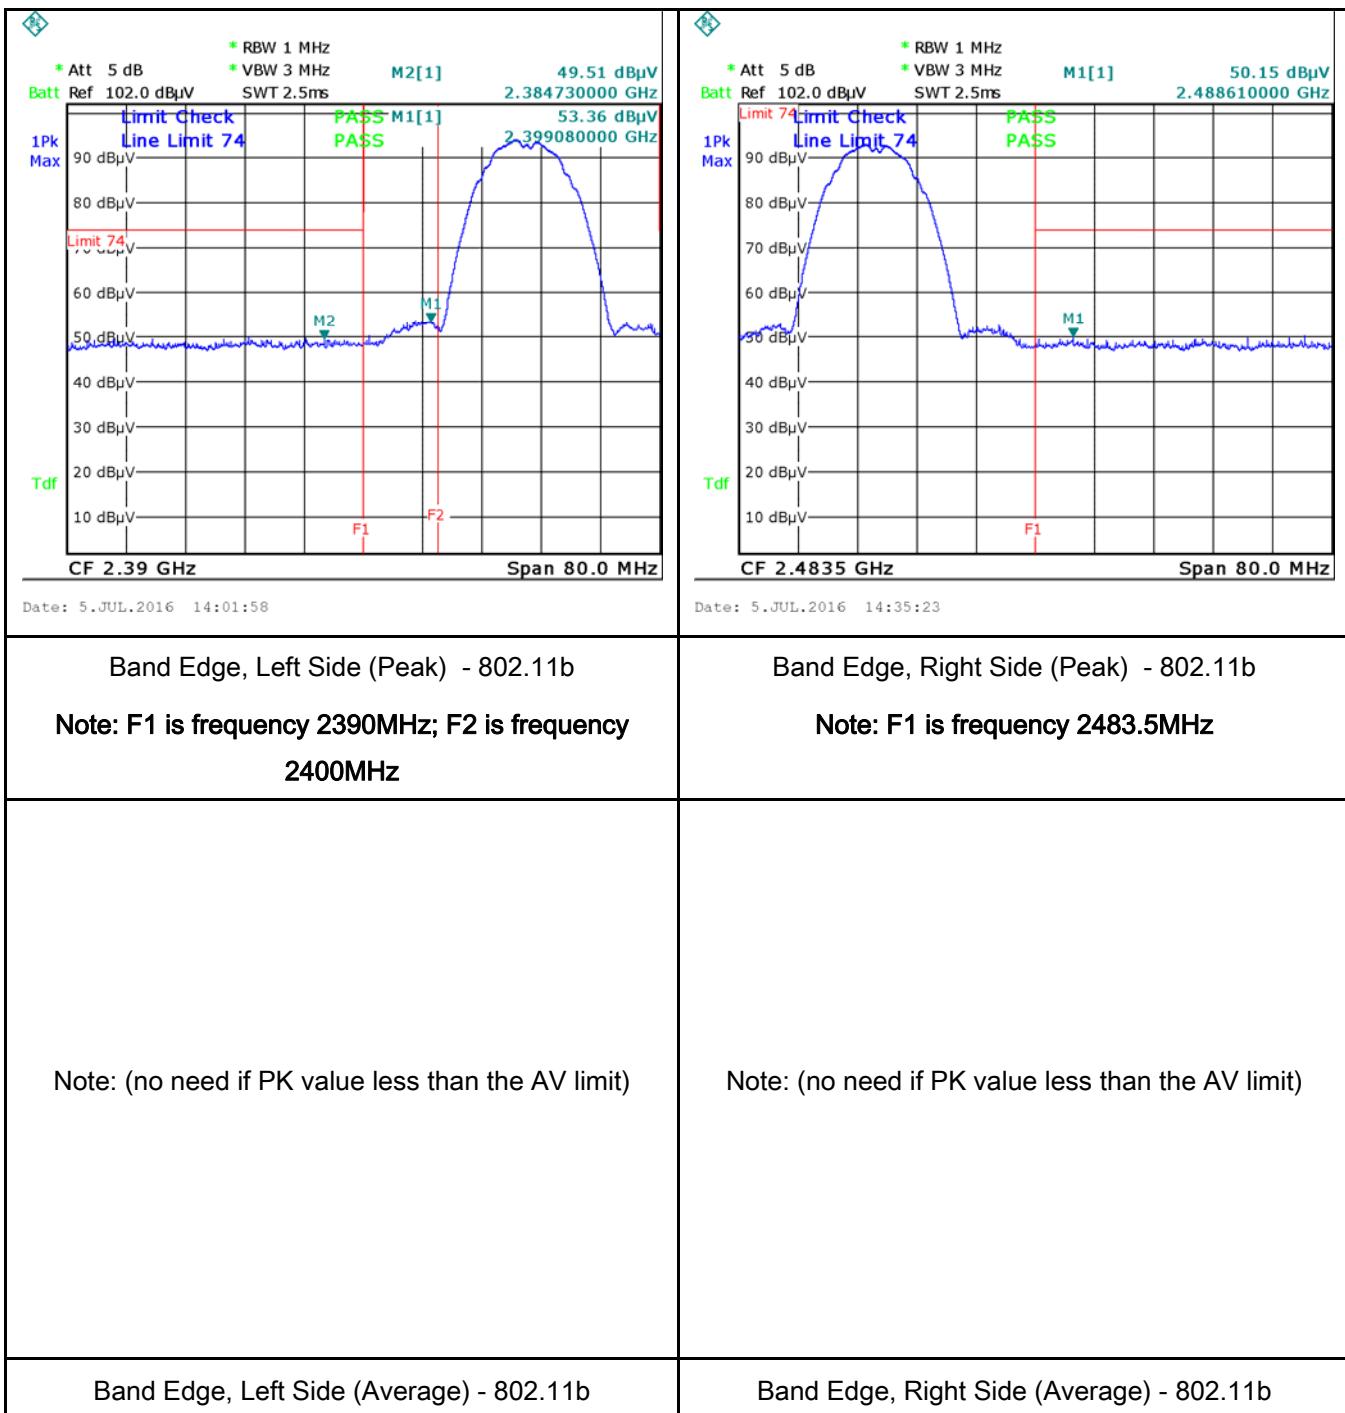

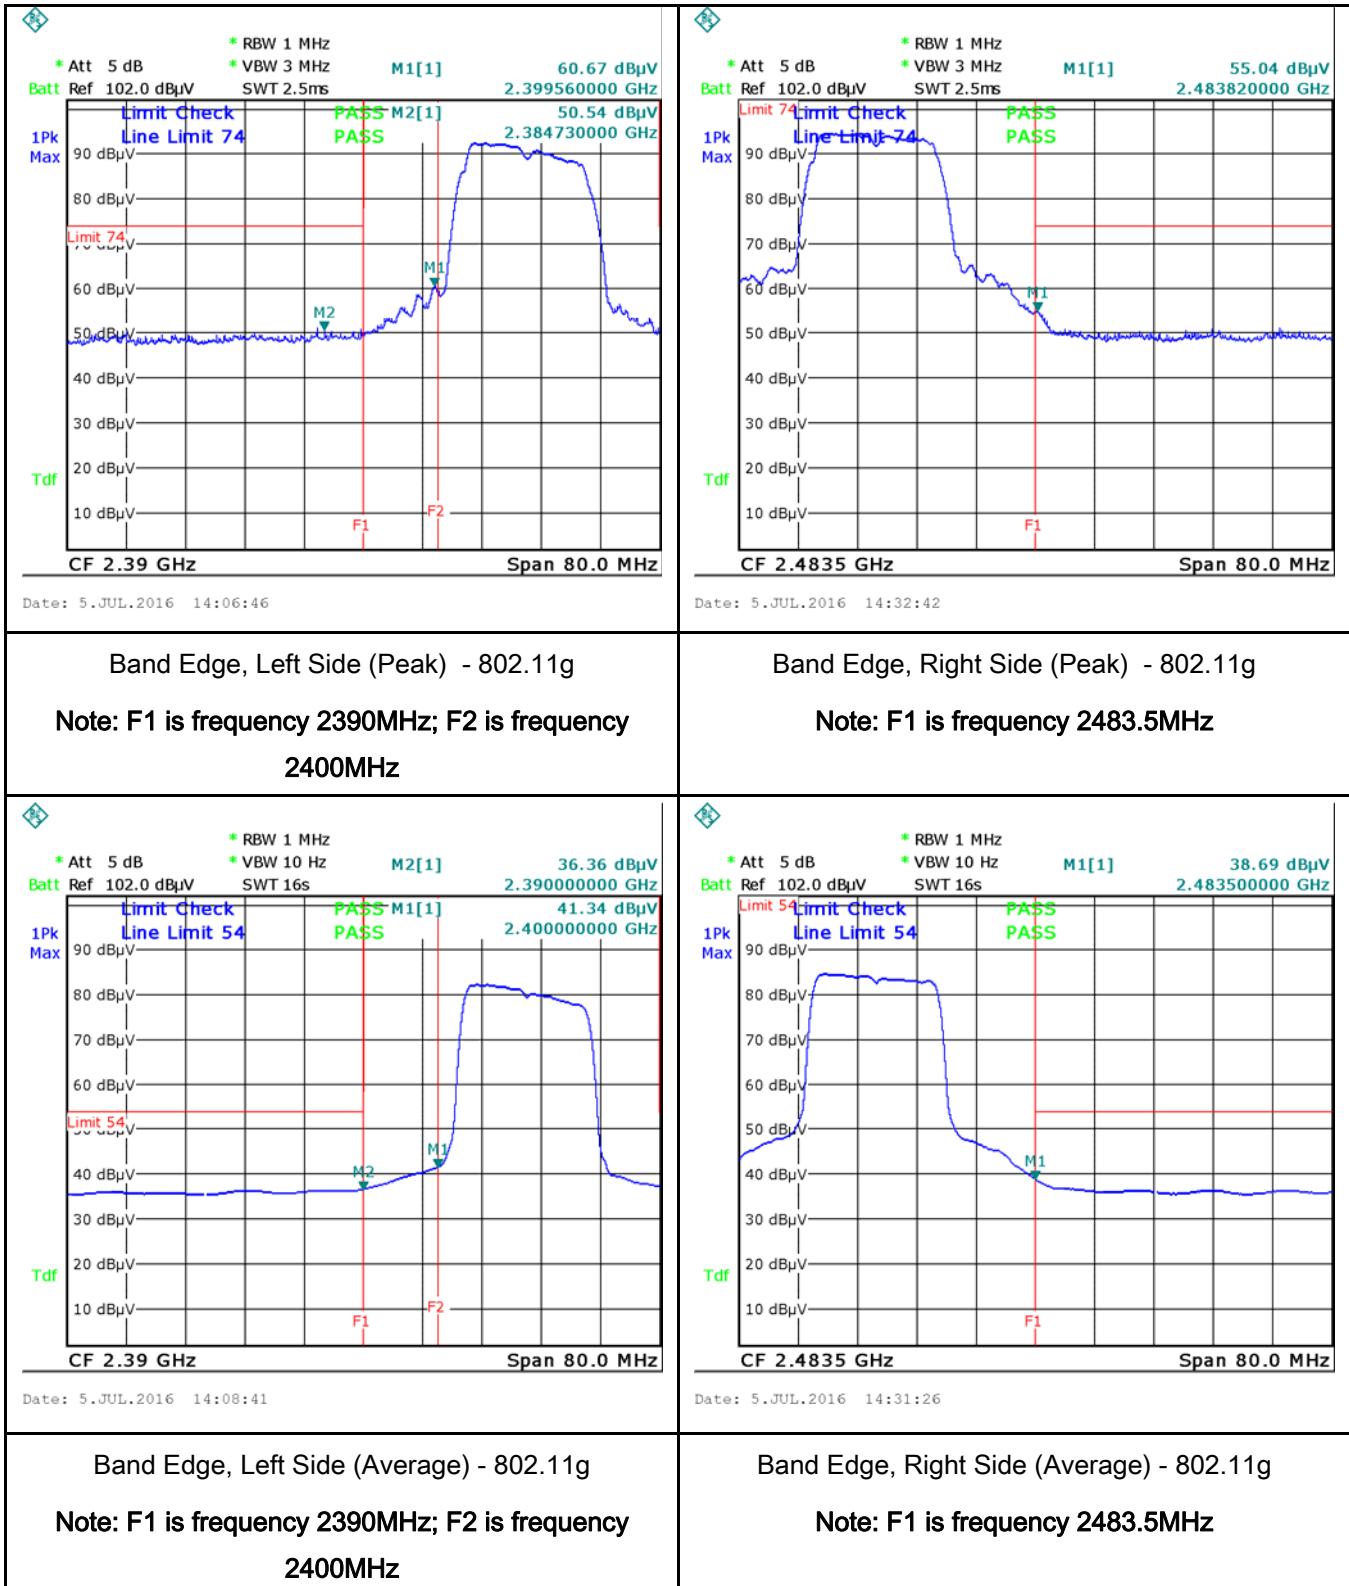

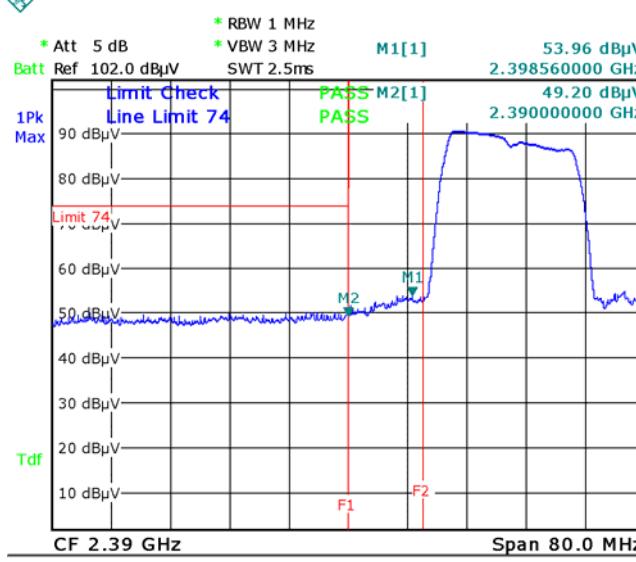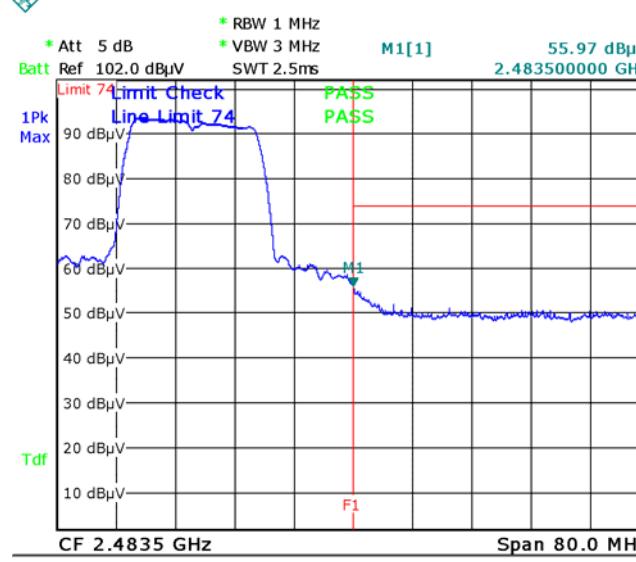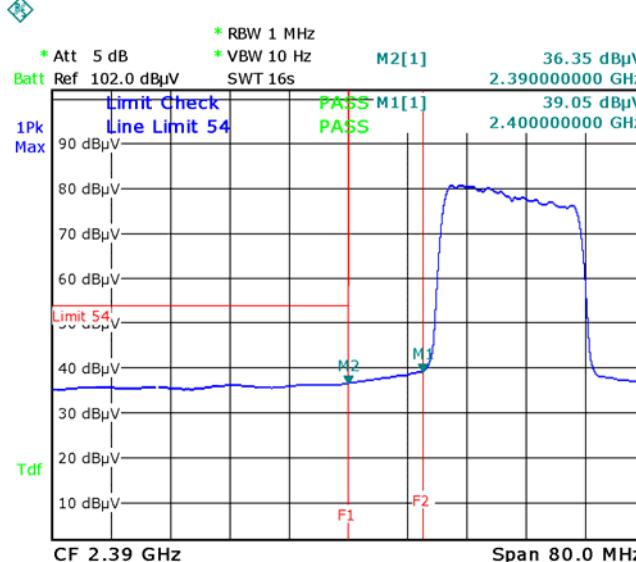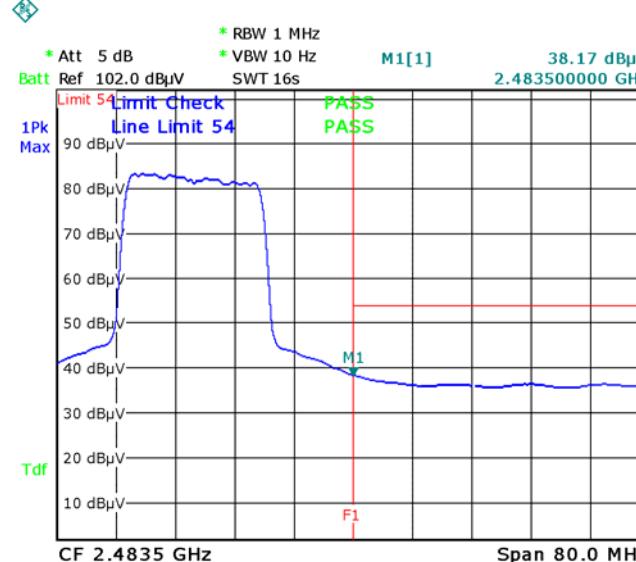
	
<p>Date: 5.JUL.2016 14:12:19</p> <p>Band Edge, Left Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 5.JUL.2016 14:27:06</p> <p>Band Edge, Right Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>
	
<p>Date: 5.JUL.2016 14:11:33</p> <p>Band Edge, Left Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 5.JUL.2016 14:28:19</p> <p>Band Edge, Right Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>




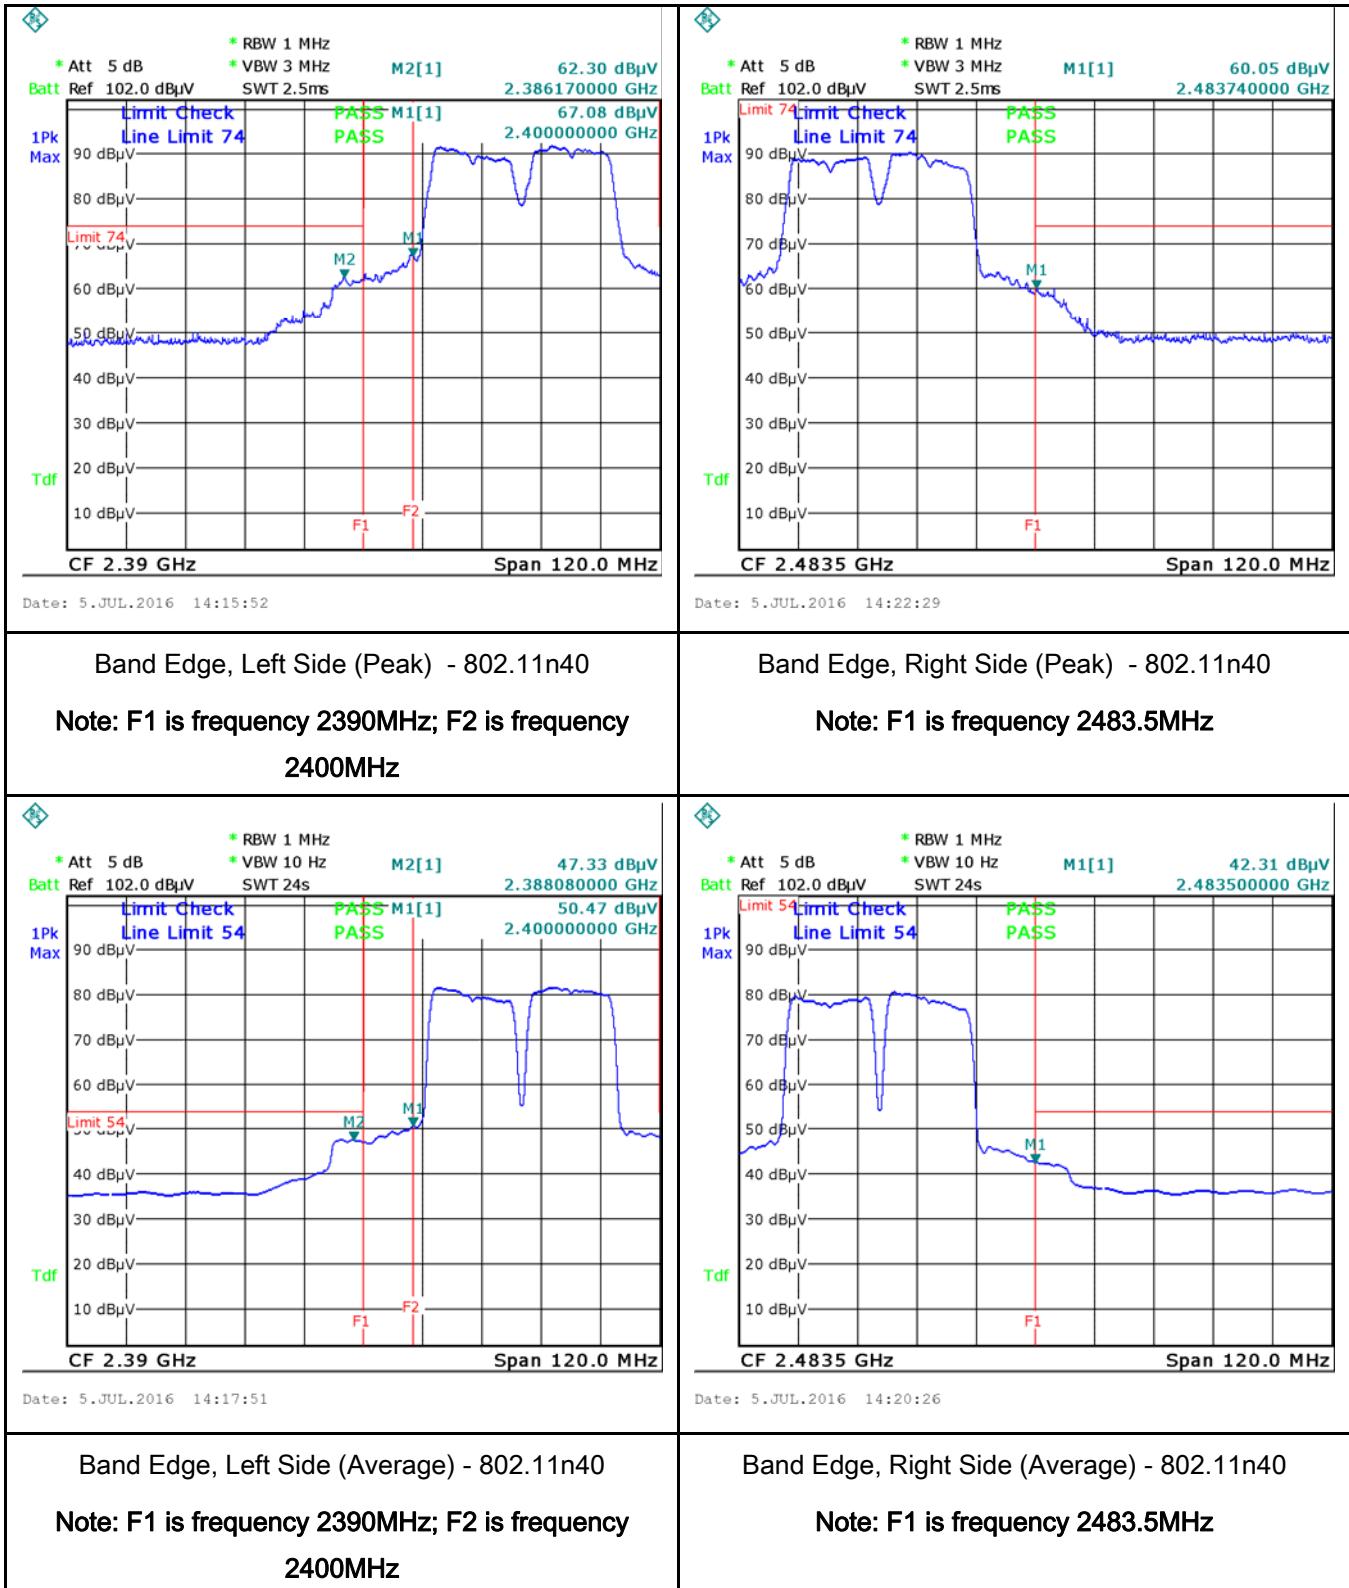


Conducted method:

Test Plots

Band Edge measurement result

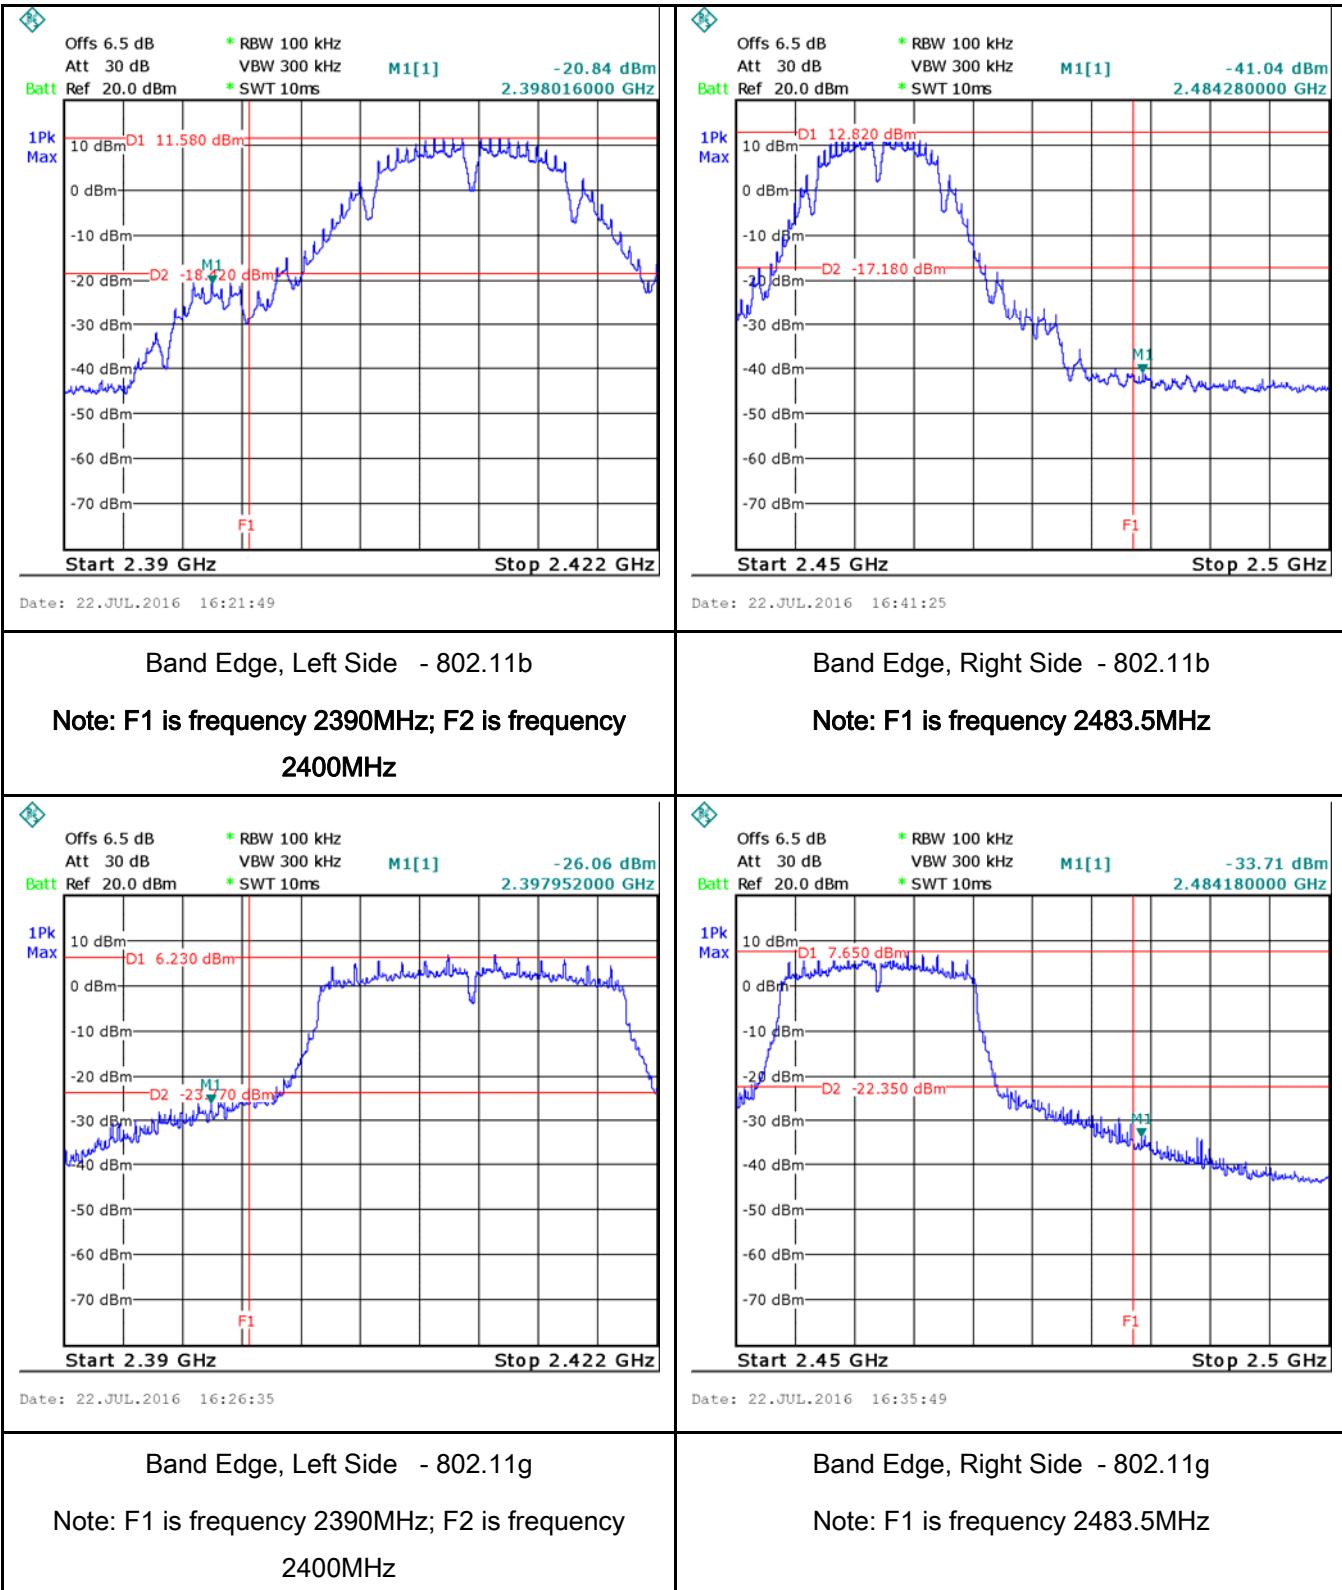


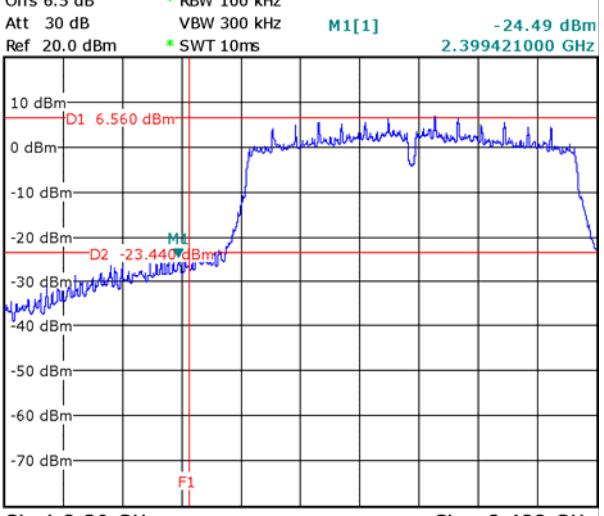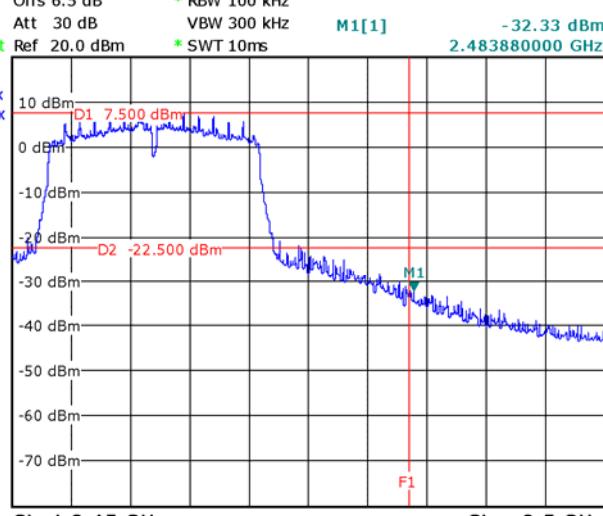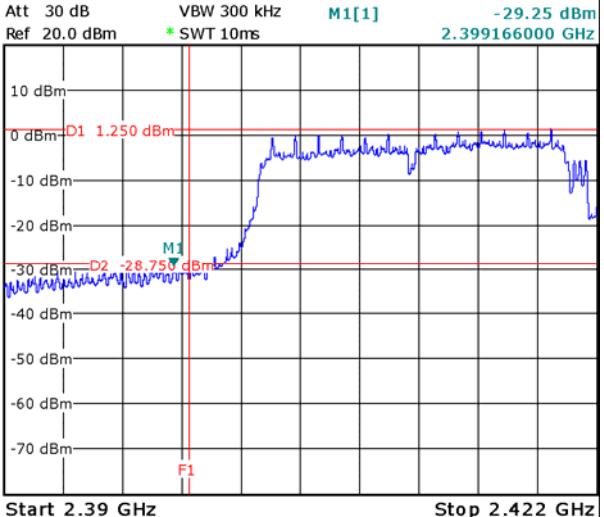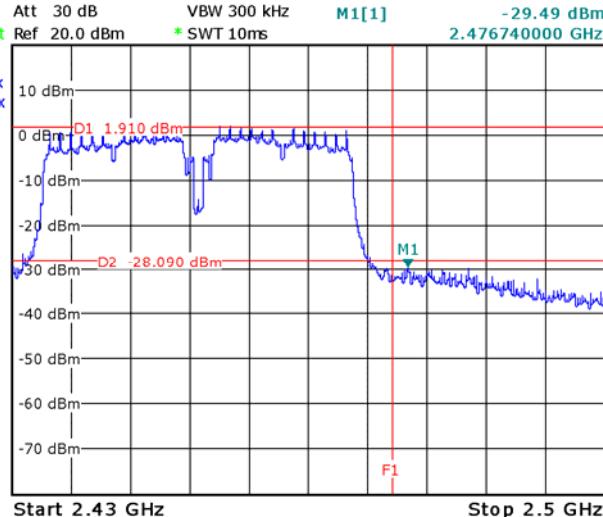 <p>Offs 6.5 dB * RBW 100 kHz Att 30 dB VBW 300 kHz * SWT 10ms Batt Ref 20.0 dBm * SW1 10ms M1[1] -24.49 dBm 2.399421000 GHz</p> <p>1Pk Max 10 dBm D1 6.560 dBm 0 dBm -10 dBm -20 dBm D2 -23.440 dBm M1 -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm F1</p> <p>Start 2.39 GHz Stop 2.422 GHz</p> <p>Date: 22.JUL.2016 16:29:17</p>	 <p>Offs 6.5 dB * RBW 100 kHz Att 30 dB VBW 300 kHz * SWT 10ms Batt Ref 20.0 dBm * SW1 10ms M1[1] -32.33 dBm 2.483880000 GHz</p> <p>1Pk Max 10 dBm D1 7.500 dBm 0 dBm -10 dBm -20 dBm D2 -22.500 dBm M1 -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm F1</p> <p>Start 2.45 GHz Stop 2.5 GHz</p> <p>Date: 22.JUL.2016 16:33:15</p>
<p>Band Edge, Left Side - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>Offs 6.5 dB * RBW 100 kHz Att 30 dB VBW 300 kHz * SWT 10ms Batt Ref 20.0 dBm * SW1 10ms M1[1] -29.25 dBm 2.399166000 GHz</p> <p>1Pk Max 10 dBm D1 1.250 dBm 0 dBm -10 dBm -20 dBm -30 dBm D2 -28.750 dBm M1 -40 dBm -50 dBm -60 dBm -70 dBm F1</p> <p>Start 2.39 GHz Stop 2.422 GHz</p> <p>Date: 22.JUL.2016 16:49:43</p>	 <p>Offs 6.5 dB * RBW 100 kHz Att 30 dB VBW 300 kHz * SWT 10ms Batt Ref 20.0 dBm * SW1 10ms M1[1] -29.49 dBm 2.476740000 GHz</p> <p>1Pk Max 10 dBm D1 1.910 dBm 0 dBm -10 dBm -20 dBm -30 dBm D2 -28.090 dBm M1 -40 dBm -50 dBm -60 dBm -70 dBm F1</p> <p>Start 2.43 GHz Stop 2.5 GHz</p> <p>Date: 22.JUL.2016 16:46:27</p>
<p>Band Edge, Left Side - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>

6.6 AC Power Line Conducted Emissions

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	June 25, 2016
Tested By :	Loren Luo

Requirement(s):

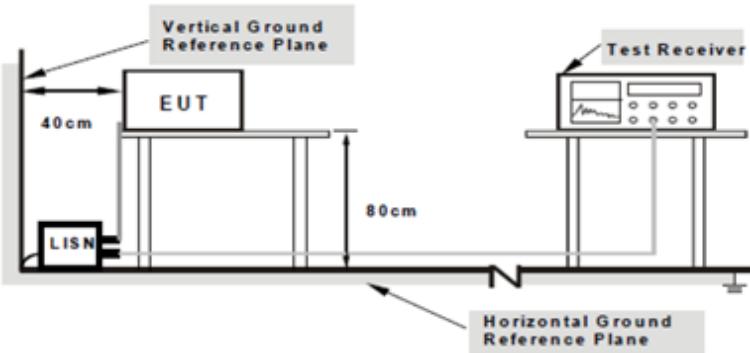
Spec	Item	Requirement	Applicable															
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th>Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th></th> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)			QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																	
	QP	Average																
0.15 ~ 0.5	66 – 56	56 – 46																
0.5 ~ 5	56	46																
5 ~ 30	60	50																
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																	
Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 																	

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode:	Transmitting Mode
------------	-------------------

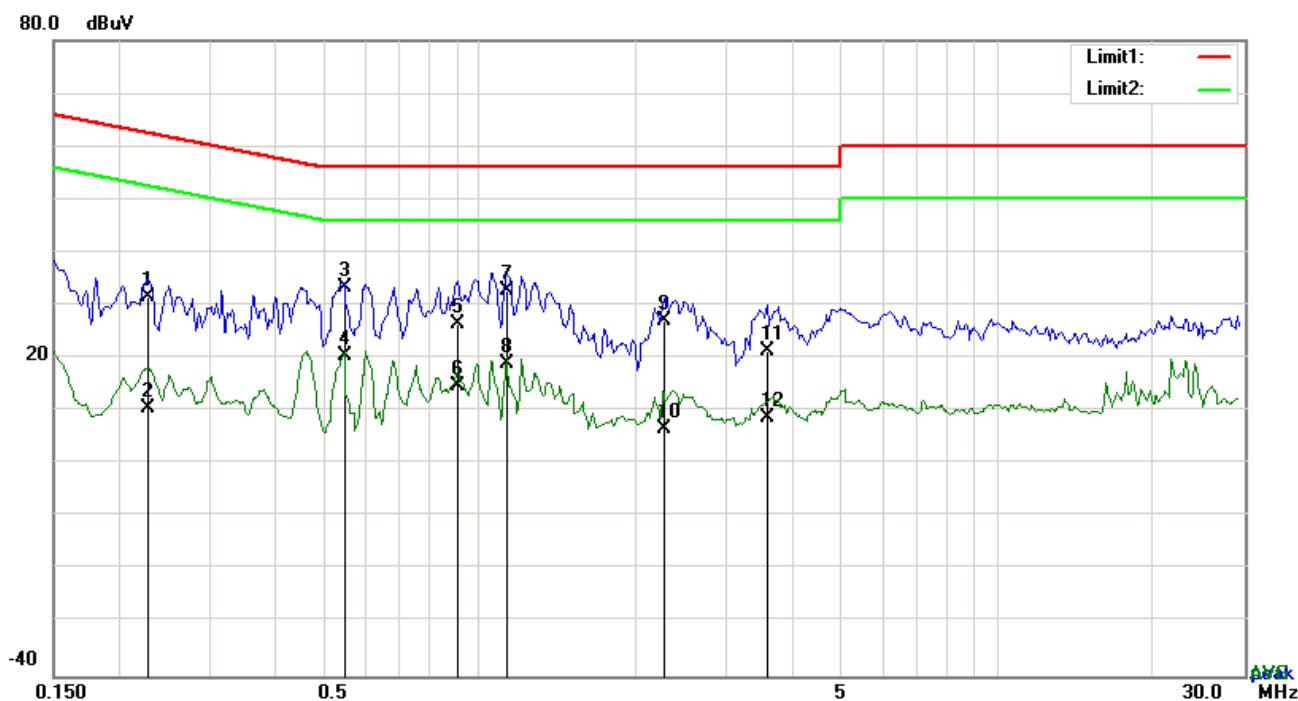


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	L1	0.2280	21.45	QP	10.03	31.48	62.52	-31.04
2	L1	0.2280	0.67	AVG	10.03	10.70	52.52	-41.82
3	L1	0.5478	23.38	QP	10.03	33.41	56.00	-22.59
4	L1	0.5478	10.30	AVG	10.03	20.33	46.00	-25.67
5	L1	0.9066	16.37	QP	10.03	26.40	56.00	-29.60
6	L1	0.9066	4.64	AVG	10.03	14.67	46.00	-31.33
7	L1	1.1250	22.59	QP	10.03	32.62	56.00	-23.38
8	L1	1.1250	8.81	AVG	10.03	18.84	46.00	-27.16
9	L1	2.2833	17.14	QP	10.05	27.19	56.00	-28.81
10	L1	2.2833	-3.52	AVG	10.05	6.53	46.00	-39.47
11	L1	3.5850	11.17	QP	10.06	21.23	56.00	-34.77
12	L1	3.5850	-1.31	AVG	10.06	8.75	46.00	-37.25


Test Mode: Transmitting Mode

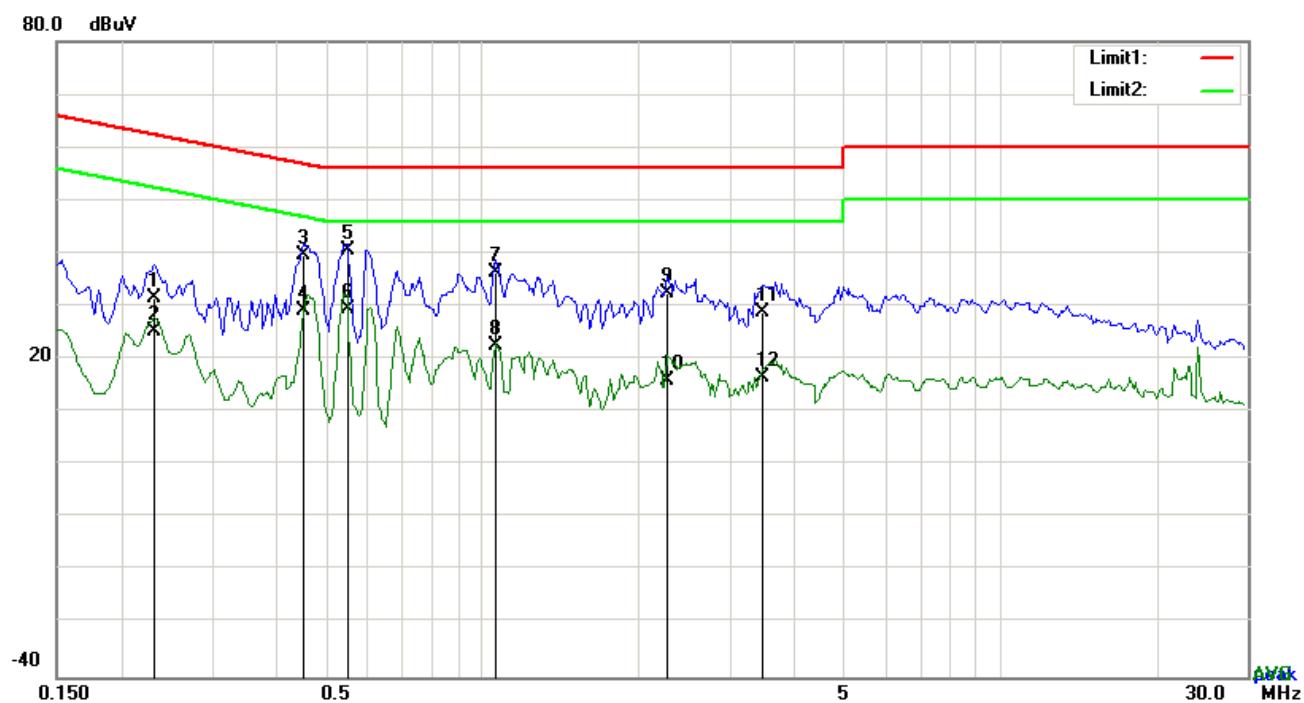

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	N	0.2319	21.59	QP	10.02	31.61	62.38	-30.77
2	N	0.2319	15.19	AVG	10.02	25.21	52.38	-27.17
3	N	0.4503	29.51	QP	10.02	39.53	56.87	-17.34
4	N	0.4503	19.01	AVG	10.02	29.03	46.87	-17.84
5	N	0.5478	30.48	QP	10.02	40.50	56.00	-15.50
6	N	0.5478	19.31	AVG	10.02	29.33	46.00	-16.67
7	N	1.0626	26.32	QP	10.03	36.35	56.00	-19.65
8	N	1.0626	12.60	AVG	10.03	22.63	46.00	-23.37
9	N	2.2716	22.38	QP	10.04	32.42	56.00	-23.58
10	N	2.2716	5.81	AVG	10.04	15.85	46.00	-30.15
11	N	3.4680	18.85	QP	10.05	28.90	56.00	-27.10
12	N	3.4680	6.40	AVG	10.05	16.45	46.00	-29.55

Test Mode:	Transmitting Mode
------------	-------------------

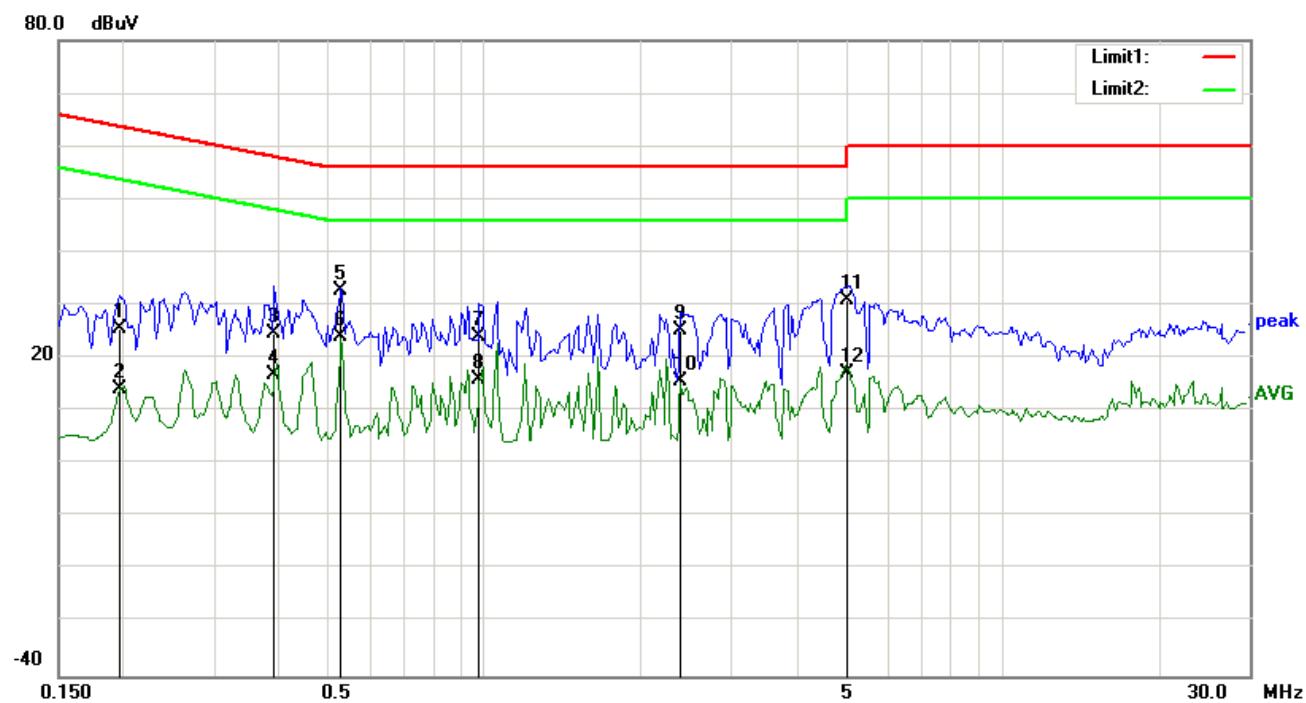


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	L1	0.1968	15.65	QP	10.03	25.68	63.74	-38.06
2	L1	0.1968	4.20	AVG	10.03	14.23	53.74	-39.51
3	L1	0.3918	14.66	QP	10.03	24.69	58.03	-33.34
4	L1	0.3918	6.70	AVG	10.03	16.73	48.03	-31.30
5	L1	0.5283	22.60	QP	10.03	32.63	56.00	-23.37
6	L1	0.5283	14.08	AVG	10.03	24.11	46.00	-21.89
7	L1	0.9768	13.97	QP	10.03	24.00	56.00	-32.00
8	L1	0.9768	5.99	AVG	10.03	16.02	46.00	-29.98
9	L1	2.3847	15.10	QP	10.05	25.15	56.00	-30.85
10	L1	2.3847	5.48	AVG	10.05	15.53	46.00	-30.47
11	L1	5.0280	20.96	QP	10.08	31.04	60.00	-28.96
12	L1	5.0280	6.93	AVG	10.08	17.01	50.00	-32.99

Test Mode: Transmitting Mode

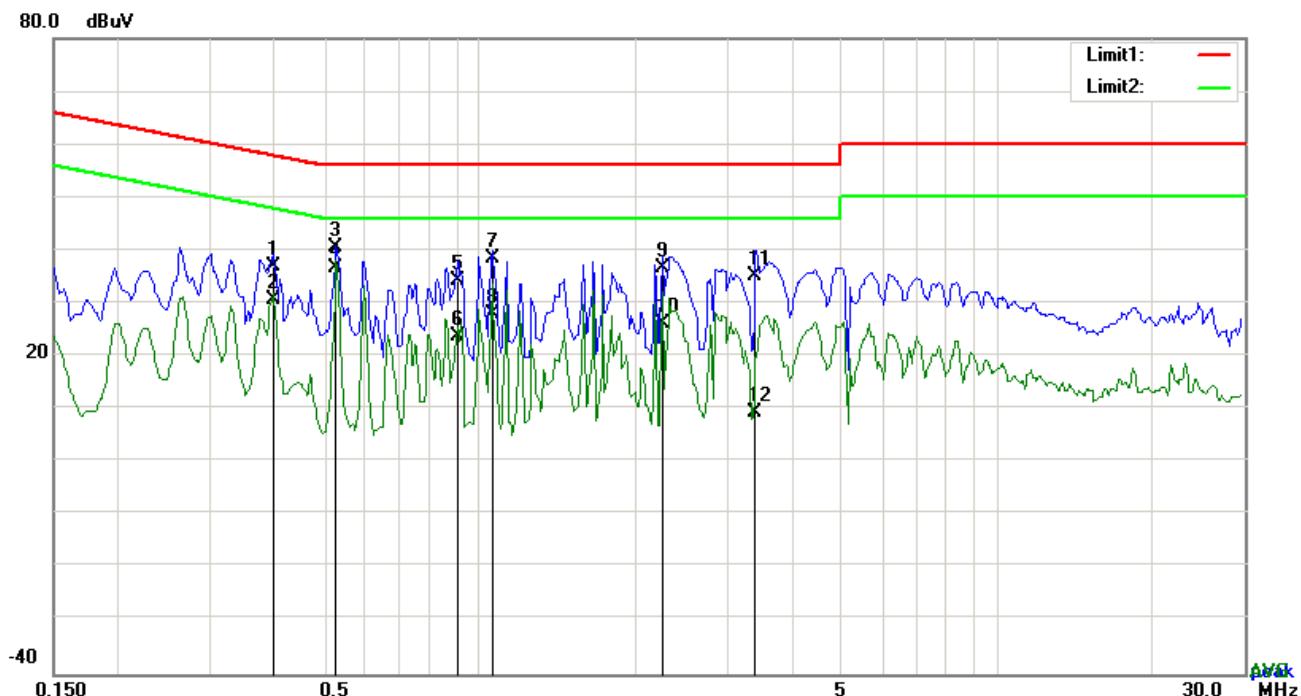

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	N	0.3996	26.81	QP	10.02	36.83	57.86	-21.03
2	N	0.3996	20.65	AVG	10.02	30.67	47.86	-17.19
3	N	0.5283	30.66	QP	10.02	40.68	56.00	-15.32
4	N	0.5283	26.73	AVG	10.02	36.75	46.00	-9.25
5	N	0.9066	24.26	QP	10.03	34.29	56.00	-21.71
6	N	0.9066	13.79	AVG	10.03	23.82	46.00	-22.18
7	N	1.0548	28.45	QP	10.03	38.48	56.00	-17.52
8	N	1.0548	17.92	AVG	10.03	27.95	46.00	-18.05
9	N	2.2560	26.67	QP	10.04	36.71	56.00	-19.29
10	N	2.2560	16.07	AVG	10.04	26.11	46.00	-19.89
11	N	3.4173	25.16	QP	10.05	35.21	56.00	-20.79
12	N	3.4173	-0.70	AVG	10.05	9.35	46.00	-36.65

6.7 Radiated Spurious Emissions & Restricted Band

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	June 25, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable							
47CFR§15. 247(d), RSS210 (A8.5)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>							
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (µV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 – 960
Frequency range (MHz)	Field Strength (µV/m)									
30 – 88	100									
88 – 216	150									
216 – 960	200									
Above 960	500									
b)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>								
c)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>								

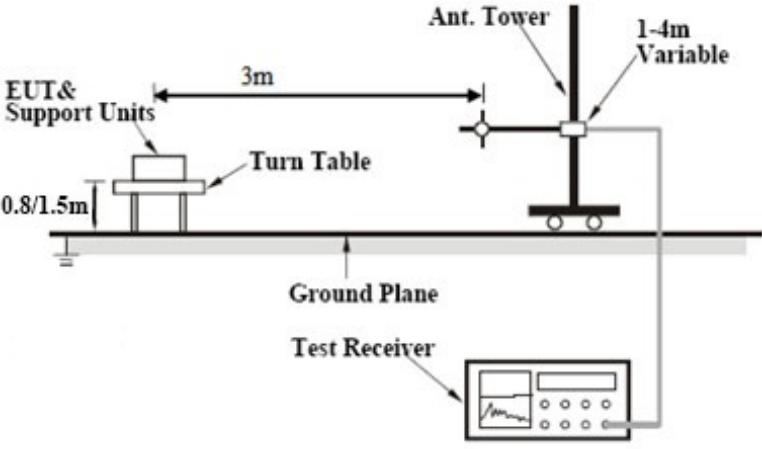
Test Setup	 <p>The diagram illustrates the test setup. An EUT & Support Units assembly is mounted on a Turn Table, which is positioned on a Ground Plane. The Turn Table is at a height of 0.8/1.5m from the ground. A vertical Ant. Tower is connected to the Turn Table via a horizontal crossbar. The distance between the EUT & Support Units and the Ant. Tower is 3m. The Ant. Tower has a height adjustment mechanism labeled '1-4m Variable'. A Test Receiver is connected to the Ant. Tower to measure emissions.</p>
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	<p>Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n – HT20-2437MHz mode.</p>
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Transmitting Mode

(Below 1GHz)

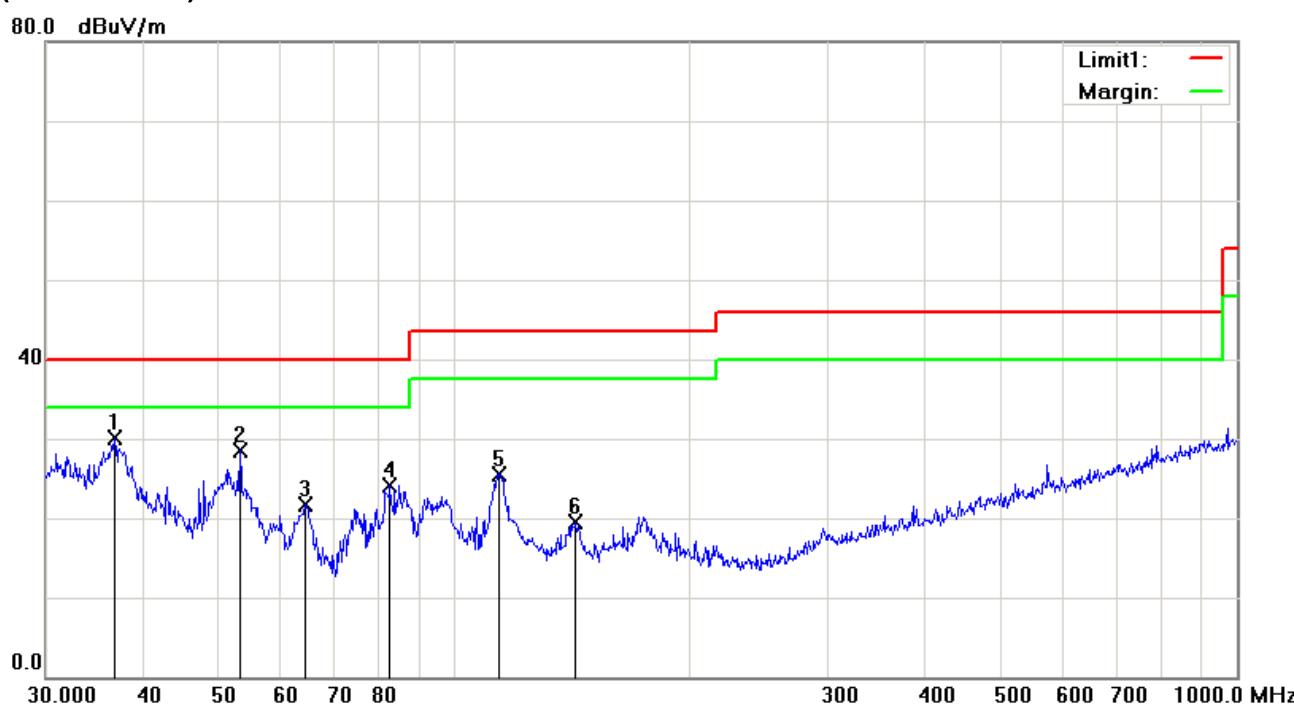


Test Data

Vertical Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Height	Degree
1	V	36.7662	35.41	peak	-5.23	30.18	40.00	-9.82	100	40
2	V	53.1313	42.01	peak	-13.54	28.47	40.00	-11.53	100	179
3	V	64.4331	35.62	peak	-14.01	21.61	40.00	-18.39	100	351
4	V	82.6482	37.67	peak	-13.62	24.05	40.00	-15.95	100	228
5	V	113.7143	33.98	peak	-8.38	25.60	43.50	-17.90	100	149
6	V	142.8244	27.94	peak	-8.50	19.44	43.50	-24.06	100	66

(Below 1GHz)

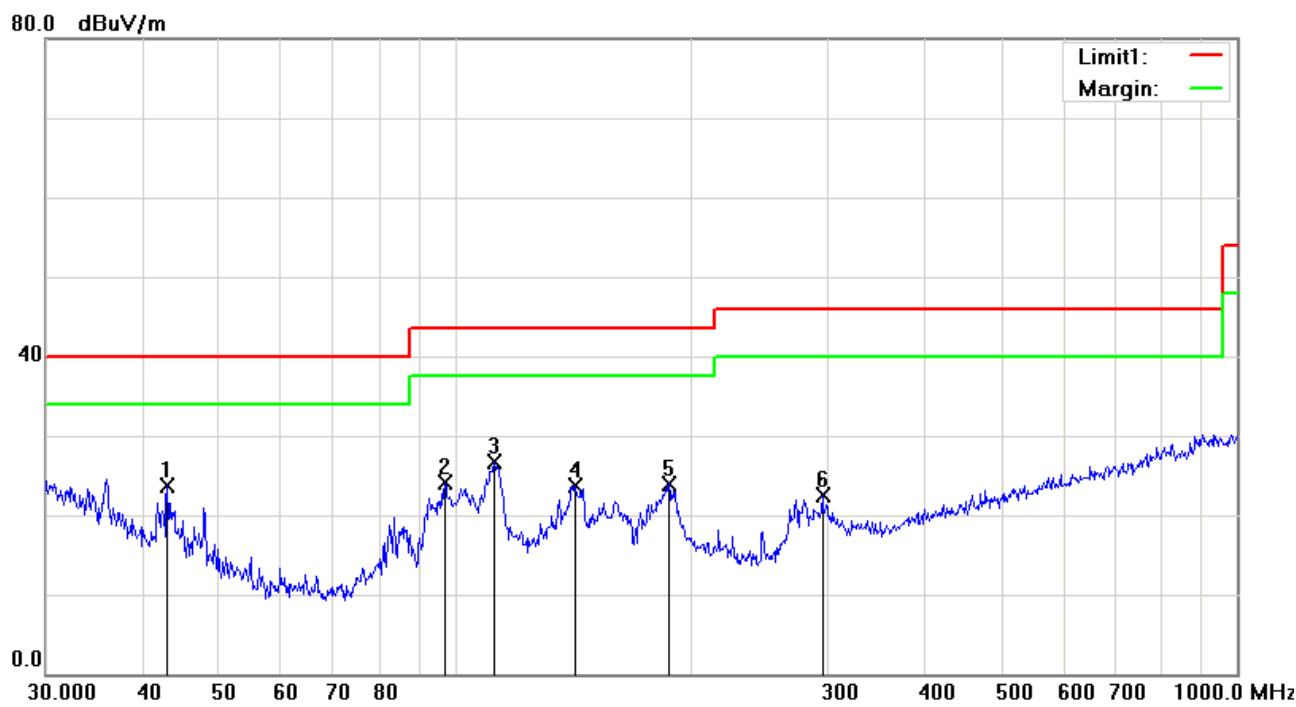

Test Data

Horizontal Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Height	Degree
1	H	42.8998	33.22	peak	-9.53	23.69	40.00	-16.31	100	323
2	H	97.1148	35.66	peak	-11.57	24.09	43.50	-19.41	100	207
3	H	112.5244	35.28	peak	-8.59	26.69	43.50	-16.81	100	94
4	H	142.8244	32.11	peak	-8.50	23.61	43.50	-19.89	100	229
5	H	187.7530	33.37	peak	-9.37	24.00	43.50	-19.50	100	248
6	H	295.1469	29.67	peak	-7.12	22.55	46.00	-23.45	100	207

Above 1GHz

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel (2412 MHz)(g mode worst case)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4824	38.95	AV	V	33.8	6.86	32.69	46.92	54	-7.08
4824	38.68	AV	H	33.8	6.86	32.69	46.65	54	-7.35
4824	47.22	PK	V	33.8	6.86	32.69	55.19	74	-18.81
4824	47.59	PK	H	33.8	6.86	32.69	55.56	74	-18.44
17785	23.51	AV	V	44.78	11.16	31.92	47.53	54	-6.47
17785	23.18	AV	H	44.78	11.16	31.92	47.2	54	-6.8
17785	40.43	PK	V	44.78	11.16	31.92	64.45	74	-9.55
17785	40.04	PK	H	44.78	11.16	31.92	64.06	74	-9.94

Middle Channel (2437 MHz) (b mode worst case)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4874	39.12	AV	V	33.6	6.82	32.71	46.83	54	-7.17
4874	38.85	AV	H	33.6	6.82	32.71	46.56	54	-7.44
4874	47.48	PK	V	33.6	6.82	32.71	55.19	74	-18.81
4874	48.06	PK	H	33.6	6.82	32.71	55.77	74	-18.23
17805	23.41	AV	V	44.83	11.27	32.06	47.45	54	-6.55
17805	23.09	AV	H	44.83	11.27	32.06	47.13	54	-6.87
17805	40.14	PK	V	44.83	11.27	32.06	64.18	74	-9.82
17805	40.37	PK	H	44.83	11.27	32.06	64.41	74	-9.59

High Channel (2462 MHz) (b mode worst case)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4924	38.82	AV	V	33.83	6.95	32.79	46.81	54	-7.19
4924	38.77	AV	H	33.83	6.95	32.79	46.76	54	-7.24
4924	47.48	PK	V	33.83	6.95	32.79	55.47	74	-18.53
4924	47.52	PK	H	33.83	6.95	32.79	55.51	74	-18.49
17905	23.28	AV	V	44.91	11.32	32.14	47.37	54	-6.63
17905	23.61	AV	H	44.91	11.32	32.14	47.7	54	-6.3
17905	40.59	PK	V	44.91	11.32	32.14	64.68	74	-9.32
17905	40.14	PK	H	44.91	11.32	32.14	64.23	74	-9.77

Note:


- 1, The testing has been conformed to $10 \times 2462\text{MHz} = 24,620\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>

Annex B. EUT and Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

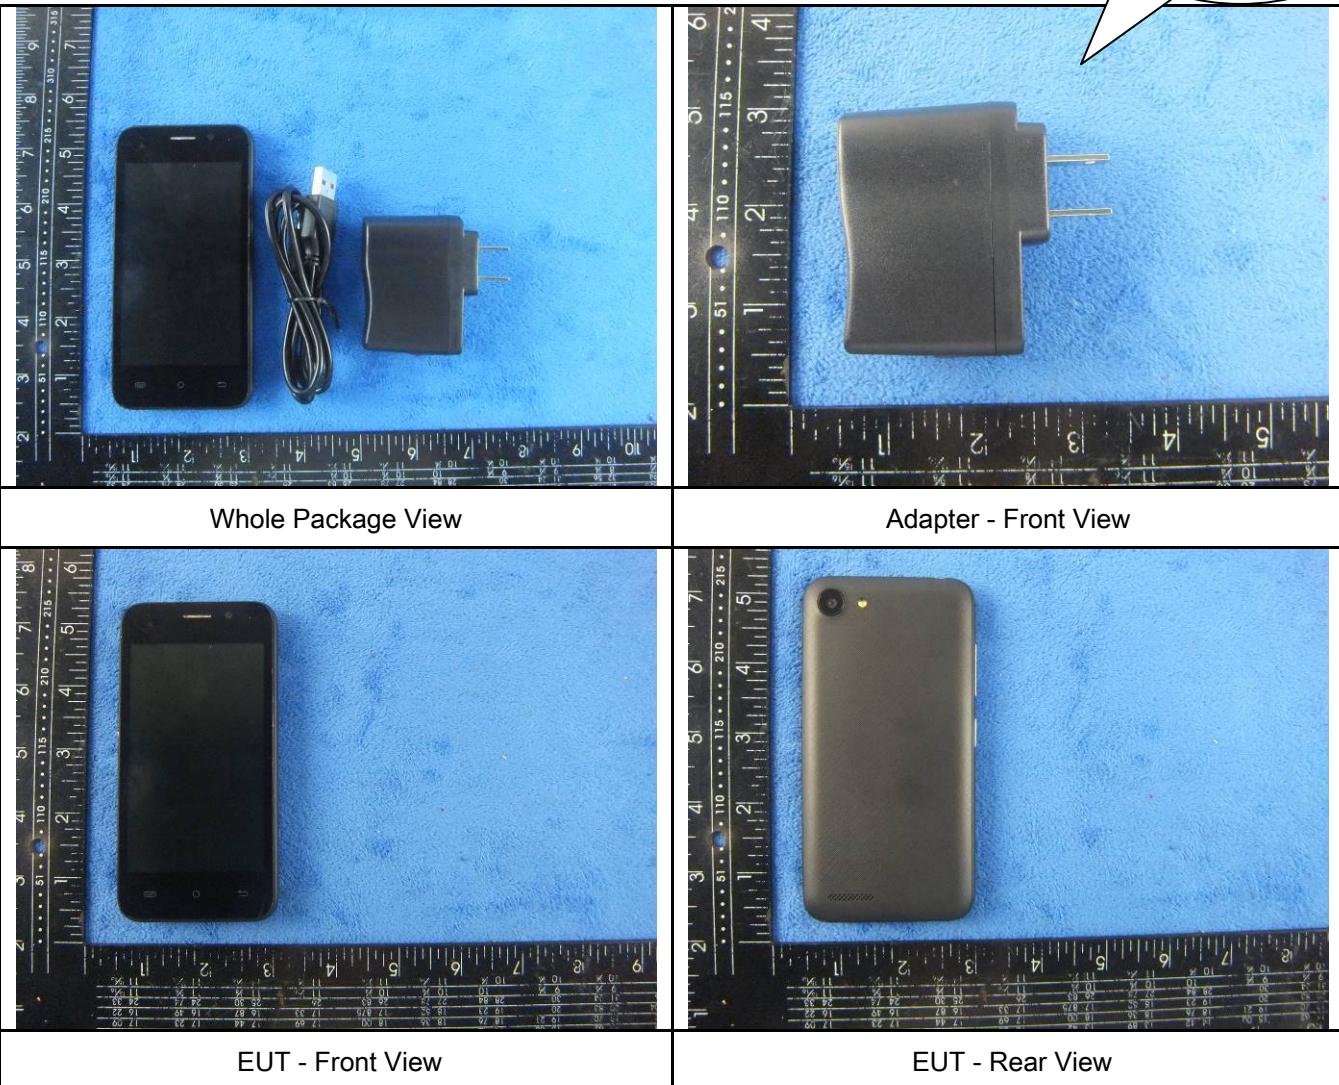


Model: PC444
Input: AC100-240V
50/60HZ 0.15A
Output: DC 5.0V-500mA
Made in China




EUT - Top View



EUT - Bottom View

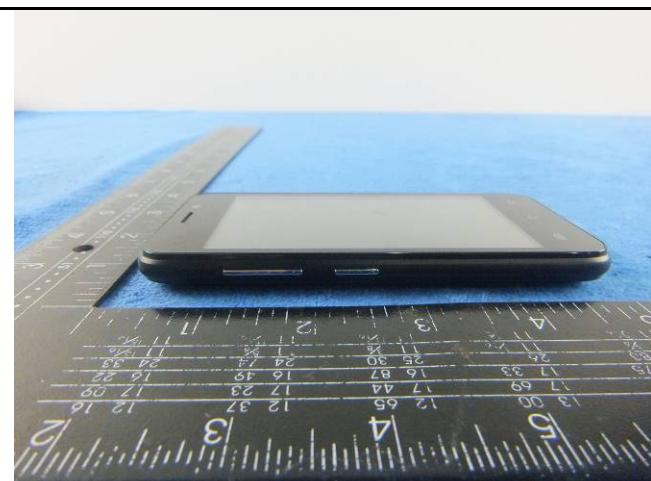





EUT - Left View

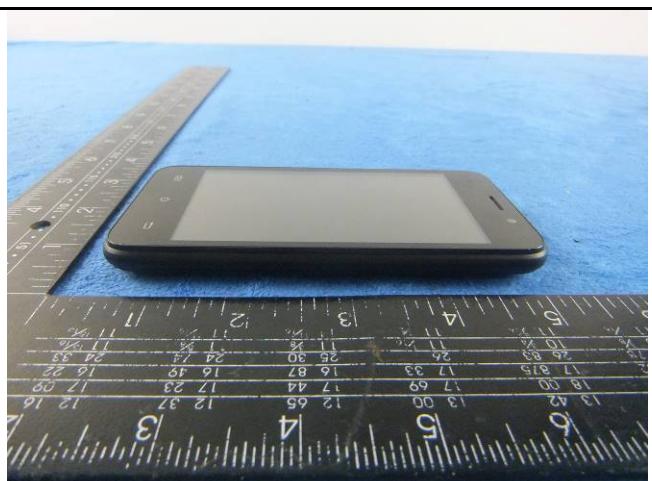



EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo

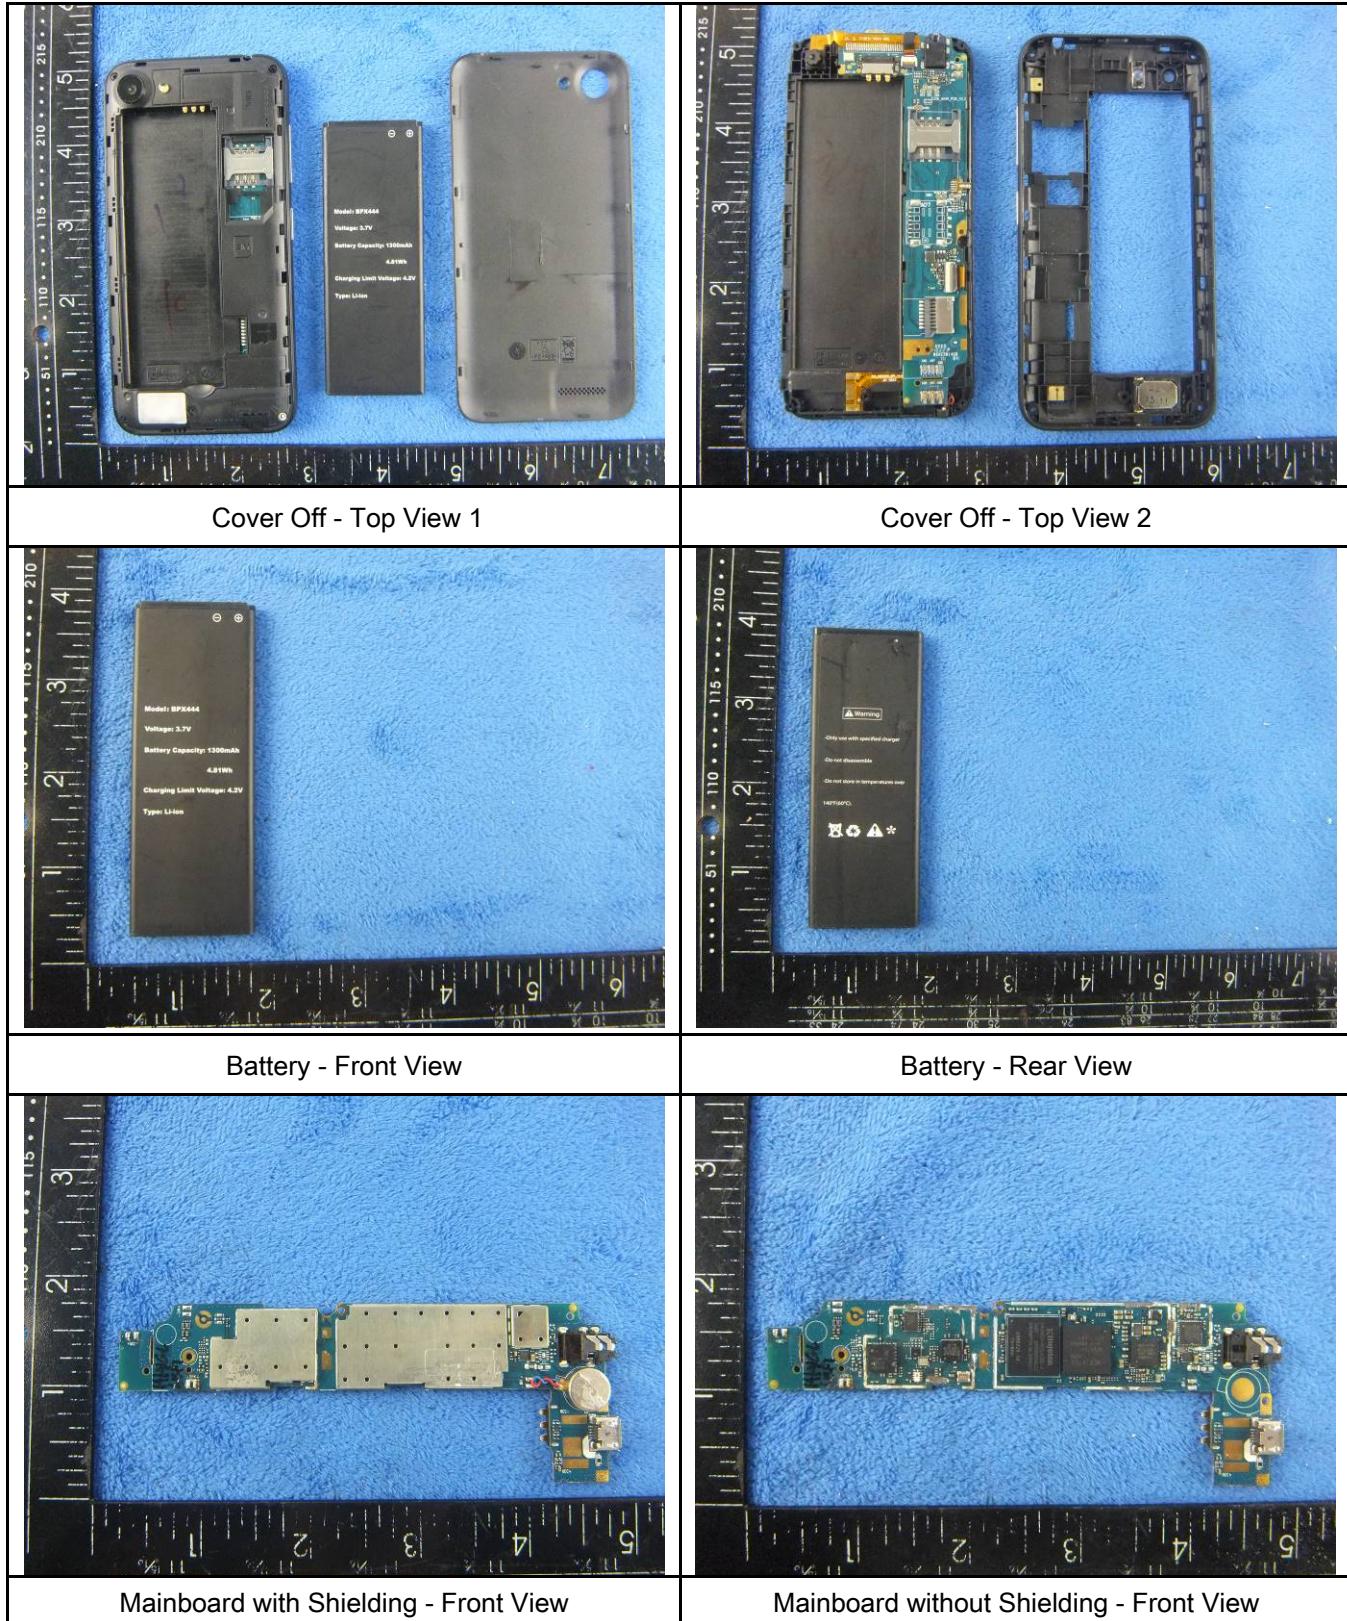

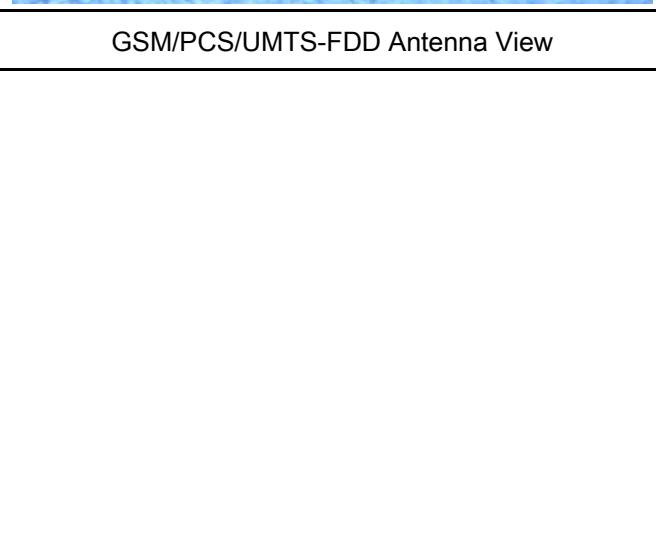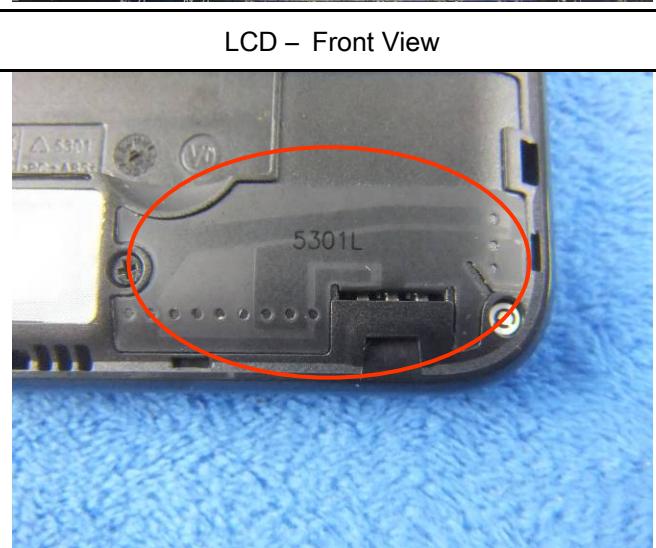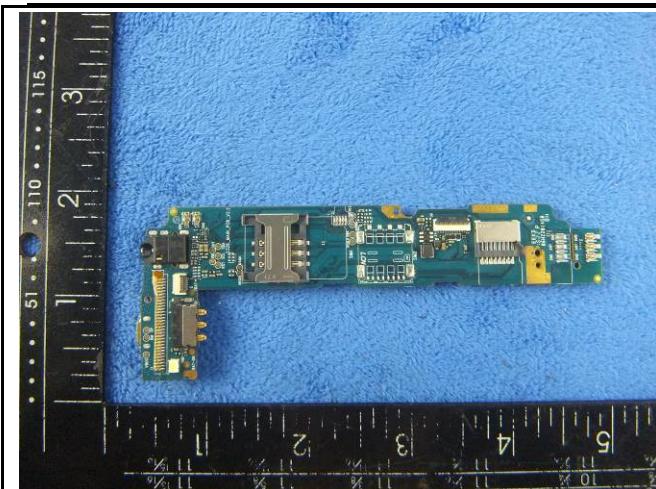


Annex B.iii. Photograph: Test Setup Photo

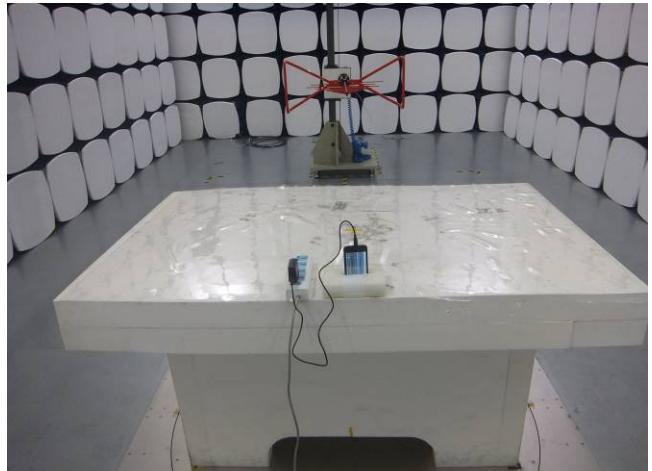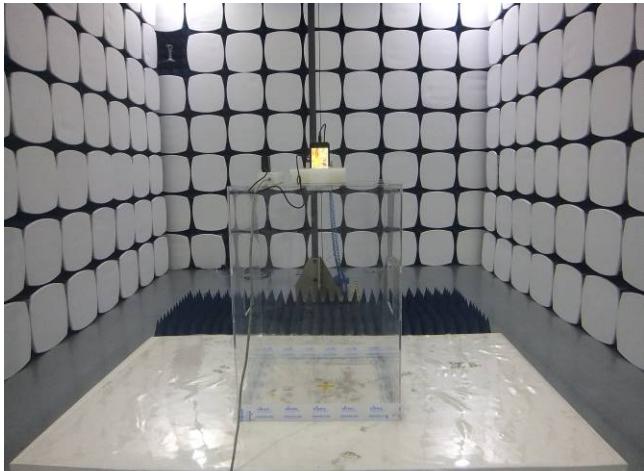 A photograph showing a wooden table with a white electronic device and a blue component on top. A black power cord is visible on the left, and a power strip is on the floor. The background is a grey wall.	 A photograph showing the same wooden table from a side angle. A white electronic device is on the table, connected to a black power cord. The background shows a grey wall and a white floor.
Conducted Emissions Test Setup Front View	Conducted Emissions Test Setup Side View
 A photograph of a white rectangular table with a white electronic device on it, positioned in a large anechoic chamber with white foam panels. A red tripod stand is visible in the background.	 A photograph of a white rectangular table with a white electronic device on it, positioned in a large anechoic chamber with white foam panels. A clear plastic enclosure is placed over the device.
Radiated Spurious Emissions Test Setup Below 1GHz	Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

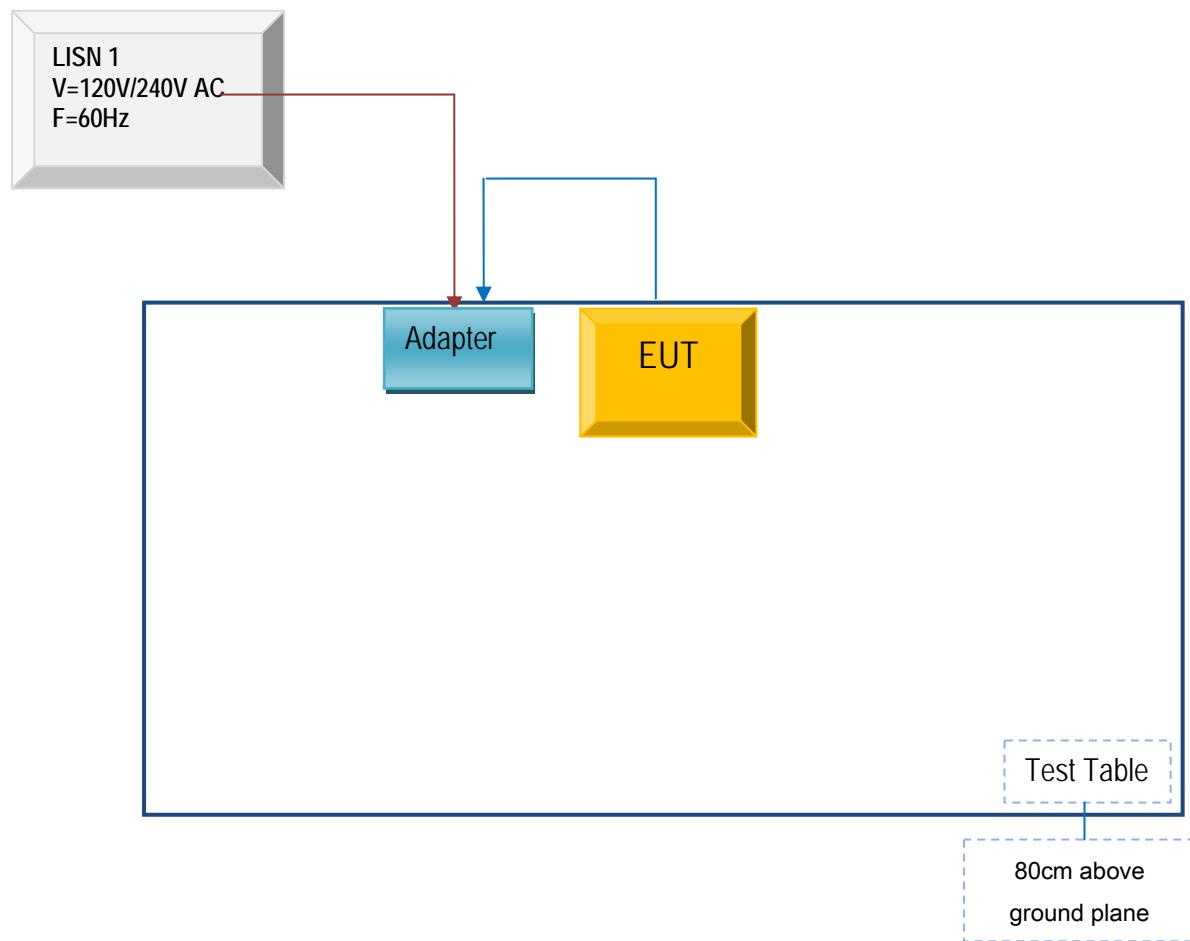

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

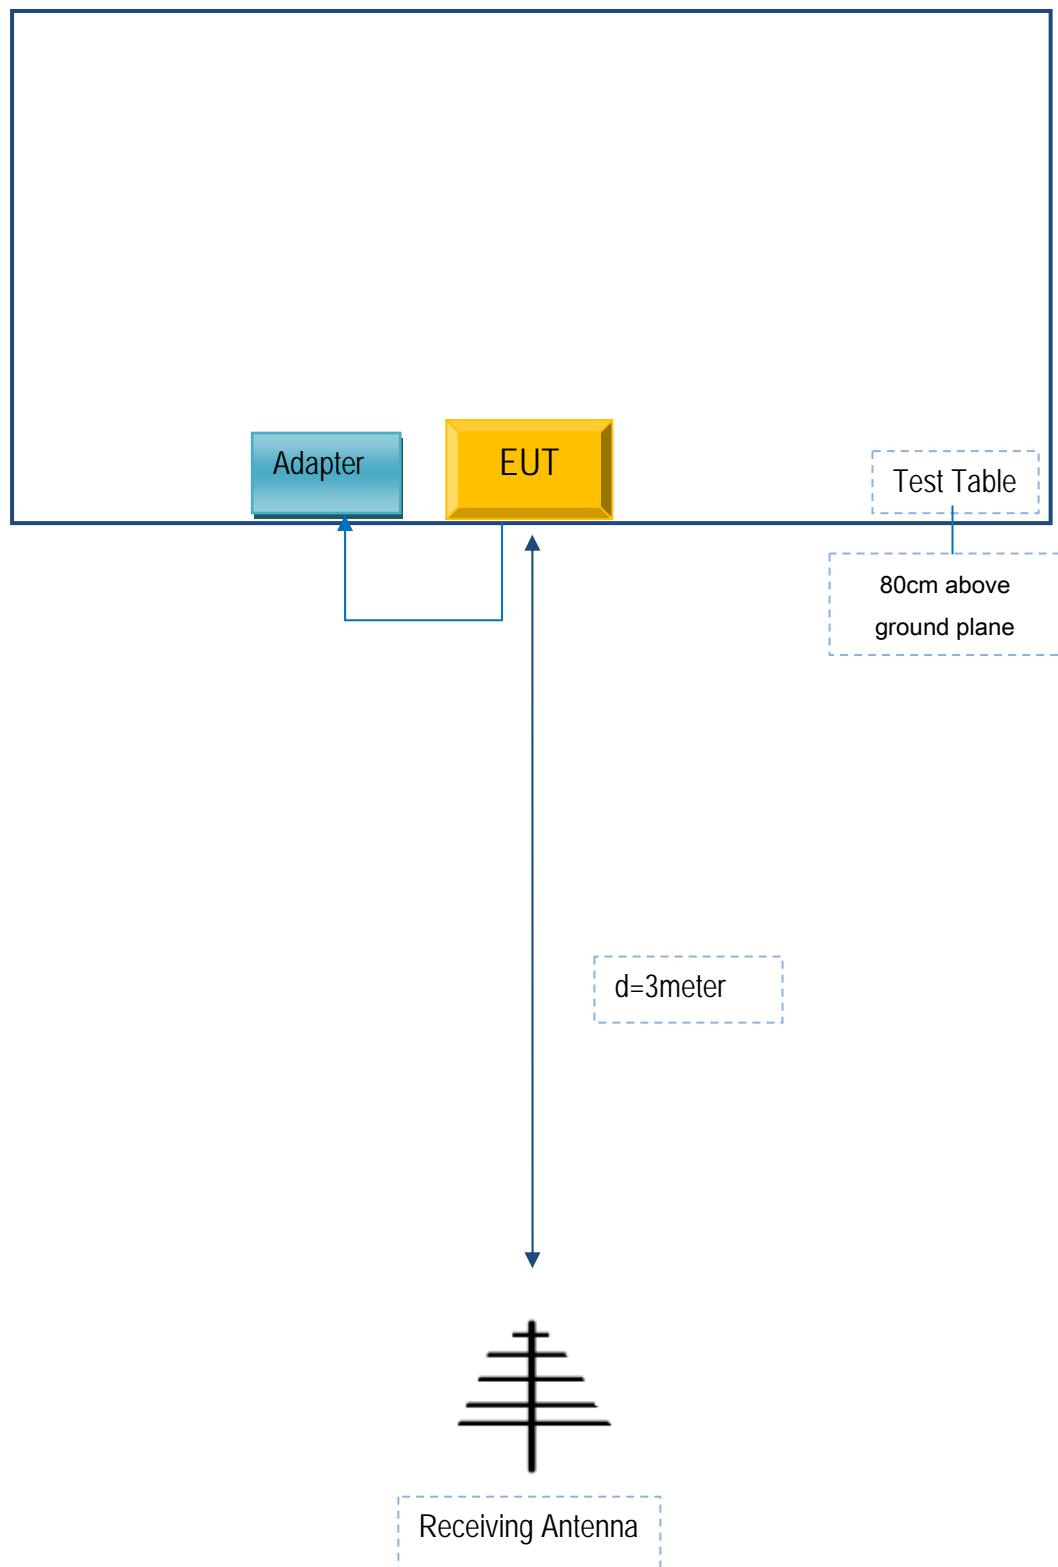

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

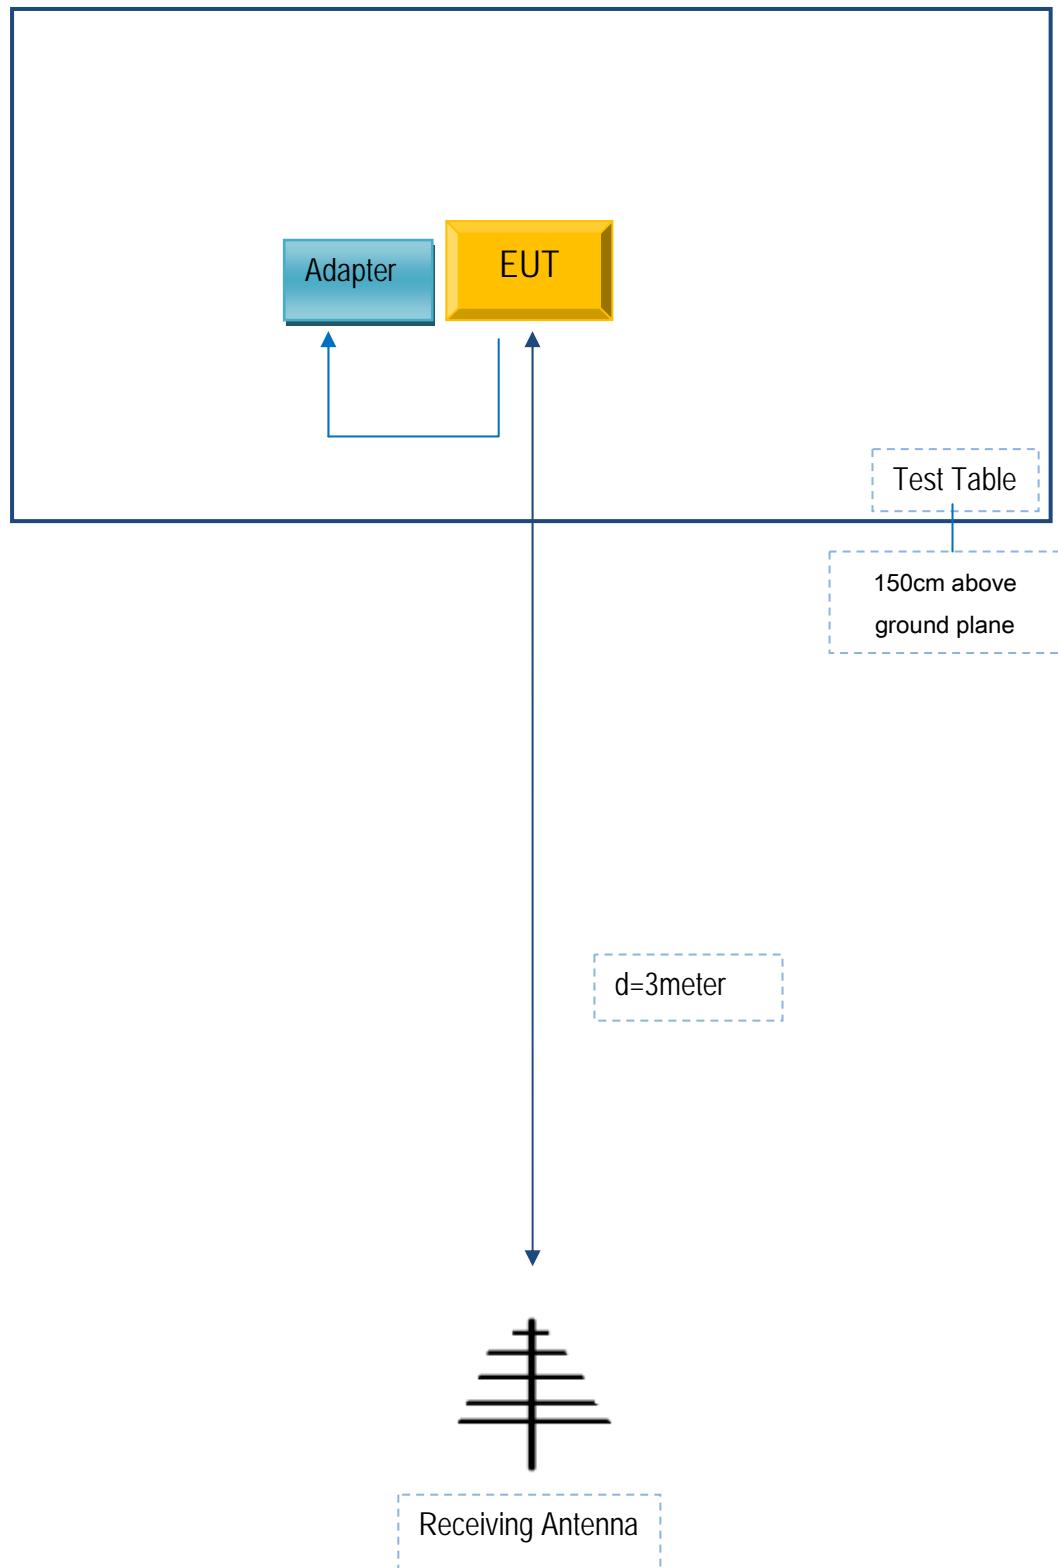

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
SMT TELECOMM HK LIMITED	Adapter	PC444	X444

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	X444

Test Report No.	16070720-FCC-R3
Page	55 of 56

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report No.	16070720-FCC-R3
Page	56 of 56

Annex E. DECLARATION OF SIMILARITY

N/A