

# FCC and ISED CERTIFICATION TEST REPORT

Report No.: DDT-B25020806-9E02

|                             |   |                                                                                                                                          |
|-----------------------------|---|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant</b>            | : | Beijing Xiaomi Electronics Co., Ltd                                                                                                      |
| <b>Address</b>              | : | Room 802, Floor 8, Building 5, No.15 KeChuang<br>10th Road, Beijing Economic and Technological<br>Development Zone, Beijing City, China. |
| <b>Equipment under Test</b> | : | Xiaomi Sound Party                                                                                                                       |
| <b>Model No.</b>            | : | MDZ-39-DB                                                                                                                                |
| <b>Trade Mark</b>           | : | XIAOMI; Xiaomi;                                        |
| <b>FCC ID</b>               | : | 2AIMR-MDZ39DB                                                                                                                            |
| <b>IC</b>                   | : | 25940-MDZ39DB                                                                                                                            |
| <b>Manufacturer</b>         | : | Beijing Xiaomi Electronics Co., Ltd                                                                                                      |
| <b>Address</b>              | : | Room 802, Floor 8, Building 5, No.15 KeChuang<br>10th Road, Beijing Economic and Technological<br>Development Zone, Beijing City, China. |

**Issued By:** Tianjin Dongdian Testing Service Co., Ltd.

**Address:** Building D-1, No. 29, Weisi Road, Microelectronics Industrial Park  
Development Area, Tianjin, China.

Tel: +86-22-58038033, E-mail: [info@ddt.com](mailto:info@ddt.com), <http://www.ddttest.com>



# REPORT

## Table of Contents

|      |                                                   |    |
|------|---------------------------------------------------|----|
| 1.   | Summary of Test Results .....                     | 7  |
| 2.   | General Test Information.....                     | 8  |
| 2.1. | Description of EUT .....                          | 8  |
| 2.2. | Accessories of EUT .....                          | 9  |
| 2.3. | Block diagram of EUT configuration for test ..... | 9  |
| 2.4. | Decision of final test mode .....                 | 9  |
| 2.5. | Deviations of test standard .....                 | 10 |
| 2.6. | Test environment conditions .....                 | 10 |
| 2.7. | Test laboratory .....                             | 10 |
| 2.8. | Measurement uncertainty .....                     | 11 |
| 3.   | Equipment Used During Conductive Test .....       | 12 |
| 4.   | 20 dB Bandwidth .....                             | 13 |
| 4.1. | Block diagram of test setup .....                 | 13 |
| 4.2. | Limits.....                                       | 13 |
| 4.3. | Test procedure .....                              | 13 |
| 4.4. | Test result .....                                 | 14 |
| 4.5. | Test graphs .....                                 | 14 |
| 5.   | 99% Bandwidth .....                               | 19 |
| 5.1. | Block diagram of test setup .....                 | 19 |
| 5.2. | Limits.....                                       | 19 |
| 5.3. | Test procedure .....                              | 19 |
| 5.4. | Test result .....                                 | 20 |
| 5.5. | Test graphs .....                                 | 20 |
| 6.   | Maximum Peak Output Power.....                    | 25 |
| 6.1. | Block diagram of test setup .....                 | 25 |
| 6.2. | Limits.....                                       | 25 |
| 6.3. | Test procedure .....                              | 25 |
| 6.4. | Test result .....                                 | 26 |
| 6.5. | Test graphs .....                                 | 26 |
| 7.   | Carrier Frequency Separation .....                | 31 |
| 7.1. | Block diagram of test setup .....                 | 31 |
| 7.2. | Limits.....                                       | 31 |
| 7.3. | Test procedure .....                              | 31 |
| 7.4. | Test result .....                                 | 32 |
| 7.5. | Test graphs .....                                 | 32 |
| 8.   | Dwell Time .....                                  | 34 |

|       |                                               |     |
|-------|-----------------------------------------------|-----|
| 8.1.  | Block diagram of test setup .....             | 34  |
| 8.2.  | Limits .....                                  | 34  |
| 8.3.  | Test procedure .....                          | 34  |
| 8.4.  | Test result .....                             | 35  |
| 8.5.  | Test graphs .....                             | 35  |
| 9.    | Number of Hopping Channel .....               | 45  |
| 9.1.  | Block diagram of test setup .....             | 45  |
| 9.2.  | Limits .....                                  | 45  |
| 9.3.  | Test procedure .....                          | 45  |
| 9.4.  | Test result .....                             | 46  |
| 9.5.  | Test graphs .....                             | 46  |
| 10.   | Band Edge Compliance (Conducted Method) ..... | 48  |
| 10.1. | Block diagram of test setup .....             | 48  |
| 10.2. | Limit .....                                   | 48  |
| 10.3. | Test procedure .....                          | 48  |
| 10.4. | Test result .....                             | 49  |
| 10.5. | Test graphs .....                             | 49  |
| 11.   | RF Conducted Spurious Emissions .....         | 62  |
| 11.1. | Block diagram of test setup .....             | 62  |
| 11.2. | Limits .....                                  | 62  |
| 11.3. | Test procedure .....                          | 62  |
| 11.4. | Test result .....                             | 63  |
| 11.5. | Test graphs .....                             | 63  |
| 12.   | Antenna Requirements .....                    | 73  |
| 12.1. | Limit .....                                   | 73  |
| 12.2. | Result .....                                  | 73  |
| 13.   | Radiated Emission .....                       | 74  |
| 13.1. | Block diagram of test setup .....             | 74  |
| 13.2. | Limits .....                                  | 75  |
| 13.3. | Test procedure .....                          | 77  |
| 13.4. | Test result .....                             | 78  |
| 14.   | Band Edge Compliance .....                    | 95  |
| 14.1. | Block diagram of test setup .....             | 95  |
| 14.2. | Limits .....                                  | 95  |
| 14.3. | Test procedure .....                          | 95  |
| 14.4. | Test result .....                             | 95  |
| 15.   | Power Line Conducted Emissions .....          | 108 |
| 15.1. | Block diagram of test setup .....             | 108 |

|       |                             |     |
|-------|-----------------------------|-----|
| 15.2. | Limits.....                 | 108 |
| 15.3. | Test procedure .....        | 108 |
| 15.4. | Test result .....           | 109 |
| 16.   | Test Setup Photograph ..... | 110 |
| 17.   | Photos of the EUT .....     | 111 |

## Test Report Declare

|                             |   |                                                                                                                                          |
|-----------------------------|---|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant</b>            | : | Beijing Xiaomi Electronics Co., Ltd                                                                                                      |
| <b>Address</b>              | : | Room 802, Floor 8, Building 5, No.15 KeChuang 10th Road,<br>Beijing Economic and Technological Development Zone, Beijing<br>City, China. |
| <b>Equipment under Test</b> | : | Xiaomi Sound Party                                                                                                                       |
| <b>Model No.</b>            | : | MDZ-39-DB                                                                                                                                |
| <b>Trade Mark</b>           | : | XIAOMI; Xiaomi;                                        |
| <b>Manufacturer</b>         | : | Beijing Xiaomi Electronics Co., Ltd                                                                                                      |
| <b>Address</b>              | : | Room 802, Floor 8, Building 5, No.15 KeChuang 10th Road,<br>Beijing Economic and Technological Development Zone, Beijing<br>City, China. |

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023.

RSS-Gen Issue 5, Apr. 2018

### Test Procedure Used:

ANSI C63.10:2020,

### We Declare:

The equipment described above is tested by Tianjin Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

|                         |                    |                      |                               |
|-------------------------|--------------------|----------------------|-------------------------------|
| <b>Report No.:</b>      | DDT-B25020806-9E02 |                      |                               |
| <b>Date of Receipt:</b> | Feb. 11, 2025      | <b>Date of Test:</b> | Feb. 11, 2025 ~ Feb. 20, 2025 |

**Prepared By:**

Novak Wei

**Novak Wei/Engineer**

**Approved By:**

Aaron Zhang

**Aaron Zhang/Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

## Revision History

| Rev. | Revisions     | Issue Date    | Revised By |
|------|---------------|---------------|------------|
| ---  | Initial issue | Mar. 01, 2025 |            |
|      |               |               |            |

## 1. Summary of Test Results

| No.                                                                                                                                              | Test Parameter                  | Clause No.                                                                                                                                                    | Condition | Result |
|--------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------|
| 1                                                                                                                                                | Maximum Peak Output Power       | FCC Part 15: 15.247(b)(1)<br>RSS-247 Issue 3 clause 5.4(b)                                                                                                    | /         | Pass   |
| 2                                                                                                                                                | 20 dB Bandwidth                 | FCC Part 15: 15.247(a)(1)<br>RSS-247 Issue 3 clause 5.1(a)                                                                                                    | /         | Pass   |
| 4                                                                                                                                                | Carrier Frequency Separation    | FCC Part 15: 15.247(a)(1)<br>RSS-247 Issue 3 clause 5.1(b)                                                                                                    | /         | Pass   |
| 5                                                                                                                                                | Number of Hopping Channel       | FCC Part 15: 15.247(a)(1)(iii)<br>RSS-247 Issue 3 clause 5.1(d)                                                                                               | /         | Pass   |
| 6                                                                                                                                                | Dwell Time                      | FCC Part 15: 15.247(a)(1)(iii)<br>RSS-247 Issue 3 clause 5.1(d)                                                                                               | /         | Pass   |
| 7                                                                                                                                                | RF Conducted Spurious Emissions | FCC Part 15: 15.247(d)<br>RSS-247 Issue 3 clause 5.5                                                                                                          | /         | Pass   |
| 8                                                                                                                                                | Radiated Emission               | FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d)<br>RSS-247 Issue 3 clause 5.5,<br>RSS-Gen Issue 5 clause 8.9,<br>RSS-Gen Issue 5 clause 8.10 | /         | Pass   |
| 9                                                                                                                                                | Band Edge Compliance            | FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d)<br>RSS-247 Issue 3 clause 5.5,<br>RSS-Gen Issue 5 clause 8.9,<br>RSS-Gen Issue 5 clause 8.10 | /         | Pass   |
| 10                                                                                                                                               | Antenna Requirement             | FCC Part 15: 15.203<br>RSS-Gen Issue 5 clause 6.8                                                                                                             | /         | Pass   |
| 11                                                                                                                                               | Power Line Conducted Emissions  | FCC Part 15: 15.207(a)<br>RSS-Gen Issue 5 clause 8.8                                                                                                          | /         | Pass   |
| Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard. |                                 |                                                                                                                                                               |           |        |

## 2. General Test Information

### 2.1. Description of EUT

|                          |                                              |
|--------------------------|----------------------------------------------|
| EUT Name                 | : Xiaomi Sound Party                         |
| Model Number             | : MDZ-39-DB                                  |
| EUT Function Description | : Please refer to user manual of this device |
| Power Supply             | : DC 7.3 V by internal battery               |
| Radio Specification      | : Bluetooth V5.4                             |
| Operation Frequency      | : 2402 MHz - 2480 MHz                        |
| Modulation               | : GFSK, $\pi/4$ -DQPSK, 8DPSK                |
| Data Rate                | : 1 Mbps, 2 Mbps, 3 Mbps,                    |
| Antenna Type             | : PCB antenna, maximum PK gain: 2.73 dBi     |
| Sample Number            | : N/A                                        |

| Channel information |                 |         |                 |         |                 |
|---------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel             | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 0                   | 2402            | 27      | 2429            | 54      | 2456            |
| 1                   | 2403            | 28      | 2430            | 55      | 2457            |
| 2                   | 2404            | 29      | 2431            | 56      | 2458            |
| 3                   | 2405            | 30      | 2432            | 57      | 2459            |
| 4                   | 2406            | 31      | 2433            | 58      | 2460            |
| 5                   | 2407            | 32      | 2434            | 59      | 2461            |
| 6                   | 2408            | 33      | 2435            | 60      | 2462            |
| 7                   | 2409            | 34      | 2436            | 61      | 2463            |
| 8                   | 2410            | 35      | 2437            | 62      | 2464            |
| 9                   | 2411            | 36      | 2438            | 63      | 2465            |
| 10                  | 2412            | 37      | 2439            | 64      | 2466            |
| 11                  | 2413            | 38      | 2440            | 65      | 2467            |
| 12                  | 2414            | 39      | 2441            | 66      | 2468            |
| 13                  | 2415            | 40      | 2442            | 67      | 2469            |
| 14                  | 2416            | 41      | 2443            | 68      | 2470            |
| 15                  | 2417            | 42      | 2444            | 69      | 2471            |
| 16                  | 2418            | 43      | 2445            | 70      | 2472            |
| 17                  | 2419            | 44      | 2446            | 71      | 2473            |
| 18                  | 2420            | 45      | 2447            | 72      | 2474            |
| 19                  | 2421            | 46      | 2448            | 73      | 2475            |
| 20                  | 2422            | 47      | 2449            | 74      | 2476            |
| 21                  | 2423            | 48      | 2450            | 75      | 2477            |
| 22                  | 2424            | 49      | 2451            | 76      | 2478            |
| 23                  | 2425            | 50      | 2452            | 77      | 2479            |



|    |      |    |      |    |      |
|----|------|----|------|----|------|
| 24 | 2426 | 51 | 2453 | 78 | 2480 |
| 25 | 2427 | 52 | 2454 |    |      |
| 26 | 2428 | 53 | 2455 |    |      |

## 2.2. Accessories of EUT

| Accessories | Manufacturer | Model number | Description | Other |
|-------------|--------------|--------------|-------------|-------|
| N/A         | N/A          | N/A          | N/A         | N/A   |

## 2.3. Block diagram of EUT configuration for test

EUT

## 2.4. Decision of final test mode

Test software: FCC\_assist\_1.0.2.2

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

| Tested mode, channel, information                                                       |                  |             |                 |
|-----------------------------------------------------------------------------------------|------------------|-------------|-----------------|
| Mode                                                                                    | Setting Tx Power | Channel     | Frequency (MHz) |
| GFSK hopping on Tx mode                                                                 | 10               | CH0 to CH78 | 2402 to 2480    |
| $\pi/4$ -DQPSK hopping on Tx mode                                                       | 10               | CH0 to CH78 | 2402 to 2480    |
| 8DPSK hopping on Tx mode                                                                | 10               | CH0 to CH78 | 2402 to 2480    |
| GFSK hopping off Tx mode                                                                | 10               | CH0         | 2402            |
|                                                                                         | 10               | CH39        | 2441            |
|                                                                                         | 10               | CH78        | 2480            |
| $\pi/4$ -DQPSK hopping off Tx mode                                                      | 10               | CH0         | 2402            |
|                                                                                         | 10               | CH39        | 2441            |
|                                                                                         | 10               | CH78        | 2480            |
| 8DPSK hopping off Tx mode                                                               | 10               | CH0         | 2402            |
|                                                                                         | 10               | CH39        | 2441            |
|                                                                                         | 10               | CH78        | 2480            |
| Worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5 |                  |             |                 |

## 2.5. Deviations of test standard

No deviation.

## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |                   |
|--------------------|-------------------|
| Temperature range: | +21°C to +25 °C   |
| Humidity range:    | 25% to 75%        |
| Pressure range:    | 86 kPa to 106 kPa |

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

## 2.7. Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com)

**NVLAP** (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

**CNAS** (China National Accreditation Service for Conformity Assessment) CODE: L13402

**FCC** Designation Number: CN5004; FCC Test Firm Registration Number: 368676

**ISED** (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

**VCCI** Facility Registration Number: C-20089, T-20093, R-20125, G-20122

## 2.8. Measurement uncertainty


| Test Item                                                                                                                                     | Uncertainty                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bandwidth                                                                                                                                     | 0.14%                                                                                                                                                                  |
| Peak Output Power (Conducted) (Spectrum Analyzer)                                                                                             | 0.12 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ );<br>0.32 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )                                                         |
| Peak Output Power (Conducted) (Power Sensor)                                                                                                  | 0.51 dB                                                                                                                                                                |
| Power Spectral Density                                                                                                                        | 0.12 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ );<br>0.32 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )                                                         |
| Frequencies Stability                                                                                                                         | $6.7 \times 10^{-8}$ (Antenna couple method)<br>$3.4 \times 10^{-8}$ (Conducted method)                                                                                |
| Conducted Spurious Emissions                                                                                                                  | 0.12 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ );<br>0.32 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ );<br>0.52 dB ( $8 \text{ GHz} \leq f < 22 \text{ GHz}$ ) |
| Uncertainty for Radio Frequency (RBW < 20 kHz)                                                                                                | $3 \times 10^{-7}$                                                                                                                                                     |
| Temperature                                                                                                                                   | $\pm 2^{\circ}\text{C}$                                                                                                                                                |
| Humidity                                                                                                                                      | $\pm 1\%$                                                                                                                                                              |
| Uncertainty for Radiation Emission Test<br>(30 MHz - 1 GHz)                                                                                   | 2.72 dB (Antenna Polarize: V)<br>2.72 dB (Antenna Polarize: H)                                                                                                         |
| Uncertainty for Radiation Emission Test<br>(1 GHz - 40 GHz)                                                                                   | 2.74 dB (1 - 6 GHz)<br>2.72 dB (6 GHz - 18 GHz)<br>3.54 dB (18 GHz - 26 GHz)<br>4.30 dB (26 GHz - 40 GHz)                                                              |
| Uncertainty for Power Line Conduction Emission Test                                                                                           | 3.40 dB (150 kHz - 30 MHz)                                                                                                                                             |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |                                                                                                                                                                        |

### 3. Equipment Used During Conductive Test

| Equipment                                  | Manufacturer | Model No.      | Serial No. | Last Cal.  | Cal. Interval |
|--------------------------------------------|--------------|----------------|------------|------------|---------------|
| <b>RF Connected Test (MWRFTest system)</b> |              |                |            |            |               |
| EXG Analog Signal Generator                | Keysight     | N5173B         | MY53270968 | 2024/03/22 | 1 Year        |
| MXG Vector Signal Generator                | Keysight     | N5182A         | MY50143288 | 2024/02/21 | 1 Year        |
| PXA Signal Analyzer                        | Keysight     | N9030B         | MY56320639 | 2024/04/01 | 1 Year        |
| PXA Signal Analyzer                        | Keysight     | N9010A         | MY53281492 | 2024/02/21 | 1 Year        |
| Wideband Radio Communication Tester        | R&S          | CMW500         | 158800     | 2024/02/21 | 1 Year        |
| Power Sensor                               | KEYSIGHT     | U2021XA        | MY59150007 | 2024/02/21 | 1 Year        |
| Test Software                              | MWRFTest     | MTS8310        | V03        | N/A        | N/A           |
| <b>Radiated Emission -10m EMI Chamber</b>  |              |                |            |            |               |
| Broadband Horn Antenna                     | TESEQ        | BHA 9118       | 31754      | 2023/10/11 | 2 Year        |
| Broad Band Horn Antenna                    | Com-Power    | AHA-840        | 10100024   | 2023/10/16 | 2 Year        |
| Active Loop Antenna                        | R&S          | HFH2-Z2        | 100269     | 2024/08/25 | 2 Year        |
| Amplifier                                  | CMO-MW       | DPA8 1000 1800 | 09211739   | 2024/02/18 | 1 Year        |
| Amplifier                                  | CMO-MW       | DPA8 1000 1800 | 09211739   | 2025/02/17 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESCI           | 101024     | 2024/02/18 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESCI           | 101024     | 2025/02/17 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESCI           | 101030     | 2024/02/18 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESCI           | 101030     | 2025/02/17 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESU26          | 100244     | 2024/02/18 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESU26          | 100244     | 2025/02/17 | 1 Year        |
| EXA Signal Analyzer                        | Keysight     | N9010A         | MY53281492 | 2024/02/21 | 1 Year        |
| EXA Signal Analyzer                        | Keysight     | N9010A         | MY53281492 | 2025/02/20 | 1 Year        |
| Bilog Antenna                              | TESEQ        | CBL6112D       | 29068      | 2024/10/10 | 2 Year        |
| Bilog Antenna                              | TESEQ        | CBL6112D       | 29069      | 2024/10/10 | 2 Year        |
| Amplifier                                  | Sonoma       | 310N           | 300913     | 2024/02/18 | 1 Year        |
| Amplifier                                  | Sonoma       | 310N           | 300913     | 2025/02/17 | 1 Year        |
| Amplifier                                  | Sonoma       | 310N           | 334532     | 2024/02/18 | 1 Year        |
| Amplifier                                  | Sonoma       | 310N           | 334532     | 2025/02/17 | 1 Year        |
| Ant Mast                                   | Innco        | MA4000         | N/A        | N/A        | N/A           |
| Ant Mast                                   | Innco        | MA4000         | N/A        | N/A        | N/A           |
| Mast Controller                            | Innco        | CO2000         | N/A        | N/A        | N/A           |
| Mast Controller                            | Innco        | CO2000         | N/A        | N/A        | N/A           |
| RF Selector 4CH                            | TOYO         | NS4904N        | Selector1  | N/A        | N/A           |
| RF Selector 4CH                            | TOYO         | NS4904N        | Selector2  | N/A        | N/A           |
| Test software                              | TOYO         | EP5/RSE        | Ver 1.9.1  | N/A        | N/A           |
| Test software                              | Audix        | E3             | V 6.11111b | N/A        | N/A           |

## 4. 20 dB Bandwidth

### 4.1. Block diagram of test setup

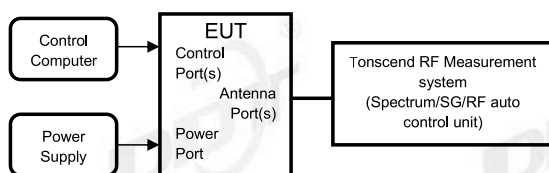

### 4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

|                |                                     |
|----------------|-------------------------------------|
| RBW:           | 1% to 5% of the OBW                 |
| VBW:           | approximately three times RBW       |
| Span:          | between 2 times and 5 times the OBW |
| Detector Mode: | Peak                                |
| Sweep time:    | Auto                                |
| Trace mode:    | Max hold                            |

- (5) Measure and record the results in the report.

#### 4.4. Test result

| Mode  | Frequency (MHz) | Antenna | -20 dB Bandwidth (MHz) | Verdict |
|-------|-----------------|---------|------------------------|---------|
| 1-DH5 | 2402            | Ant1    | 0.947                  | Pass    |
| 1-DH5 | 2441            | Ant1    | 0.945                  | Pass    |
| 1-DH5 | 2480            | Ant1    | 0.96                   | Pass    |
| 2-DH5 | 2402            | Ant1    | 1.325                  | Pass    |
| 2-DH5 | 2441            | Ant1    | 1.282                  | Pass    |
| 2-DH5 | 2480            | Ant1    | 1.31                   | Pass    |
| 3-DH5 | 2402            | Ant1    | 1.337                  | Pass    |
| 3-DH5 | 2441            | Ant1    | 1.285                  | Pass    |
| 3-DH5 | 2480            | Ant1    | 1.279                  | Pass    |

#### 4.5. Test graphs





-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1





-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1








-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1



## 5. 99% Bandwidth

### 5.1. Block diagram of test setup

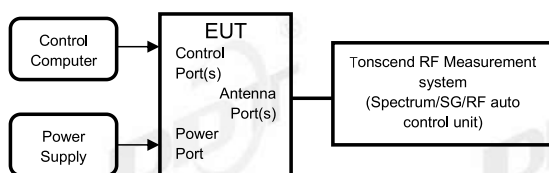

### 5.2. Limits

Just for Report.

### 5.3. Test procedure


- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

|                |                                         |
|----------------|-----------------------------------------|
| RBW:           | 1% to 5% of the OBW                     |
| VBW:           | approximately three times RBW           |
| Span:          | between 1.5 times and 5.0 times the OBW |
| Detector Mode: | Peak                                    |
| Sweep time:    | Auto                                    |
| Trace mode:    | Max hold                                |
- (5) Measure and record the results in the report.

## 5.4. Test result

| Test Mode | Antenna | Frequency [MHz] | OCB [MHz] | FL[MHz]   | FH[MHz]   |
|-----------|---------|-----------------|-----------|-----------|-----------|
| DH5       | Ant1    | 2402            | 0.88      | 2401.4330 | 2402.3480 |
|           |         | 2441            | 0.877     | 2440.4330 | 2441.3420 |
|           |         | 2480            | 0.88      | 2479.4240 | 2480.3360 |
| 2DH5      | Ant1    | 2402            | 1.179     | 2401.3100 | 2402.5070 |
|           |         | 2441            | 1.186     | 2440.3070 | 2441.4980 |
|           |         | 2480            | 1.18      | 2479.3010 | 2480.4980 |
| 3DH5      | Ant1    | 2402            | 1.185     | 2401.3100 | 2402.5040 |
|           |         | 2441            | 1.188     | 2440.2980 | 2441.4920 |
|           |         | 2480            | 1.186     | 2479.2980 | 2480.4920 |


## 5.5. Test graphs

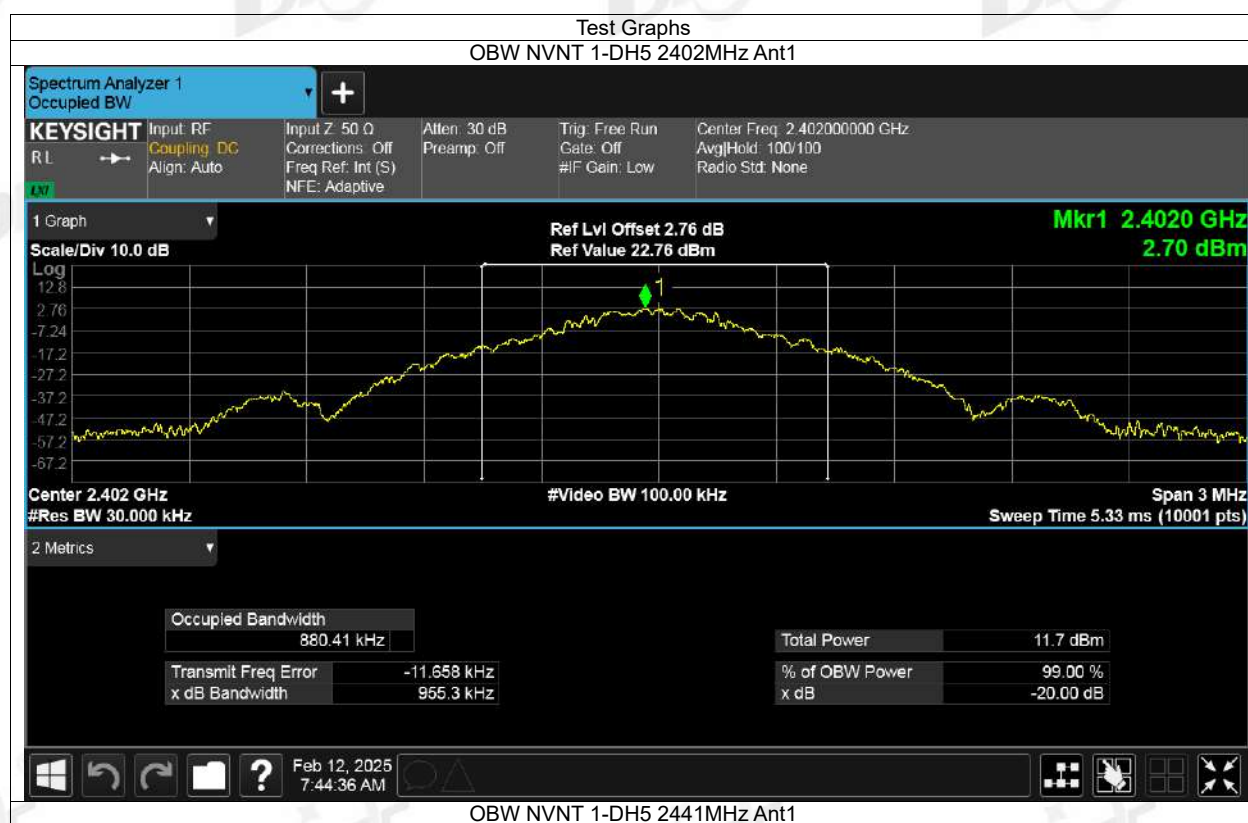






OBW NVNT 1-DH5 2480MHz Ant1

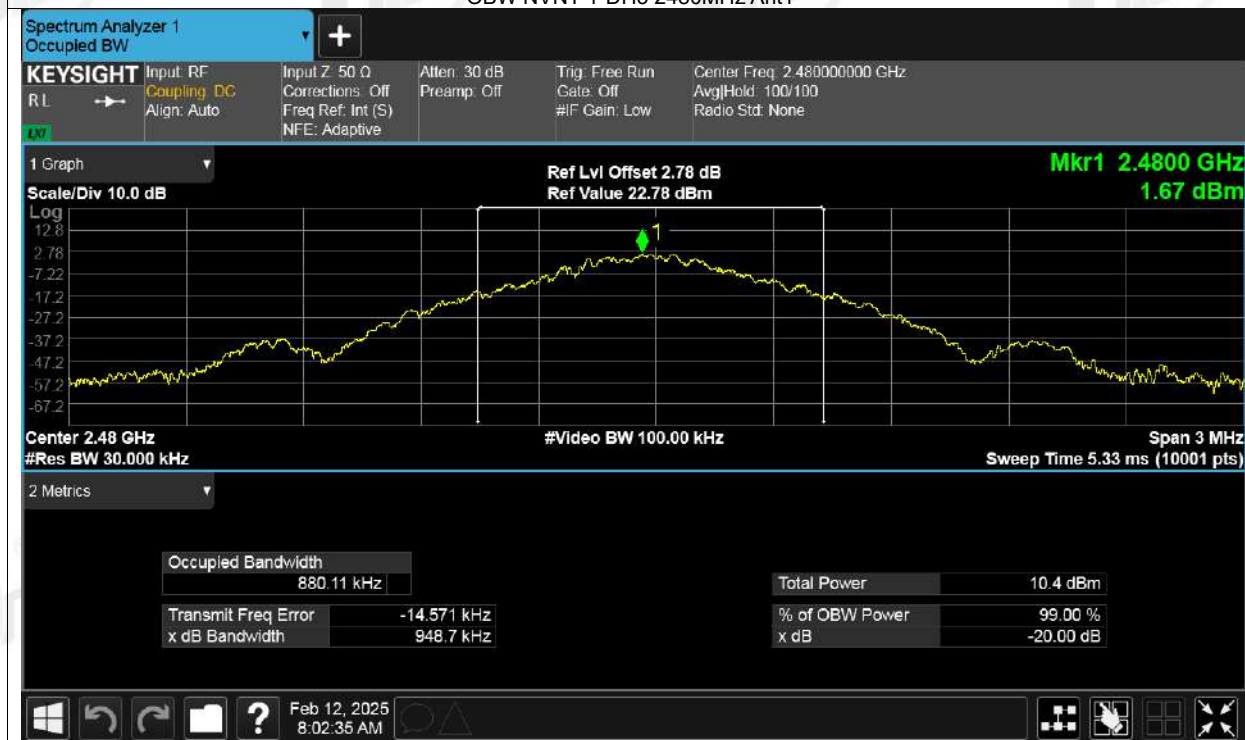

OBW NVNT 2-DH5 2402MHz Ant1




OBW NVNT 2-DH5 2441MHz Ant1

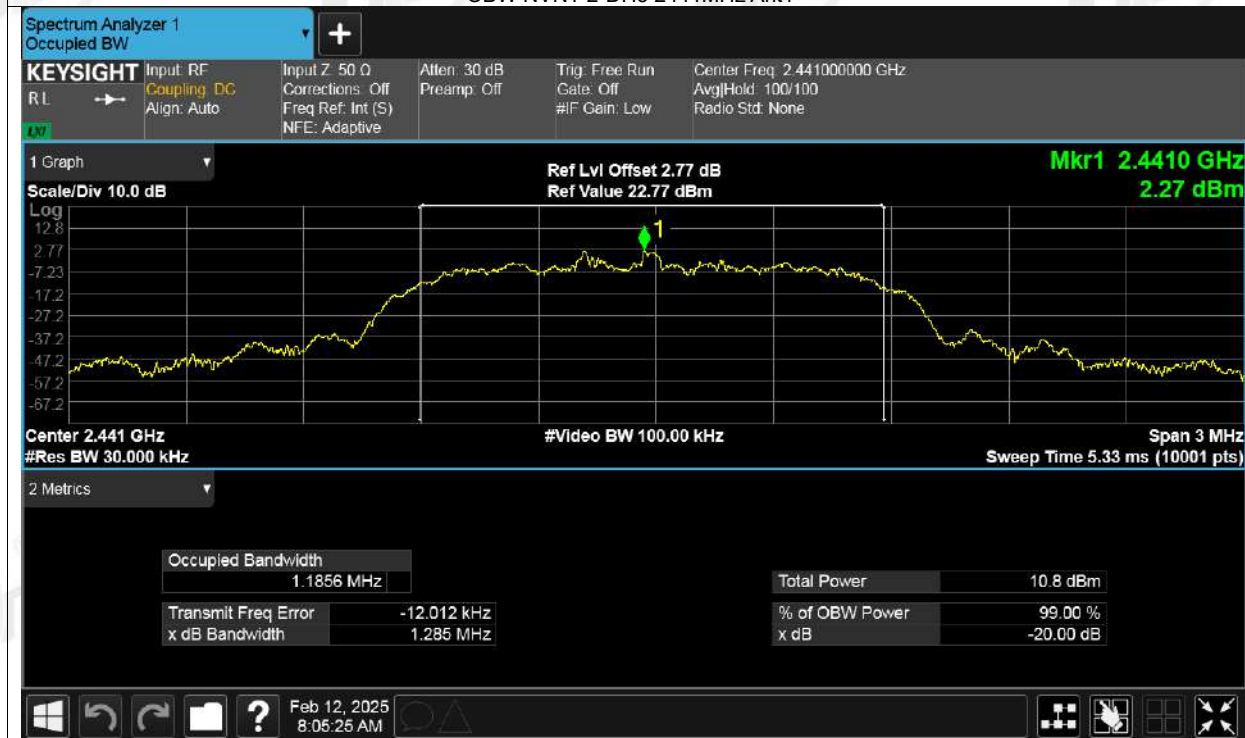

OBW NVNT 2-DH5 2480MHz Ant1



OBW NVNT 3-DH5 2402MHz Ant1

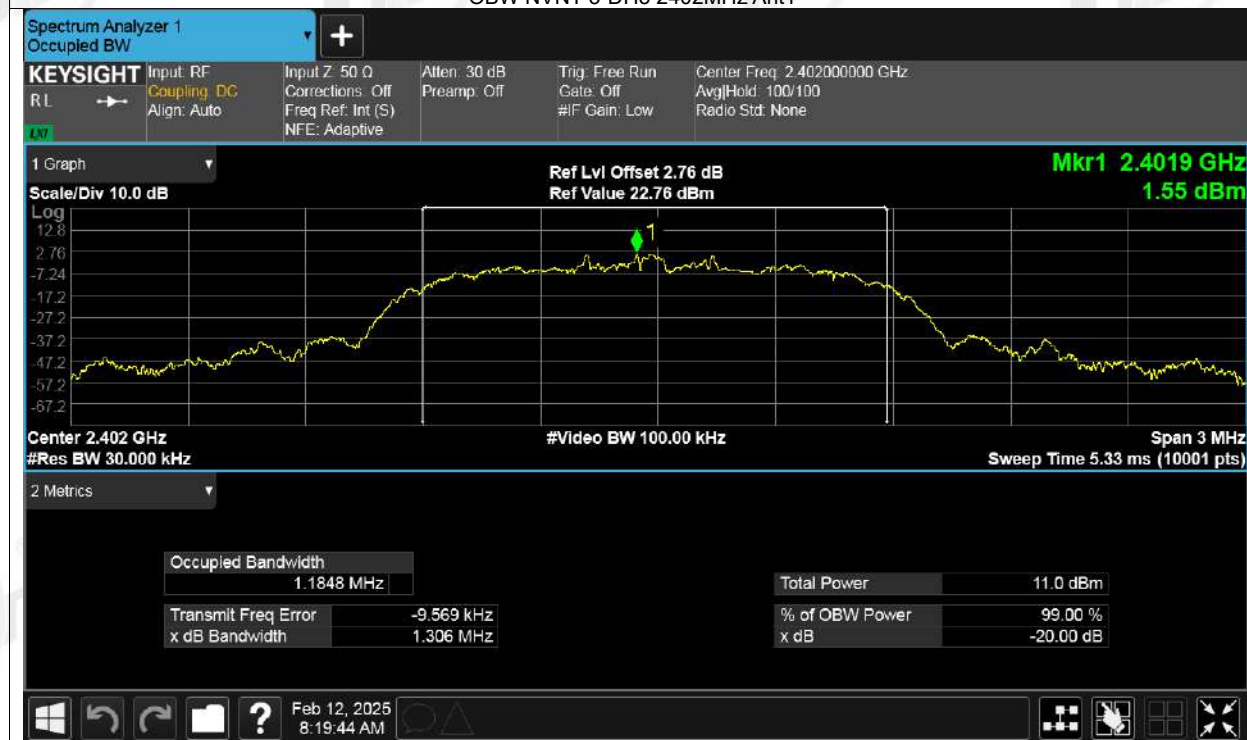


OBW NVNT 3-DH5 2441MHz Ant1






OBW NVNT 3-DH5 2480MHz Ant1

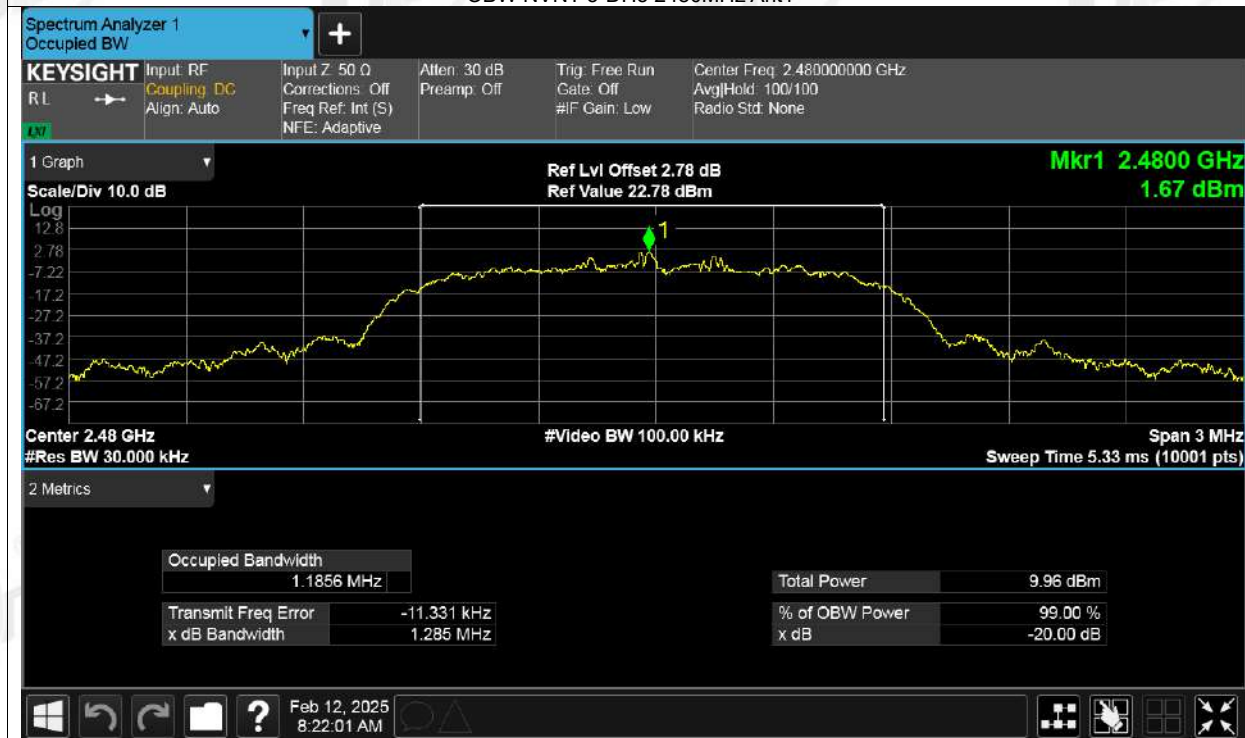

## 6. Maximum Peak Output Power

### 6.1. Block diagram of test setup

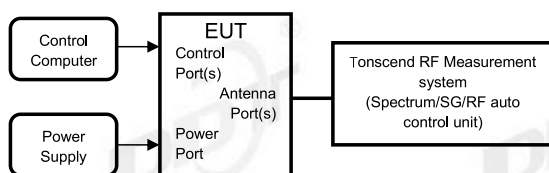

### 6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

### 6.3. Test procedure


- (1) The test according to ANSI C63.10-2013 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:
 

|                |                                                                              |
|----------------|------------------------------------------------------------------------------|
| RBW:           | > 20 dB bandwidth of the emission being measured.                            |
| VBW:           | $VBW \geq RBW$ .                                                             |
| Span:          | Approximately five times the 20 dB bandwidth, centered on a hopping channel. |
| Detector Mode: | Peak                                                                         |
| Sweep time:    | Auto                                                                         |
| Trace mode:    | Max hold                                                                     |
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.

#### 6.4. Test result

| Test Mode | Antenna | Frequency [MHz] | Conducted Peak Power[dBm] | Conducted Limit[dBm] | EIRP[dBm] | EIRP Limit[dBm] | Verdict |
|-----------|---------|-----------------|---------------------------|----------------------|-----------|-----------------|---------|
| DH5       | Ant1    | 2402            | 5.84                      | ≤20.97               | 8.57      | ≤30             | PASS    |
|           |         | 2441            | 5.33                      | ≤20.97               | 8.06      | ≤30             | PASS    |
|           |         | 2480            | 4.56                      | ≤20.97               | 7.29      | ≤30             | PASS    |
| 2DH5      | Ant1    | 2402            | 6.6                       | ≤20.97               | 9.33      | ≤30             | PASS    |
|           |         | 2441            | 6.28                      | ≤20.97               | 9.01      | ≤30             | PASS    |
|           |         | 2480            | 5.5                       | ≤20.97               | 8.23      | ≤30             | PASS    |
| 3DH5      | Ant1    | 2402            | 7.05                      | ≤20.97               | 9.78      | ≤30             | PASS    |
|           |         | 2441            | 6.73                      | ≤20.97               | 9.46      | ≤30             | PASS    |
|           |         | 2480            | 5.89                      | ≤20.97               | 8.62      | ≤30             | PASS    |

#### 6.5. Test graphs

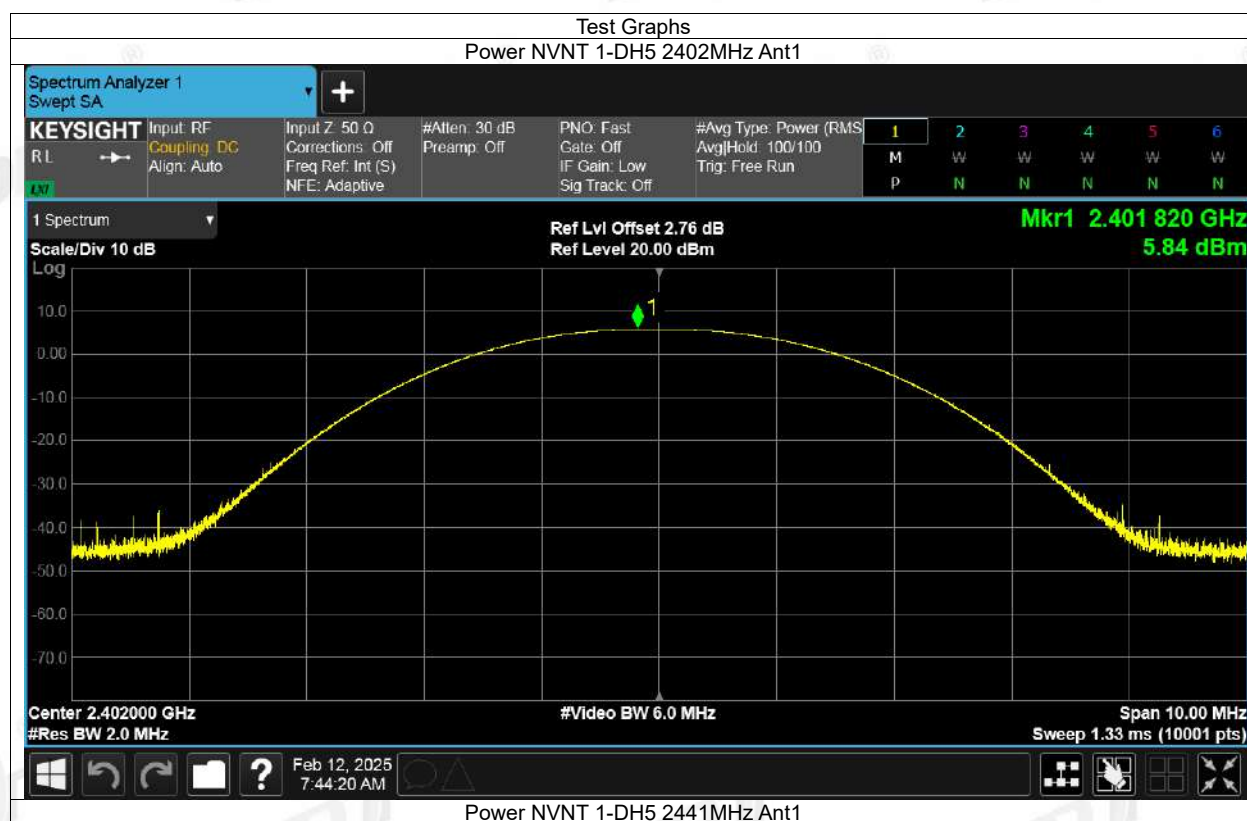



Power NVNT 1-DH5 2480MHz Ant1



Power NVNT 2-DH5 2402MHz Ant1



Power NVNT 2-DH5 2441MHz Ant1




Power NVNT 2-DH5 2480MHz Ant1





Power NVNT 3-DH5 2402MHz Ant1

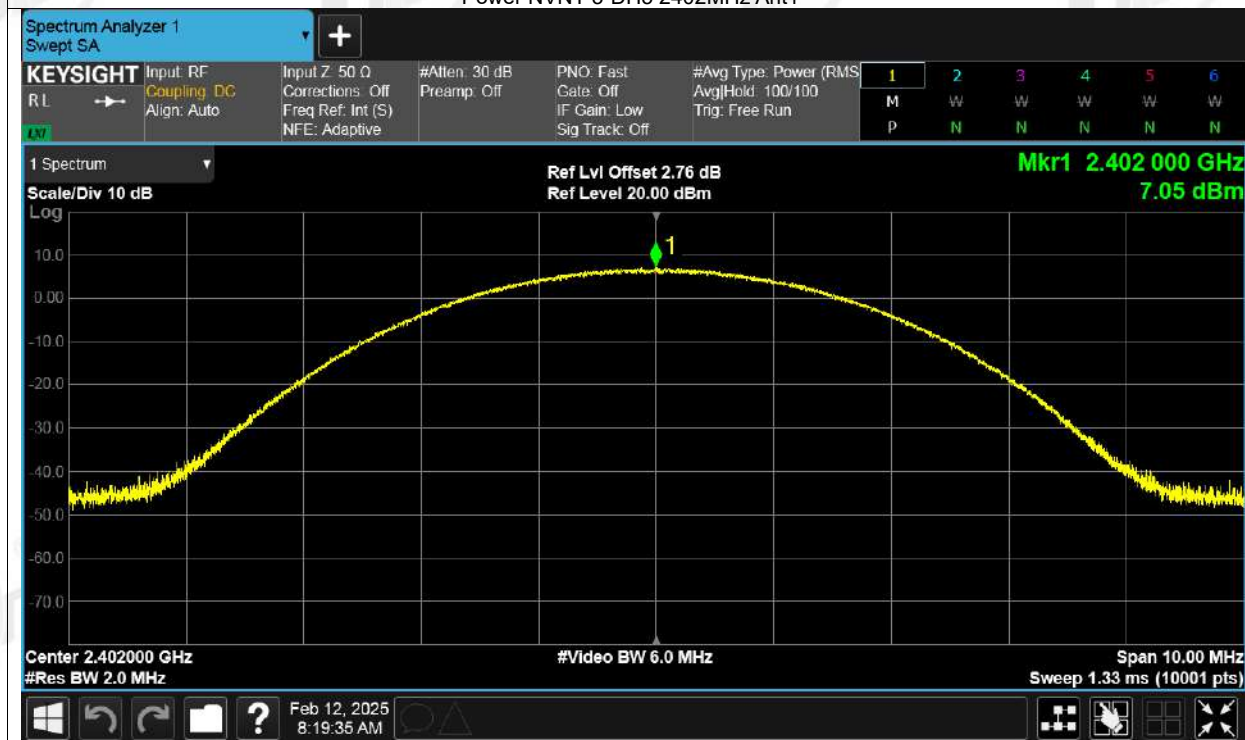


Power NVNT 3-DH5 2441MHz Ant1





## 7. Carrier Frequency Separation

### 7.1. Block diagram of test setup

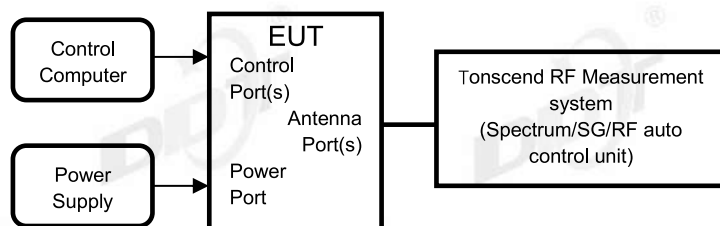

### 7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 7.3. Test procedure


- (1) The test according to ANSI C63.10-2013 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

|                |                                                            |
|----------------|------------------------------------------------------------|
| RBW:           | approximately 30% of the channel spacing                   |
| VBW:           | VBW $\geq$ RBW.                                            |
| Span:          | Wide enough to capture the peaks of two adjacent channels. |
| Detector Mode: | Peak                                                       |
| Sweep time:    | Auto                                                       |
| Trace mode:    | Max hold                                                   |
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

## 7.4. Test result

| Test Mode | Antenna | Frequency [MHz] | Result [MHz] | Limit [MHz]  | Verdict |
|-----------|---------|-----------------|--------------|--------------|---------|
| DH5       | Ant1    | Hop             | 0.977        | $\geq 0.667$ | PASS    |
| 2DH5      | Ant1    | Hop             | 0.914        | $\geq 0.880$ | PASS    |
| 3DH5      | Ant1    | Hop             | 0.997        | $\geq 0.867$ | PASS    |

## 7.5. Test graphs

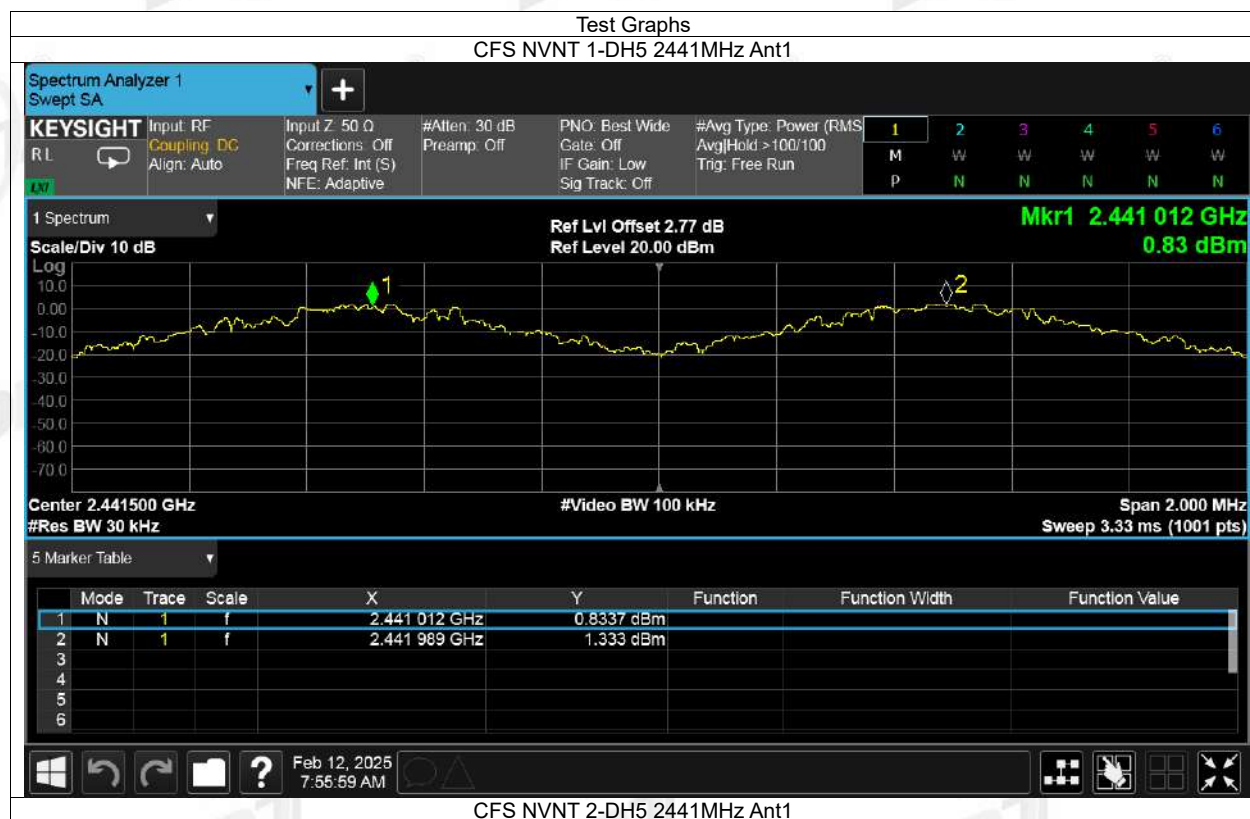




CFS NVNT 3-DH5 2441MHz Ant1



## 8. Dwell Time

### 8.1. Block diagram of test setup

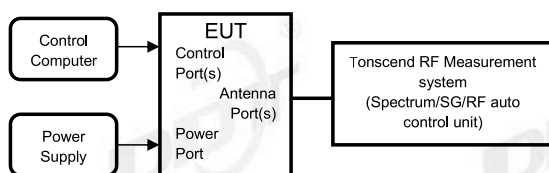

### 8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 8.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:
 


|                |                                                                         |
|----------------|-------------------------------------------------------------------------|
| RBW:           | $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$ |
| VBW:           | $VBW \geq RBW$ .                                                        |
| Span:          | Zero span, centered on a hopping channel.                               |
| Detector Mode: | Peak                                                                    |
| Sweep time:    | Auto                                                                    |
| Trace mode:    | Clear Write.                                                            |
- (5) The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops \* pulse's on time.
- (7) Measure and record the results in the report.



## 8.4. Test result

| Mode  | Frequency (MHz) | Antenna | Pulse Time (ms) | Burst Count | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-------|-----------------|---------|-----------------|-------------|-----------------------|------------------|------------|---------|
| 1-DH1 | 2441            | Ant1    | 0.382           | 318         | 121.476               | 31600            | 400        | Pass    |
| 1-DH3 | 2441            | Ant1    | 1.638           | 164         | 268.632               | 31600            | 400        | Pass    |
| 1-DH5 | 2441            | Ant1    | 2.886           | 86          | 248.196               | 31600            | 400        | Pass    |
| 2-DH1 | 2441            | Ant1    | 0.392           | 320         | 125.44                | 31600            | 400        | Pass    |
| 2-DH3 | 2441            | Ant1    | 1.644           | 150         | 246.6                 | 31600            | 400        | Pass    |
| 2-DH5 | 2441            | Ant1    | 2.892           | 104         | 300.768               | 31600            | 400        | Pass    |
| 3-DH1 | 2441            | Ant1    | 0.392           | 319         | 125.048               | 31600            | 400        | Pass    |
| 3-DH3 | 2441            | Ant1    | 1.643           | 156         | 256.308               | 31600            | 400        | Pass    |
| 3-DH5 | 2441            | Ant1    | 2.894           | 99          | 286.506               | 31600            | 400        | Pass    |

## 8.5. Test graphs

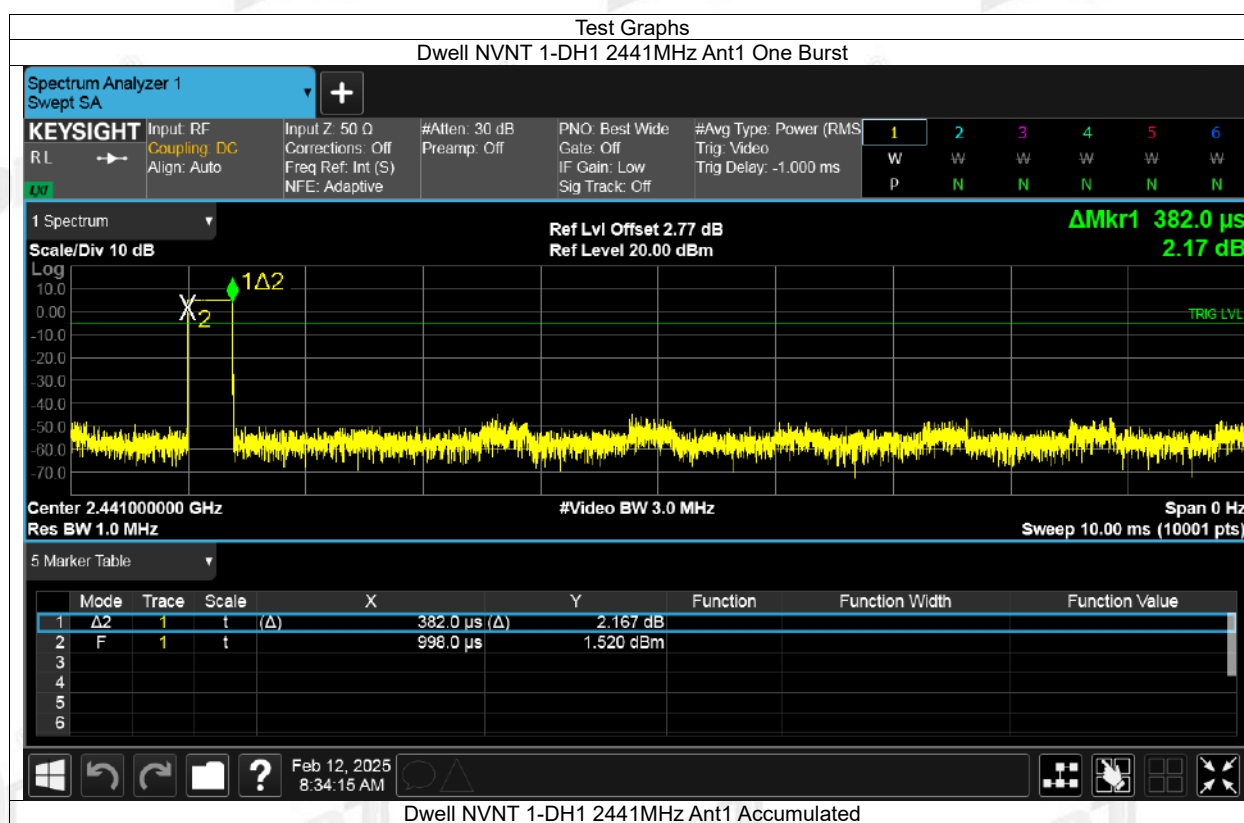























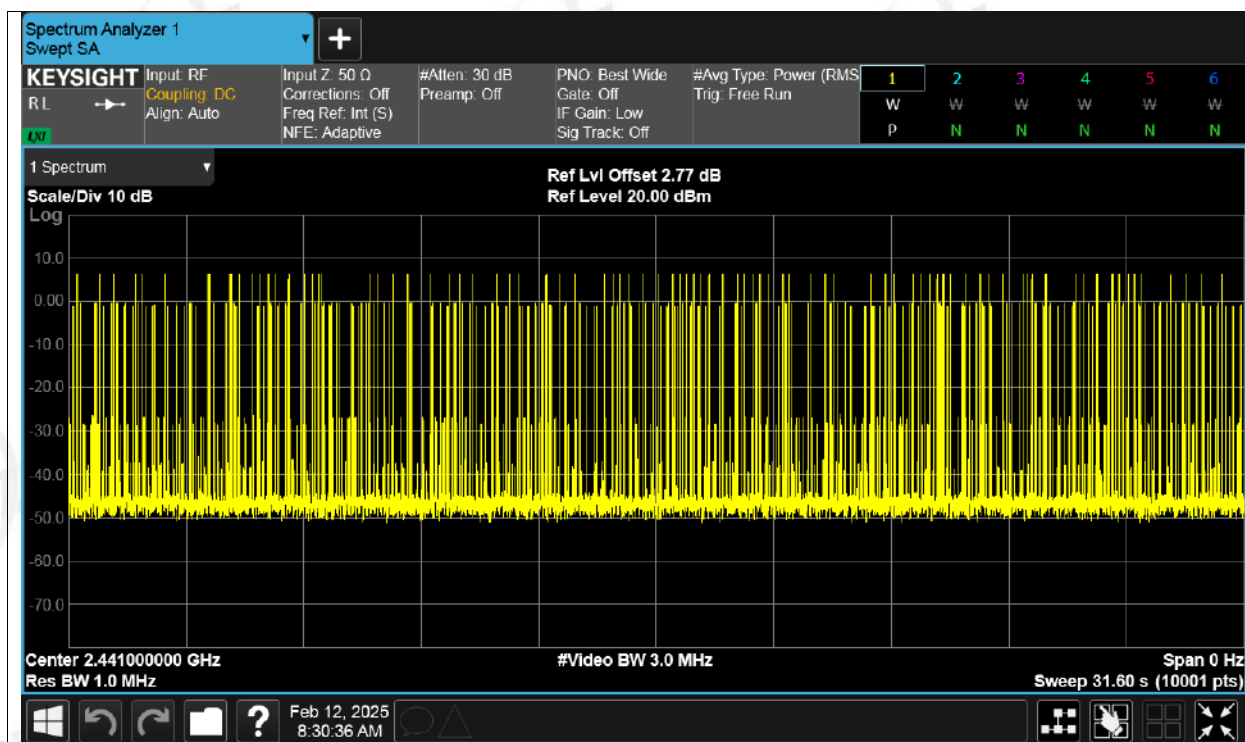

## 9. Number of Hopping Channel

### 9.1. Block diagram of test setup

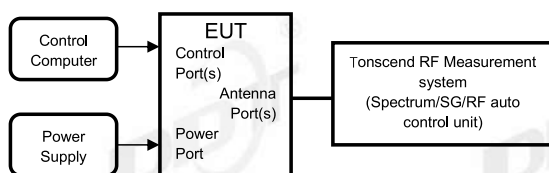

### 9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 9.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


|                |                                                                                           |
|----------------|-------------------------------------------------------------------------------------------|
| RBW:           | RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. |
| VBW:           | VBW $\geq$ RBW.                                                                           |
| Span:          | The frequency band of operation                                                           |
| Detector Mode: | Peak                                                                                      |
| Sweep time:    | Auto                                                                                      |
| Trace mode:    | Max hold                                                                                  |


- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.

## 9.4. Test result


| Test Mode | Antenna | Frequency [MHz] | Result [Num] | Limit [Num] | Verdict |
|-----------|---------|-----------------|--------------|-------------|---------|
| DH5       | Ant1    | Hop             | 79           | $\geq 15$   | PASS    |
| 2DH5      | Ant1    | Hop             | 79           | $\geq 15$   | PASS    |
| 3DH5      | Ant1    | Hop             | 79           | $\geq 15$   | PASS    |

## 9.5. Test graphs

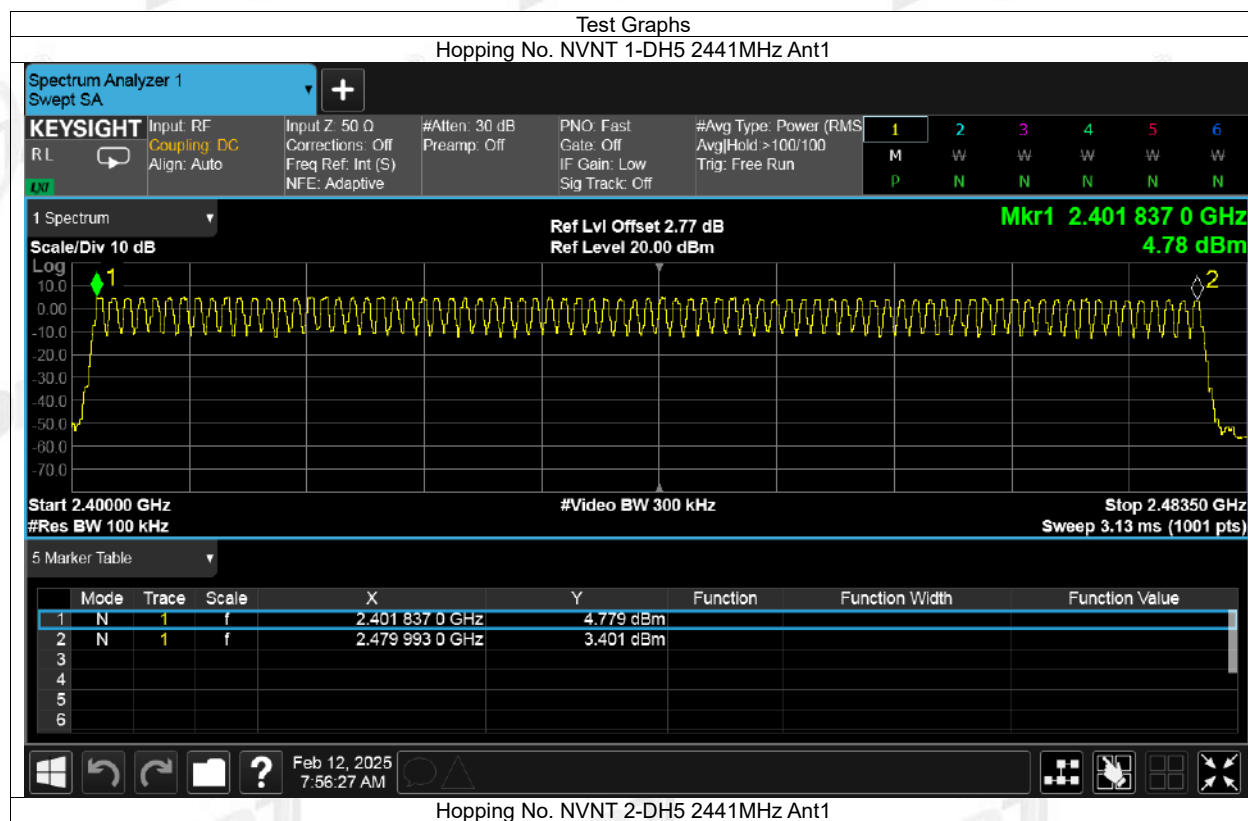

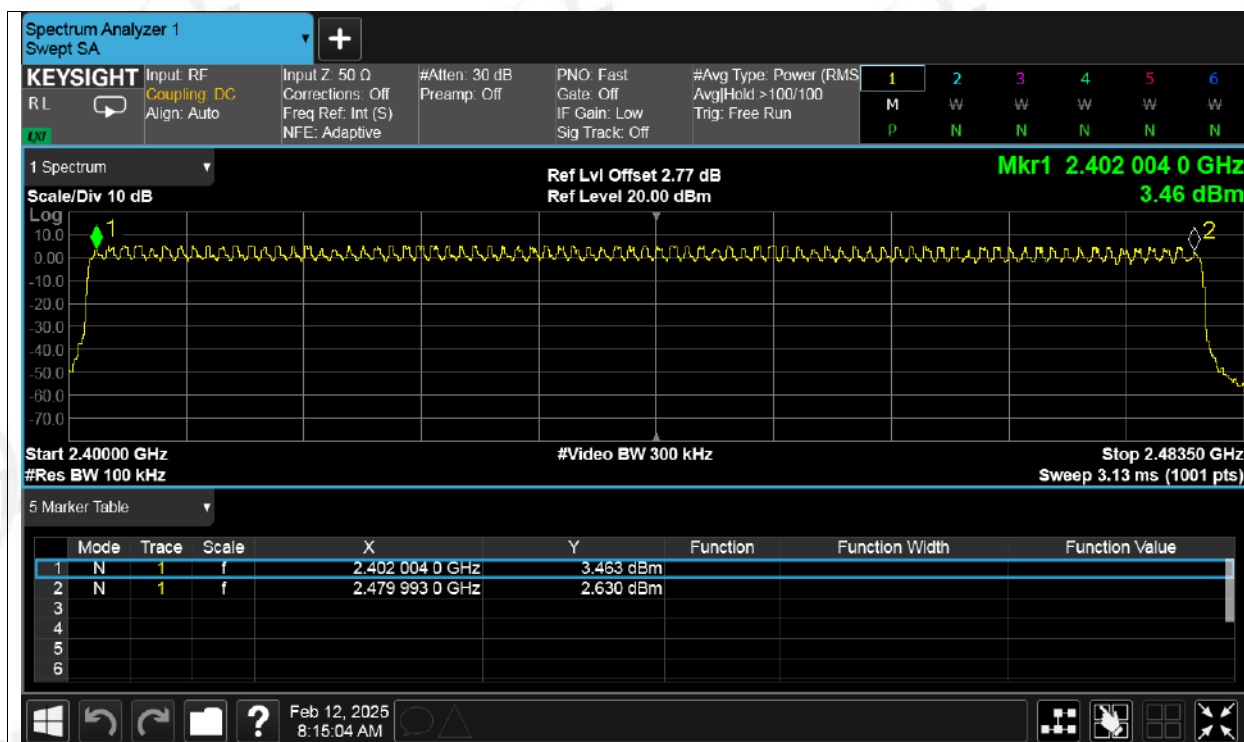


Hopping No. NVNT 3-DH5 2441MHz Ant1

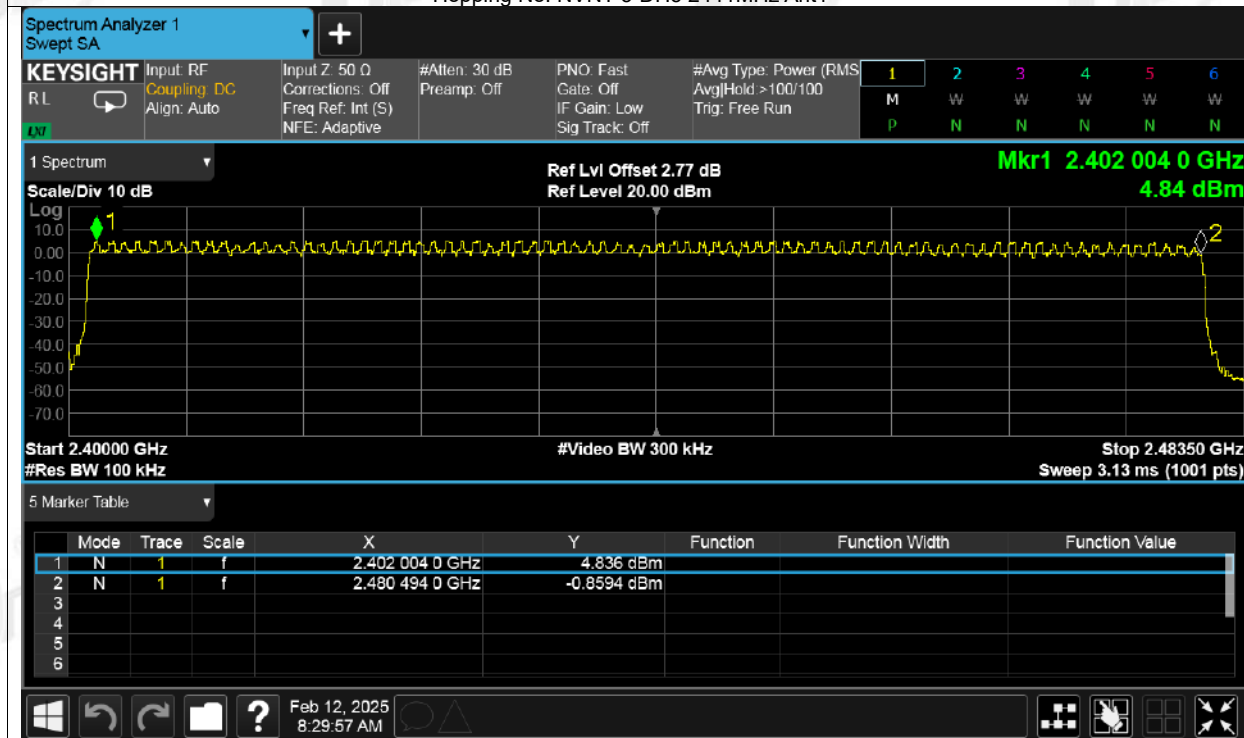



## 10. Band Edge Compliance (Conducted Method)

### 10.1. Block diagram of test setup

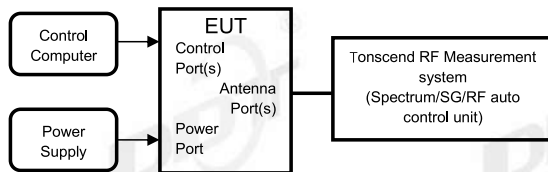

### 10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

### 10.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

|                  |                              |
|------------------|------------------------------|
| Center frequency | DTS Channel center frequency |
| RBW:             | 100 kHz                      |
| VBW:             | 300 kHz                      |
| Span             | 1.5 times the DTS bandwidth  |
| Detector Mode:   | Peak                         |
| Sweep time:      | auto                         |
| Trace mode       | Max hold                     |

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


|                              |                                          |
|------------------------------|------------------------------------------|
| RBW:                         | 100 kHz                                  |
| VBW:                         | 300 kHz                                  |
| Span                         | Encompass frequency range to be measured |
| Number of measurement points | $\geq \text{span/RBW}$                   |
| Detector Mode:               | Peak                                     |
| Sweep time:                  | auto                                     |
| Trace mode                   | Max hold                                 |


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

#### 10.4. Test result


| Mode           | Freq. (MHz)      | Verdict |
|----------------|------------------|---------|
| GFSK           | Hopping off 2402 | Pass    |
|                | Hopping off 2480 | Pass    |
|                | Hopping on       | Pass    |
| $\pi/4$ -DQPSK | Hopping off 2402 | Pass    |
|                | Hopping off 2480 | Pass    |
|                | Hopping on       | Pass    |
| 8DPSK          | Hopping off 2402 | Pass    |
|                | Hopping off 2480 | Pass    |
|                | Hopping on       | Pass    |

#### 10.5. Test graphs

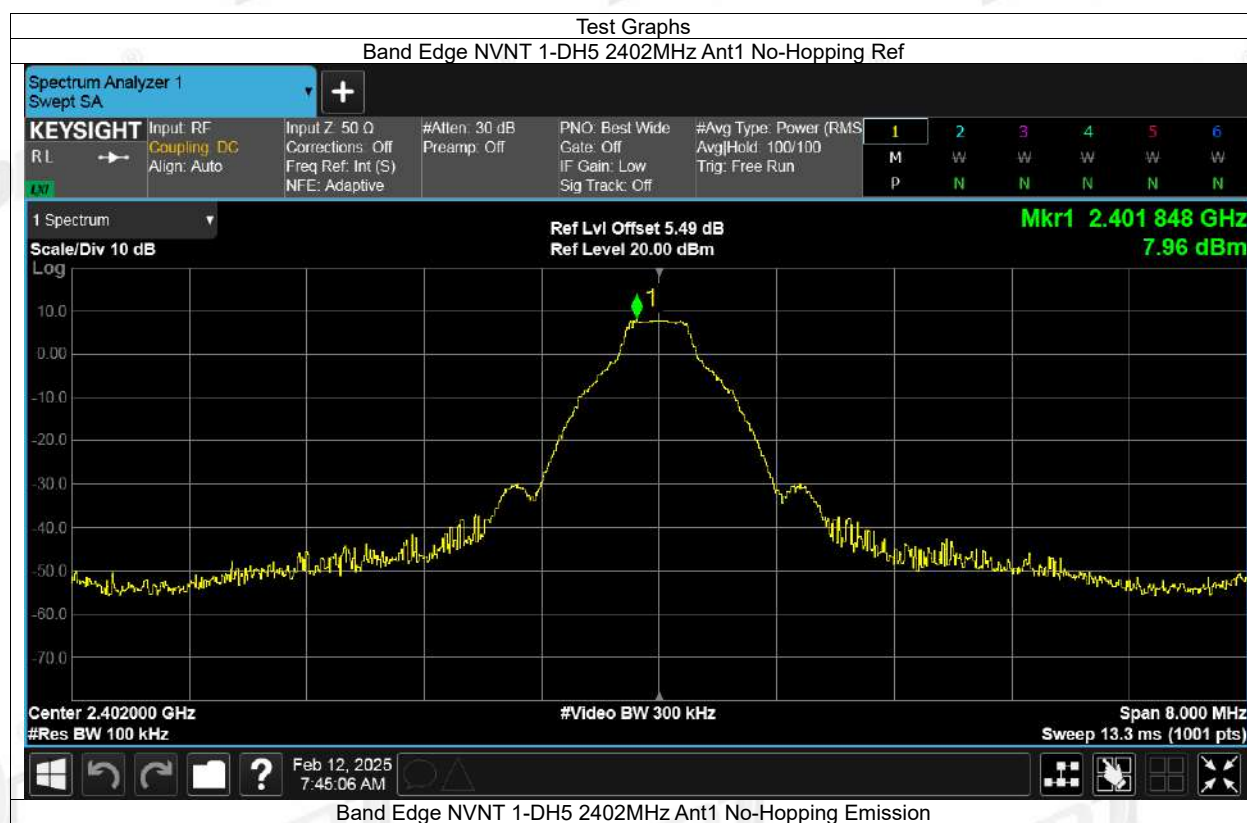


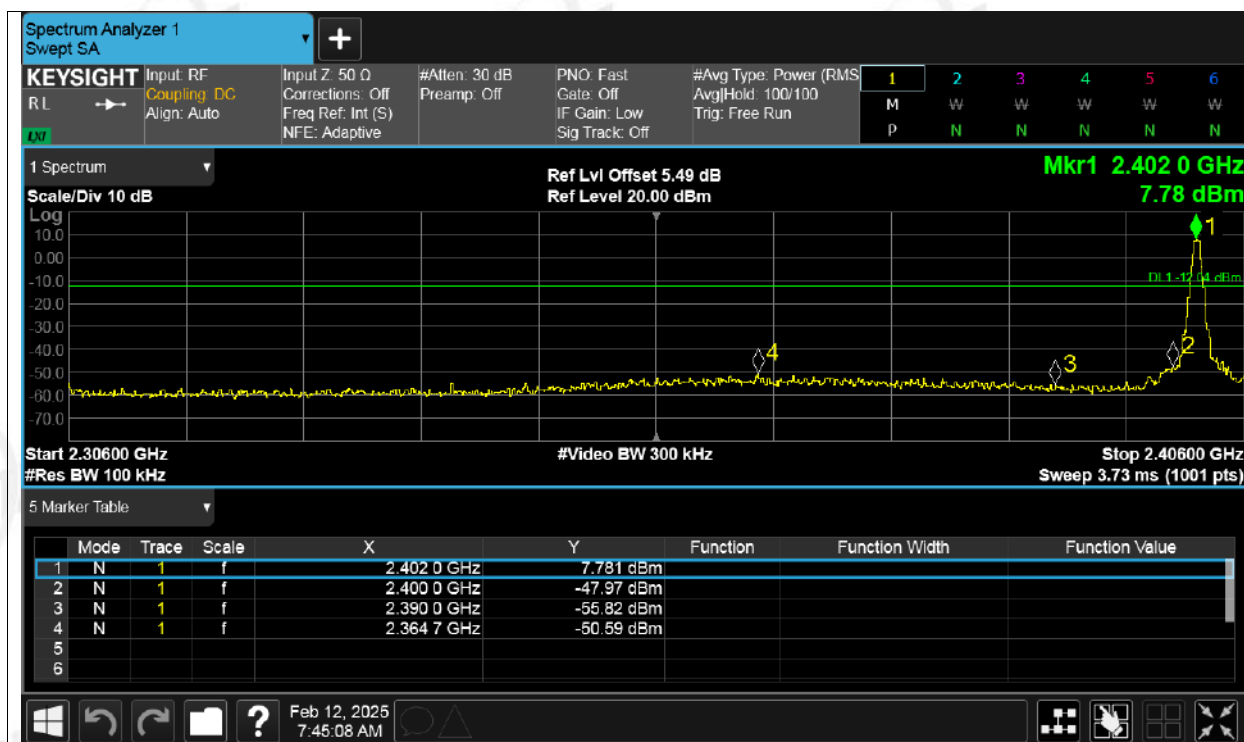


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

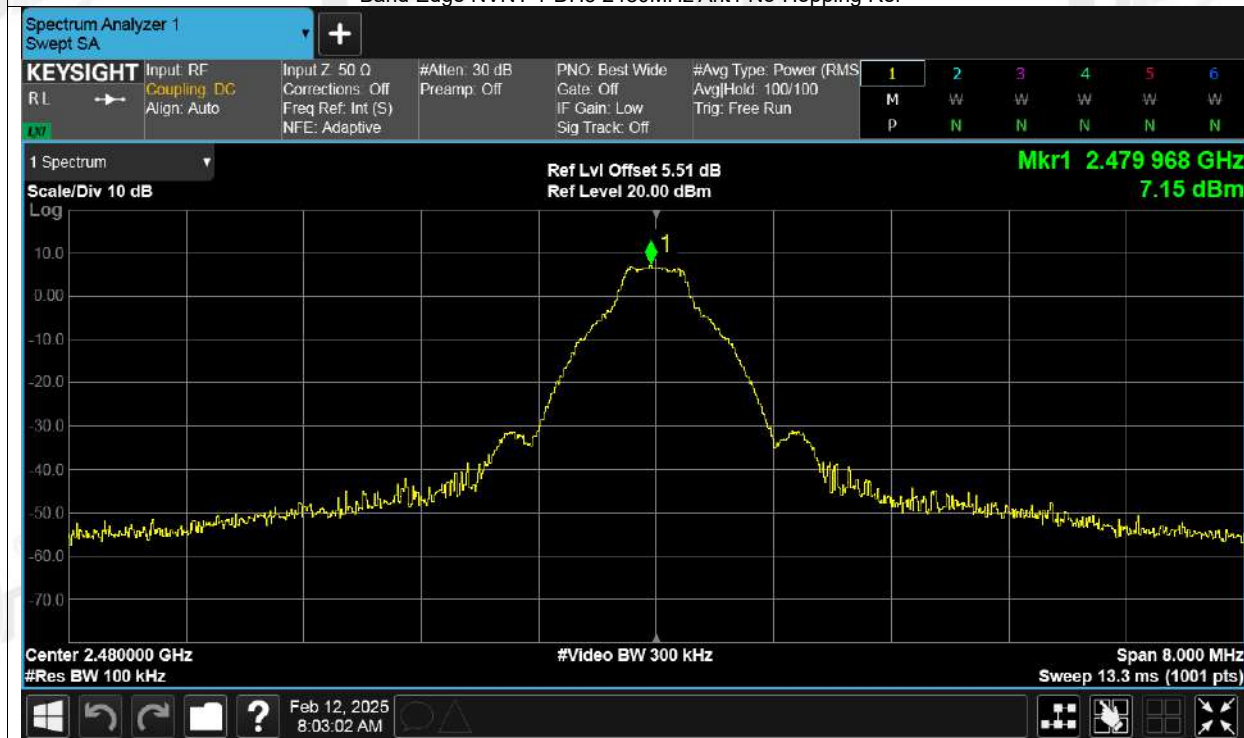


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

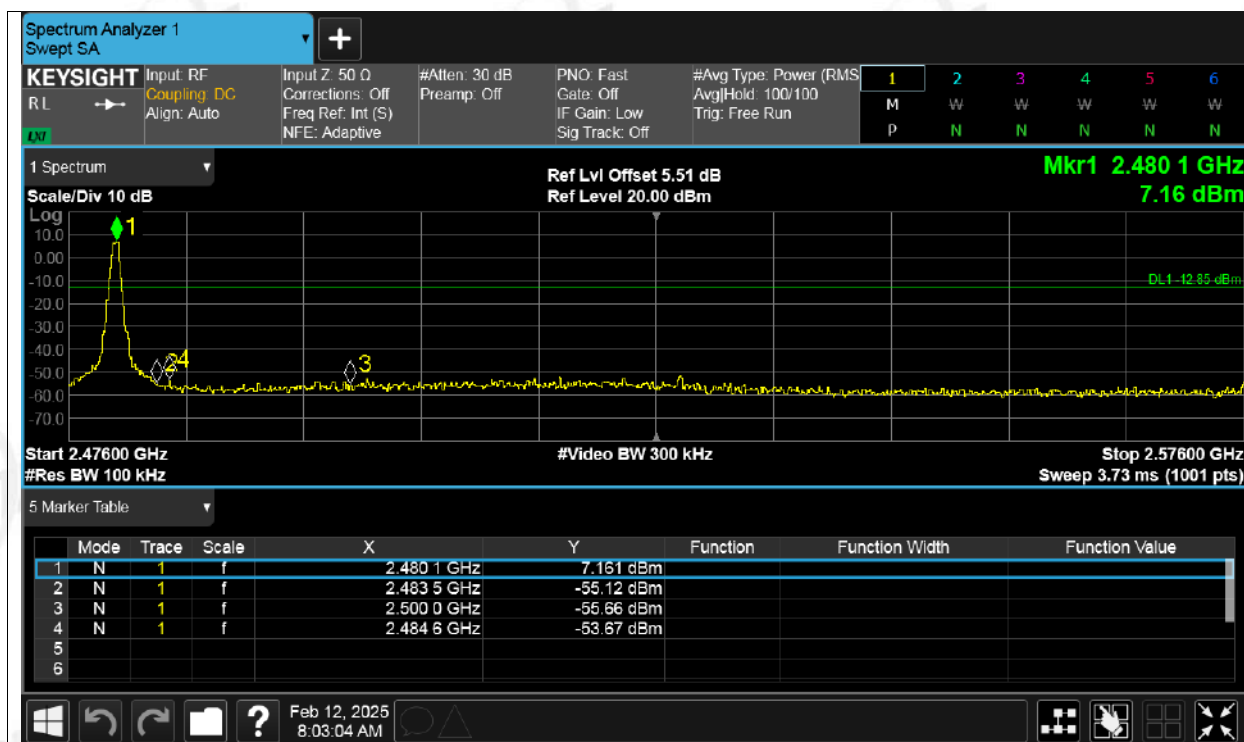


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

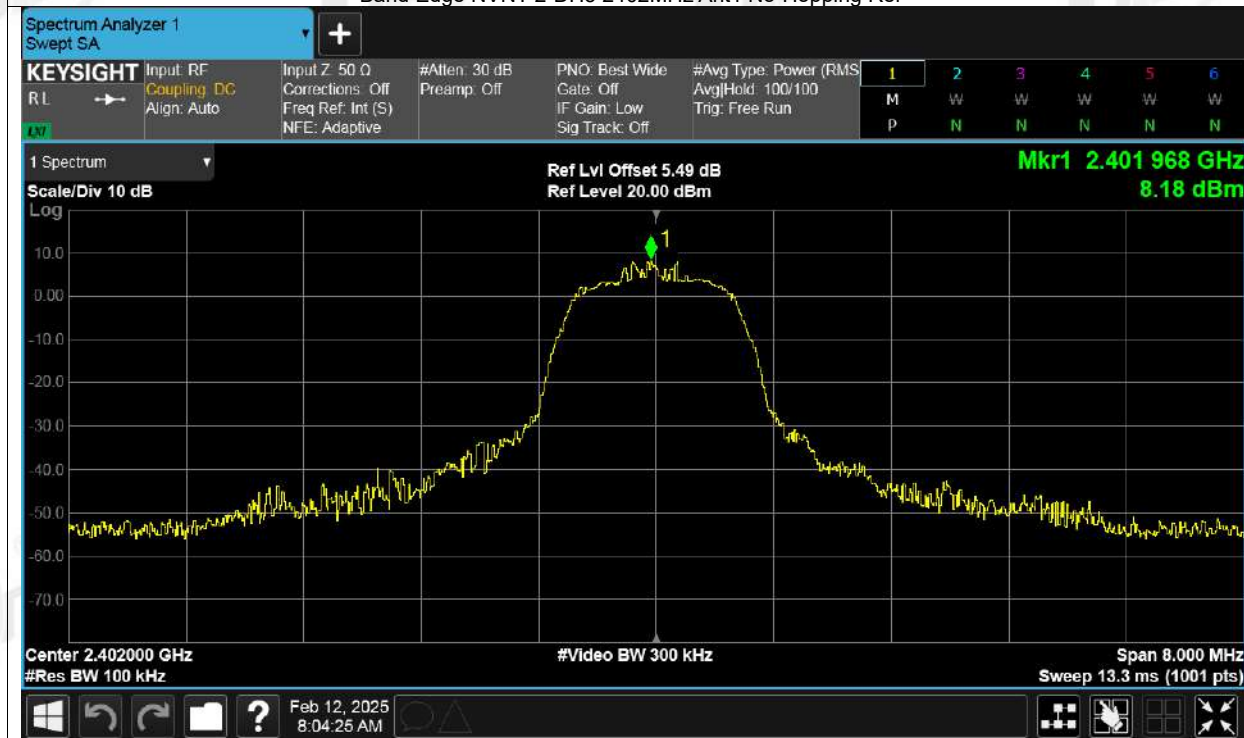

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

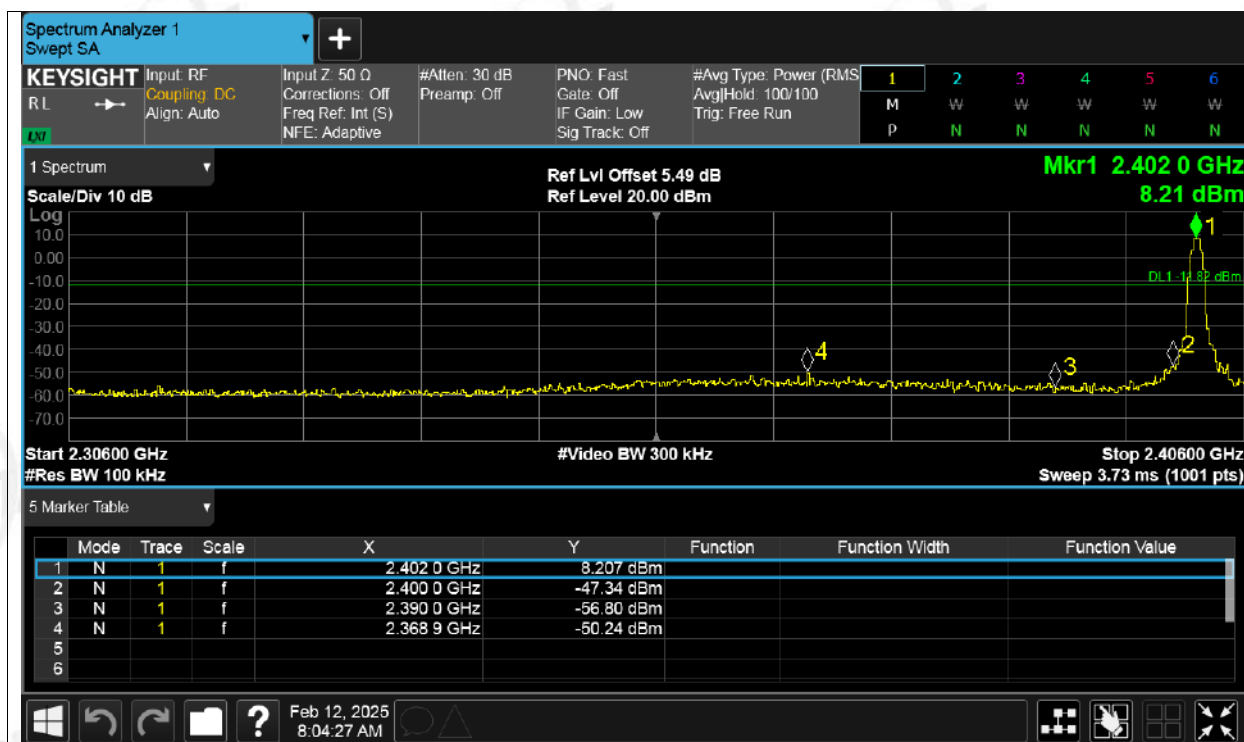


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

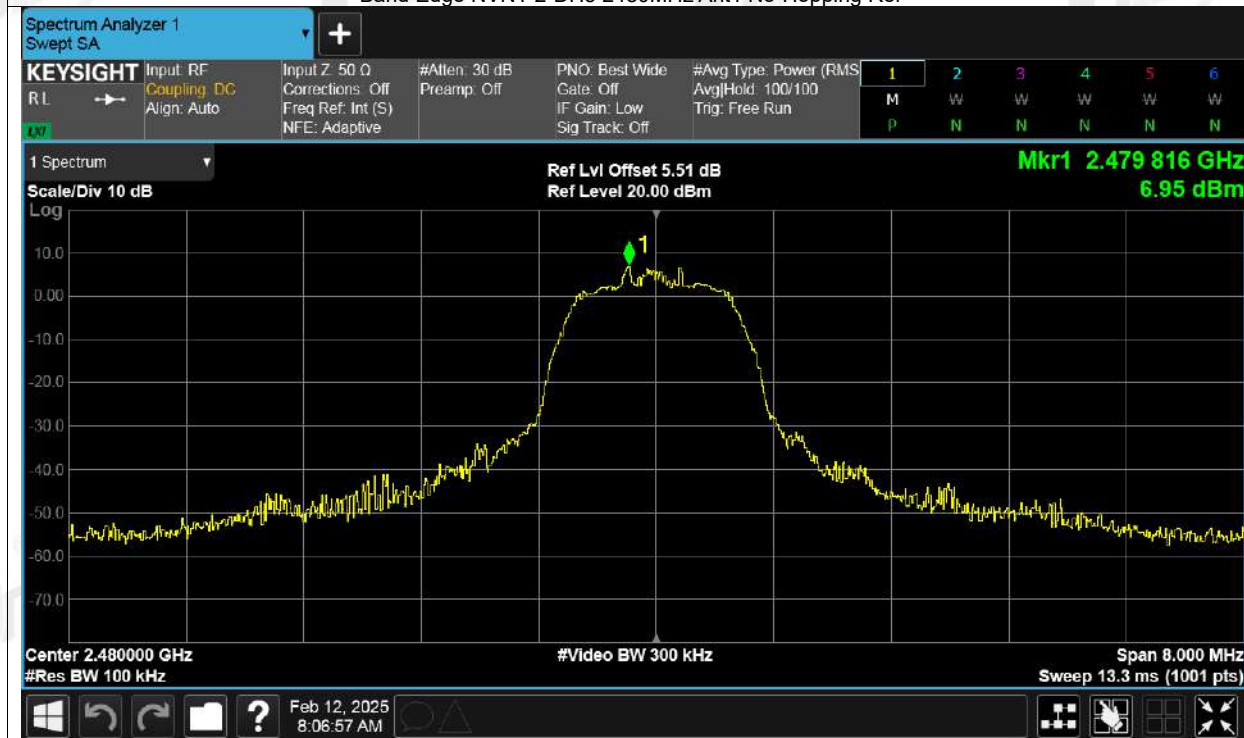

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission



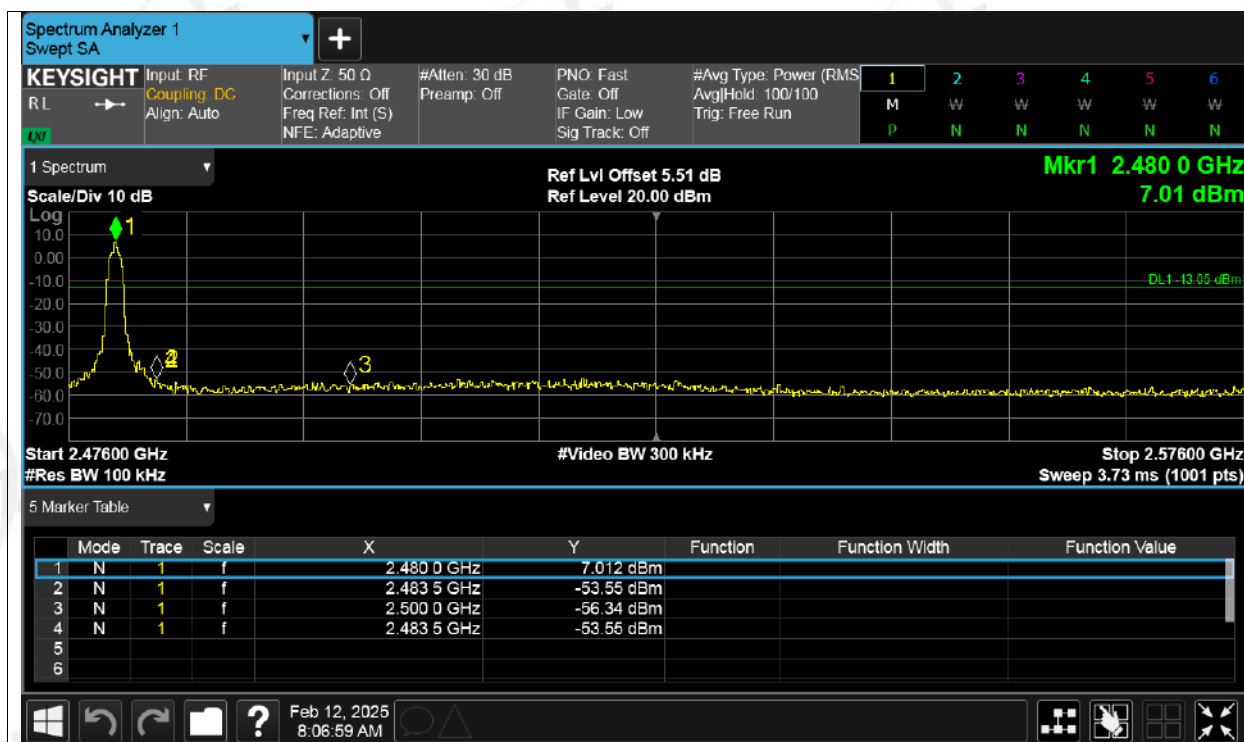


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref



Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission




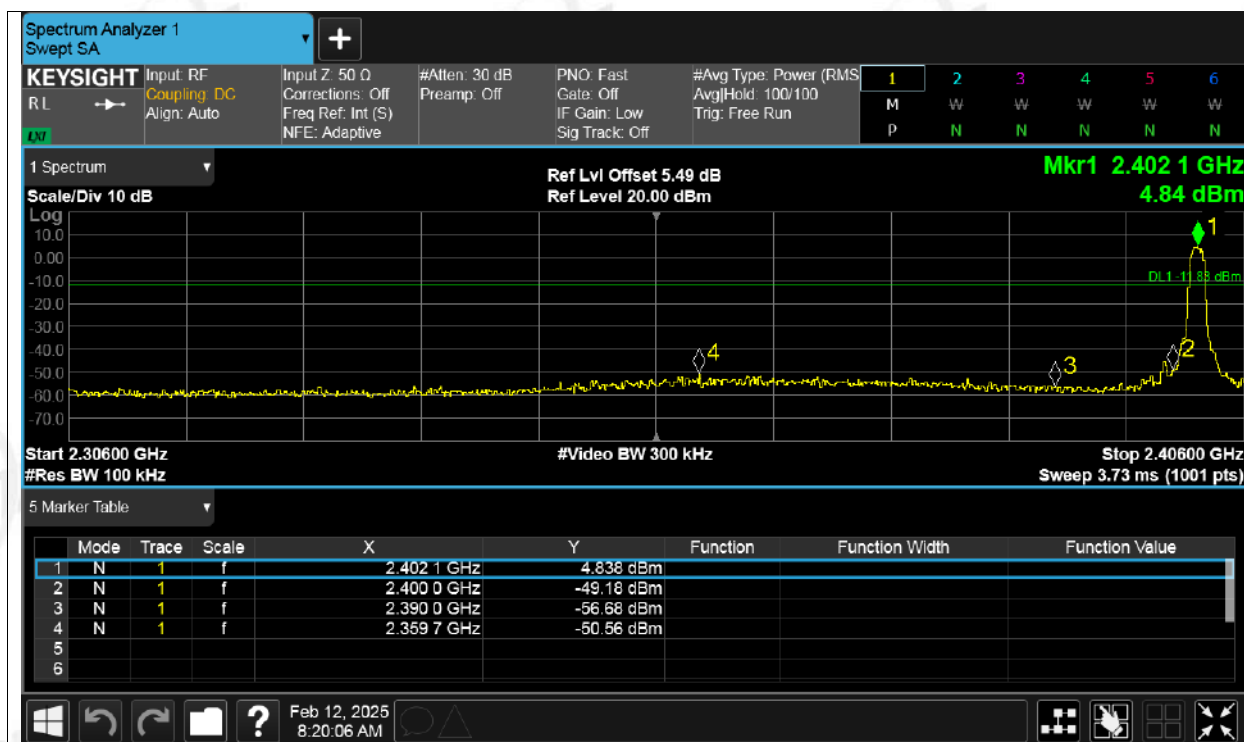

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref





Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

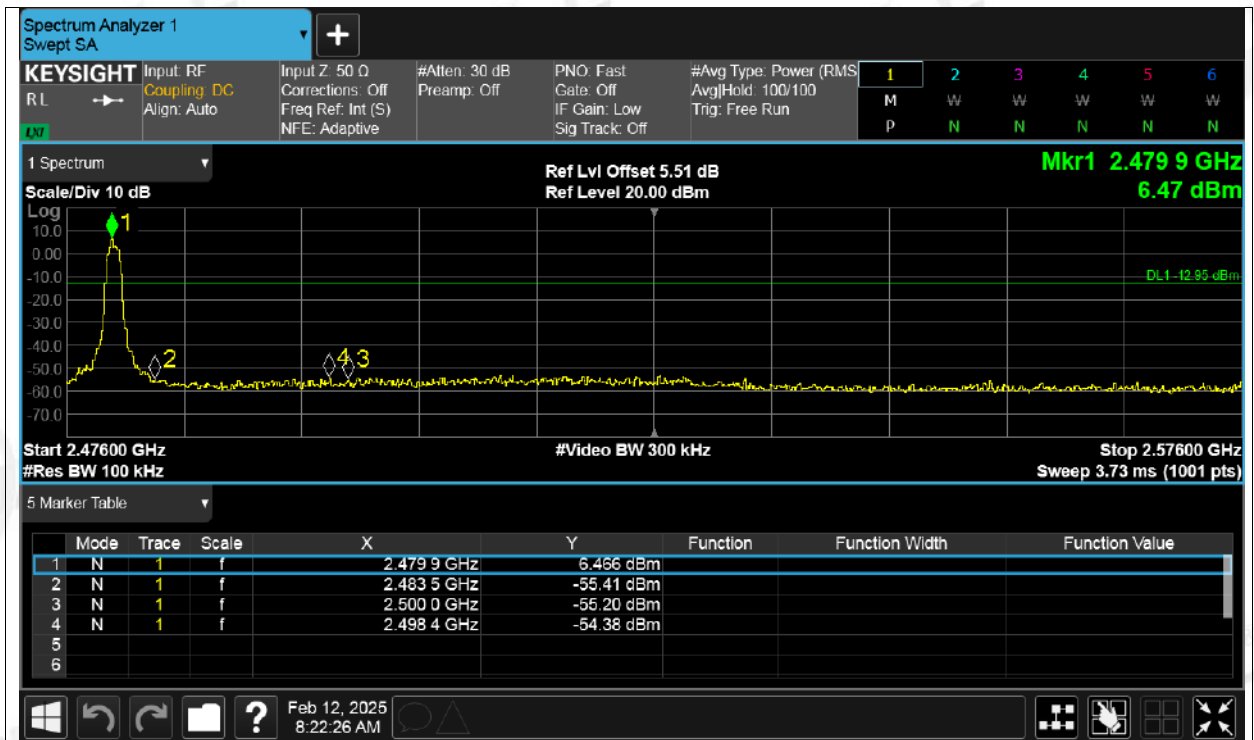

## Test Graphs

## Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

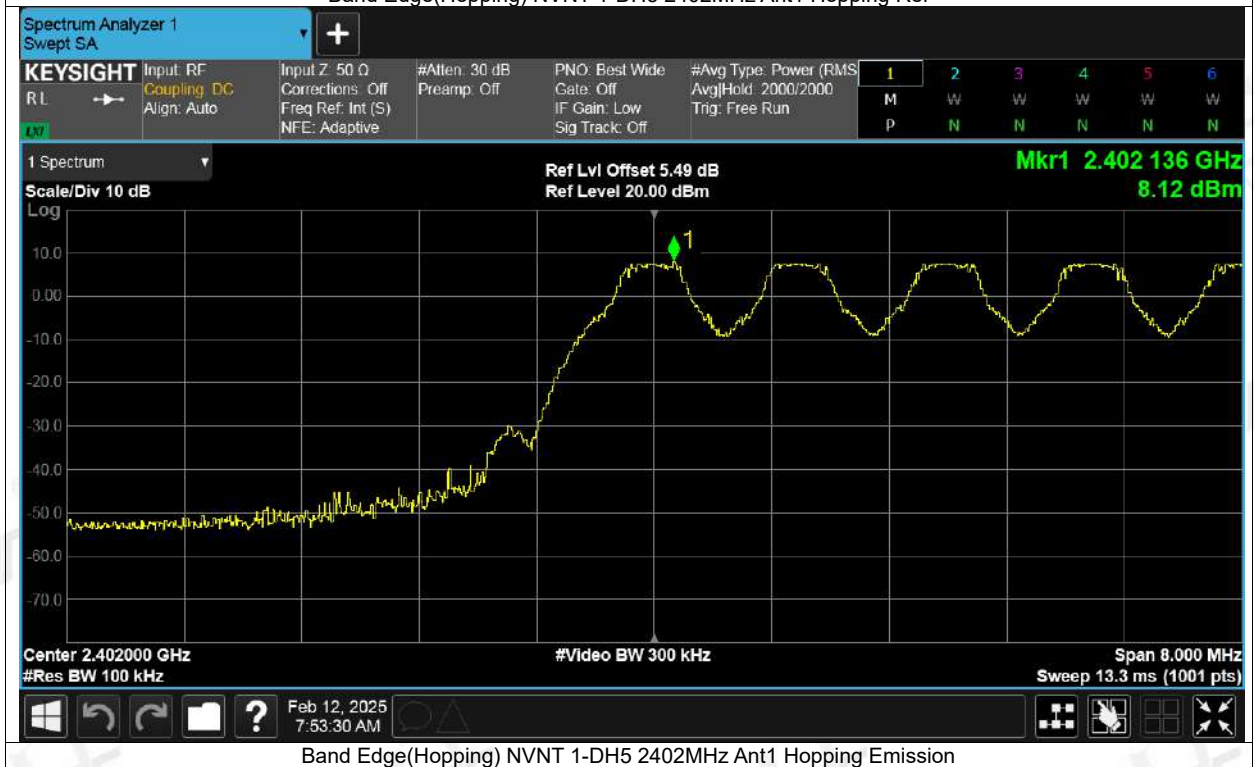


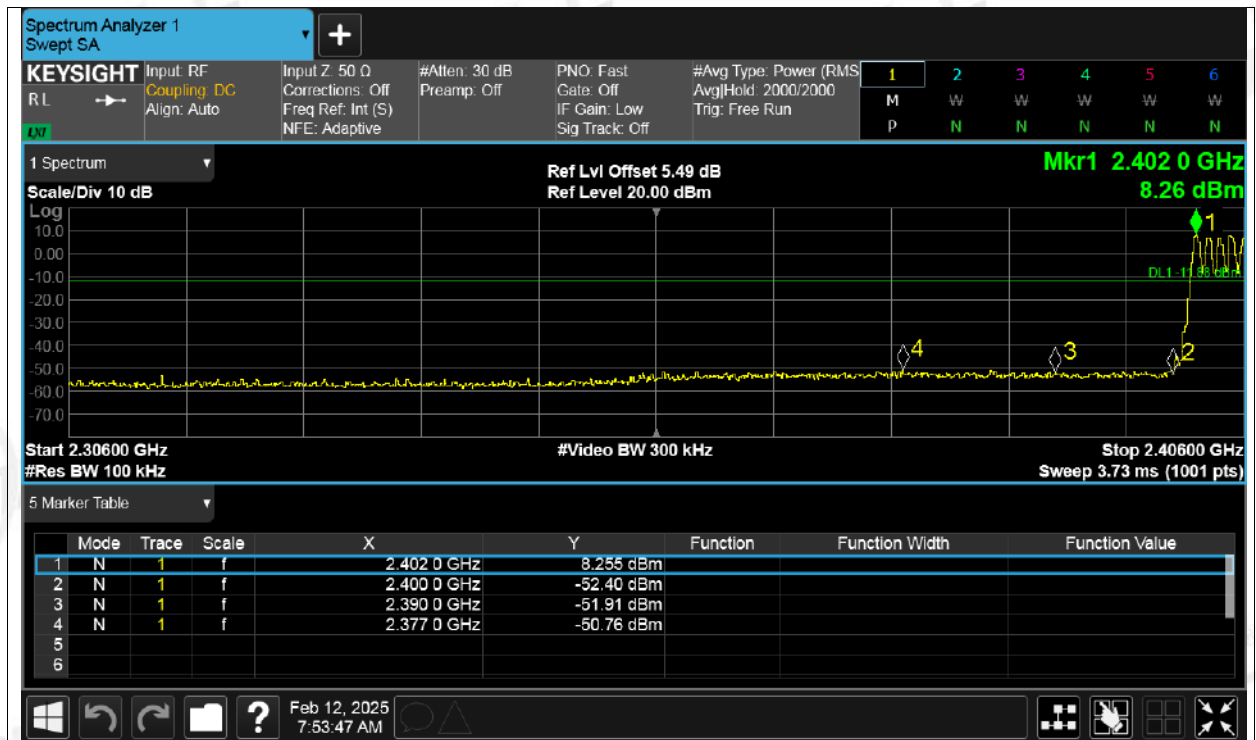

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

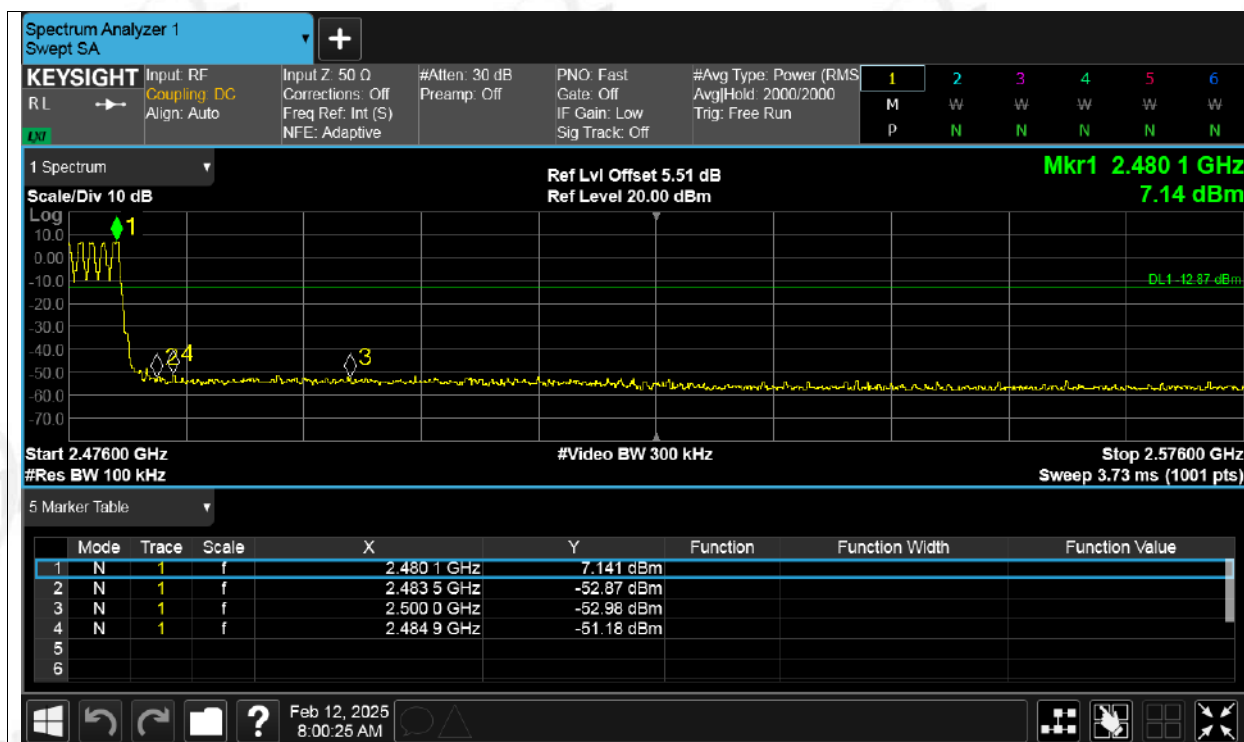

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

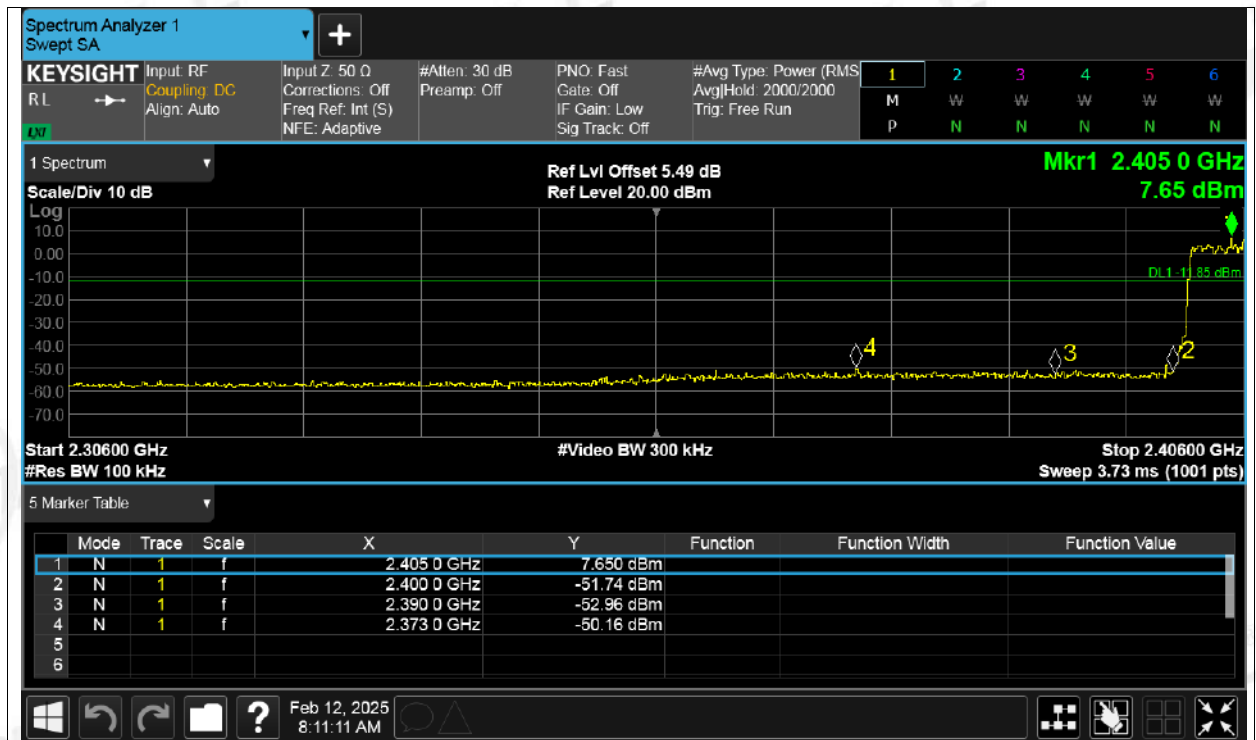


Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission



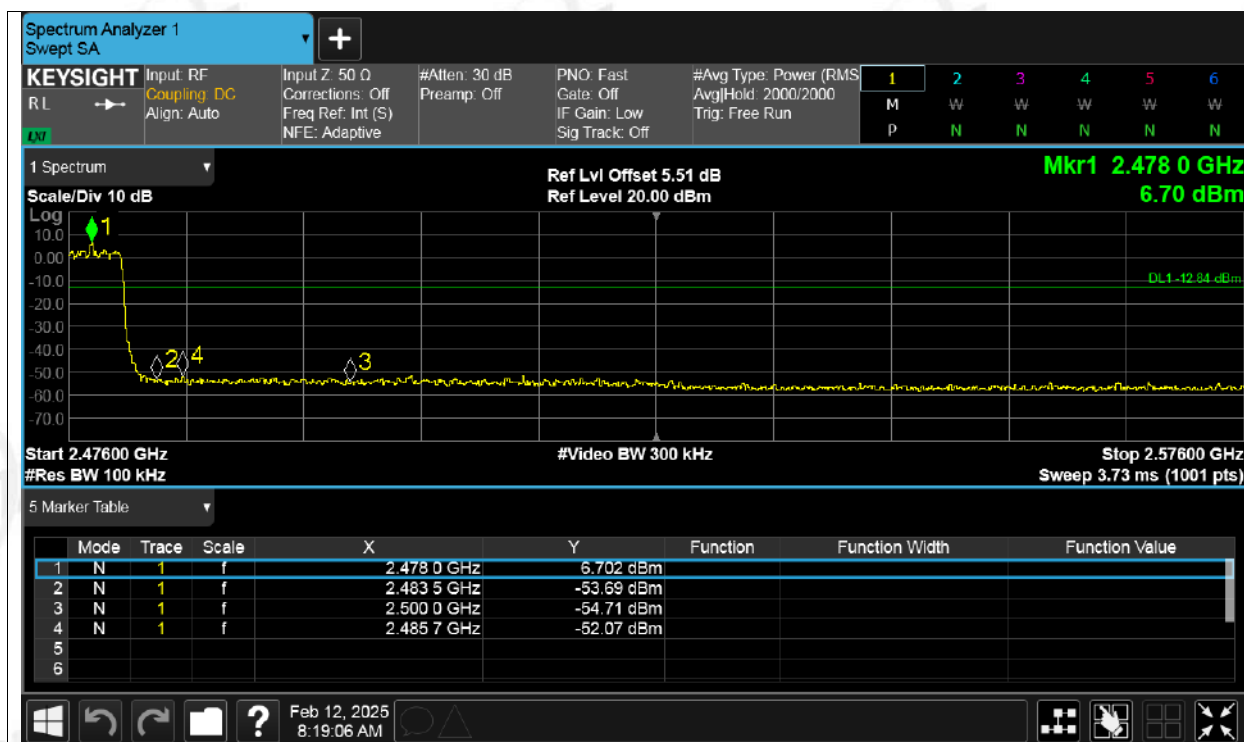


Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission




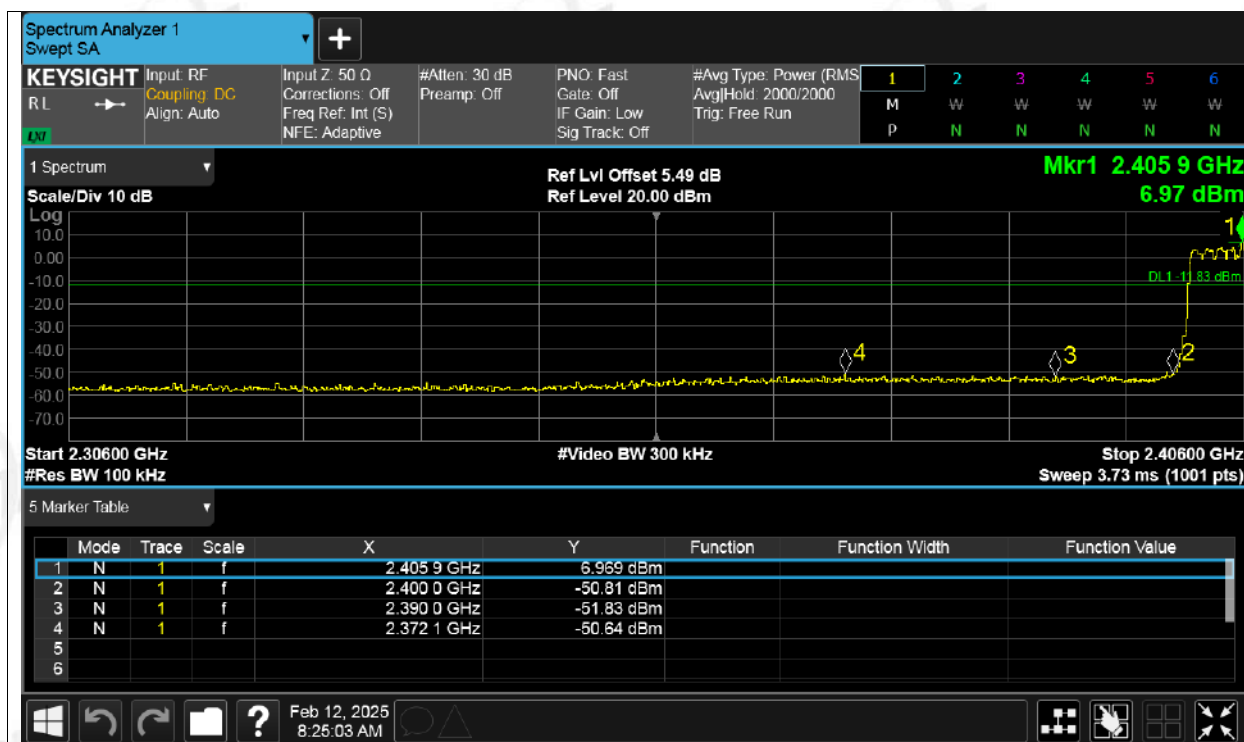

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

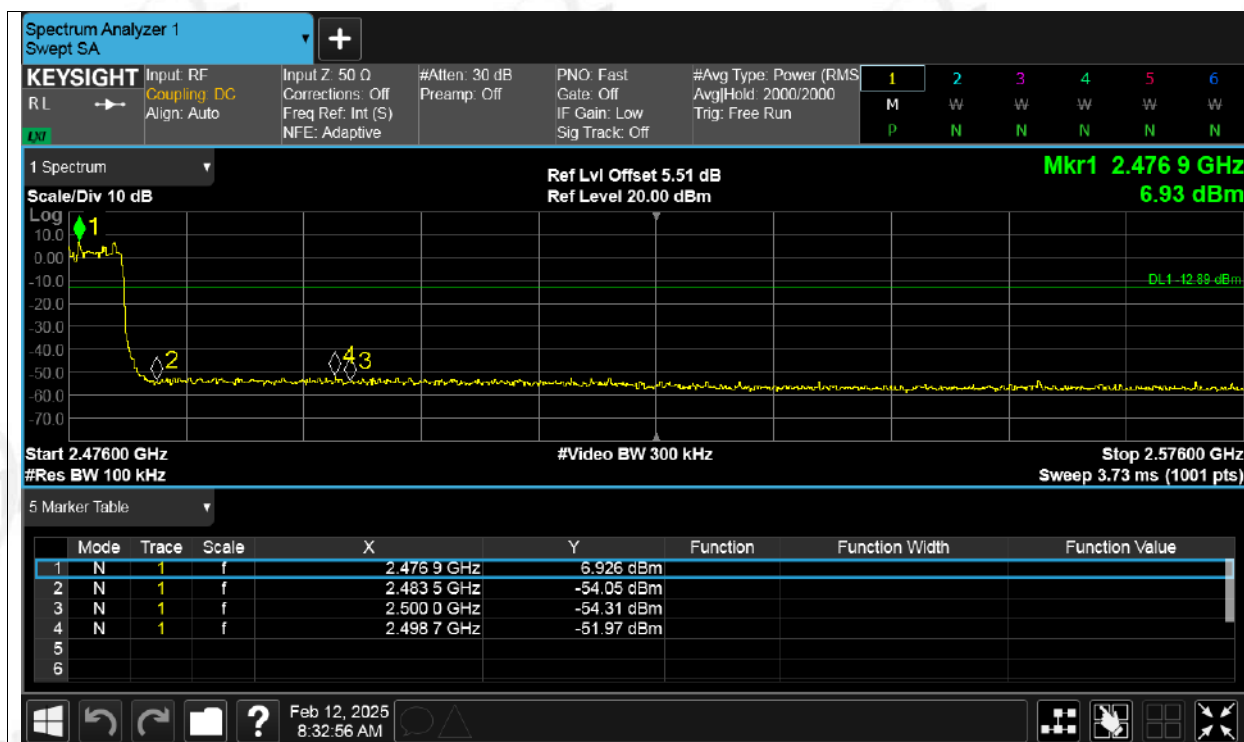

## 11. RF Conducted Spurious Emissions

### 11.1. Block diagram of test setup

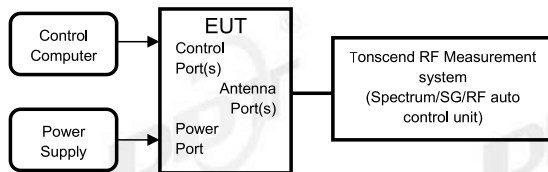

### 11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 11.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:
 

|                  |                                                               |
|------------------|---------------------------------------------------------------|
| Center frequency | Test frequency                                                |
| RBW:             | 100 kHz                                                       |
| VBW:             | 300 kHz                                                       |
| Span             | Wide enough to capture the peak level of the in-band emission |
| Detector Mode:   | Peak                                                          |
| Sweep time:      | Auto                                                          |
| Trace mode       | Max hold                                                      |
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:
 


|                              |                                          |
|------------------------------|------------------------------------------|
| RBW:                         | 100 kHz                                  |
| VBW:                         | 300 kHz                                  |
| Span                         | Encompass frequency range to be measured |
| Number of measurement points | $\geq \text{Span/RBW}$                   |
| Detector Mode:               | Peak                                     |
| Sweep time:                  | Auto                                     |
| Trace mode                   | Max hold                                 |


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

### 11.4. Test result

| Mode  | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-------|-----------------|---------|-----------------|-------------|---------|
| 1-DH5 | 2402            | Ant1    | -55.99          | -20         | Pass    |
| 1-DH5 | 2441            | Ant1    | -56.62          | -20         | Pass    |
| 1-DH5 | 2480            | Ant1    | -56.35          | -20         | Pass    |
| 2-DH5 | 2402            | Ant1    | -57.17          | -20         | Pass    |
| 2-DH5 | 2441            | Ant1    | -60.36          | -20         | Pass    |
| 2-DH5 | 2480            | Ant1    | -59.45          | -20         | Pass    |
| 3-DH5 | 2402            | Ant1    | -59.17          | -20         | Pass    |
| 3-DH5 | 2441            | Ant1    | -59.63          | -20         | Pass    |
| 3-DH5 | 2480            | Ant1    | -55.95          | -20         | Pass    |

### 11.5. Test graphs

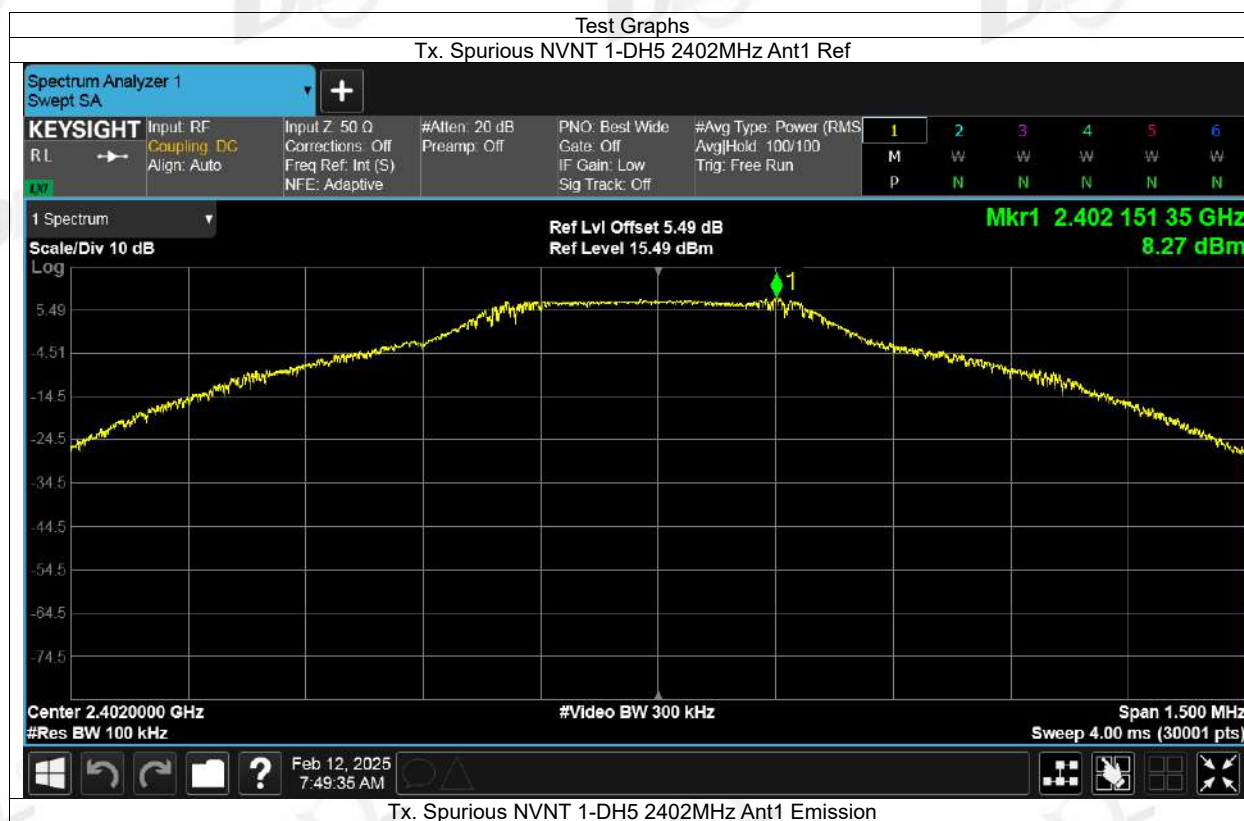


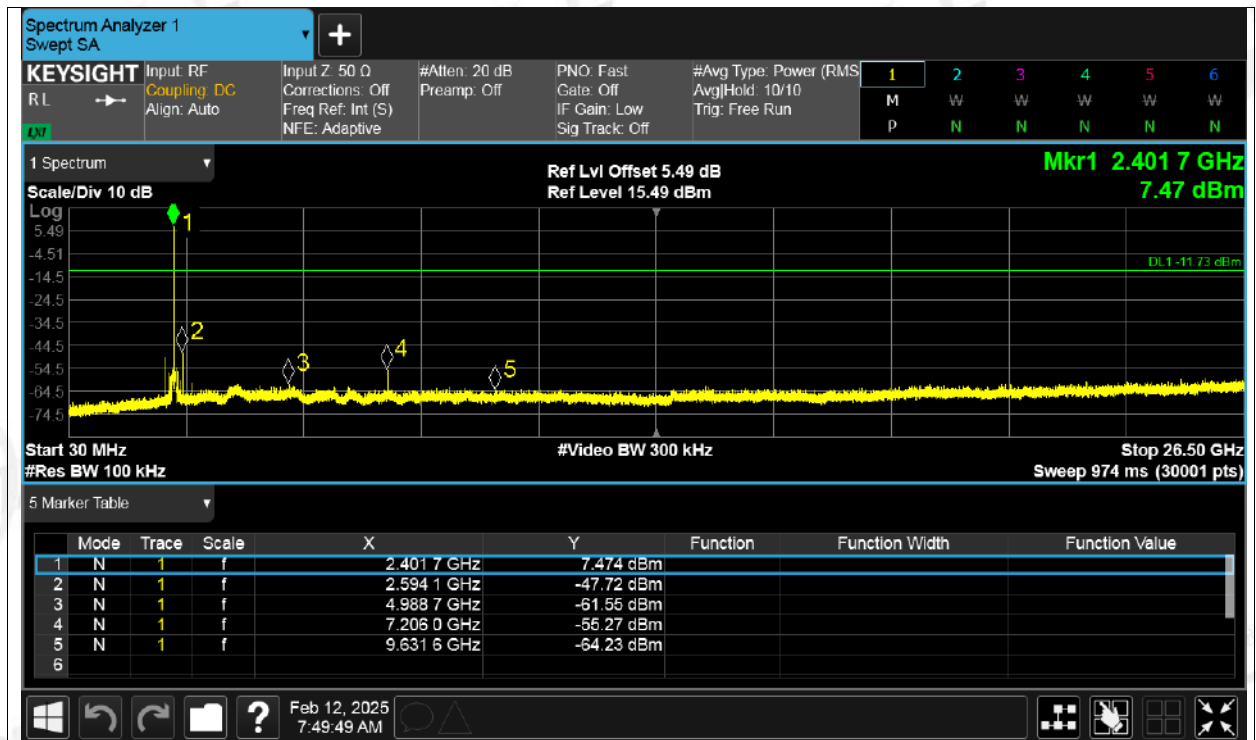


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref



Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

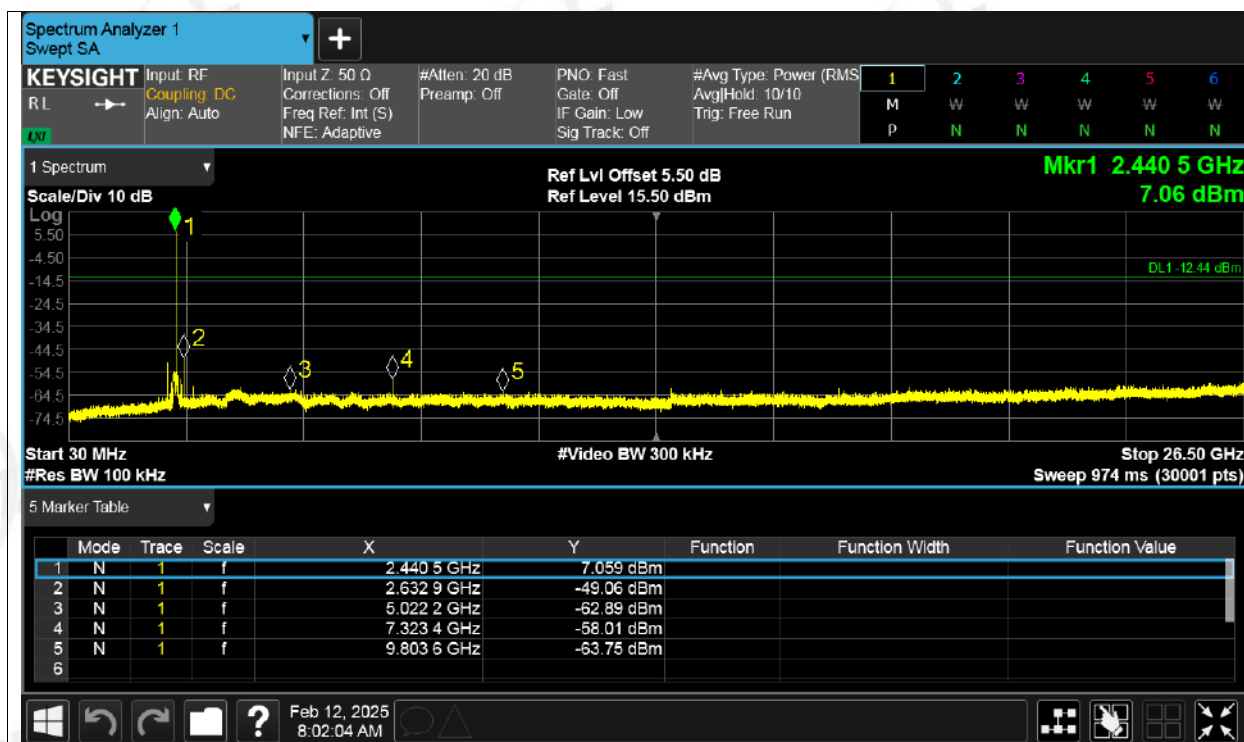


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

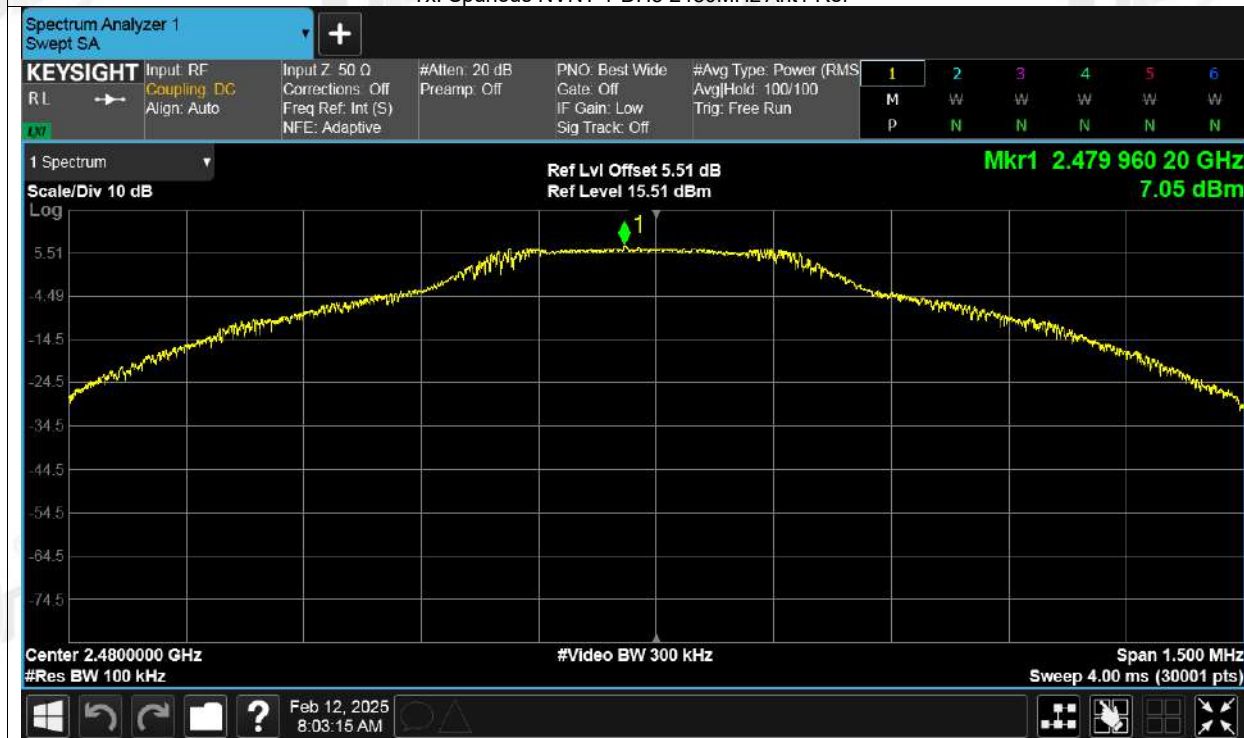

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission




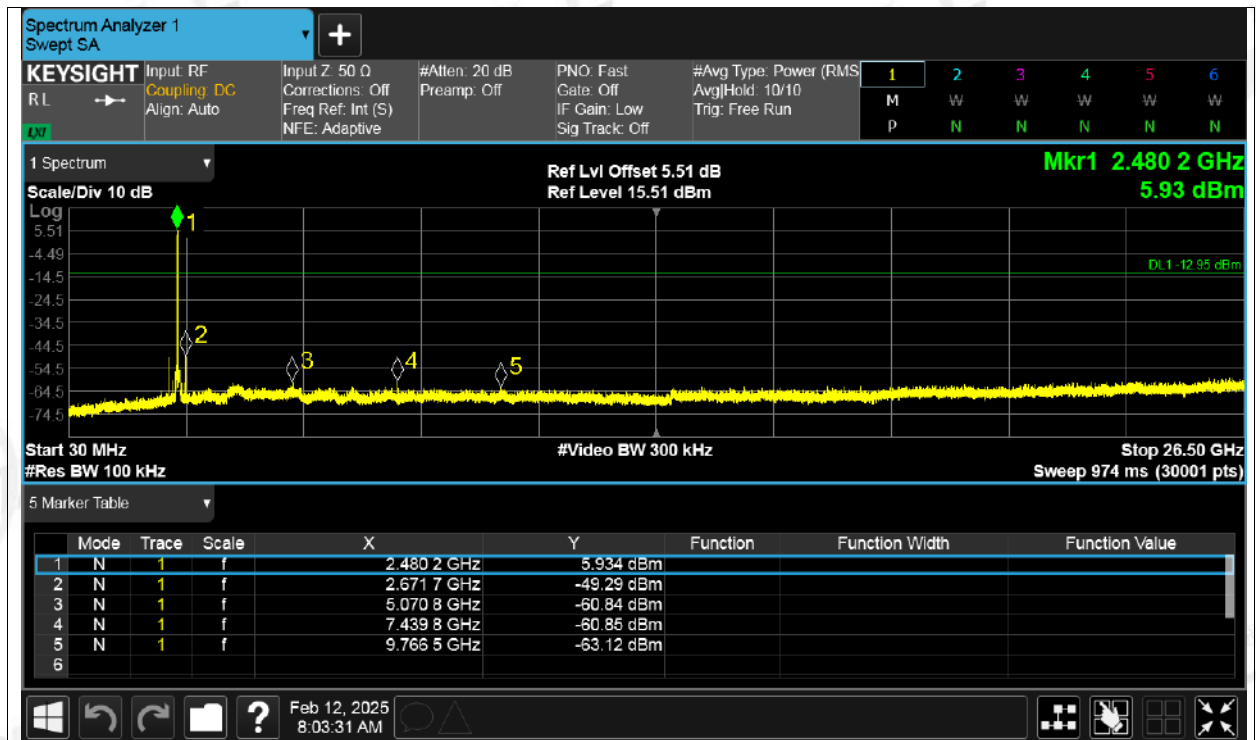


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

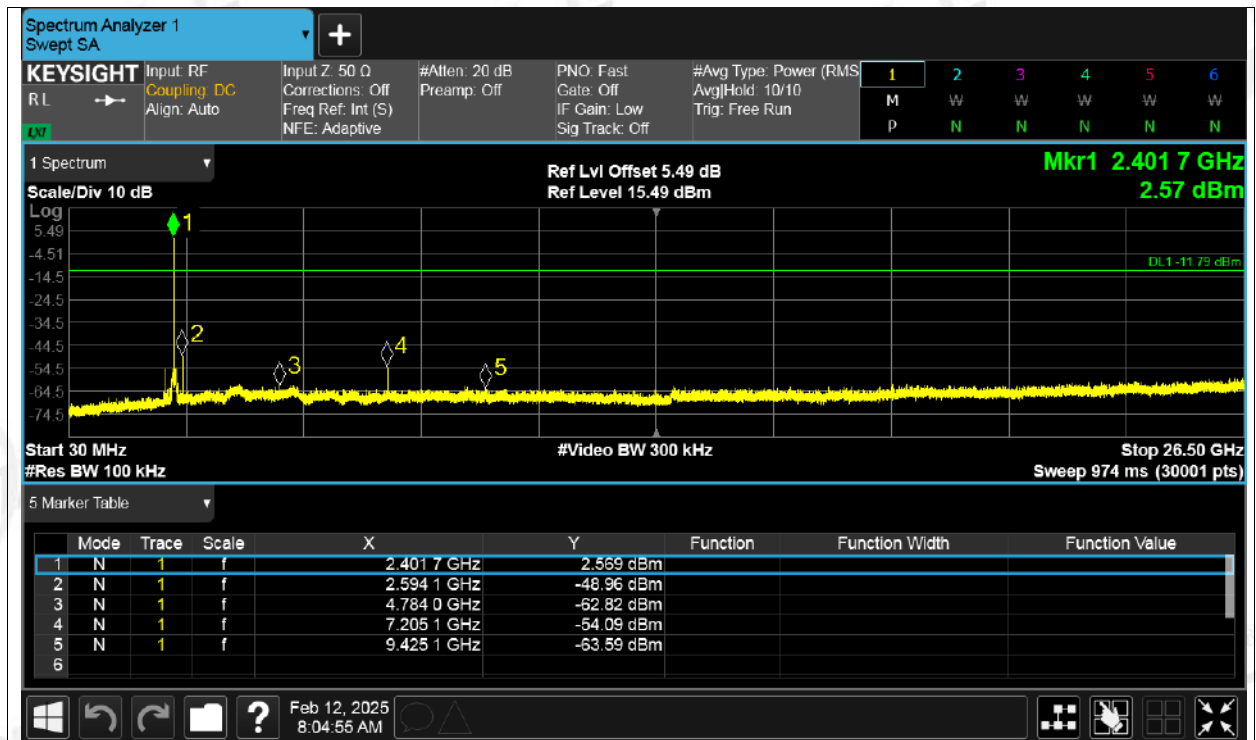


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

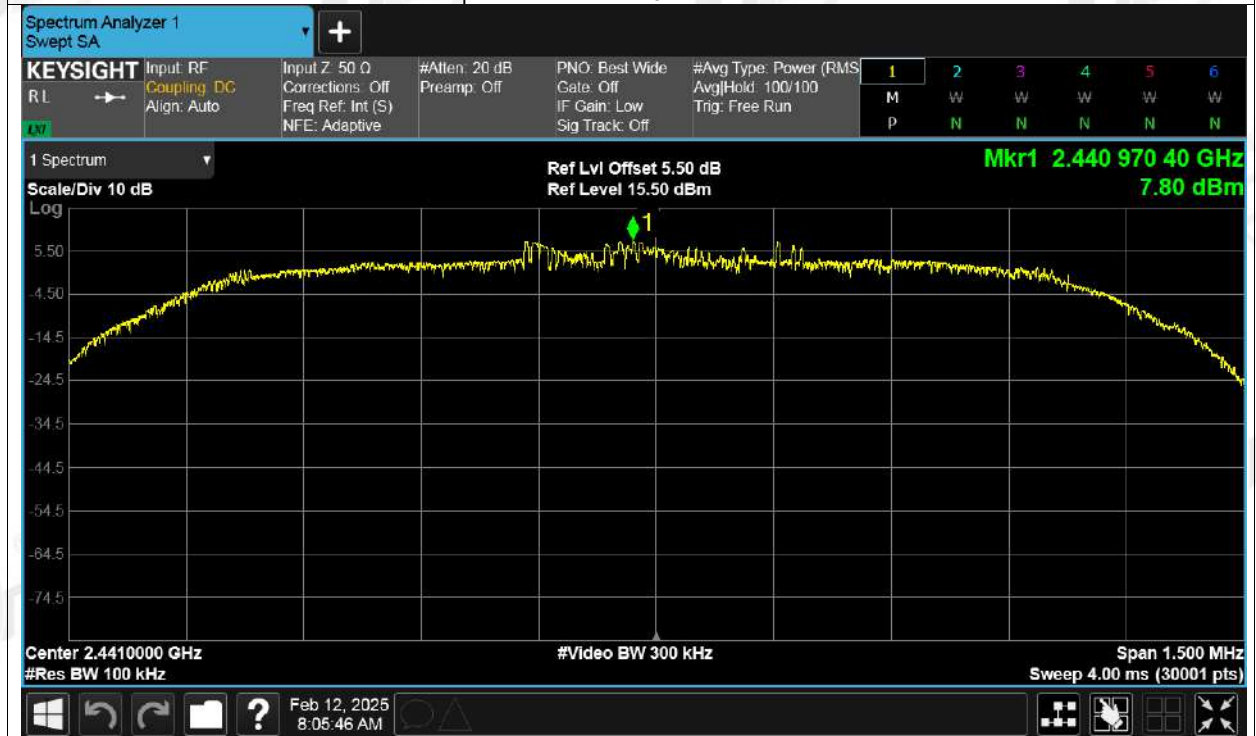


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

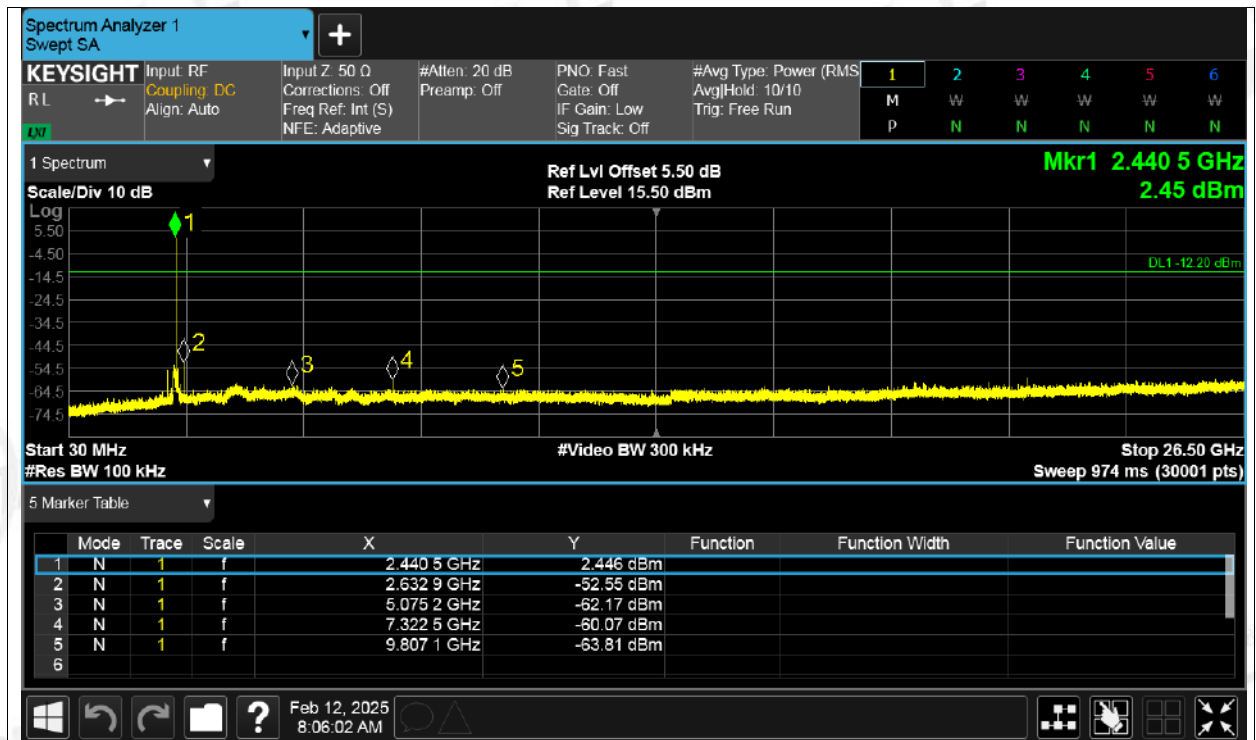

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

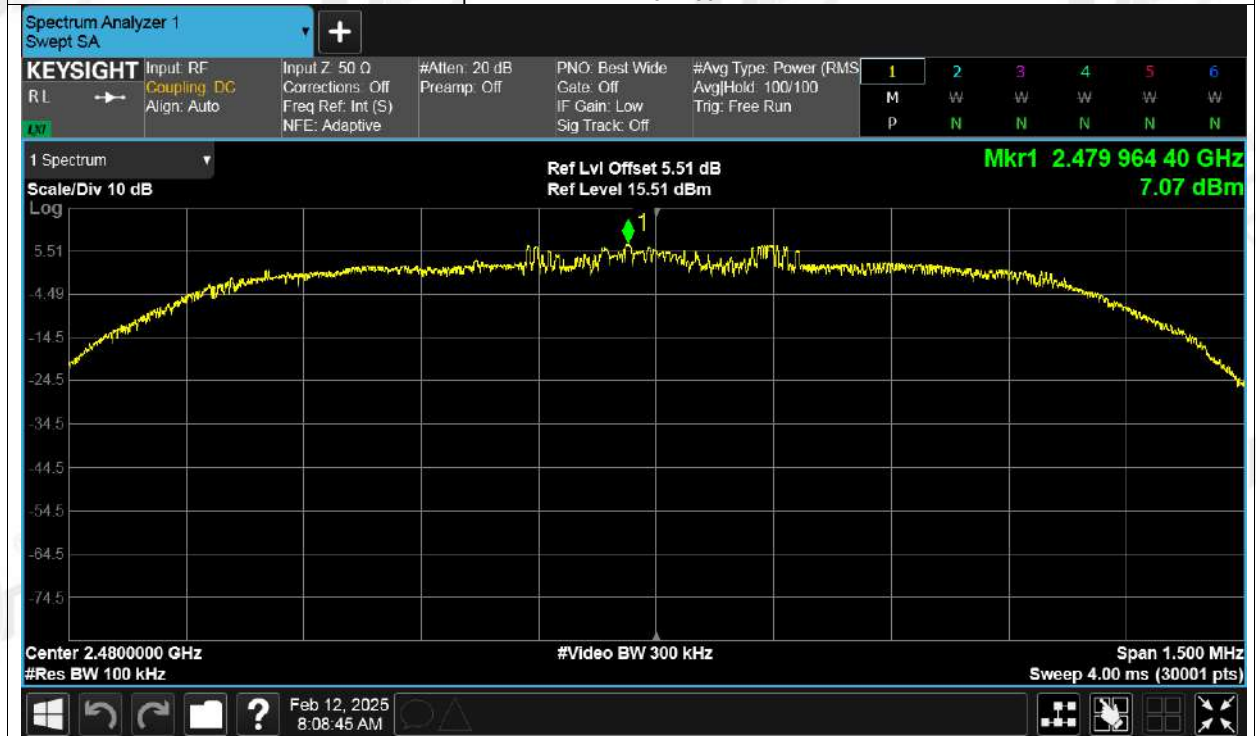


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

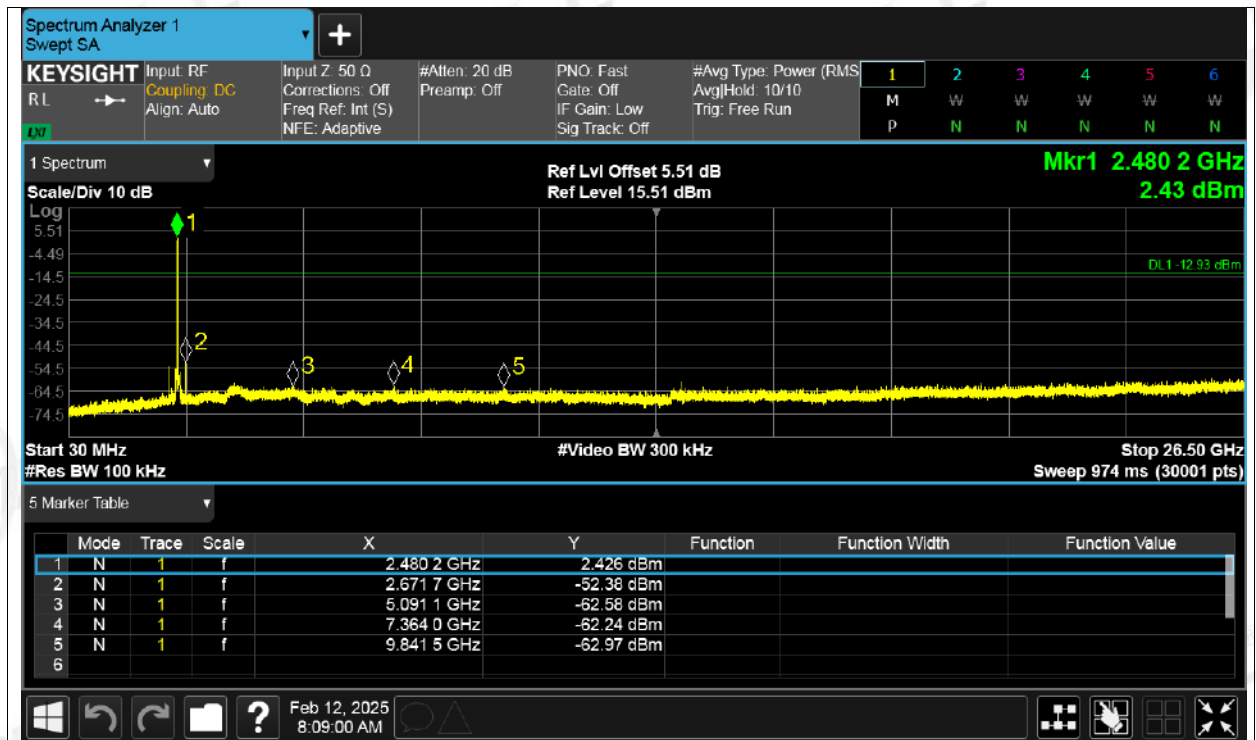


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

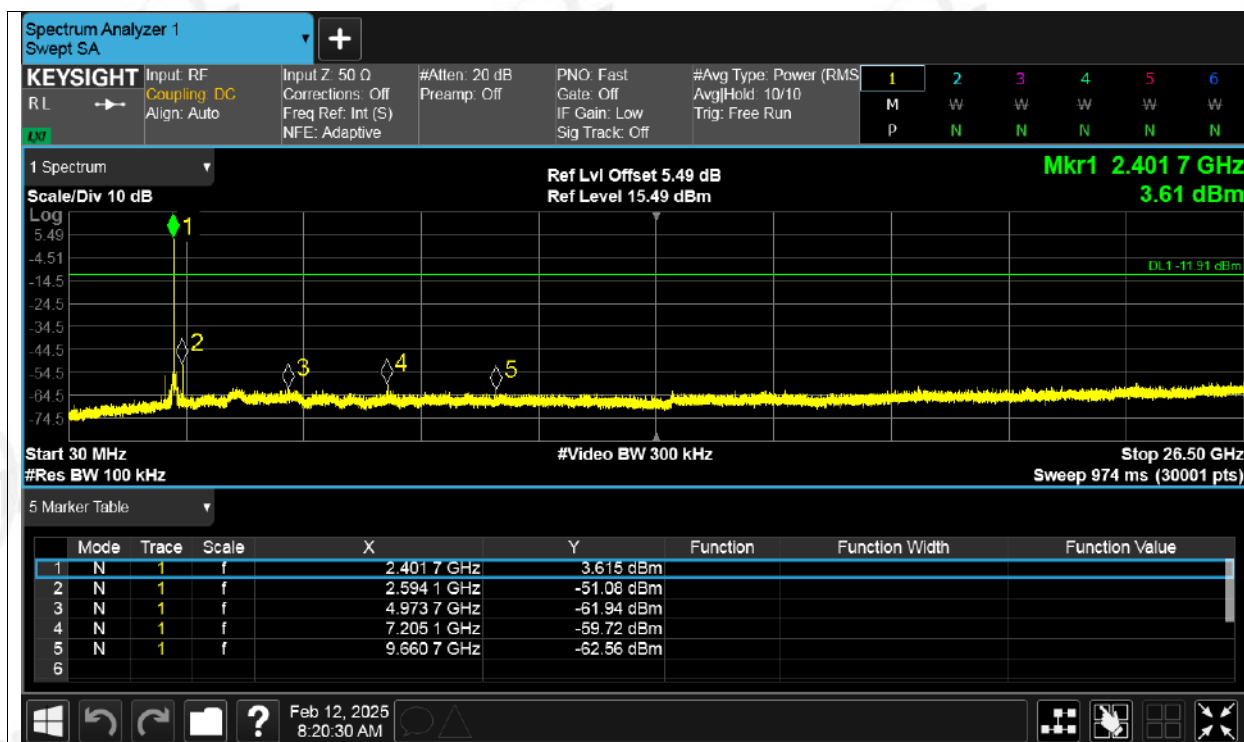


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

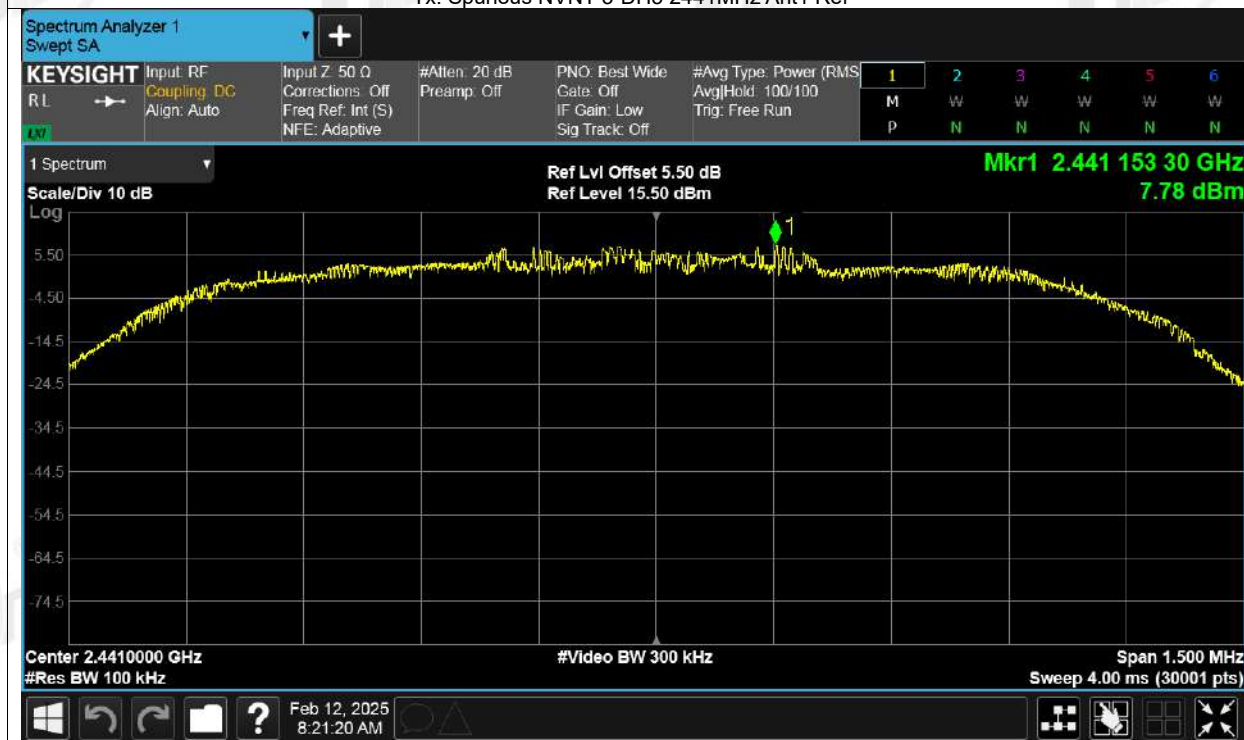


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission



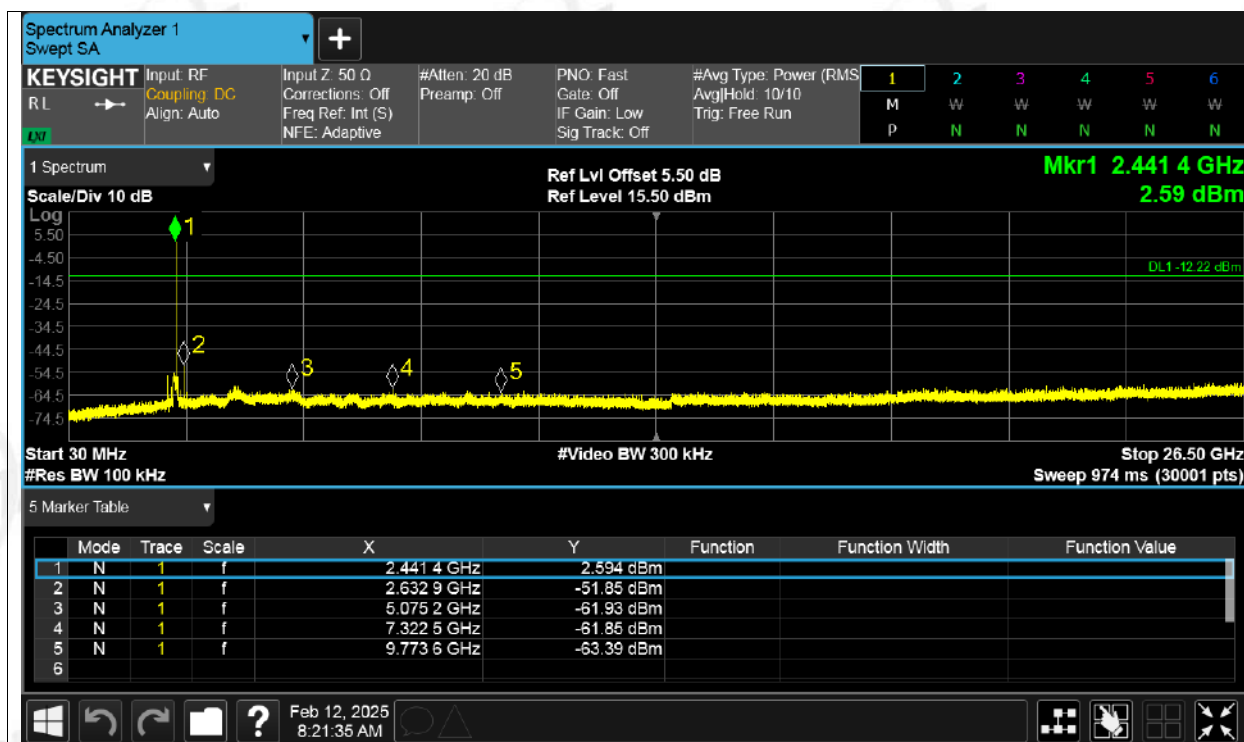


Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

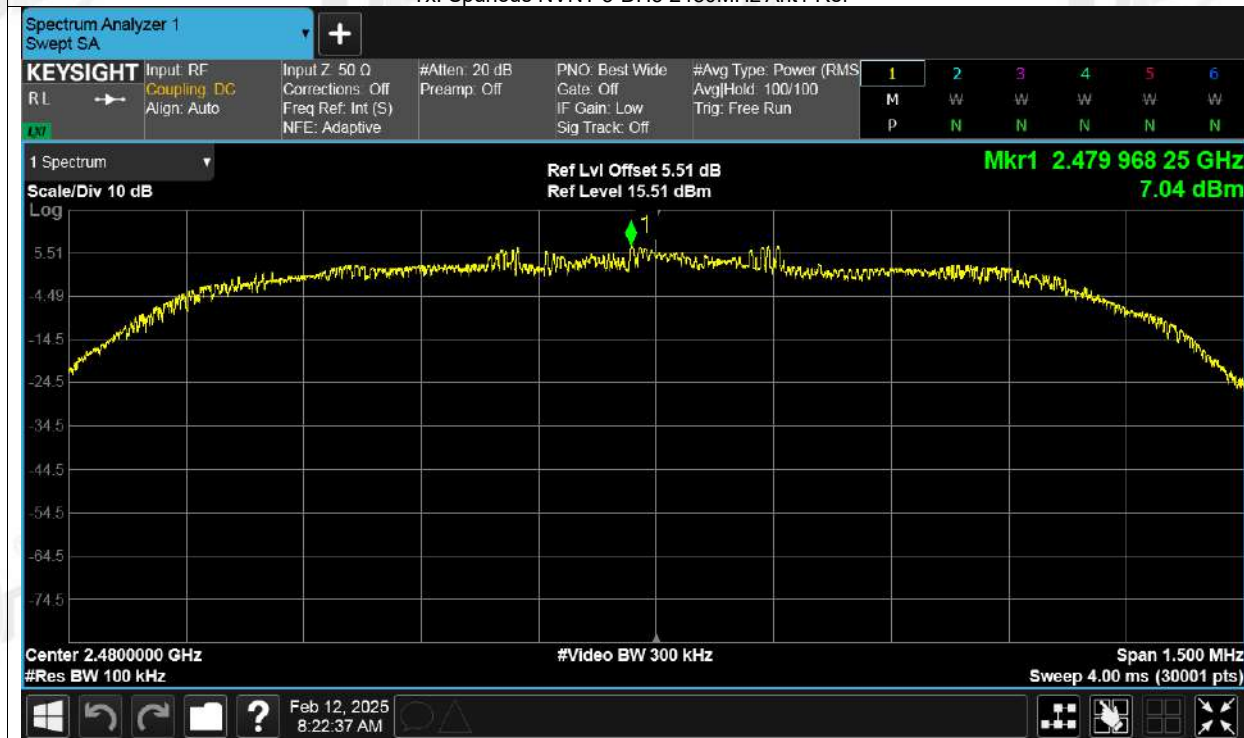

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission



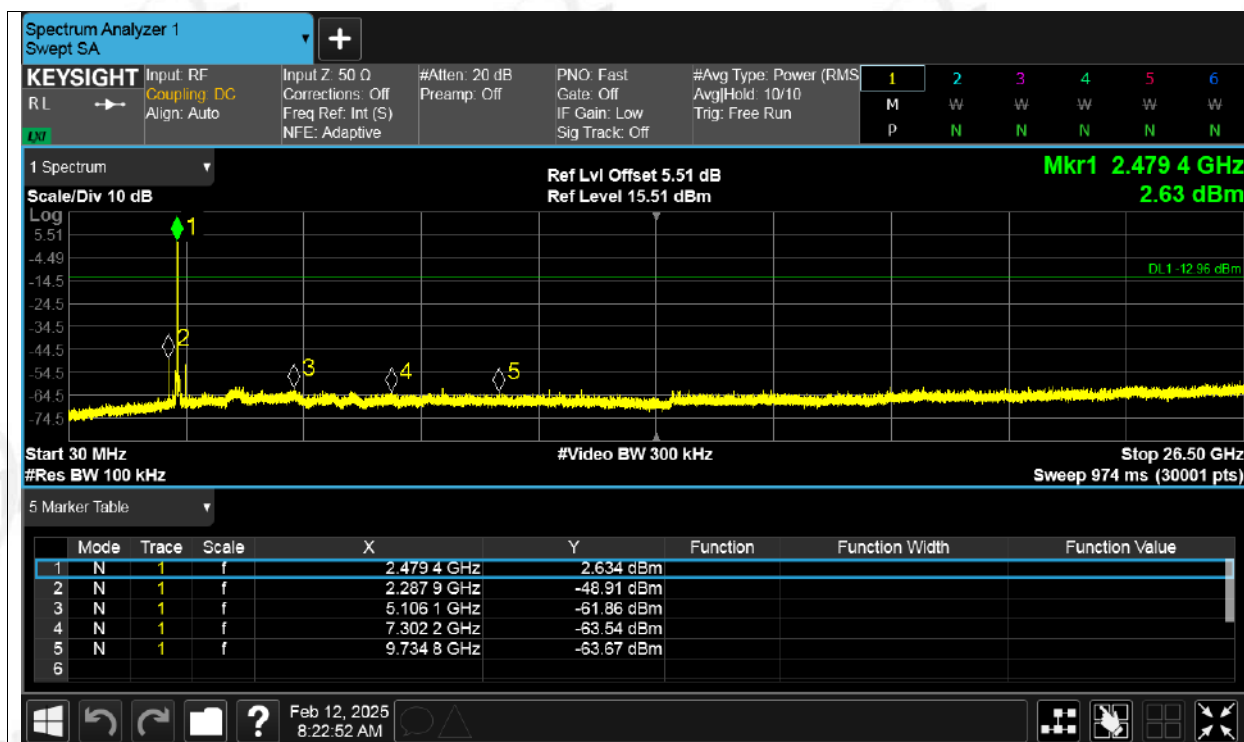

## 12. Antenna Requirements

### 12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.



The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.


### 12.2. Result

The antenna used for this product is PCB antenna and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 2.73 dBi.

## 13. Radiated Emission

### 13.1. Block diagram of test setup

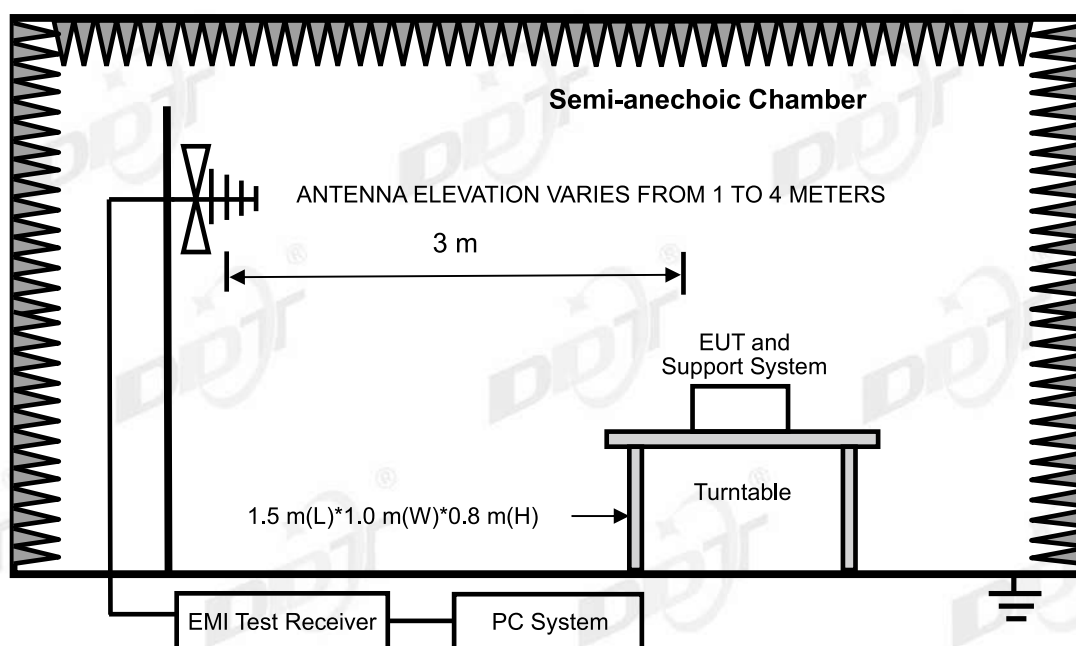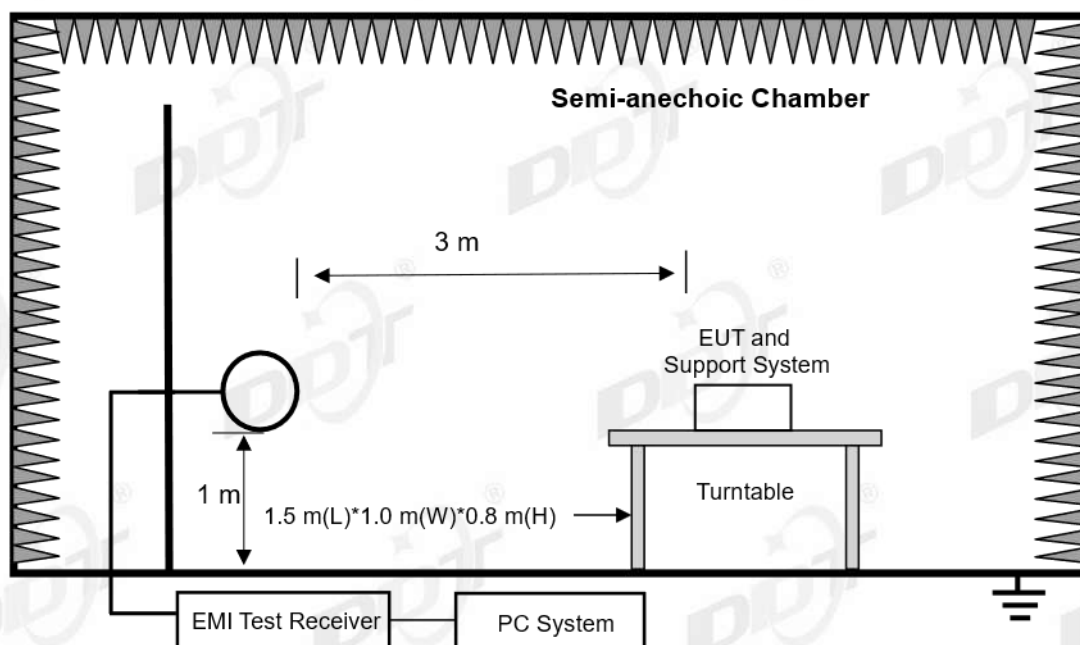

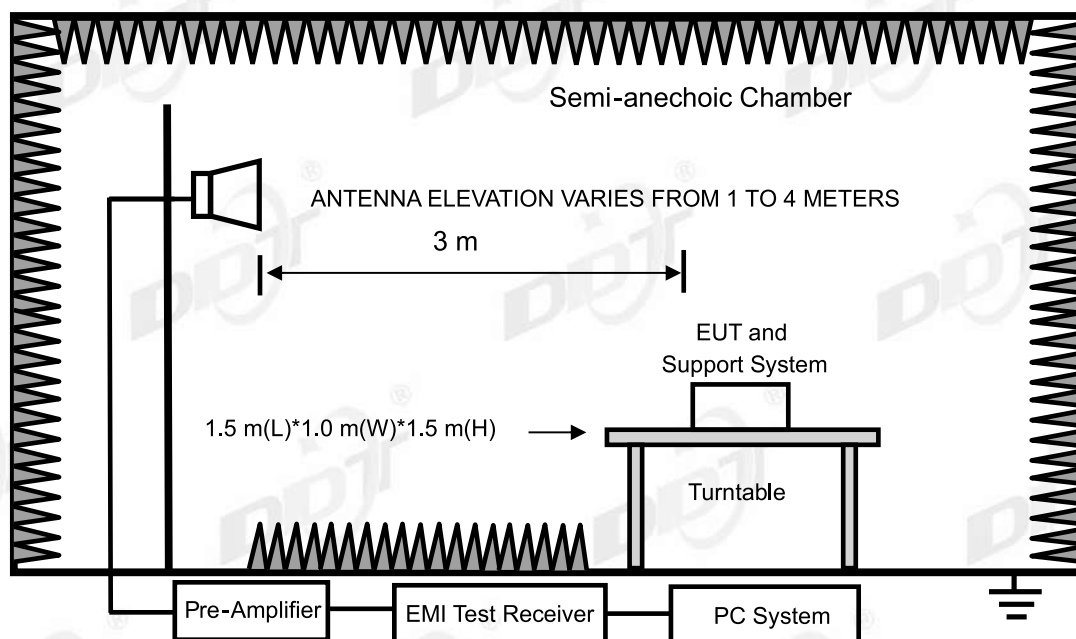

### 13.2. Limits

#### (1) FCC 15.205 Restricted frequency band

| MHz                      | MHz                 | MHz           | GHz          |
|--------------------------|---------------------|---------------|--------------|
| 0.090-0.110              | 16.42-16.423        | 399.9-410     | 4.5-5.15     |
| <sup>1</sup> 0.495-0.505 | 16.69475-16.69525   | 608-614       | 5.35-5.46    |
| 2.1735-2.1905            | 16.80425-16.80475   | 960-1240      | 7.25-7.75    |
| 4.125-4.128              | 25.5-25.67          | 1300-1427     | 8.025-8.5    |
| 4.1772&4.17775           | 37.5-38.25          | 1435-1626.5   | 9.0-9.2      |
| 4.2072&4.20775           | 73-74.6             | 1645.5-1646.5 | 9.3-9.5      |
| 6.215-6.218              | 74.8-75.2           | 1660-1710     | 10.6-12.7    |
| 6.26775-6.26825          | 108-121.94          | 1718.8-1722.2 | 13.25-13.4   |
| 6.31175-6.31225          | 123-138             | 2200-2300     | 14.47-14.5   |
| 8.291-8.294              | 149.9-150.05        | 2310-2390     | 15.35-16.2   |
| 8.362-8.366              | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4    |
| 8.37625-8.38675          | 156.7-156.9         | 2690-2900     | 22.01-23.12  |
| 8.41425-8.41475          | 162.0125-167.17     | 3260-3267     | 23.6-24.0    |
| 12.29-12.293             | 167.72-173.2        | 3332-3339     | 31.2-31.8    |
| 12.51975-12.52025        | 240-285             | 3345.8-3358   | 36.43-36.5   |
| 12.57675-12.57725        | 322-335.4           | 3600-4400     | <sup>2</sup> |
| 13.36-13.41              |                     |               |              |

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

<sup>2</sup>Above 38.6

## RSS-Gen section 8.10 Restricted frequency bands\*

| MHz             | MHz                 | MHz           | GHz         |
|-----------------|---------------------|---------------|-------------|
| 0.090-0.110     | 12.51975-12.52025   | 240-285       | 3.5-4.4     |
| 0.495-0.505     | 12.57675-12.57725   | 322-335.4     | 4.5-5.15    |
| 2.1735-2.1905   | 13.36-13.41         | 399.9-410     | 5.35-5.46   |
| 3.020-3.026     | 16.42-16.423        | 608-614       | 7.25-7.75   |
| 4.125-4.128     | 16.69475-16.69525   | 960-1427      | 8.025-8.5   |
| 4.1772&4.17775  | 16.80425-16.80475   | 1435-1626.5   | 9.0-9.2     |
| 4.2072&4.20775  | 25.5-25.67          | 1645.5-1646.5 | 9.3-9.5     |
| 5.677-5.683     | 37.5-38.25          | 1660-1710     | 10.6-12.7   |
| 6.215-6.218     | 73-74.6             | 1718.8-1722.2 | 13.25-13.4  |
| 6.26775-6.26825 | 74.8-75.2           | 2200-2300     | 14.47-14.5  |
| 6.31175-6.31225 | 108-138             | 2310-2390     | 15.35-16.2  |
| 8.291-8.294     | 149.9-150.05        | 2483.5-2500   | 17.7-21.4   |
| 8.362-8.366     | 156.52475-156.52525 | 2655-2900     | 22.01-23.12 |
| 8.37625-8.38675 | 156.7-156.9         | 3260-3267     | 23.6-24.0   |
| 8.41425-8.41475 | 162.0125-167.17     | 3332-3339     | 31.2-31.8   |
| 12.29-12.293    | 167.72-173.2        | 3345.8-3358   | 36.43-36.5  |
|                 |                     |               | Above 38.6  |

\* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## (2) FCC 15.209 Limit &amp; RSS-Gen section 8.9 Limit

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                       |               |
|------------------|--------------------|---------------------------------------------|---------------|
|                  |                    | uV/m                                        | dBuV/m        |
| 0.009 ~ 0.490    | 300                | 2400/F(kHz)                                 | 67.6-20log(F) |
| 0.490 ~ 1.705    | 30                 | 24000/F(kHz)                                | 87.6-20log(F) |
| 1.705 ~ 30.0     | 30                 | 30                                          | 29.54         |
| 30 ~ 88          | 3                  | 100                                         | 40.0          |
| 88 ~ 216         | 3                  | 150                                         | 43.5          |
| 216 ~ 960        | 3                  | 200                                         | 46.0          |
| 960 ~ 1000       | 3                  | 500                                         | 54.0          |
| Above 1000       | 3                  | 74.0 dBuV/m (Peak)<br>54.0 dBuV/m (Average) |               |

## Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.



(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

### 13.3. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

| Test frequency range | Test antenna used                        | Test antenna distance |
|----------------------|------------------------------------------|-----------------------|
| 9 kHz - 30 MHz       | Active Loop antenna                      | 3 m                   |
| 30 MHz - 1 GHz       | Trilog Broadband Antenna                 | 3 m                   |
| 1 GHz - 18 GHz       | Double Ridged Horn Antenna(1 GHz-18 GHz) | 3 m                   |
| 18 GHz - 40 GHz      | Horn Antenna(18 GHz-40 GHz)              | 1 m                   |

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

| Frequency band   | RBW     |
|------------------|---------|
| 9 kHz - 150 kHz  | 200 Hz  |
| 150 kHz - 30 MHz | 9 kHz   |
| 30 MHz - 1 GHz   | 120 kHz |

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) For 30 MHz ~ 25 GHz: (Scan with GFSK, p/4-DQPSK and 8DPSK, the worst case GFSK is record and reported)

(10) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

#### 13.4. Test result

**PASS. (See below detailed test result)**

## Radiated Emission test (9 KHz – 30 MHz)

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx Mode

Memo : BT DH5 2402MHz

Data: 53

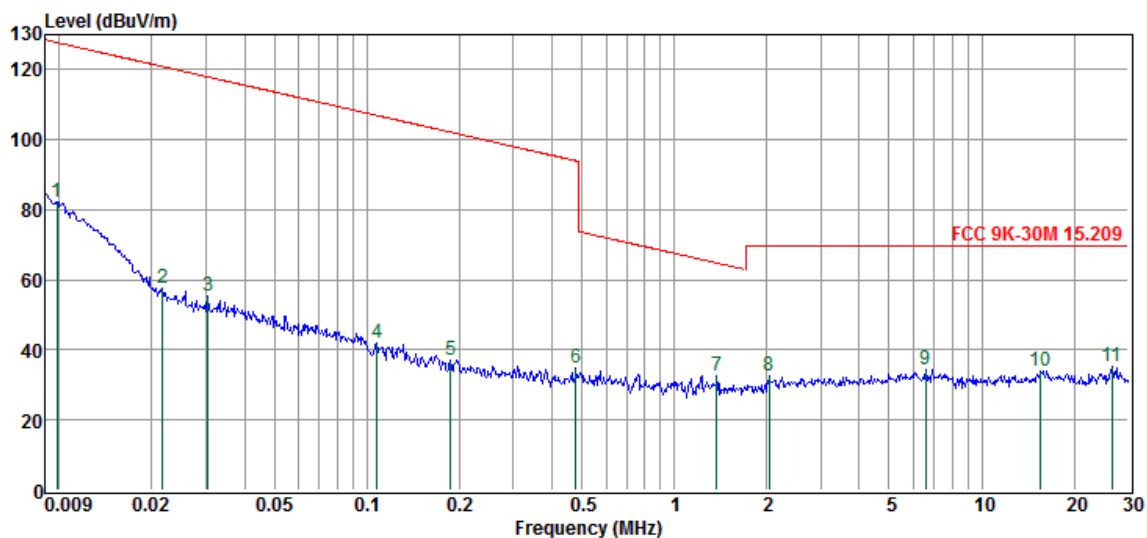


| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBuV/m) | Limit<br>Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Detect<br>or | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|--------------|--------------|
| 1              | 0.01           | 62.55                   | 19.58                       | 0.03                | 82.16                       | 127.74                    | -45.58                | Peak         | parallel     |
| 2              | 0.02           | 37.86                   | 19.79                       | 0.03                | 57.68                       | 120.91                    | -63.23                | Peak         | parallel     |
| 3              | 0.03           | 35.80                   | 19.75                       | 0.03                | 55.58                       | 117.95                    | -62.37                | Peak         | parallel     |
| 4              | 0.11           | 22.12                   | 19.69                       | 0.03                | 41.84                       | 106.95                    | -65.11                | Peak         | parallel     |
| 5              | 0.19           | 17.62                   | 19.61                       | 0.02                | 37.25                       | 102.16                    | -64.91                | Peak         | parallel     |
| 6              | 0.48           | 14.95                   | 19.70                       | 0.03                | 34.68                       | 93.98                     | -59.30                | Peak         | parallel     |
| 7              | 1.38           | 12.68                   | 19.95                       | 0.07                | 32.70                       | 64.83                     | -32.13                | Peak         | parallel     |
| 8              | 2.03           | 12.46                   | 19.90                       | 0.10                | 32.46                       | 69.54                     | -37.08                | Peak         | parallel     |
| 9              | 6.58           | 14.29                   | 20.00                       | 0.21                | 34.50                       | 69.54                     | -35.04                | Peak         | parallel     |
| 10             | 15.55          | 13.81                   | 19.95                       | 0.39                | 34.15                       | 69.54                     | -35.39                | Peak         | parallel     |
| 11             | 26.56          | 14.31                   | 20.33                       | 0.51                | 35.15                       | 69.54                     | -34.39                | Peak         | parallel     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - AMP Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: 9k-150kHz, RBW: 200Hz; 150k-30Mhz, RBW: 9kHz, Sweep time: auto.

## Radiated Emission test (30 MHz – 1 GHz)

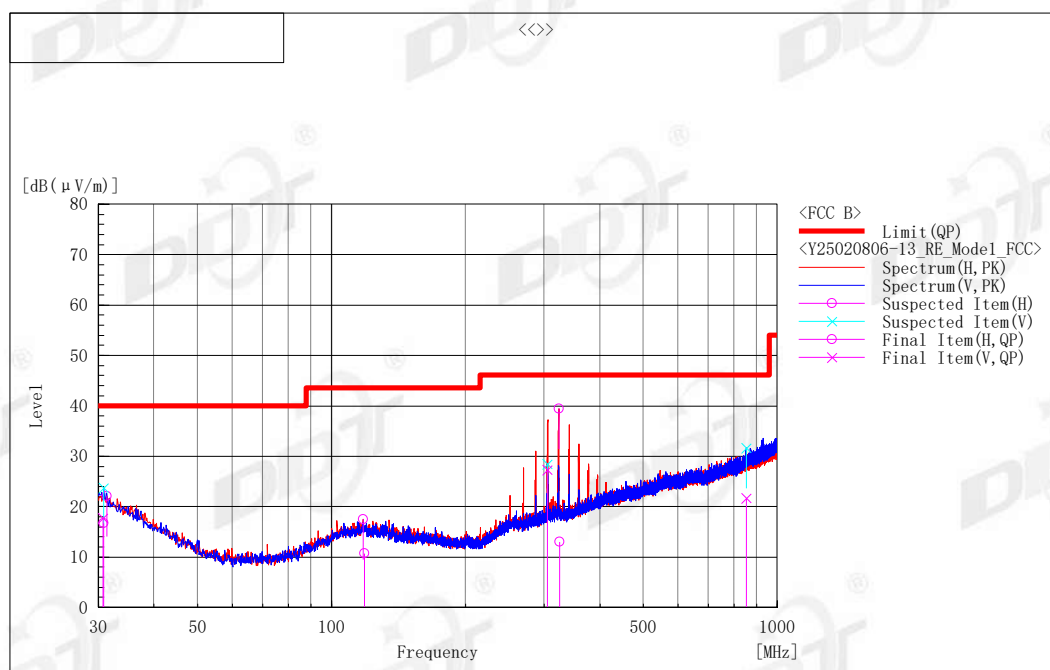

## Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB (μV)] | c.f<br>[dB (1/m)] | Result<br>QP<br>[dB (μV/m)] | Limit<br>QP<br>[dB (μV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[°] | System |
|-----|--------------------|-----|----------------------------|-------------------|-----------------------------|----------------------------|----------------------|----------------|--------------|--------|
| 1   | 30.858             | H   | 21.8                       | -5.1              | 16.7                        | 40.0                       | 23.3                 | 391.0          | 19.6         | 1      |
| 2   | 118.483            | H   | 21.2                       | -10.5             | 10.7                        | 43.5                       | 32.8                 | 385.0          | 64.7         | 1      |
| 3   | 324.300            | H   | 19.8                       | -6.8              | 13.0                        | 46.0                       | 33.0                 | 111.0          | 197.8        | 1      |
| 4   | 30.695             | V   | 23.2                       | -5.5              | 17.7                        | 40.0                       | 22.3                 | 287.0          | 51.5         | 2      |
| 5   | 305.057            | V   | 34.4                       | -7.1              | 27.3                        | 46.0                       | 18.7                 | 312.0          | 137.4        | 2      |
| 6   | 852.915            | V   | 17.3                       | 4.4               | 21.7                        | 46.0                       | 24.3                 | 106.0          | 168.6        | 2      |

Note) Receiving antenna polarization: Horizontal and/or Vertical

Test Distance: 3 m, Antenna Height: 1 m to 4 m

Level QP (Quasi-Peak) = Reading QP + Factor (Antenna Factor + Cable Loss - Amp. Gain)

Margin QP (Quasi-Peak) = Limit - Level QP

## Radiated Emission test (1 GHz – 3GHz)

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2402MHz

Data: 55

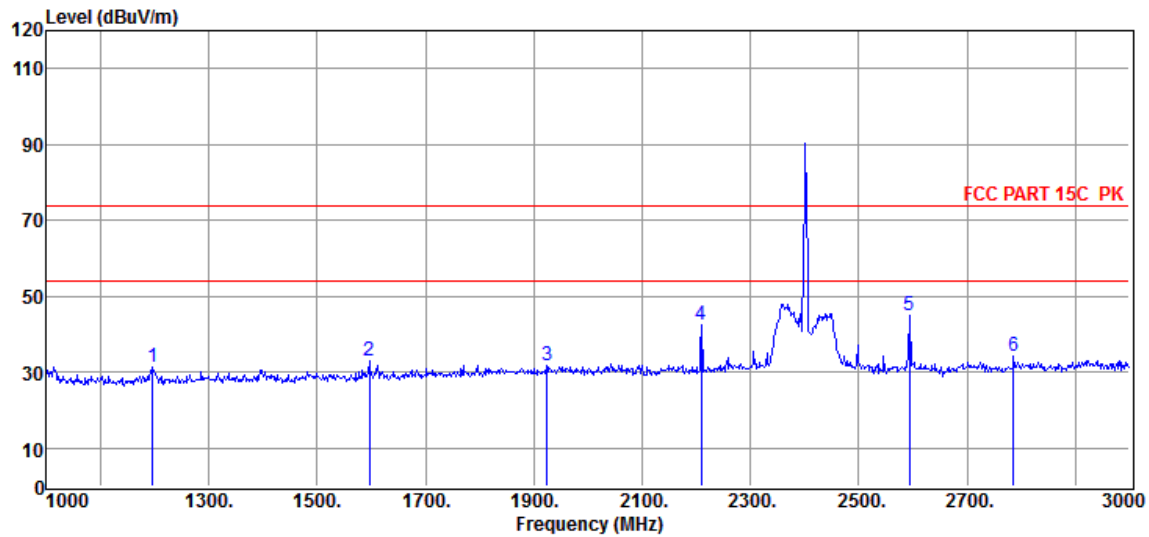

| Item   | Freq.   | Read Level | Antenna Factor | Cable Loss | Result Level | Limit Line | Over Limit | Detector | Polarization |
|--------|---------|------------|----------------|------------|--------------|------------|------------|----------|--------------|
| (Mark) | (MHz)   | (dBuV)     | (dB/m)         | dB         | (dBuV/m)     | (dBuV/m)   | (dB)       |          |              |
| 1      | 1196.00 | 47.51      | 24.67          | -40.78     | 31.40        | 74.00      | -42.60     | Peak     | HORIZONTAL   |
| 2      | 1596.00 | 47.53      | 26.20          | -40.69     | 33.04        | 74.00      | -40.96     | Peak     | HORIZONTAL   |
| 3      | 1924.00 | 44.06      | 27.90          | -40.37     | 31.59        | 74.00      | -42.41     | Peak     | HORIZONTAL   |
| 4      | 2210.00 | 54.33      | 28.34          | -40.03     | 42.64        | 74.00      | -31.36     | Peak     | HORIZONTAL   |
| 5      | 2594.00 | 56.14      | 28.66          | -39.81     | 44.99        | 74.00      | -29.01     | Peak     | HORIZONTAL   |
| 6      | 2786.00 | 44.54      | 29.20          | -39.58     | 34.16        | 74.00      | -39.84     | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT DH5 2402MHz

Data: 56

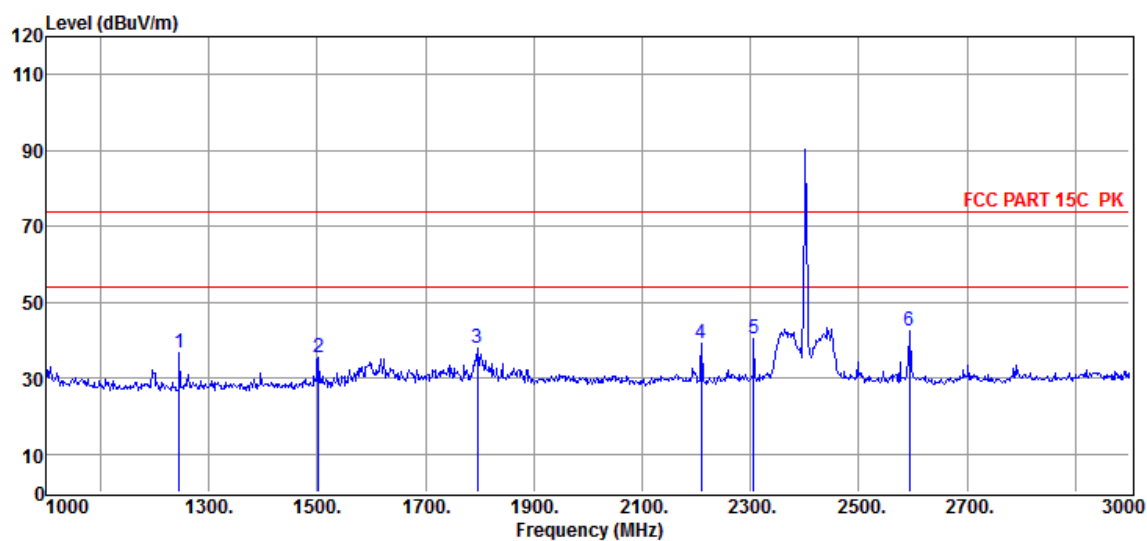

| Item<br>(Mark) | Freq.<br>(MHz) | Read Level<br>(dBuV) | Antenna Factor<br>(dB/m) | Cable Loss<br>dB | Result Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|----------------------|--------------------------|------------------|--------------------------|------------------------|--------------------|----------|--------------|
| 1              | 1246.00        | 52.51                | 24.84                    | -40.69           | 36.66                    | 74.00                  | -37.34             | Peak     | VERTICAL     |
| 2              | 1502.00        | 50.27                | 25.71                    | -40.51           | 35.47                    | 74.00                  | -38.53             | Peak     | VERTICAL     |
| 3              | 1796.00        | 51.38                | 27.24                    | -40.48           | 38.14                    | 74.00                  | -35.86             | Peak     | VERTICAL     |
| 4              | 2210.00        | 50.67                | 28.34                    | -40.03           | 38.98                    | 74.00                  | -35.02             | Peak     | VERTICAL     |
| 5              | 2306.00        | 52.14                | 28.36                    | -40.14           | 40.36                    | 74.00                  | -33.64             | Peak     | VERTICAL     |
| 6              | 2594.00        | 53.49                | 28.66                    | -39.81           | 42.34                    | 74.00                  | -31.66             | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2440MHz

Data: 57

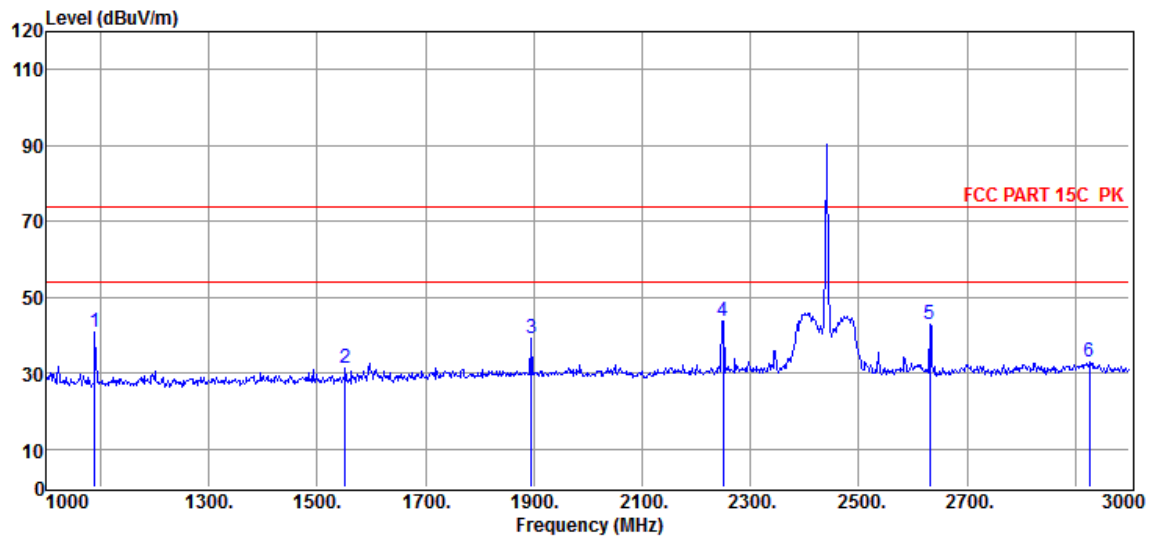

| Item<br>(Mark) | Freq.<br>(MHz) | Read Level<br>(dBμV) | Antenna Factor<br>(dB/m) | Cable Loss<br>dB | Result Level<br>(dBμV/m) | Limit Line<br>(dBμV/m) | Over Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|----------------------|--------------------------|------------------|--------------------------|------------------------|--------------------|----------|--------------|
| 1              | 1090.00        | 57.33                | 24.31                    | -41              | 40.64                    | 74.00                  | -33.36             | Peak     | HORIZONTAL   |
| 2              | 1552.00        | 45.88                | 25.97                    | -40.71           | 31.14                    | 74.00                  | -42.86             | Peak     | HORIZONTAL   |
| 3              | 1896.00        | 51.89                | 27.76                    | -40.55           | 39.10                    | 74.00                  | -34.90             | Peak     | HORIZONTAL   |
| 4              | 2250.00        | 55.59                | 28.35                    | -40.11           | 43.83                    | 74.00                  | -30.17             | Peak     | HORIZONTAL   |
| 5              | 2632.00        | 53.71                | 28.77                    | -39.77           | 42.71                    | 74.00                  | -31.29             | Peak     | HORIZONTAL   |
| 6              | 2926.00        | 42.93                | 29.59                    | -39.48           | 33.04                    | 74.00                  | -40.96             | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2440MHz

Data: 58

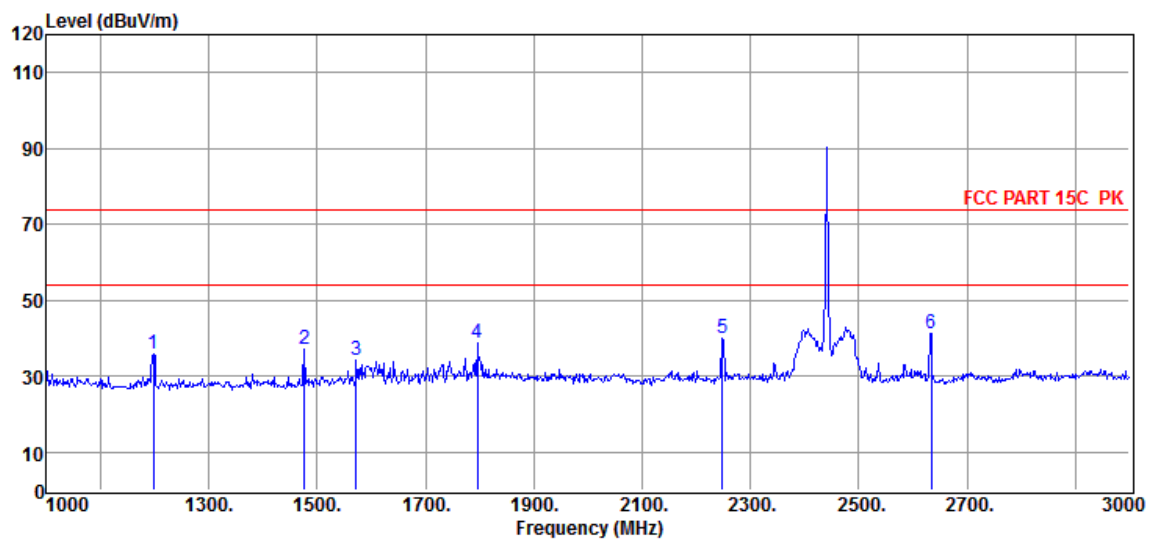

| Item<br>(Mark) | Freq.<br>(MHz) | Read Level<br>(dBμV) | Antenna Factor<br>(dB/m) | Cable Loss<br>dB | Result Level<br>(dBμV/m) | Limit Line<br>(dBμV/m) | Over Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|----------------------|--------------------------|------------------|--------------------------|------------------------|--------------------|----------|--------------|
| 1              | 1198.00        | 52.05                | 24.67                    | -40.76           | 35.96                    | 74.00                  | -38.04             | Peak     | VERTICAL     |
| 2              | 1476.00        | 52.03                | 25.62                    | -40.6            | 37.05                    | 74.00                  | -36.95             | Peak     | VERTICAL     |
| 3              | 1572.00        | 48.87                | 26.07                    | -40.7            | 34.24                    | 74.00                  | -39.76             | Peak     | VERTICAL     |
| 4              | 1796.00        | 52.11                | 27.24                    | -40.48           | 38.87                    | 74.00                  | -35.13             | Peak     | VERTICAL     |
| 5              | 2248.00        | 51.72                | 28.35                    | -40.11           | 39.96                    | 74.00                  | -34.04             | Peak     | VERTICAL     |
| 6              | 2634.00        | 52.20                | 28.78                    | -39.77           | 41.21                    | 74.00                  | -32.79             | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2480MHz

Data: 59

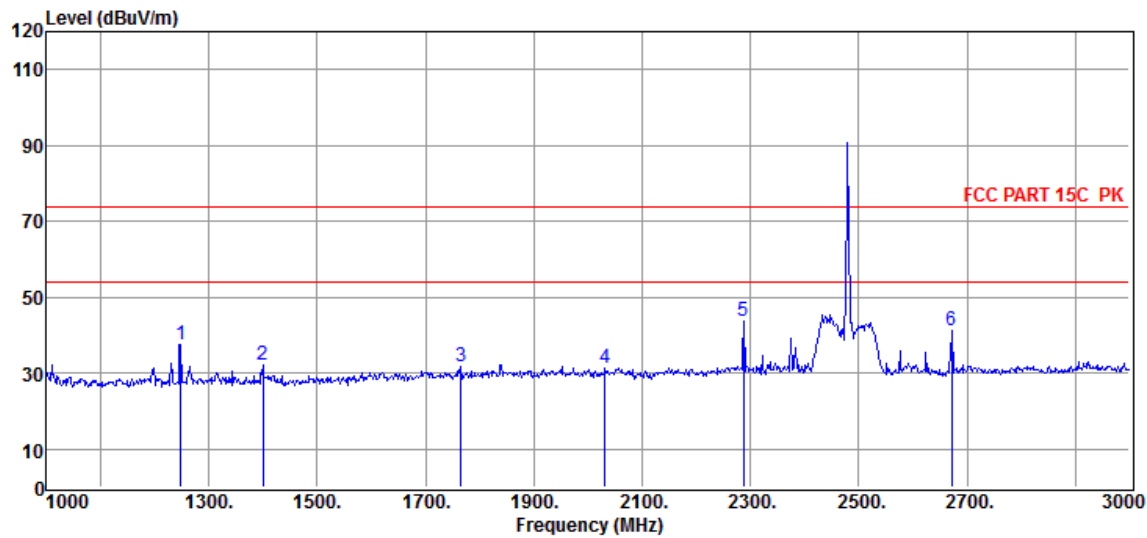

| Item<br>(Mark) | Freq.<br>(MHz) | Read Level<br>(dBuV) | Antenna Factor<br>(dB/m) | Cable Loss<br>dB | Result Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|----------------------|--------------------------|------------------|--------------------------|------------------------|--------------------|----------|--------------|
| 1              | 1248.00        | 53.43                | 24.84                    | -40.68           | 37.59                    | 74.00                  | -36.41             | Peak     | HORIZONTAL   |
| 2              | 1400.00        | 47.41                | 25.36                    | -40.71           | 32.06                    | 74.00                  | -41.94             | Peak     | HORIZONTAL   |
| 3              | 1766.00        | 45.15                | 27.08                    | -40.54           | 31.69                    | 74.00                  | -42.31             | Peak     | HORIZONTAL   |
| 4              | 2032.00        | 43.38                | 28.31                    | -40.43           | 31.26                    | 74.00                  | -42.74             | Peak     | HORIZONTAL   |
| 5              | 2288.00        | 55.47                | 28.36                    | -40.16           | 43.67                    | 74.00                  | -30.33             | Peak     | HORIZONTAL   |
| 6              | 2672.00        | 52.16                | 28.88                    | -39.76           | 41.28                    | 74.00                  | -32.72             | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2480MHz

Data: 60

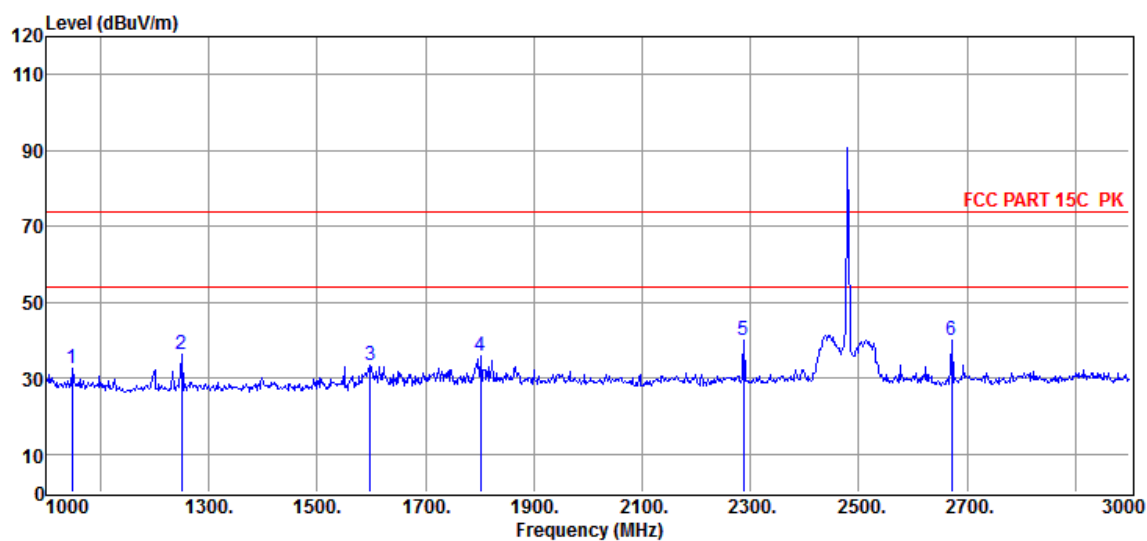

| Item<br>(Mark) | Freq.<br>(MHz) | Read Level<br>(dBuV) | Antenna Factor<br>(dB/m) | Cable Loss<br>dB | Result Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|----------------------|--------------------------|------------------|--------------------------|------------------------|--------------------|----------|--------------|
| 1              | 1048.00        | 49.42                | 24.16                    | -41.05           | 32.53                    | 74.00                  | -41.47             | Peak     | VERTICAL     |
| 2              | 1250.00        | 52.06                | 24.85                    | -40.68           | 36.23                    | 74.00                  | -37.77             | Peak     | VERTICAL     |
| 3              | 1598.00        | 48.02                | 26.21                    | -40.69           | 33.54                    | 74.00                  | -40.46             | Peak     | VERTICAL     |
| 4              | 1802.00        | 49.03                | 27.27                    | -40.47           | 35.83                    | 74.00                  | -38.17             | Peak     | VERTICAL     |
| 5              | 2288.00        | 51.64                | 28.36                    | -40.16           | 39.84                    | 74.00                  | -34.16             | Peak     | VERTICAL     |
| 6              | 2672.00        | 51.03                | 28.88                    | -39.76           | 40.15                    | 74.00                  | -33.85             | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission test (3 GHz – 18GHz)

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2402MHz

Data: 73

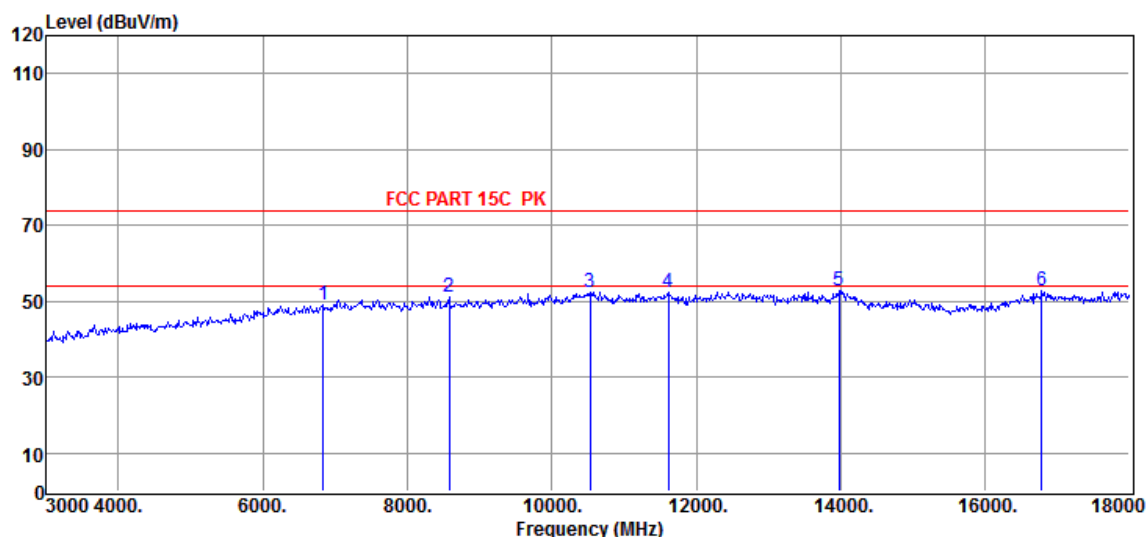

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 6840.00        | 40.12                   | 37.31                       | -28.41              | 49.02                       | 74.00                     | -24.98                | Peak     | HORIZONTAL   |
| 2              | 8580.00        | 41.11                   | 37.95                       | -27.85              | 51.21                       | 74.00                     | -22.79                | Peak     | HORIZONTAL   |
| 3              | 10530.00       | 38.99                   | 38.99                       | -25.44              | 52.54                       | 74.00                     | -21.46                | Peak     | HORIZONTAL   |
| 4              | 11610.00       | 38.56                   | 38.78                       | -25.08              | 52.26                       | 74.00                     | -21.74                | Peak     | HORIZONTAL   |
| 5              | 13980.00       | 37.45                   | 40.81                       | -25.55              | 52.71                       | 74.00                     | -21.29                | Peak     | HORIZONTAL   |
| 6              | 16785.00       | 33.93                   | 41.71                       | -23                 | 52.64                       | 74.00                     | -21.36                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2402MHz

Data: 74

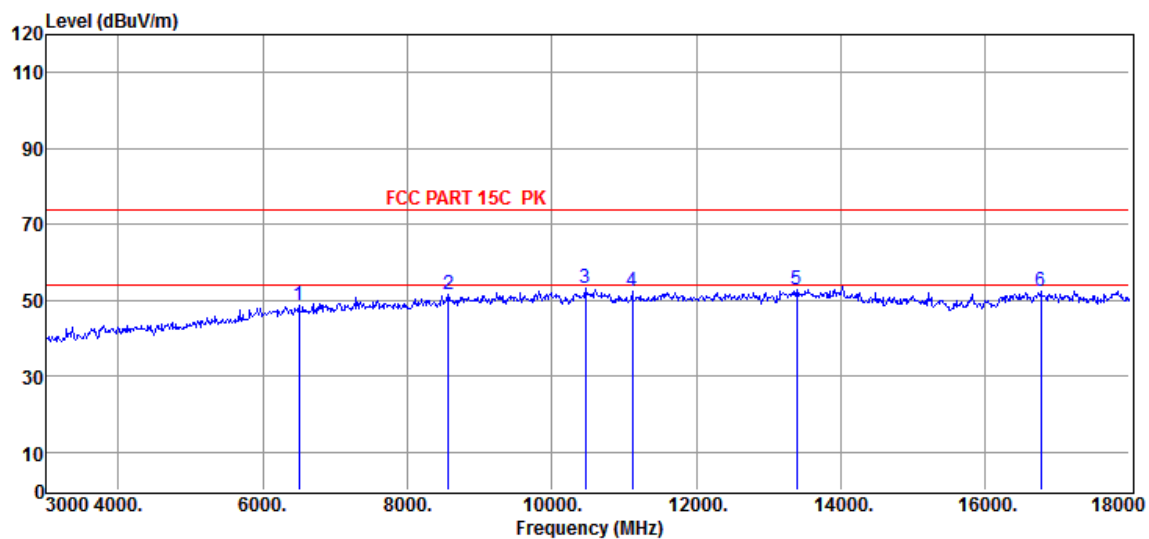

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBuV/m) | Limit<br>Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 6495.00        | 40.57                   | 36.69                       | -28.8               | 48.46                       | 74.00                     | -25.54                | Peak     | VERTICAL     |
| 2              | 8565.00        | 41.35                   | 37.94                       | -27.87              | 51.42                       | 74.00                     | -22.58                | Peak     | VERTICAL     |
| 3              | 10470.00       | 39.61                   | 38.99                       | -25.45              | 53.15                       | 74.00                     | -20.85                | Peak     | VERTICAL     |
| 4              | 11115.00       | 39.96                   | 38.88                       | -26.53              | 52.31                       | 74.00                     | -21.69                | Peak     | VERTICAL     |
| 5              | 13395.00       | 37.91                   | 40.90                       | -25.85              | 52.96                       | 74.00                     | -21.04                | Peak     | VERTICAL     |
| 6              | 16770.00       | 33.87                   | 41.66                       | -23.1               | 52.43                       | 74.00                     | -21.57                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2440MHz

Data: 75

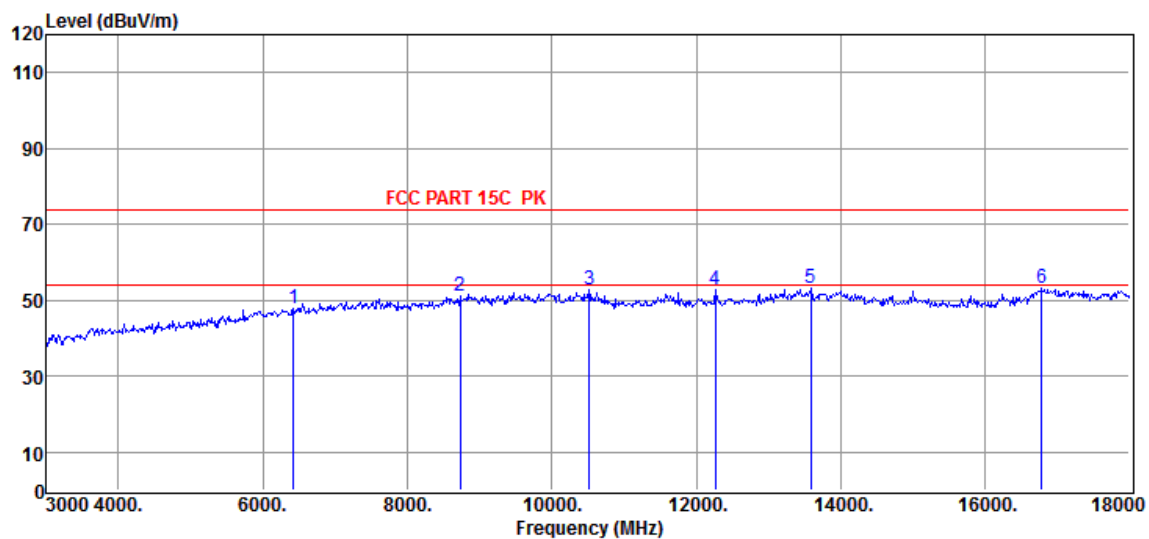

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 6420.00        | 40.09                   | 36.60                       | -28.84              | 47.85                       | 74.00                     | -26.15                | Peak     | HORIZONTAL   |
| 2              | 8730.00        | 40.85                   | 38.04                       | -27.96              | 50.93                       | 74.00                     | -23.07                | Peak     | HORIZONTAL   |
| 3              | 10515.00       | 39.29                   | 39.00                       | -25.44              | 52.85                       | 74.00                     | -21.15                | Peak     | HORIZONTAL   |
| 4              | 12270.00       | 39.54                   | 39.02                       | -25.73              | 52.83                       | 74.00                     | -21.17                | Peak     | HORIZONTAL   |
| 5              | 13590.00       | 38.43                   | 40.96                       | -26.06              | 53.33                       | 74.00                     | -20.67                | Peak     | HORIZONTAL   |
| 6              | 16785.00       | 34.28                   | 41.71                       | -23                 | 52.99                       | 74.00                     | -21.01                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT DH5 2440MHz

Data: 76

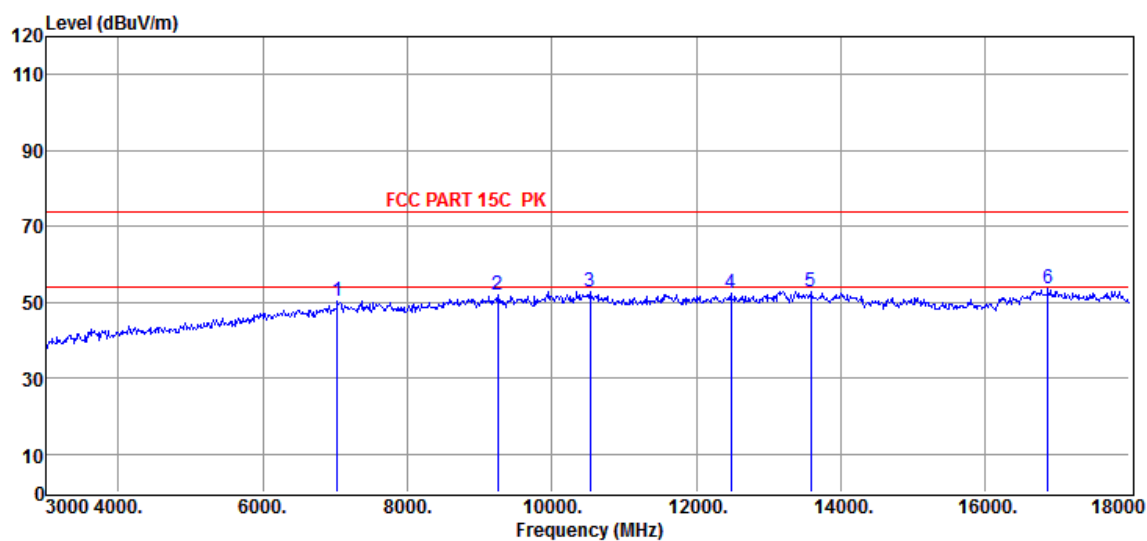

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 7035.00        | 41.10                   | 37.63                       | -28.33              | 50.40                       | 74.00                     | -23.60                | Peak     | VERTICAL     |
| 2              | 9255.00        | 41.28                   | 38.35                       | -27.77              | 51.86                       | 74.00                     | -22.14                | Peak     | VERTICAL     |
| 3              | 10530.00       | 39.33                   | 38.99                       | -25.44              | 52.88                       | 74.00                     | -21.12                | Peak     | VERTICAL     |
| 4              | 12480.00       | 38.78                   | 39.28                       | -25.76              | 52.30                       | 74.00                     | -21.70                | Peak     | VERTICAL     |
| 5              | 13590.00       | 38.00                   | 40.96                       | -26.06              | 52.90                       | 74.00                     | -21.10                | Peak     | VERTICAL     |
| 6              | 16875.00       | 34.84                   | 42.00                       | -23.31              | 53.53                       | 74.00                     | -20.47                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2480MHz

Data: 77

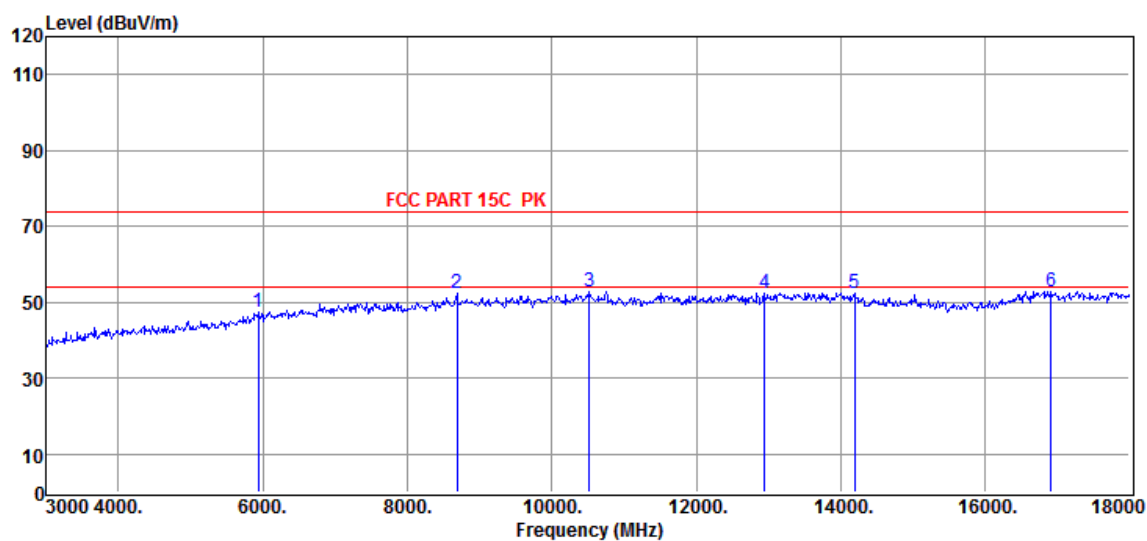

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 5940.00        | 40.59                   | 35.92                       | -28.94              | 47.57                       | 74.00                     | -26.43                | Peak     | HORIZONTAL   |
| 2              | 8685.00        | 42.29                   | 38.01                       | -28.07              | 52.23                       | 74.00                     | -21.77                | Peak     | HORIZONTAL   |
| 3              | 10515.00       | 39.30                   | 39.00                       | -25.44              | 52.86                       | 74.00                     | -21.14                | Peak     | HORIZONTAL   |
| 4              | 12945.00       | 38.46                   | 40.37                       | -26.54              | 52.29                       | 74.00                     | -21.71                | Peak     | HORIZONTAL   |
| 5              | 14190.00       | 37.65                   | 40.53                       | -25.65              | 52.53                       | 74.00                     | -21.47                | Peak     | HORIZONTAL   |
| 6              | 16920.00       | 34.40                   | 42.14                       | -23.56              | 52.98                       | 74.00                     | -21.02                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT DH5 2480MHz

Data: 78

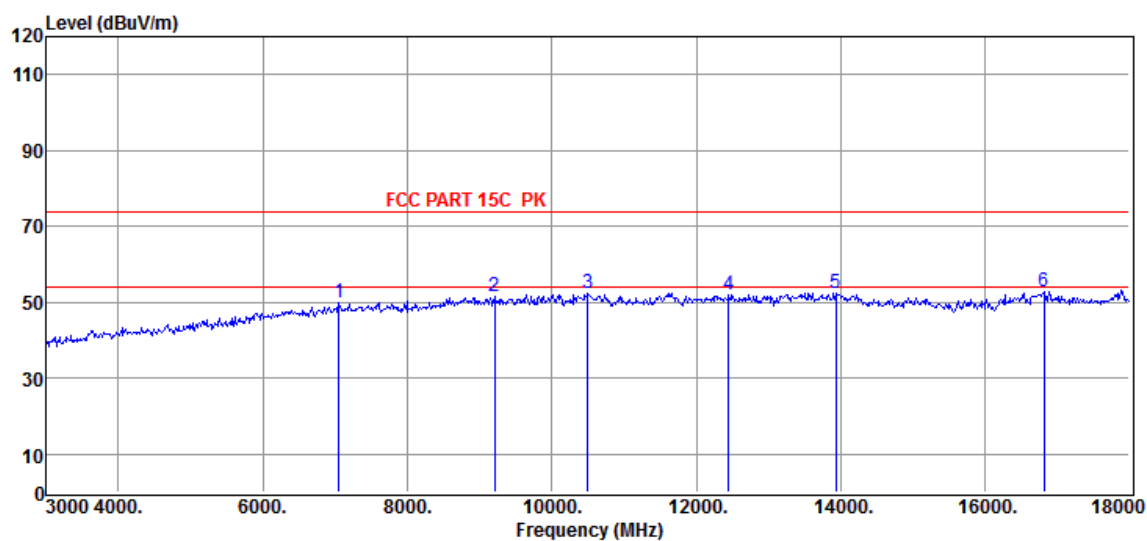

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 7050.00        | 40.56                   | 37.64                       | -28.23              | 49.97                       | 74.00                     | -24.03                | Peak     | VERTICAL     |
| 2              | 9210.00        | 40.99                   | 38.33                       | -27.93              | 51.39                       | 74.00                     | -22.61                | Peak     | VERTICAL     |
| 3              | 10500.00       | 38.91                   | 39.00                       | -25.45              | 52.46                       | 74.00                     | -21.54                | Peak     | VERTICAL     |
| 4              | 12450.00       | 38.41                   | 39.24                       | -25.67              | 51.98                       | 74.00                     | -22.02                | Peak     | VERTICAL     |
| 5              | 13935.00       | 37.18                   | 40.83                       | -25.67              | 52.34                       | 74.00                     | -21.66                | Peak     | VERTICAL     |
| 6              | 16815.00       | 34.00                   | 41.81                       | -22.97              | 52.84                       | 74.00                     | -21.16                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission test (18 GHz – 26.5GHz)

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2402MHz

Data: 85

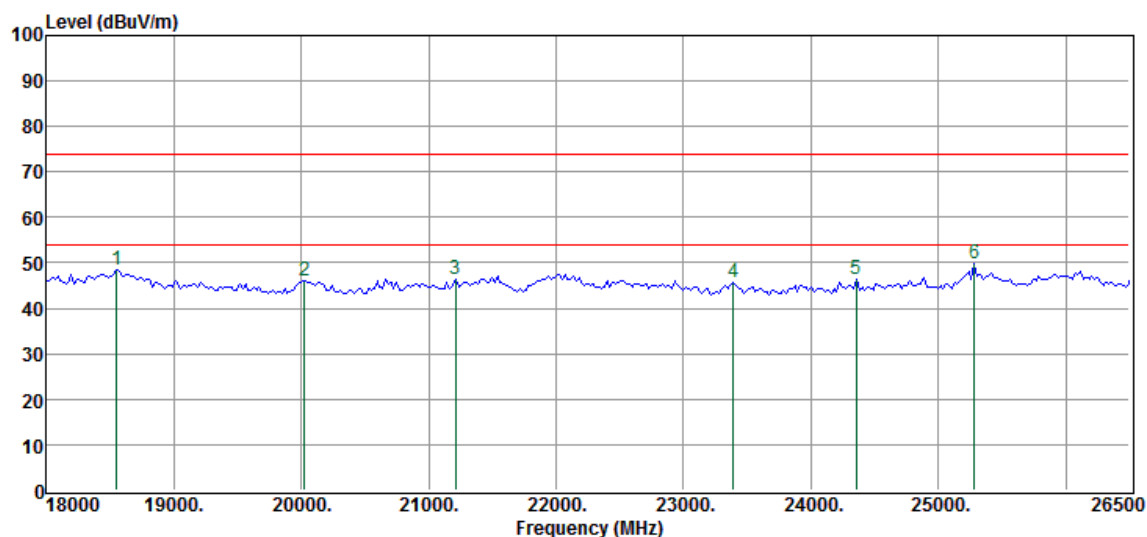

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 18550.00       | 42.38                   | -2.38                       | 0.00                | 8.48                | 48.48                       | 74.00                     | -25.52                | Peak     | HORIZONTAL   |
| 2              | 20024.00       | 41.42                   | -4.42                       | 0.00                | 8.92                | 45.92                       | 74.00                     | -28.08                | Peak     | HORIZONTAL   |
| 3              | 21212.00       | 42.88                   | -5.12                       | 0.00                | 8.69                | 46.45                       | 74.00                     | -27.55                | Peak     | HORIZONTAL   |
| 4              | 23390.00       | 41.60                   | -4.83                       | 0.00                | 8.77                | 45.54                       | 74.00                     | -28.46                | Peak     | HORIZONTAL   |
| 5              | 24358.00       | 42.35                   | -5.38                       | 0.00                | 9.50                | 46.47                       | 74.00                     | -27.53                | Peak     | HORIZONTAL   |
| 6              | 25282.00       | 45.30                   | -4.84                       | 0.00                | 9.42                | 49.88                       | 74.00                     | -24.12                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT DH5 2402MHz

Data: 86

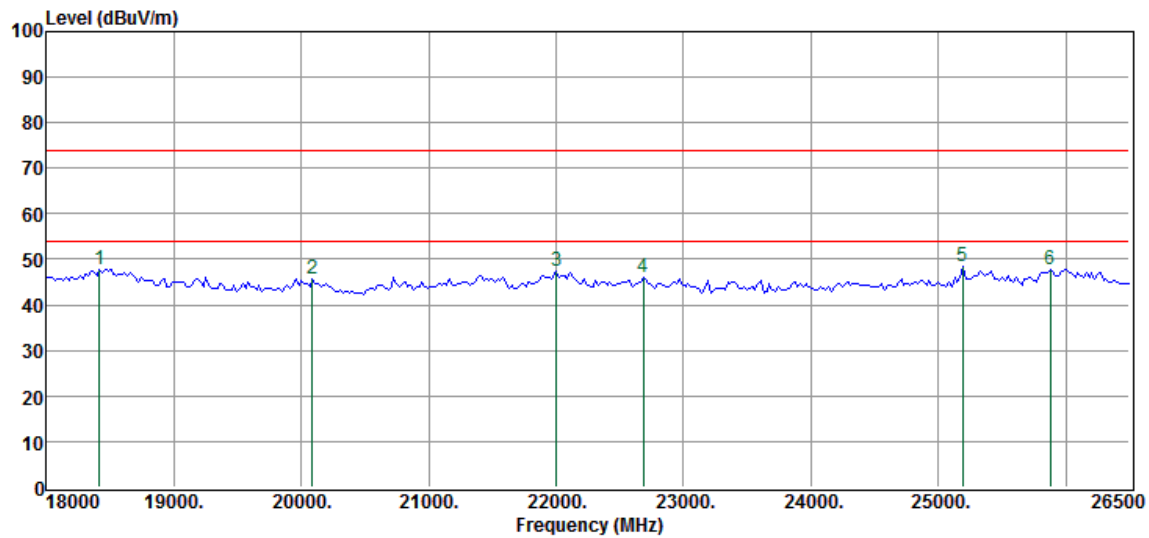

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 18418.00       | 41.62                   | -2.26                       | 0.00                | 8.47                | 47.83                       | 74.00                     | -26.17                | Peak     | VERTICAL     |
| 2              | 20090.00       | 41.48                   | -4.43                       | 0.00                | 8.79                | 45.84                       | 74.00                     | -28.16                | Peak     | VERTICAL     |
| 3              | 22004.00       | 43.67                   | -5.10                       | 0.00                | 8.96                | 47.53                       | 74.00                     | -26.47                | Peak     | VERTICAL     |
| 4              | 22686.00       | 42.28                   | -4.71                       | 0.00                | 8.37                | 45.94                       | 74.00                     | -28.06                | Peak     | VERTICAL     |
| 5              | 25194.00       | 43.81                   | -4.90                       | 0.00                | 9.40                | 48.31                       | 74.00                     | -25.69                | Peak     | VERTICAL     |
| 6              | 25876.00       | 42.73                   | -4.71                       | 0.00                | 9.79                | 47.81                       | 74.00                     | -26.19                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



## 14. Band Edge Compliance

### 14.1. Block diagram of test setup

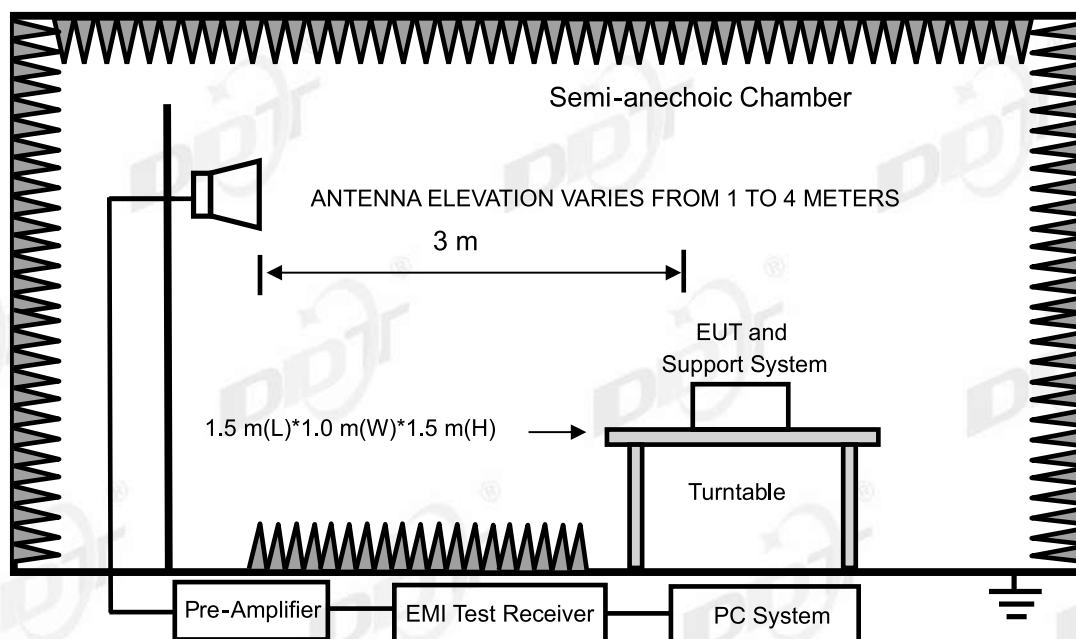

### 14.2. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

### 14.3. Test procedure

Same with Radiated Emission except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report. According to the results of the radiated Emission test, it can be judged that the horizontal direction is the Worst case

### 14.4. Test result

**PASS.** (See below detailed test result)

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT DH5 2402MHz

Data: 91

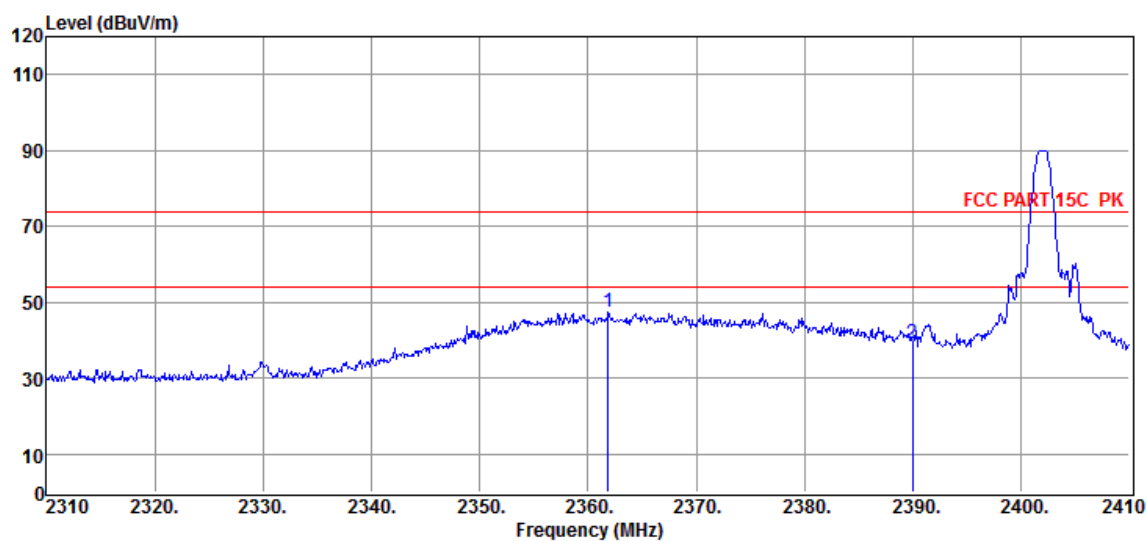

| Item<br>(Mark) | Freq.<br>(MHz) | Read Level<br>(dBμV) | Antenna Factor<br>(dB/m) | Cable Loss<br>dB | Result Level<br>(dBμV/m) | Limit Line<br>(dBμV/m) | Over Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|----------------------|--------------------------|------------------|--------------------------|------------------------|--------------------|----------|--------------|
| 1              | 2361.90        | 58.76                | 28.37                    | -39.86           | 47.27                    | 74.00                  | -26.73             | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 50.83                | 28.38                    | -39.91           | 39.30                    | 74.00                  | -34.70             | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT DH5 2402MHz

Data: 92

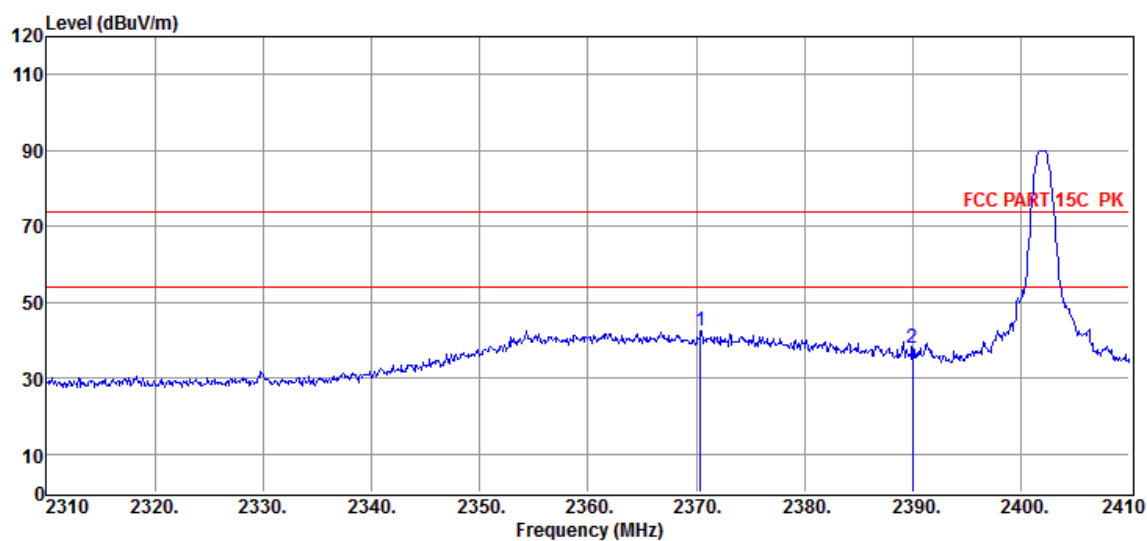

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBuV/m) | Limit<br>Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2370.40        | 54.05                   | 28.37                       | -39.87              | 42.55                       | 74.00                     | -31.45                | Peak     | VERTICAL     |
| 2              | 2390.00        | 49.48                   | 28.38                       | -39.91              | 37.95                       | 74.00                     | -36.05                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT DH5 2480MHz

Data: 93

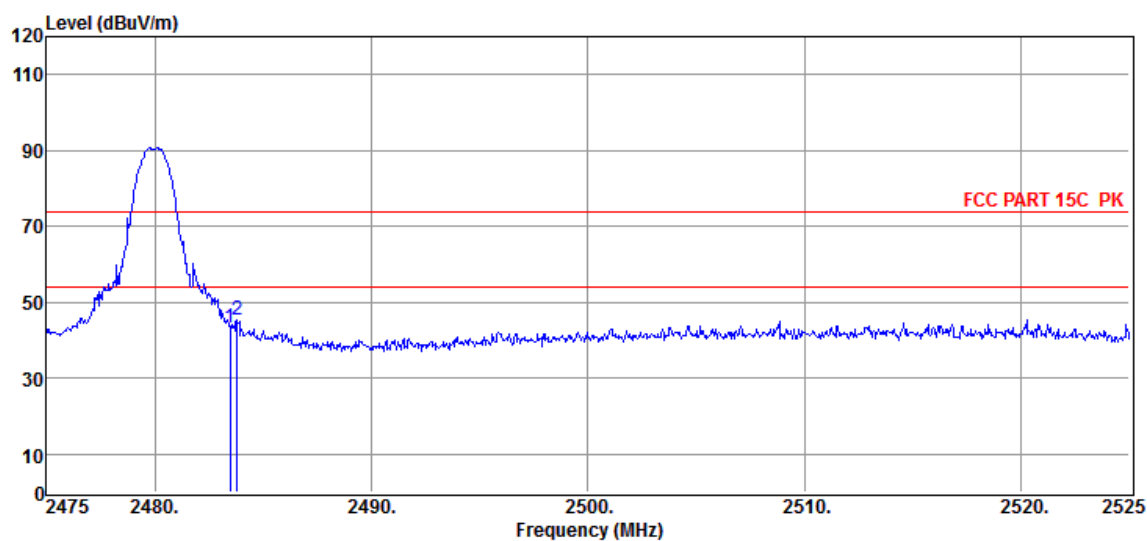

| Item<br>(Mark) | Freq.<br>(MHz) | Read Level<br>(dBuV) | Antenna Factor<br>(dB/m) | Cable Loss<br>dB | Result Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|----------------------|--------------------------|------------------|--------------------------|------------------------|--------------------|----------|--------------|
| 1              | 2483.50        | 54.66                | 28.40                    | -39.95           | 43.11                    | 74.00                  | -30.89             | Peak     | HORIZONTAL   |
| 2              | 2483.80        | 56.88                | 28.40                    | -39.95           | 45.33                    | 74.00                  | -28.67             | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT DH5 2480MHz

Data: 94

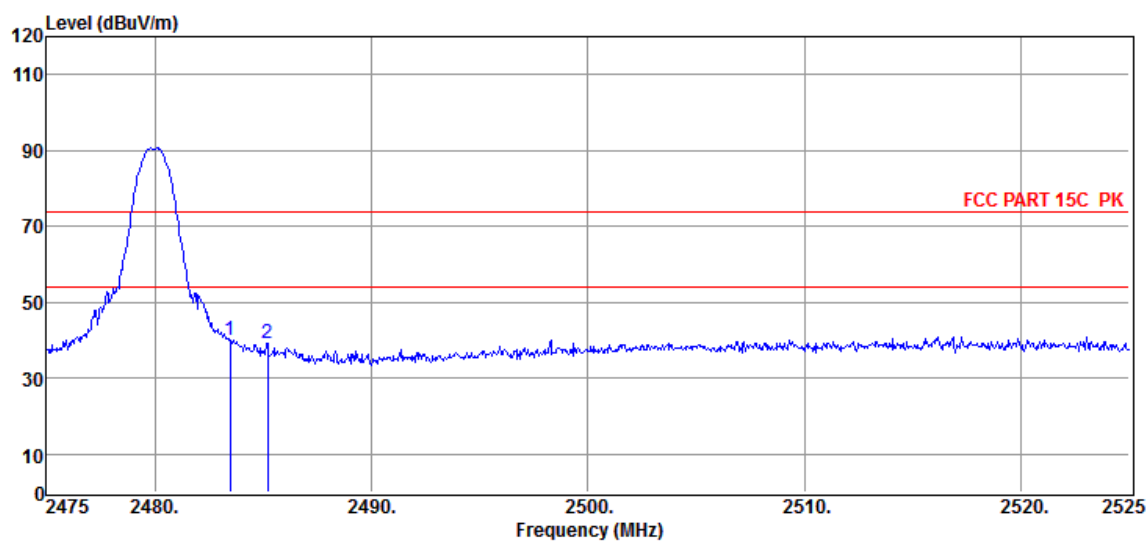

| Item<br>(Mark) | Freq.<br>(MHz) | Read Level<br>(dBμV) | Antenna Factor<br>(dB/m) | Cable Loss<br>dB | Result Level<br>(dBμV/m) | Limit Line<br>(dBμV/m) | Over Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|----------------------|--------------------------|------------------|--------------------------|------------------------|--------------------|----------|--------------|
| 1              | 2483.50        | 51.37                | 28.40                    | -39.95           | 39.82                    | 74.00                  | -34.18             | Peak     | VERTICAL     |
| 2              | 2485.20        | 50.88                | 28.40                    | -39.95           | 39.33                    | 74.00                  | -34.67             | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

Test Site : 10m Chamber

Test Date : 02-20-2025

Tested By : Novak Wei

EUT : Xiaomi Sound Party


Model Number : MDZ-39-DB

Power Supply : Battery

Test Mode : Tx mode

Memo : BT 2DH5 2402MHz

Data: 95

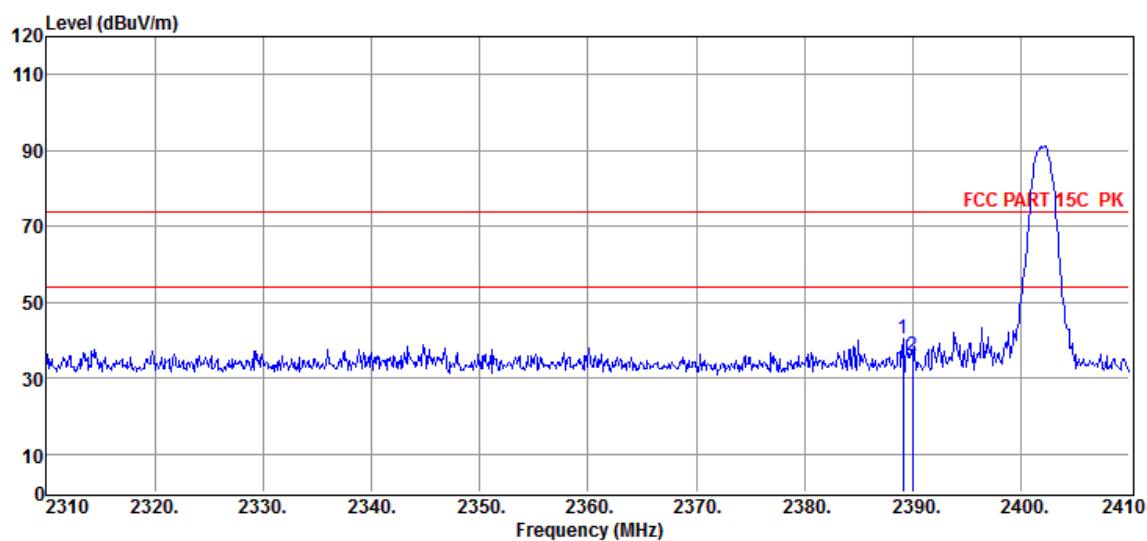

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2389.10        | 51.91                   | 28.38                       | 43.78               | 3.87                | 40.38                       | 74.00                     | -33.62                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 47.45                   | 28.38                       | 43.78               | 3.87                | 35.92                       | 74.00                     | -38.08                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss – PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT 2DH5 2402MHz

Data: 96

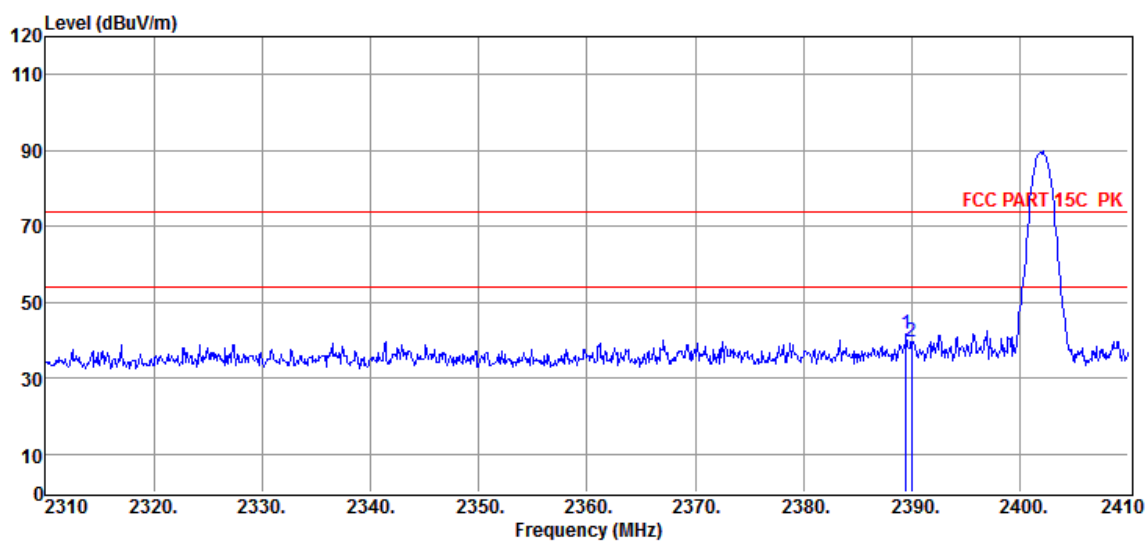

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2389.50        | 53.23                   | 28.38                       | 43.78               | 3.87                | 41.70                       | 74.00                     | -32.30                | Peak     | VERTICAL     |
| 2              | 2390.00        | 51.23                   | 28.38                       | 43.78               | 3.87                | 39.70                       | 74.00                     | -34.30                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss – PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT 2DH5 2480MHz

Data: 97

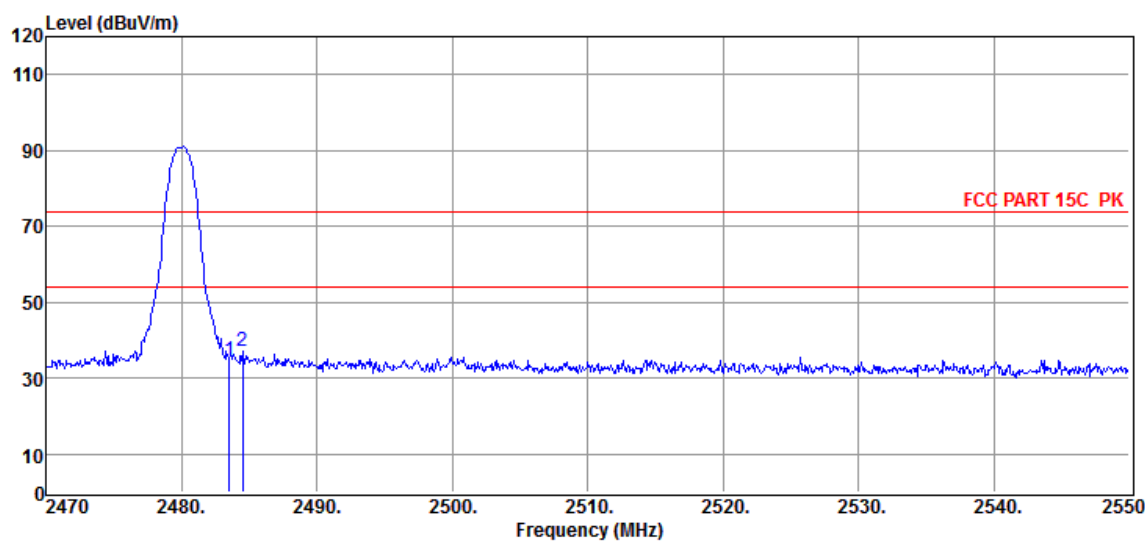

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 46.16                   | 28.40                       | 43.75               | 3.80                | 34.61                       | 74.00                     | -39.39                | Peak     | HORIZONTAL   |
| 2              | 2484.48        | 48.47                   | 28.40                       | 43.75               | 3.80                | 36.92                       | 74.00                     | -37.08                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss – PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT 2DH5 2480MHz

Data: 98

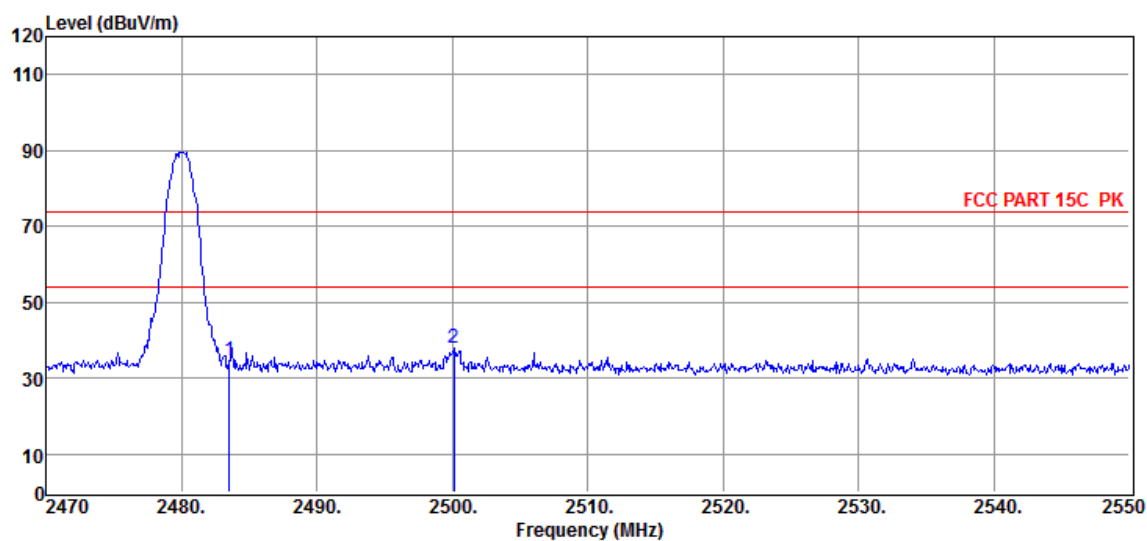

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 46.10                   | 28.40                       | 43.75               | 3.80                | 34.55                       | 74.00                     | -39.45                | Peak     | VERTICAL     |
| 2              | 2500.08        | 49.39                   | 28.40                       | 43.75               | 3.79                | 37.83                       | 74.00                     | -36.17                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss – PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT 3DH5 2402MHz

Data: 99

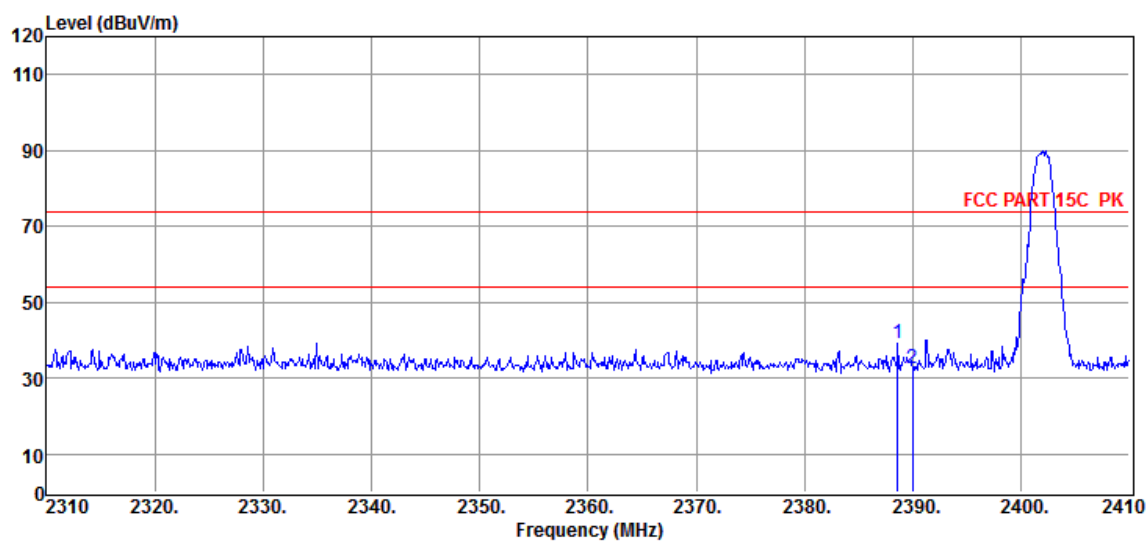

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2388.60        | 50.70                   | 28.38                       | 43.78               | 3.88                | 39.18                       | 74.00                     | -34.82                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 44.31                   | 28.38                       | 43.78               | 3.87                | 32.78                       | 74.00                     | -41.22                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss – PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT 3DH5 2402MHz

Data: 100

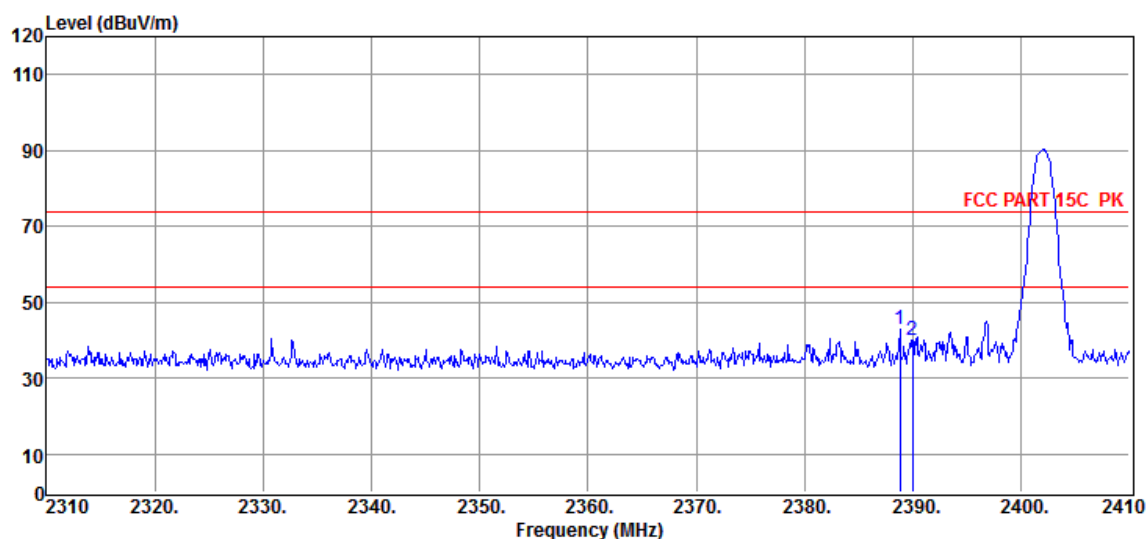

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2388.80        | 54.29                   | 28.38                       | 43.78               | 3.87                | 42.76                       | 74.00                     | -31.24                | Peak     | VERTICAL     |
| 2              | 2390.00        | 51.47                   | 28.38                       | 43.78               | 3.87                | 39.94                       | 74.00                     | -34.06                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss – PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT 3DH5 2480MHz

Data: 101

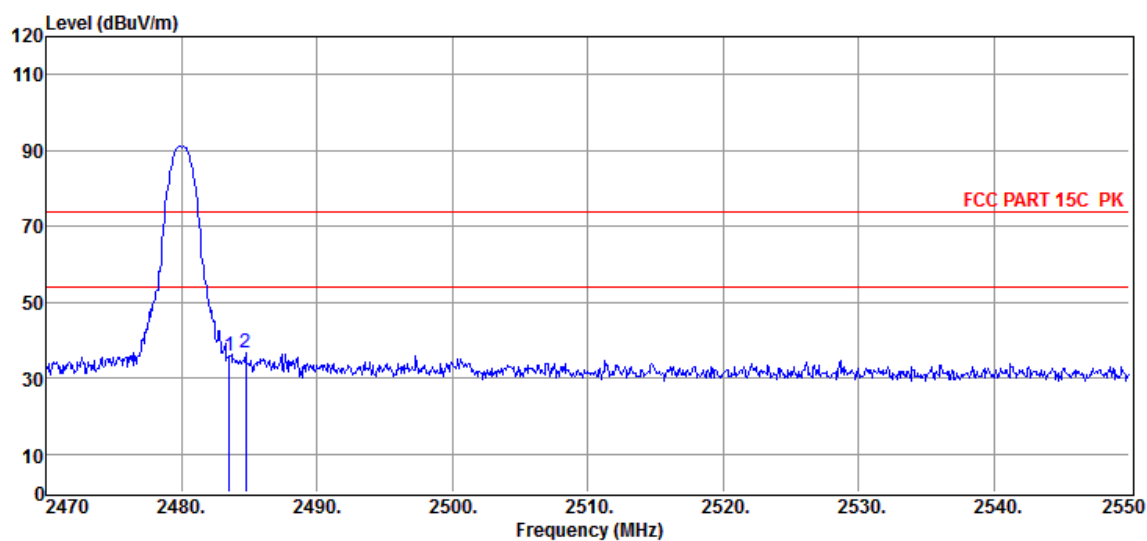

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 47.63                   | 28.40                       | 43.75               | 3.80                | 36.08                       | 74.00                     | -37.92                | Peak     | HORIZONTAL   |
| 2              | 2484.72        | 48.20                   | 28.40                       | 43.75               | 3.80                | 36.65                       | 74.00                     | -37.35                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss – PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



## Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 02-20-2025

**Tested By** : Novak Wei

**EUT** : Xiaomi Sound Party


**Model Number** : MDZ-39-DB

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BT 3DH5 2480MHz

Data: 102

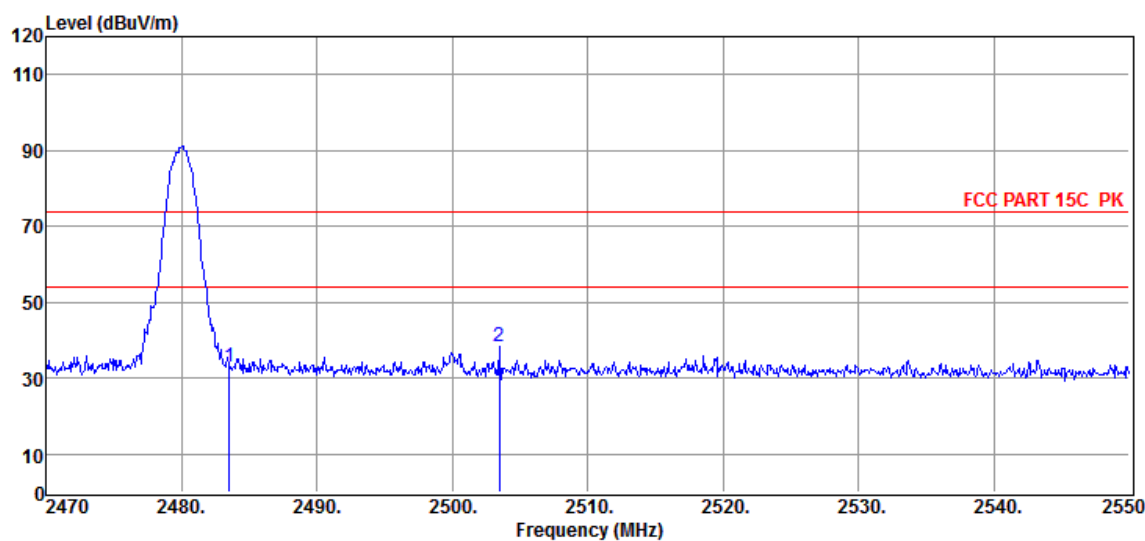

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 44.34                   | 28.40                       | 43.75               | 3.80                | 32.79                       | 74.00                     | -41.21                | Peak     | VERTICAL     |
| 2              | 2503.44        | 50.07                   | 28.41                       | 43.75               | 3.80                | 38.53                       | 74.00                     | -35.47                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss – PRM Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## 15. Power Line Conducted Emissions

### 15.1. Block diagram of test setup

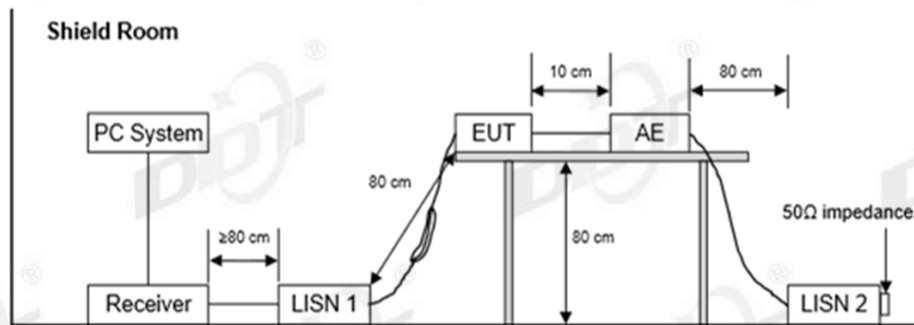

### 15.2. Limits

| Frequency       | Quasi-Peak Level<br>dB(uV) | Average Level<br>dB(uV) |
|-----------------|----------------------------|-------------------------|
| 150 kHz~500 kHz | 66 ~ 56*                   | 56 ~ 46*                |
| 500 kHz~5 MHz   | 56                         | 46                      |
| 5 MHz~30 MHz    | 60                         | 50                      |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 15.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.


Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

## 15.4. Test result

Pass

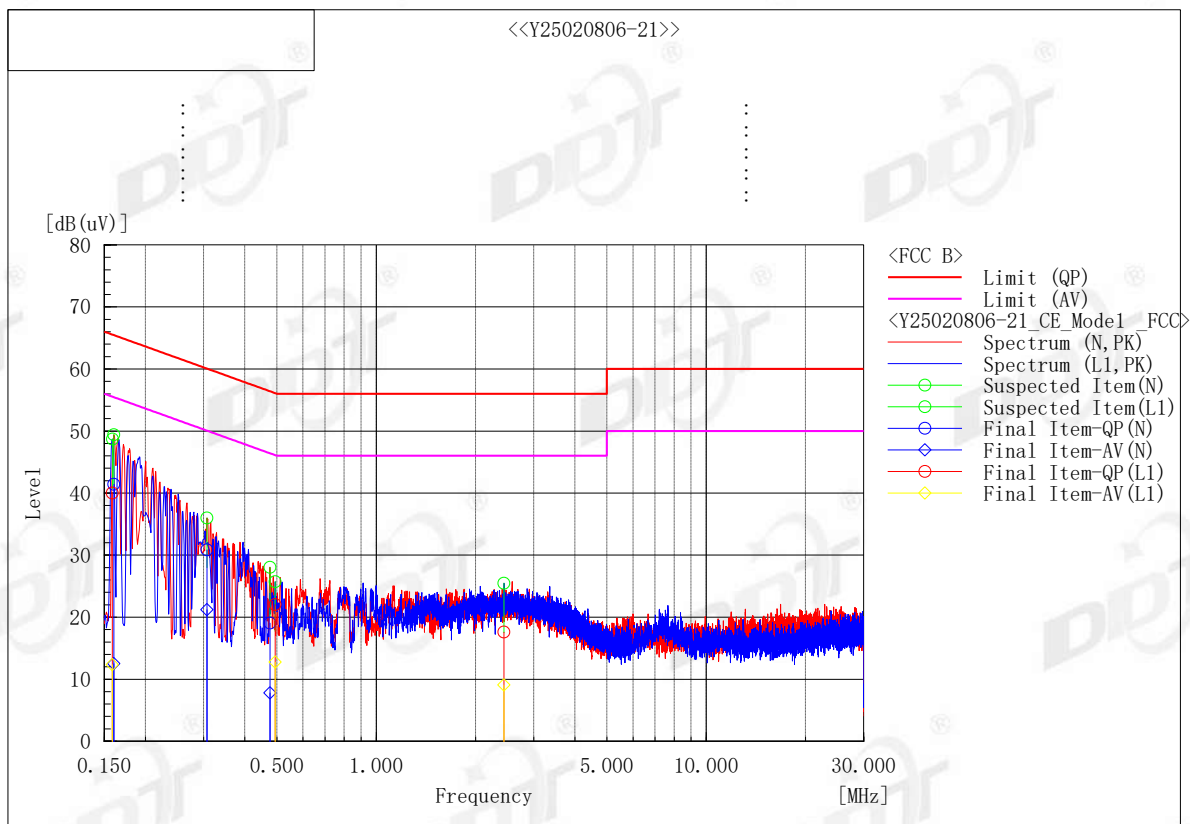

## Final Result

--- N Phase ---

| No. | Frequency | Reading<br>QP | Reading<br>CAV | c. f | Result<br>QP | Result<br>CAV | Limit<br>QP | Limit<br>AV | Margin<br>QP | Margin<br>CAV |
|-----|-----------|---------------|----------------|------|--------------|---------------|-------------|-------------|--------------|---------------|
|     | [MHz]     | [dB(uV)]      | [dB(uV)]       | [dB] | [dB(uV)]     | [dB(uV)]      | [dB(uV)]    | [dB(uV)]    | [dB]         | [dB]          |
| 1   | 0.16024   | 31.6          | 2.7            | 9.8  | 41.4         | 12.5          | 65.5        | 55.5        | 24.1         | 43.0          |
| 2   | 0.30707   | 21.1          | 11.4           | 9.8  | 30.9         | 21.2          | 60.0        | 50.0        | 29.1         | 28.8          |
| 3   | 0.47656   | 9.3           | -2.0           | 9.8  | 19.1         | 7.8           | 56.4        | 46.4        | 37.3         | 38.6          |

--- L1 Phase ---

| No. | Frequency | Reading<br>QP | Reading<br>CAV | c. f | Result<br>QP | Result<br>CAV | Limit<br>QP | Limit<br>AV | Margin<br>QP | Margin<br>CAV |
|-----|-----------|---------------|----------------|------|--------------|---------------|-------------|-------------|--------------|---------------|
|     | [MHz]     | [dB(uV)]      | [dB(uV)]       | [dB] | [dB(uV)]     | [dB(uV)]      | [dB(uV)]    | [dB(uV)]    | [dB]         | [dB]          |
| 1   | 0.15866   | 30.2          | 2.5            | 9.8  | 40.0         | 12.3          | 65.5        | 55.5        | 25.5         | 43.2          |
| 2   | 0.49395   | 12.2          | 3.0            | 9.8  | 22.0         | 12.8          | 56.1        | 46.1        | 34.1         | 33.3          |
| 3   | 2.43936   | 7.7           | -0.8           | 9.9  | 17.6         | 9.1           | 56.0        | 46.0        | 38.4         | 36.9          |

## 16. Test Setup Photograph

Please find the Test Setup Photograph in APPENDIXES

## 17. Photos of the EUT

Please find the photos of EUT in APPENDIXES.

**END OF REPORT**