


Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5755MHz	Polarization	Horizontal

120 dBuV/m

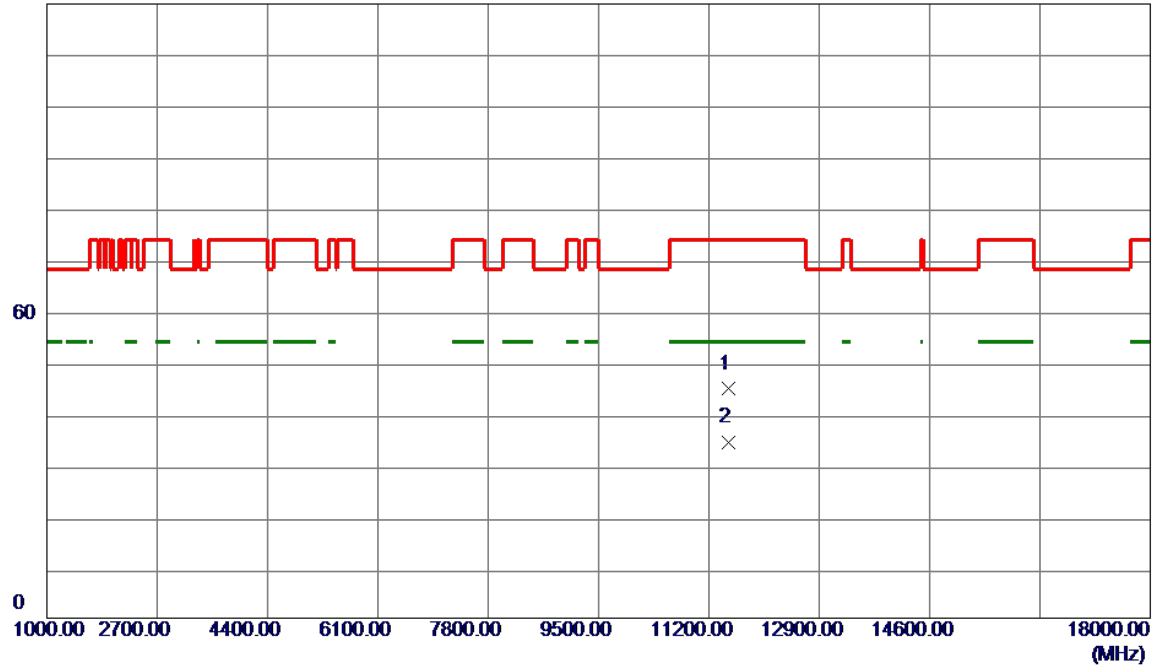


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	43.94	0.83	44.77	74.00	-29.23	Peak	
2 *	11510.0000	33.61	0.83	34.44	54.00	-19.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5795MHz	Polarization	Vertical

120 dBuV/m

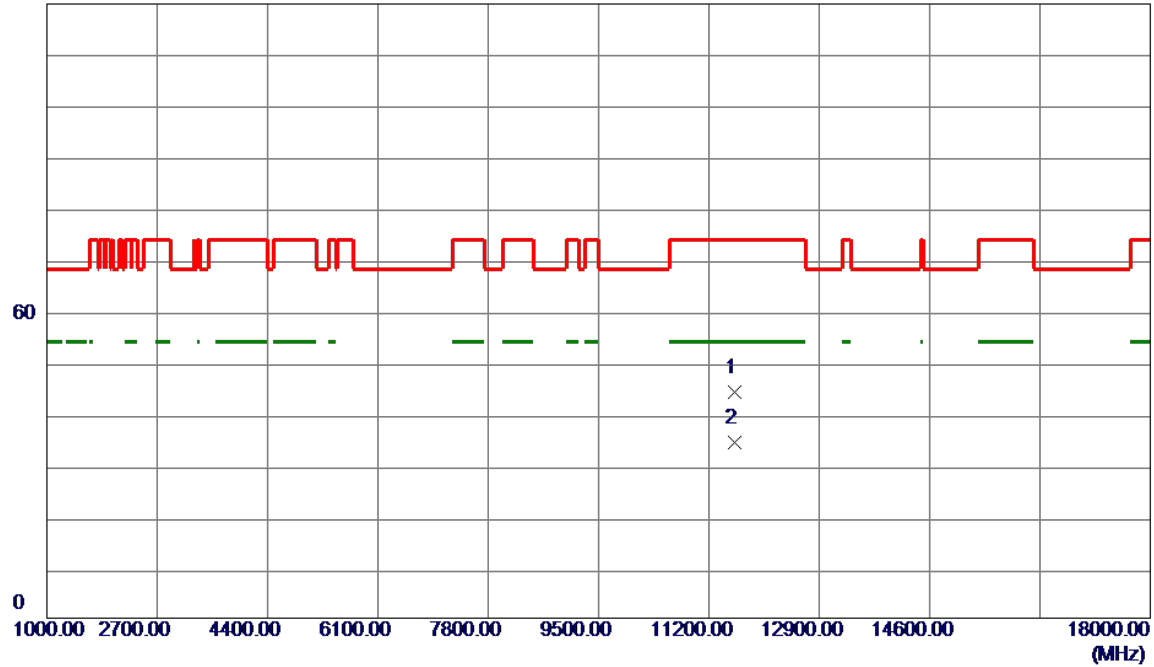


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	43.23	0.85	44.08	74.00	-29.92	Peak	
2 *	11590.0000	33.47	0.85	34.32	54.00	-19.68	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5795MHz	Polarization	Horizontal

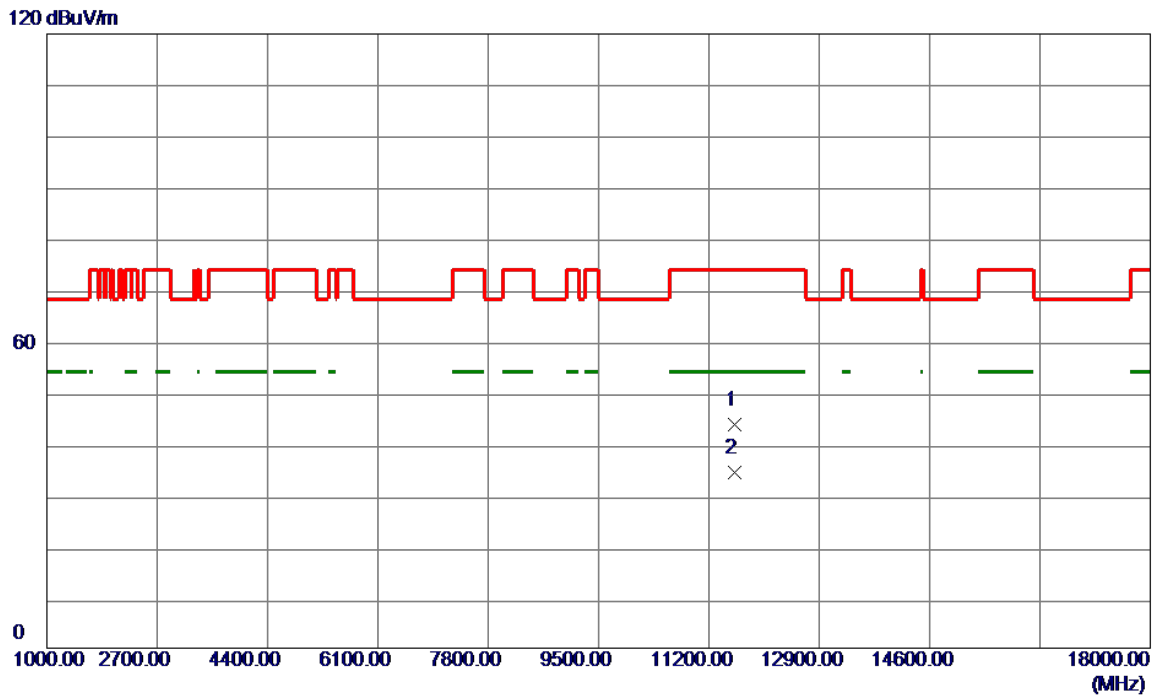


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	42.81	0.85	43.66	74.00	-30.34	Peak	
2 *	11590.0000	33.58	0.85	34.43	54.00	-19.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5210MHz	Polarization	Vertical

120 dBuV/m

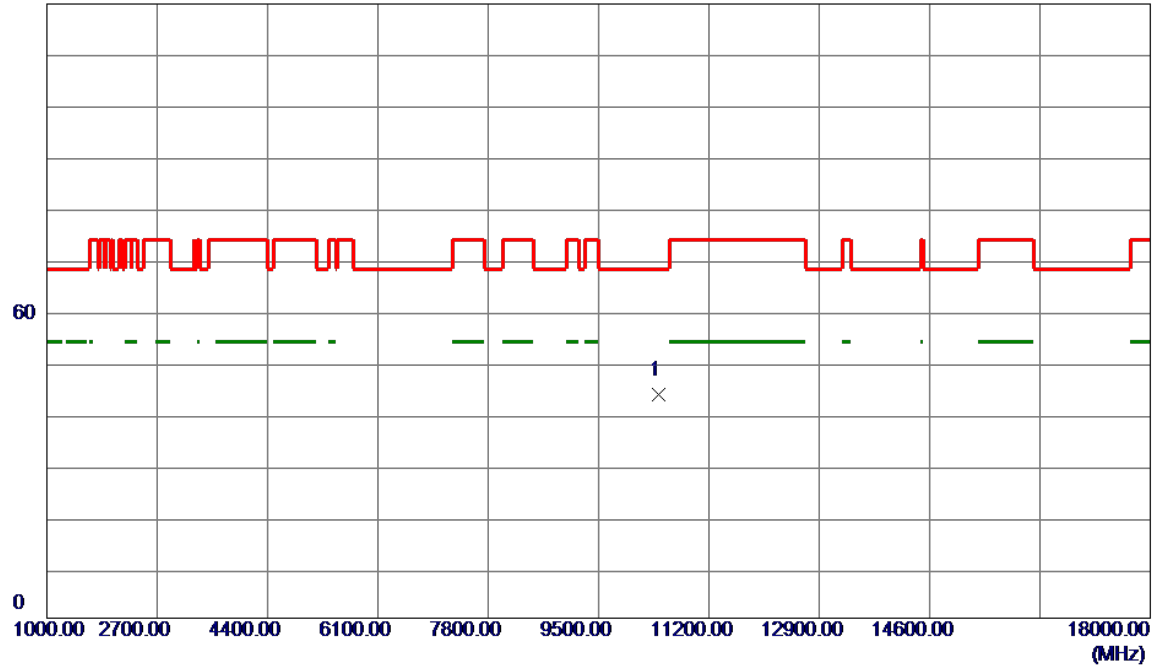


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	44.08	-0.43	43.65	68.20	-24.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5210MHz	Polarization	Horizontal

120 dBuV/m

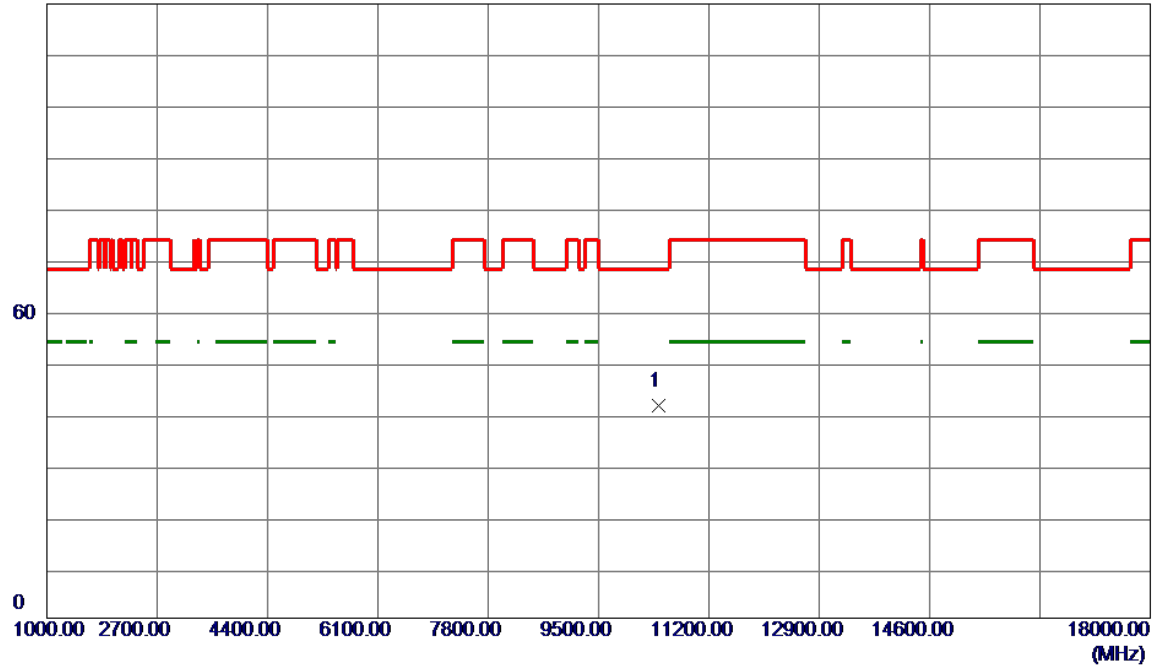


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	41.87	-0.43	41.44	68.20	-26.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5290MHz	Polarization	Vertical

120 dBuV/m

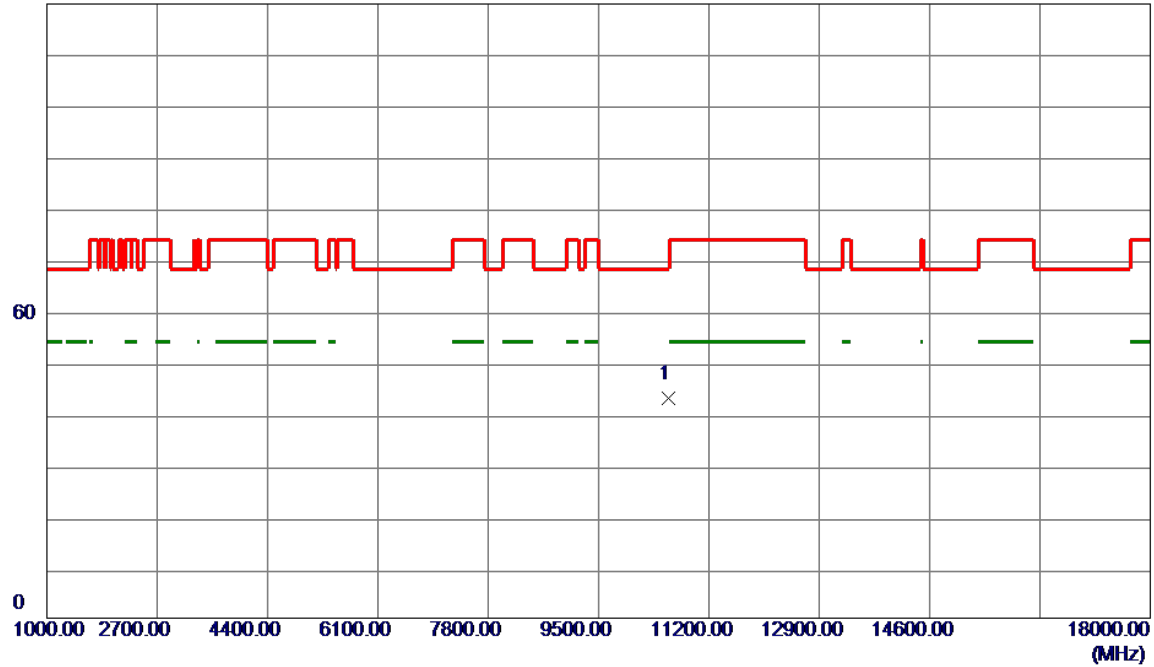


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10580.0000	43.16	-0.28	42.88	68.20	-25.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5290MHz	Polarization	Horizontal

120 dBuV/m

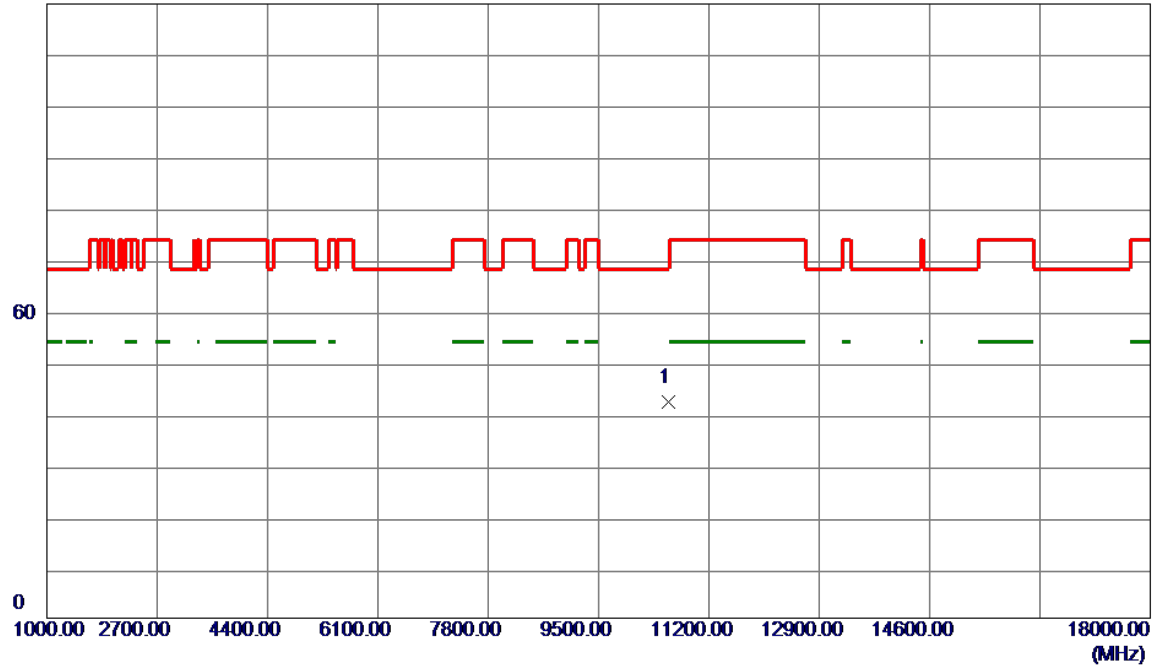


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	42.55	-0.28	42.27	68.20	-25.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5530MHz	Polarization	Vertical

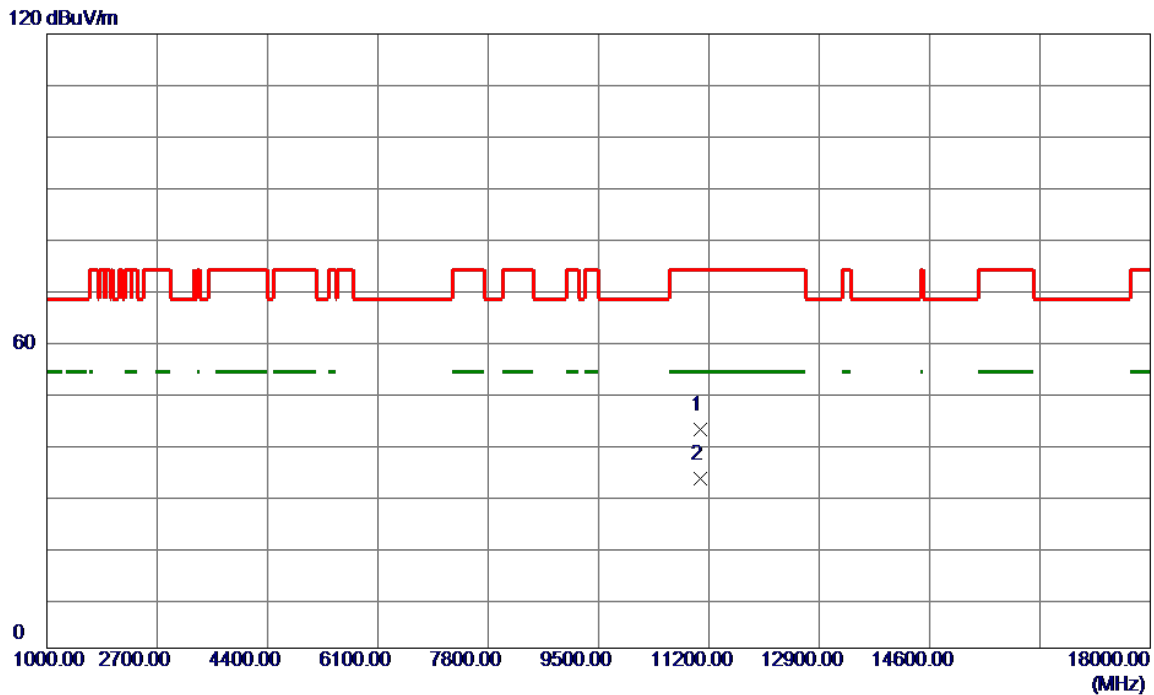

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	42.70	-0.02	42.68	74.00	-31.32	Peak	
2 *	11060.0000	33.20	-0.02	33.18	54.00	-20.82	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5530MHz	Polarization	Horizontal

120 dBuV/m

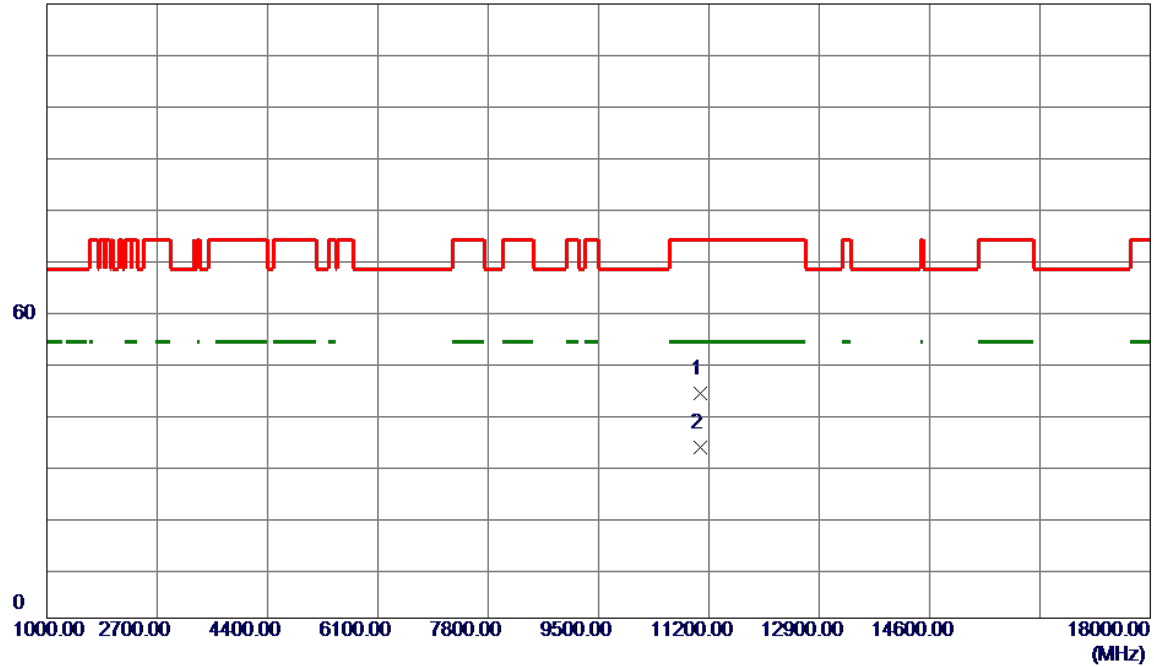


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	43.97	-0.02	43.95	74.00	-30.05	Peak	
2 *	11060.0000	33.41	-0.02	33.39	54.00	-20.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5610MHz	Polarization	Vertical

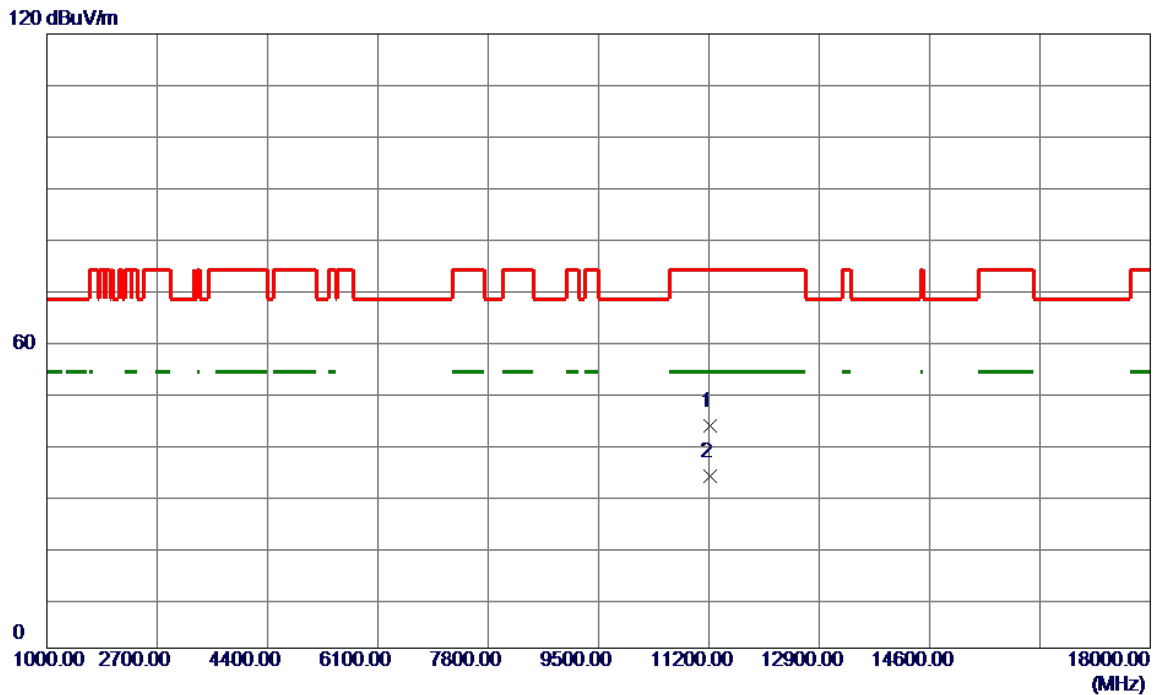


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	43.04	0.29	43.33	74.00	-30.67	Peak	
2 *	11220.0000	33.25	0.29	33.54	54.00	-20.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5610MHz	Polarization	Horizontal

120 dBuV/m

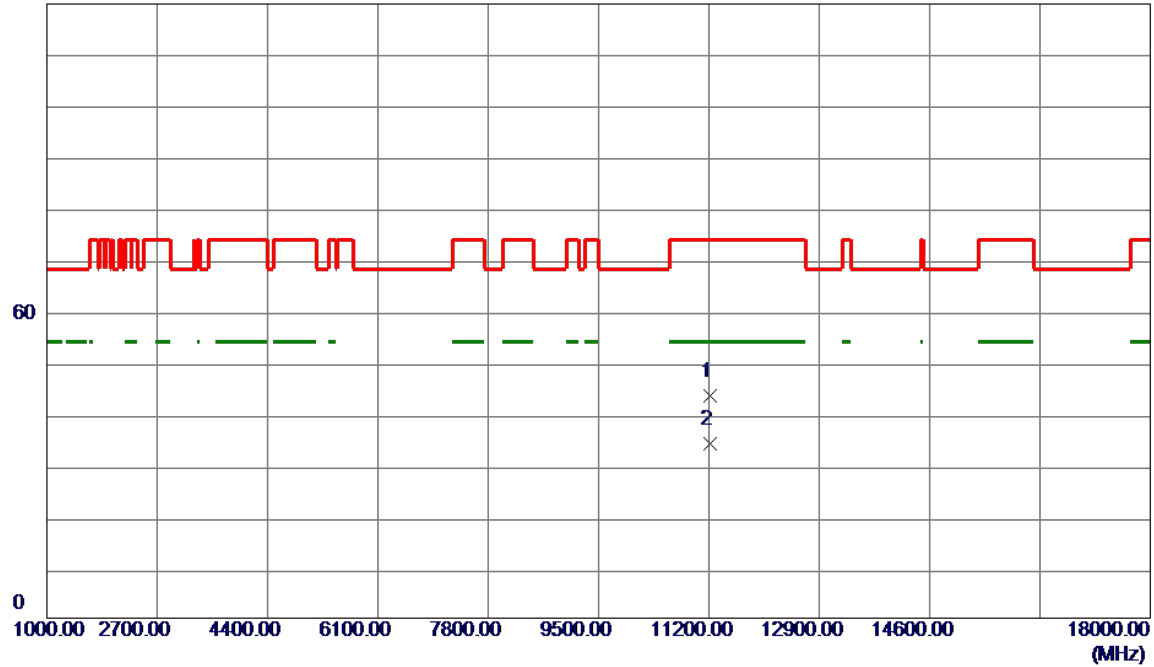


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	43.04	0.29	43.33	74.00	-30.67	Peak	
2 *	11220.0000	33.87	0.29	34.16	54.00	-19.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5775MHz	Polarization	Vertical

120 dBuV/m

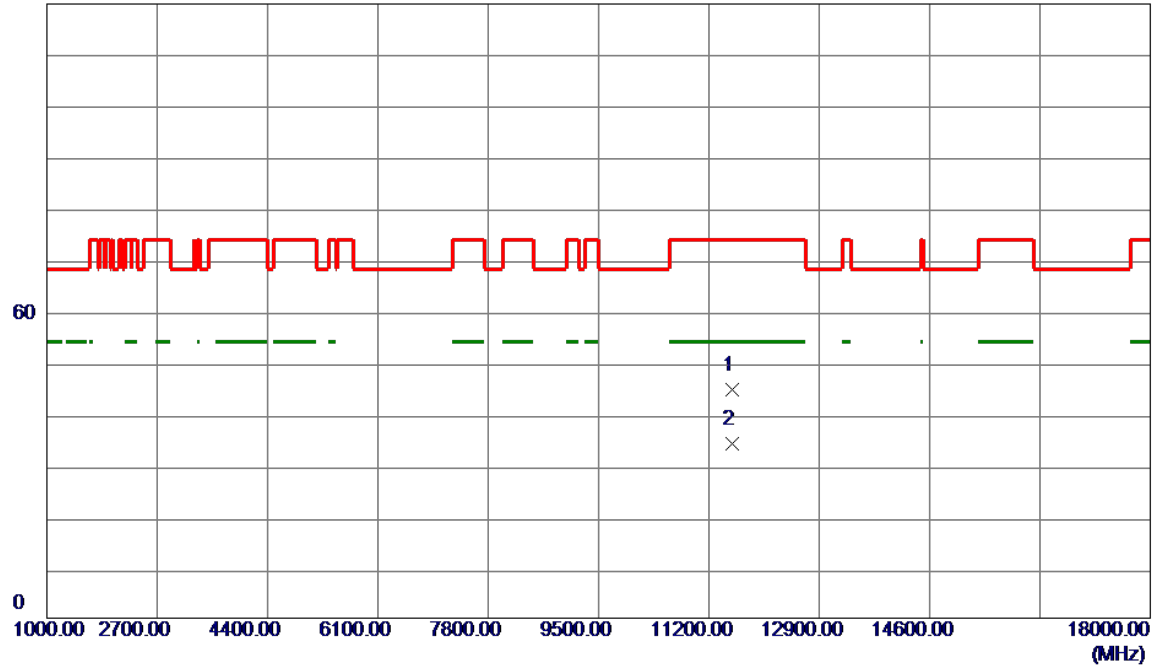


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	43.86	0.84	44.70	74.00	-29.30	Peak	
2 *	11550.0000	33.22	0.84	34.06	54.00	-19.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/26
Test Frequency	5775MHz	Polarization	Horizontal

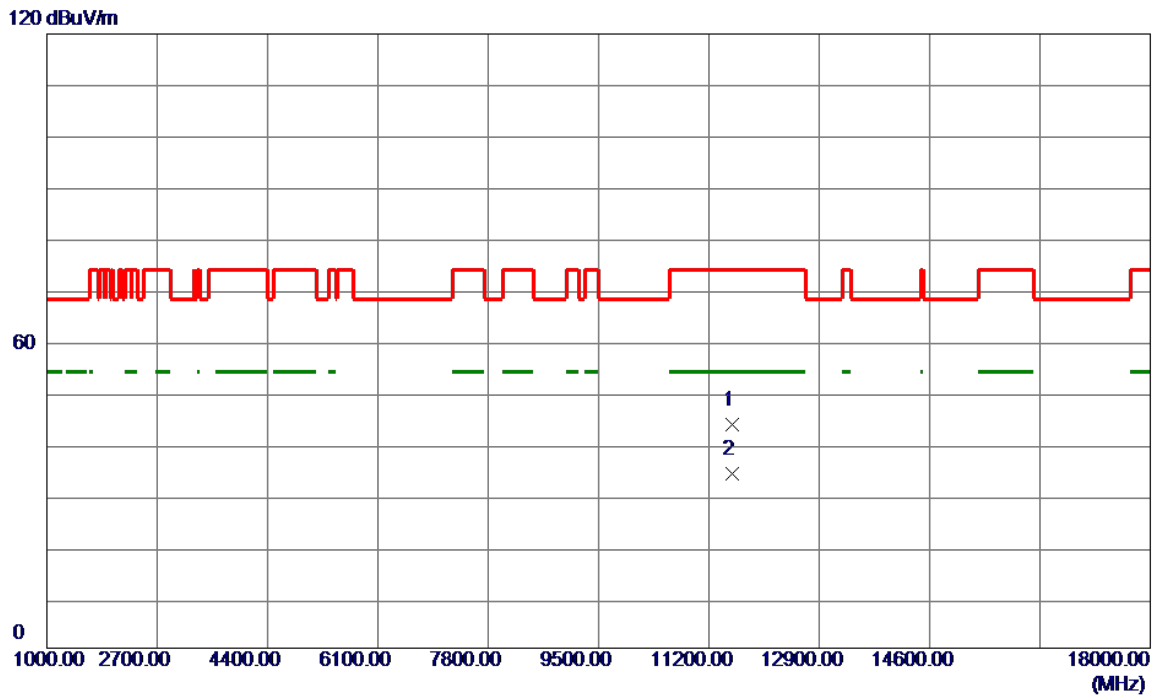


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	42.91	0.84	43.75	74.00	-30.25	Peak	
2 *	11550.0000	33.19	0.84	34.03	54.00	-19.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/12/26
Test Frequency	5250MHz	Polarization	Vertical

120 dBuV/m

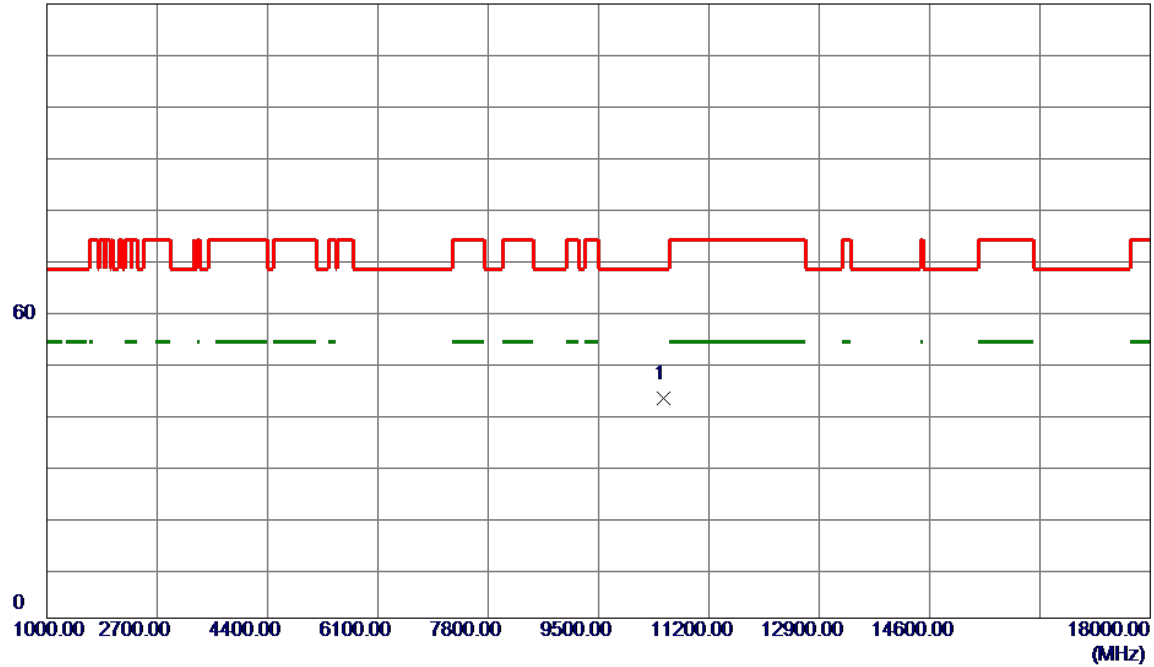


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10500.0000	43.26	-0.31	42.95	68.20	-25.25	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/12/26
Test Frequency	5250MHz	Polarization	Horizontal

120 dBuV/m

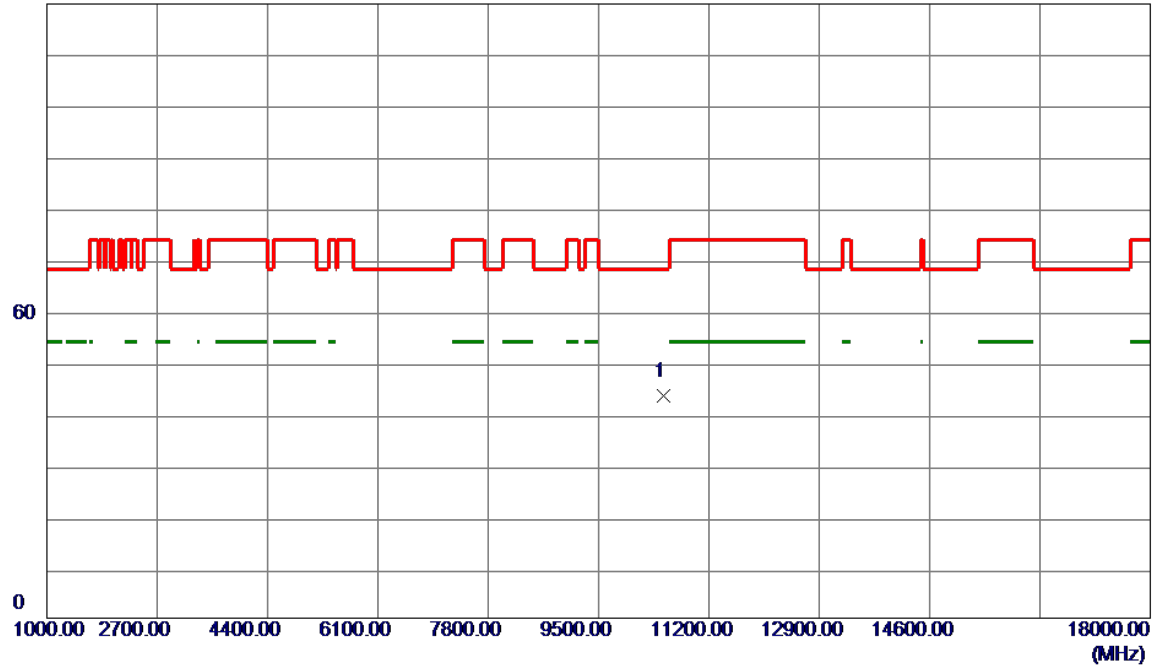


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10500.0000	43.76	-0.31	43.45	68.20	-24.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/12/26
Test Frequency	5570MHz	Polarization	Vertical

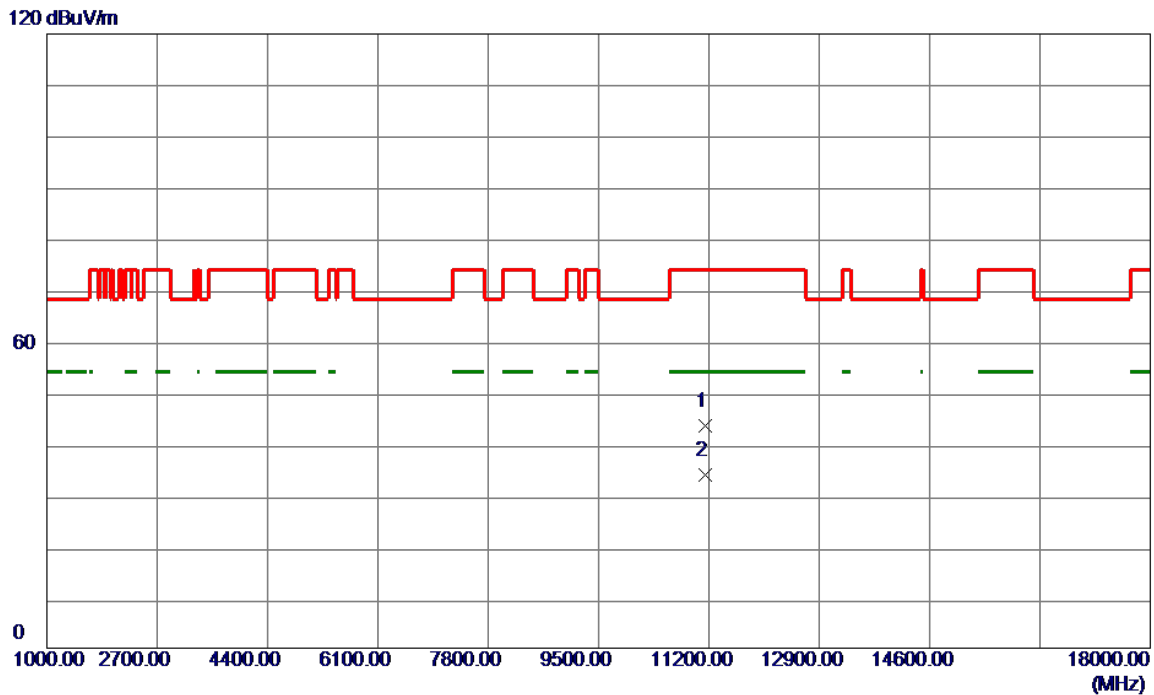


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11140.0000	43.30	0.13	43.43	74.00	-30.57	Peak	
2 *	11140.0000	33.65	0.13	33.78	54.00	-20.22	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/12/26
Test Frequency	5570MHz	Polarization	Horizontal

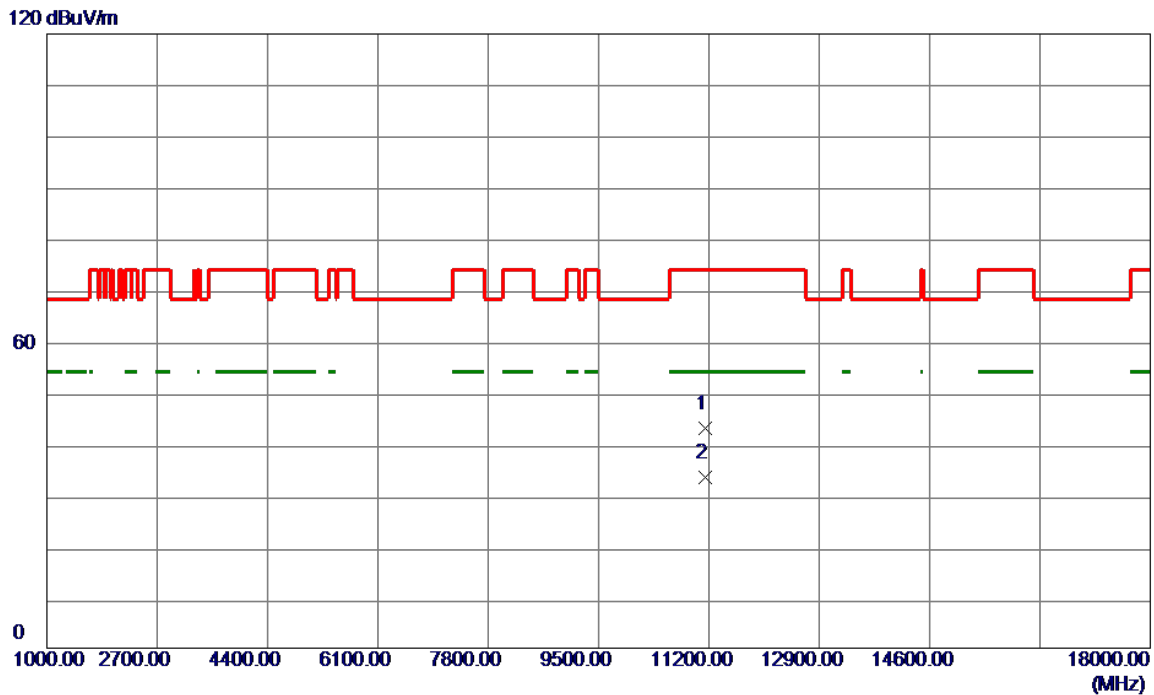


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11140.0000	42.82	0.13	42.95	74.00	-31.05	Peak	
2 *	11140.0000	33.16	0.13	33.29	54.00	-20.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5180MHz	Polarization	Vertical

120 dBuV/m

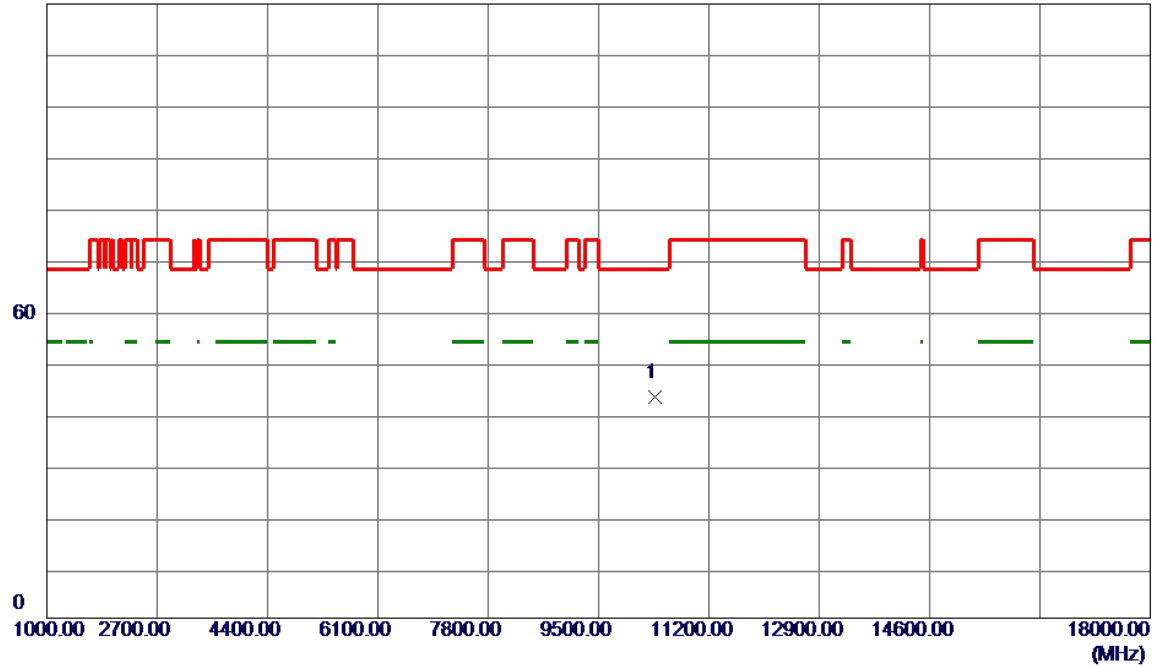


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	43.76	-0.53	43.23	68.20	-24.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5180MHz	Polarization	Horizontal

120 dBuV/m

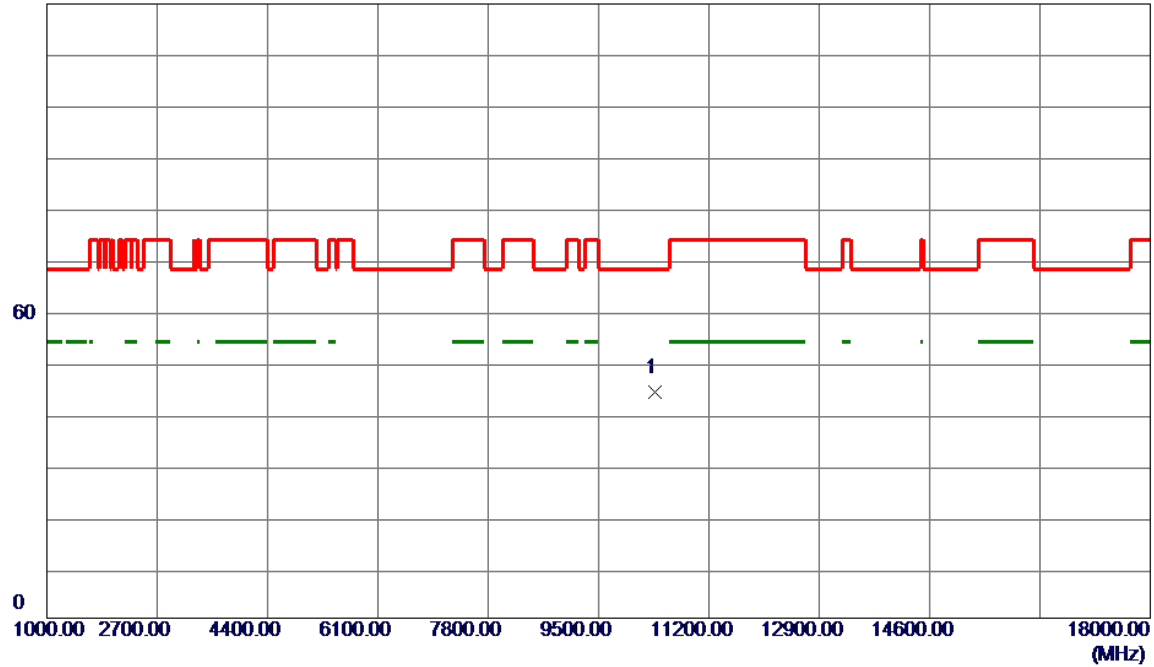


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10360.0000	44.67	-0.53	44.14	68.20	-24.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5200MHz	Polarization	Vertical

120 dBuV/m

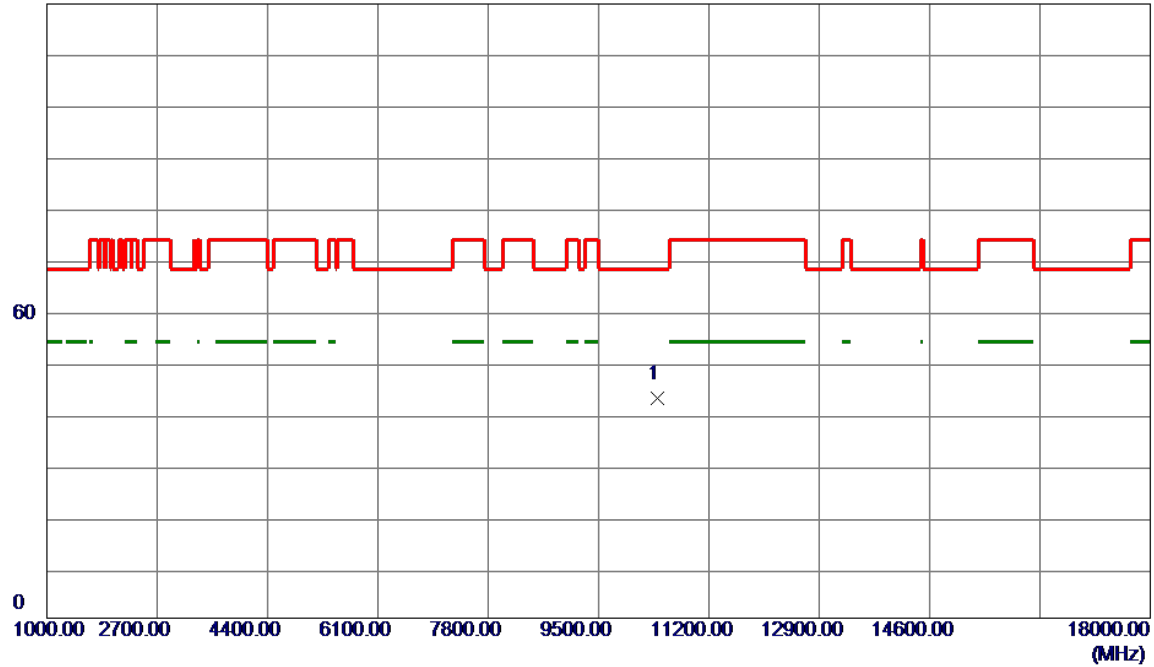


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10400.0000	43.38	-0.46	42.92	68.20	-25.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5200MHz	Polarization	Horizontal

120 dBuV/m

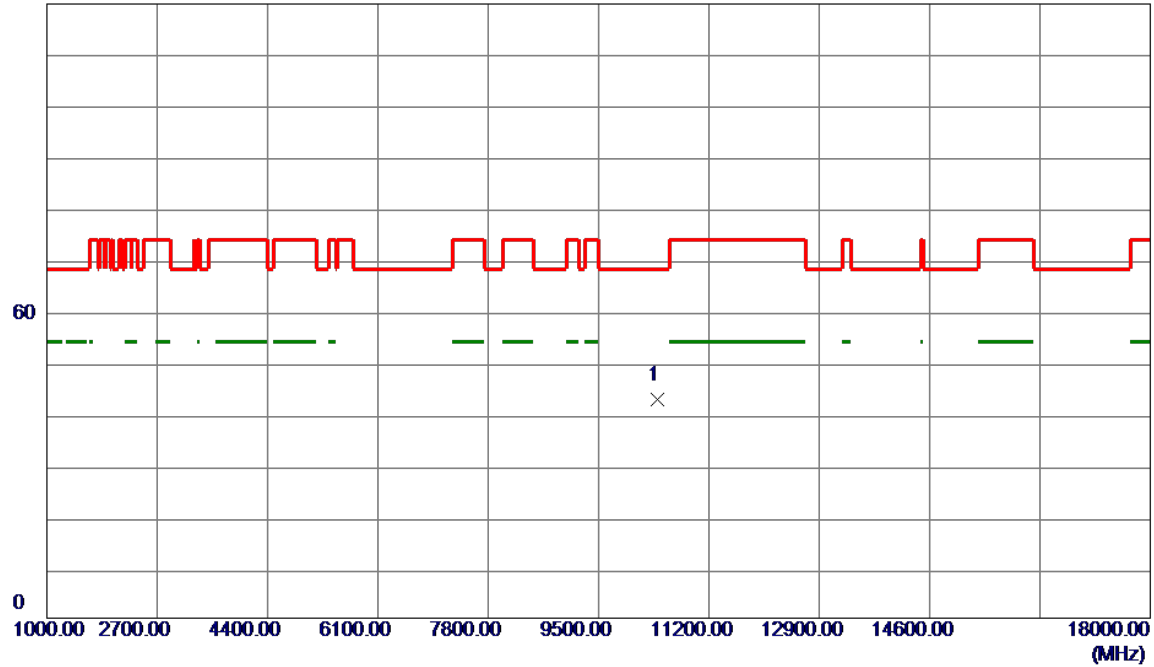


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	43.14	-0.46	42.68	68.20	-25.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5240MHz	Polarization	Vertical

120 dBuV/m

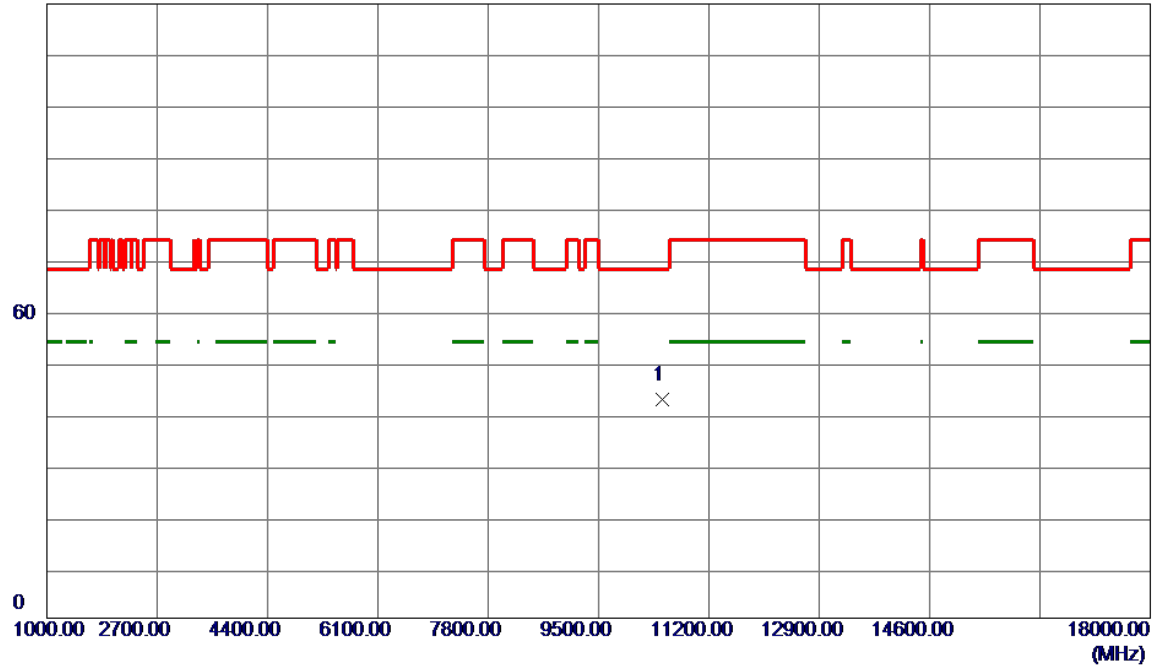


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10480.0000	43.16	-0.34	42.82	68.20	-25.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5240MHz	Polarization	Horizontal

120 dBuV/m

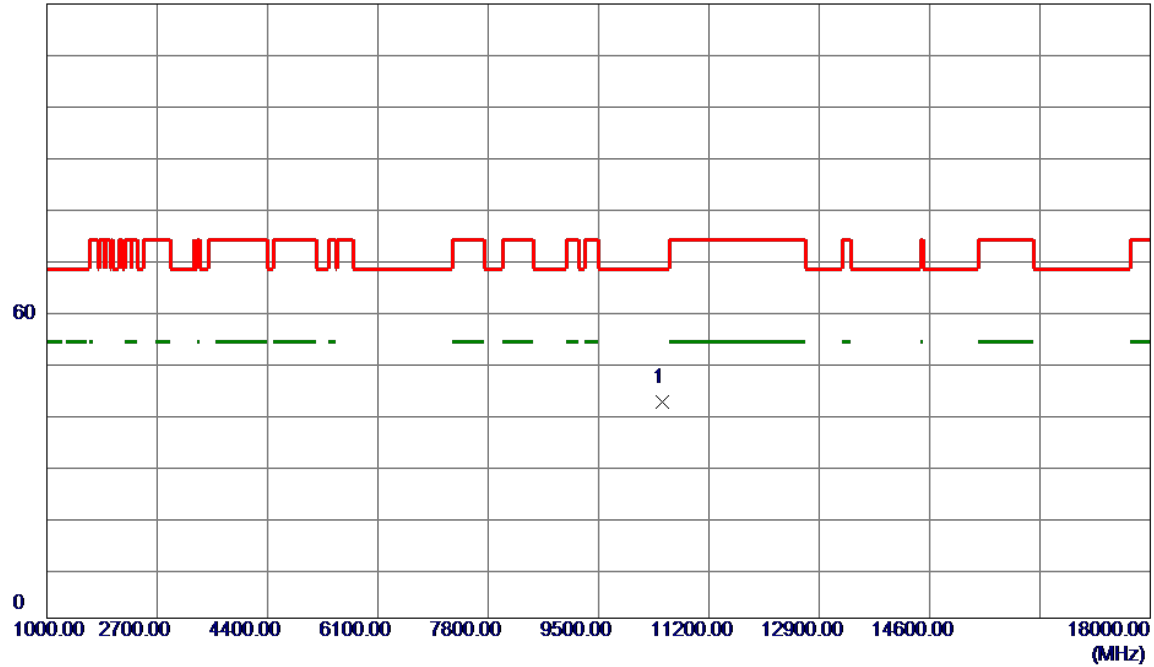


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10480.0000	42.62	-0.34	42.28	68.20	-25.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5260MHz	Polarization	Vertical

120 dBuV/m

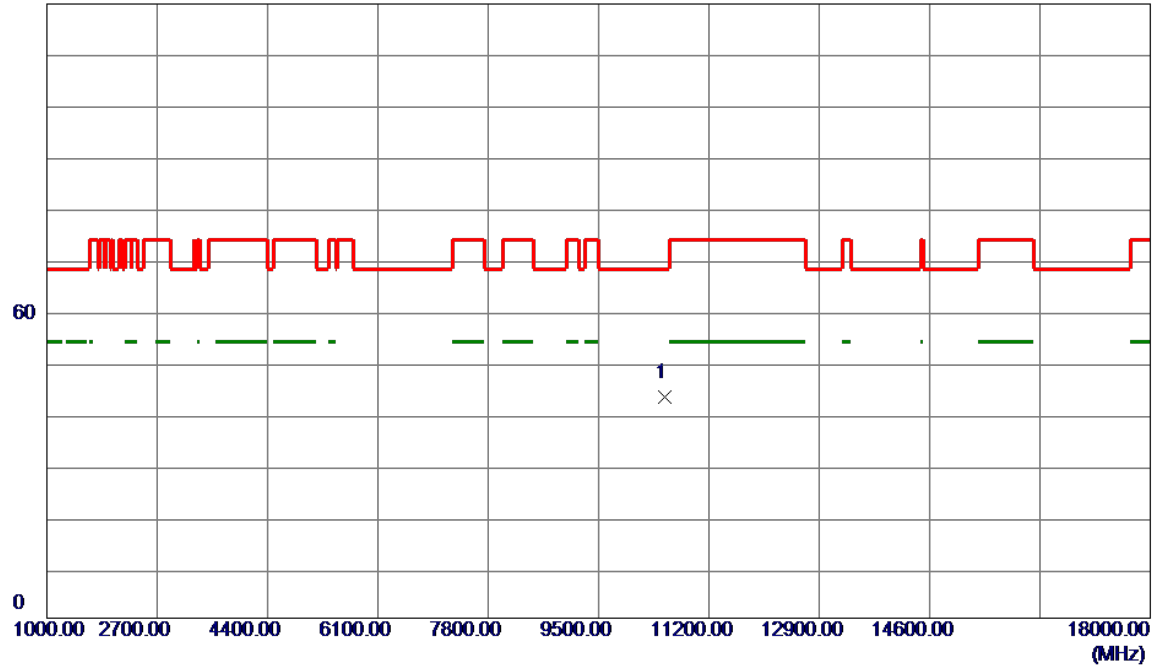


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	43.51	-0.30	43.21	68.20	-24.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5260MHz	Polarization	Horizontal

120 dBuV/m

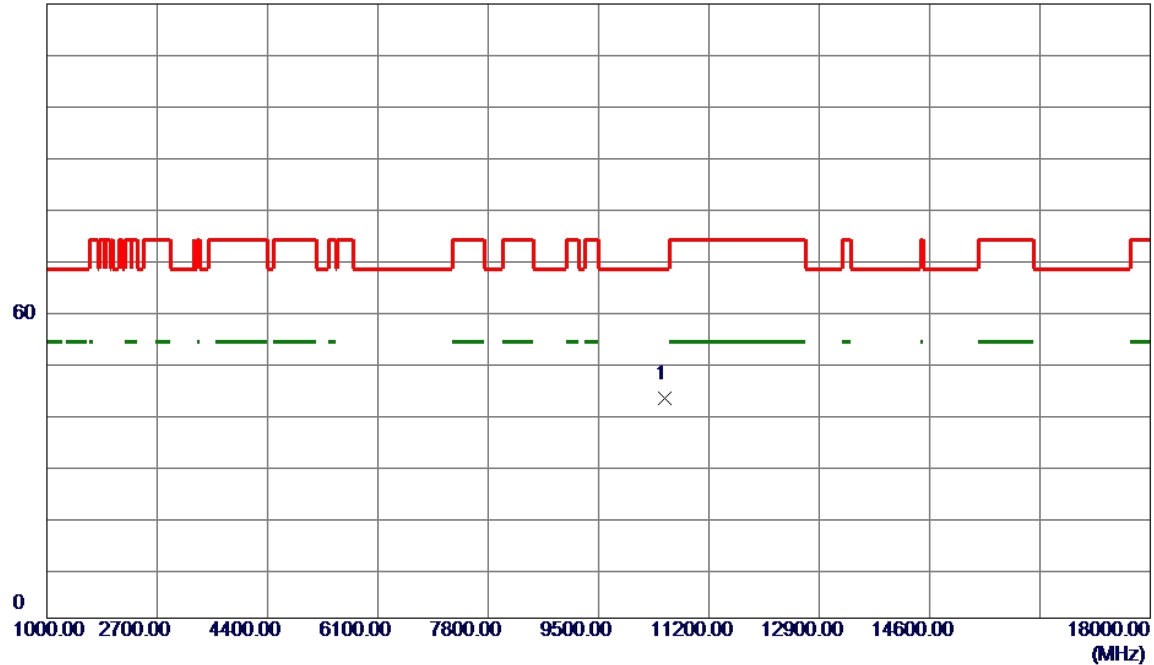


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	43.30	-0.30	43.00	68.20	-25.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5300MHz	Polarization	Vertical

120 dBuV/m

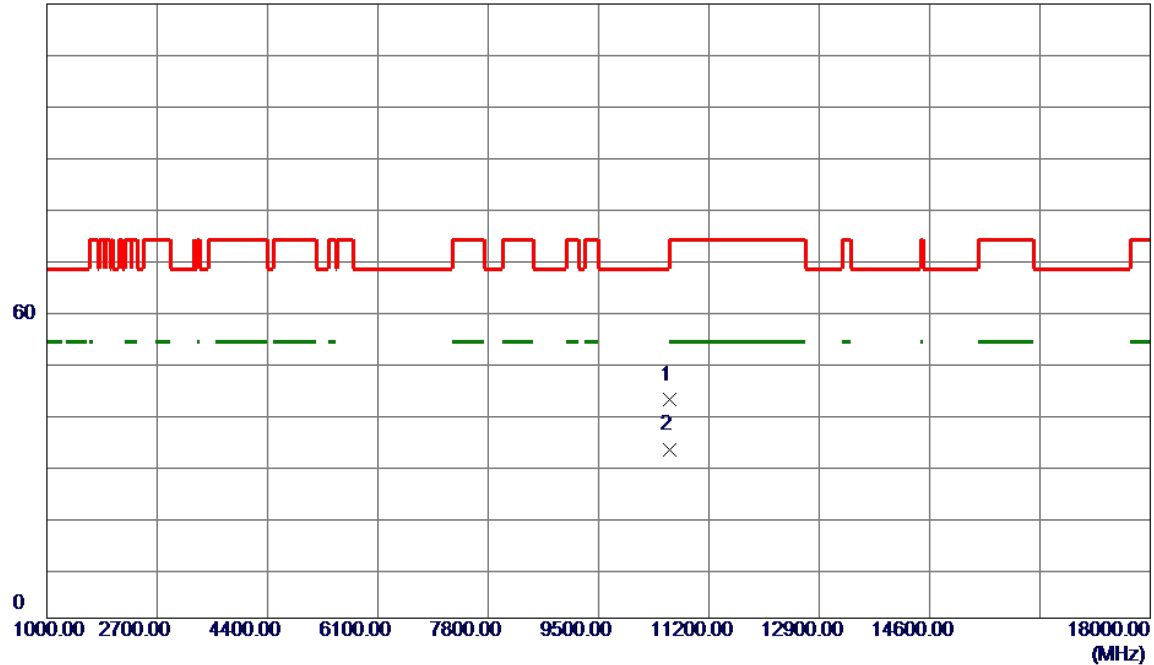


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	43.10	-0.28	42.82	68.20	-25.38	Peak	
2	10600.0000	33.28	-0.28	33.00	999.00	-966.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5300MHz	Polarization	Horizontal

120 dBuV/m

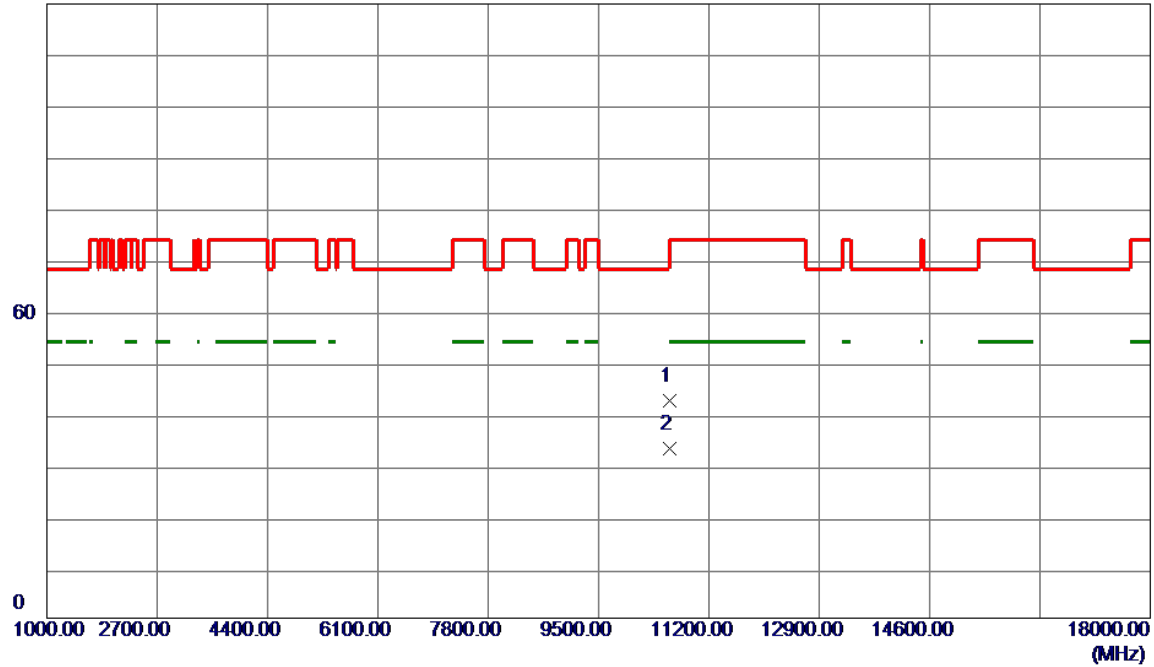

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	42.65	-0.28	42.37	68.20	-25.83	Peak	
2	10600.0000	33.39	-0.28	33.11	999.00	-965.89	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5320MHz	Polarization	Vertical

120 dBuV/m

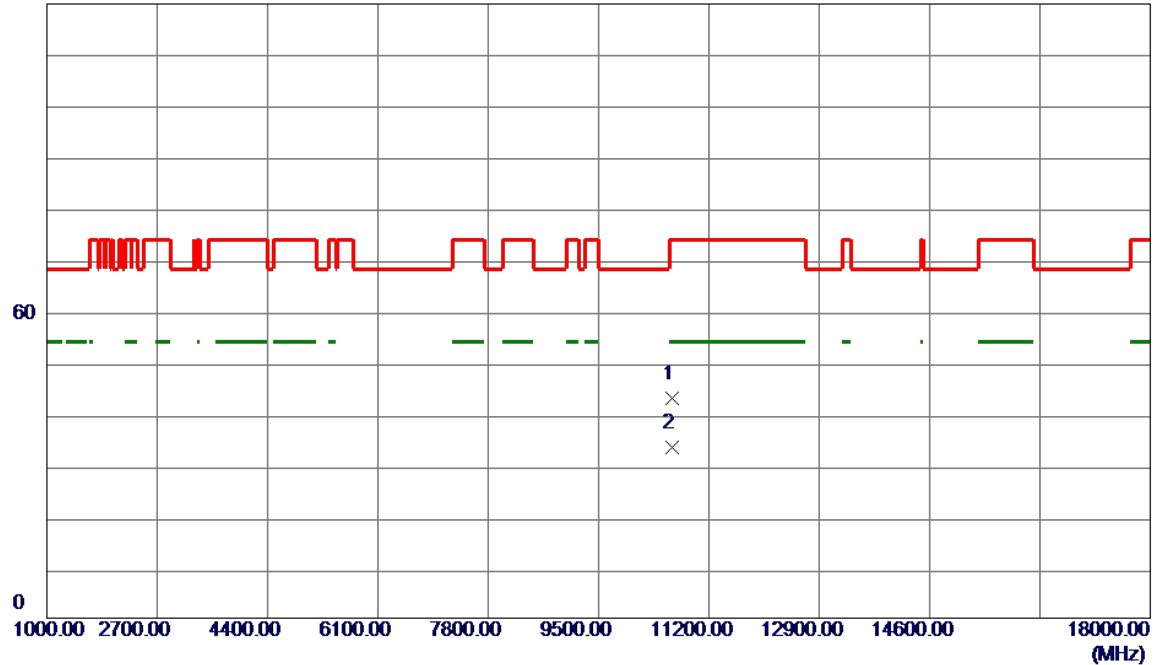


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	43.31	-0.26	43.05	74.00	-30.95	Peak	
2 *	10640.0000	33.55	-0.26	33.29	54.00	-20.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5320MHz	Polarization	Horizontal

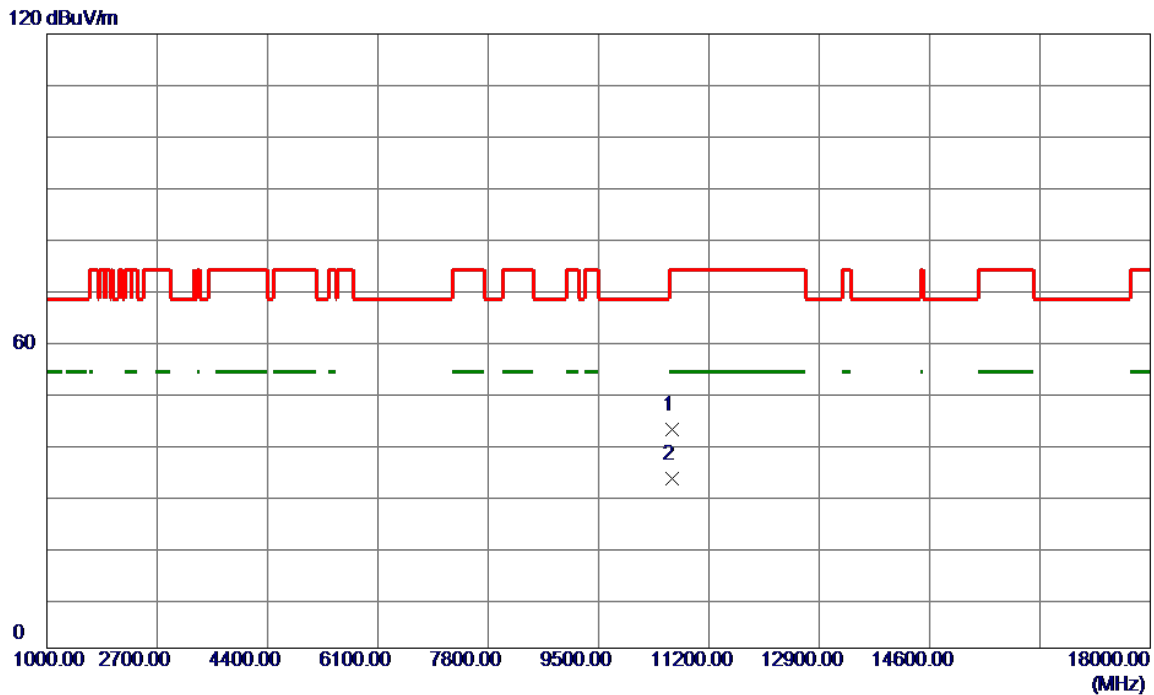


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	42.93	-0.26	42.67	74.00	-31.33	Peak	
2 *	10640.0000	33.38	-0.26	33.12	54.00	-20.88	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5500MHz	Polarization	Vertical

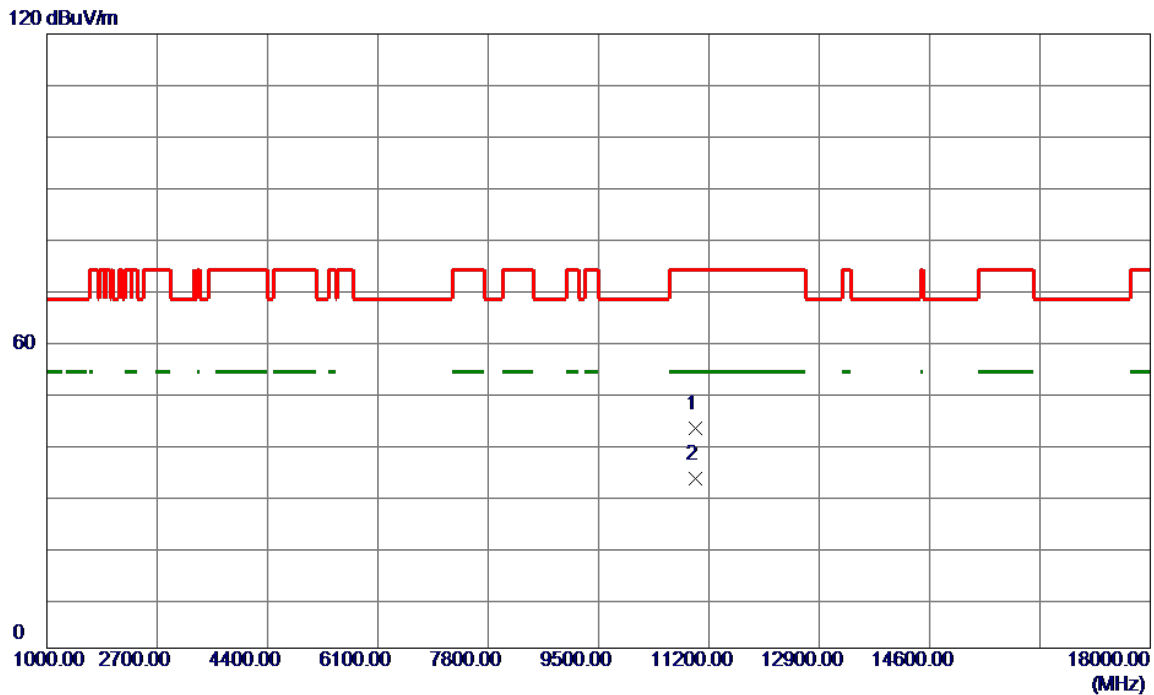

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	43.06	-0.14	42.92	74.00	-31.08	Peak	
2 *	11000.0000	33.17	-0.14	33.03	54.00	-20.97	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5500MHz	Polarization	Horizontal

120 dBuV/m

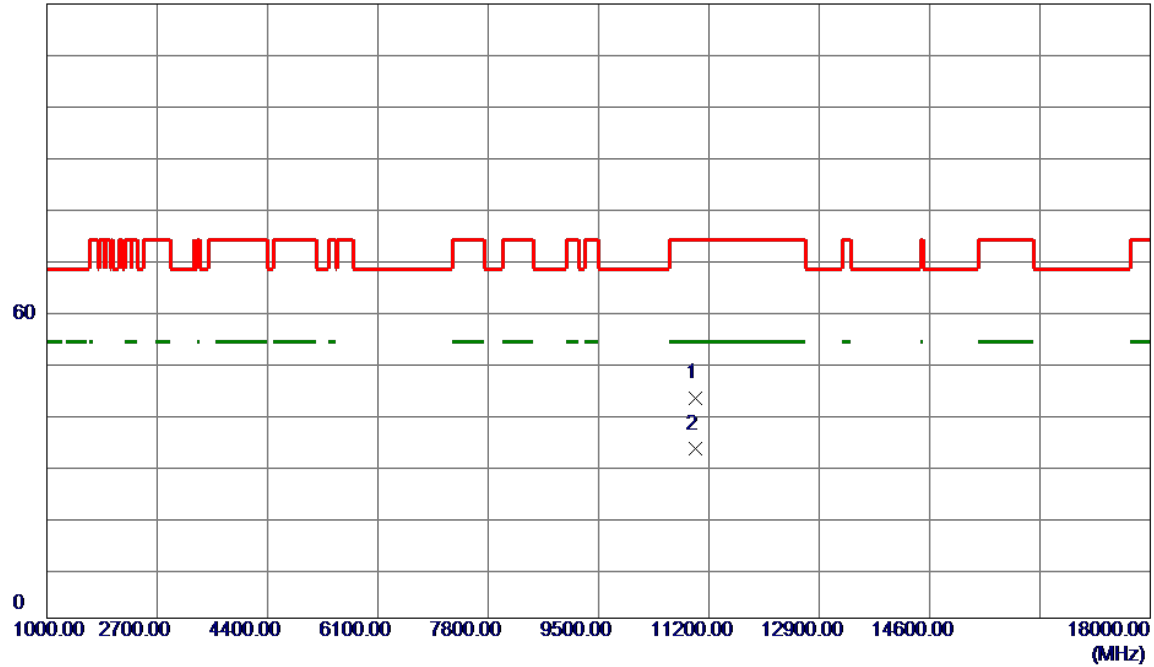

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	43.22	-0.14	43.08	74.00	-30.92	Peak	
2 *	11000.0000	33.24	-0.14	33.10	54.00	-20.90	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5580MHz	Polarization	Vertical

120 dBuV/m

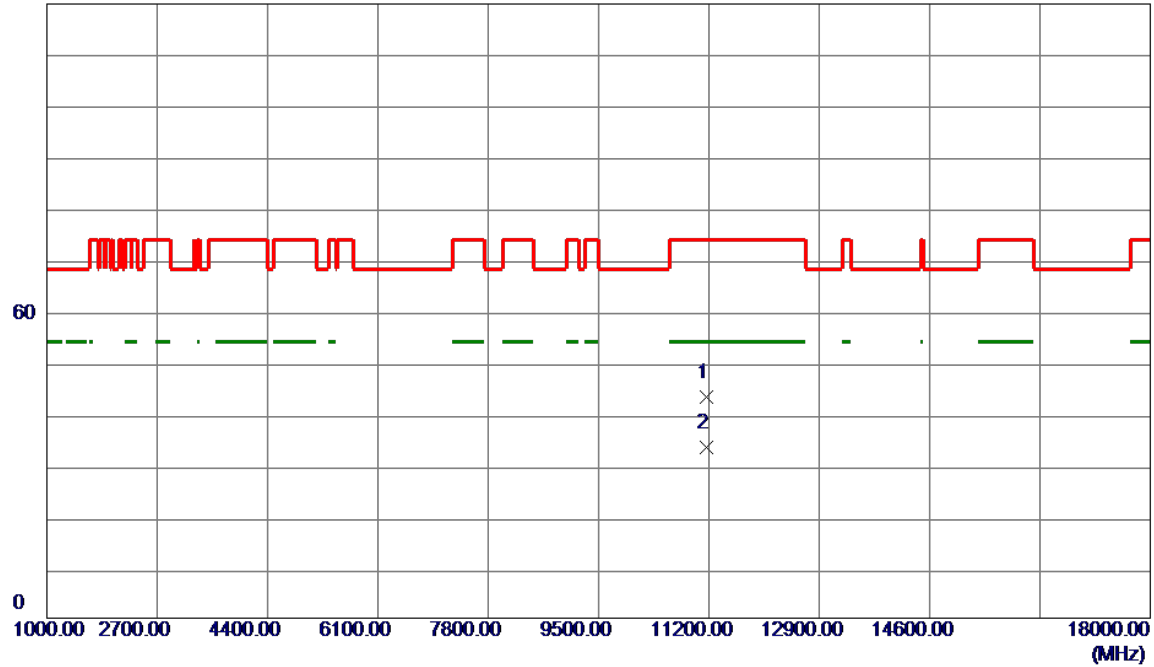

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	43.11	0.17	43.28	74.00	-30.72	Peak	
2 *	11160.0000	33.25	0.17	33.42	54.00	-20.58	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5580MHz	Polarization	Horizontal

120 dBuV/m

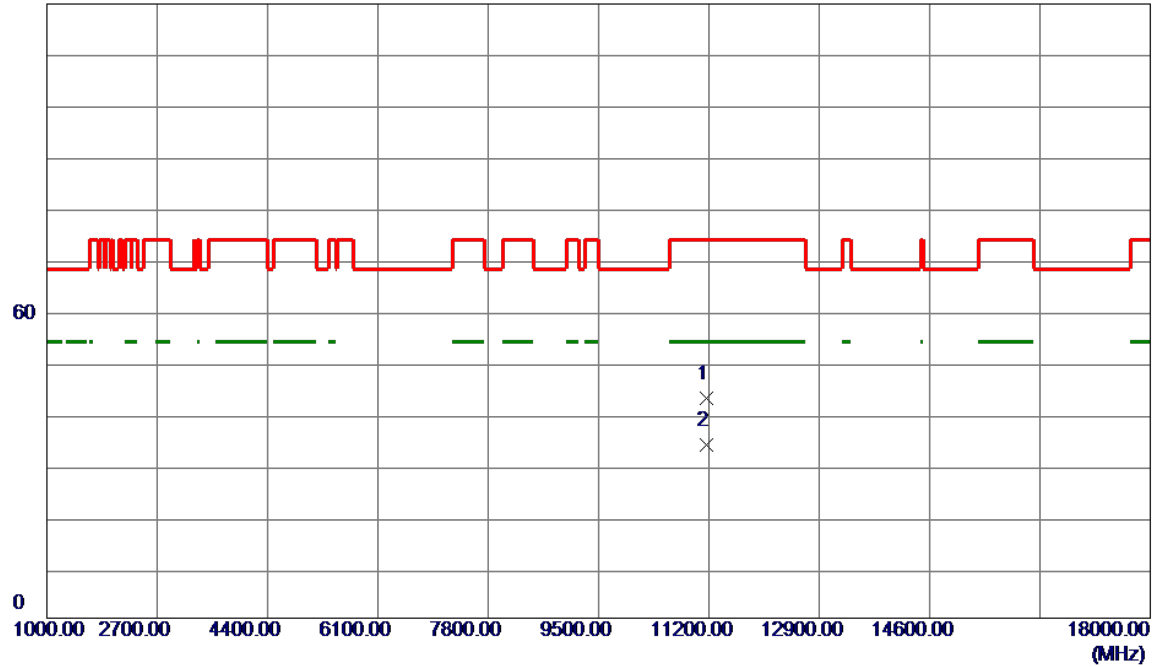

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	42.87	0.17	43.04	74.00	-30.96	Peak	
2 *	11160.0000	33.63	0.17	33.80	54.00	-20.20	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5700MHz	Polarization	Vertical

120 dBuV/m

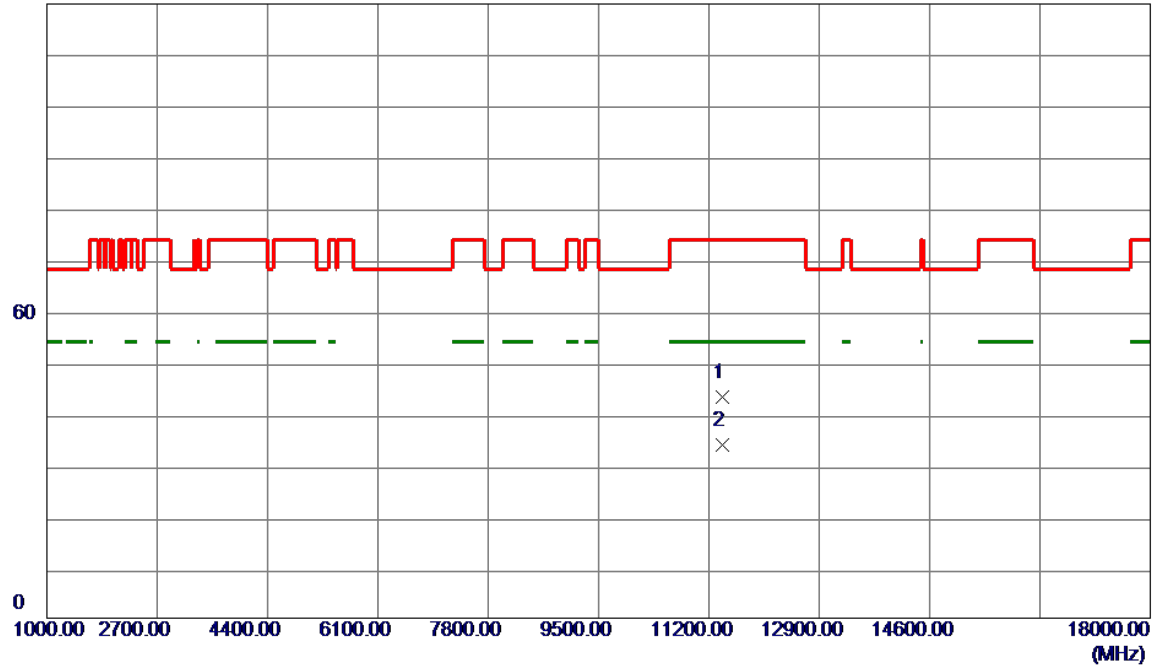


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	42.45	0.64	43.09	74.00	-30.91	Peak	
2 *	11400.0000	33.21	0.64	33.85	54.00	-20.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5700MHz	Polarization	Horizontal

120 dBuV/m

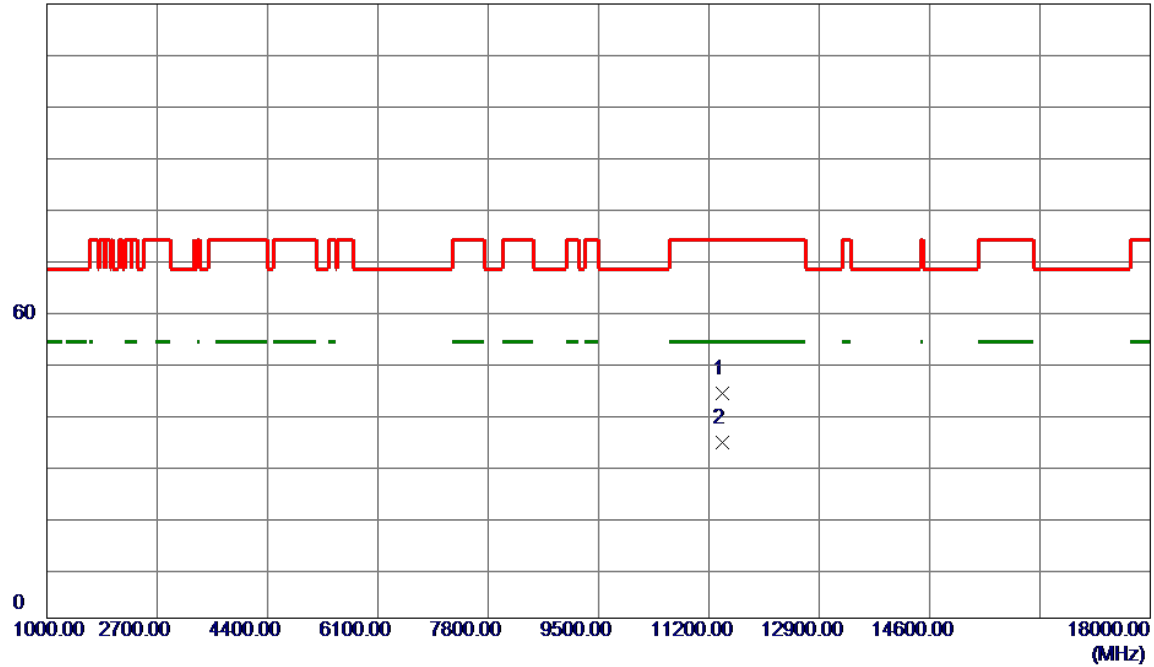


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	43.29	0.64	43.93	74.00	-30.07	Peak	
2 *	11400.0000	33.58	0.64	34.22	54.00	-19.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Vertical

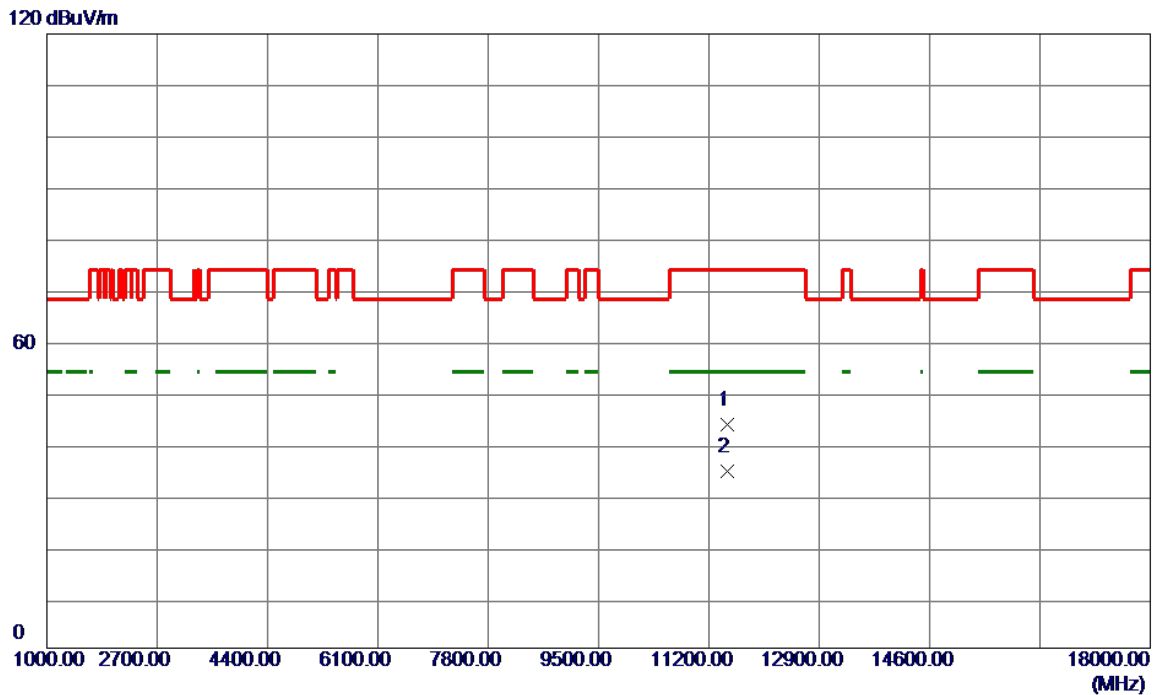

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	42.88	0.81	43.69	74.00	-30.31	Peak	
2 *	11490.0000	33.68	0.81	34.49	54.00	-19.51	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Horizontal

120 dBuV/m

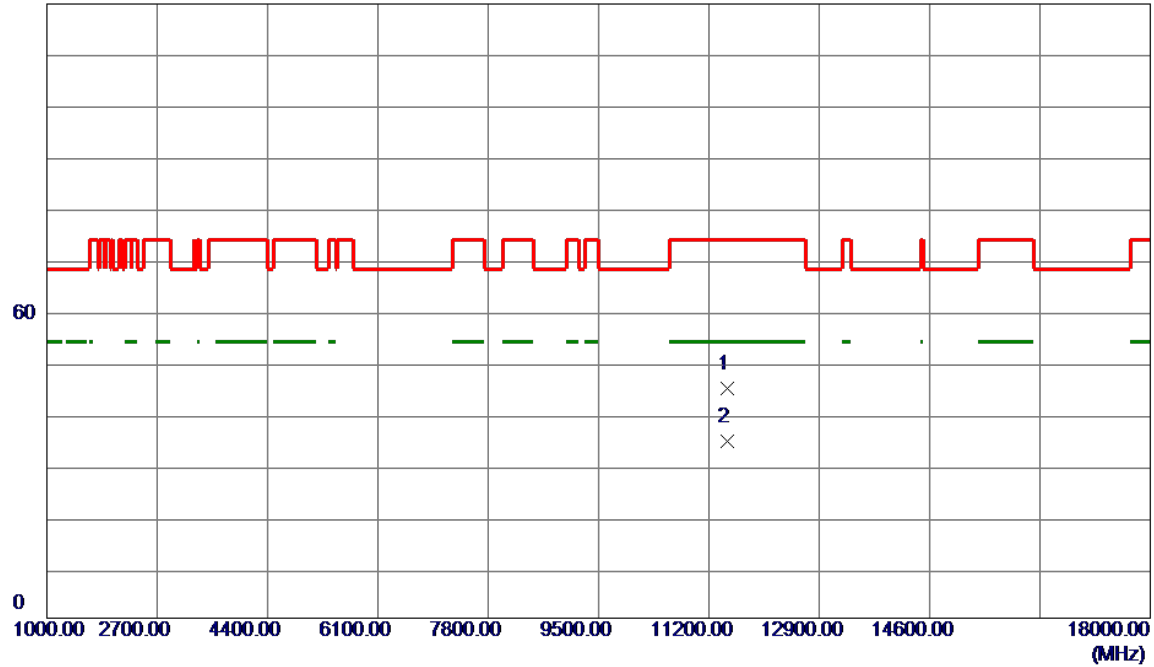

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	43.97	0.81	44.78	74.00	-29.22	Peak	
2 *	11490.0000	33.64	0.81	34.45	54.00	-19.55	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5785MHz	Polarization	Vertical

120 dBuV/m

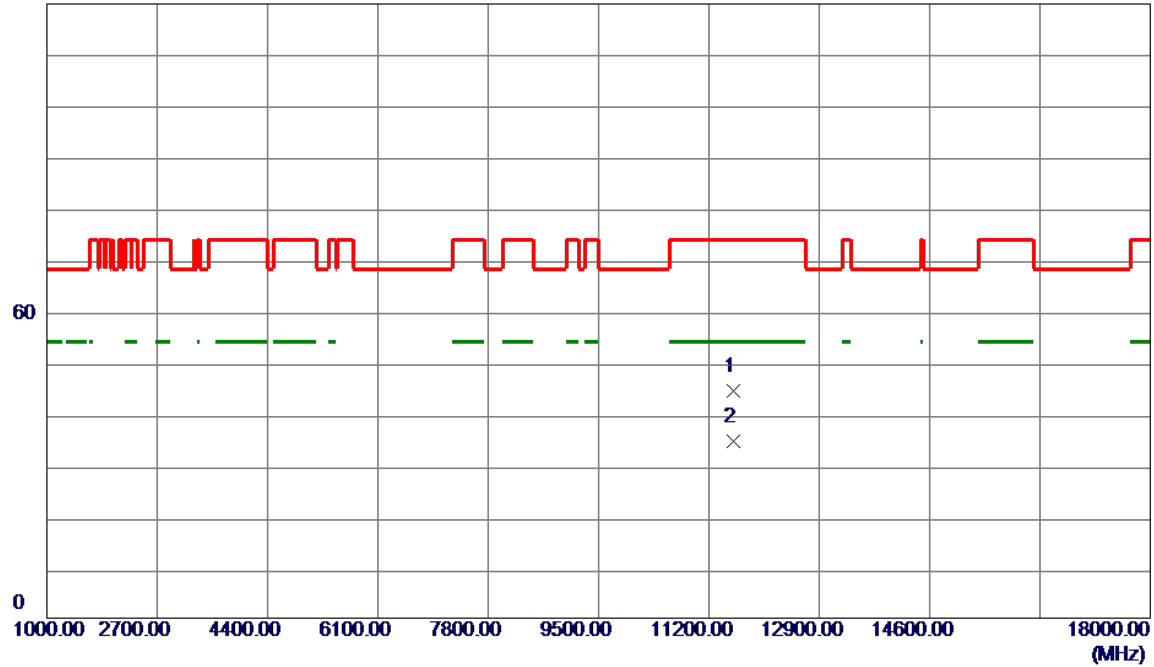

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	43.66	0.85	44.51	74.00	-29.49	Peak	
2 *	11570.0000	33.63	0.85	34.48	54.00	-19.52	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5785MHz	Polarization	Horizontal

120 dBuV/m

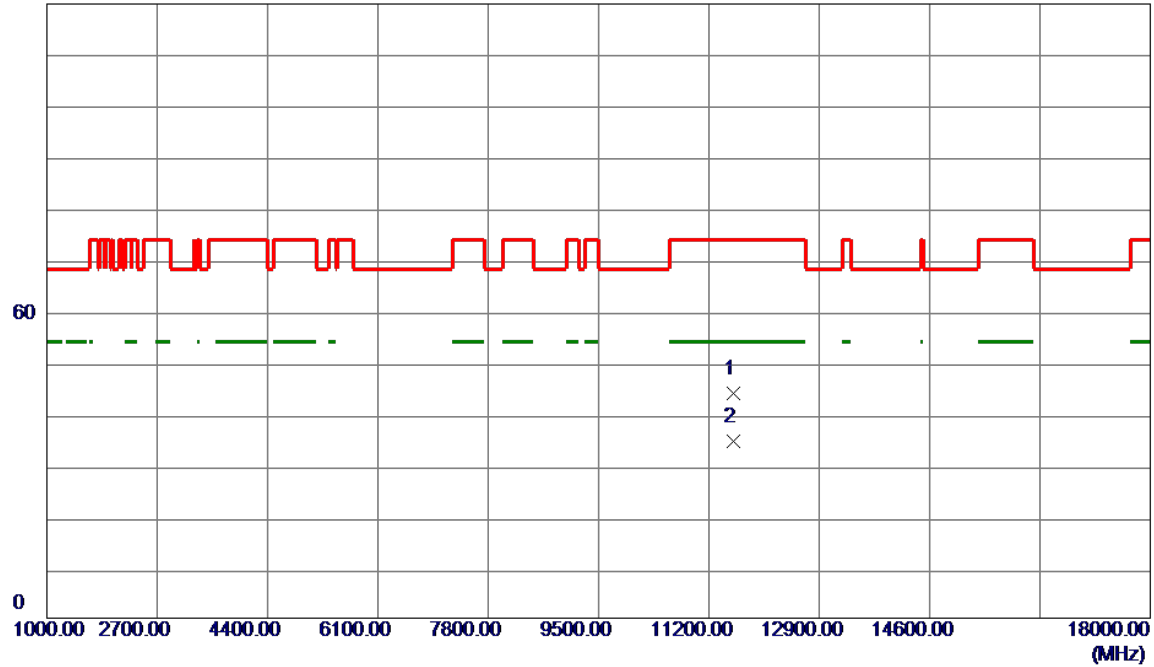


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	43.04	0.85	43.89	74.00	-30.11	Peak	
2 *	11570.0000	33.63	0.85	34.48	54.00	-19.52	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5825MHz	Polarization	Vertical

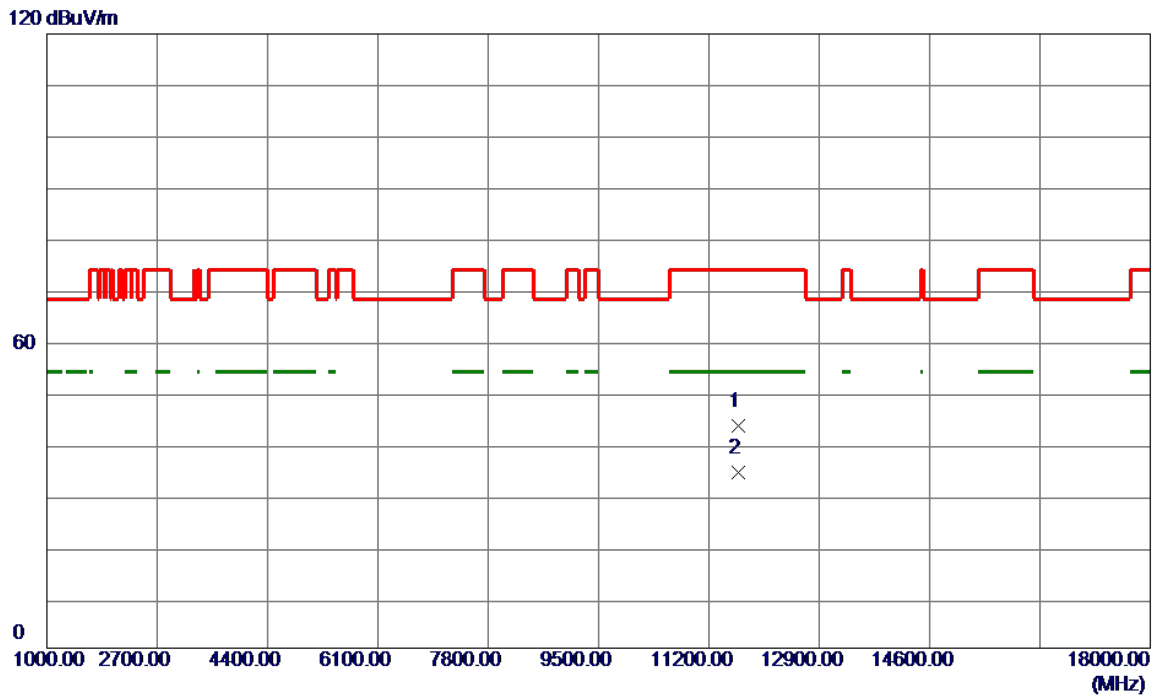

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	42.47	0.86	43.33	74.00	-30.67	Peak	
2 *	11650.0000	33.54	0.86	34.40	54.00	-19.60	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/26
Test Frequency	5825MHz	Polarization	Horizontal

120 dBuV/m

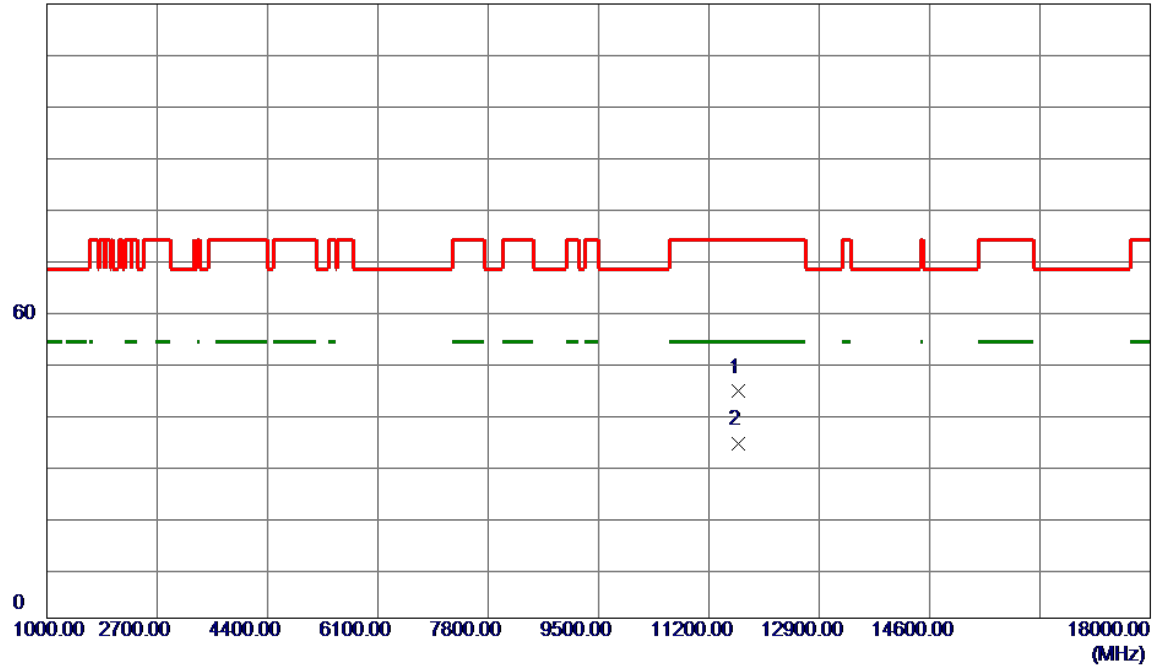


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	43.42	0.86	44.28	74.00	-29.72	Peak	
2 *	11650.0000	33.14	0.86	34.00	54.00	-20.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5190MHz	Polarization	Vertical

120 dBuV/m

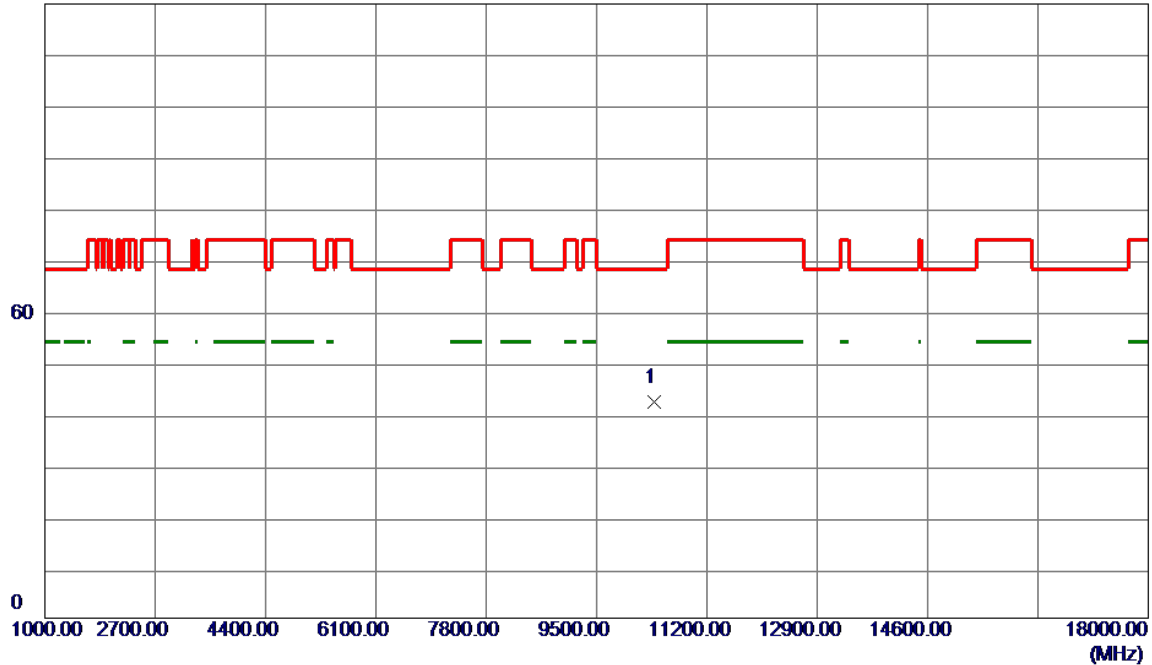


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	42.75	-0.49	42.26	68.20	-25.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5190MHz	Polarization	Horizontal

120 dBuV/m

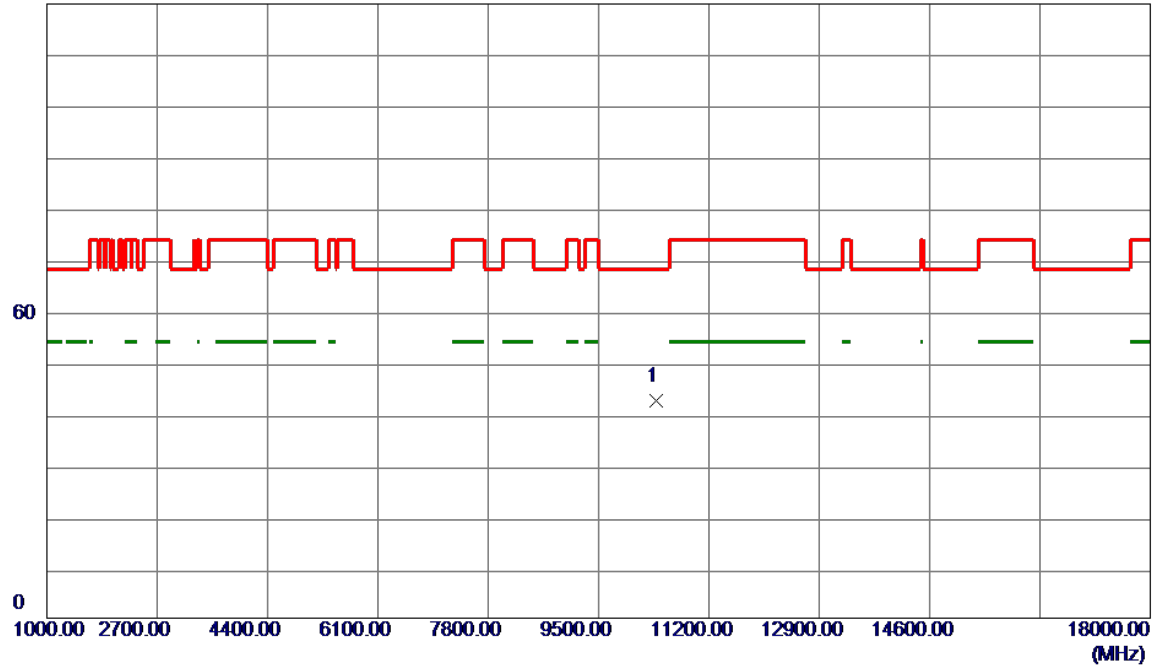


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	42.98	-0.49	42.49	68.20	-25.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5230MHz	Polarization	Vertical

120 dBuV/m

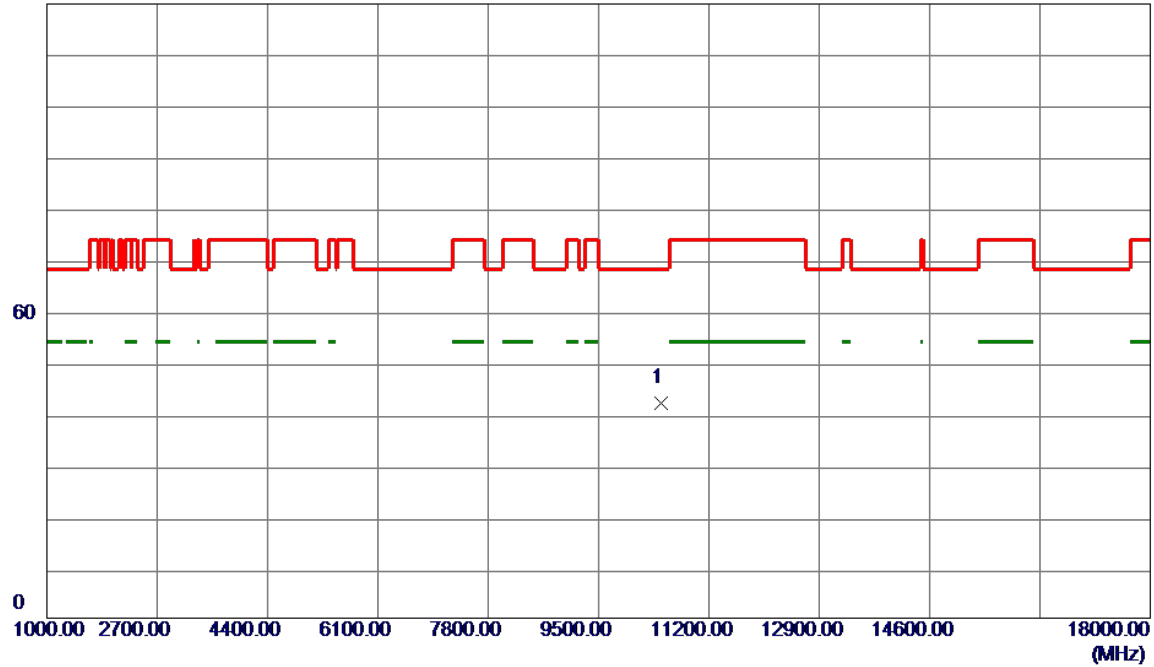


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.0000	42.49	-0.37	42.12	68.20	-26.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5230MHz	Polarization	Horizontal

120 dBuV/m

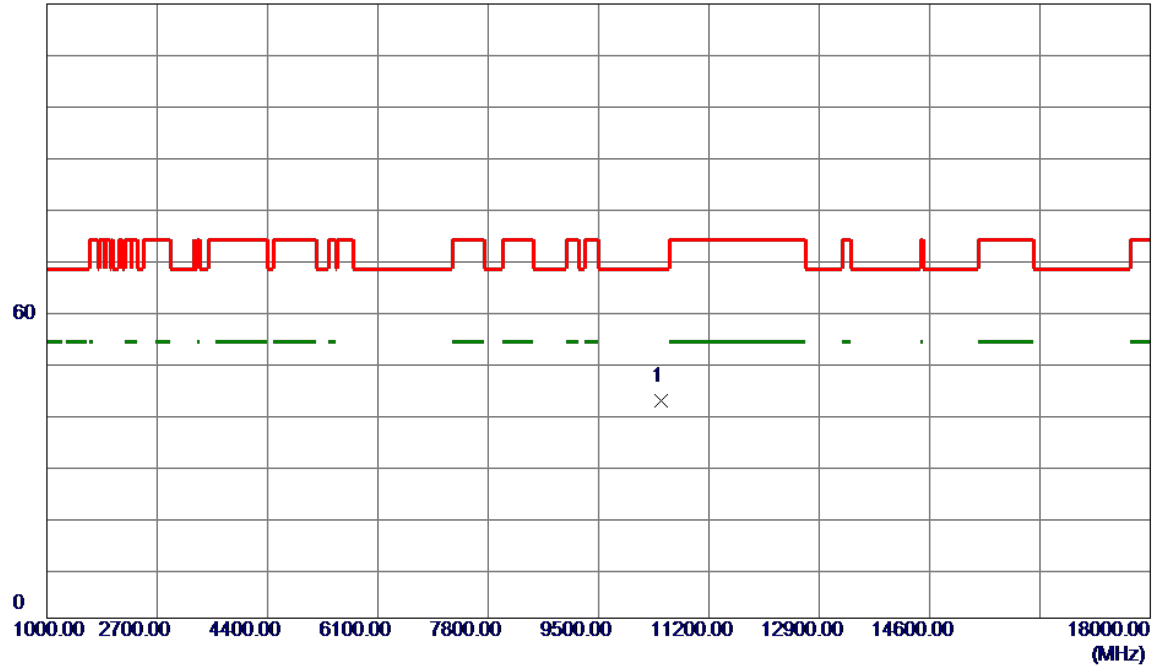


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10460.0000	42.84	-0.37	42.47	68.20	-25.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5270MHz	Polarization	Vertical

120 dBuV/m

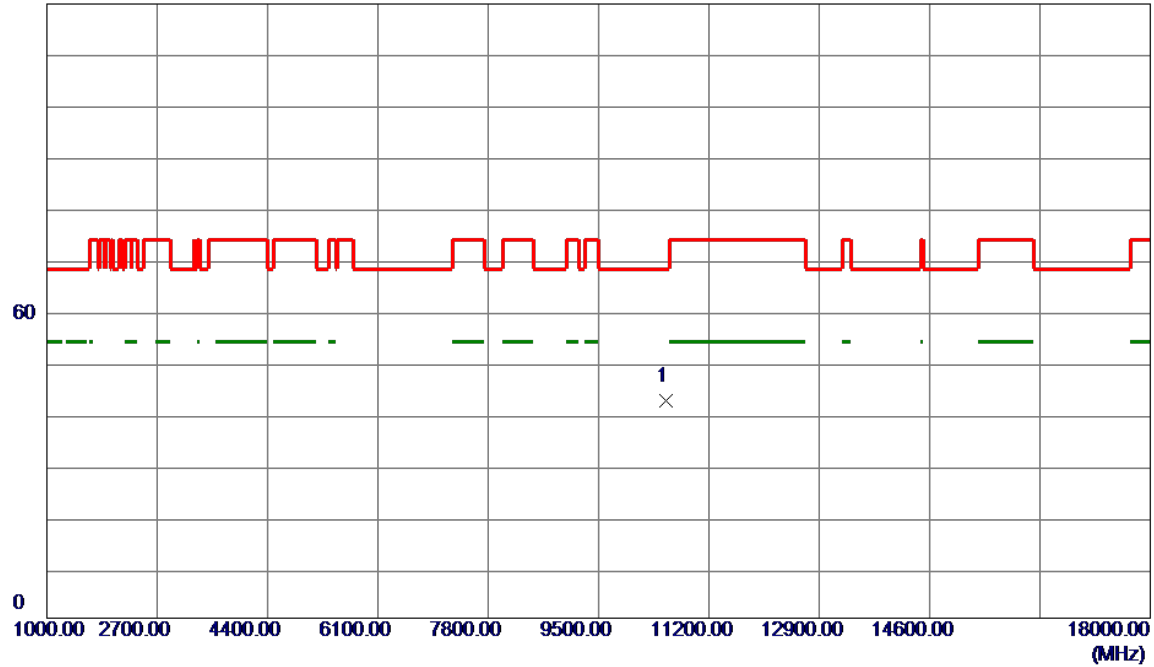


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	42.68	-0.30	42.38	68.20	-25.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5270MHz	Polarization	Horizontal

120 dBuV/m

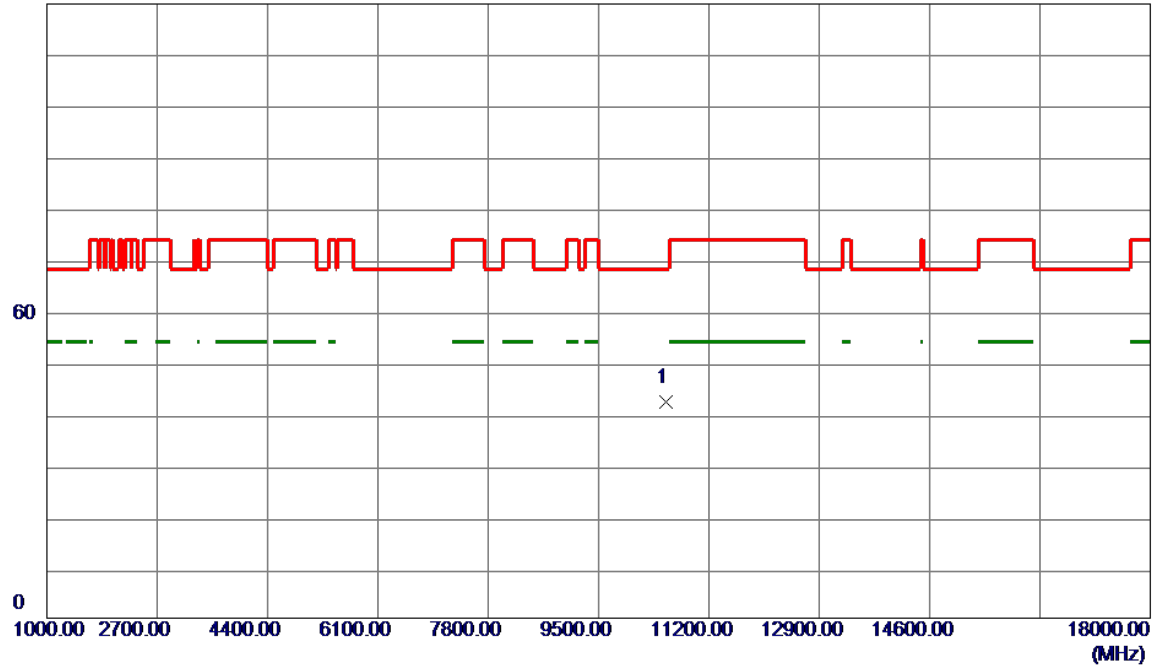


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10540.0000	42.50	-0.30	42.20	68.20	-26.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5310MHz	Polarization	Vertical

120 dBuV/m

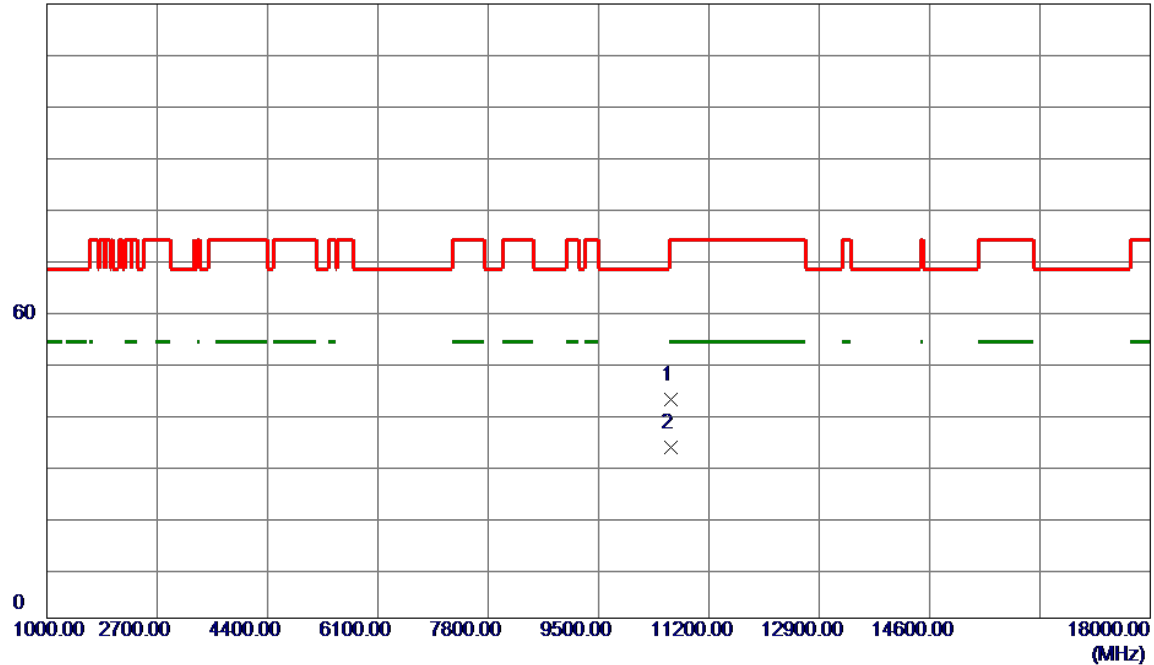


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	42.90	-0.27	42.63	74.00	-31.37	Peak	
2 *	10620.0000	33.65	-0.27	33.38	54.00	-20.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5310MHz	Polarization	Horizontal

120 dBuV/m

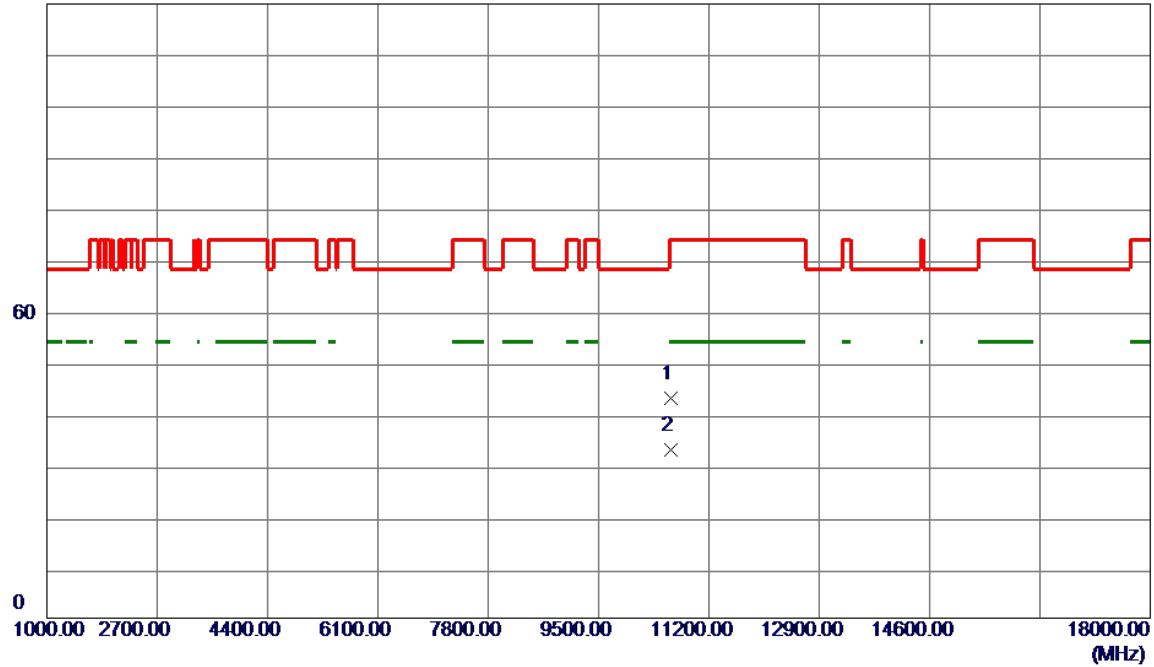


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	43.29	-0.27	43.02	74.00	-30.98	Peak	
2 *	10620.0000	33.21	-0.27	32.94	54.00	-21.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5510MHz	Polarization	Vertical

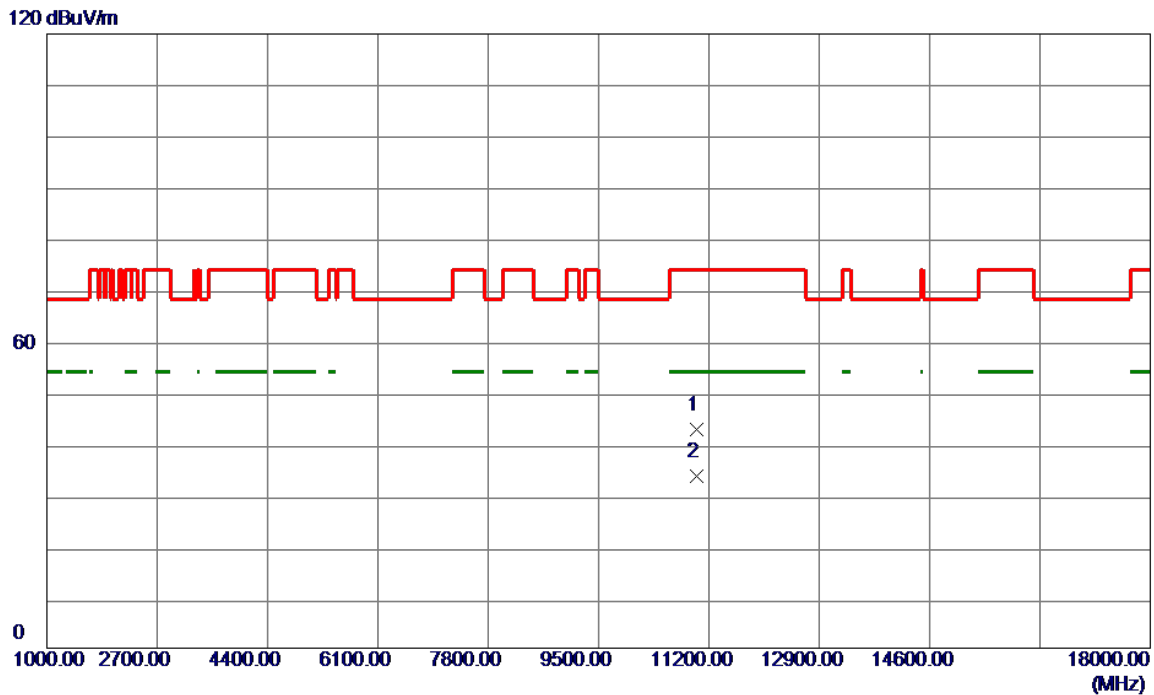


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	42.84	-0.10	42.74	74.00	-31.26	Peak	
2 *	11020.0000	33.68	-0.10	33.58	54.00	-20.42	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5510MHz	Polarization	Horizontal

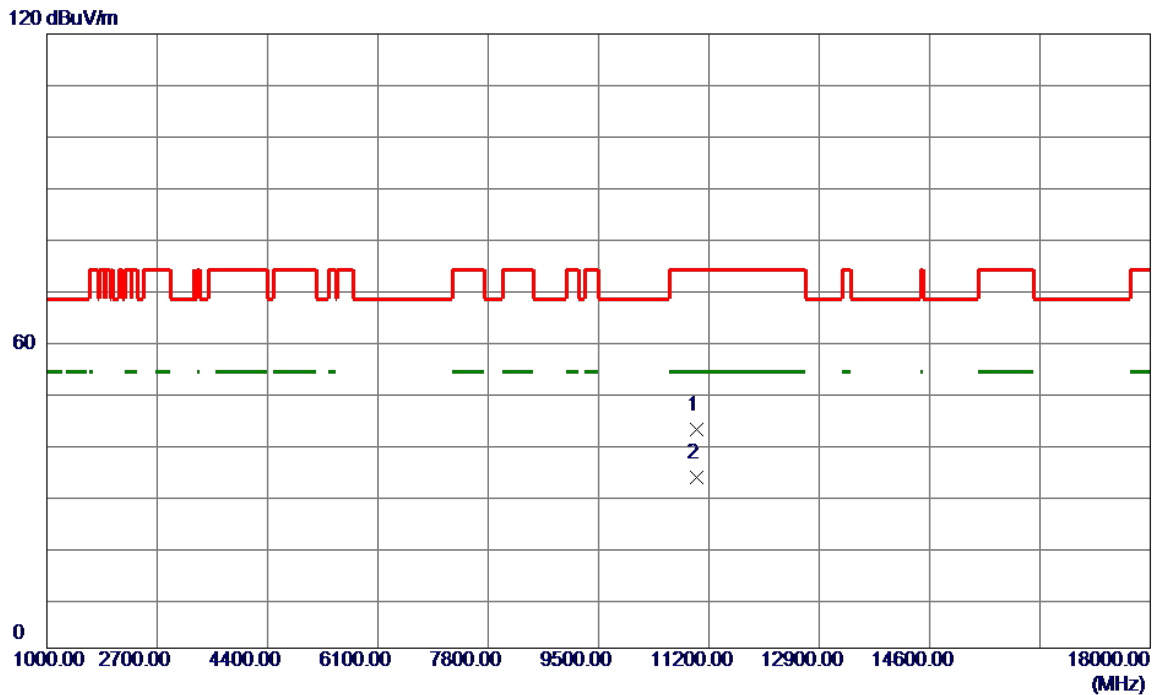

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	42.88	-0.10	42.78	74.00	-31.22	Peak	
2 *	11020.0000	33.55	-0.10	33.45	54.00	-20.55	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5550MHz	Polarization	Vertical

120 dBuV/m

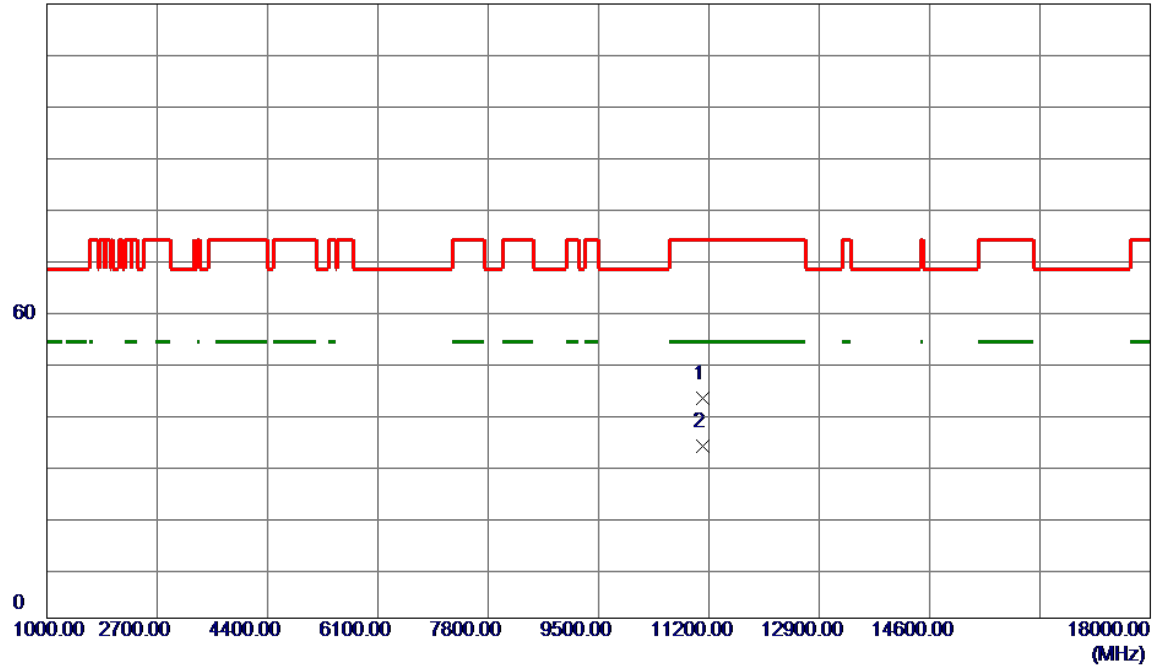


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	42.94	0.05	42.99	74.00	-31.01	Peak	
2 *	11100.0000	33.65	0.05	33.70	54.00	-20.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5550MHz	Polarization	Horizontal

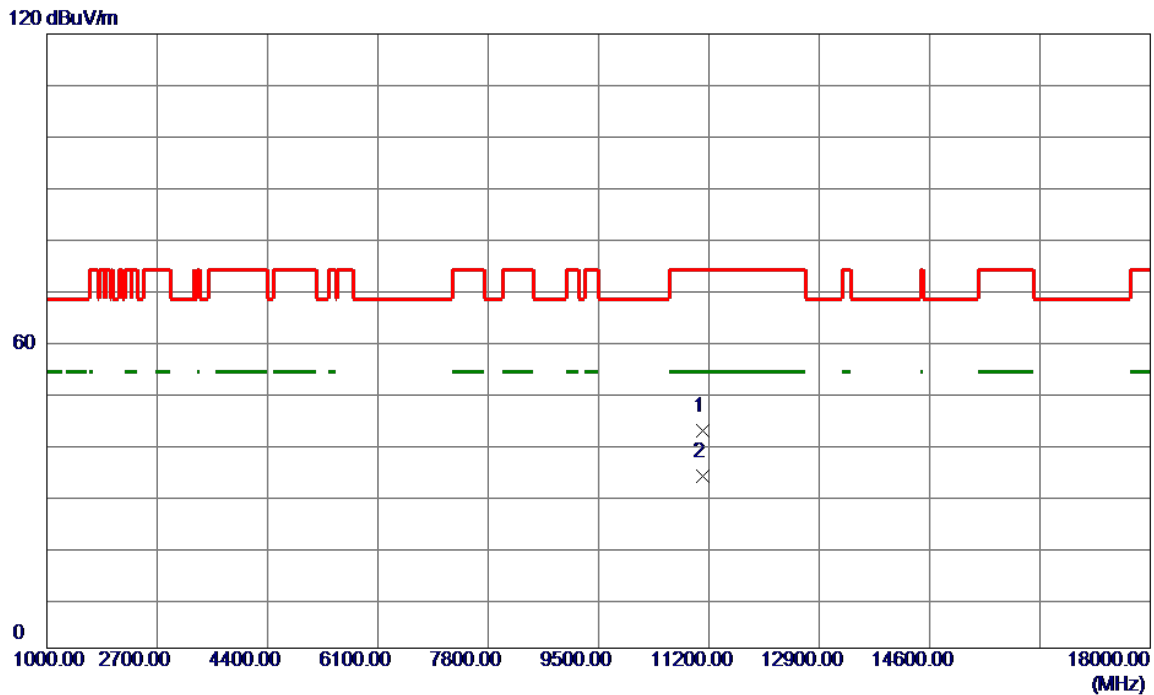


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	42.54	0.05	42.59	74.00	-31.41	Peak	
2 *	11100.0000	33.64	0.05	33.69	54.00	-20.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5670MHz	Polarization	Vertical

120 dBuV/m

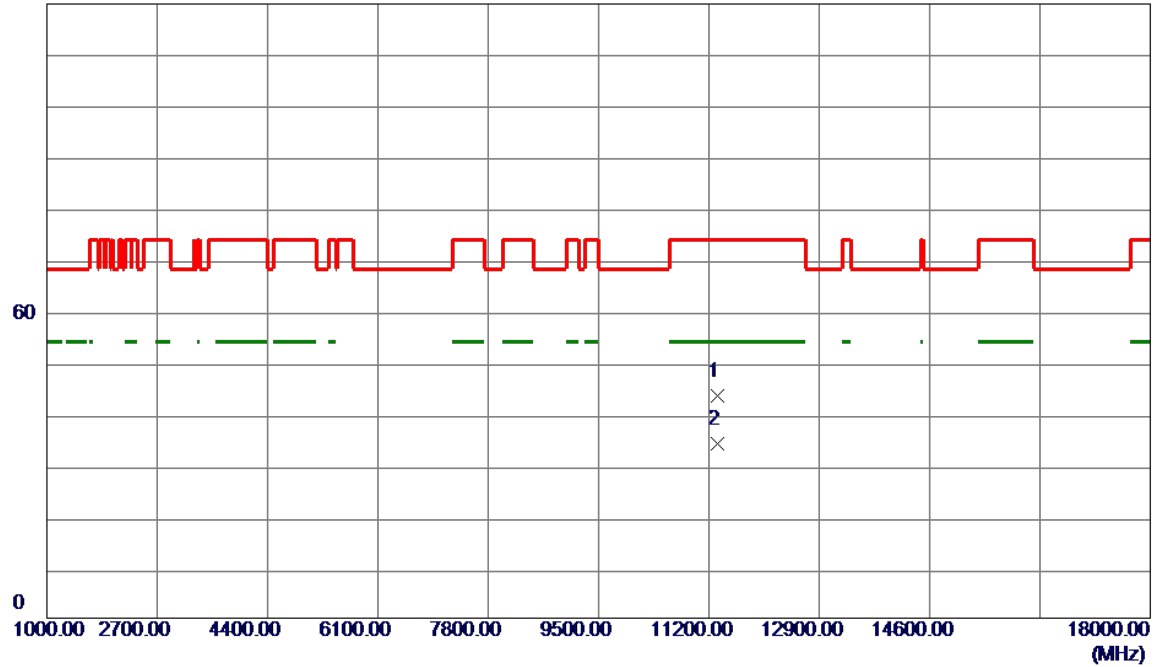


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	42.97	0.52	43.49	74.00	-30.51	Peak	
2 *	11340.0000	33.47	0.52	33.99	54.00	-20.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5670MHz	Polarization	Horizontal

120 dBuV/m

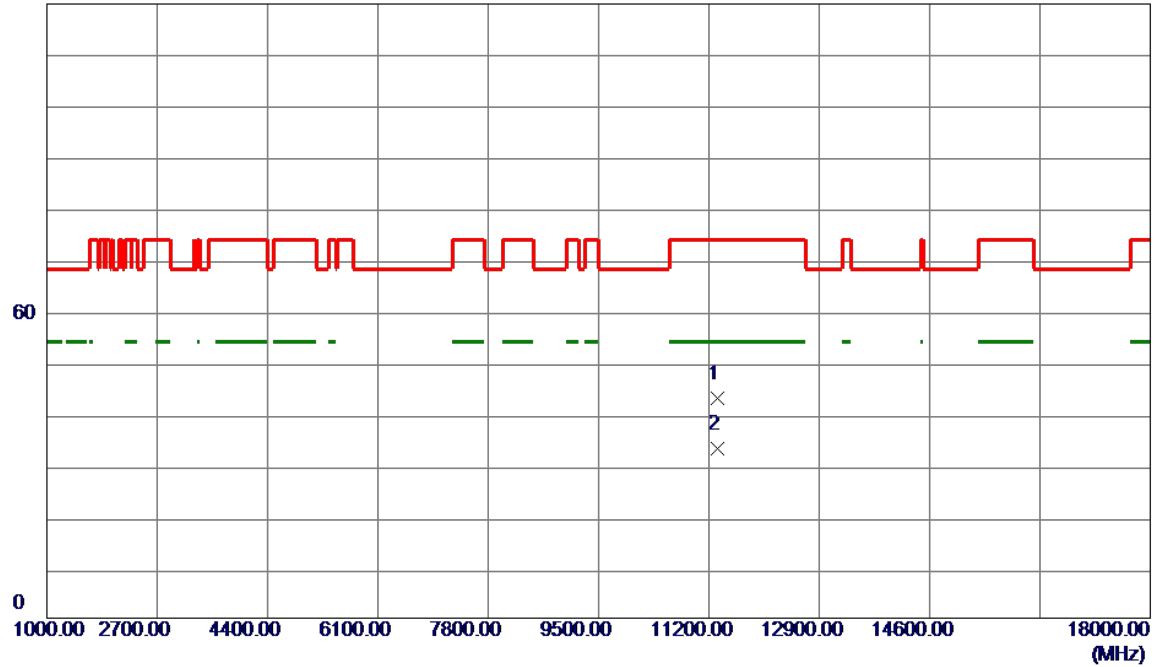


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	42.46	0.52	42.98	74.00	-31.02	Peak	
2 *	11340.0000	32.54	0.52	33.06	54.00	-20.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5755MHz	Polarization	Vertical

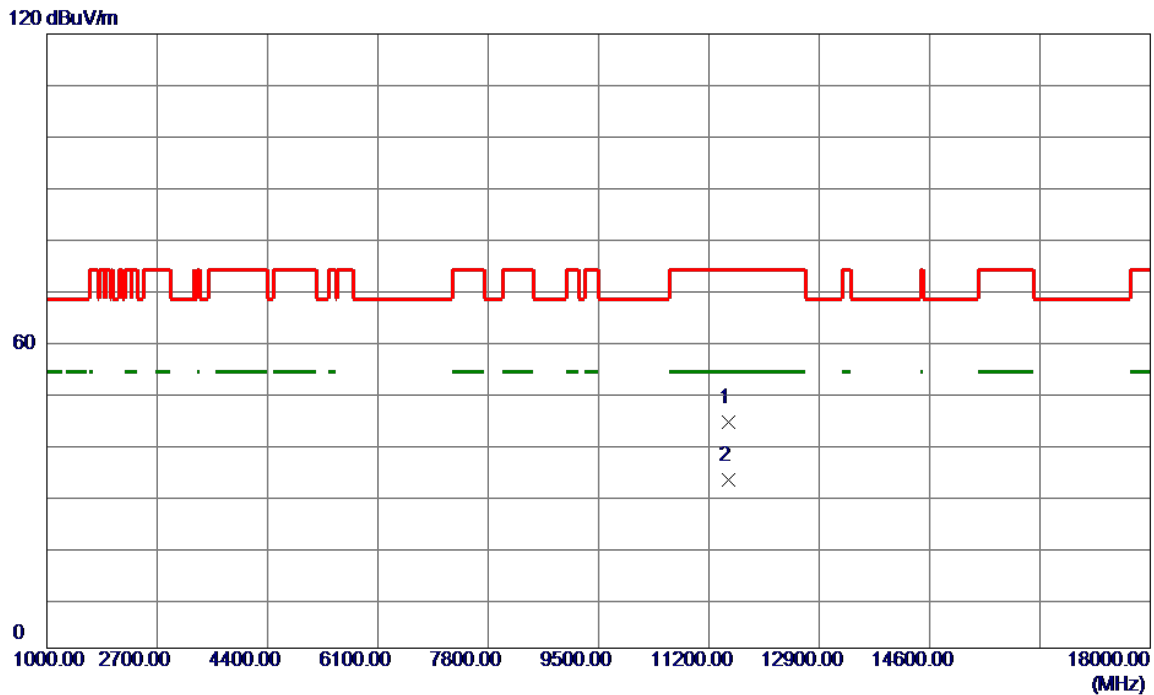


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	43.26	0.83	44.09	74.00	-29.91	Peak	
2 *	11510.0000	32.00	0.83	32.83	54.00	-21.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5755MHz	Polarization	Horizontal

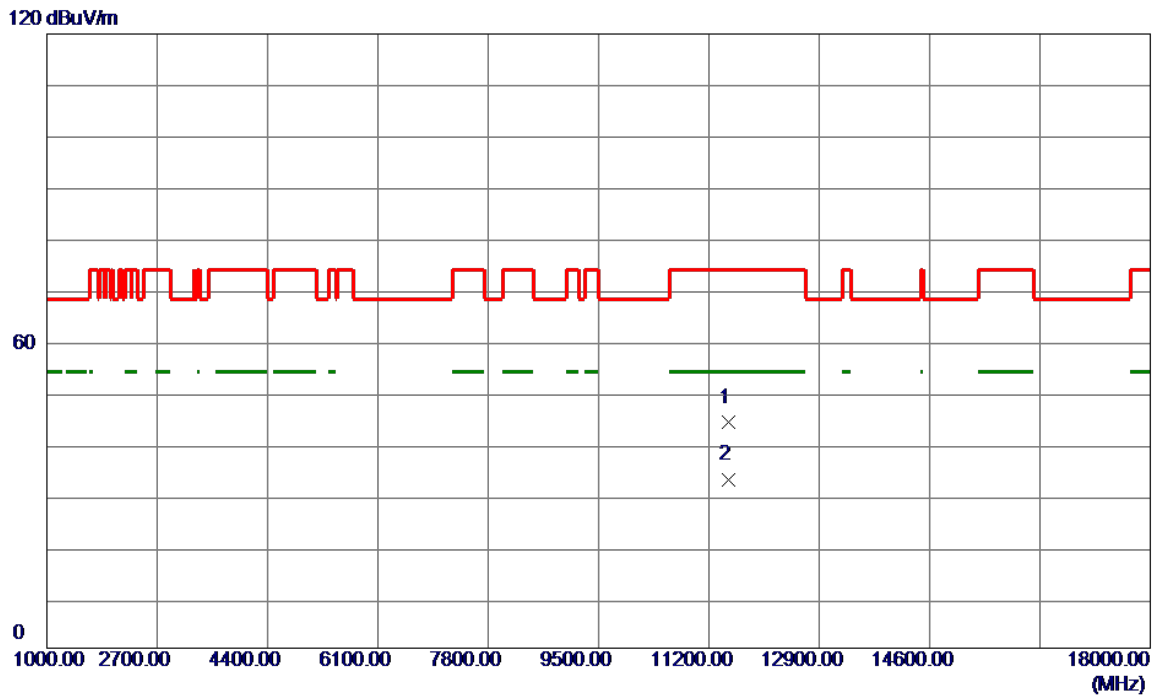


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	43.41	0.83	44.24	74.00	-29.76	Peak	
2 *	11510.0000	32.17	0.83	33.00	54.00	-21.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5795MHz	Polarization	Vertical

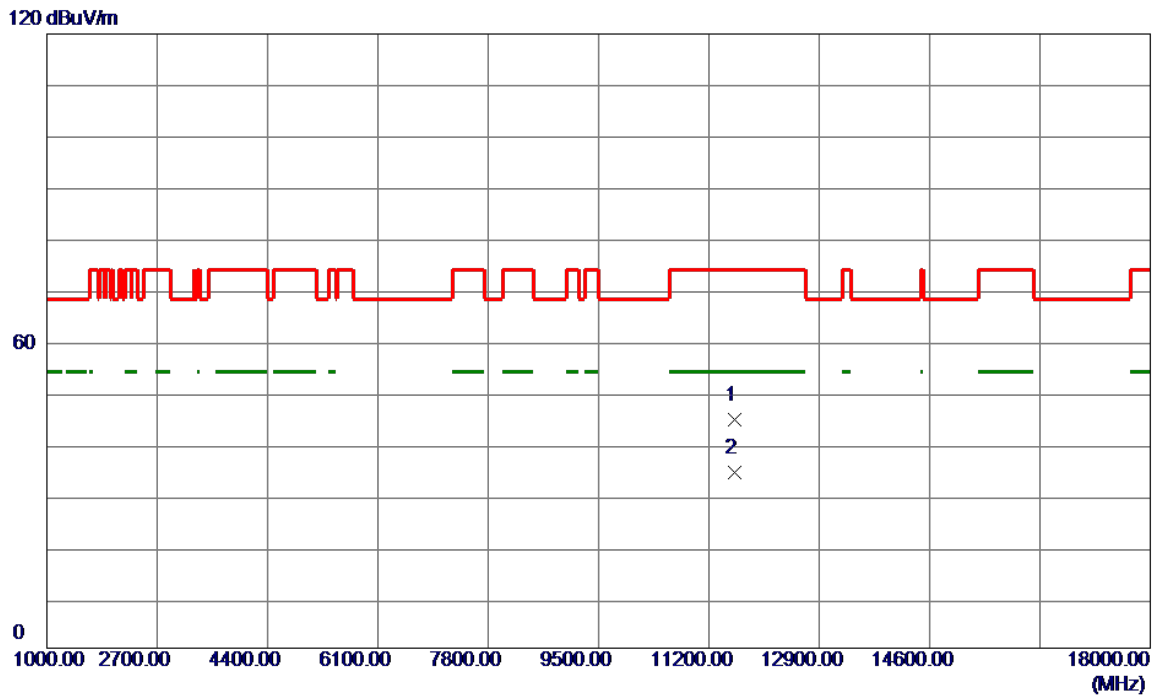

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	43.70	0.85	44.55	74.00	-29.45	Peak	
2 *	11590.0000	33.58	0.85	34.43	54.00	-19.57	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/26
Test Frequency	5795MHz	Polarization	Horizontal

120 dBuV/m

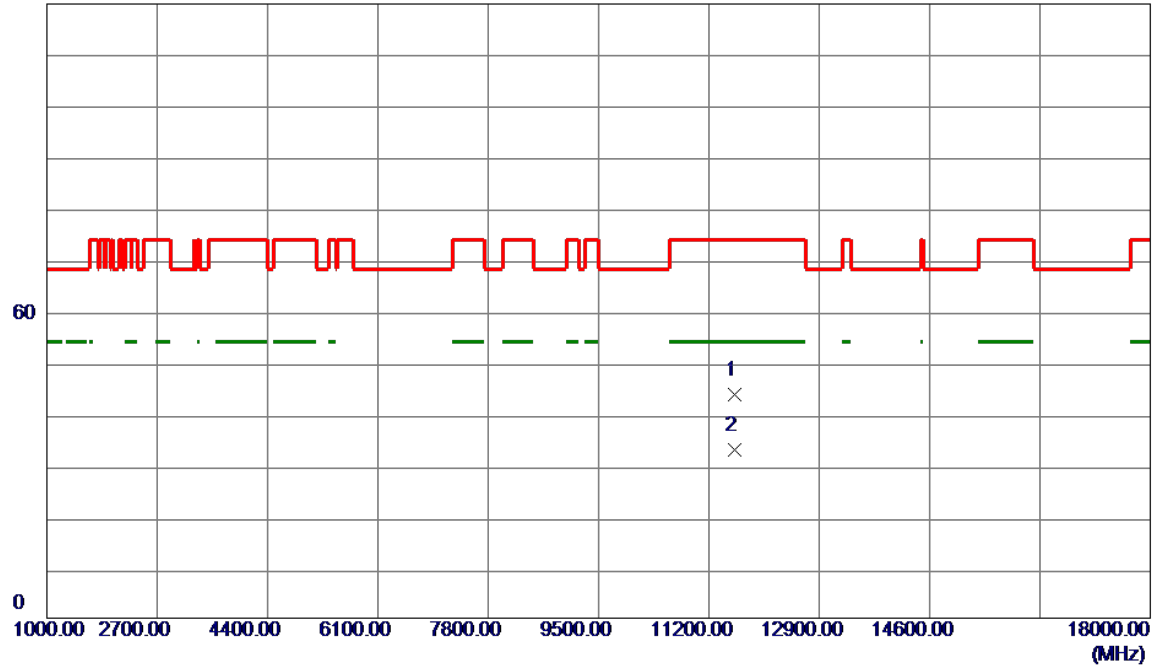

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	42.91	0.85	43.76	74.00	-30.24	Peak	
2 *	11590.0000	32.14	0.85	32.99	54.00	-21.01	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5210MHz	Polarization	Vertical

120 dBuV/m

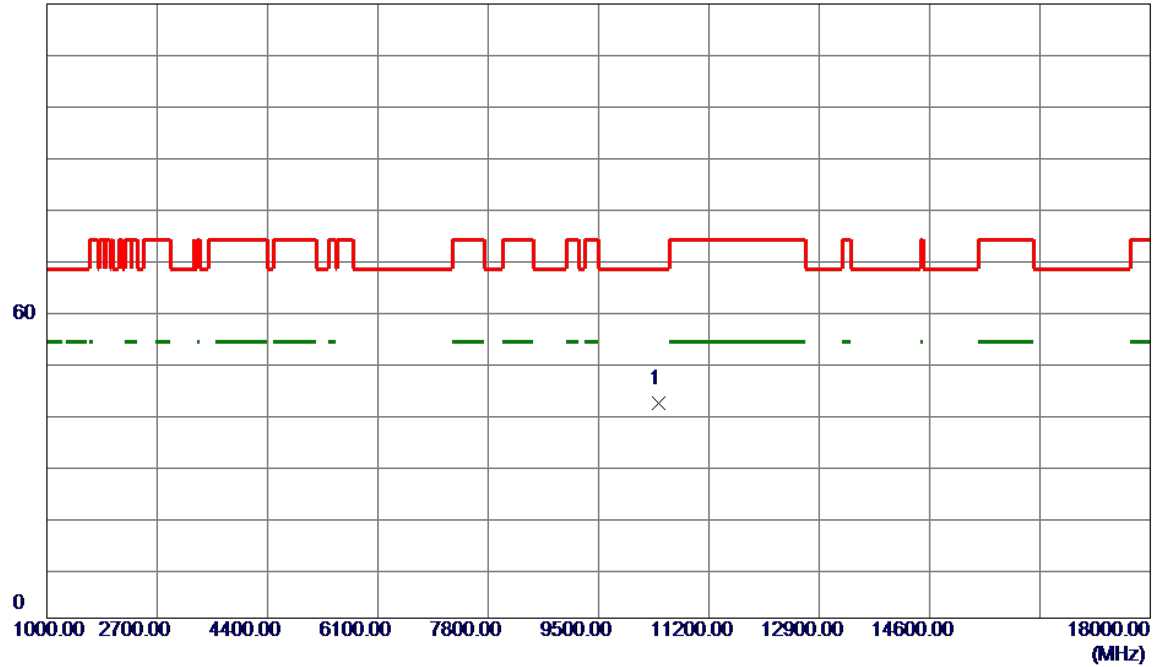


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	42.45	-0.43	42.02	68.20	-26.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5210MHz	Polarization	Horizontal

120 dBuV/m

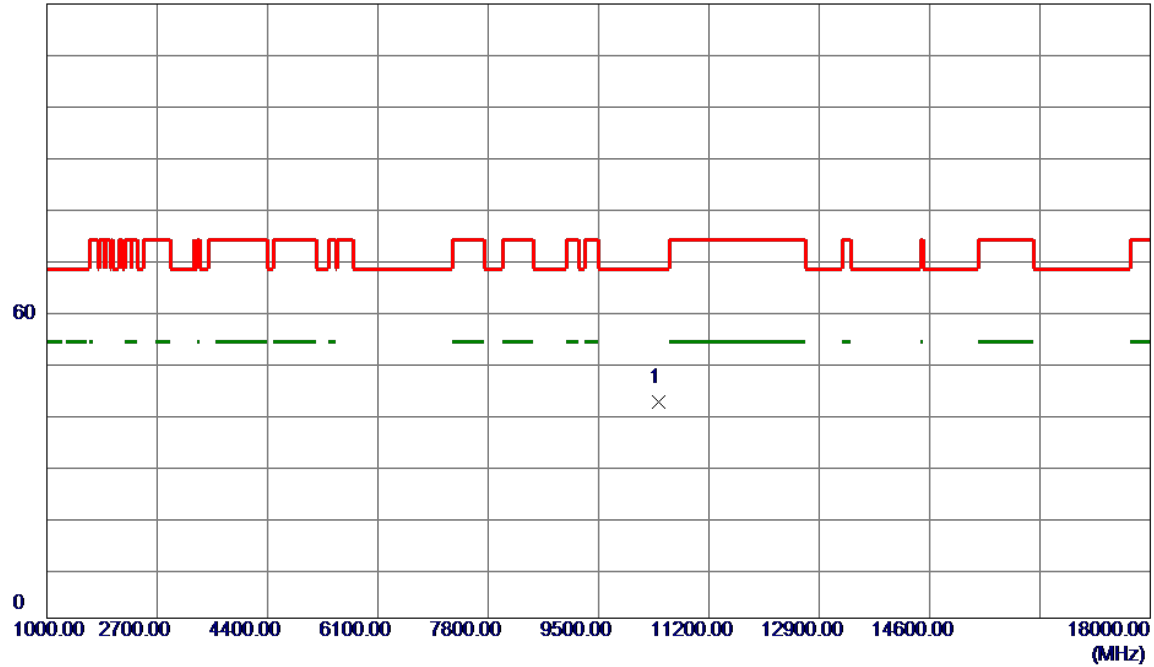


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	42.67	-0.43	42.24	68.20	-25.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5290MHz	Polarization	Vertical

120 dBuV/m

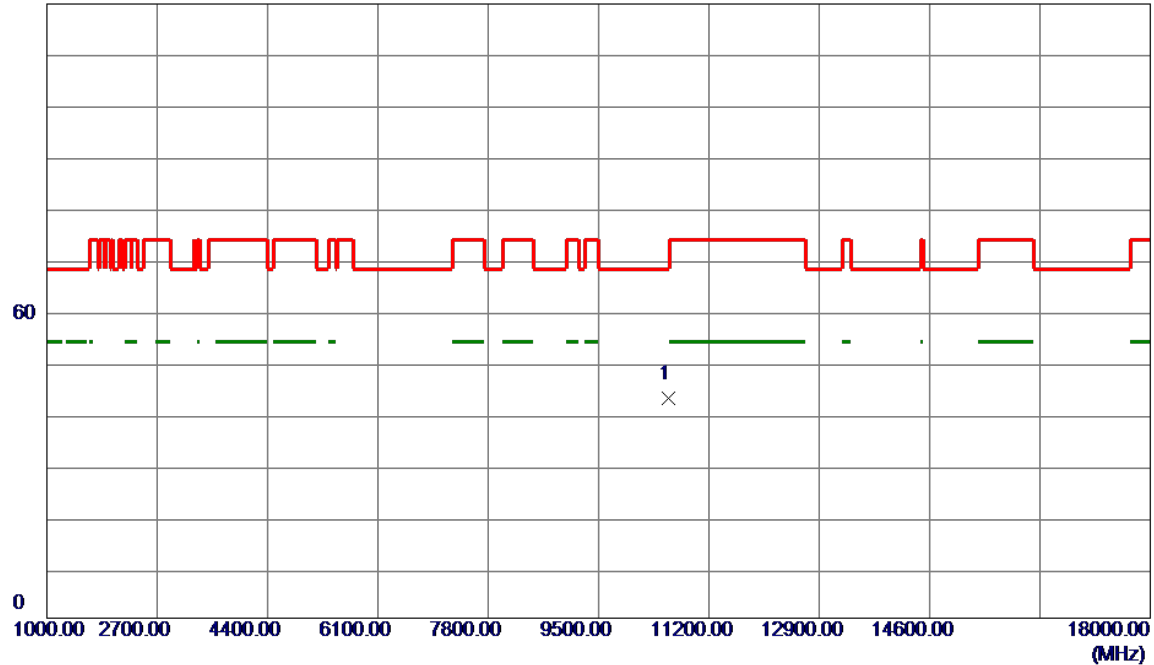


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	43.23	-0.28	42.95	68.20	-25.25	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5290MHz	Polarization	Horizontal

120 dBuV/m

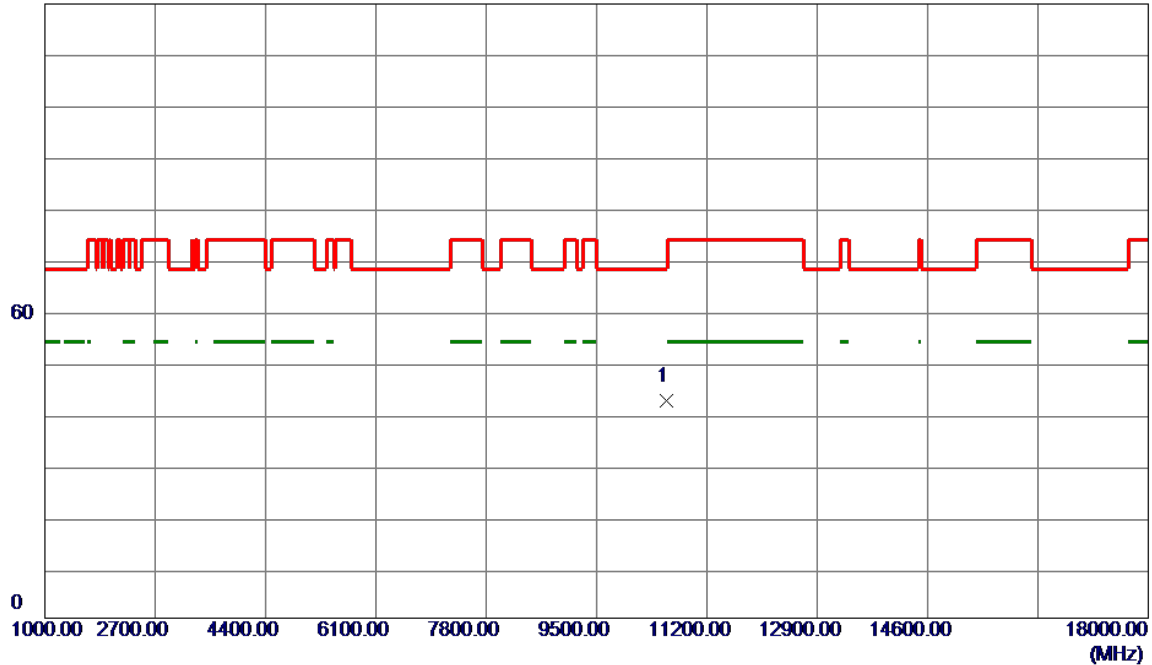


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	42.69	-0.28	42.41	68.20	-25.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5530MHz	Polarization	Vertical

120 dBuV/m

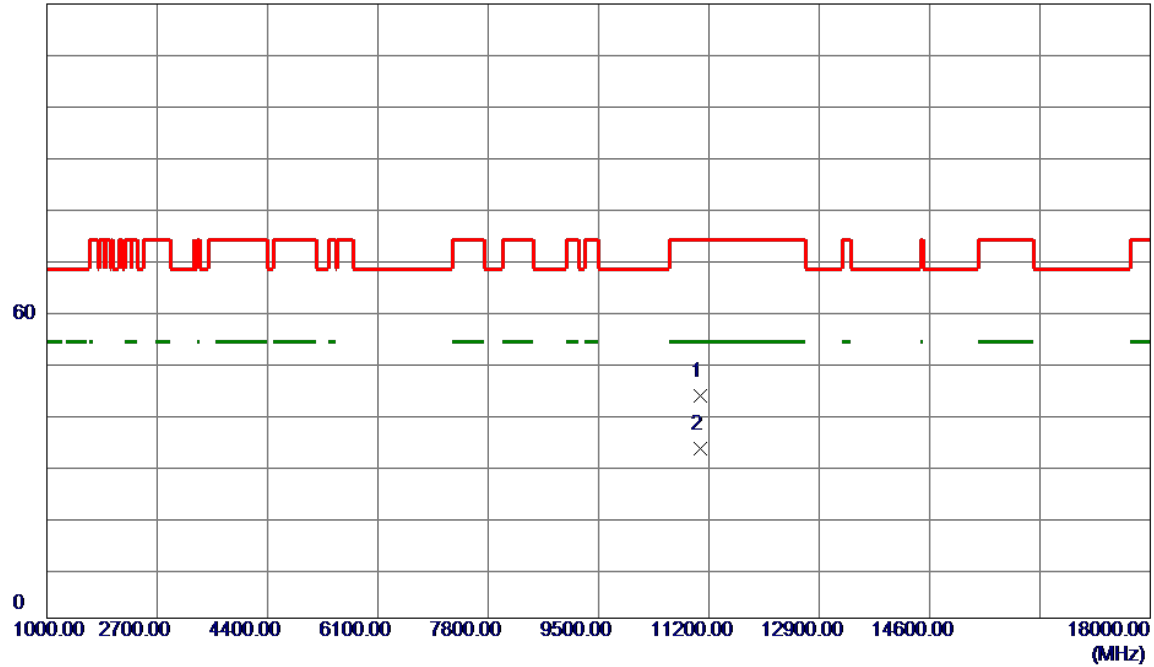


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	43.39	-0.02	43.37	74.00	-30.63	Peak	
2 *	11060.0000	33.14	-0.02	33.12	54.00	-20.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5530MHz	Polarization	Horizontal

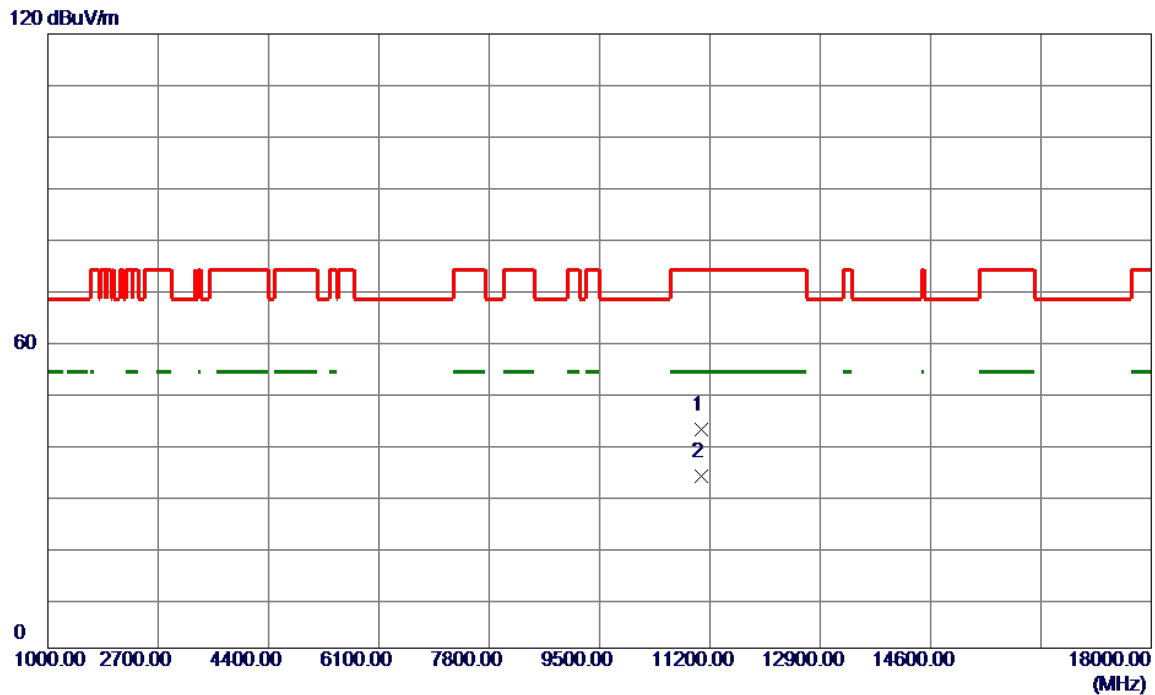


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	42.79	-0.02	42.77	74.00	-31.23	Peak	
2 *	11060.0000	33.52	-0.02	33.50	54.00	-20.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5610MHz	Polarization	Vertical

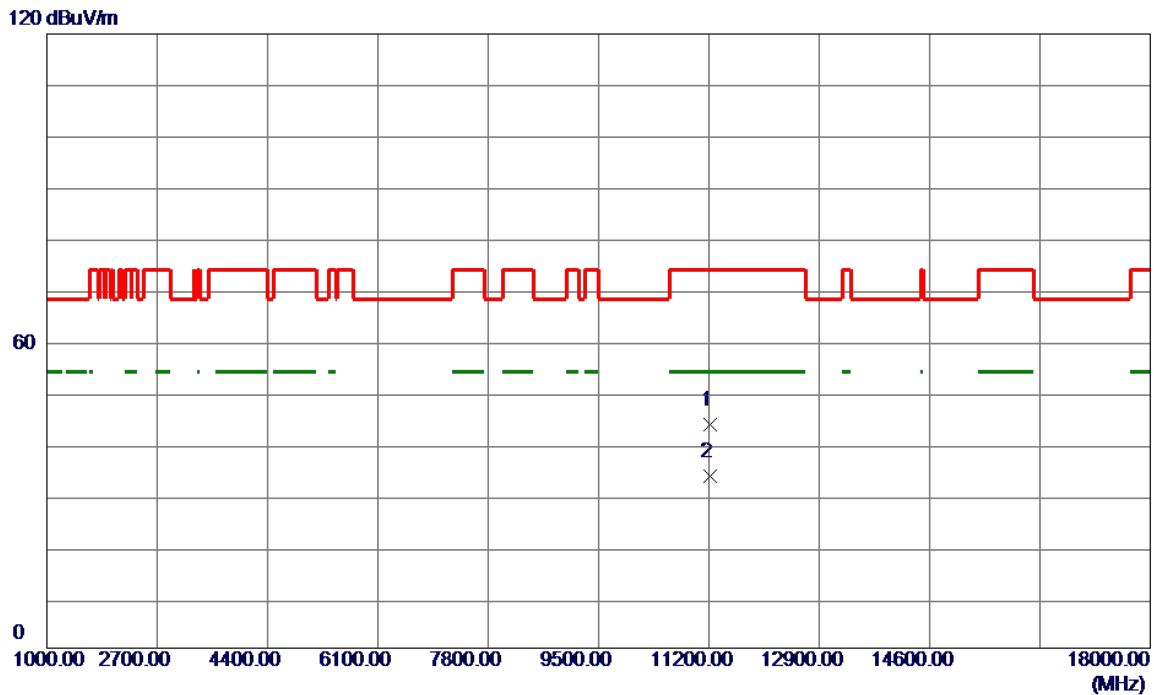


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	43.35	0.29	43.64	74.00	-30.36	Peak	
2 *	11220.0000	33.25	0.29	33.54	54.00	-20.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5610MHz	Polarization	Horizontal

120 dBuV/m

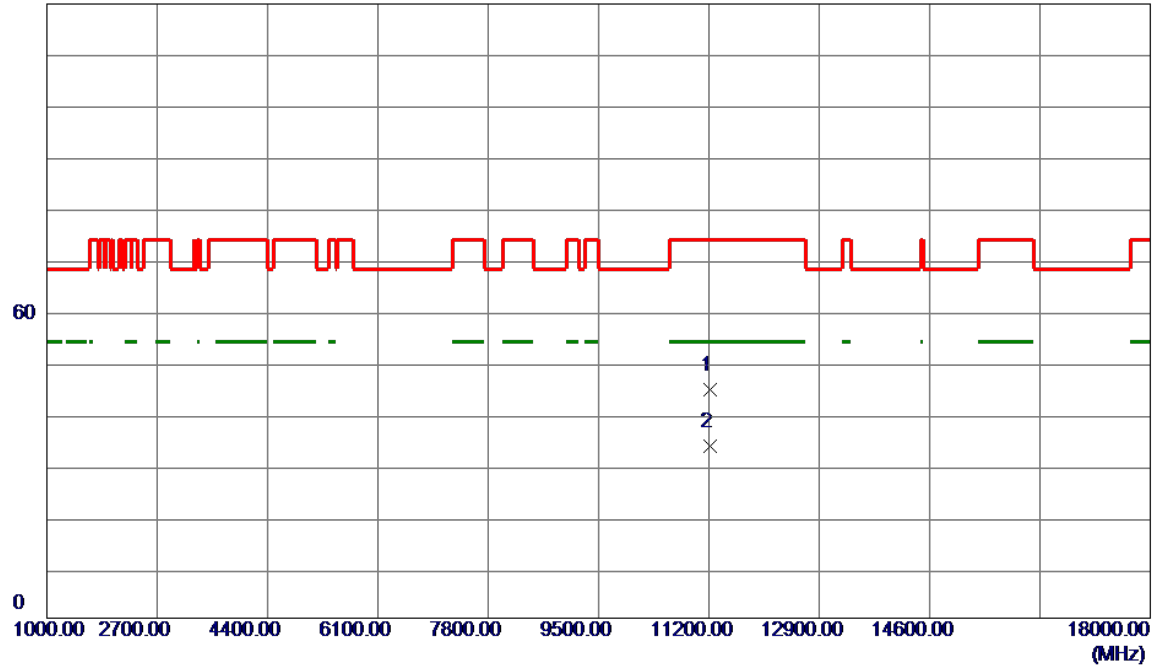


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	44.35	0.29	44.64	74.00	-29.36	Peak	
2 *	11220.0000	33.24	0.29	33.53	54.00	-20.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5775MHz	Polarization	Vertical

120 dBuV/m

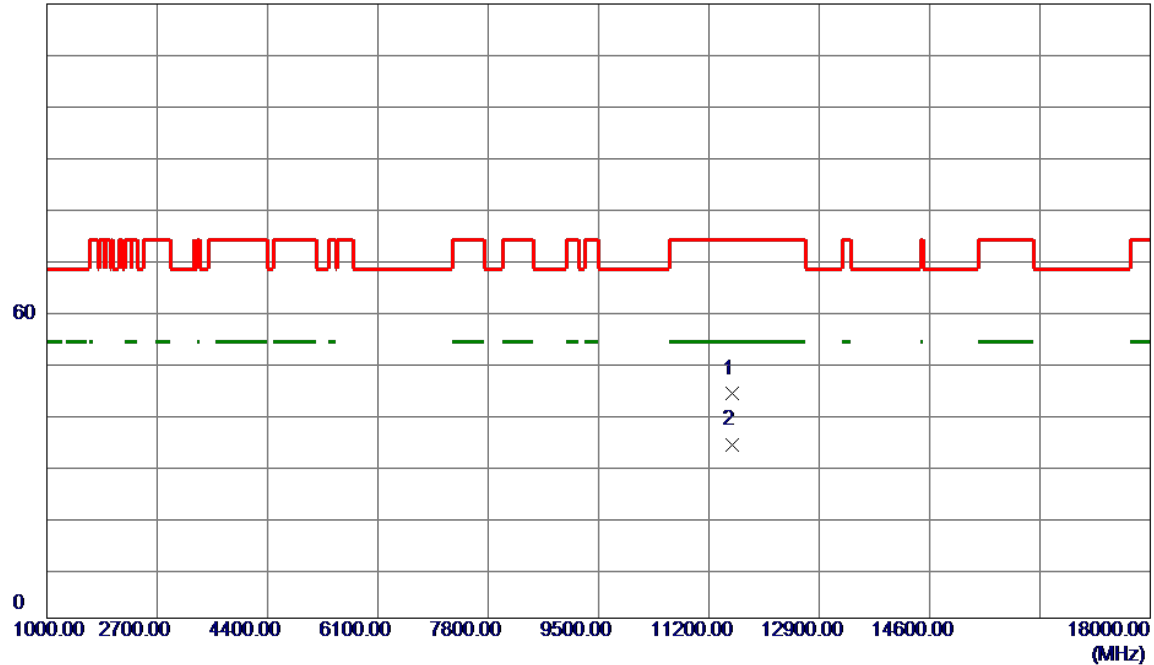


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	43.18	0.84	44.02	74.00	-29.98	Peak	
2 *	11550.0000	33.12	0.84	33.96	54.00	-20.04	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/26
Test Frequency	5775MHz	Polarization	Horizontal

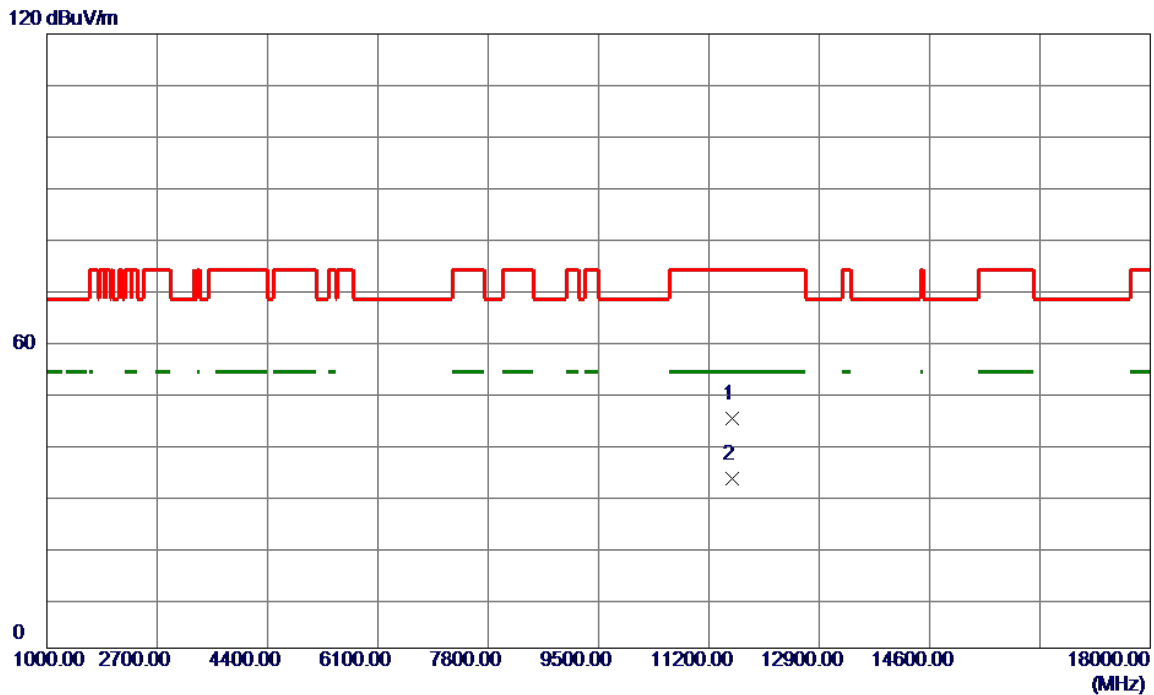

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	43.97	0.84	44.81	74.00	-29.19	Peak	
2 *	11550.0000	32.23	0.84	33.07	54.00	-20.93	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/12/26
Test Frequency	5250MHz	Polarization	Vertical

120 dBuV/m

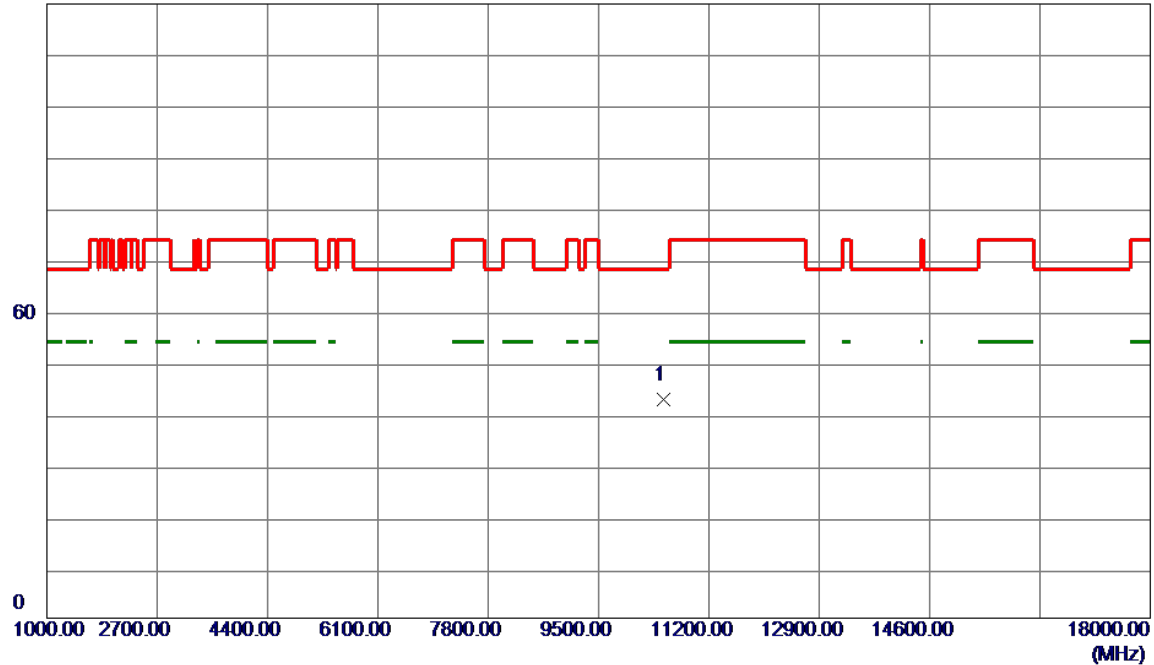


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10500.0000	42.93	-0.31	42.62	68.20	-25.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/12/26
Test Frequency	5250MHz	Polarization	Horizontal

120 dBuV/m

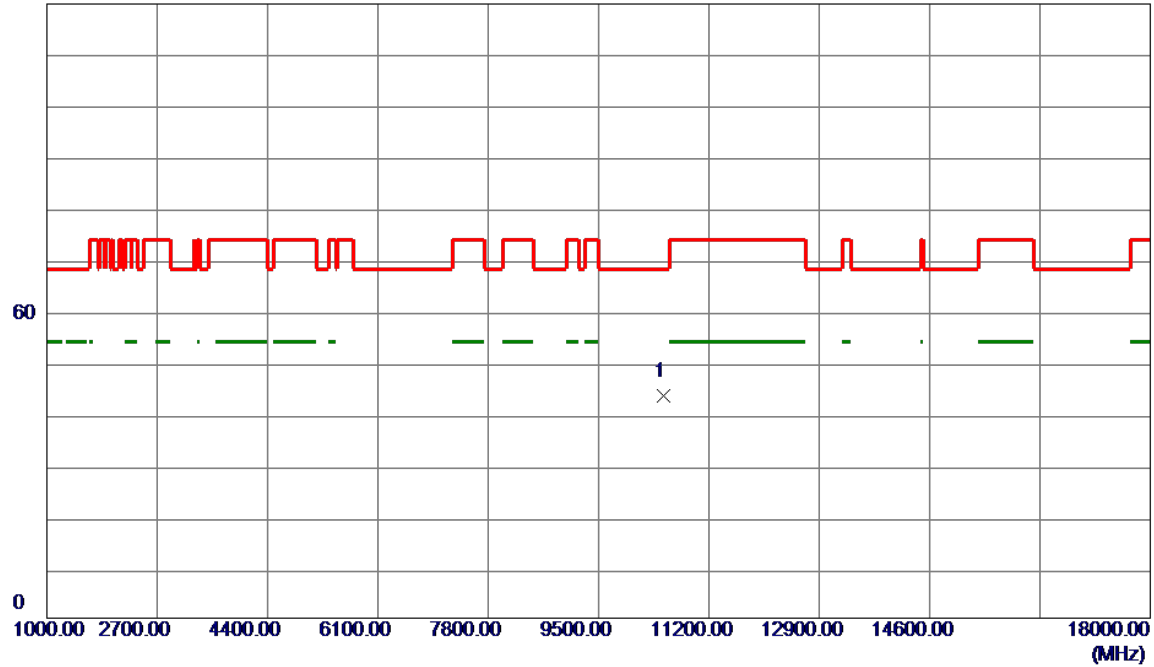


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10500.0000	43.74	-0.31	43.43	68.20	-24.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/12/26
Test Frequency	5570MHz	Polarization	Vertical

120 dBuV/m

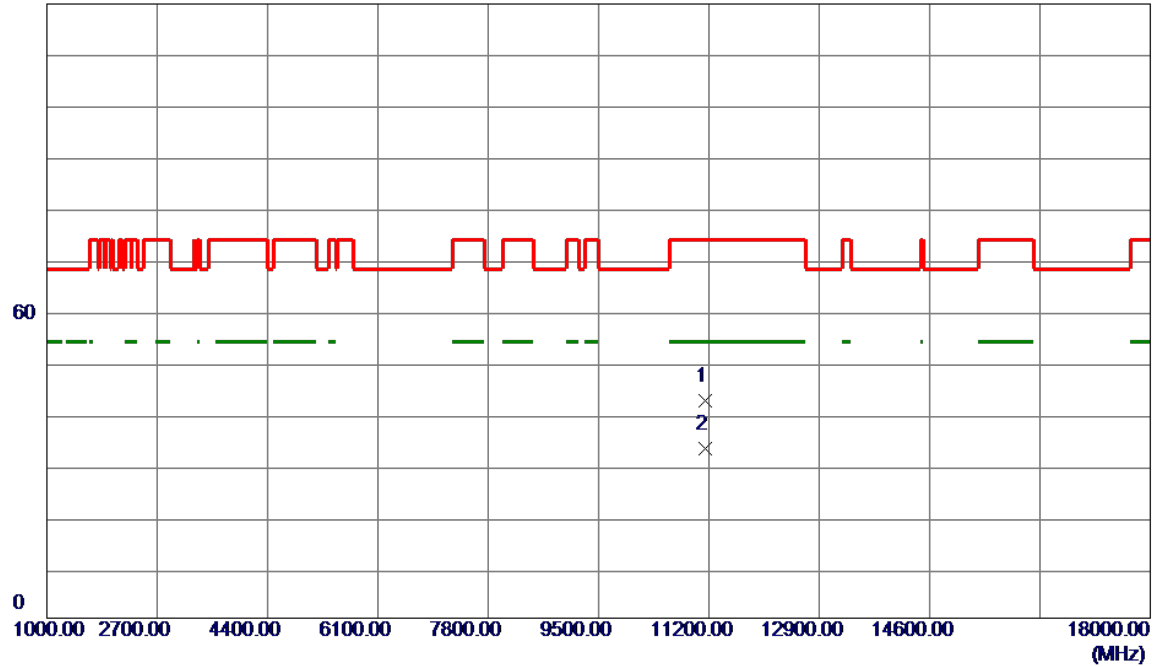


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11140.0000	42.43	0.13	42.56	74.00	-31.44	Peak	
2 *	11140.0000	32.88	0.13	33.01	54.00	-20.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/12/26
Test Frequency	5570MHz	Polarization	Horizontal

120 dBuV/m

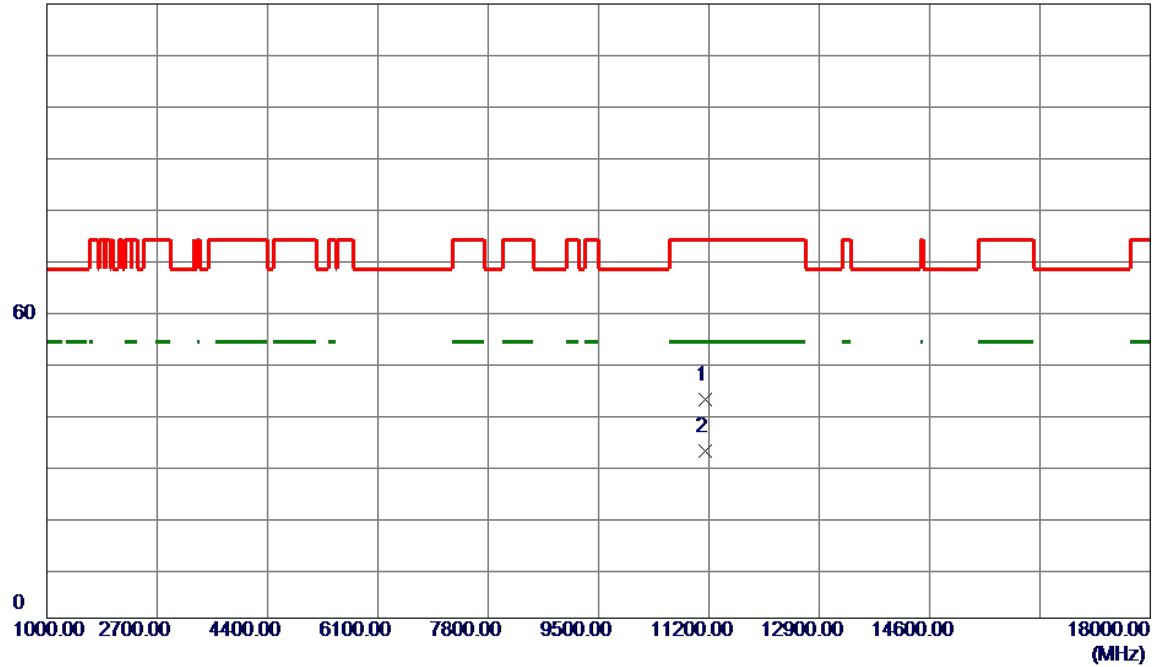


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11140.0000	42.70	0.13	42.83	74.00	-31.17	Peak	
2 *	11140.0000	32.47	0.13	32.60	54.00	-21.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5180MHz	Polarization	Vertical

120 dBuV/m

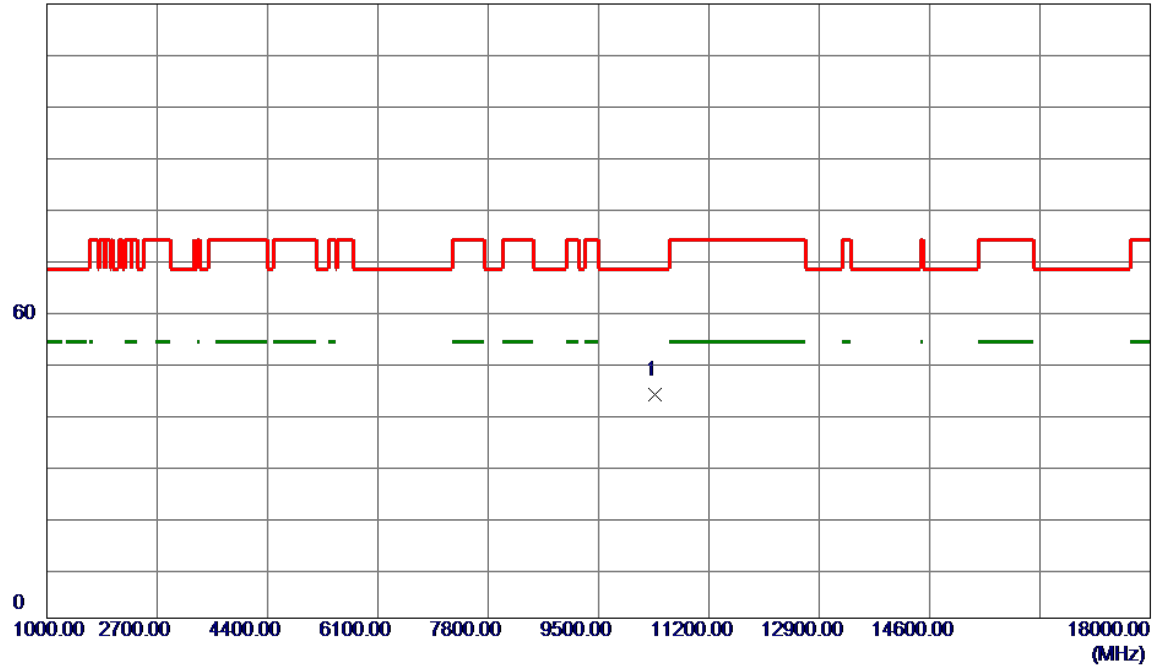


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	44.25	-0.53	43.72	68.20	-24.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5180MHz	Polarization	Horizontal

120 dBuV/m

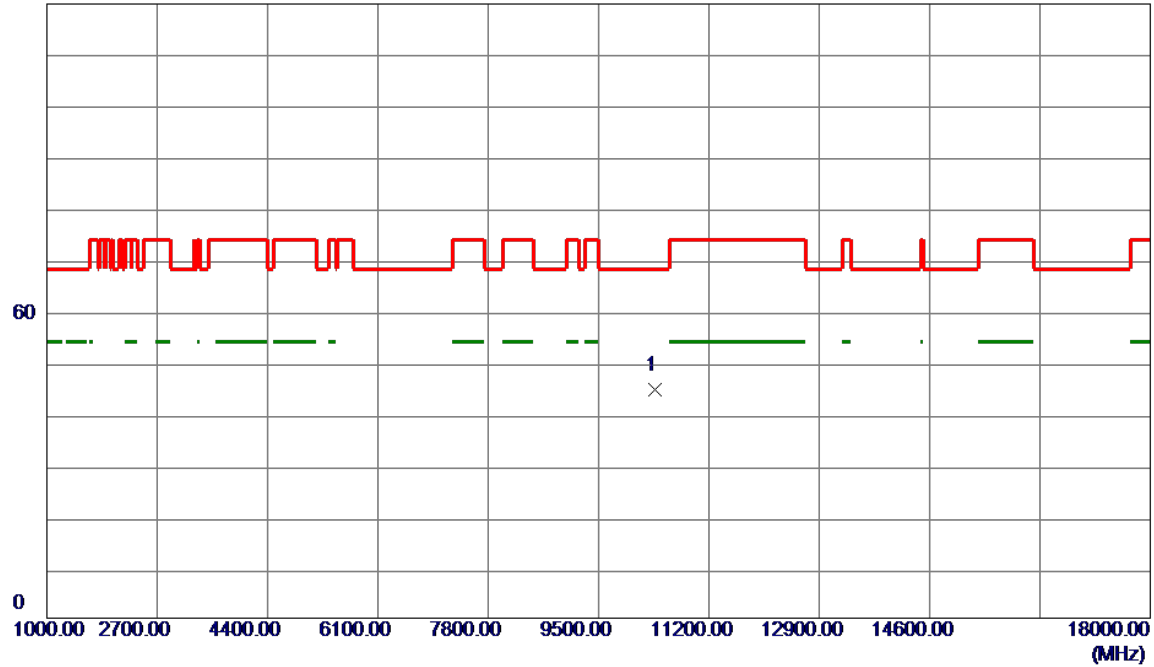


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10360.0000	45.08	-0.53	44.55	68.20	-23.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5200MHz	Polarization	Vertical

120 dBuV/m

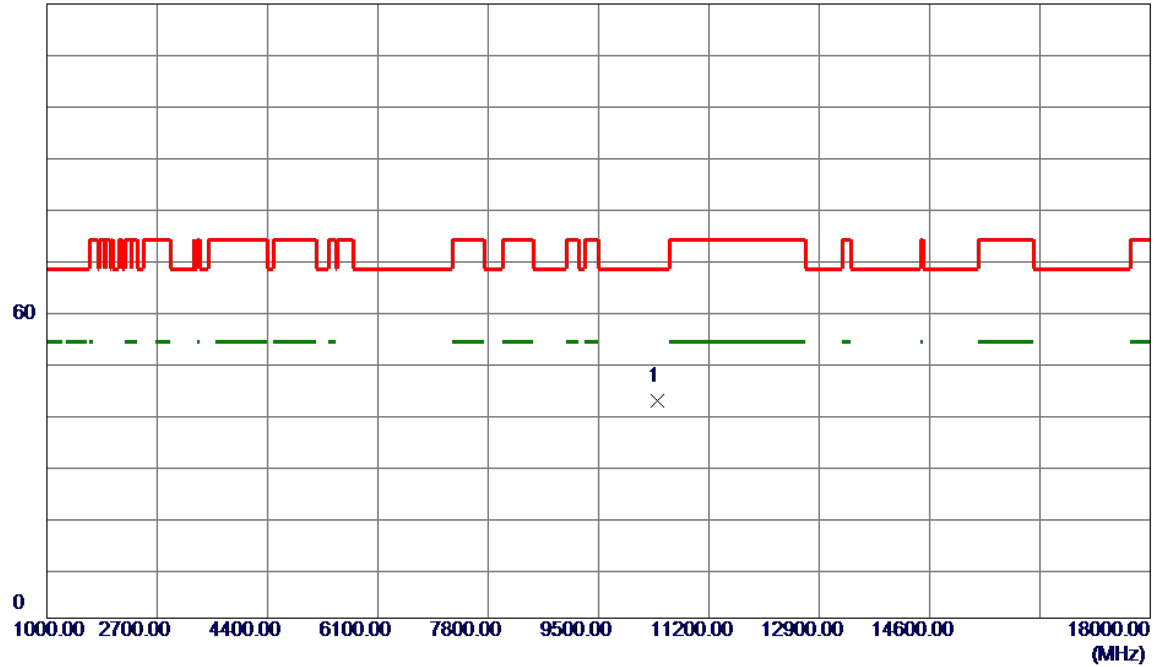


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	42.90	-0.46	42.44	68.20	-25.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5200MHz	Polarization	Horizontal

120 dBuV/m

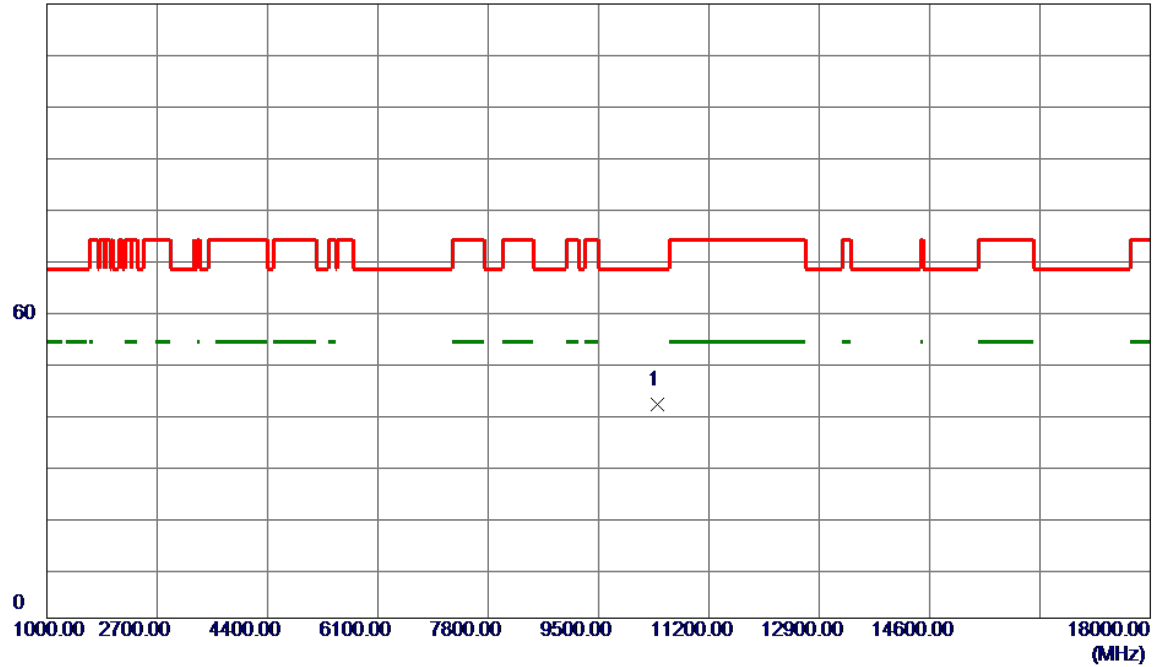


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10400.0000	42.33	-0.46	41.87	68.20	-26.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5240MHz	Polarization	Vertical

120 dBuV/m

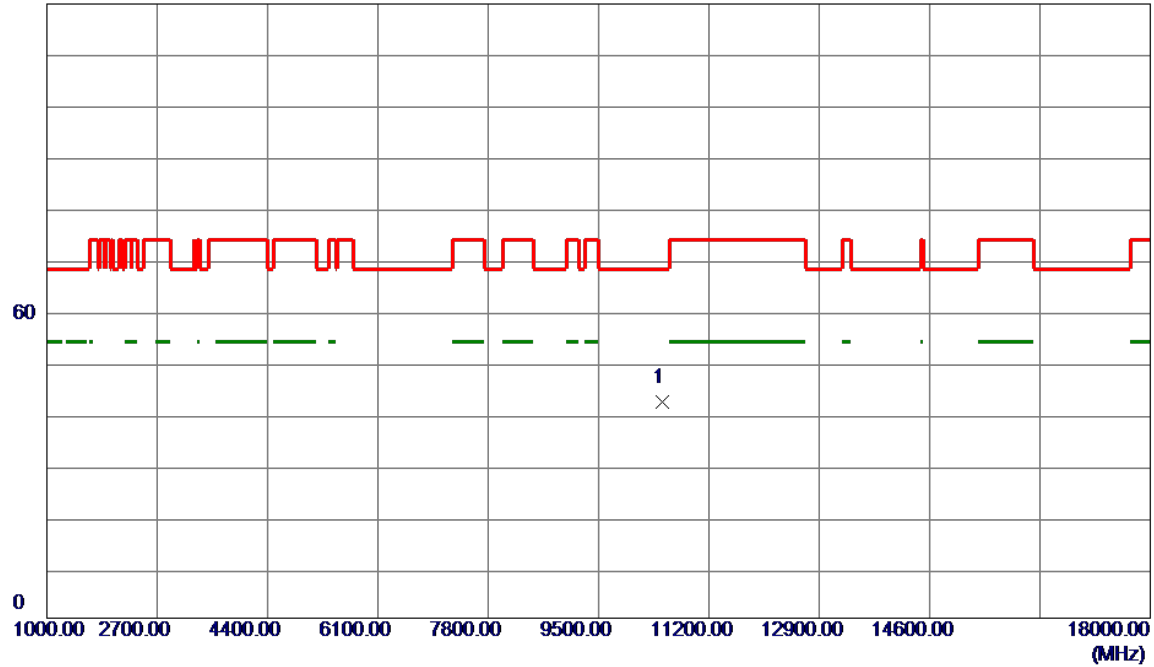


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	42.54	-0.34	42.20	68.20	-26.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5240MHz	Polarization	Horizontal

120 dBuV/m

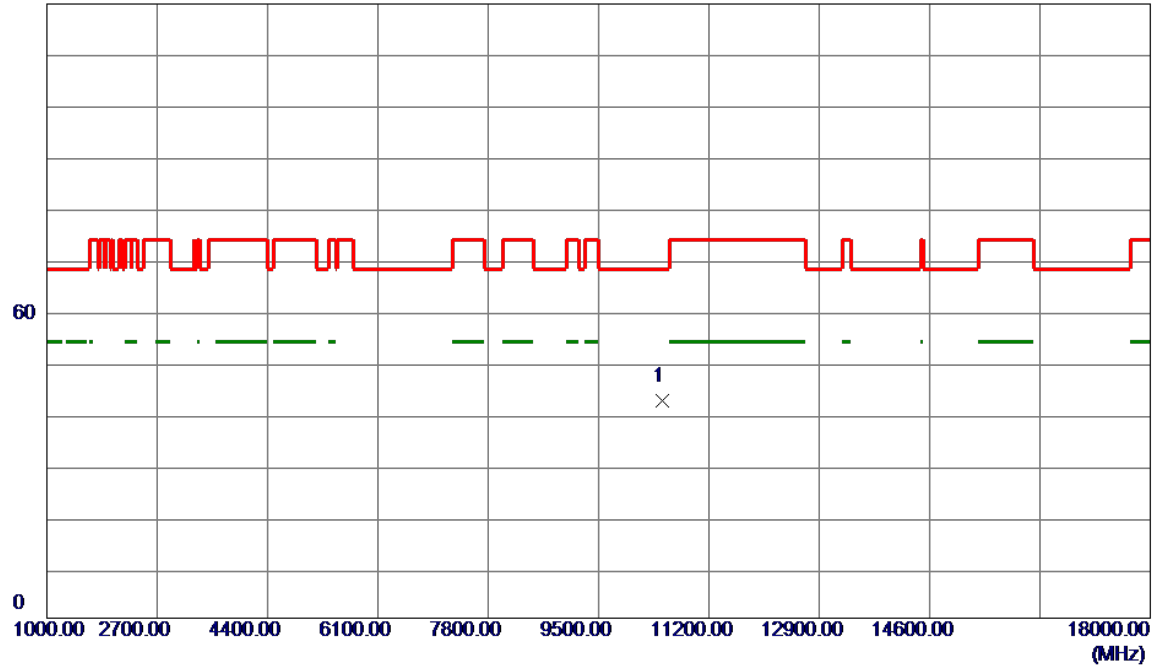


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	42.80	-0.34	42.46	68.20	-25.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5260MHz	Polarization	Vertical

120 dBuV/m

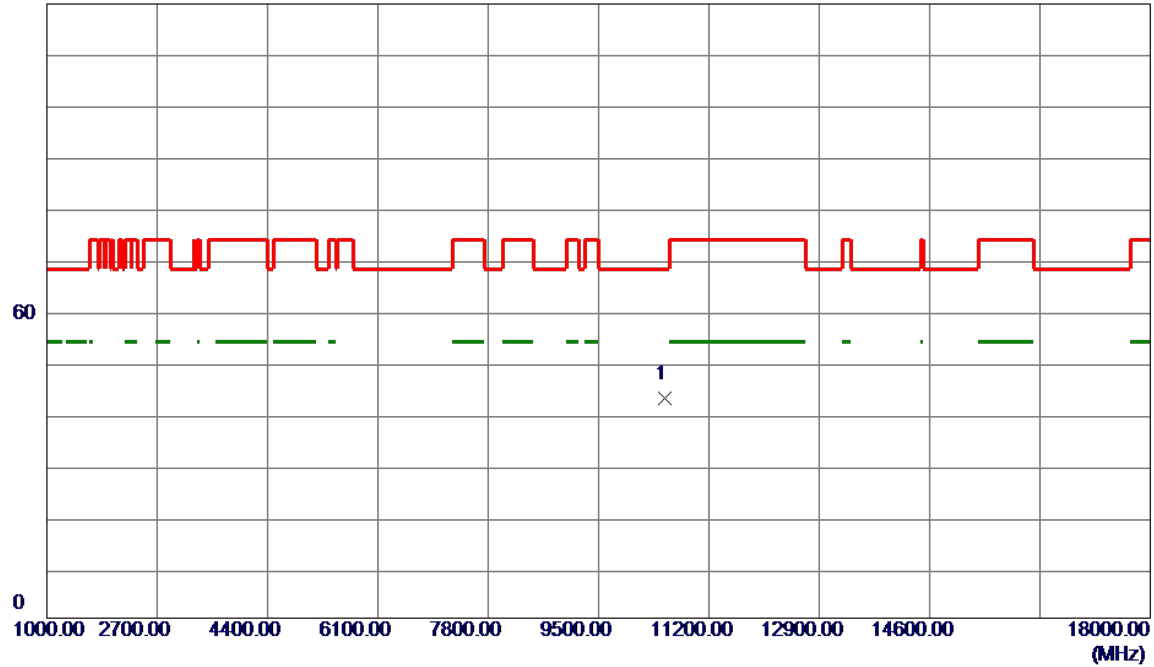


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10520.0000	43.33	-0.30	43.03	68.20	-25.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5260MHz	Polarization	Horizontal

120 dBuV/m

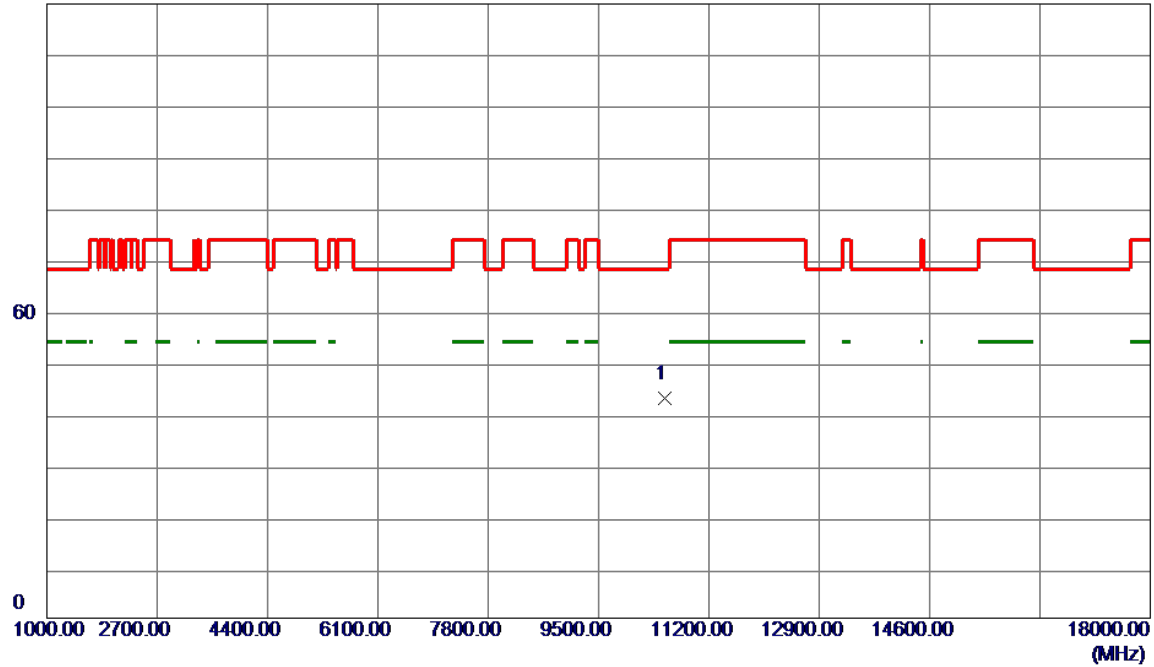


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	43.16	-0.30	42.86	68.20	-25.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5300MHz	Polarization	Vertical

120 dBuV/m

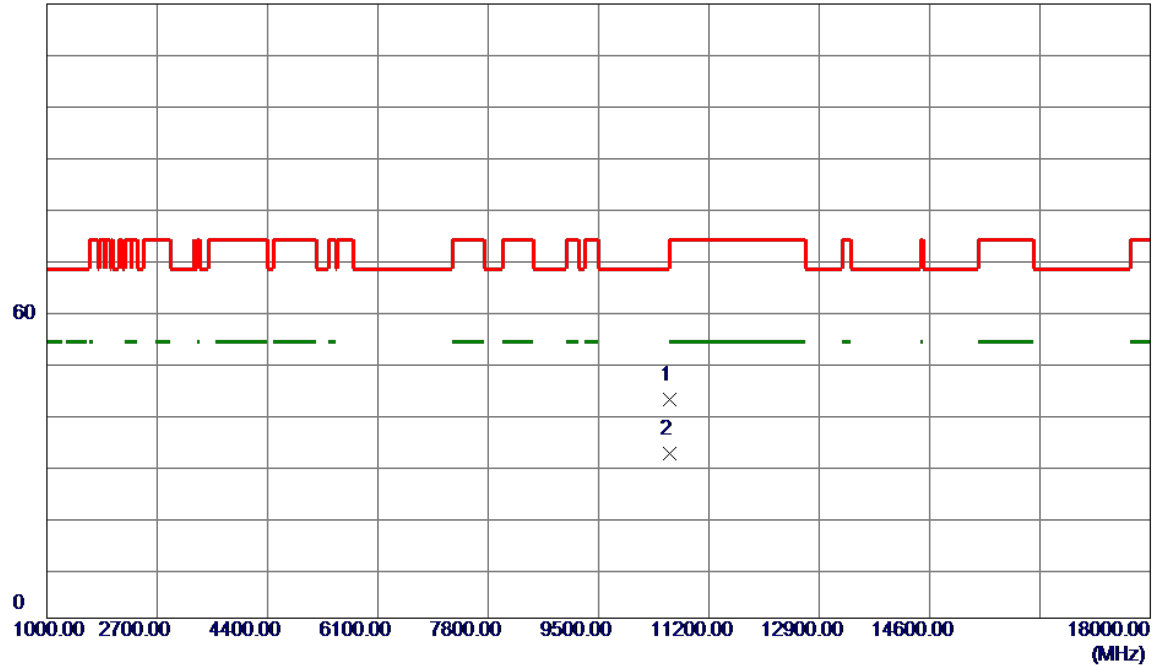

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	43.10	-0.28	42.82	68.20	-25.38	Peak	
2	10600.0000	32.52	-0.28	32.24	999.00	-966.76	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5300MHz	Polarization	Horizontal

120 dBuV/m

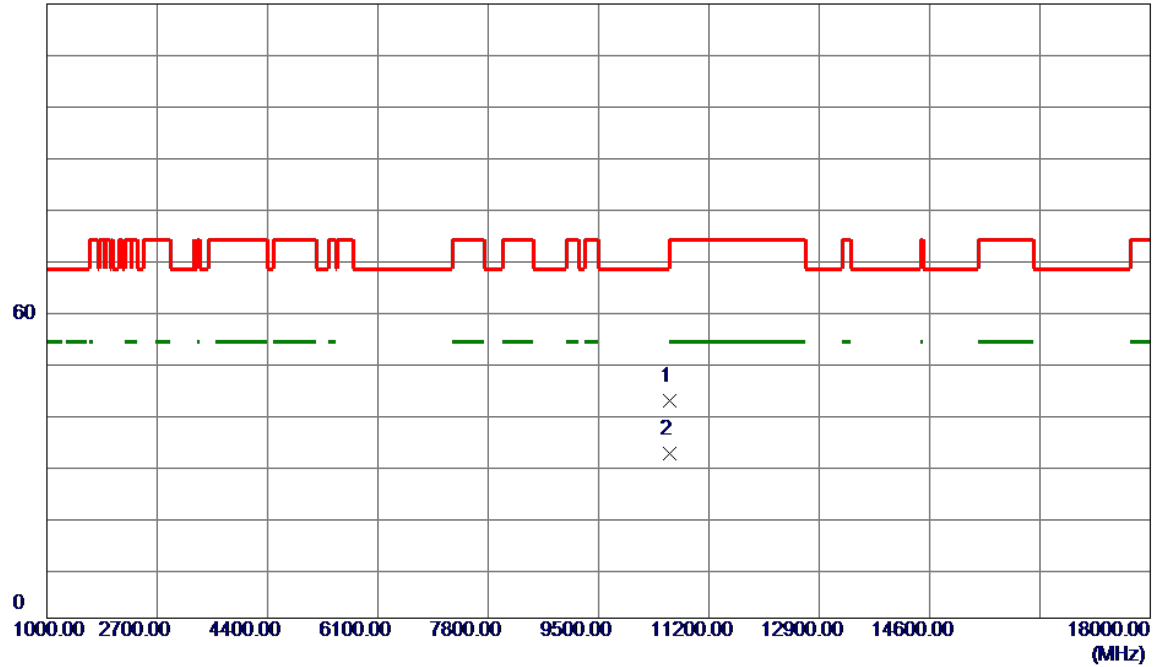

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	42.86	-0.28	42.58	68.20	-25.62	Peak	
2	10600.0000	32.55	-0.28	32.27	999.00	-966.73	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5320MHz	Polarization	Vertical

120 dBuV/m

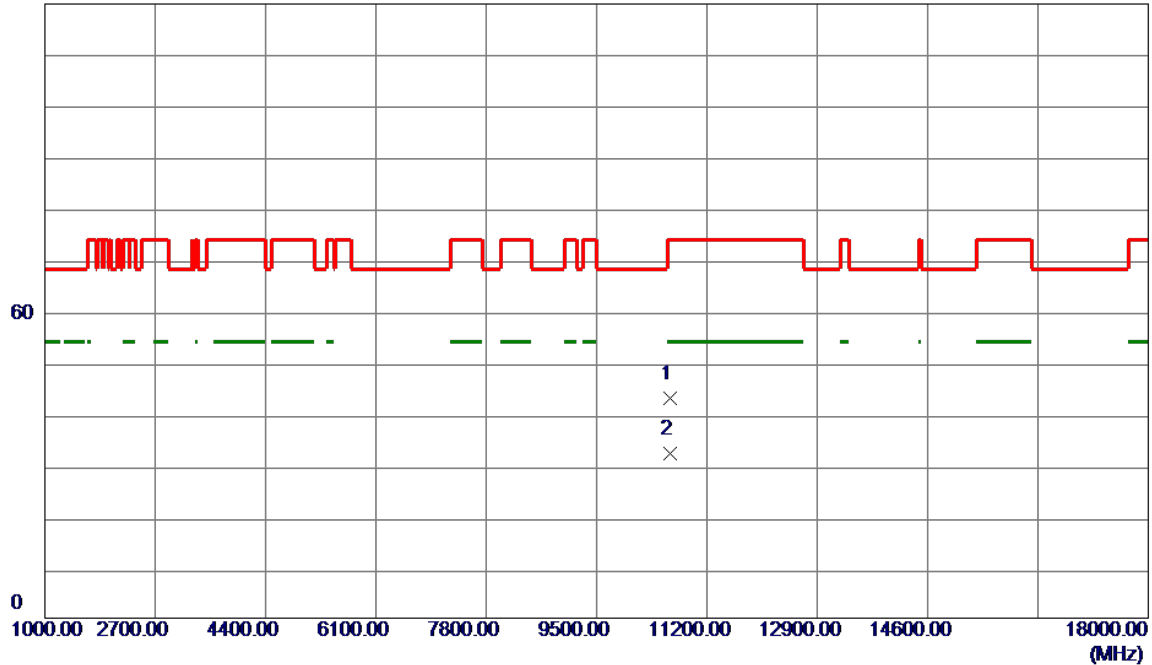


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	43.25	-0.26	42.99	74.00	-31.01	Peak	
2 *	10640.0000	32.53	-0.26	32.27	54.00	-21.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5320MHz	Polarization	Horizontal

120 dBuV/m

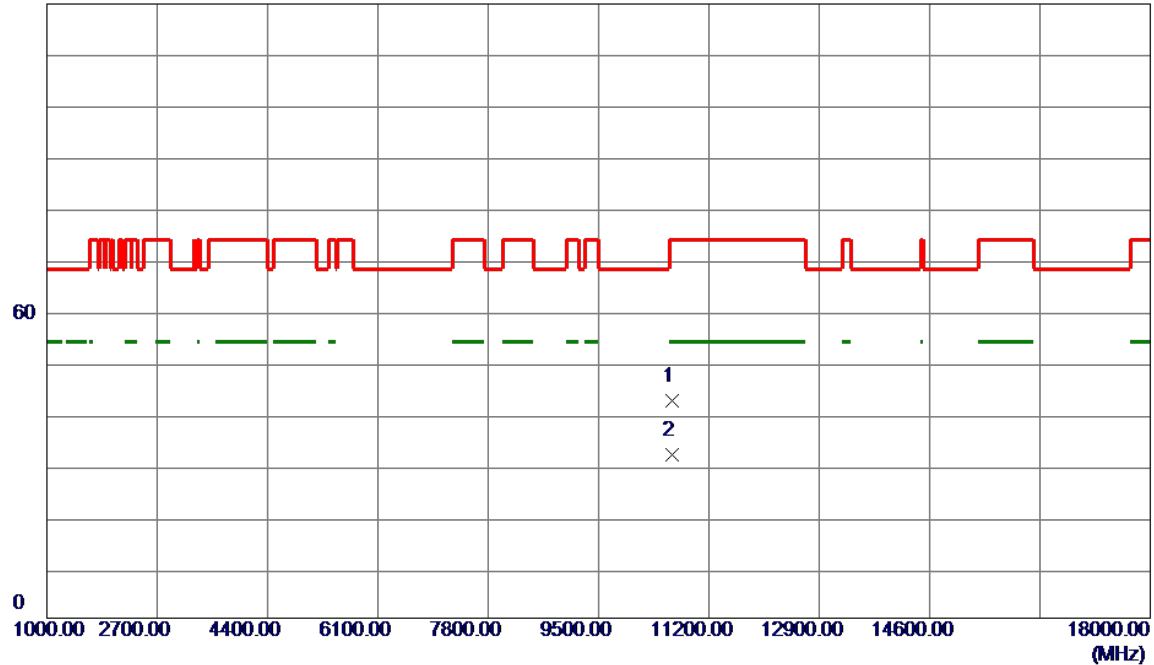


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	42.78	-0.26	42.52	74.00	-31.48	Peak	
2 *	10640.0000	32.13	-0.26	31.87	54.00	-22.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5500MHz	Polarization	Vertical

120 dBuV/m

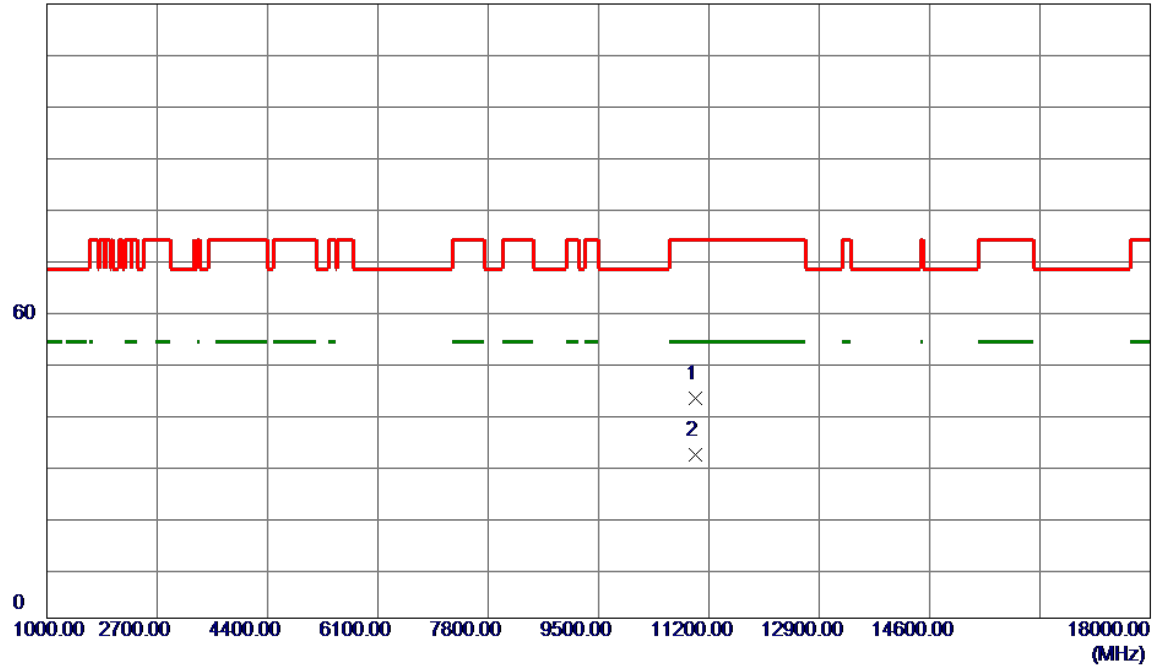


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	42.99	-0.14	42.85	74.00	-31.15	Peak	
2 *	11000.0000	32.14	-0.14	32.00	54.00	-22.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5500MHz	Polarization	Horizontal

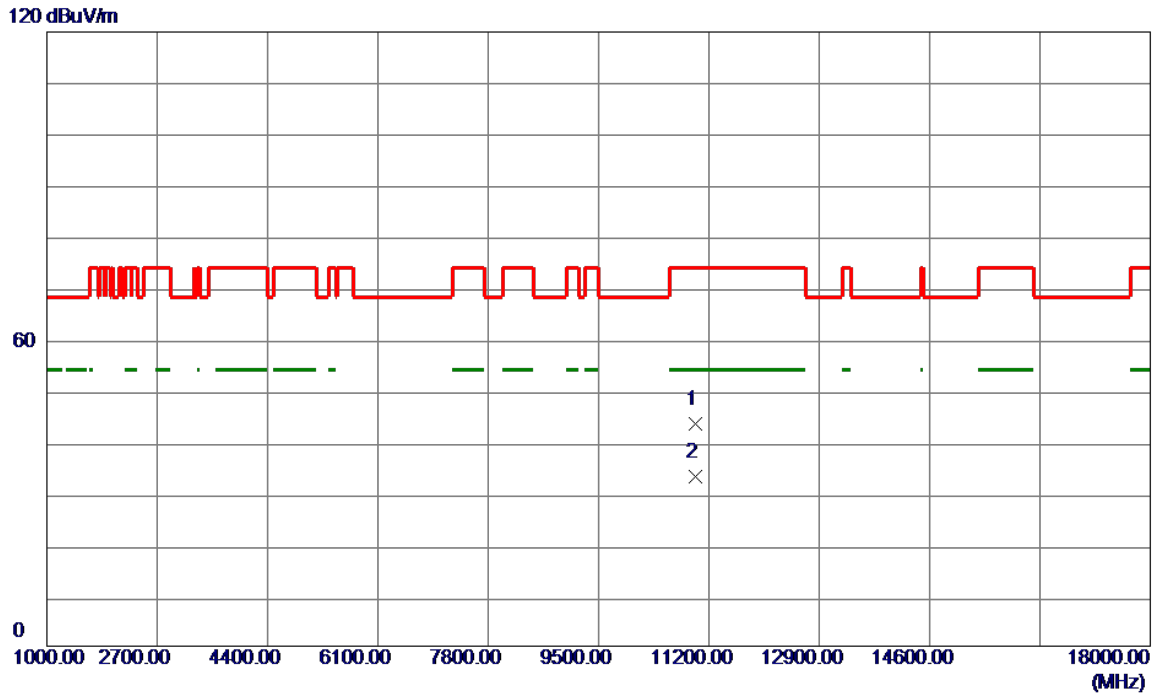


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	43.62	-0.14	43.48	74.00	-30.52	Peak	
2 *	11000.0000	33.28	-0.14	33.14	54.00	-20.86	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5580MHz	Polarization	Vertical

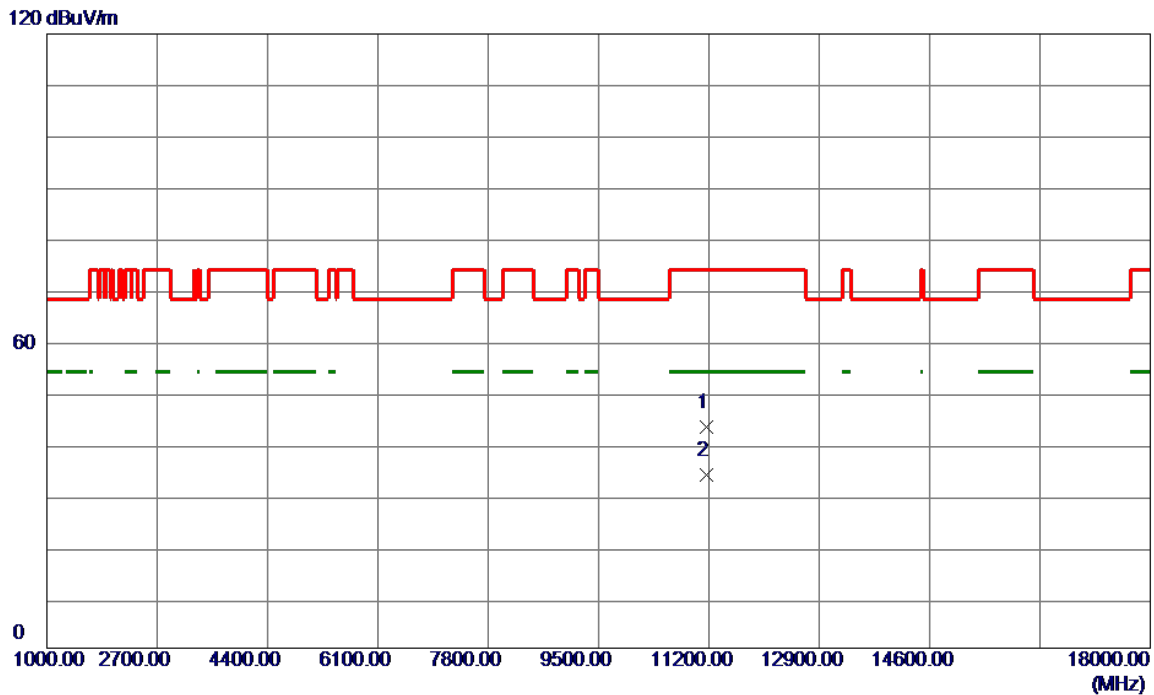


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	43.06	0.17	43.23	74.00	-30.77	Peak	
2 *	11160.0000	33.57	0.17	33.74	54.00	-20.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5580MHz	Polarization	Horizontal

120 dBuV/m

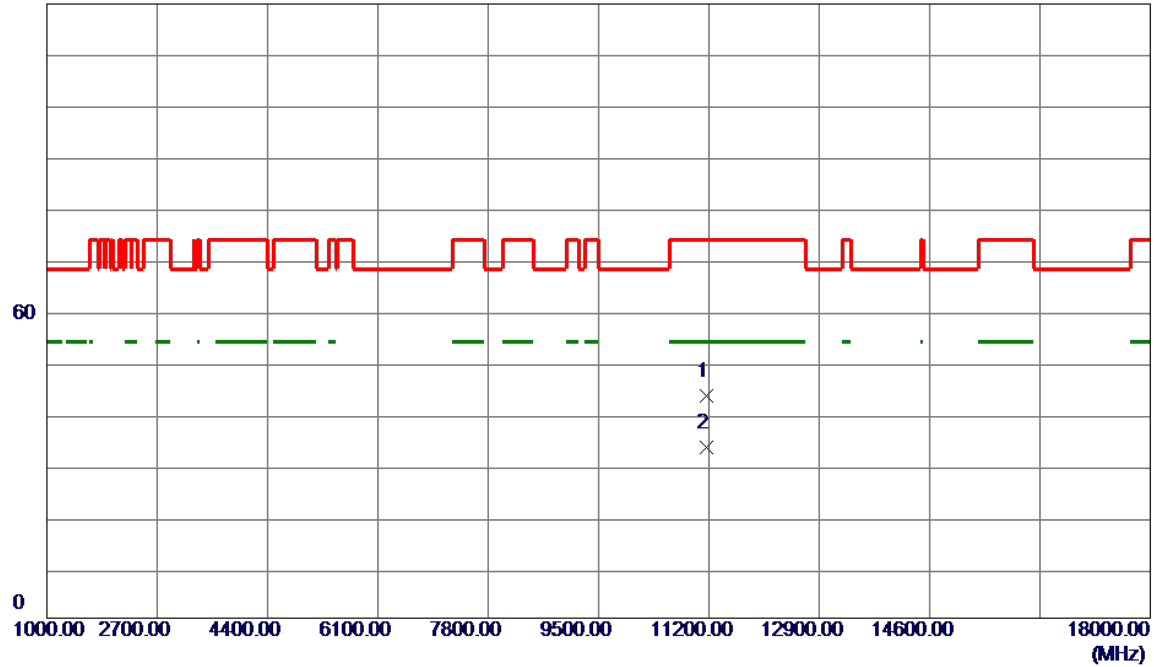


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	43.21	0.17	43.38	74.00	-30.62	Peak	
2 *	11160.0000	33.25	0.17	33.42	54.00	-20.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5700MHz	Polarization	Vertical

120 dBuV/m

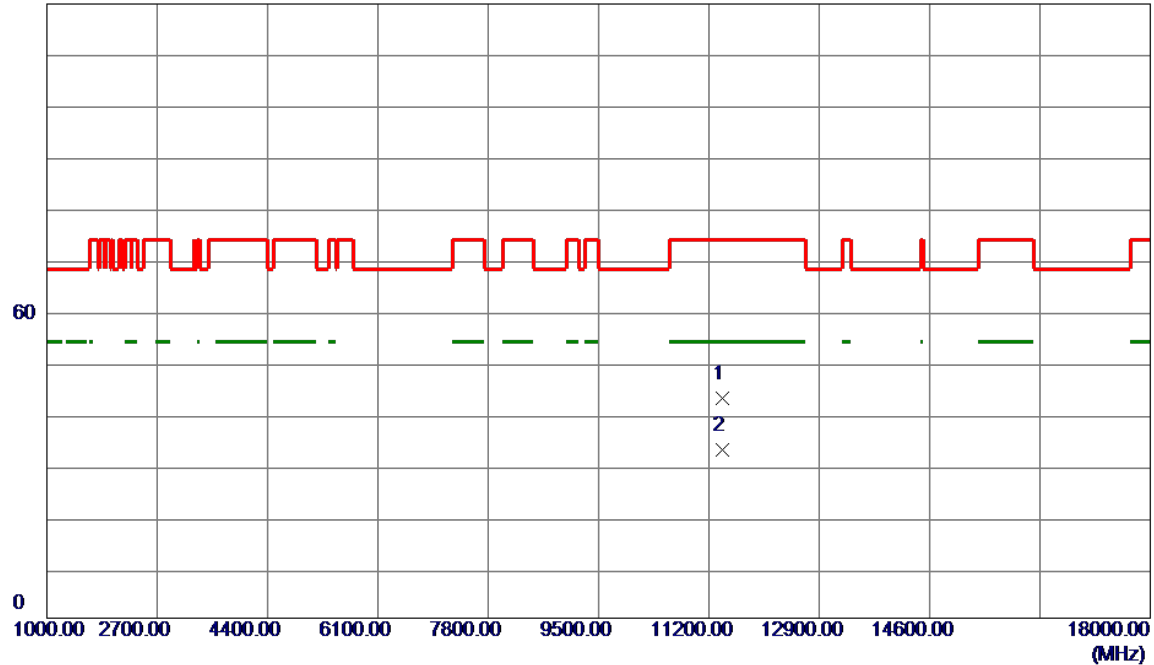


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	42.40	0.64	43.04	74.00	-30.96	Peak	
2 *	11400.0000	32.16	0.64	32.80	54.00	-21.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5700MHz	Polarization	Horizontal

120 dBuV/m

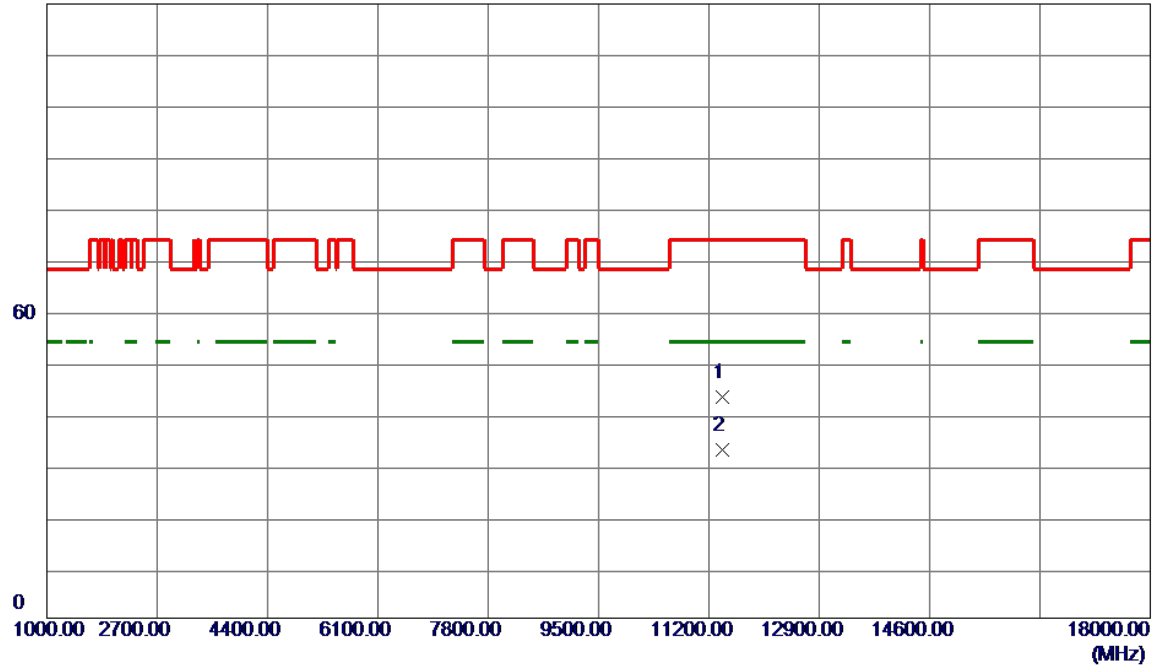


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	42.54	0.64	43.18	74.00	-30.82	Peak	
2 *	11400.0000	32.14	0.64	32.78	54.00	-21.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Vertical

120 dBuV/m

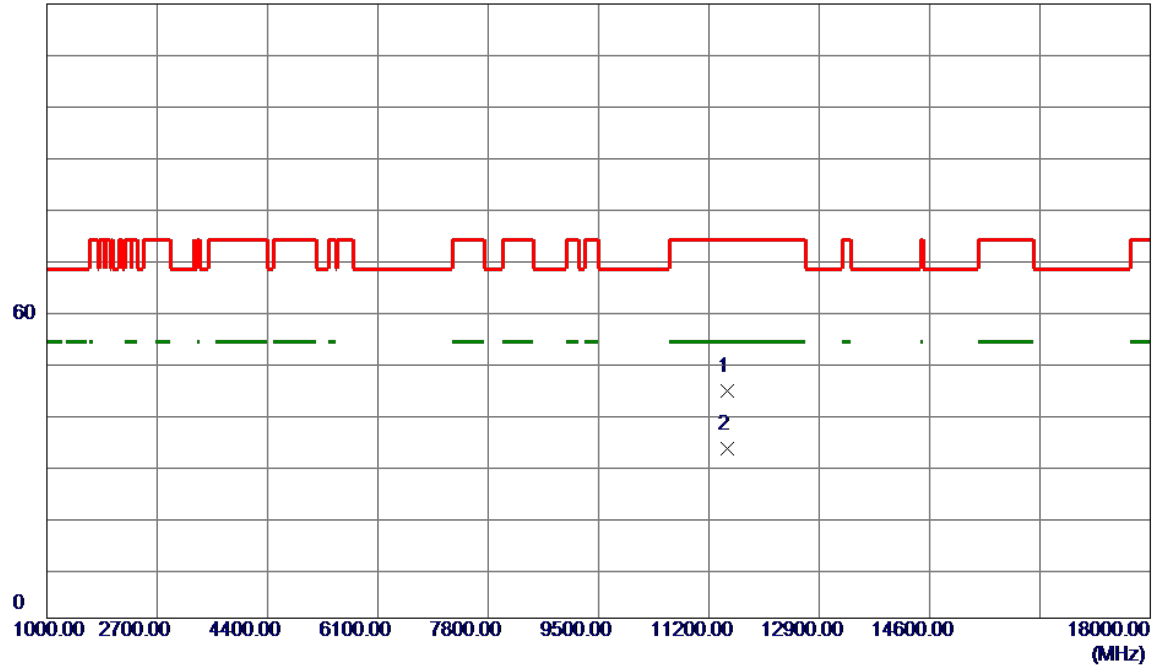


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	43.63	0.81	44.44	74.00	-29.56	Peak	
2 *	11490.0000	32.25	0.81	33.06	54.00	-20.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Horizontal

120 dBuV/m

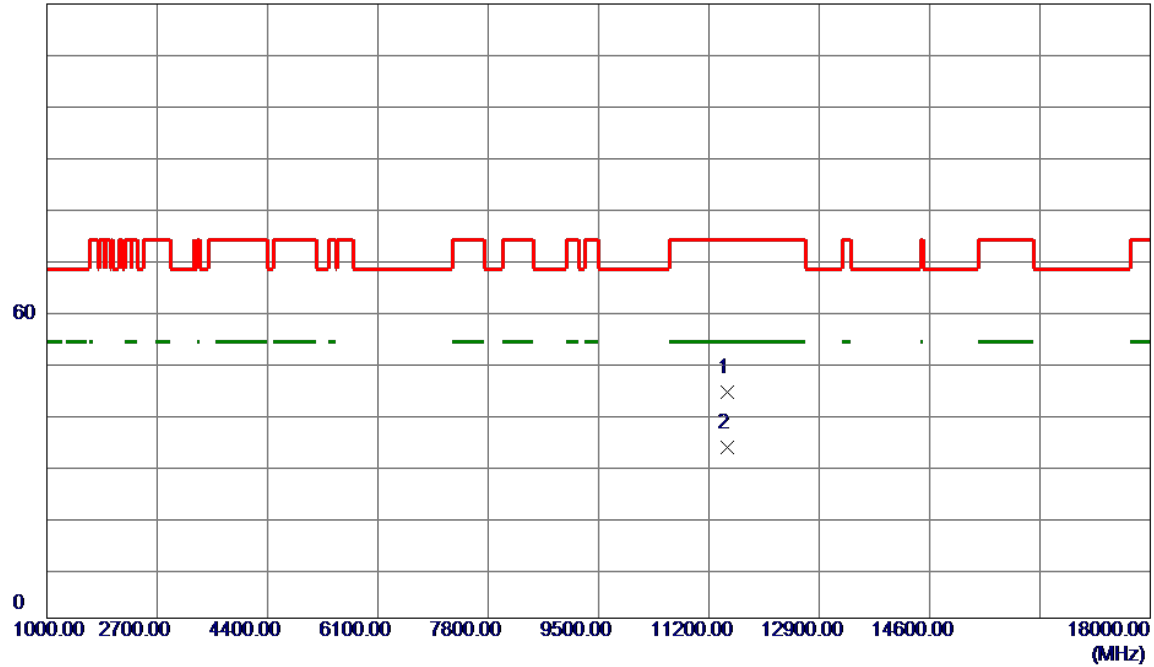

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	43.30	0.81	44.11	74.00	-29.89	Peak	
2 *	11490.0000	32.54	0.81	33.35	54.00	-20.65	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5785MHz	Polarization	Vertical

120 dBuV/m

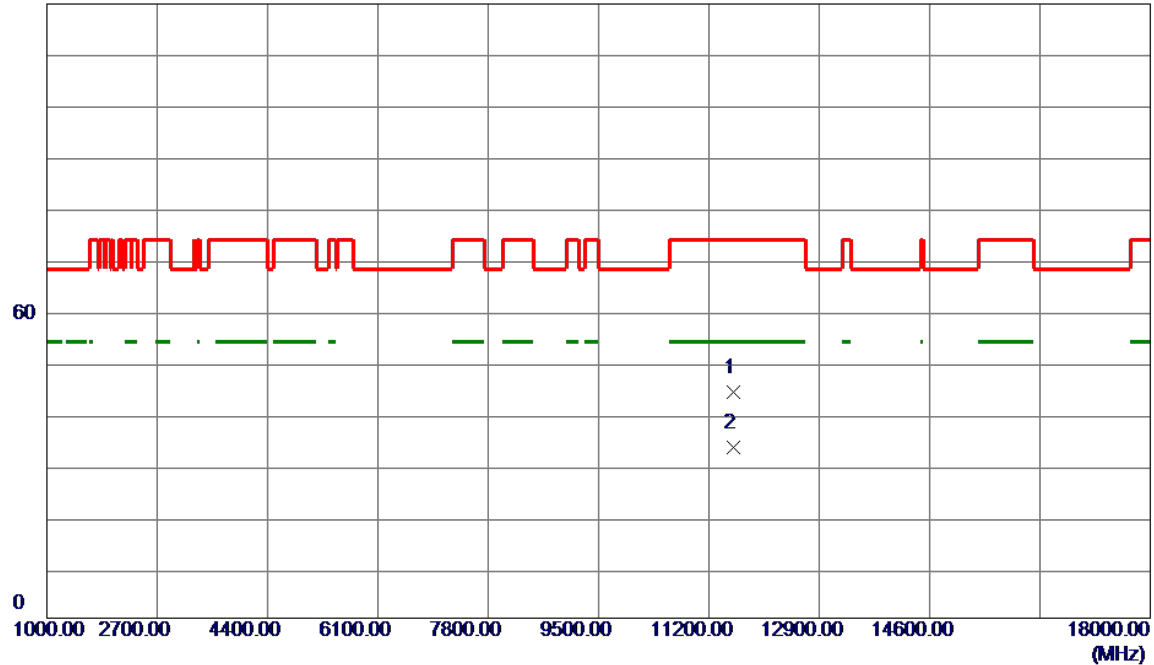


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	43.36	0.85	44.21	74.00	-29.79	Peak	
2 *	11570.0000	32.56	0.85	33.41	54.00	-20.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5785MHz	Polarization	Horizontal

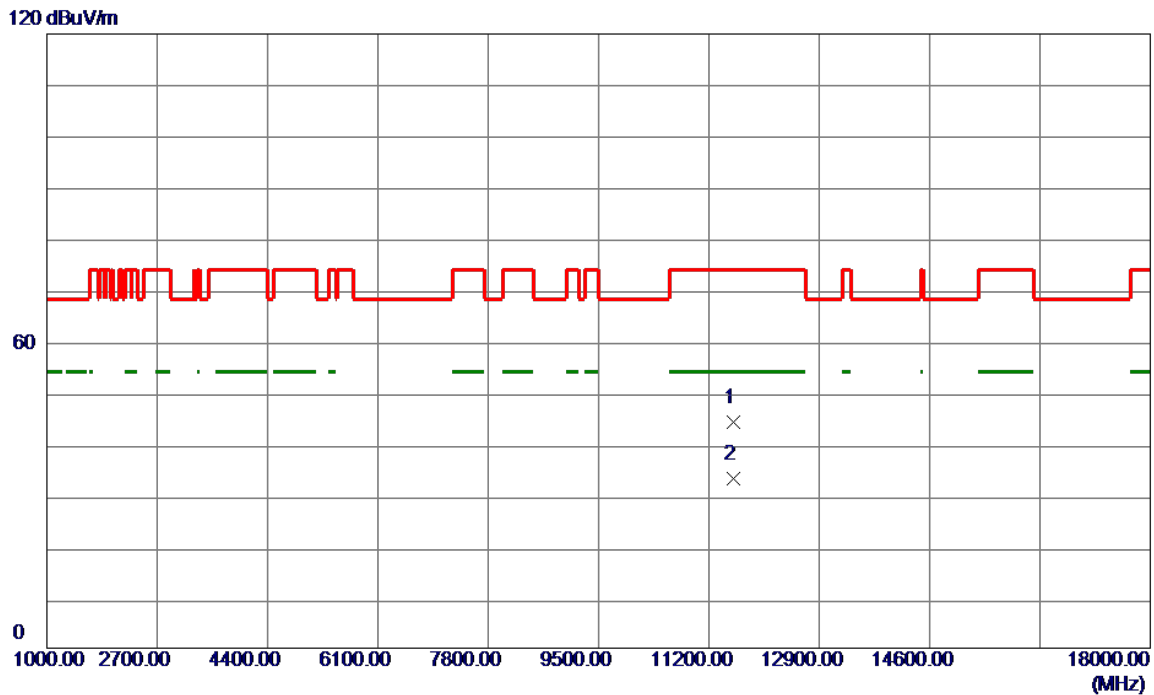


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	43.35	0.85	44.20	74.00	-29.80	Peak	
2 *	11570.0000	32.32	0.85	33.17	54.00	-20.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5825MHz	Polarization	Vertical

120 dBuV/m

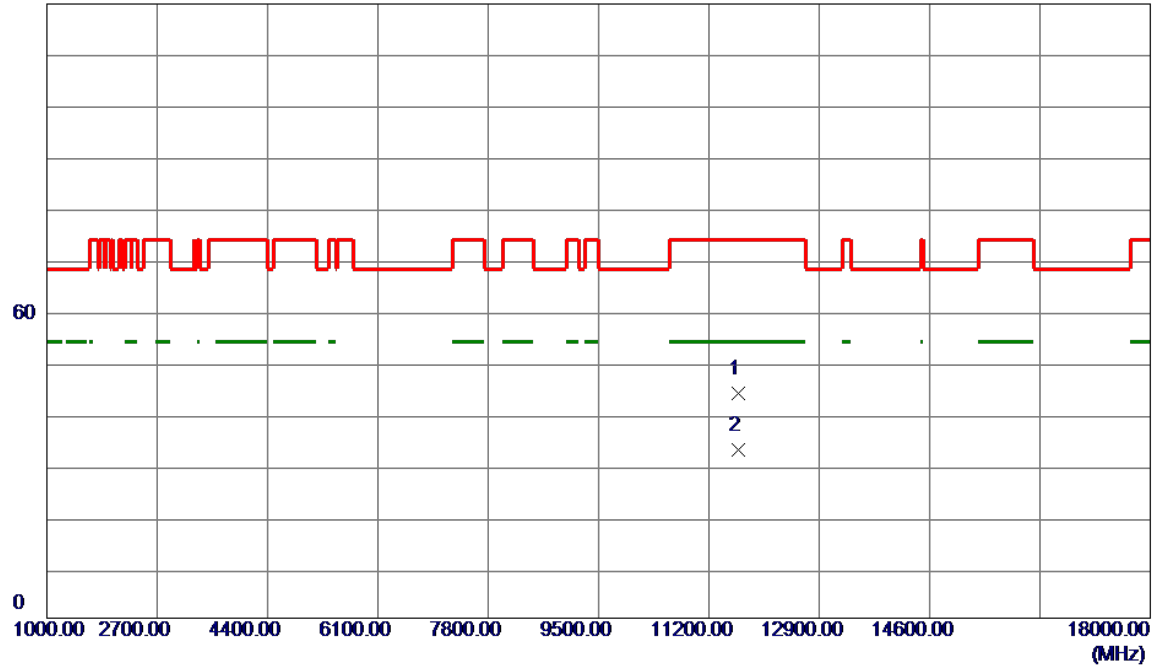

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	43.15	0.86	44.01	74.00	-29.99	Peak	
2 *	11650.0000	32.04	0.86	32.90	54.00	-21.10	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/26
Test Frequency	5825MHz	Polarization	Horizontal

120 dBuV/m

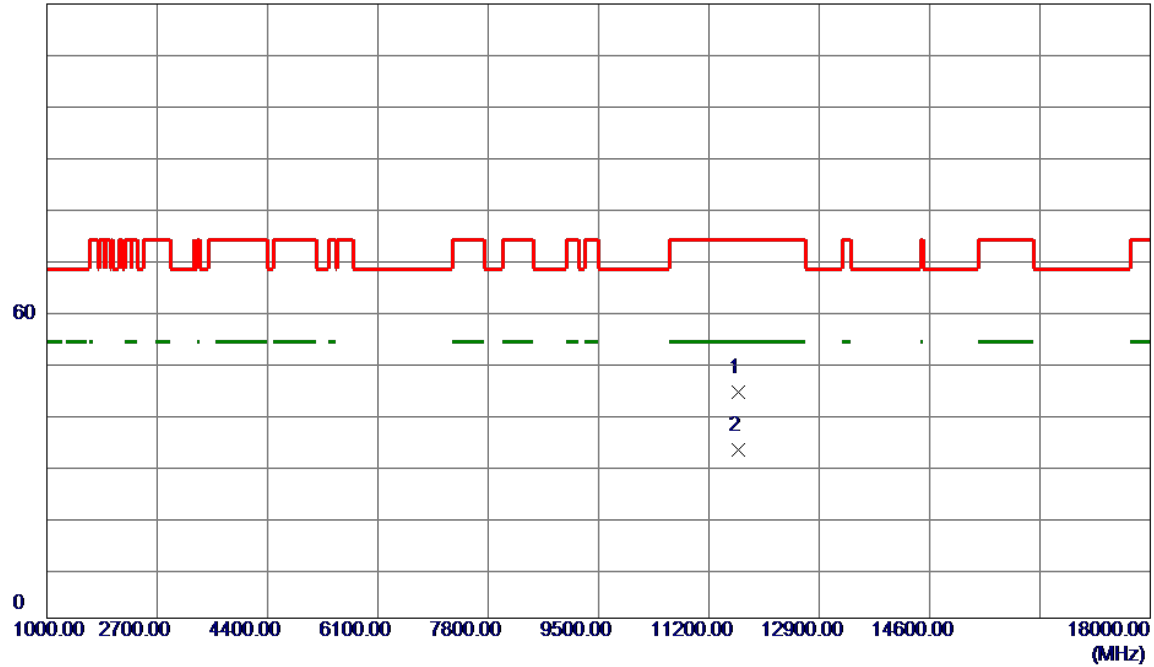

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	43.29	0.86	44.15	74.00	-29.85	Peak	
2 *	11650.0000	32.11	0.86	32.97	54.00	-21.03	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5190MHz	Polarization	Vertical

120 dBuV/m

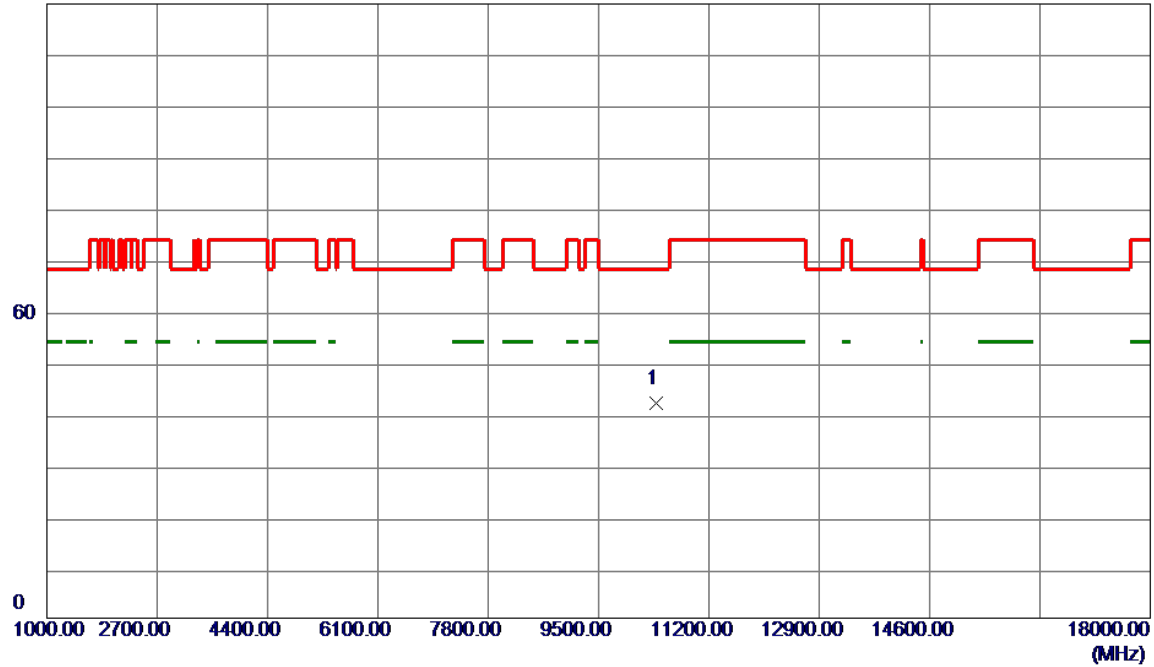


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	42.47	-0.49	41.98	68.20	-26.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5190MHz	Polarization	Horizontal

120 dBuV/m

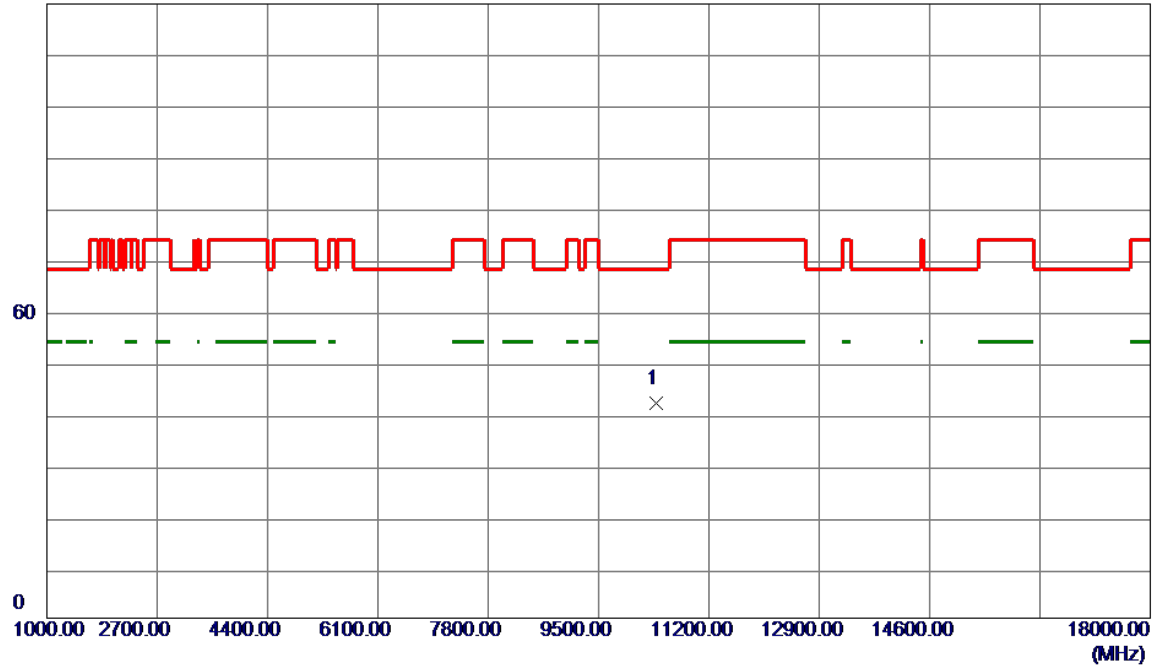


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10380.0000	42.42	-0.49	41.93	68.20	-26.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5230MHz	Polarization	Vertical

120 dBuV/m

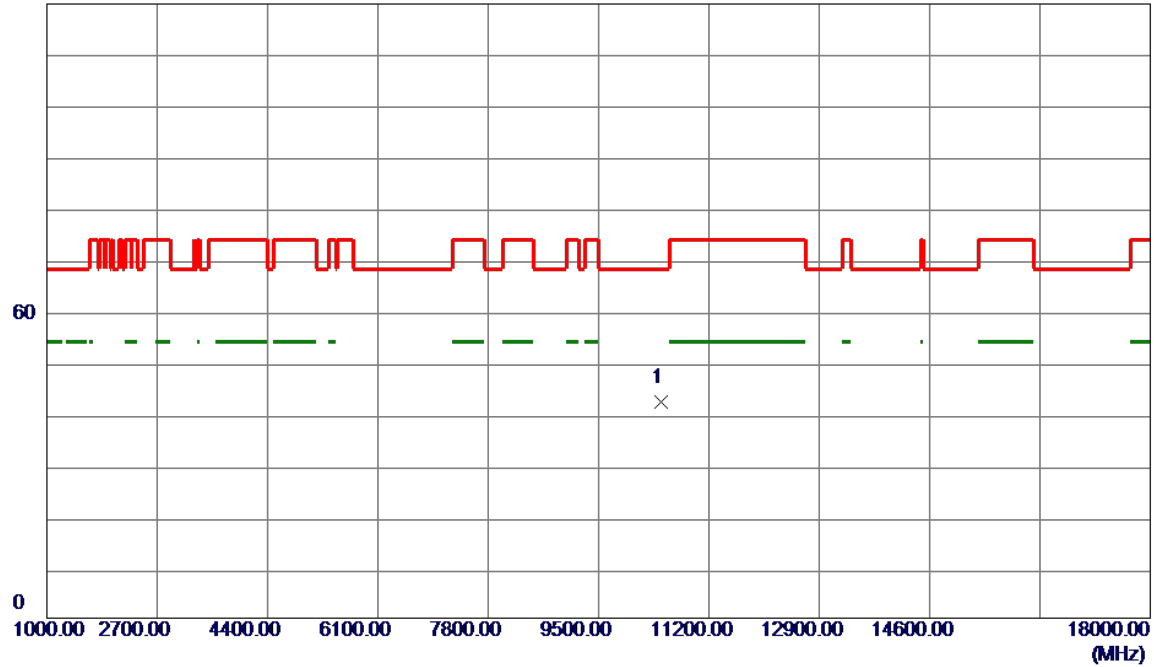


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.0000	42.72	-0.37	42.35	68.20	-25.85	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5230MHz	Polarization	Horizontal

120 dBuV/m

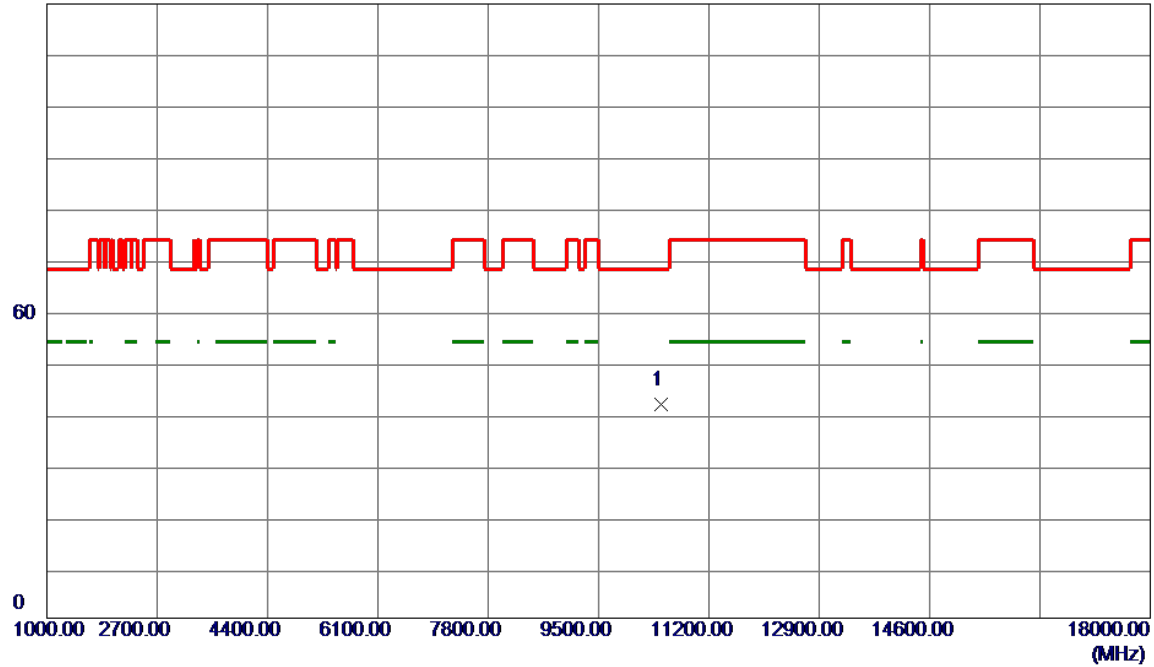

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.0000	42.21	-0.37	41.84	68.20	-26.36	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5270MHz	Polarization	Vertical

120 dBuV/m

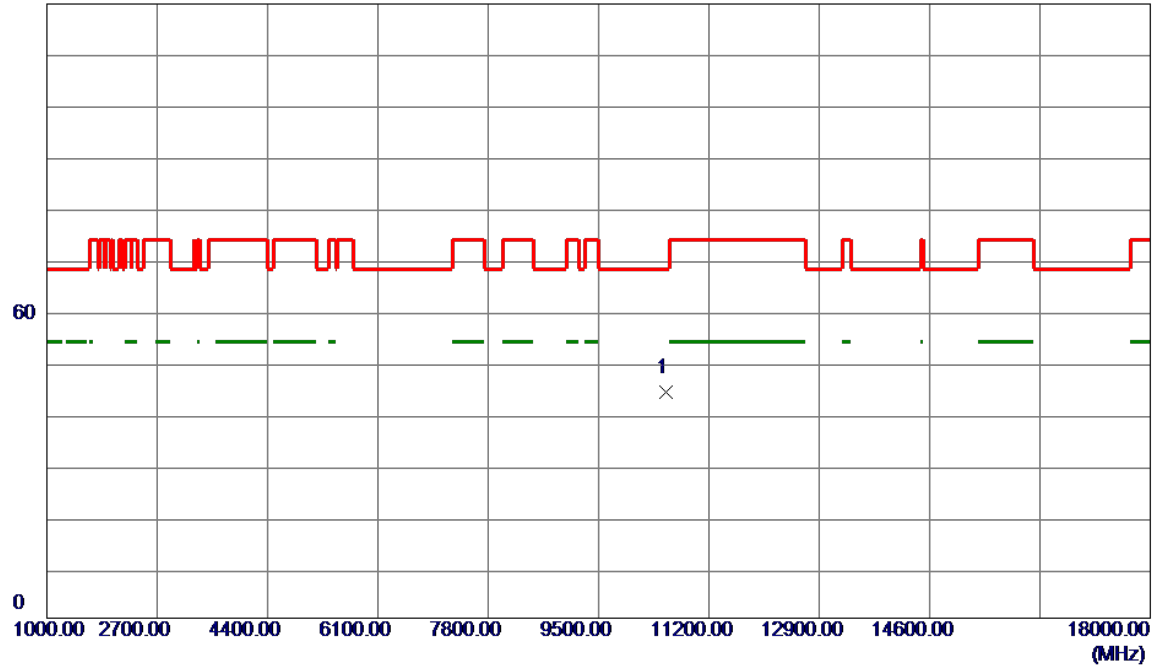


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10540.0000	44.38	-0.30	44.08	68.20	-24.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5270MHz	Polarization	Horizontal

120 dBuV/m

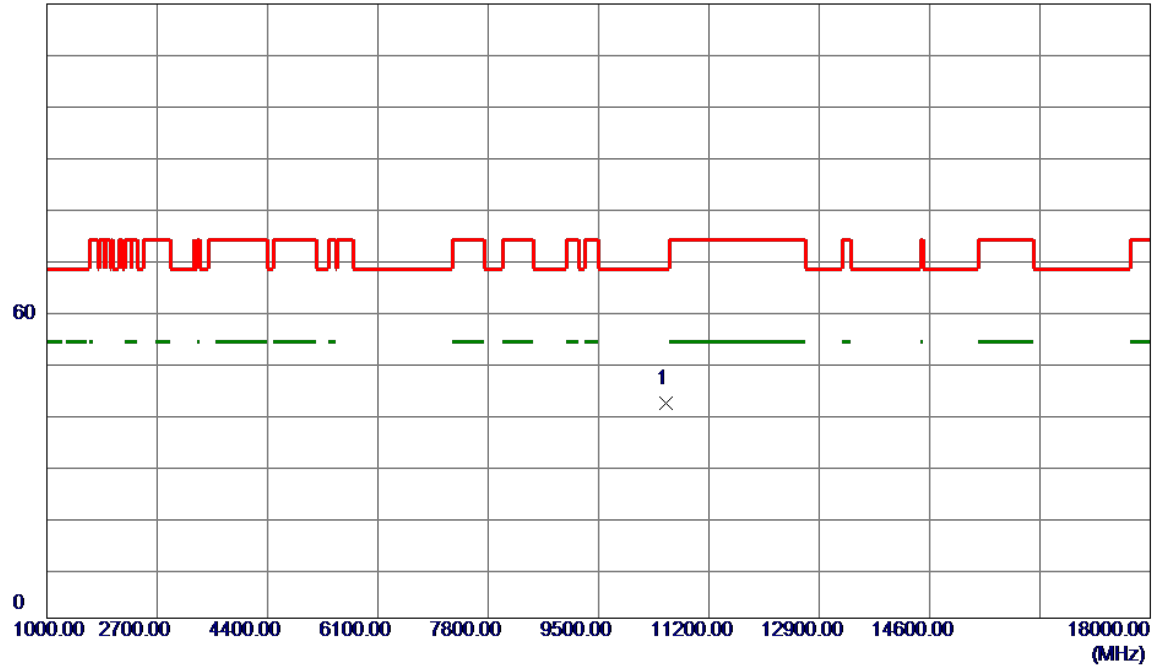


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10540.0000	42.21	-0.30	41.91	68.20	-26.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5310MHz	Polarization	Vertical

120 dBuV/m

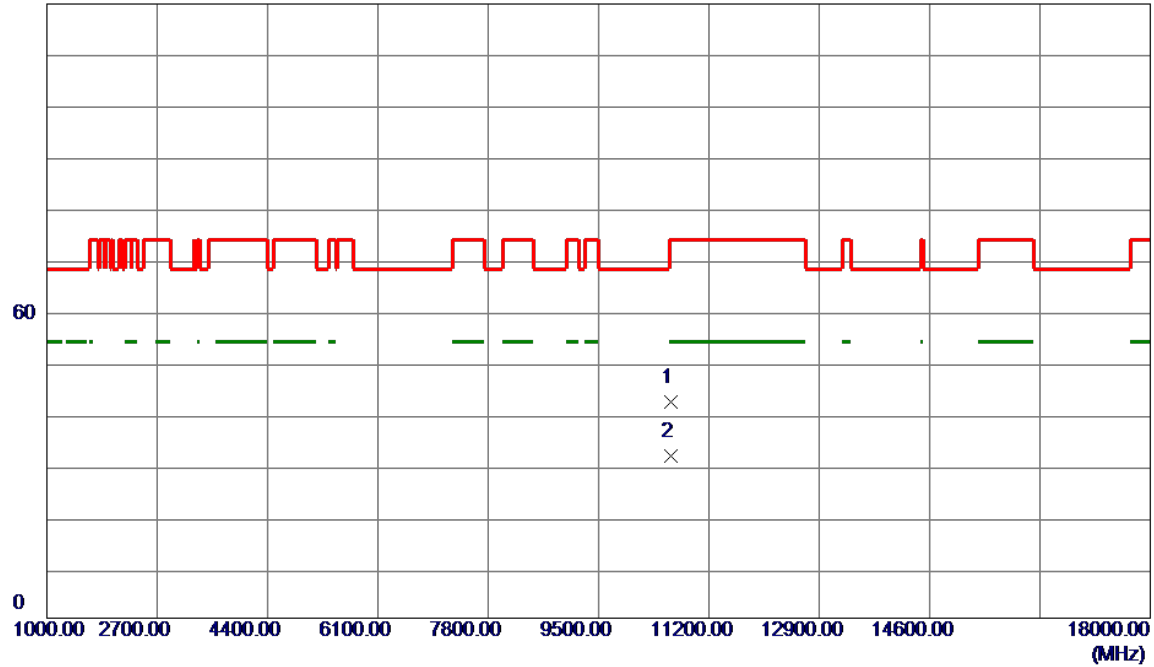


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	42.44	-0.27	42.17	74.00	-31.83	Peak	
2 *	10620.0000	32.01	-0.27	31.74	54.00	-22.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5310MHz	Polarization	Horizontal

120 dBuV/m

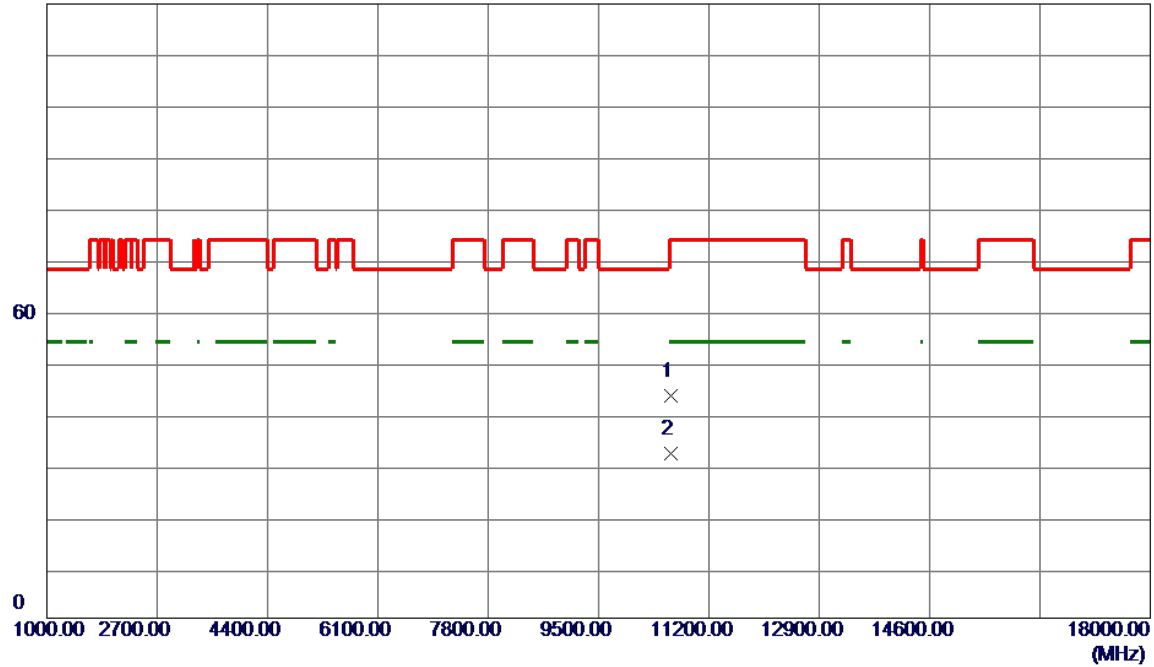

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	43.80	-0.27	43.53	74.00	-30.47	Peak	
2 *	10620.0000	32.47	-0.27	32.20	54.00	-21.80	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5510MHz	Polarization	Vertical

120 dBuV/m

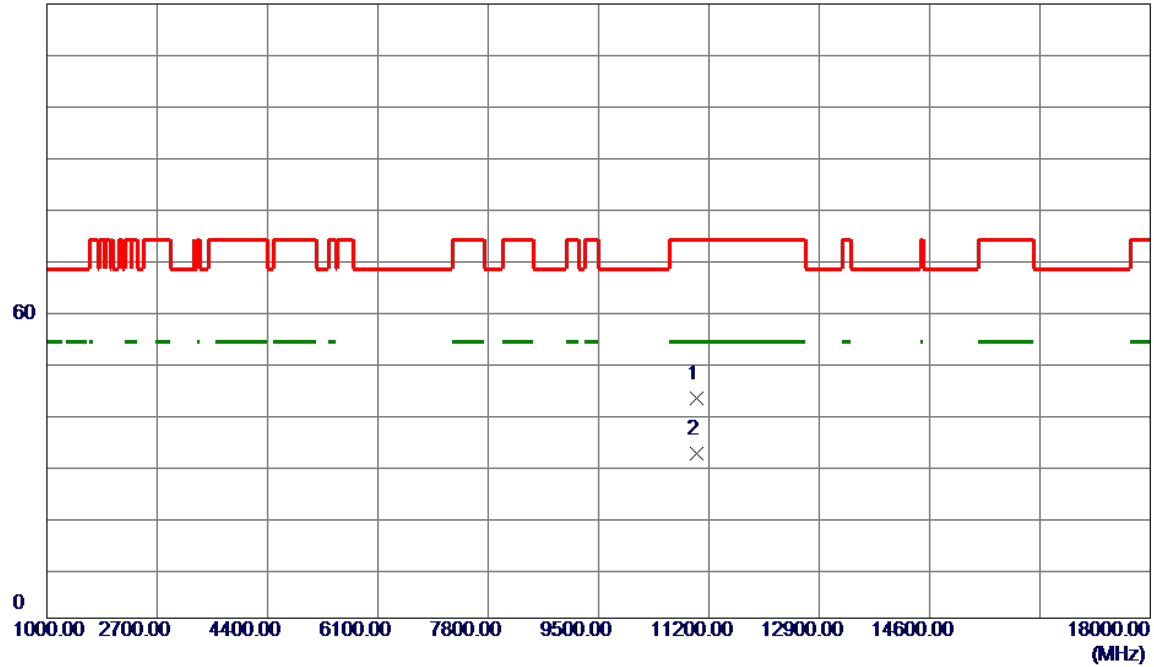


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	42.96	-0.10	42.86	74.00	-31.14	Peak	
2 *	11020.0000	32.18	-0.10	32.08	54.00	-21.92	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5510MHz	Polarization	Horizontal

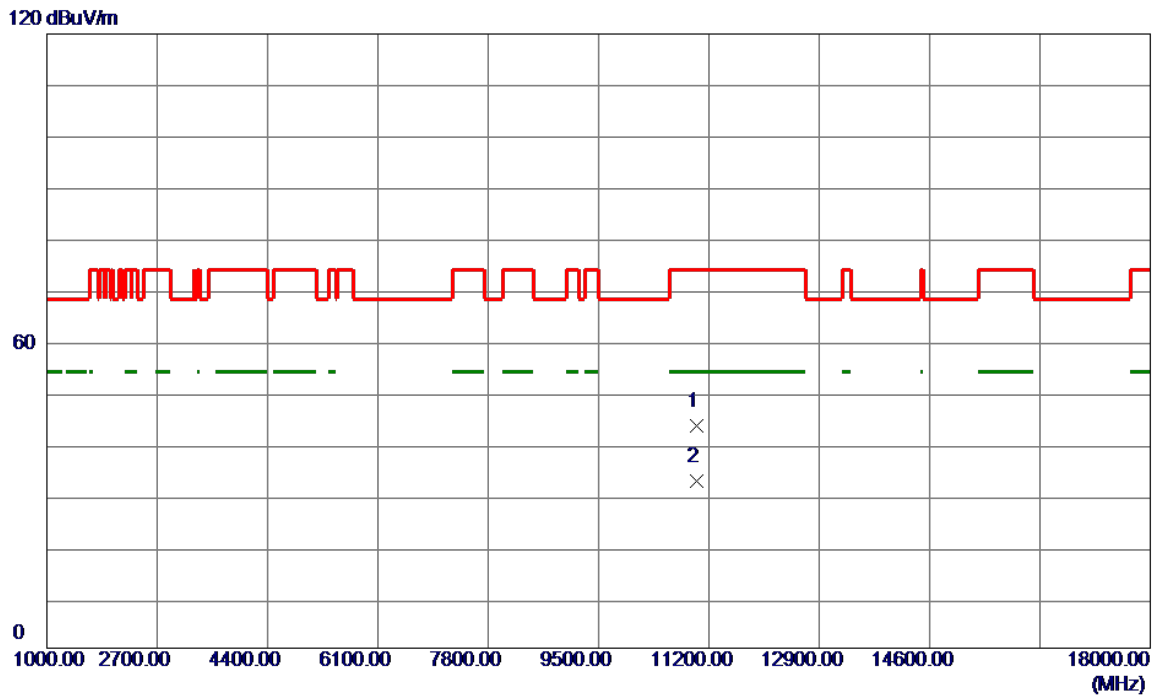


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	43.43	-0.10	43.33	74.00	-30.67	Peak	
2 *	11020.0000	32.63	-0.10	32.53	54.00	-21.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5550MHz	Polarization	Vertical

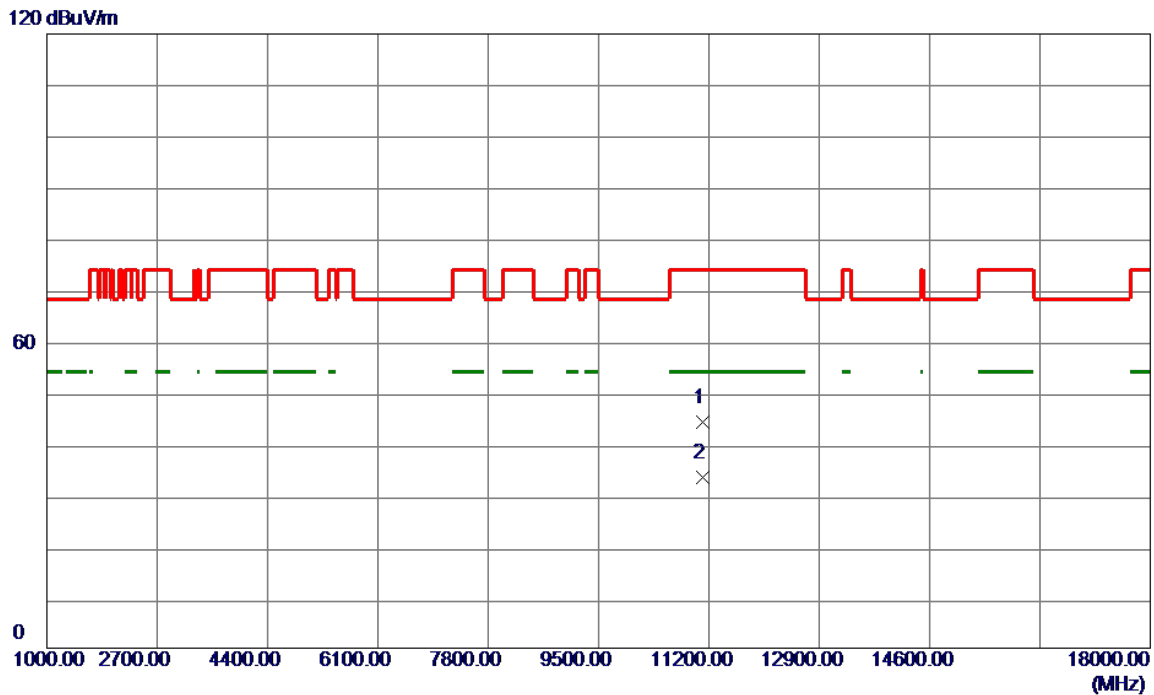


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	44.13	0.05	44.18	74.00	-29.82	Peak	
2 *	11100.0000	33.26	0.05	33.31	54.00	-20.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5550MHz	Polarization	Horizontal

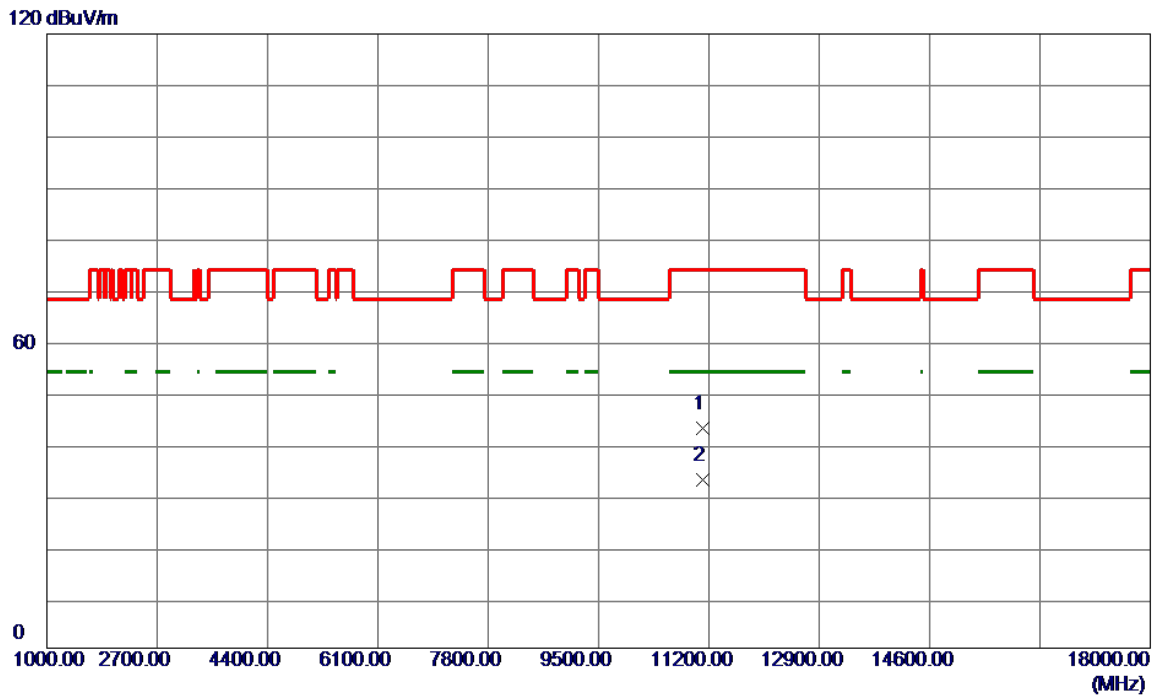


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	42.92	0.05	42.97	74.00	-31.03	Peak	
2 *	11100.0000	32.88	0.05	32.93	54.00	-21.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5670MHz	Polarization	Vertical

120 dBuV/m

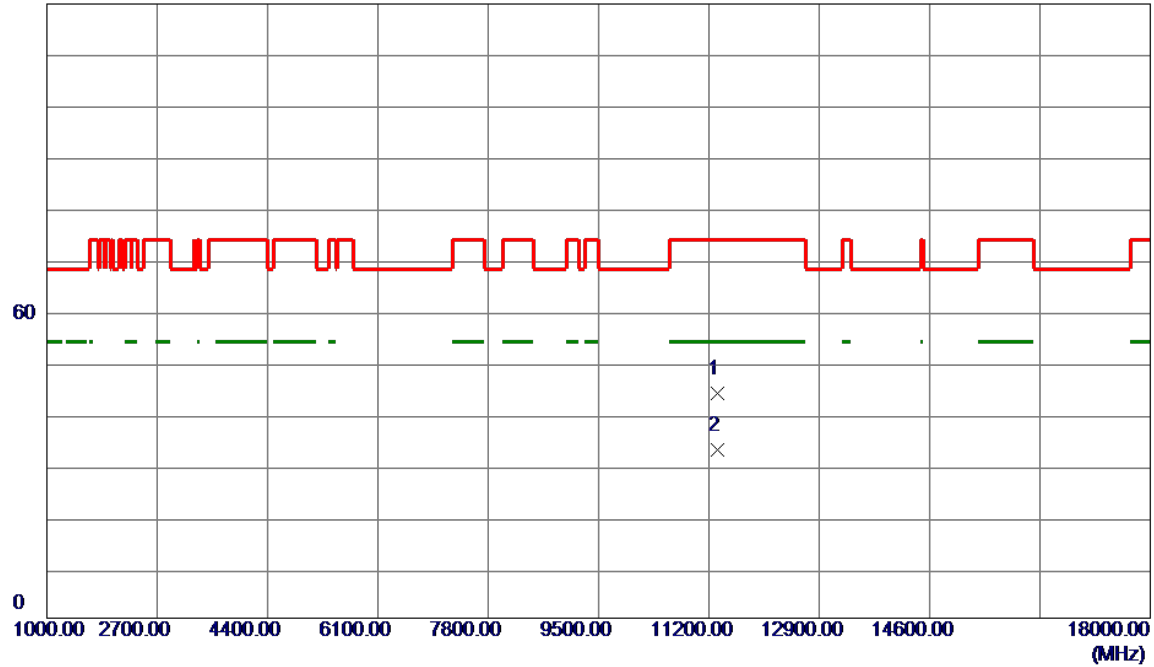


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	43.42	0.52	43.94	74.00	-30.06	Peak	
2 *	11340.0000	32.30	0.52	32.82	54.00	-21.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5670MHz	Polarization	Horizontal

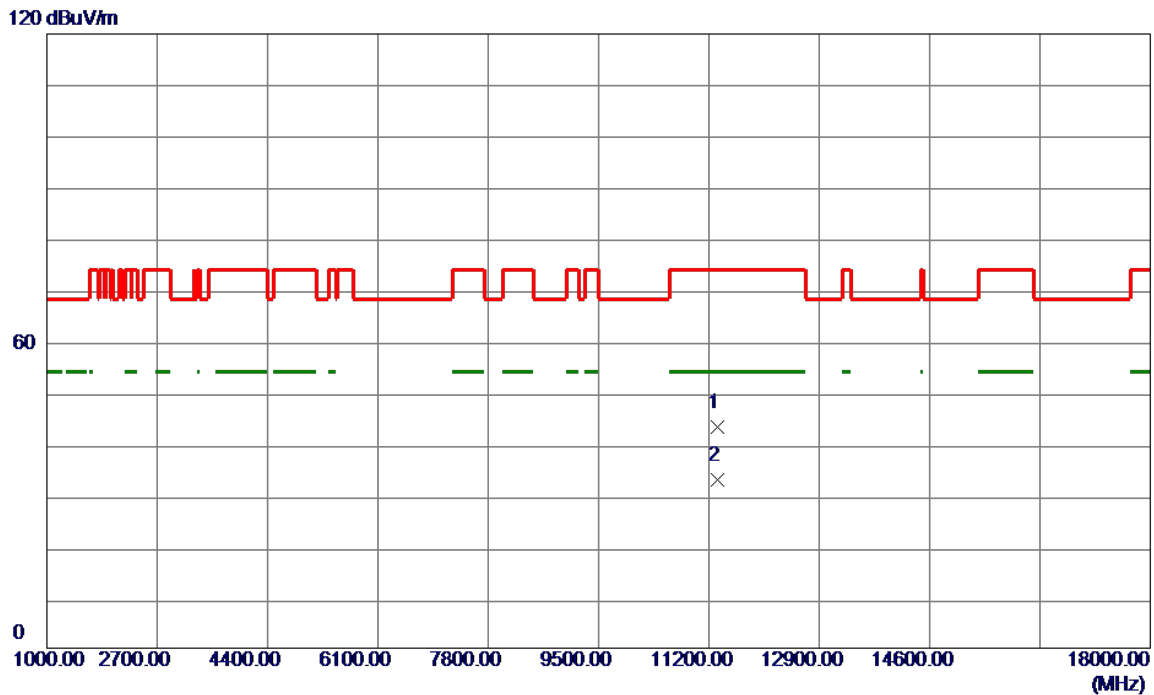


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	42.68	0.52	43.20	74.00	-30.80	Peak	
2 *	11340.0000	32.44	0.52	32.96	54.00	-21.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5755MHz	Polarization	Vertical

120 dBuV/m

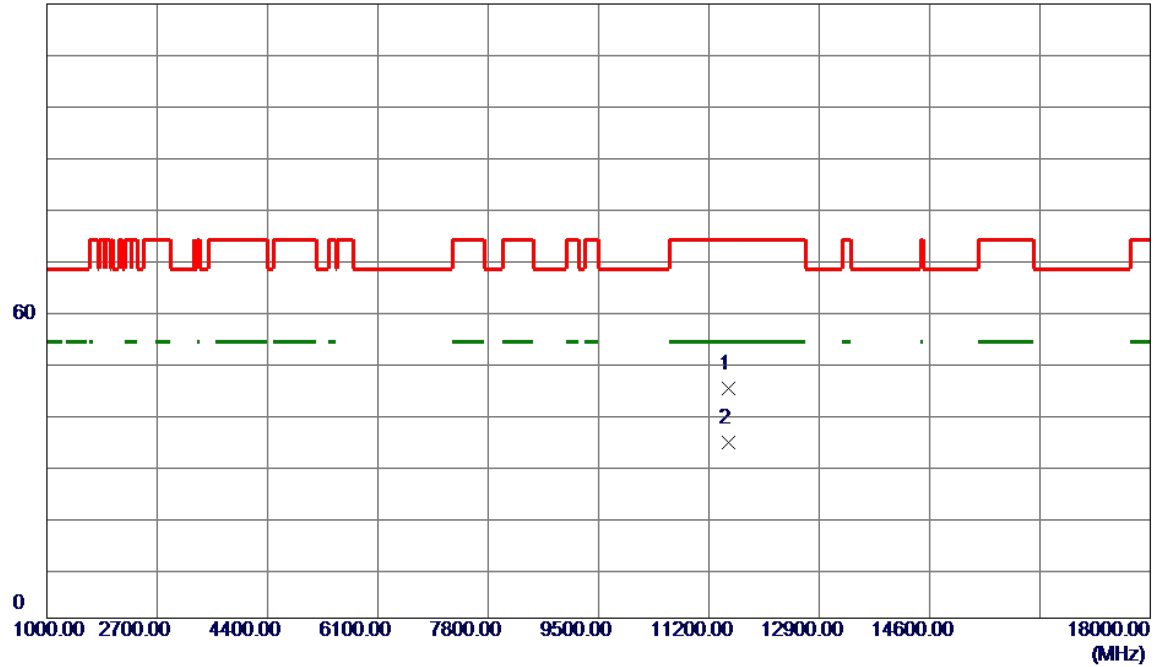

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	44.14	0.83	44.97	74.00	-29.03	Peak	
2 *	11510.0000	33.38	0.83	34.21	54.00	-19.79	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5755MHz	Polarization	Horizontal

120 dBuV/m

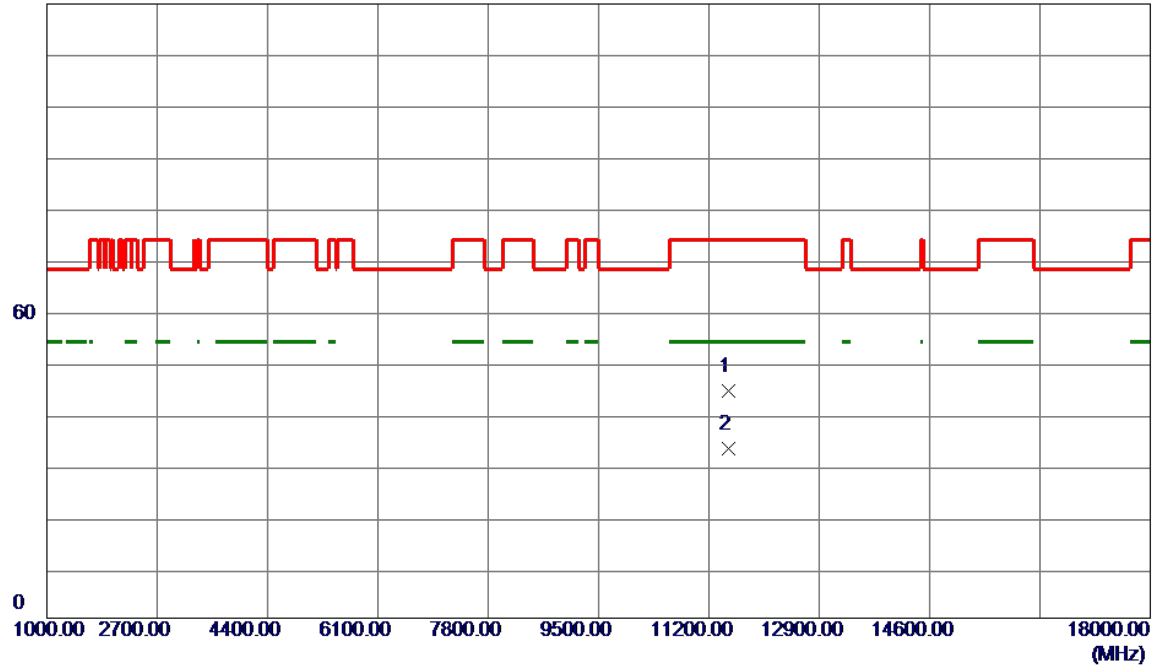

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	43.51	0.83	44.34	74.00	-29.66	Peak	
2 *	11510.0000	32.28	0.83	33.11	54.00	-20.89	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5795MHz	Polarization	Vertical

120 dBuV/m

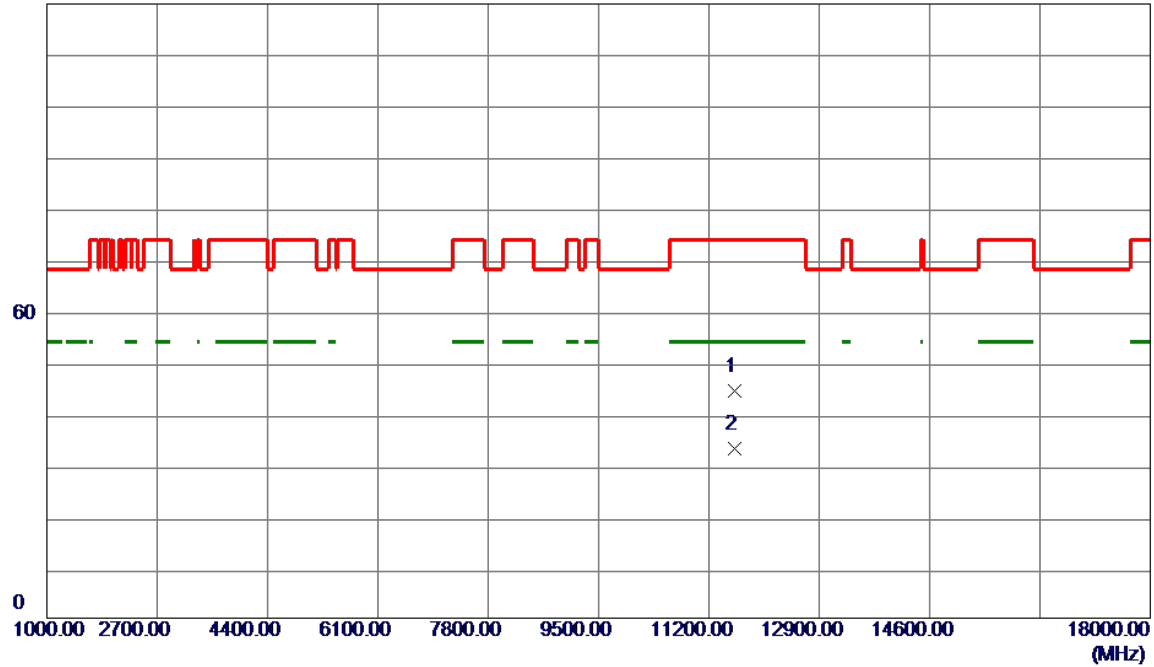

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	43.59	0.85	44.44	74.00	-29.56	Peak	
2 *	11590.0000	32.25	0.85	33.10	54.00	-20.90	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/26
Test Frequency	5795MHz	Polarization	Horizontal

120 dBuV/m

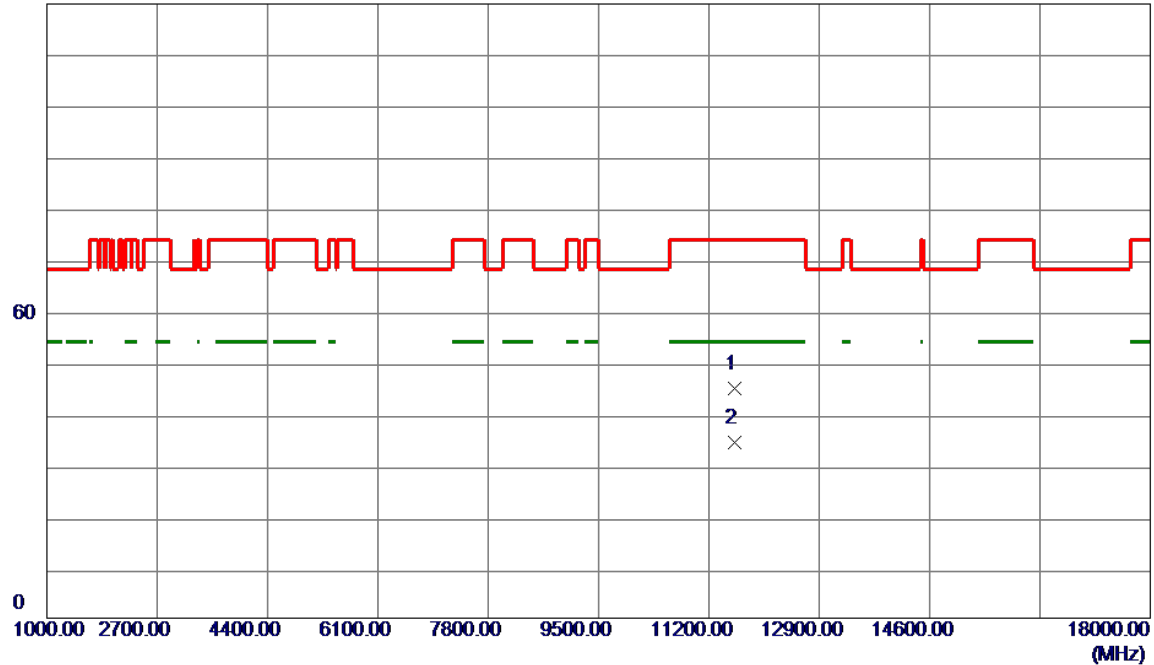

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	44.05	0.85	44.90	74.00	-29.10	Peak	
2 *	11590.0000	33.54	0.85	34.39	54.00	-19.61	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5210MHz	Polarization	Vertical

120 dBuV/m

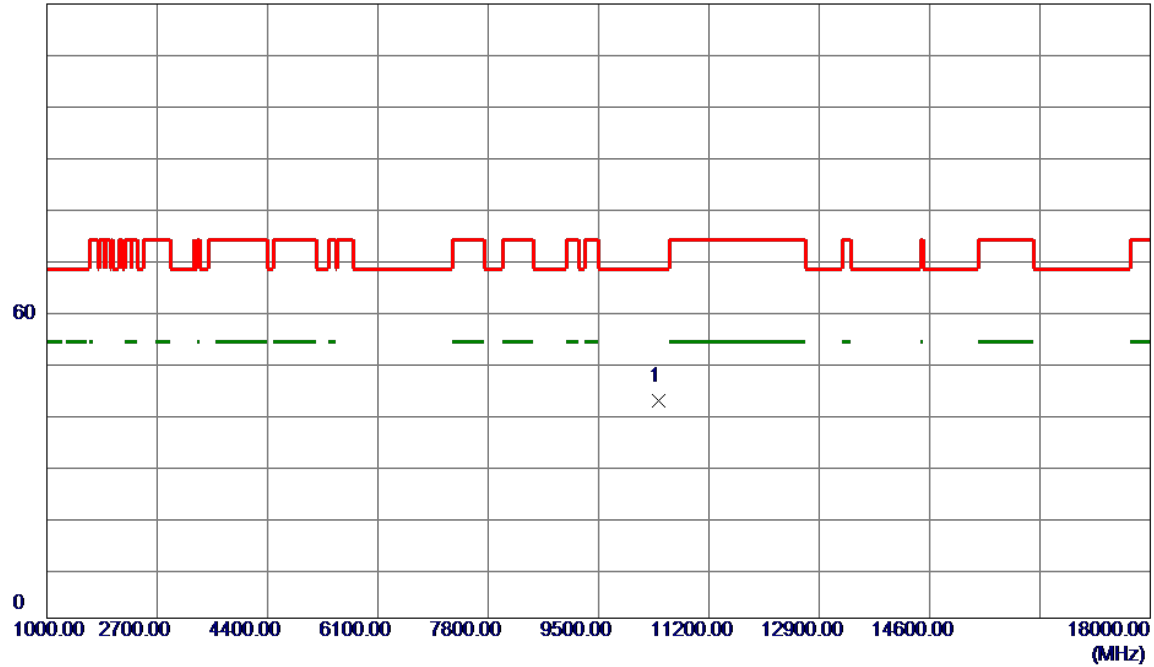


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	42.90	-0.43	42.47	68.20	-25.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5210MHz	Polarization	Horizontal

120 dBuV/m

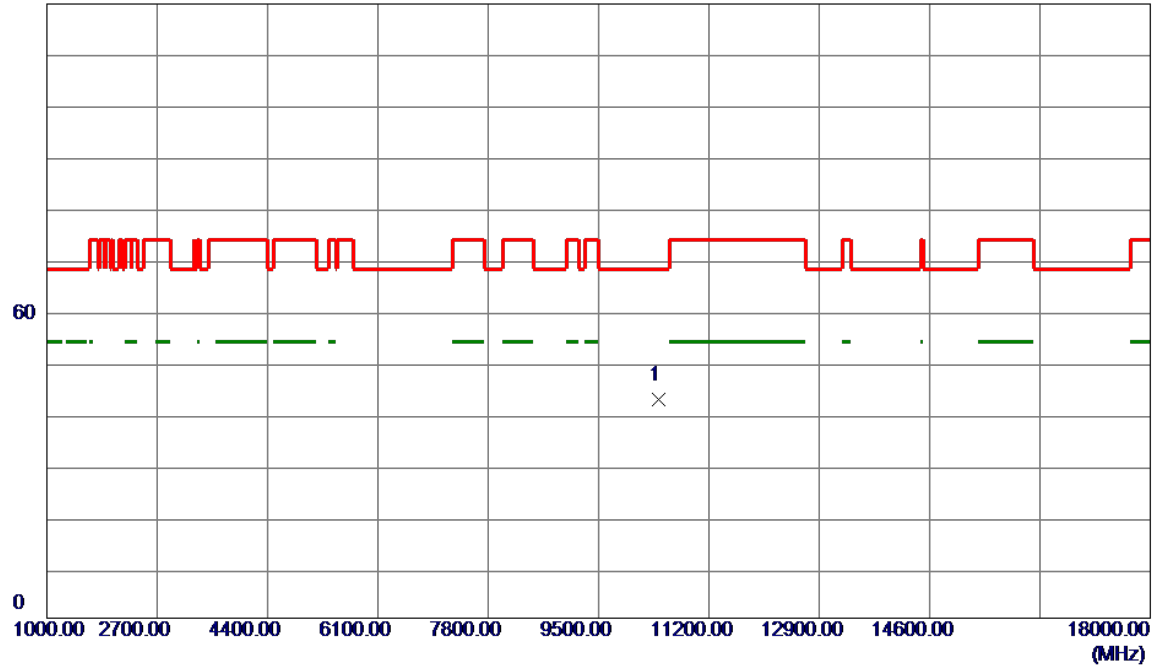


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	43.11	-0.43	42.68	68.20	-25.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5290MHz	Polarization	Vertical

120 dBuV/m

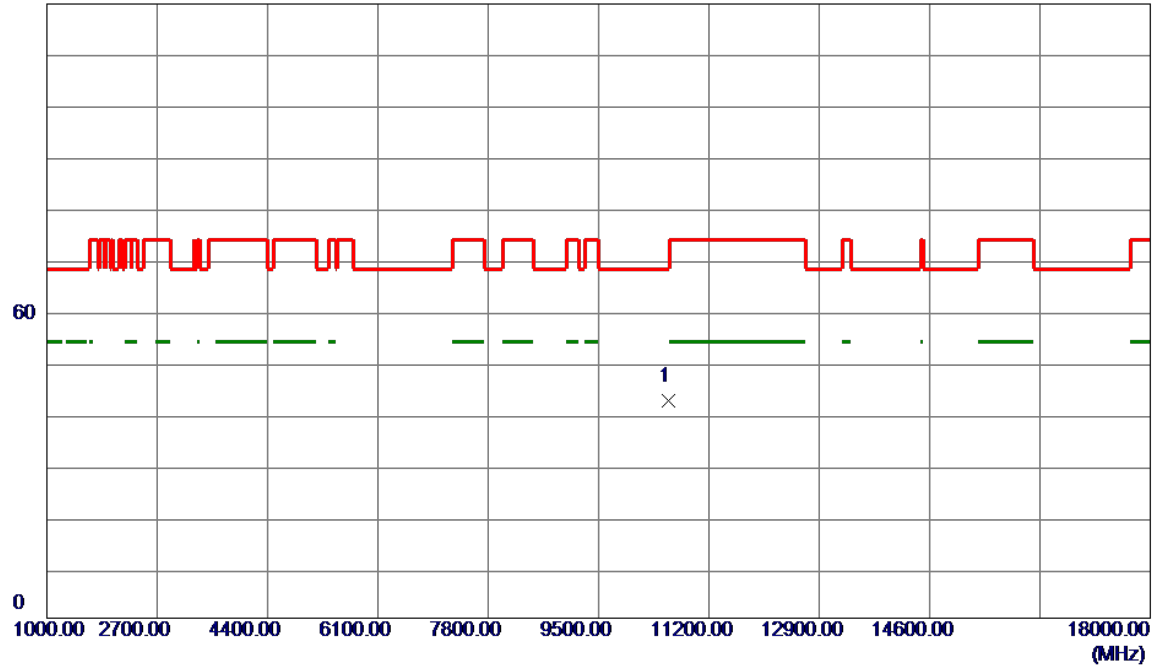


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	42.84	-0.28	42.56	68.20	-25.64	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5290MHz	Polarization	Horizontal

120 dBuV/m

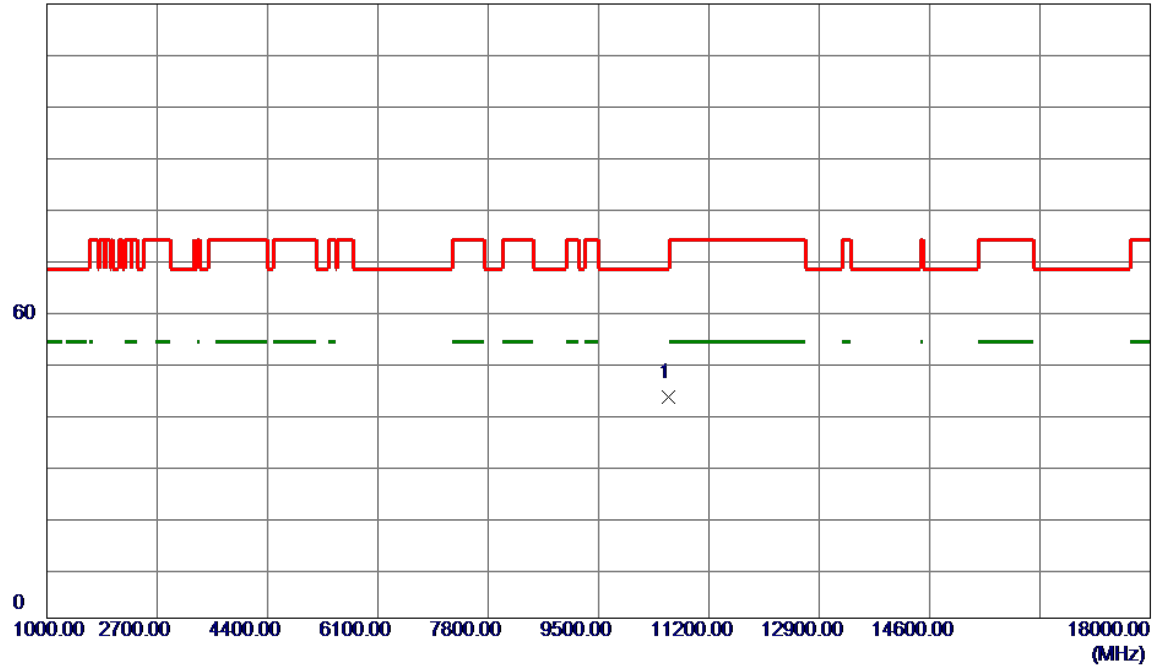


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10580.0000	43.48	-0.28	43.20	68.20	-25.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5530MHz	Polarization	Vertical

120 dBuV/m

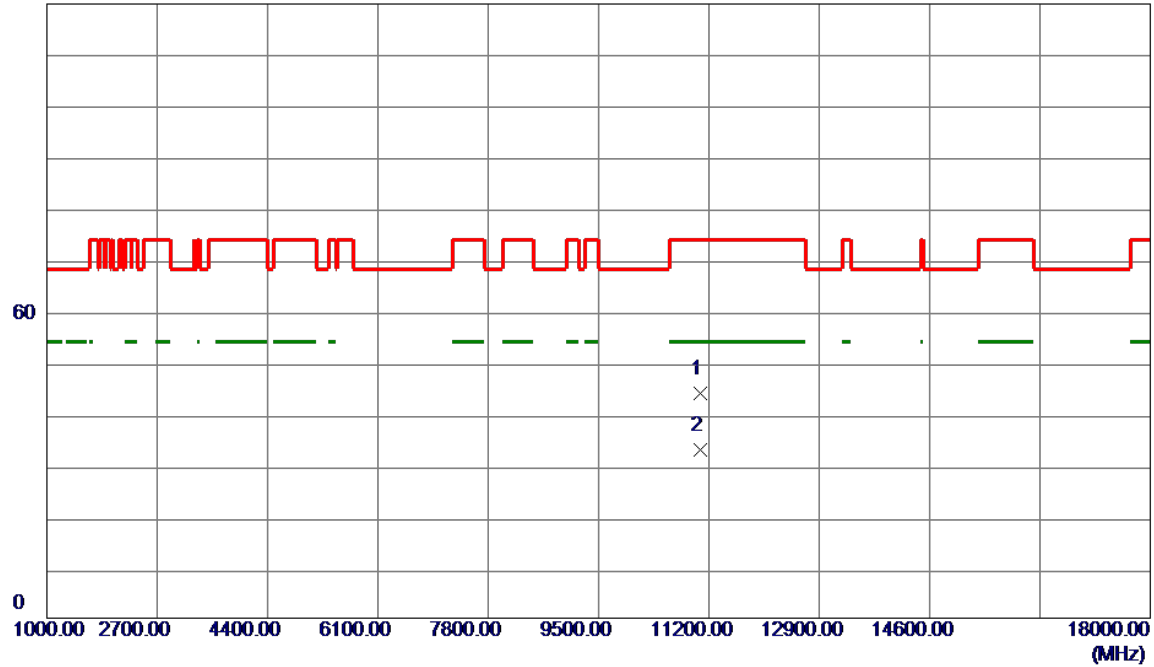


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	43.90	-0.02	43.88	74.00	-30.12	Peak	
2 *	11060.0000	32.81	-0.02	32.79	54.00	-21.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5530MHz	Polarization	Horizontal

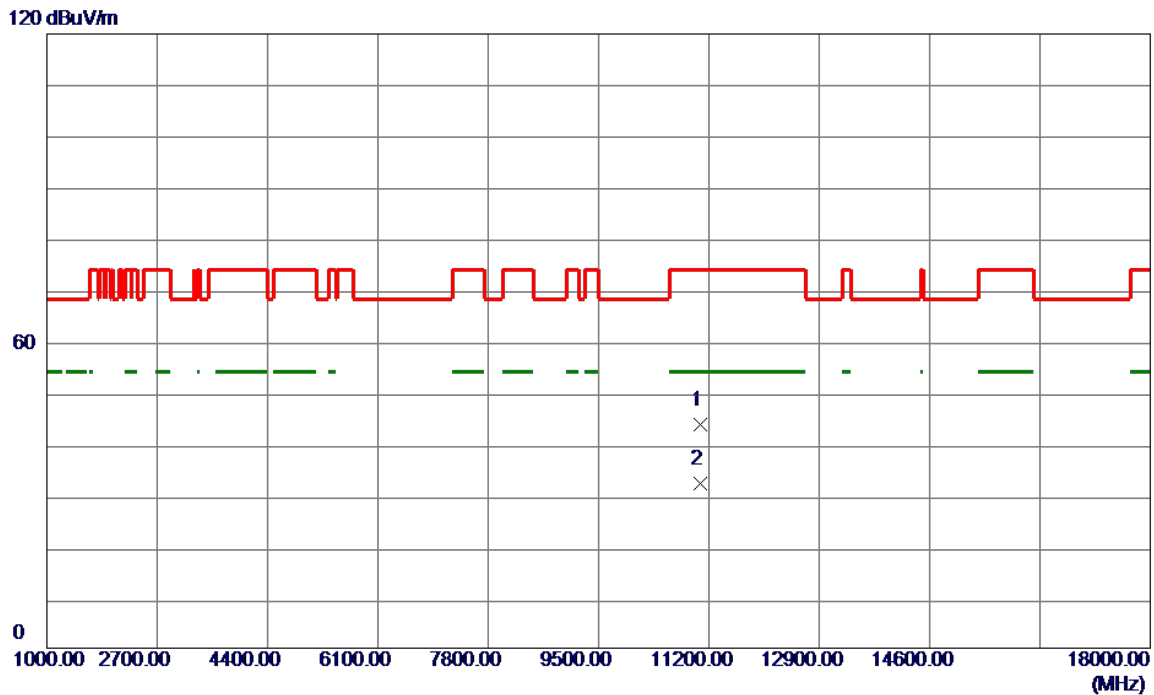


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	43.70	-0.02	43.68	74.00	-30.32	Peak	
2 *	11060.0000	32.28	-0.02	32.26	54.00	-21.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5610MHz	Polarization	Vertical

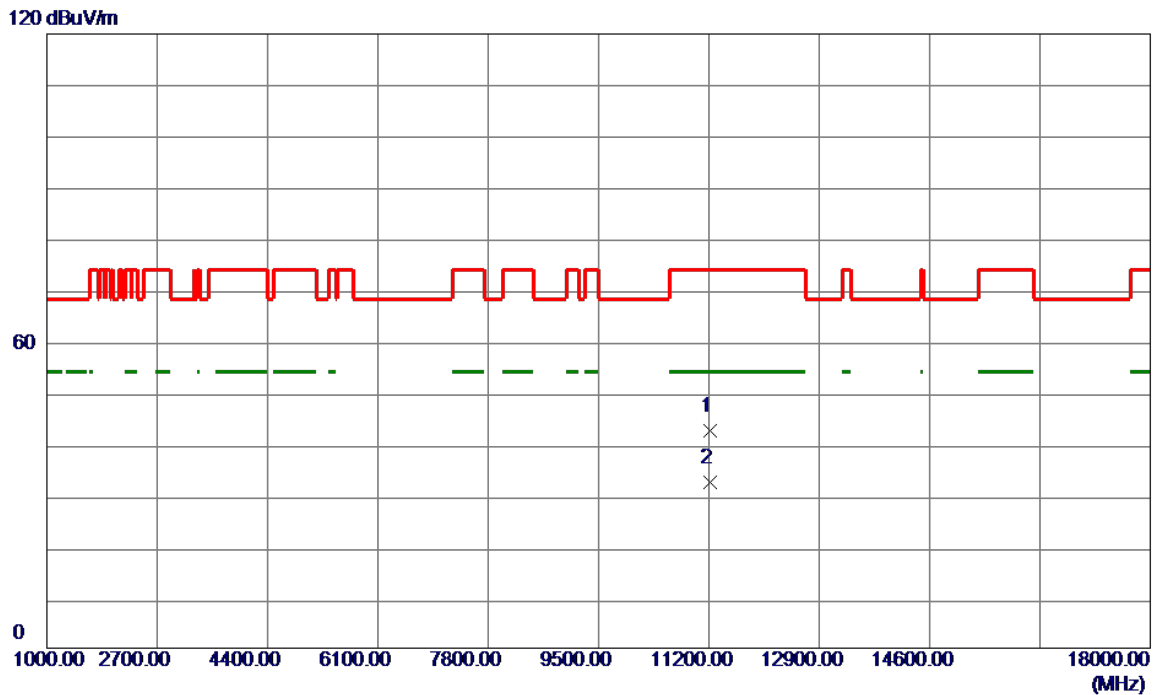


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	42.28	0.29	42.57	74.00	-31.43	Peak	
2 *	11220.0000	32.04	0.29	32.33	54.00	-21.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5610MHz	Polarization	Horizontal

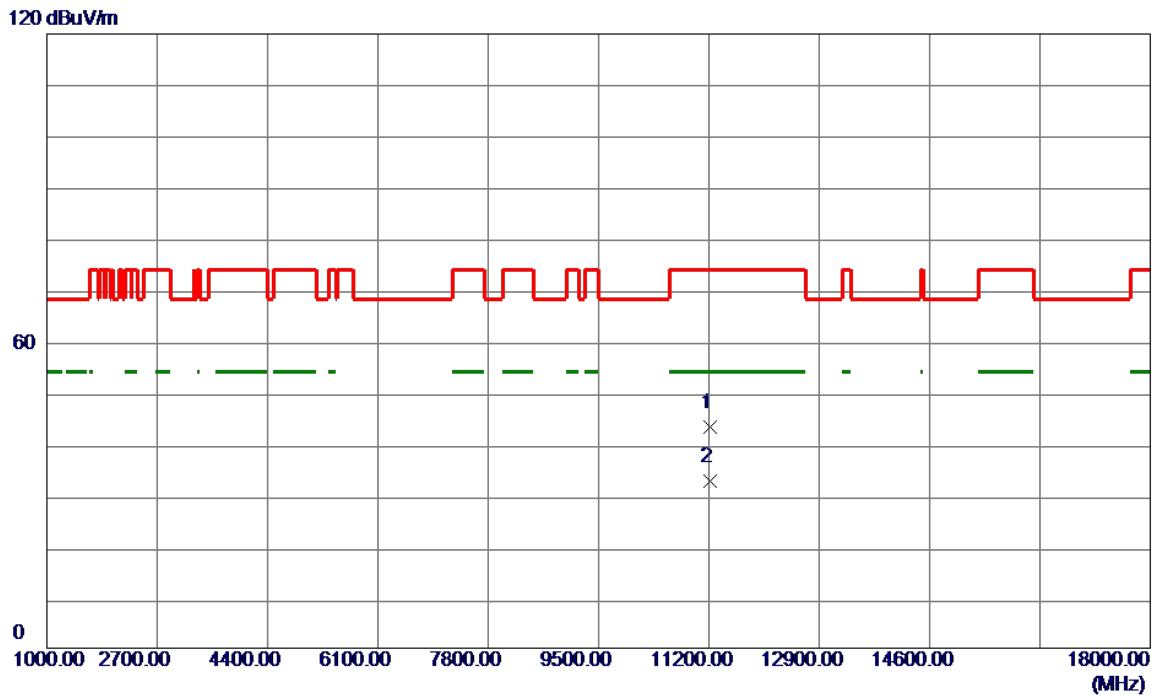


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	42.82	0.29	43.11	74.00	-30.89	Peak	
2 *	11220.0000	32.38	0.29	32.67	54.00	-21.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5775MHz	Polarization	Vertical

120 dBuV/m

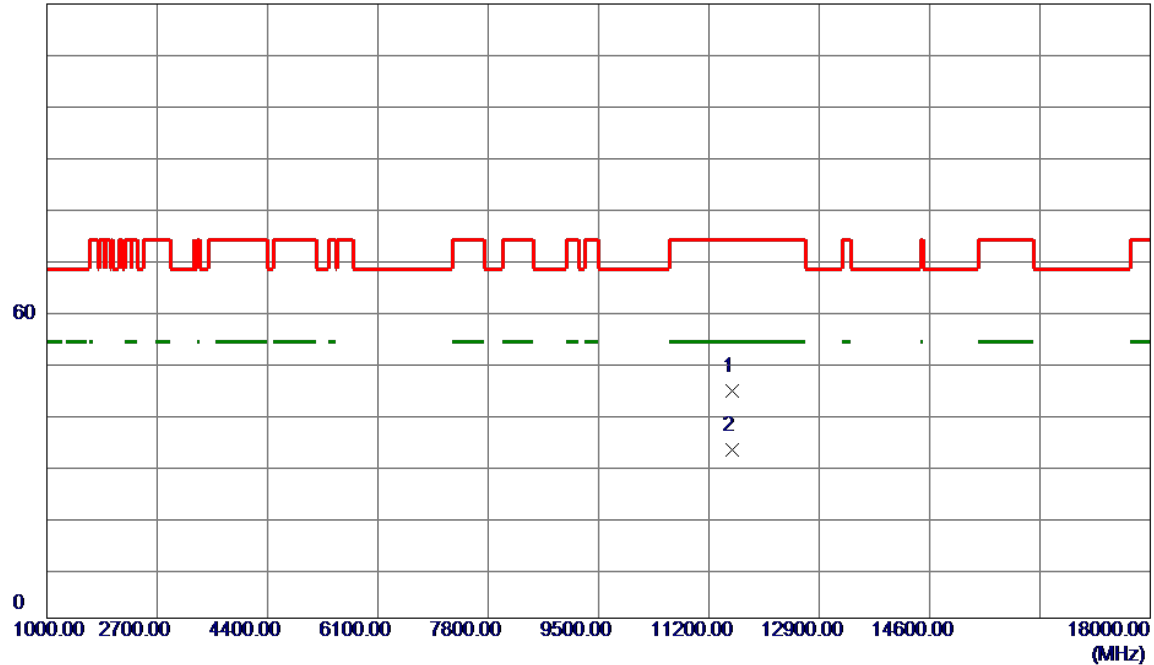


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	43.46	0.84	44.30	74.00	-29.70	Peak	
2 *	11550.0000	32.11	0.84	32.95	54.00	-21.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/26
Test Frequency	5775MHz	Polarization	Horizontal

120 dBuV/m

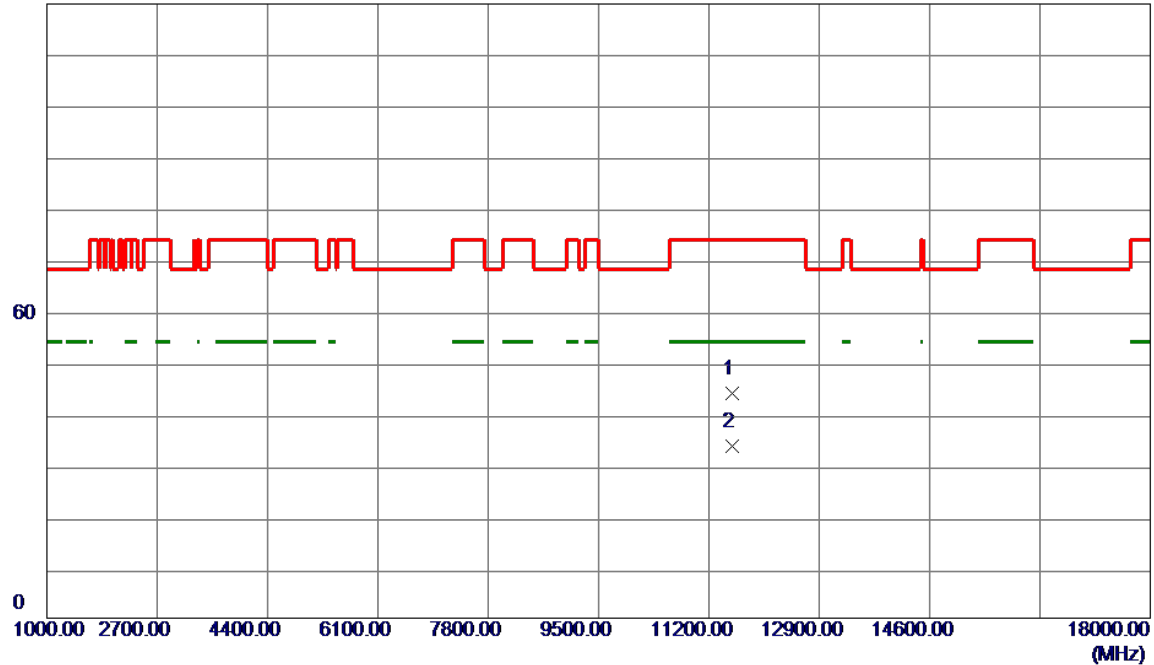

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	43.19	0.84	44.03	74.00	-29.97	Peak	
2 *	11550.0000	32.80	0.84	33.64	54.00	-20.36	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2024/12/26
Test Frequency	5250MHz	Polarization	Vertical

120 dBuV/m

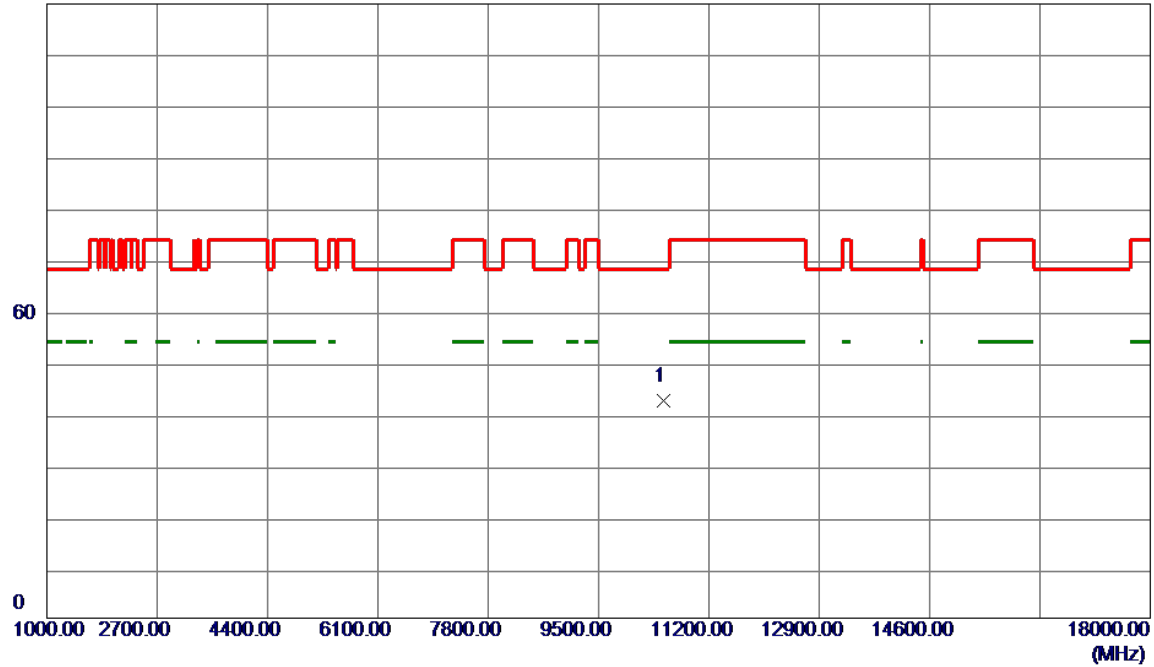


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10500.0000	42.82	-0.31	42.51	68.20	-25.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2024/12/26
Test Frequency	5250MHz	Polarization	Horizontal

120 dBuV/m

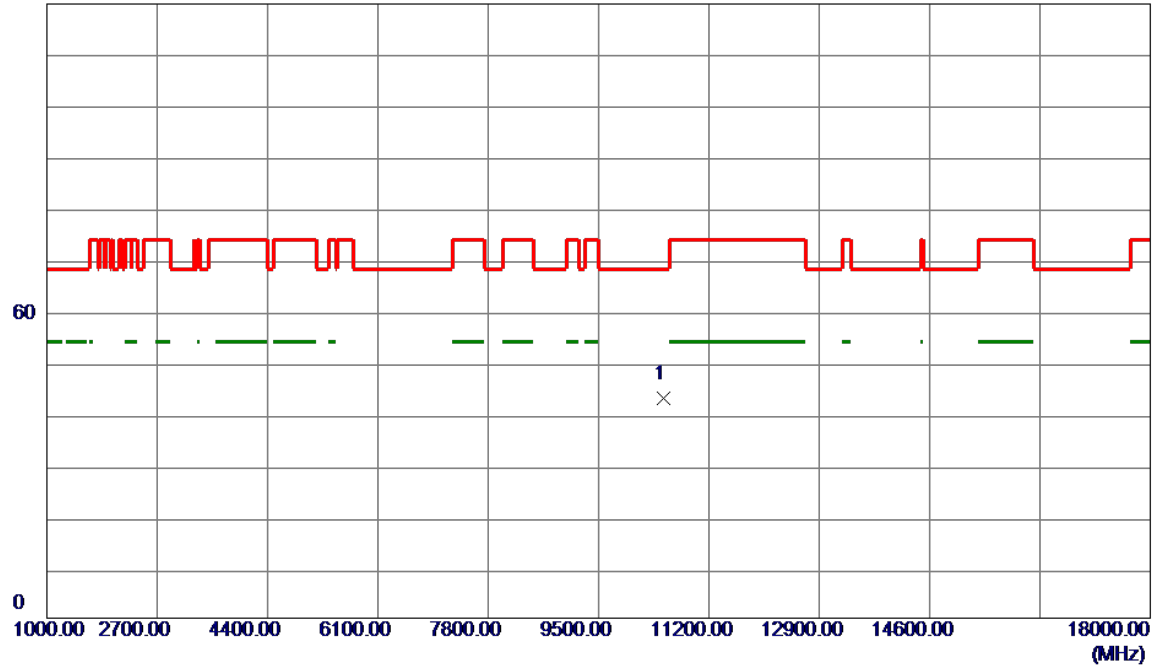


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10500.0000	43.31	-0.31	43.00	68.20	-25.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2024/12/26
Test Frequency	5570MHz	Polarization	Vertical

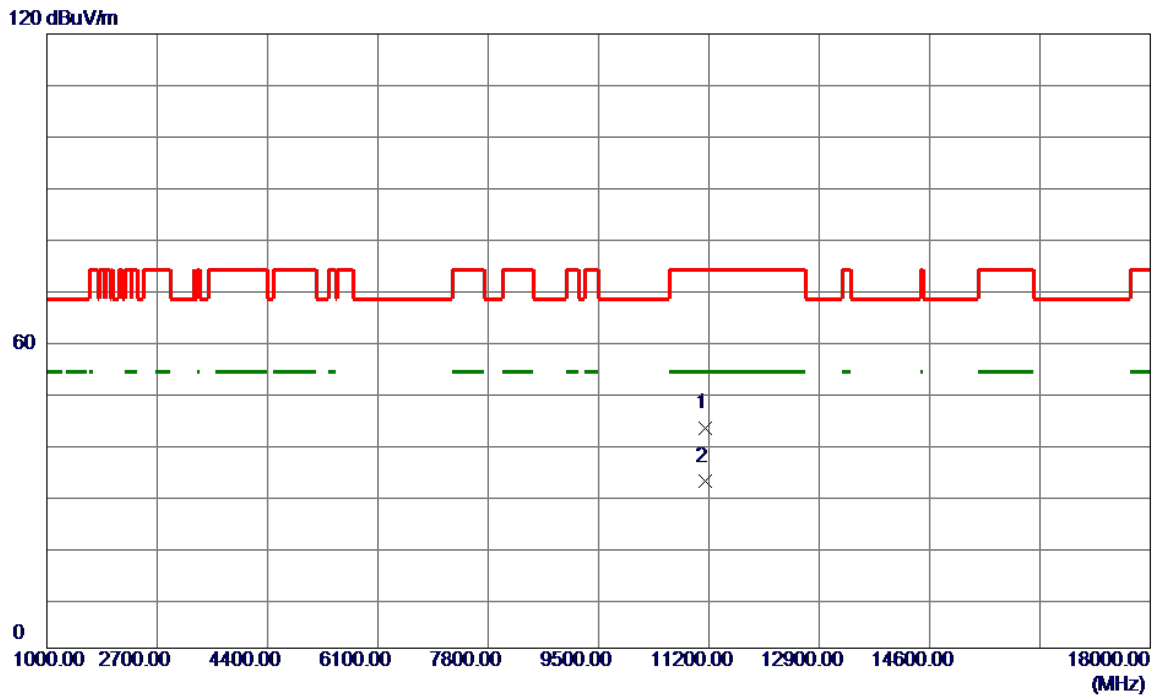


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11140.0000	42.95	0.13	43.08	74.00	-30.92	Peak	
2 *	11140.0000	32.55	0.13	32.68	54.00	-21.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2024/12/26
Test Frequency	5570MHz	Polarization	Horizontal

120 dBuV/m

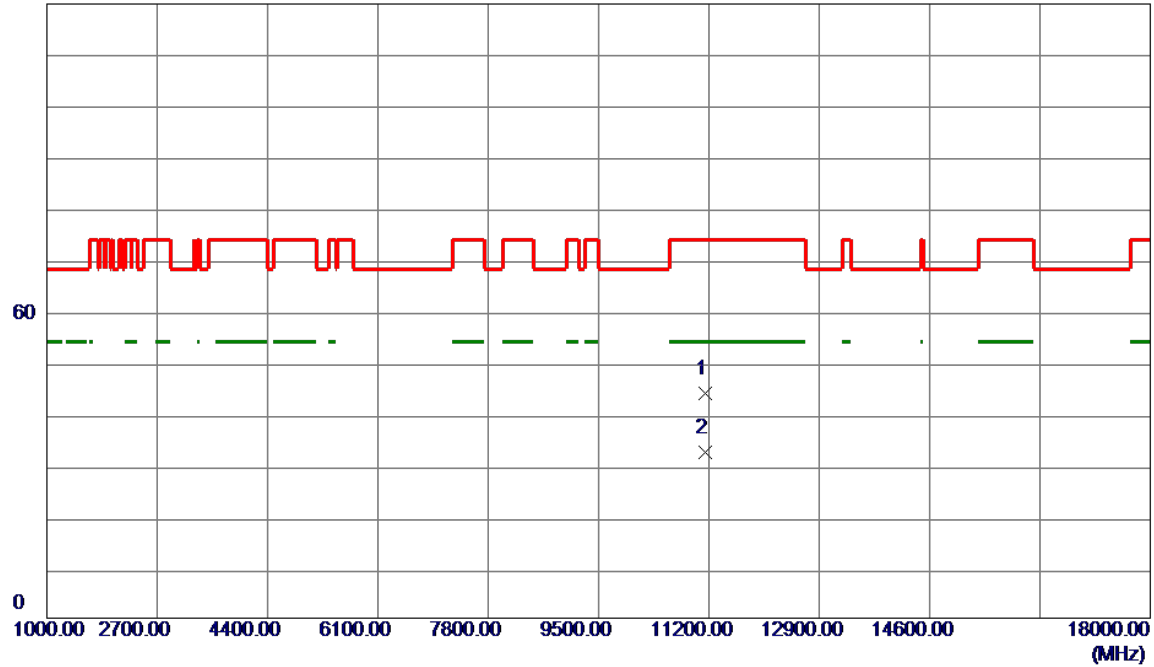


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11140.0000	43.70	0.13	43.83	74.00	-30.17	Peak	
2 *	11140.0000	32.28	0.13	32.41	54.00	-21.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Straddle Channel:

Test Mode	IEEE 802.11a	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Vertical

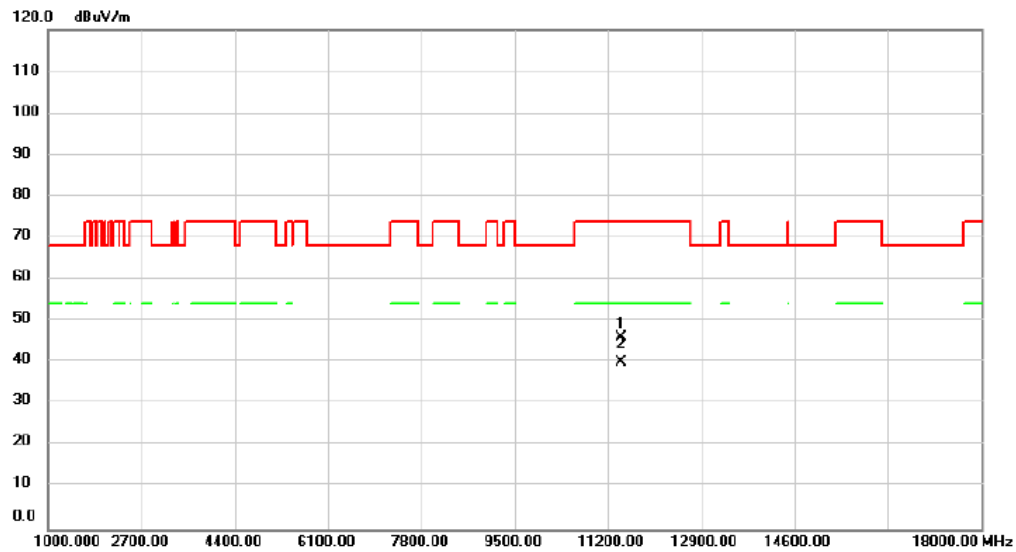


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	45.37	0.71	46.08	74.00	-27.92	peak	
2	*	11440.00	39.30	0.71	40.01	54.00	-13.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Horizontal

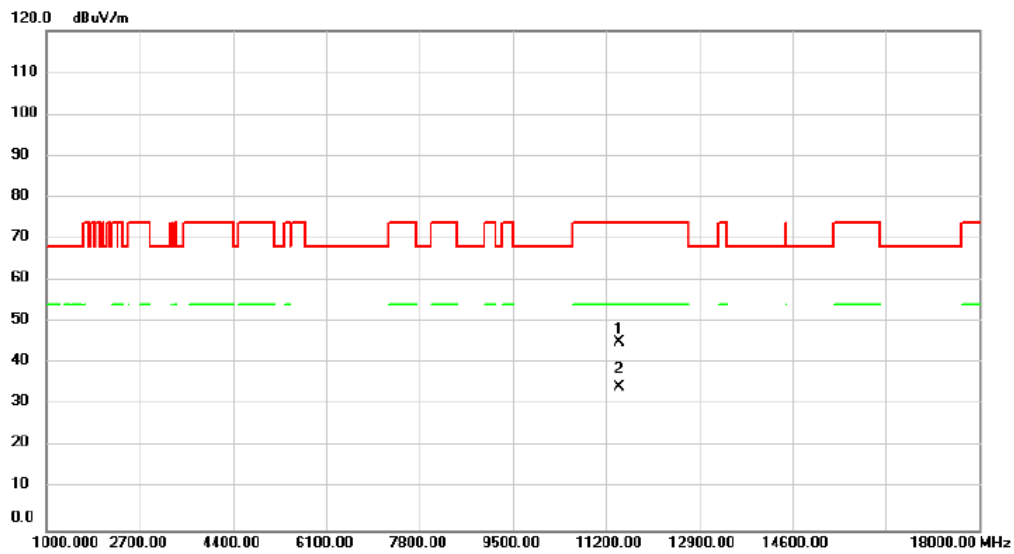


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	44.47	0.71	45.18	74.00	-28.82	peak	
2	*	11440.00	33.55	0.71	34.26	54.00	-19.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Vertical

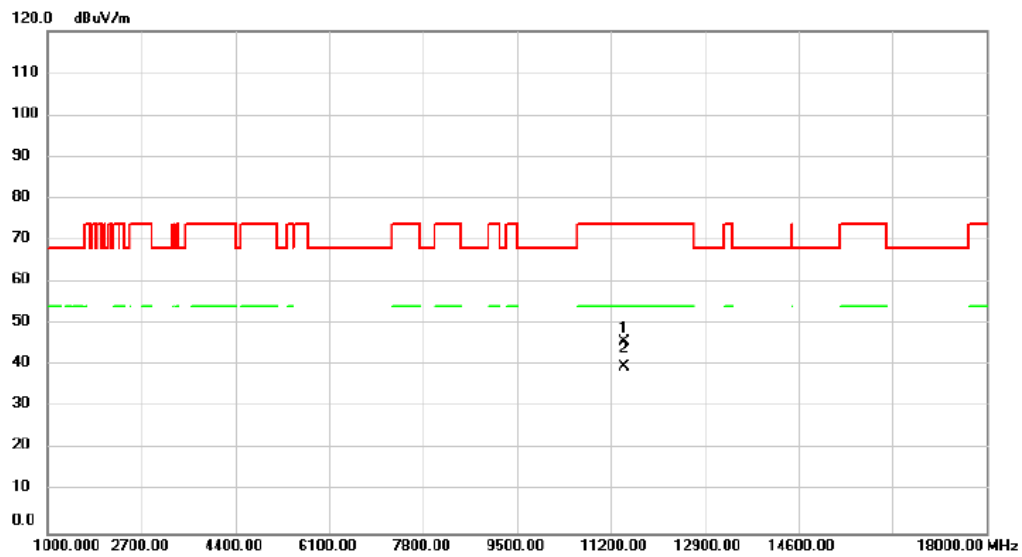


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	44.91	0.71	45.62	74.00	-28.38	peak	
2	*	11440.00	39.14	0.71	39.85	54.00	-14.15	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Horizontal

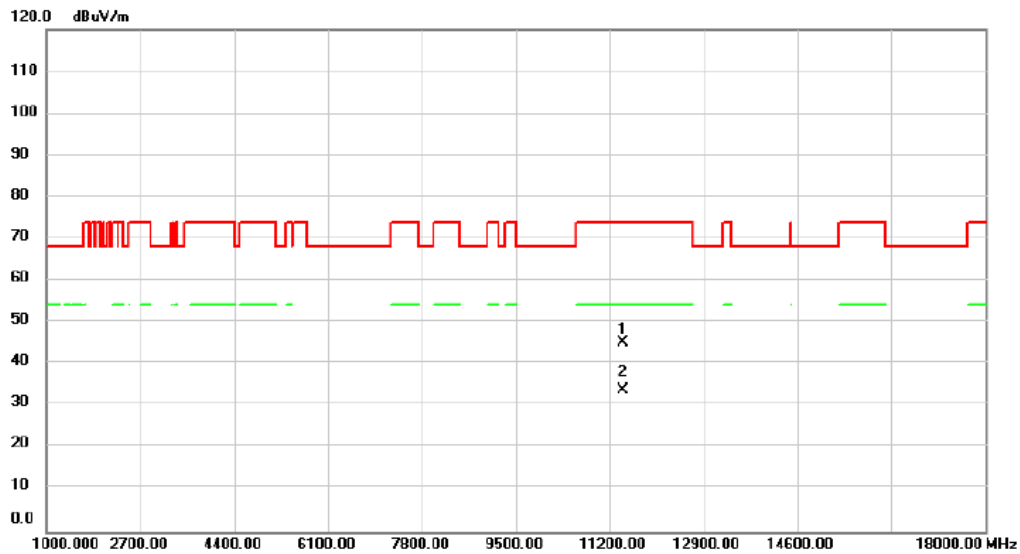


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	44.52	0.71	45.23	74.00	-28.77	peak	
2	*	11440.00	33.04	0.71	33.75	54.00	-20.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/30
Test Frequency	5710Hz	Polarization	Vertical

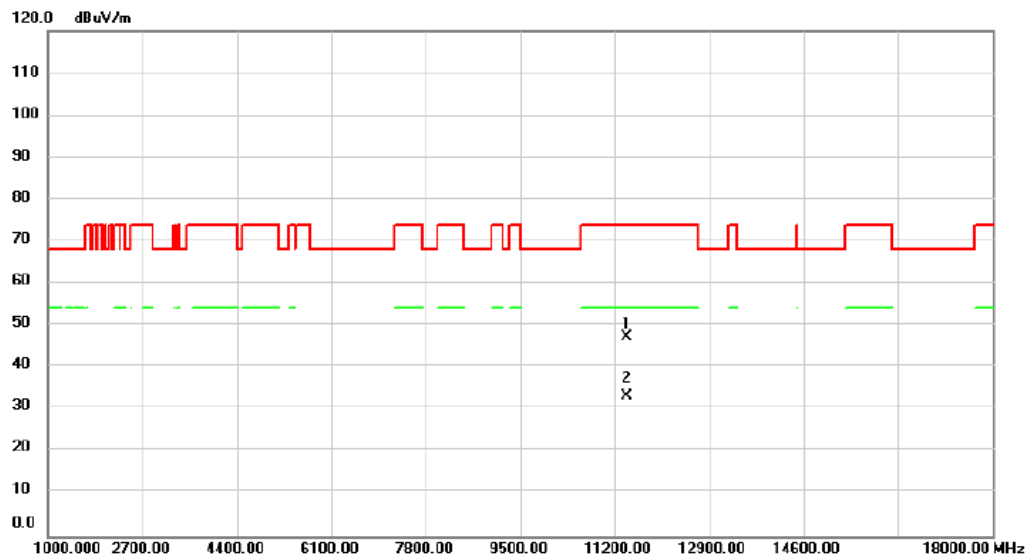


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	46.69	0.68	47.37	74.00	-26.63	peak	
2	*	11420.00	32.35	0.68	33.03	54.00	-20.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/30
Test Frequency	5710Hz	Polarization	Horizontal

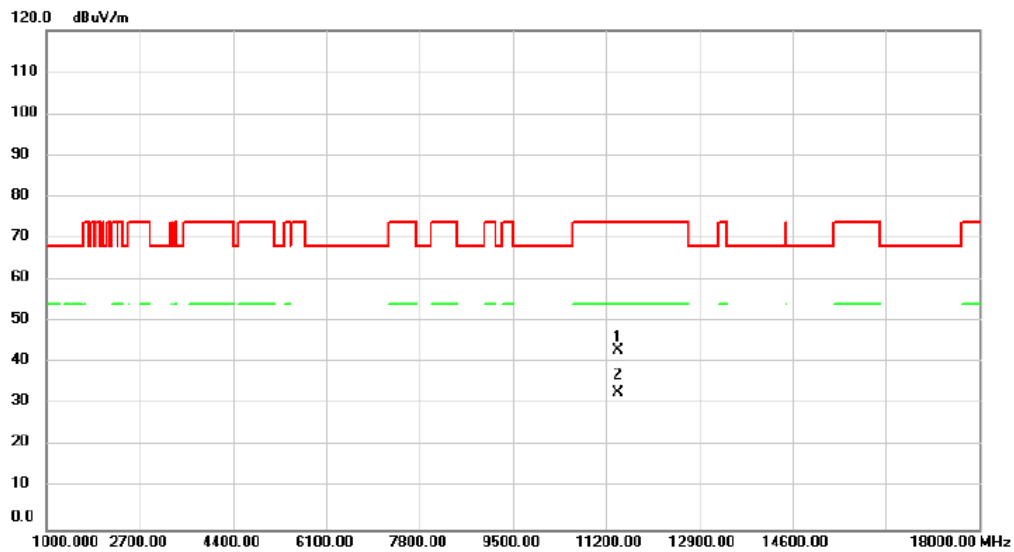


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11420.00	42.34	0.68	43.02	74.00	-30.98	peak	
2	*	11420.00	32.31	0.68	32.99	54.00	-21.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/30
Test Frequency	5690Hz	Polarization	Vertical

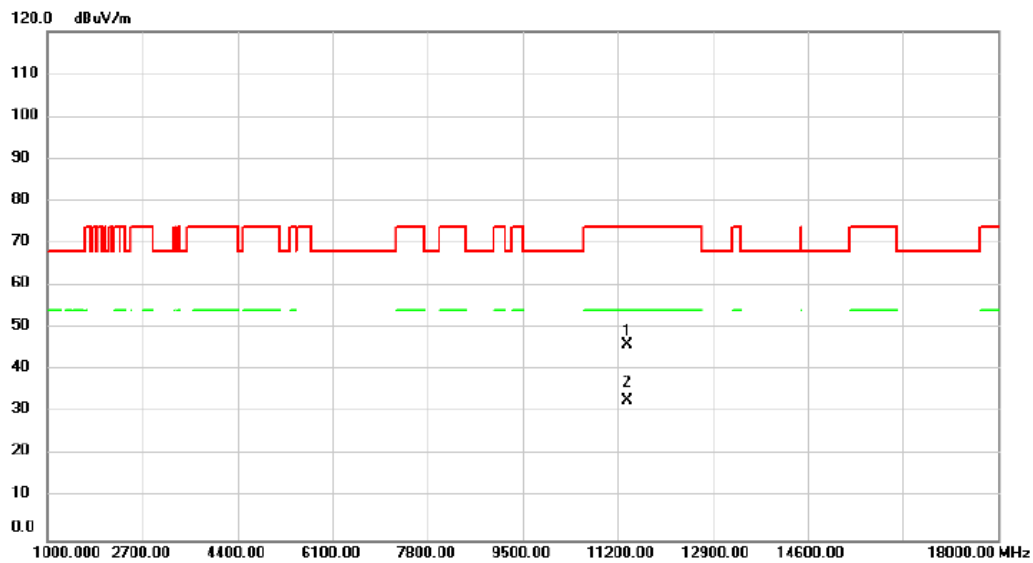


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.00	45.35	0.59	45.94	74.00	-28.06	peak	
2	*	11380.00	32.41	0.59	33.00	54.00	-21.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/30
Test Frequency	5690Hz	Polarization	Horizontal

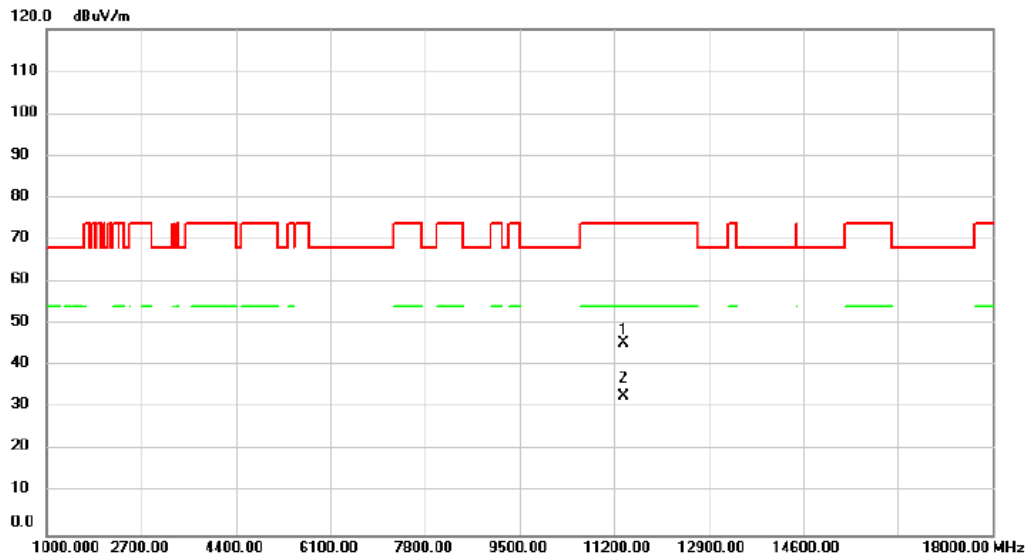


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.00	45.00	0.59	45.59	74.00	-28.41	peak	
2	*	11380.00	32.40	0.59	32.99	54.00	-21.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Vertical

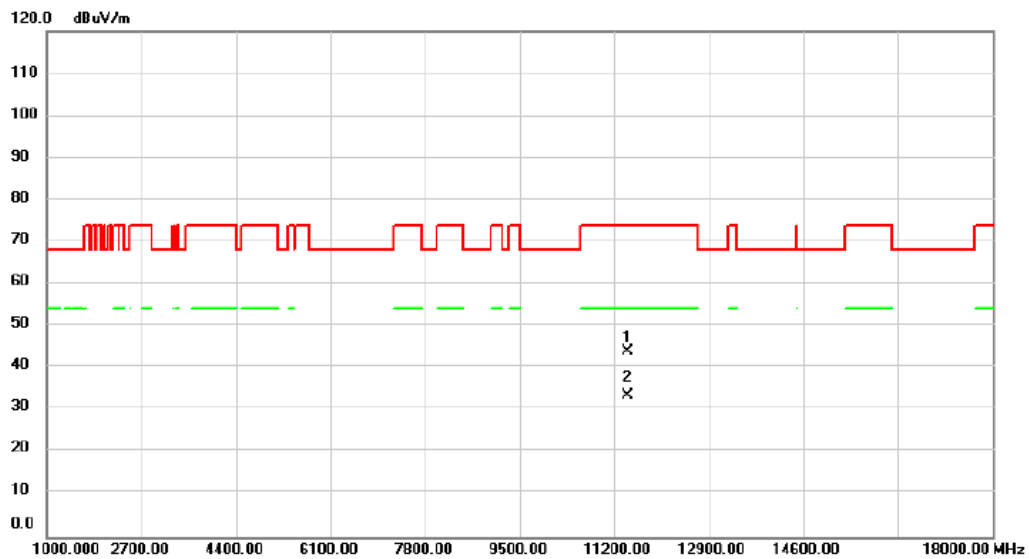


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	43.11	0.71	43.82	74.00	-30.18	peak	
2	*	11440.00	32.65	0.71	33.36	54.00	-20.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Horizontal

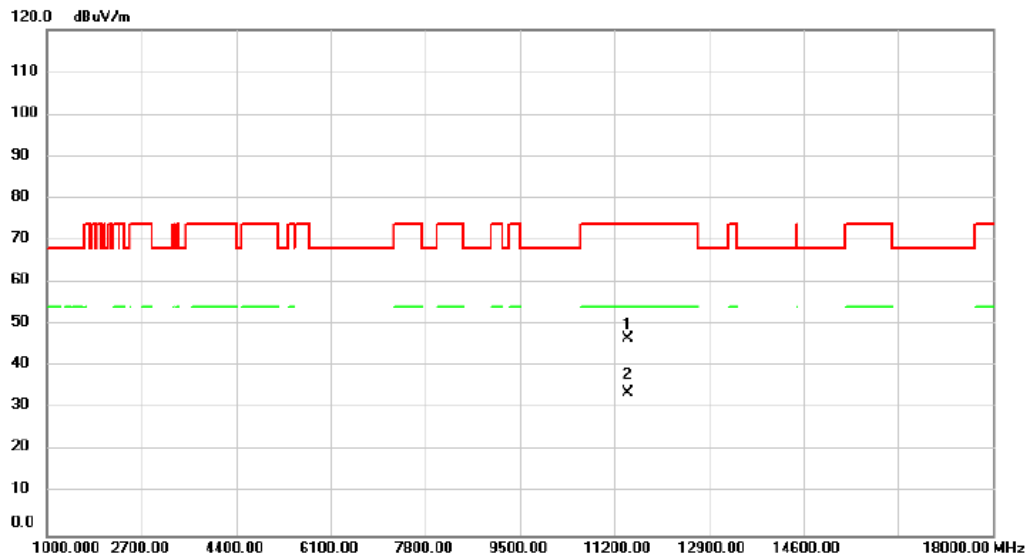


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	45.94	0.71	46.65	74.00	-27.35	peak	
2	*	11440.00	33.11	0.71	33.82	54.00	-20.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/30
Test Frequency	5710Hz	Polarization	Vertical

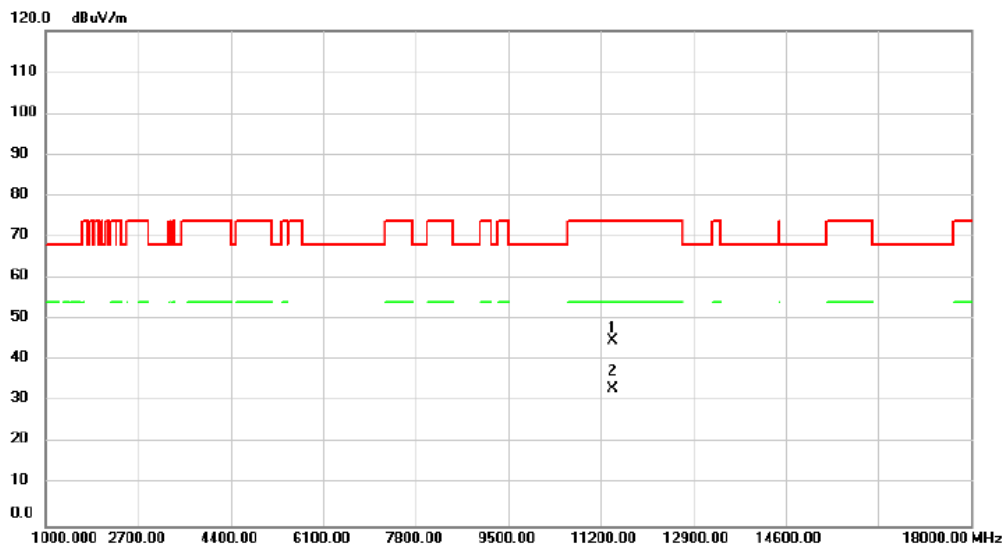


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11420.00	44.05	0.68	44.73	74.00	-29.27	peak	
2	*	11420.00	32.44	0.68	33.12	54.00	-20.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/30
Test Frequency	5710Hz	Polarization	Horizontal

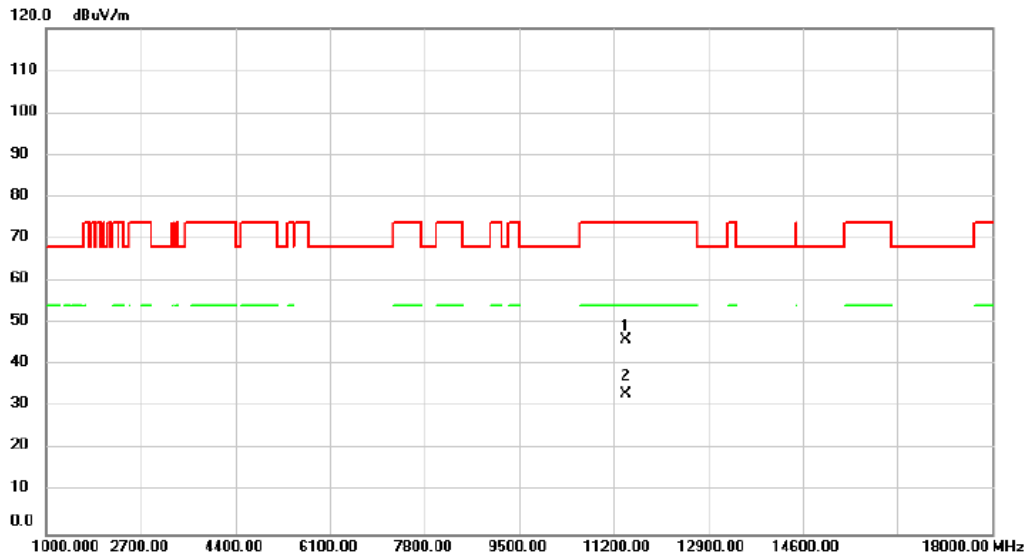


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11420.00	45.34	0.68	46.02	74.00	-27.98	peak	
2	*	11420.00	32.39	0.68	33.07	54.00	-20.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/30
Test Frequency	5690Hz	Polarization	Vertical

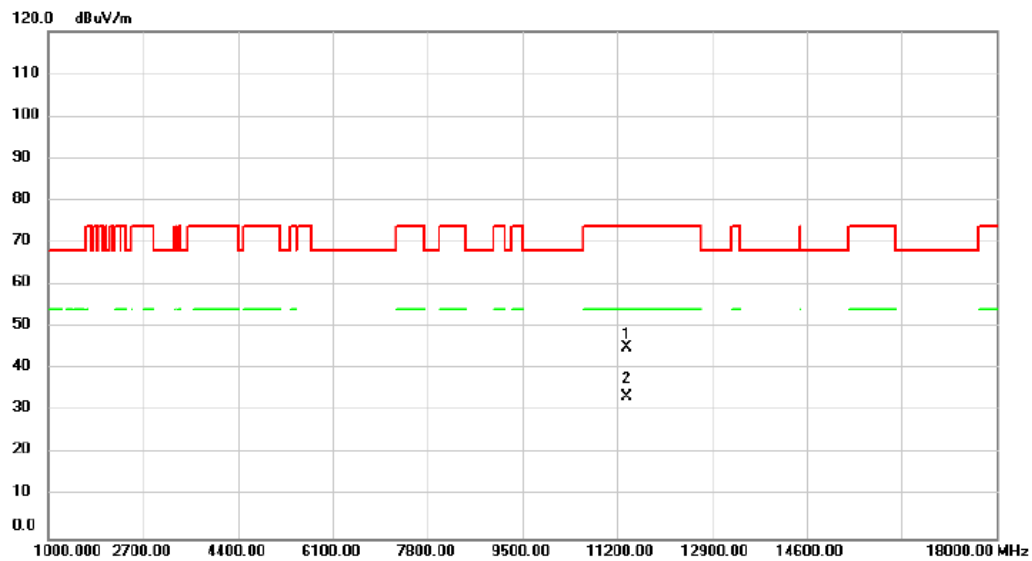


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.00	44.48	0.59	45.07	74.00	-28.93	peak	
2	*	11380.00	32.77	0.59	33.36	54.00	-20.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/30
Test Frequency	5690Hz	Polarization	Horizontal

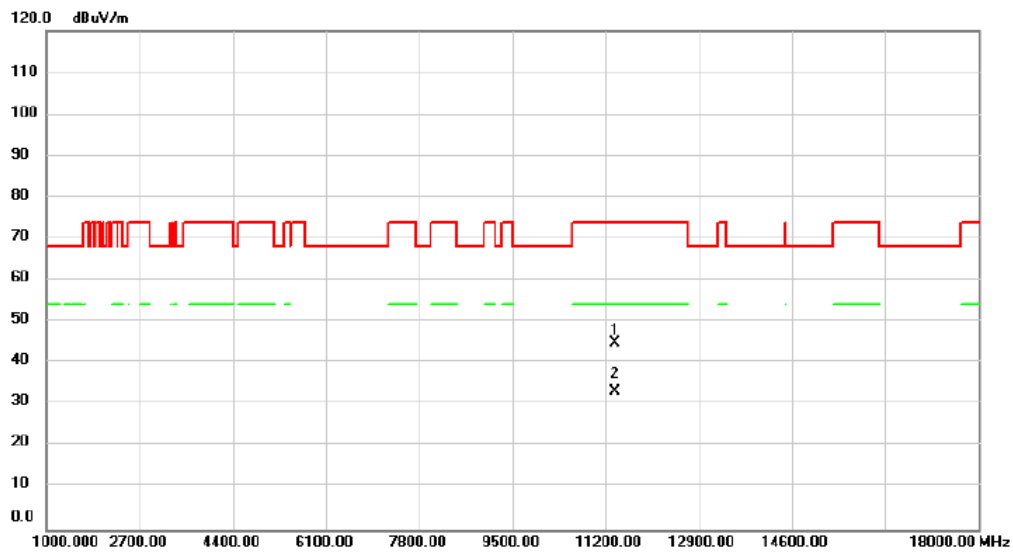


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.00	44.39	0.59	44.98	74.00	-29.02	peak	
2	*	11380.00	32.48	0.59	33.07	54.00	-20.93	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Vertical

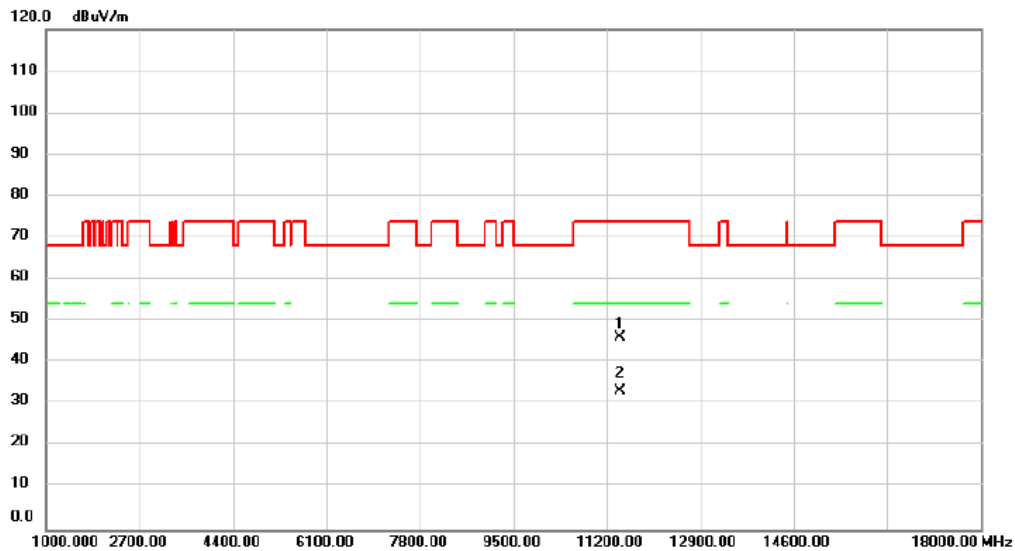


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	45.31	0.71	46.02	74.00	-27.98	peak	
2	*	11440.00	32.56	0.71	33.27	54.00	-20.73	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Horizontal

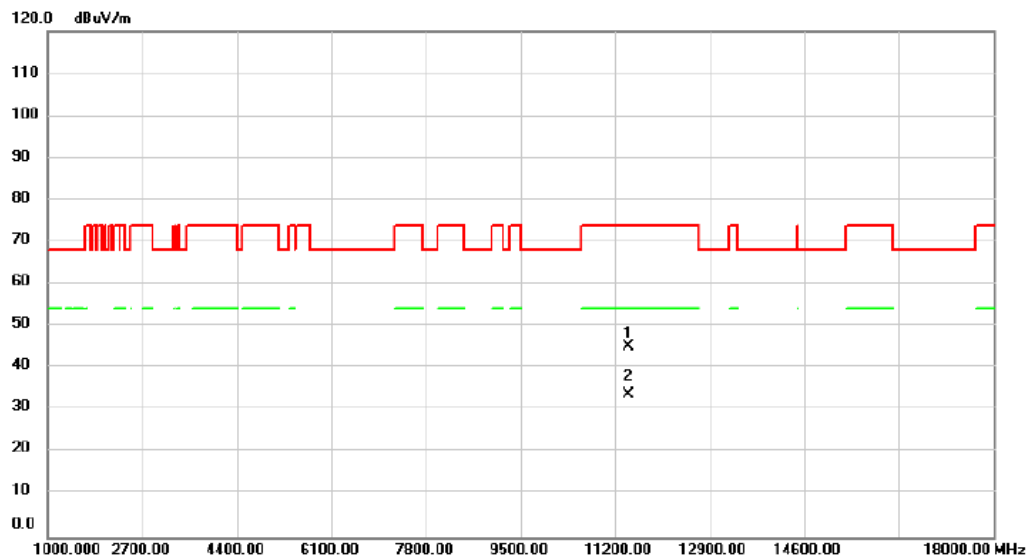


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	44.38	0.71	45.09	74.00	-28.91	peak	
2	*	11440.00	33.03	0.71	33.74	54.00	-20.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/30
Test Frequency	5710Hz	Polarization	Vertical

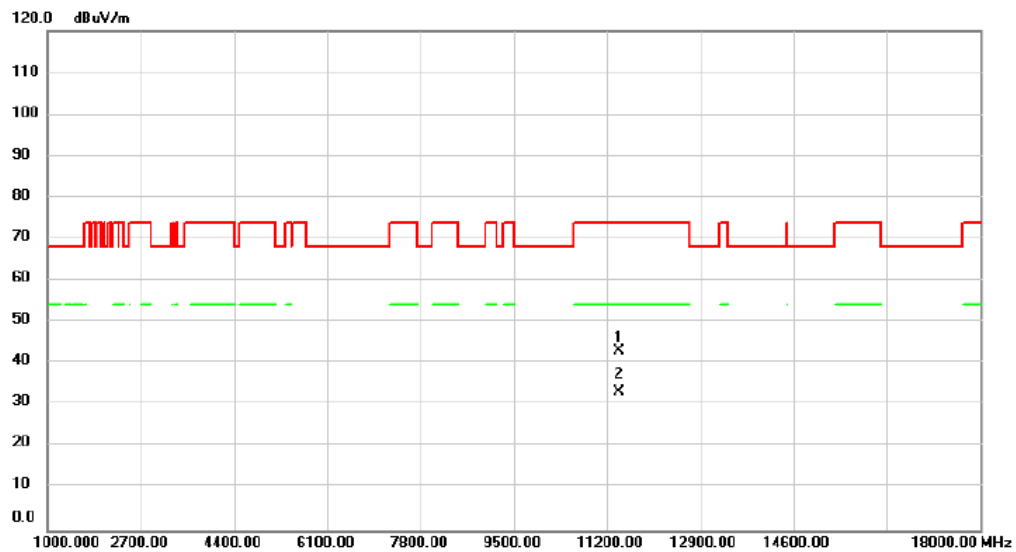


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11420.00	42.39	0.68	43.07	74.00	-30.93	peak	
2	*	11420.00	32.47	0.68	33.15	54.00	-20.85	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/30
Test Frequency	5710Hz	Polarization	Horizontal

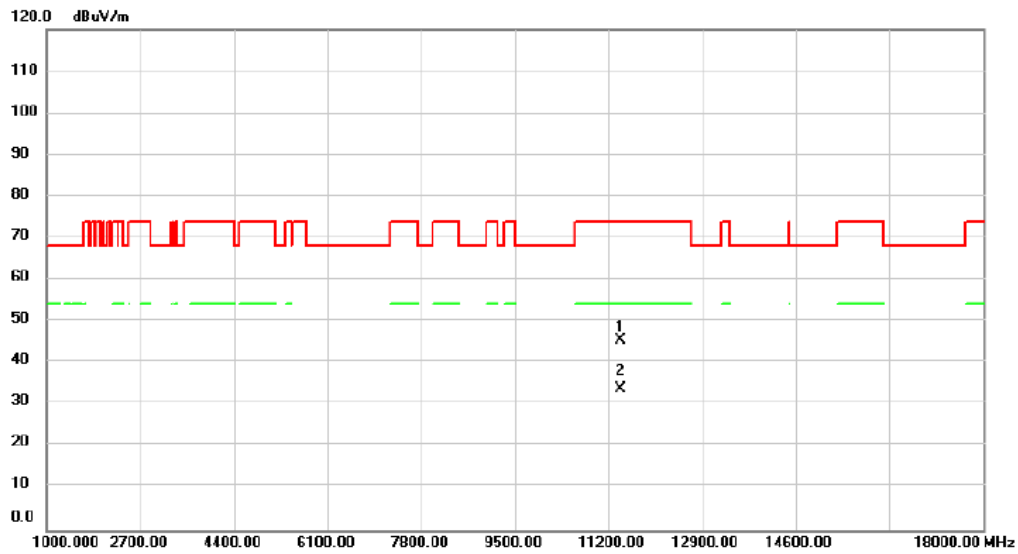


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	44.79	0.68	45.47	74.00	-28.53	peak	
2	*	11420.00	33.07	0.68	33.75	54.00	-20.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/30
Test Frequency	5690Hz	Polarization	Vertical

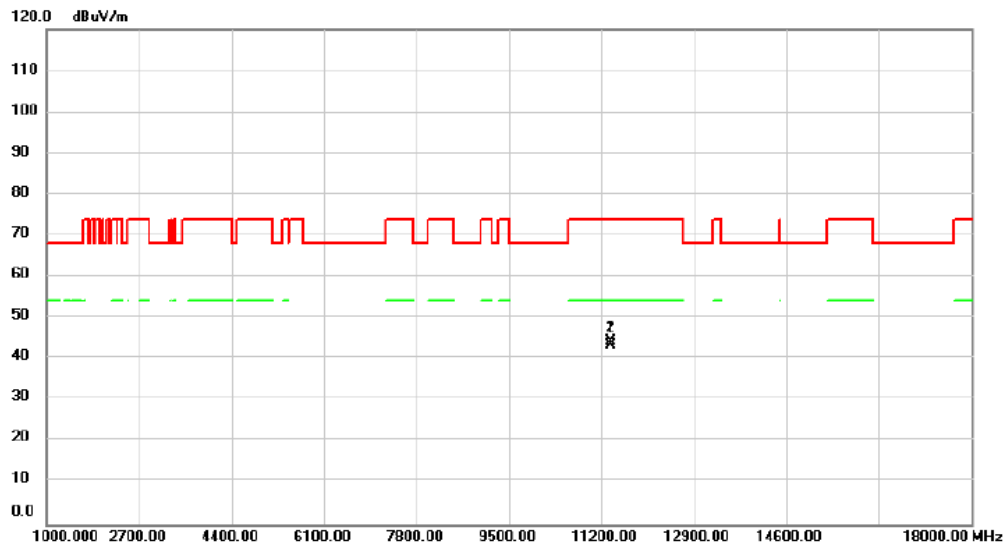


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.00	43.55	0.59	44.14	74.00	-29.86	peak	
2	*	11380.00	42.63	0.59	43.22	54.00	-10.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/30
Test Frequency	5690Hz	Polarization	Horizontal

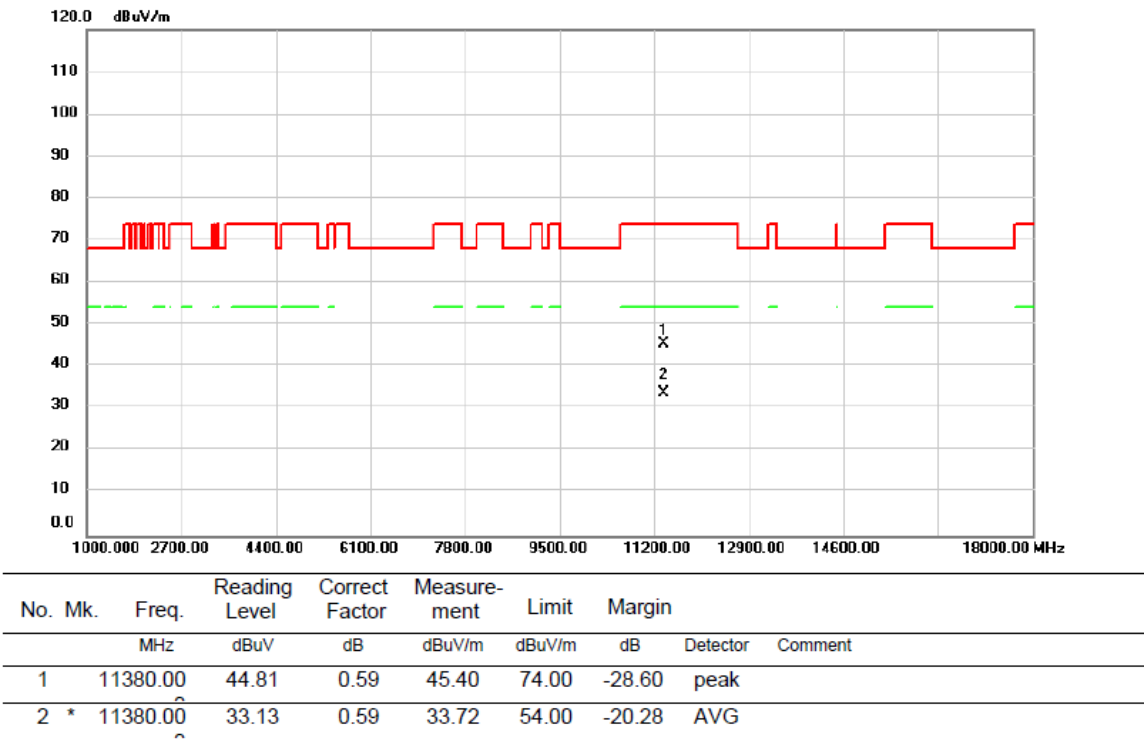


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Vertical

120 dBuV/m

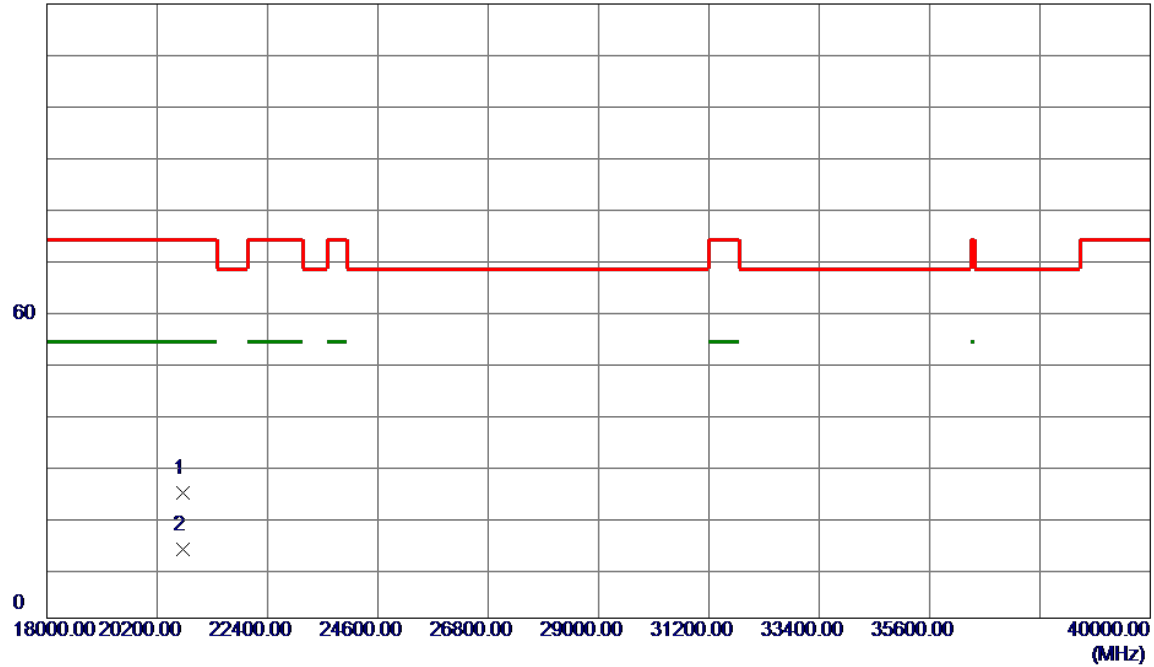


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	20720.0000	33.49	-9.03	24.46	74.00	-49.54	Peak	
2 *	20720.0000	22.47	-9.03	13.44	54.00	-40.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Horizontal

120 dBuV/m

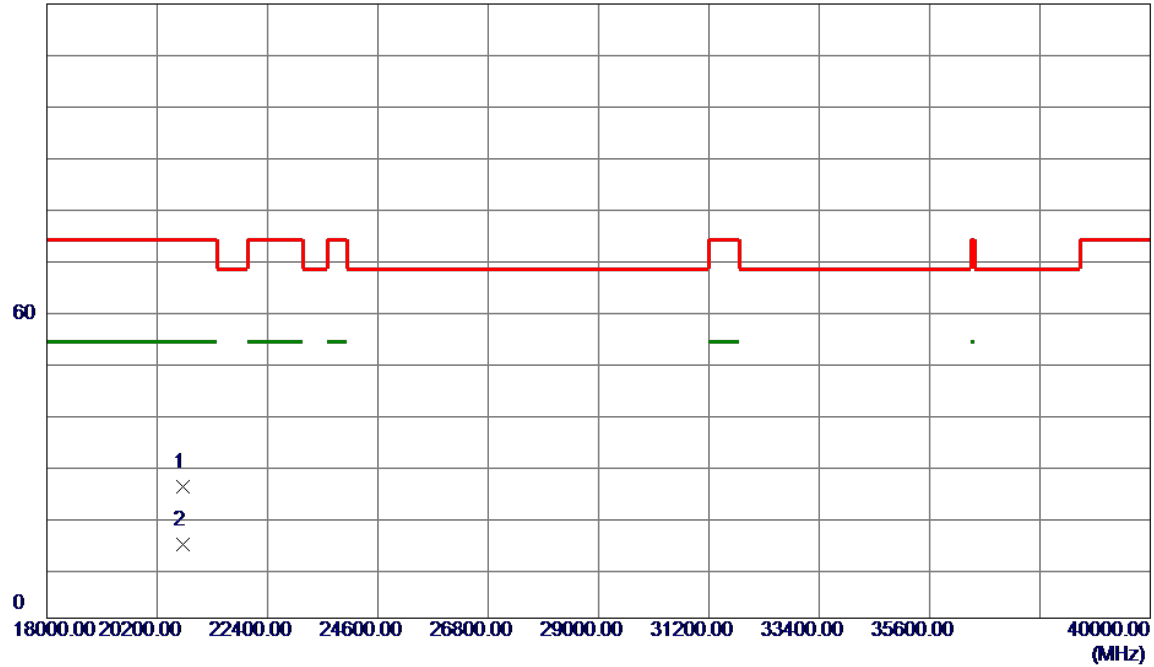

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	20720.0000	34.78	-9.03	25.75	74.00	-48.25	Peak	
2 *	20720.0000	23.54	-9.03	14.51	54.00	-39.49	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D BANDWIDTH


Test Mode	IEEE 802.11a_Ant.1
-----------	--------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	23.189	17.100
40	5200	23.449	17.200
48	5240	23.350	17.200

CH36

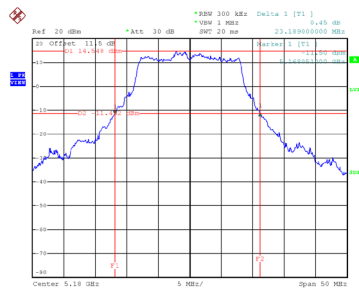


Date: 24.DEC.2024 17:06:46

CH40
26 dB Bandwidth


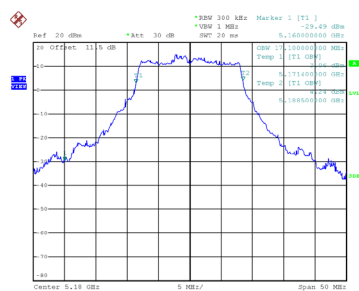
Date: 24.DEC.2024 17:11:48

CH48

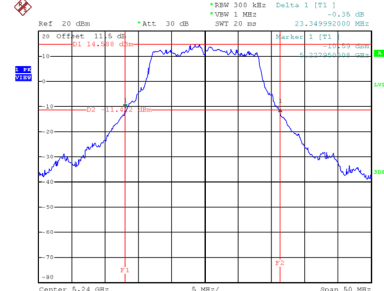


Date: 24.DEC.2024 17:12:52


99 % Occupied Bandwidth



Date: 24.DEC.2024 17:06:21




Date: 24.DEC.2024 17:11:23

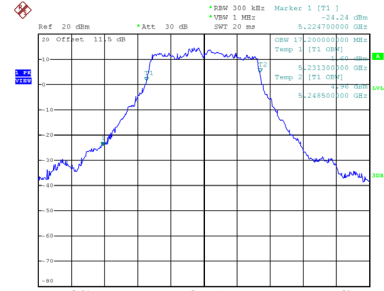


Date: 24.DEC.2024 17:12:27

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	23.650	17.200
60	5300	22.990	17.200
64	5320	23.349	17.200

CH52

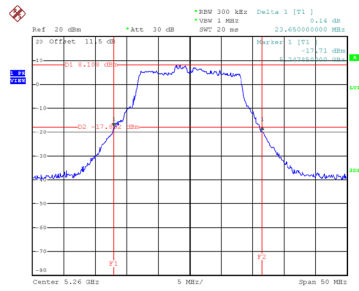


Date: 24.DEC.2024 17:13:58

CH60
26 dB Bandwidth


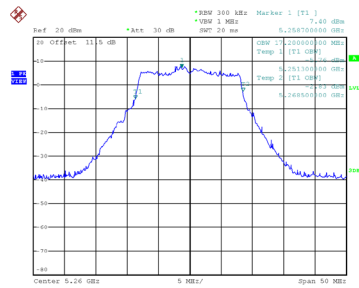
Date: 24.DEC.2024 17:15:59

CH64

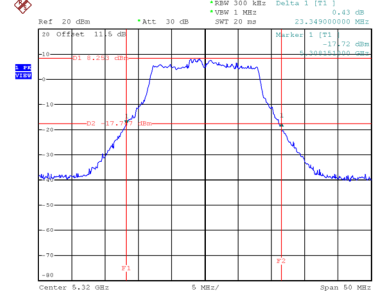


Date: 24.DEC.2024 17:17:02


99 % Occupied Bandwidth



Date: 24.DEC.2024 17:13:34

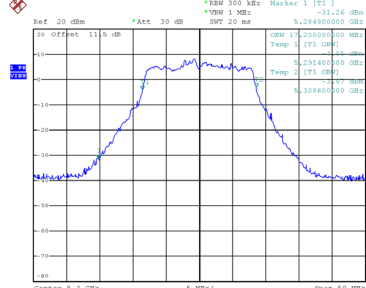


Date: 24.DEC.2024 17:15:33

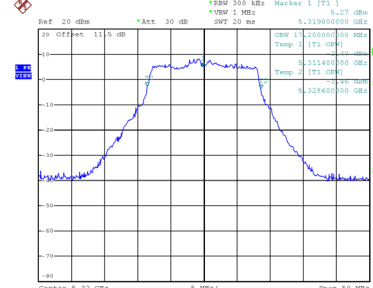

Date: 24.DEC.2024 17:16:37


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	22.750	17.100
116	5580	23.550	17.100
140	5700	23.249	17.300
144	5720	23.350	17.100

CH100

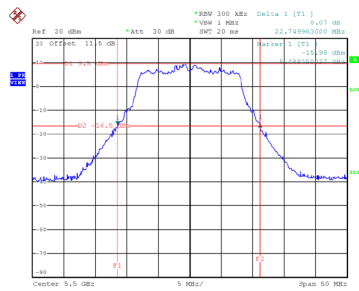


Date: 24.DEC.2024 17:18:26

CH116
26 dB Bandwidth

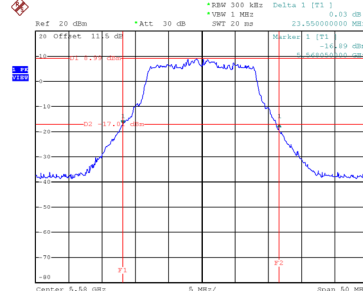


Date: 24.DEC.2024 17:19:31

CH140




Date: 26.DEC.2024 14:17:19


99 % Occupied Bandwidth

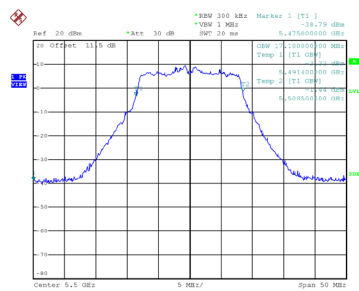

Date: 24.DEC.2024 17:18:00

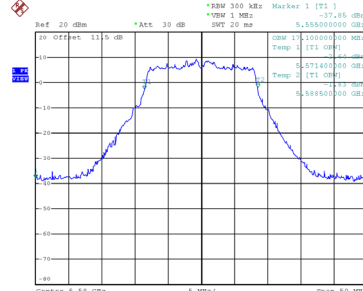


Date: 24.DEC.2024 17:19:07




Date: 26.DEC.2024 14:16:54

26 dB Bandwidth

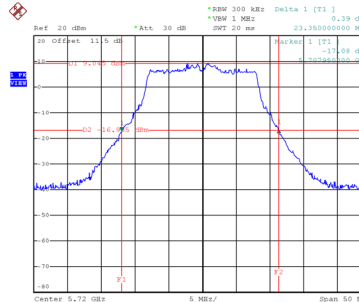

Date: 26.DEC.2024 14:19:14


99 % Occupied Bandwidth

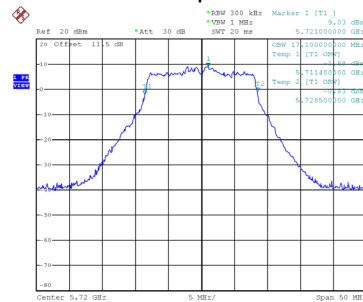


Date: 26.DEC.2024 14:18:49

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	15.500	18.900	0.5	Complies
157	5785	16.189	20.200	0.5	Complies
165	5825	15.559	20.800	0.5	Complies

CH149

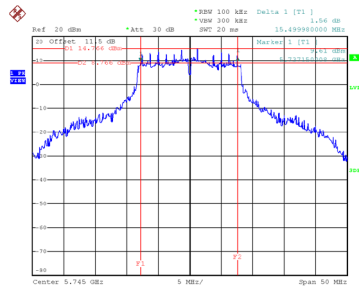


Date: 24.DEC.2024 17:22:34

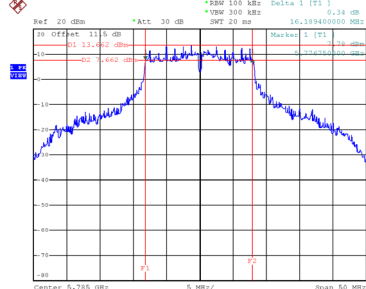CH157
6 dB Bandwidth


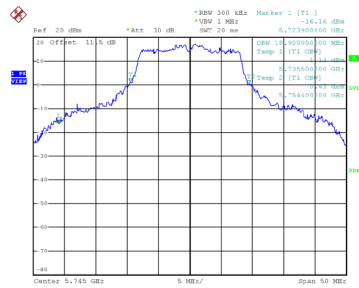
Date: 24.DEC.2024 17:23:50

CH165

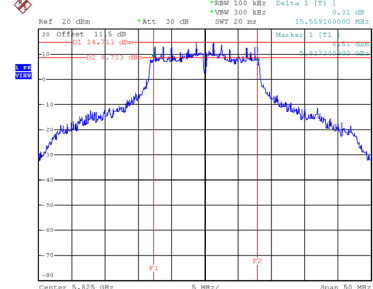


Date: 24.DEC.2024 17:25:42


99 % Occupied Bandwidth



Date: 24.DEC.2024 17:22:05

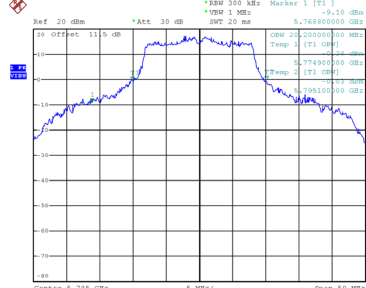

Date: 24.DEC.2024 17:23:22

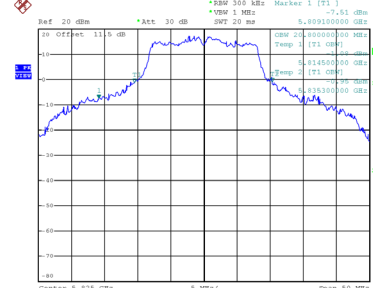


Date: 24.DEC.2024 17:25:13


Test Mode	IEEE 802.11ac (VHT20)_Ant.1
-----------	-----------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	24.550	18.400
40	5200	24.450	18.400
48	5240	24.008	18.300

CH36

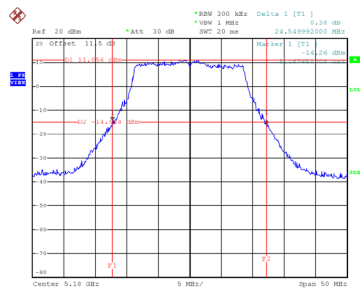


Date: 25.DEC.2024 11:37:10

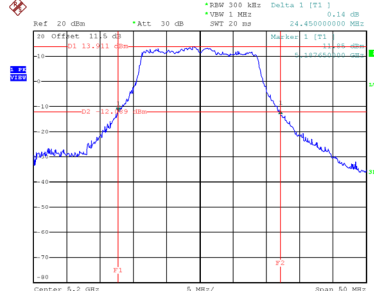CH40
26 dB Bandwidth


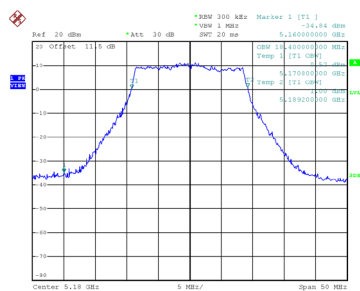
Date: 25.DEC.2024 11:38:32

CH48




Date: 25.DEC.2024 11:41:56


99 % Occupied Bandwidth



Date: 25.DEC.2024 11:36:46

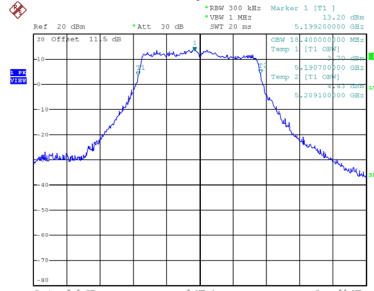


Date: 25.DEC.2024 11:38:08



Date: 25.DEC.2024 11:41:31


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	24.089	18.300
60	5300	24.390	18.300
64	5320	24.008	18.300

CH52

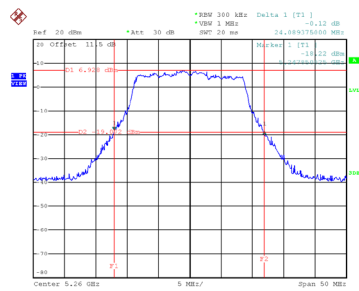


Date: 25.DEC.2024 11:44:30

CH60
26 dB Bandwidth

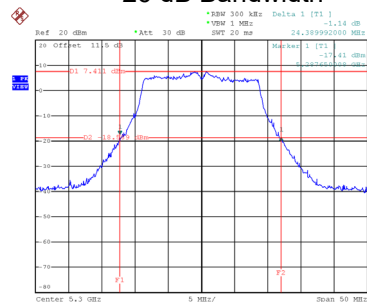


Date: 25.DEC.2024 11:47:59

CH64

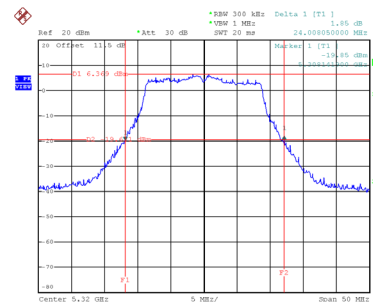


Date: 25.DEC.2024 11:55:07


99 % Occupied Bandwidth

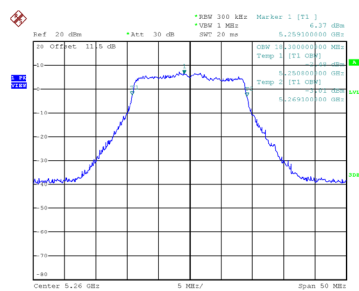

Date: 25.DEC.2024 11:44:05

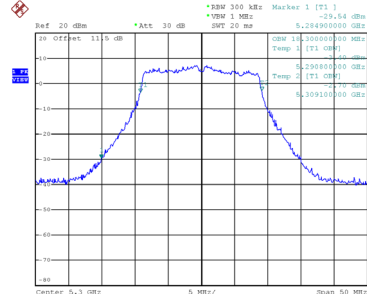

Date: 25.DEC.2024 11:47:34

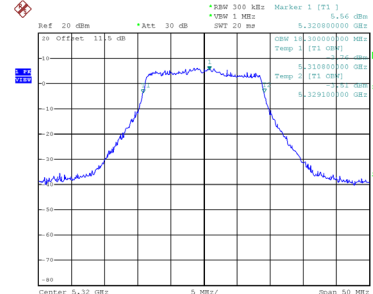

Date: 25.DEC.2024 11:54:43