

**FCC 15.247
2.4 GHz Report**

for

VesCir Ltd.

**10F., No.272, Jixian Rd., Luzhou Dist.,
New Taipei City Taiwan**

Brand : defiderm
Product Name : Skin condition &
Environment analyzer
Model Name : CA516
FCC ID : 2AINP-CA516

Prepared by: : AUDIX Technology Corporation,
EMC Department



TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
TEST REPORT CERTIFICATION	4
1. REPORT HISTORY.....	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of EUT	7
3.2. EUT Specifications Assessed in Current Report	8
3.3. Antenna Information	8
3.4. Test Configuration	9
3.5. Tested Supporting System List	10
3.6. Setup Configuration	11
3.7. Operating Condition of EUT	11
3.8. Description of Test Facility	12
3.9. Measurement Uncertainty	12
4. MEASUREMENT EQUIPMENT LIST	13
4.1. Conducted Emission Measurement.....	13
4.2. Radiated Emission Measurement.....	13
4.3. RF Conducted Measurement	13
5. CONDUCTED EMISSION MEASUREMET	14
5.1. Block Diagram of Test Setup	14
5.2. Power Line Conducted Emission Limit	14
5.3. Test Procedure	14
5.4. Conducted Emission Measurement Results	15
6. RADIATED EMISSION MEASUREMENT	17
6.1. Block Diagram of Test Setup	17
6.2. Radiated Emission Limits	19
6.3. Test Procedure	20
6.4. Measurement Result Explanation	21
6.5. Test Results.....	21
7. 6dB BANDWIDTH MEASUREMENT	31
7.1. Block Diagram of Test Setup	31
7.2. Specification Limits	31
7.3. Test Procedure	31
7.4. Test Results.....	31
8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	33
8.1. Block Diagram of Test Setup	33
8.2. Specification Limits	33
8.3. Test Procedure	33
8.4. Test Results.....	34
9. EMISSION LIMITATIONS MEASUREMENT	35
9.1. Block Diagram of Test Setup	35
9.2. Specification Limits	35
9.3. Test Procedure	35

9.4. Test Results.....	36
10. POWER SPECTRAL DENSITY	41
10.1. Block Diagram of Test Setup	41
10.2. Specification Limits	41
10.3. Test Procedure	41
10.4. Test Results.....	42
11. DEVIATION TO TEST SPECIFICATIONS.....	43

APPENDIX A TEST PHOTOGRAPHS

TEST REPORT CERTIFICATION

Applicant : VesCir Ltd.
Manufacture : VesCir Ltd.
Product Name : Skin condition & Environment analyzer
Model No. : CA516
Serial No. : N/A
Brand : defiderm
Power Supply : DC 3.8V

Rules of Compliance and Measurement Standards:

47 CFR FCC Part 15 Subpart C: 2015

ANSI C63.10:2013

KDB 558074 D01 DTS Meas Guidance v03r05

AUDIX Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **AUDIX Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Test: 2016. 06. 21 ~ 07. 12

Date of Report: 2016. 07. 12

Producer: Annie Yu
(Annie Yu/Administrator)

Signatory: Ben Cheng
(Ben Cheng/Manager)

1. REPORT HISTORY

Revision	Date	Revision Summary	Report Number
0	2016. 07. 12	Original Report.	EM-F160412

2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.247(d)/15.205	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)(3)	Maximum Peak Output	PASS
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	Power Spectral Density	PASS
15.203	Antenna Requirement	PASS

Note: The EUT only employs battery power for operation, so it is unnecessary to test.

3. GENERAL INFORMATION

3.1. Description of EUT

Product	Skin condition & Environment analyzer
Model Number	CA516
Serial Number	N/A
Brand Name	defiderm
Applicant	VesCir Ltd. 10F., No.272, Jixian Rd., Luzhou Dist., New Taipei City Taiwan
Manufacture	VesCir Ltd. 1F., No.5, Ln. 154, Siwei Rd., Da'an Dist., Taipei City 106, Taiwan (R.O.C.)
RF Features	Bluetooth Low Energy (BLE)
Transmit Type	1T1R
Date of Receipt of Sample	2016. 03. 17

3.2. EUT Specifications Assessed in Current Report


Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
BLE	2402-2480	40	GFSK	1

Channel List			
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
37	2402	18	2442
00	2404	19	2444
01	2406	20	2446
02	2408	21	2448
03	2410	22	2450
04	2412	23	2452
05	2414	24	2454
06	2416	25	2456
07	2418	26	2458
08	2420	27	2460
09	2422	28	2462
10	2424	29	2464
38	2426	30	2466
11	2428	31	2468
12	2430	32	2470
13	2432	33	2472
14	2434	34	2474
15	2436	35	2476
16	2438	36	2478
17	2440	39	2480

3.3. Antenna Information

Antenna Part Number	Manufacture	Antenna Type	Frequency	Max Gain (dBi)
AT3216	ACX	Multilayer Chip Antenna	2400~2500MHz	0.5

3.4. Test Configuration

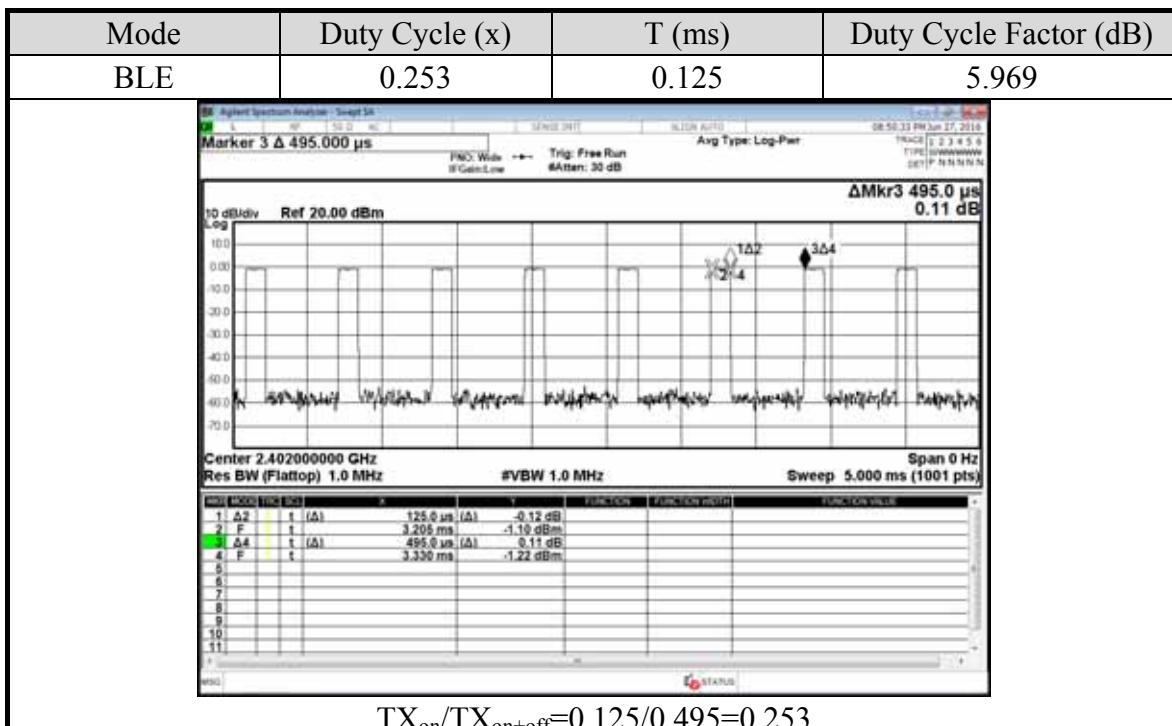

Note: When duty cycle is less than 98% (0.98) that duty cycle factor $10\log(1/x)$ is needed to add in conducted test items measured in average detector.

AC Conduction	
Test Case	Normal operation

Item		Test Channel
Radiated Test Case	Radiated Band Edge ^{Note1}	37/39
	Radiated Spurious Emission (30MHz-1GHz) ^{Note1}	37/17/39
	Radiated Spurious Emission (Above 1GHz) ^{Note1}	37/17/39
Conducted Test Case	6dB Bandwidth	37/17/39
	Peak Power Spectral Density	37/17/39
	Peak Output Power	37/17/39
	Band Edge	37/39
	Spurious Emission	37/17/39

Note 1:

Mobile Device, Device was pre-assessed with notebook PC and portable (3 axis), the worst case is tested with 3 axis.

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

Lie
Side
Stand

Note 2: We performed testing of the highest and lowest data rate.

3.5. Tested Supporting System List

3.5.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook PC	acer	MS2362	N/A	PPD-AAR5B22

3.5.2. Cable Lists

No.	Cable Description Of The Above Support Units
1.	USB Cable: Unshielded, Detachable, 0.8m Adapter: Chicony, M/N CPA09-A065N1 DC Cord: Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord: Unshielded, Detachable, 1.8m

3.6. Setup Configuration

3.6.1. EUT Configuration for Power Line Emission

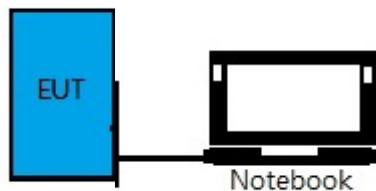

3.6.2. EUT Configuration for Radiated Emission



3.6.3. EUT Configuration for Conducted Test Items



3.7. Operating Condition of EUT

Test program “Light Blue” is used for enabling EUT RF function under continues transmitting and choosing data rate/ channel.

3.8. Description of Test Facility

Test Firm Name	:	AUDIX Technology Corporation EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Location & Facility	:	No. 8 Shielded Room No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
		Semi-Anechoic Chamber & Fully Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724
FCC OET Designation	:	TW1004 & TW1090

3.9. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	±3.5dB
Radiation Test	30MHz~1000MHz	± 3.68dB
	Above 1GHz	± 5.82dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESCS30	100265	2015. 08. 20	1 Year
2.	A.M.N.	R&S	ESH2-Z5	100366	2016. 03. 15	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-881-13	2016. 01. 07	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	101495	2016. 01. 17	1 Year
	Test Software	Audix	e3	V.120619C	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

4.2.1. Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2015. 09. 14	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2016. 06. 23	1 Year
3.	Amplifier	HP	8447D	2944A06305	2016. 02. 23	1 Year
4.	Bilog Antenna	TESEQ	CBL6112D	33821	2016. 01. 30	1 Year
5.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

4.2.2. Frequency Range Above 1GHz (Fully Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	2015. 08. 20	1 Year
2.	Amplifier	HP	8449B	3008A02678	2016. 03. 04	1 Year
3.	Horn Antenna	ETS-Lindgren	3117	00135902	2016. 03. 09	1 Year
4.	Horn Antenna	EMCO	3116	2653	2015. 10. 20	1 Year
5.	2.4GHz Notch Filter	K&L	7NSL10-244 1.5E130.5-00	1	2015. 07. 28	1 Year
6.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.


4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2015. 11. 28	1 Year
2.	Power Meter	Anritsu	ML2495A	1145008	2015. 10. 23	1 Year
3.	Power Sensor	Anritsu	MA2411B	1126096	2015. 10. 23	1 Year

5. CONDUCTED EMISSION MEASUREMET

5.1. Block Diagram of Test Setup

Shielded Room Setup Diagram

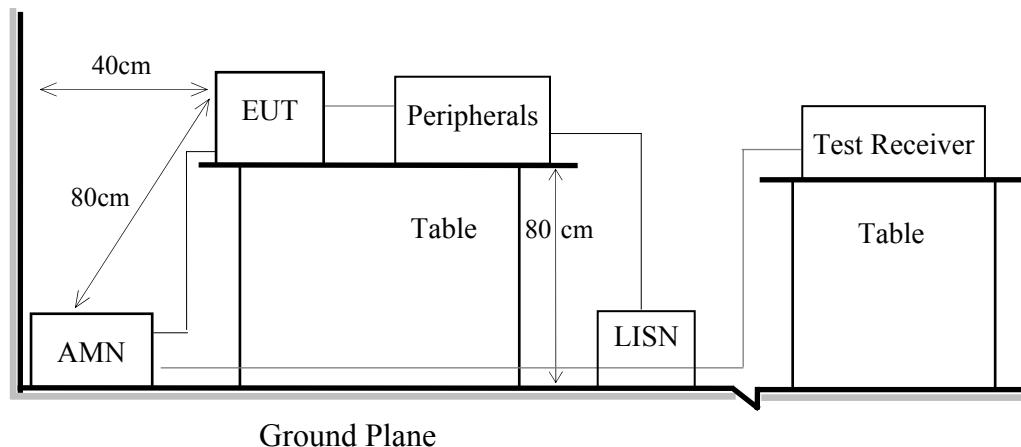

5.2. Power Line Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector,

the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure


- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Conducted Emission Measurement Results

PASSED.

Test Date	2016/07/12	Temp./Hum.	26 /53%
Test Voltage	DC 5V (via USB)		


Data: 2 File: D:\test data\REPORT\2016\C1M1603XXX\C1M1603232-C-D-RF.EM6 (4)

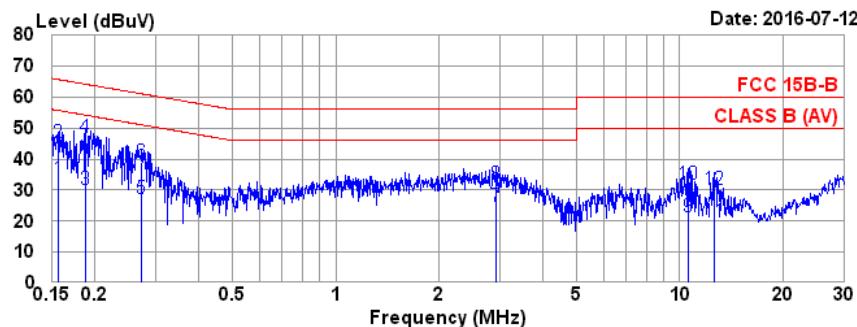

Site no. : No.7 Shielded Room Data no. : 2
 Condition : ESH2-Z5 366 Phase : NEUTRAL
 Limit : FCC 15B-B
 Env. / Ins. : 26°C / 53% ESCS (0265) Engineer : Nick Du
 EUT : CA516
 Power Rating : DC 5V
 Test Mode : Charger

Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Emission					Remark
				Reading (dB μ V)	Level (dB μ V)	Limits (dB μ V)	Margin (dB)		
1 0.156	0.17	0.03	9.85	23.35	33.40	55.69	22.29	Average	
2 0.156	0.17	0.03	9.85	35.34	45.39	65.69	20.30	QP	
3 0.187	0.17	0.03	9.85	20.17	30.22	54.15	23.93	Average	
4 0.187	0.17	0.03	9.85	36.92	46.97	64.15	17.18	QP	
5 0.273	0.18	0.03	9.85	17.36	27.42	51.03	23.61	Average	
6 0.273	0.18	0.03	9.85	29.00	39.06	61.03	21.97	QP	
7 2.915	0.28	0.07	9.92	14.53	24.80	46.00	21.20	Average	
8 2.915	0.28	0.07	9.92	21.45	31.72	56.00	24.28	QP	
9 10.564	0.47	0.14	9.88	10.69	21.18	50.00	28.82	Average	
10 10.564	0.47	0.14	9.88	21.54	32.03	60.00	27.97	QP	
11 12.649	0.57	0.15	9.89	9.23	19.84	50.00	30.16	Average	
12 12.649	0.57	0.15	9.89	19.56	30.17	60.00	29.83	QP	

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

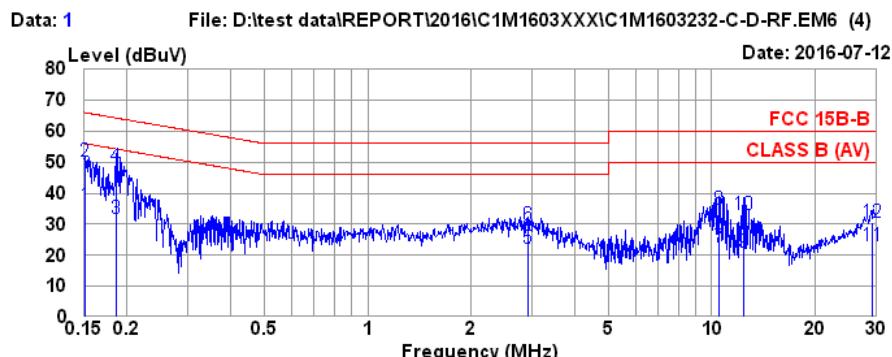

Site no. : No.7 Shielded Room Data no. : 1
 Condition : ESH2-Z5 366 Phase : LINE
 Limit : FCC 15B-B
 Env. / Ins. : 26°C / 53% ESCS (0265) Engineer : Nick Du
 EUT : CA516
 Power Rating : DC 5V
 Test Mode : Charger

Freq. (MHz)	AMN Factor	Cable Loss (dB)	Pulse Att. (dB)	Emission					Remark
				Reading (dB μ V)	Level (dB μ V)	Limits (dB μ V)	Margin (dB)		
1 0.151	0.17	0.03	9.85	25.84	35.89	55.96	20.07	Average	
2 0.151	0.17	0.03	9.85	40.15	50.20	65.96	15.76	QP	
3 0.185	0.16	0.03	9.85	21.84	31.88	54.24	22.36	Average	
4 0.185	0.16	0.03	9.85	38.50	48.54	64.24	15.70	QP	
5 2.915	0.27	0.07	9.92	12.03	22.29	46.00	23.71	Average	
6 2.915	0.27	0.07	9.92	19.32	29.58	56.00	26.42	QP	
7 10.452	0.43	0.14	9.88	12.06	22.51	50.00	27.49	Average	
8 10.452	0.43	0.14	9.88	24.42	34.87	60.00	25.13	QP	
9 12.384	0.51	0.15	9.89	10.55	21.10	50.00	28.90	Average	
10 12.384	0.51	0.15	9.89	22.46	33.01	60.00	26.99	QP	
11 29.216	0.74	0.26	10.00	12.20	23.20	50.00	26.80	Average	
12 29.216	0.74	0.26	10.00	19.48	30.48	60.00	29.52	QP	

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

6. RADIATED EMISSION MEASUREMENT


6.1. Block Diagram of Test Setup

6.1.1. Block Diagram of EUT

Indicated as section 3.6


6.1.2. Semi Anechoic Chamber (3m) Setup Diagram for 9kHz-30MHz

Antenna Tower

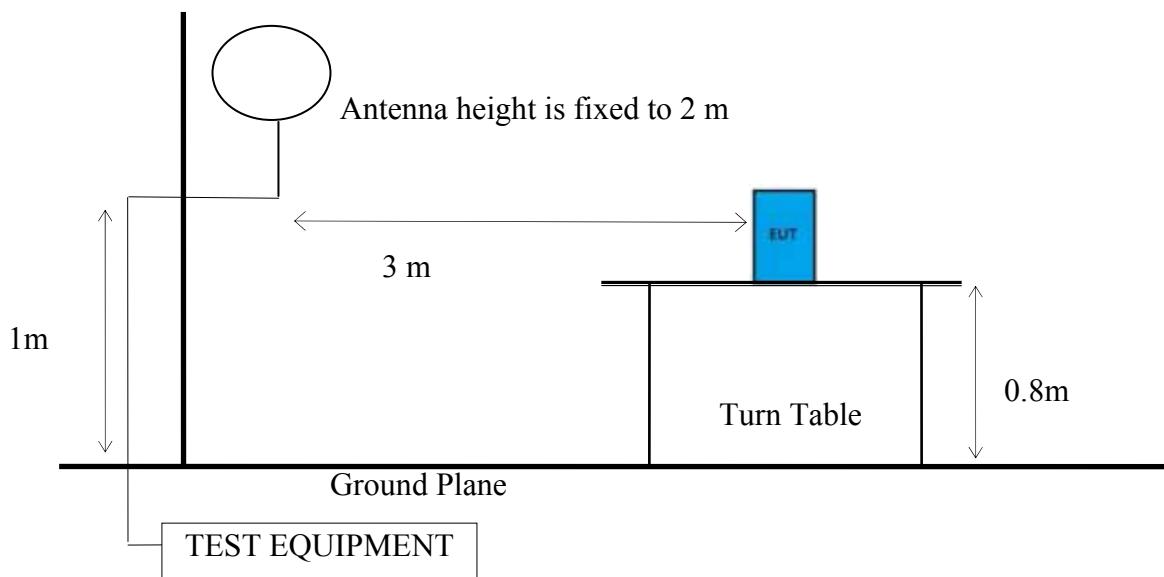


6.1.3. Semi Anechoic Chamber (3m) Setup Diagram for 30-1000 MHz

Antenna Tower

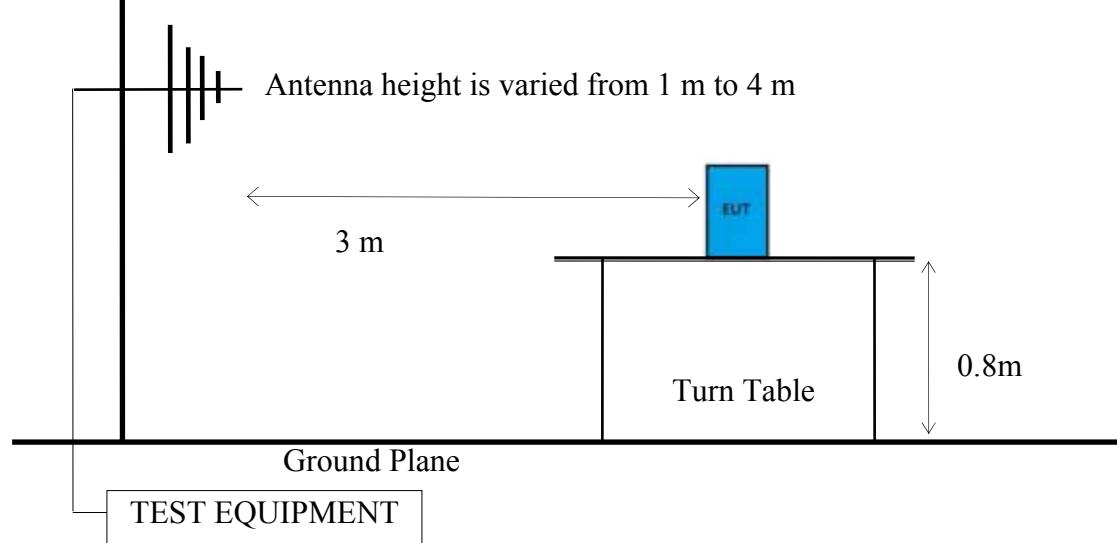

6.1.4. Fully Anechoic Chamber (3m) Setup Diagram for above 1GHz

Antenna Tower

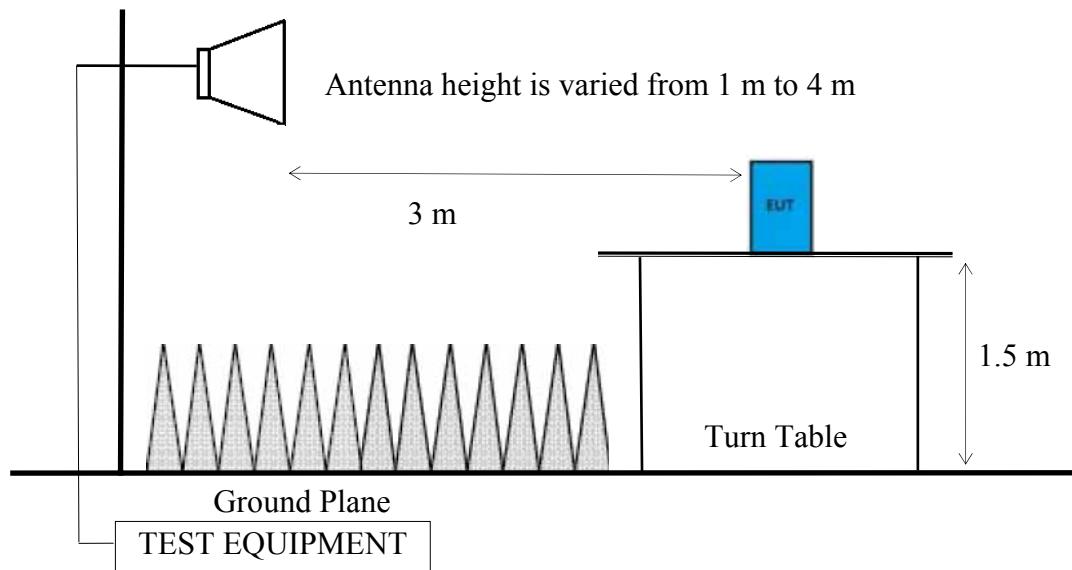

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6	2400/kHz
0.490 - 1.705	30	87.6	24000/kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 10th harmonic:

The EUT setup on the turn find table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW \geq 3 x RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average for finally measurement.

Frequency above 1GHz to 10th harmonic:

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW \geq 3 x RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average for finally measurement.

Average Measurement:**Option 1:**

- (1) RBW = 1 MHz
- (2) VBW = 1/T
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation

Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading

Average Emission Level = Antenna Factor + Cable Loss + Meter Reading

Average Emission Level = Peak Emission Level + DCCF

Duty Cycle Correction Factor (DCCF) = $20\log(\text{TX}_{\text{on}}/\text{TX}_{\text{on+off}})$ presented in section 3.4

ERP = Peak Emission Level - 95.2dB - 2.14dB

6.5. Test Results

PASSED.

Test Date	2016/06/24	Temp./Hum.	26 /46%
Test Voltage	DC 3.8V (Via Battery)		

6.5.1. Emissions within Restricted Frequency Bands

6.5.1.1. Frequency Below 1 GHz

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin	Detector
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
101.78	11.03	3.23	10.40	24.66	43.50	18.84	Peak
298.69	13.10	4.65	8.19	25.94	46.00	20.06	Peak
827.34	20.18	7.27	4.22	31.67	46.00	14.33	Peak

Antenna at Vertical Polarization

Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin	Detector
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
31.94	17.52	2.37	4.92	24.81	40.00	15.19	Peak
466.50	16.53	6.20	4.34	27.07	46.00	18.93	Peak
747.80	19.38	6.94	4.29	30.61	46.00	15.39	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin	Detector
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
31.94	17.52	2.37	2.55	22.44	40.00	17.56	Peak
101.78	11.03	3.23	10.03	24.29	43.50	19.21	Peak
795.33	19.99	7.15	6.25	33.39	46.00	12.61	Peak

Antenna at Vertical Polarization

Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin	Detector
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
30.97	18.07	2.34	3.26	23.67	40.00	16.33	Peak
99.84	10.90	3.22	8.16	22.28	43.50	21.22	Peak
465.53	16.51	6.19	5.65	28.35	46.00	17.65	Peak

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization


Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin	Detector
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
30.97	18.07	2.34	3.78	24.19	40.00	15.81	Peak
183.26	9.15	3.86	11.20	24.21	43.50	19.29	Peak
913.67	20.65	7.62	4.45	32.72	46.00	13.28	Peak

Antenna at Vertical Polarization

Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin	Detector
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
30.00	18.62	2.32	3.62	24.56	40.00	15.44	Peak
476.20	16.64	6.27	4.54	27.45	46.00	18.55	Peak
666.32	18.60	6.65	4.87	30.12	46.00	15.88	Peak


6.5.1.2. Frequency Above 1 GHz to 10th harmonics

Band Edge:

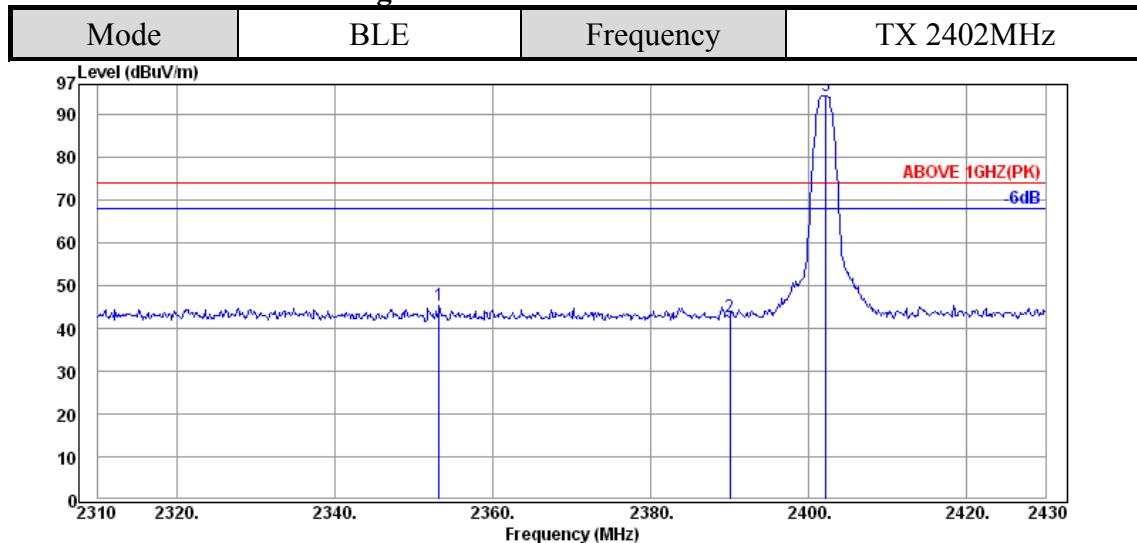

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2353.20	31.64	6.03	7.81	45.48	74.00	28.52	Peak
2390.04	31.68	6.08	4.98	42.74	74.00	31.26	Peak
2402.16	31.69	6.09	56.57	94.35	---	---	Peak

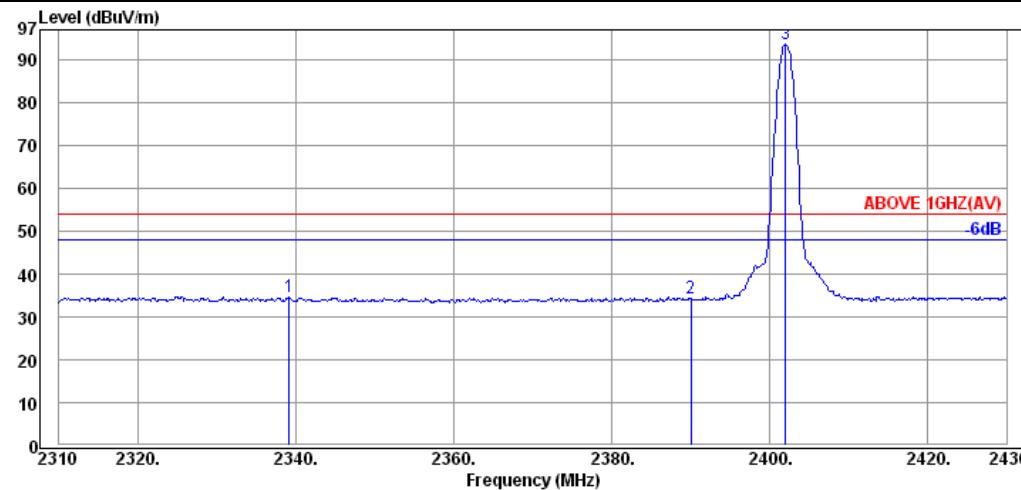


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2339.16	31.62	6.01	-2.90	34.73	54.00	19.27	Average
2390.04	31.68	6.08	-3.59	34.17	54.00	19.83	Average
2402.04	31.69	6.09	55.90	93.68	---	---	Average

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

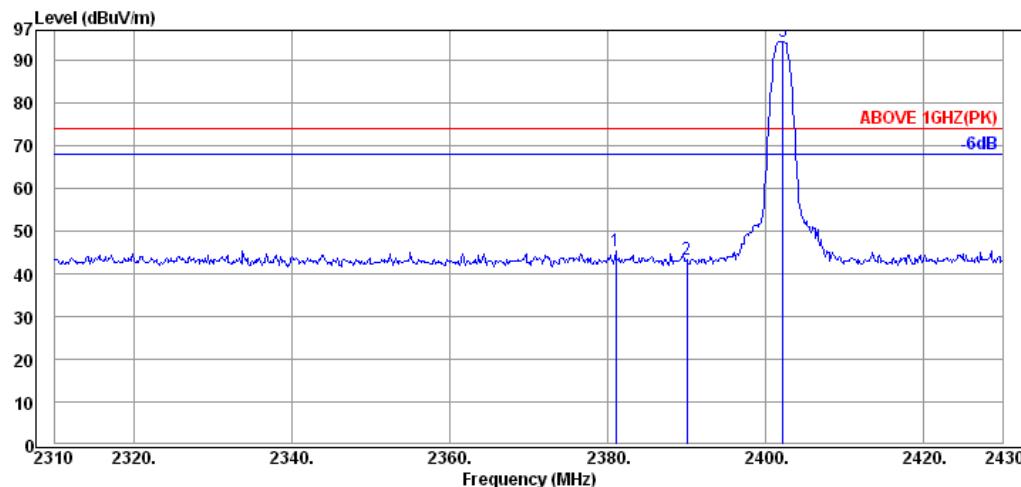

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2381.04	31.67	6.07	7.46	45.20	74.00	28.80	Peak
2390.04	31.68	6.08	5.46	43.22	74.00	30.78	Peak
2402.16	31.69	6.09	56.58	94.36	---	---	Peak

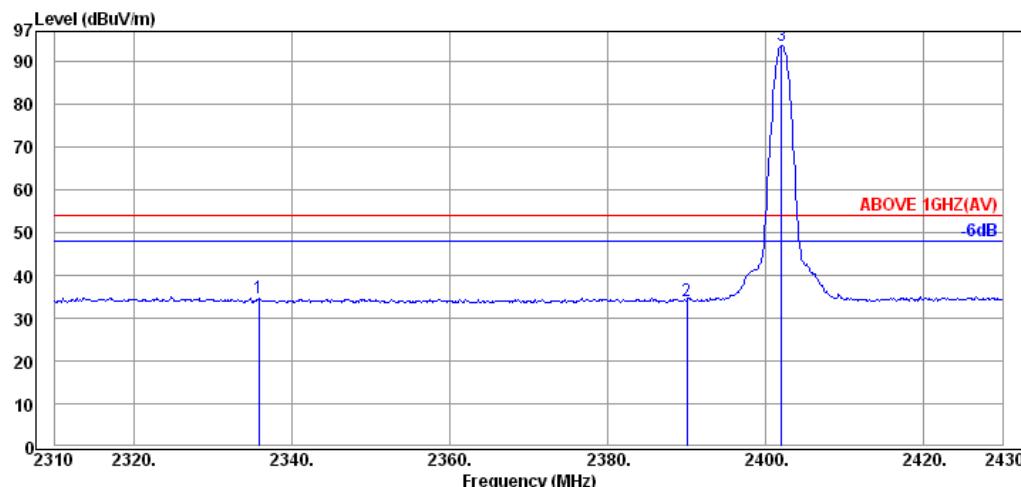

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2335.80	31.62	6.01	-3.04	34.59	54.00	19.41	Average
2390.04	31.68	6.08	-3.76	34.00	54.00	20.00	Average
2402.04	31.69	6.09	55.89	93.67	---	---	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

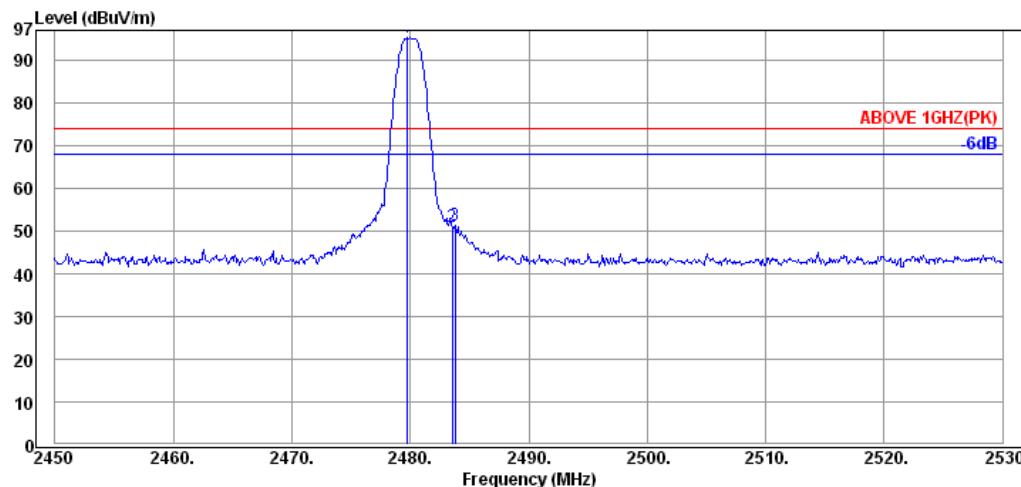

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2479.76	31.78	6.18	57.23	95.19	---	---	Peak
2483.52	31.78	6.19	12.94	50.91	74.00	23.09	Peak
2483.76	31.78	6.19	13.45	51.42	74.00	22.58	Peak

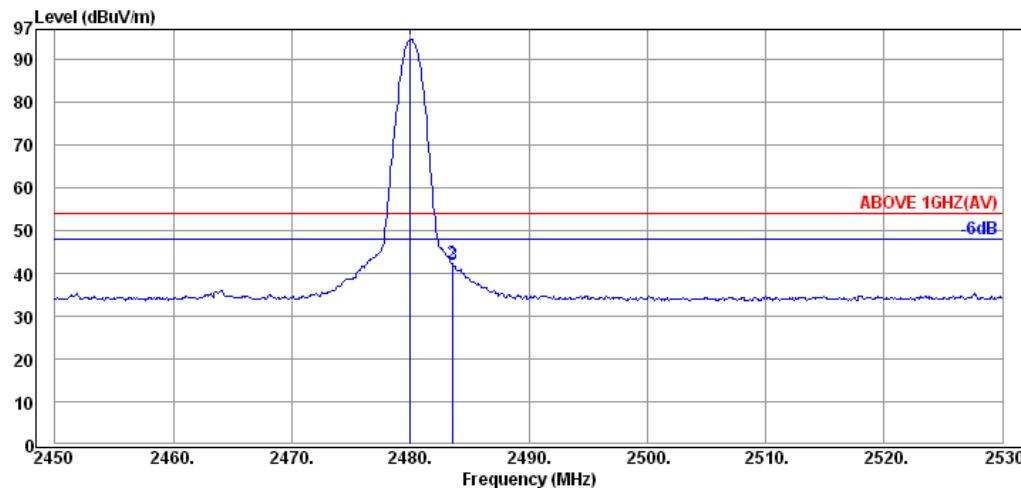

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2480.00	31.78	6.18	56.57	94.53	---	---	Average
2483.52	31.78	6.19	4.27	42.24	54.00	11.76	Average
2483.60	31.78	6.19	4.04	42.01	54.00	11.99	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

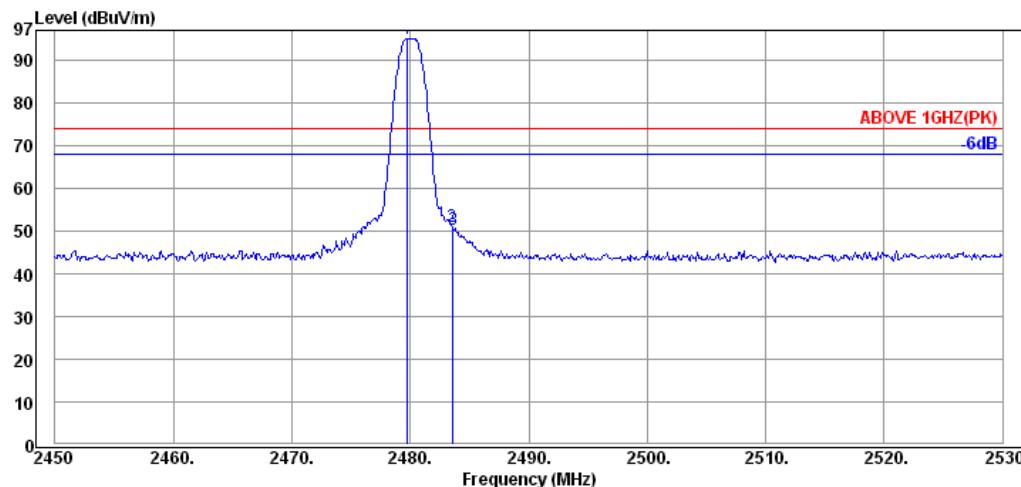**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2479.76	31.78	6.18	57.14	95.10	---	---	Peak
2483.52	31.78	6.19	12.93	50.90	74.00	23.10	Peak
2483.60	31.78	6.19	12.33	50.30	74.00	23.70	Peak

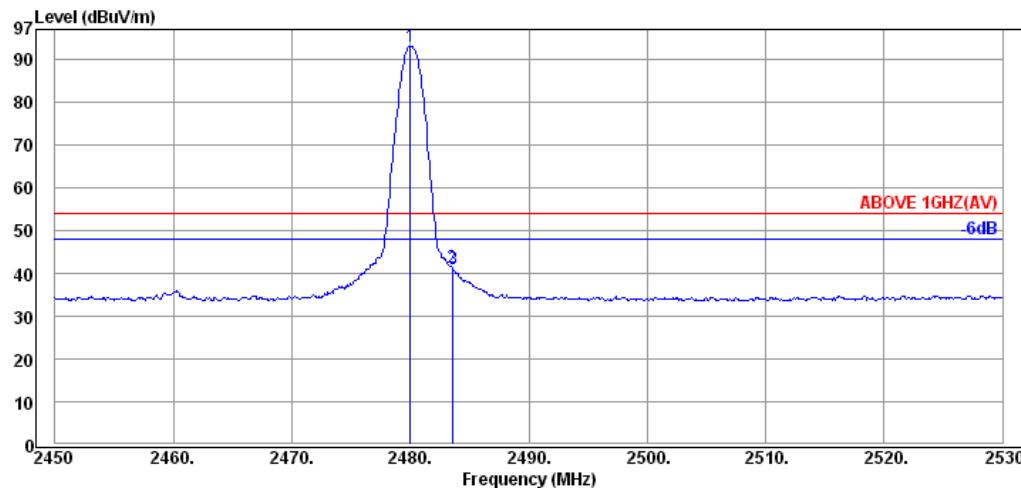**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2480.00	31.78	6.18	55.11	93.07	---	---	Average
2483.52	31.78	6.19	3.31	41.28	54.00	12.72	Average
2483.60	31.78	6.19	2.95	40.92	54.00	13.08	Average

6.5.2. Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
4800.00	33.82	8.87	5.44	48.13	54.00	5.87 Peak

Antenna at Vertical Polarization

Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
4810.00	33.82	8.87	6.87	49.56	54.00	4.44 Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
4885.00	33.86	9.14	3.49	46.49	54.00	7.51 Peak

Antenna at Vertical Polarization

Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
4885.00	33.86	9.14	6.26	49.26	54.00	4.74 Peak

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

Antenna at Vertical Polarization


Emission Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Limits	Margin	Detector
(MHz)	(dB/m)	(dB)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960.00	33.88	9.40	4.90	48.18	54.00	5.82	Peak

6.5.3. Emissions in Non-restricted Frequency Bands

Pursuant to KDB 558074 D01 v03r03 that emission levels below the 15.209 general radiated emissions limits is not required.

7. 6dB BANDWIDTH MEASUREMENT

7.1. Block Diagram of Test Setup

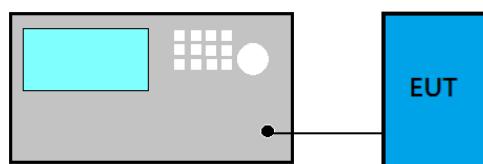

7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

7.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

Option 2

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.


7.4. Test Results

Test Date	2016/06/21	Temp./Hum.	24 /60%
Cable Loss	1dB	Test Voltage	DC 3.8V (Via Battery)

7.4.1. 6dB Bandwidth Result


Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)
BLE	2402	0.7303
	2440	0.7301
	2480	0.7300

7.4.2. Measurement Plots

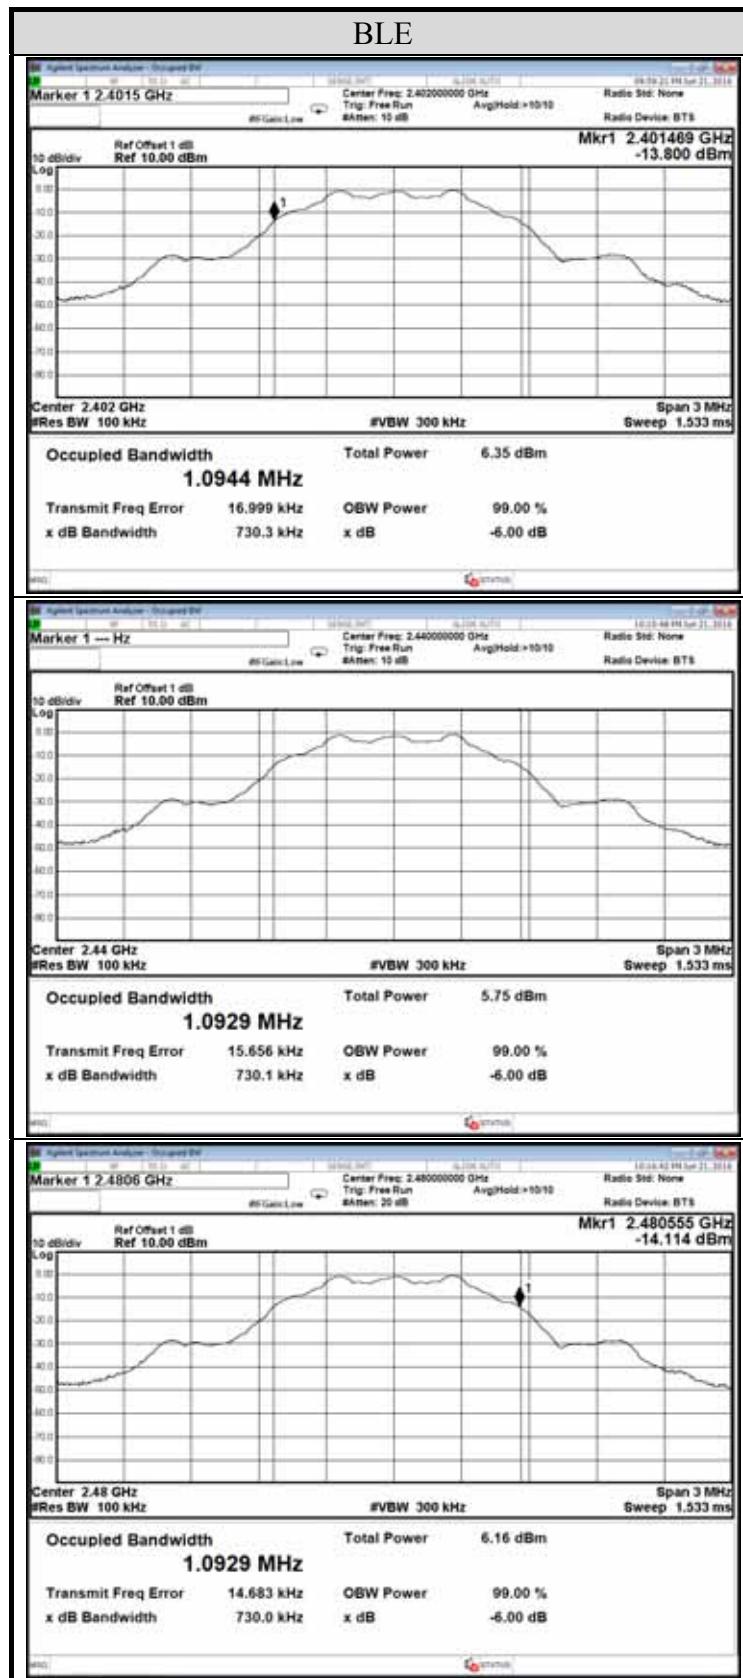

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

8.1. Block Diagram of Test Setup

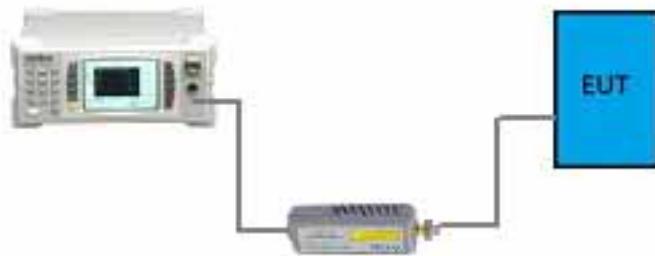

8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm)

8.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

■PKPM1 Peak power meter method:

EUT is connected to power sensor and record the maximum output power.

Method AVGPM (Measurement using an RF average power meter):

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.5.1 is < 98%.

RBW≥DTS bandwidth

- (1) Set span to at least 3 times the OBW
- (2) Set RBW \geq OBW
- (3) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (4) Detector = Peak
- (5) Trace mode = max hold
- (6) Sweep = auto couple.
- (7) To find the peak amplitude level.

8.4. Test Results


Test Date	2016/06/21	Temp./Hum.	24 /60%
Cable Loss	1dB	Test Voltage	DC 3.8V (Via Battery)

Mode	Centre Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	
BLE	2402	0.044	0.001010	< 30 dBm (1 W)
	2440	-0.543	0.000882	
	2480	-0.148	0.000966	

Note: The results have been included cable loss.

9. EMISSION LIMITATIONS MEASUREMENT

9.1. Block Diagram of Test Setup

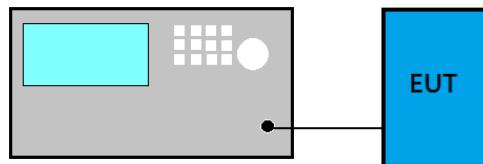

9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).

9.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

Reference Level


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.


Emission Level Measurement

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.


9.4. Test Results

Test Date	2016/06/21	Temp./Hum.	24 /60%
Mode	BLE	Frequency	TX 2402MHz
Cable Loss	1dB	Test Voltage	DC 3.8V (Via Battery)

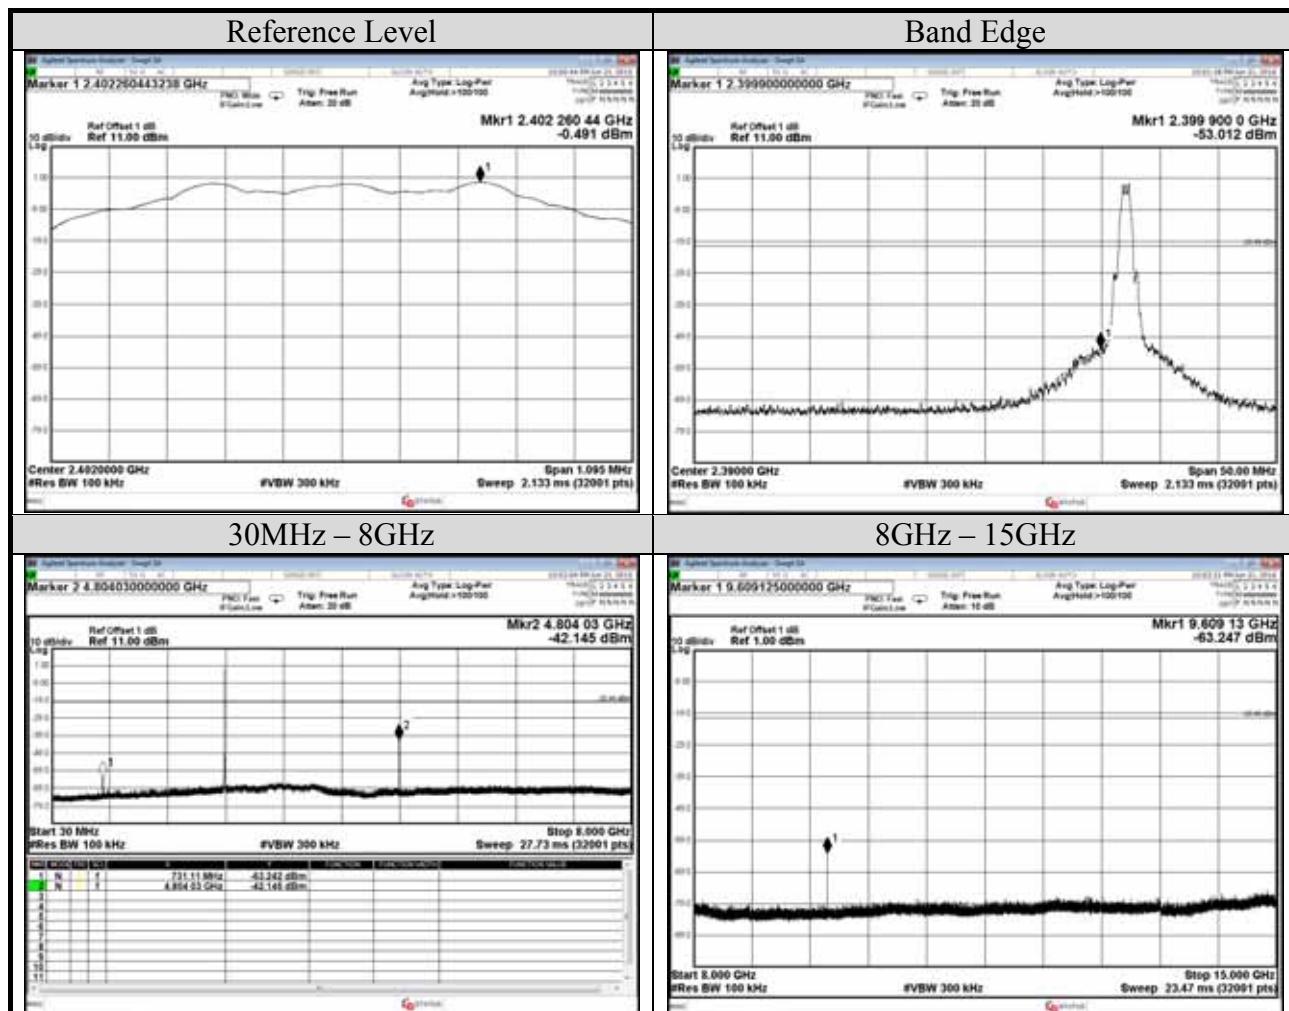


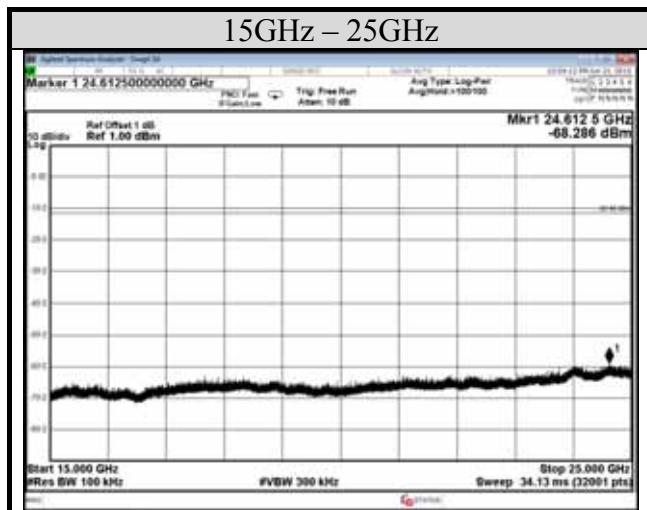


Test Date	2016/06/21	Temp./Hum.	24 /60%
Mode	BLE	Frequency	TX 2440MHz
Cable Loss	1dB	Test Voltage	DC 3.8V (Via Battery)

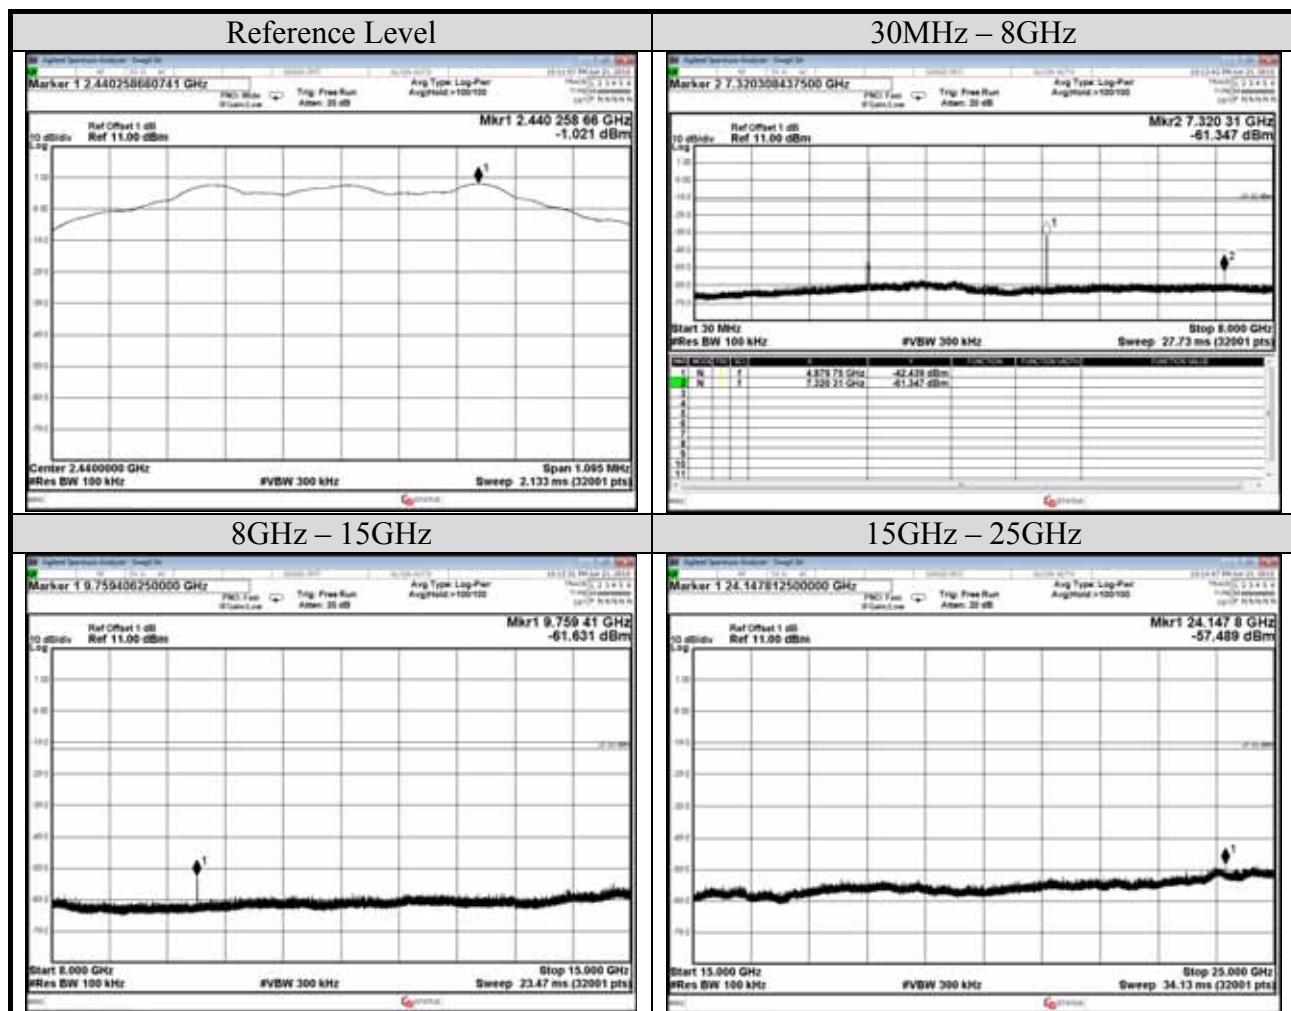


Test Date	2016/06/21	Temp./Hum.	24 /60%
Mode	BLE	Frequency	TX 2480MHz
Cable Loss	1dB	Test Voltage	DC 3.8V (Via Battery)

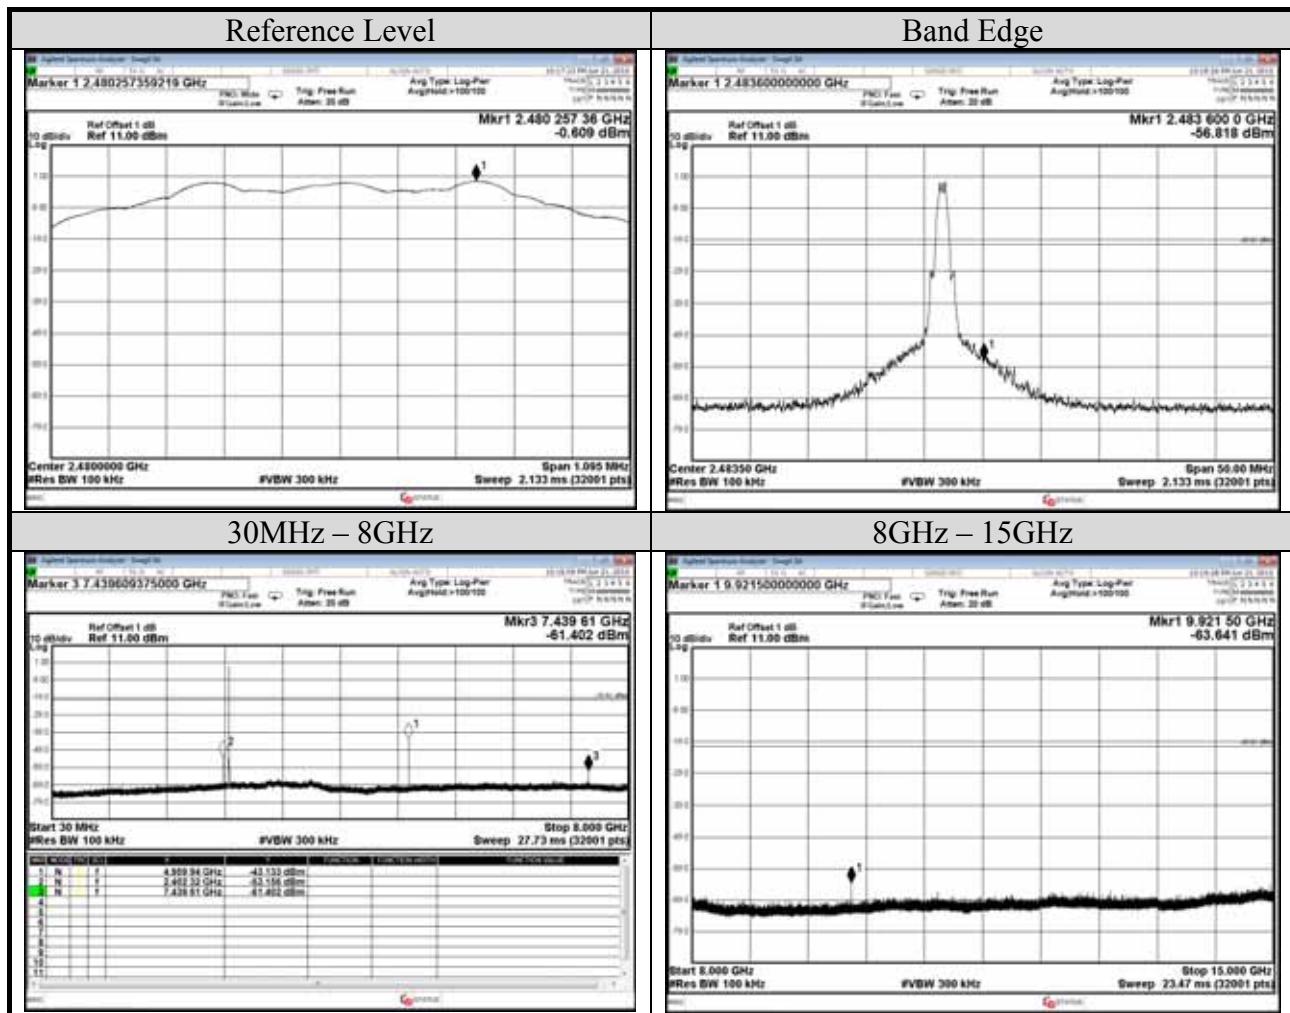

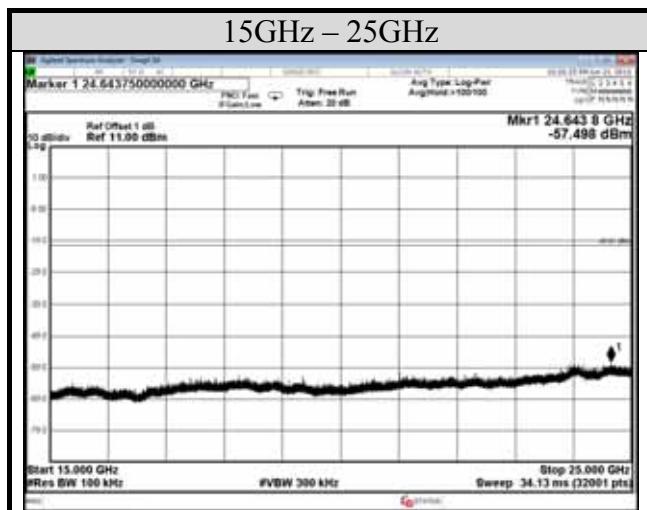

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

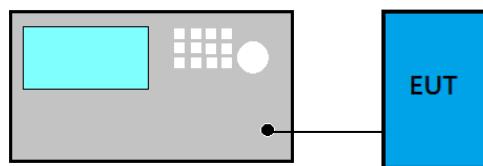

10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

10.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

■Method PKPSD (peak PSD)


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq 3 \times \text{RBW}$.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector= RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.5.1. $< 98\%$.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.4. Test Results

Test Date	2016/06/21	Temp./Hum.	24 /60%
Cable Loss	1dB	Test Voltage	DC 3.8V (Via Battery)

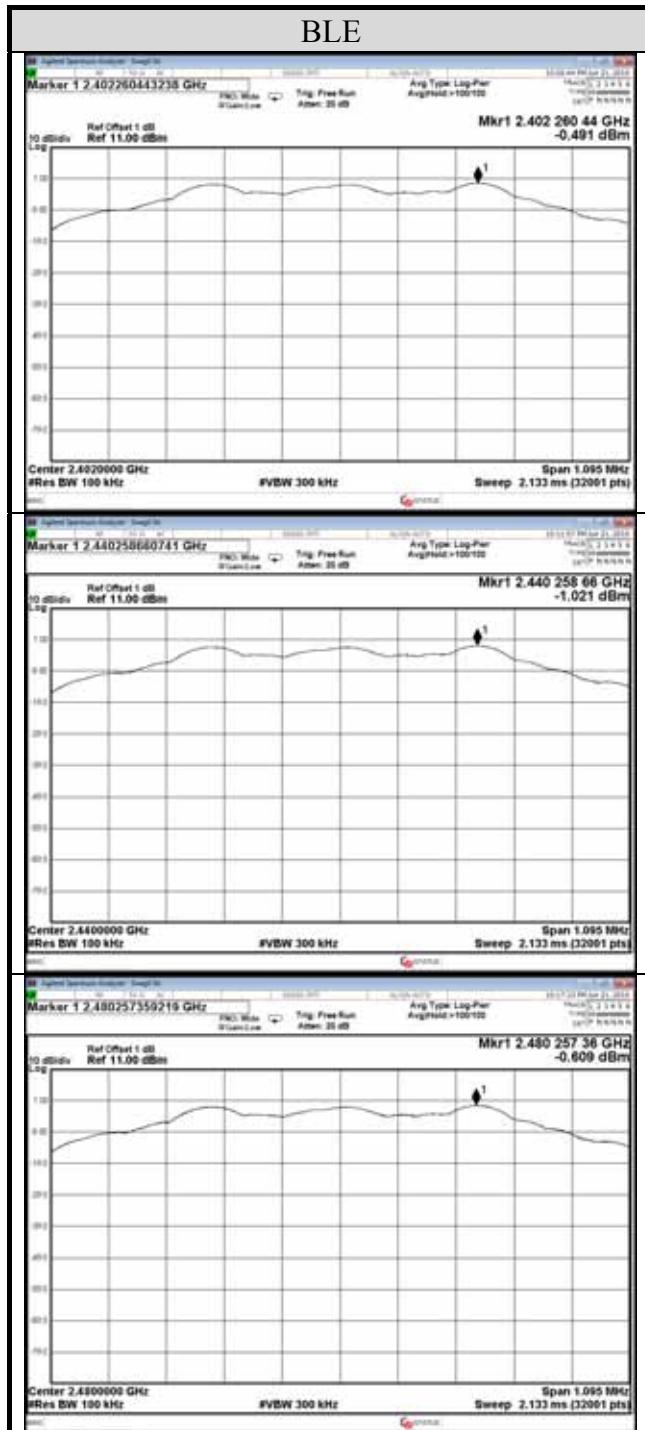

11. DEVIATION TO TEST SPECIFICATIONS

【NONE】