


Date: 13/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I 6

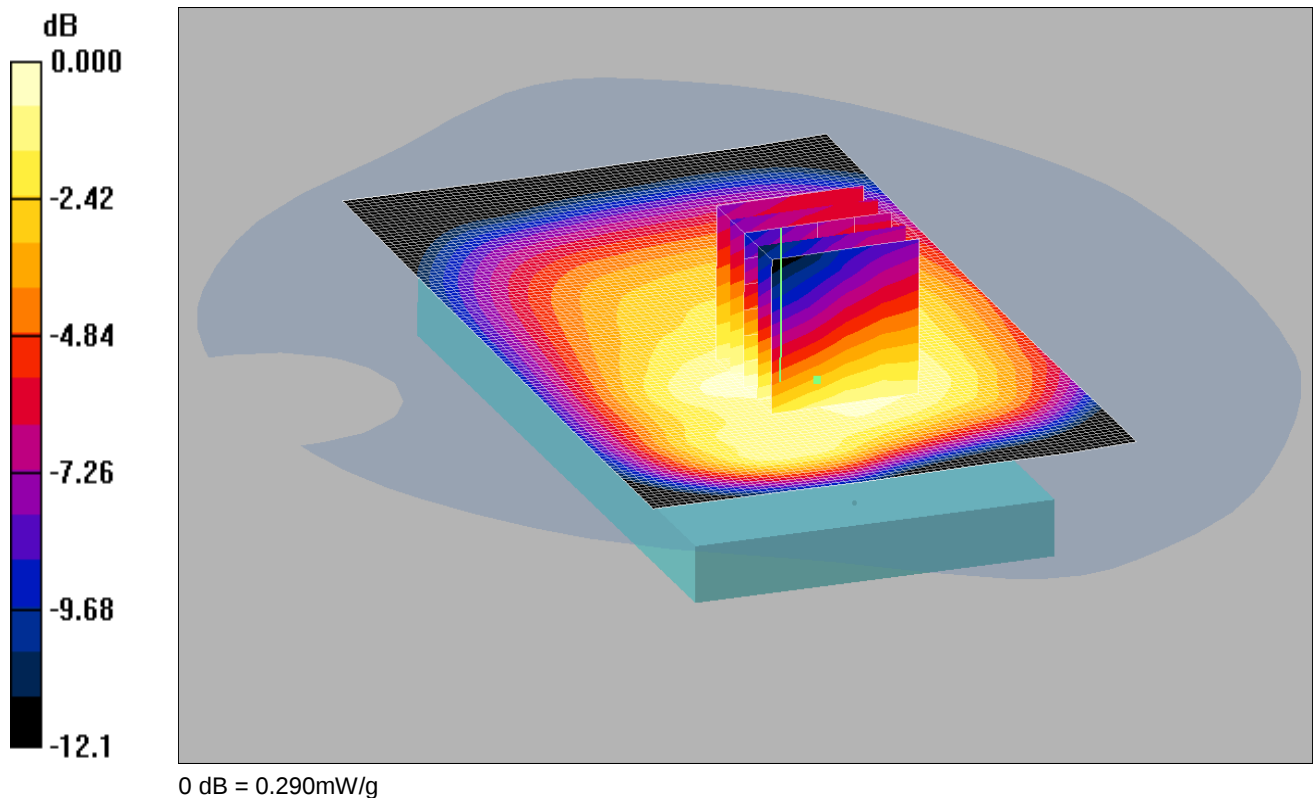

Communication System: LTE - Band 13 / 10MHz Channel; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: 900/750 MHz MSL Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.949 \text{ mho/m}$; $\epsilon_r = 54.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.11, 6.11, 6.11);- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn450; Calibrated: 28/09/2015
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back 1RB High - Hotspot - PBx 3/Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.285 mW/g

Back 1RB High - Hotspot - PBx 3/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.9 V/m; Power Drift = 0.015 dB


Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.290 mW/g

Date: 19/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I 6

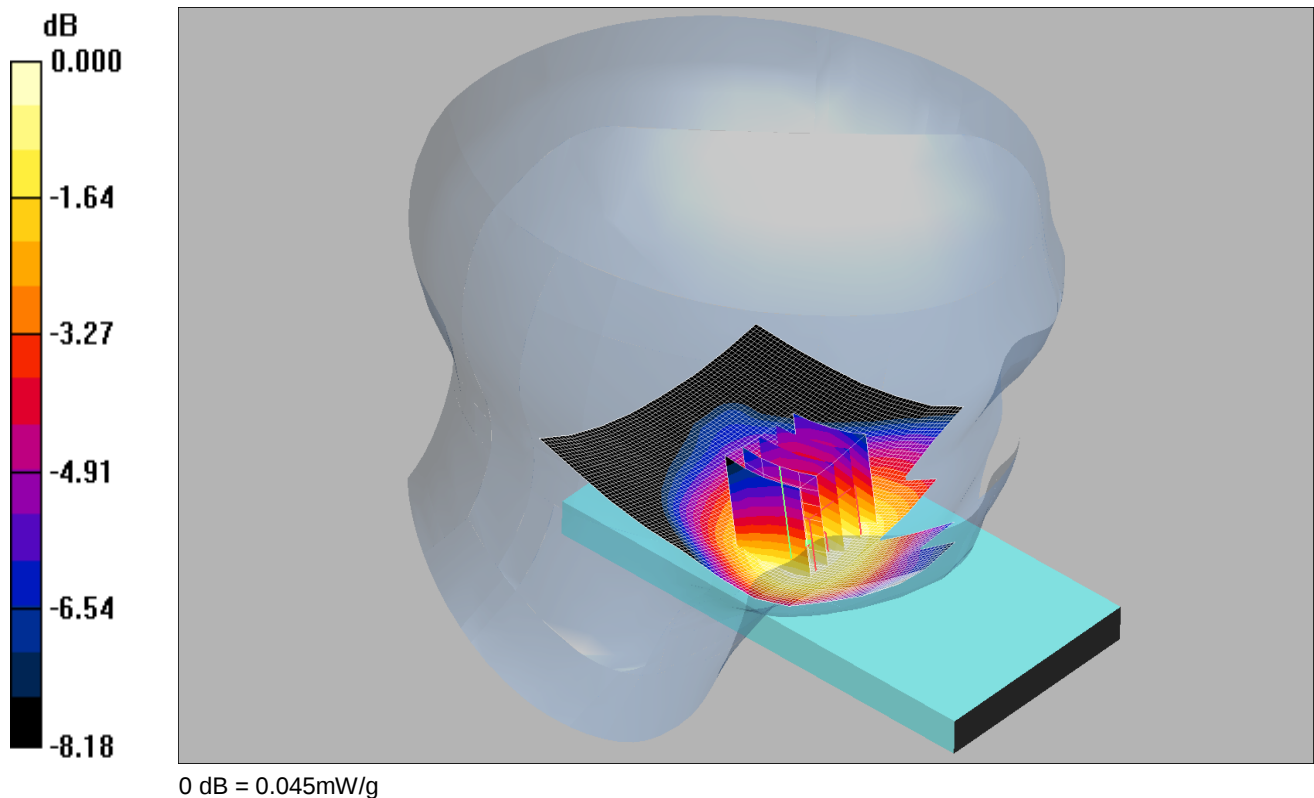

Communication System: LTE - Band 17 / 10MHz Channel; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 710$ MHz; $\sigma = 0.838$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1586; ConvF(6.6, 6.6, 6.6);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn450; Calibrated: 28/09/2015
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Head - PBx/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.045 mW/g

Touch Left - Head - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.49 V/m; Power Drift = 0.046 dB


Peak SAR (extrapolated) = 0.054 W/kg

SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.045 mW/g

Date: 17/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

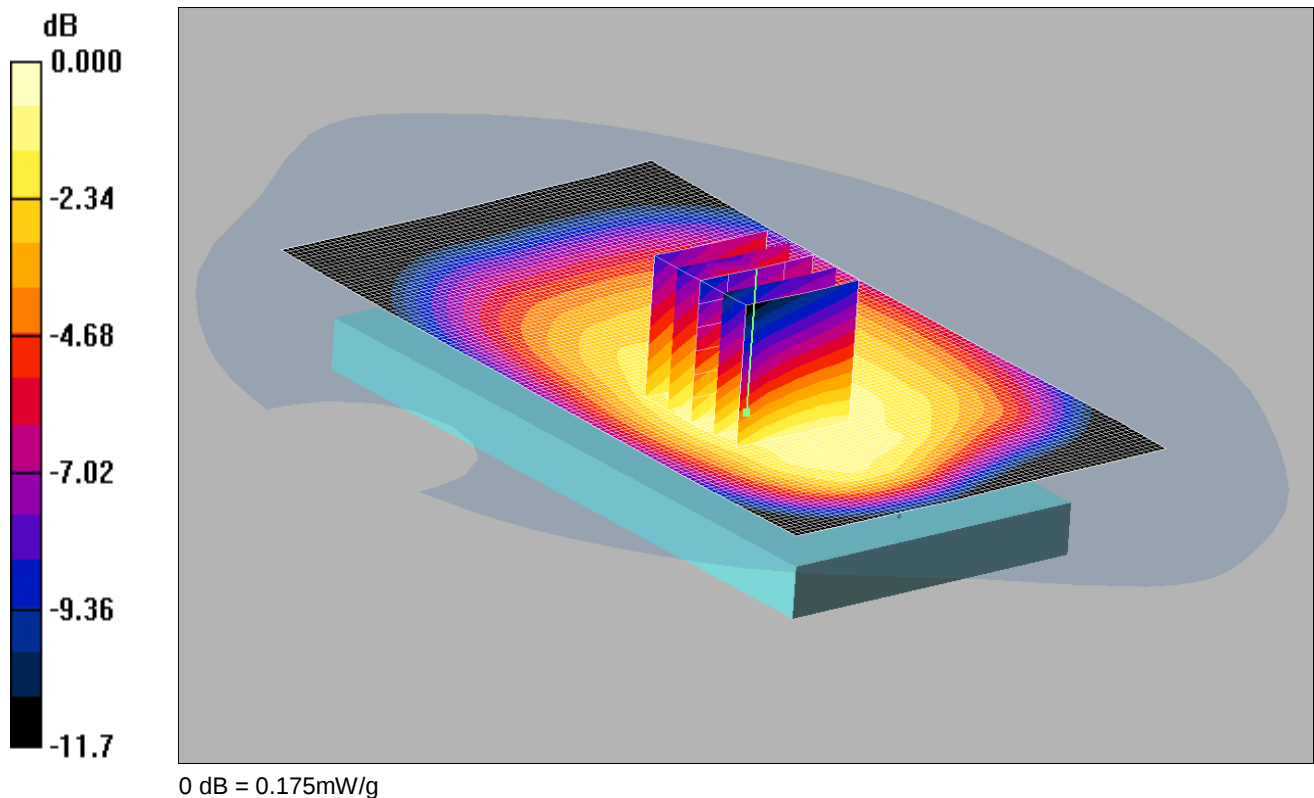

Communication System: LTE - Band 17 / 10MHz Channel; Frequency: 709 MHz; Duty Cycle: 1:1
Medium: 900/750 MHz MSL Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1528; ConvF(6.11, 6.11, 6.11);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn450; Calibrated: 28/09/2015
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back 1RB High - Hotspot - PBx 3/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.164 mW/g

Back 1RB High - Hotspot - PBx 3/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.4 V/m; Power Drift = 0.080 dB
Peak SAR (extrapolated) = 0.214 W/kg
SAR(1 g) = 0.160 mW/g; SAR(10 g) = 0.116 mW/g
Maximum value of SAR (measured) = 0.175 mW/g

Date: 19/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

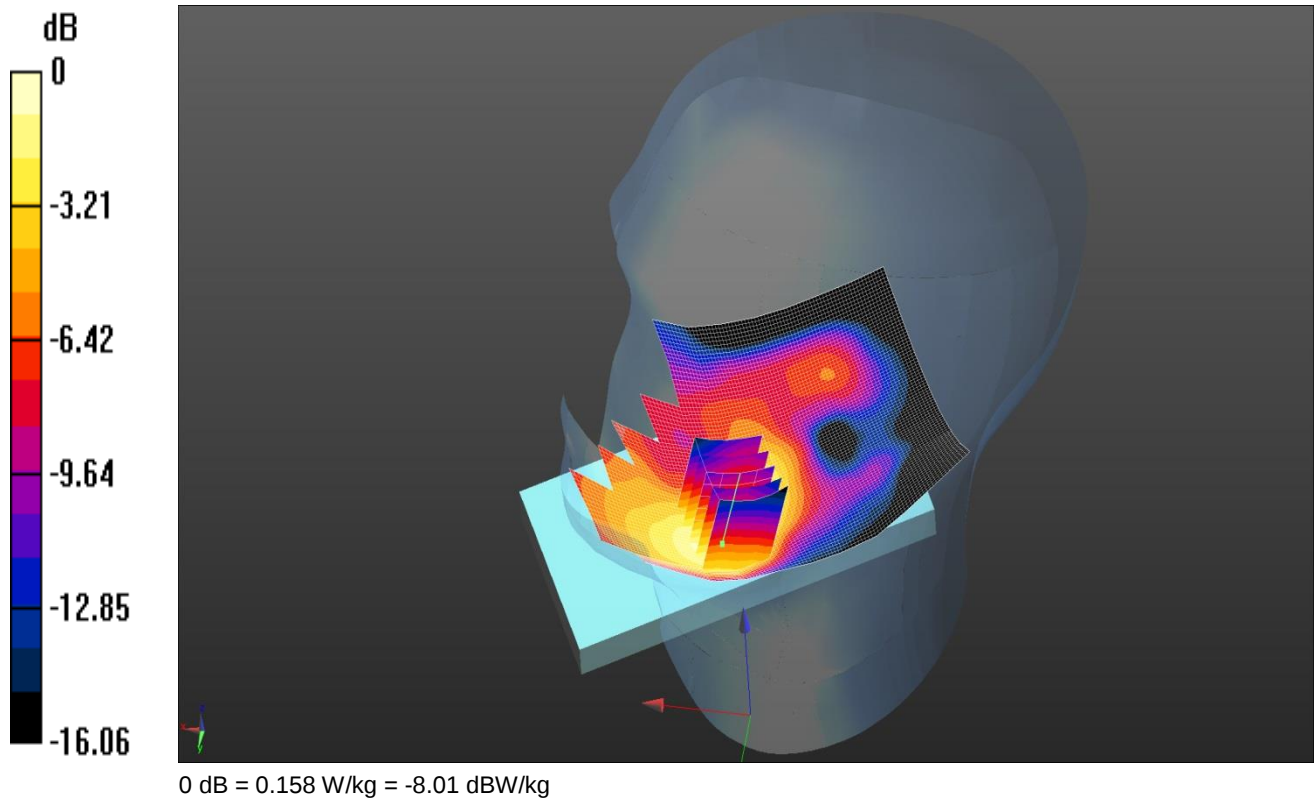

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: 1900 HSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.173$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(5.07, 5.07, 5.07); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right 1RB Low - Head - PB0/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.154 W/kg

Configuration/Touch Right 1RB Low - Head - PB0/Zoom Scan (7x7x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.61 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

Date: 9/5/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

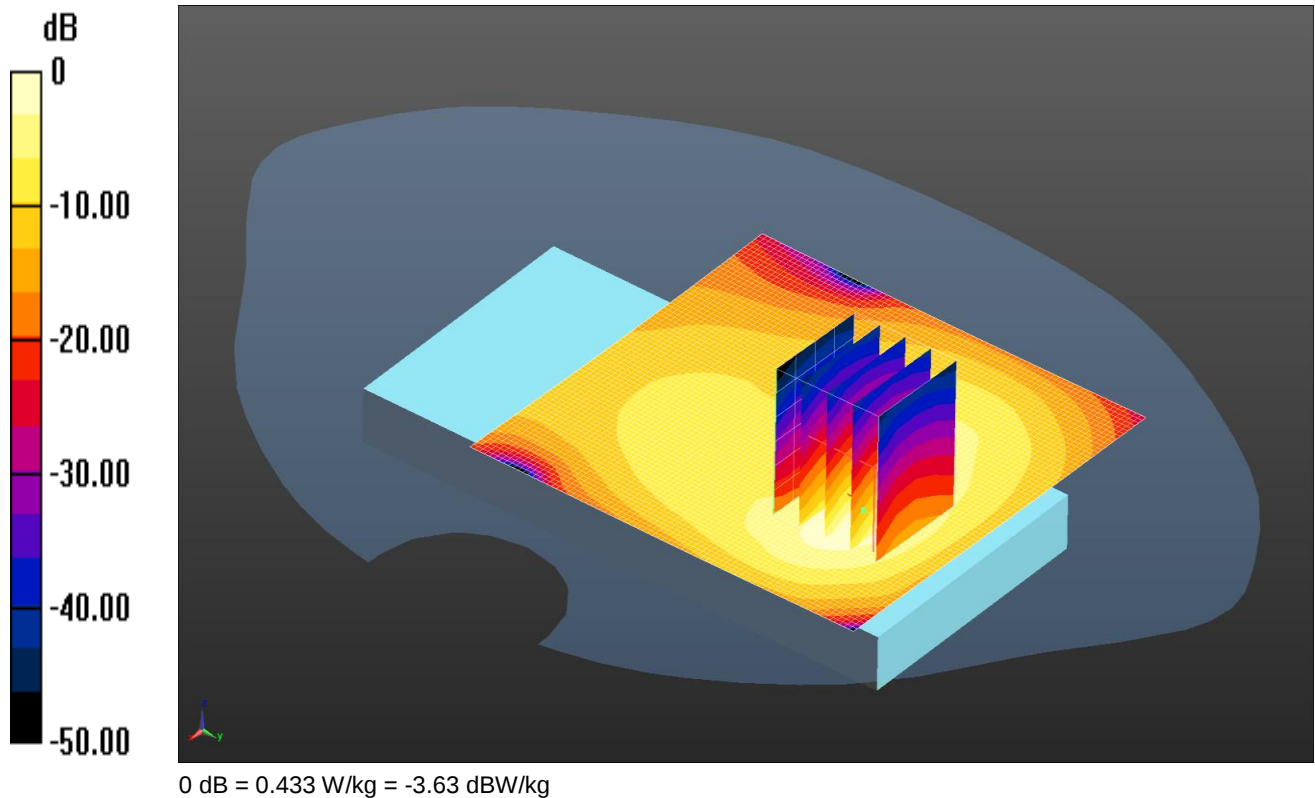

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 51.761$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3341; ConvF(4.78, 4.78, 4.78); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back 1RB Low - Hotspot - PB1 2/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.433 W/kg

Configuration/Back 1RB Low - Hotspot - PB1 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.666 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.440 W/kg

Date: 16/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

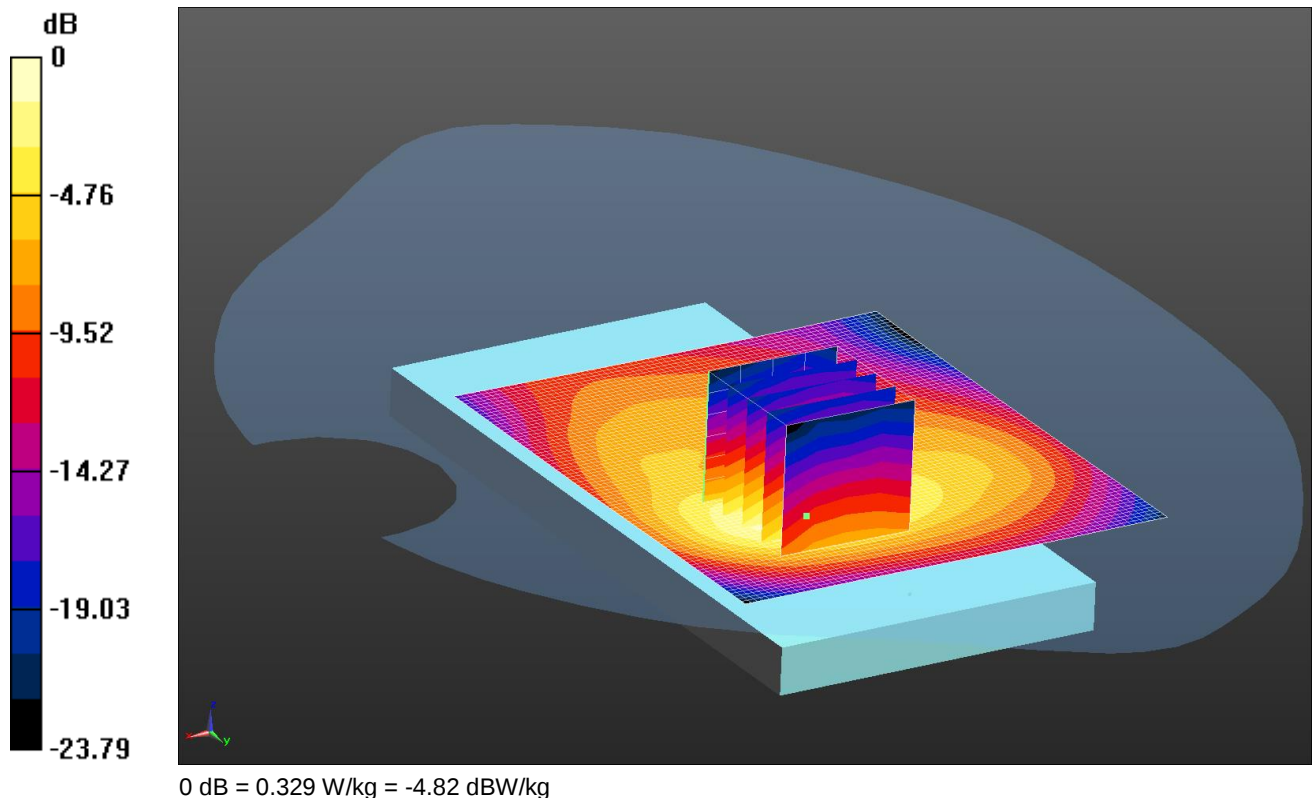

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.495$ S/m; $\epsilon_r = 51.771$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(7.84, 7.84, 7.84); Calibrated: 26/04/2016;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/02/2016
- Phantom: SAM 1-2 (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1817
- ; SEMCAD X Version 14.6.10 (7372) **Configuration/Back 1RB Low - Bodyworn - PB0/Area Scan (71x81x1):**

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.329 W/kg

Configuration/Back 1RB Low - Bodyworn - PB0/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.716 V/m; Power Drift = 0.21 dB


Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.345 W/kg

Date: 06/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I 6

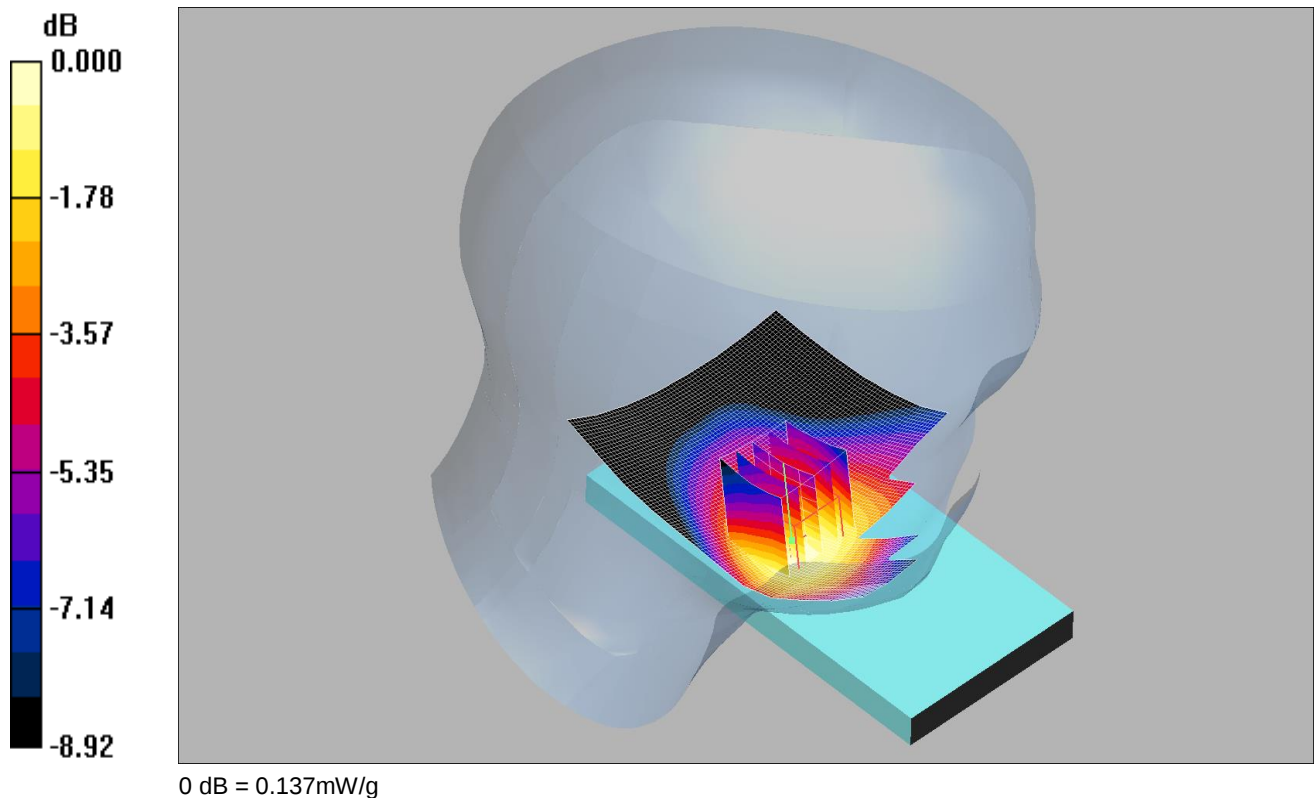

Communication System: LTE Band 26 / 15MHz; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.909$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1586; ConvF(6.31, 6.31, 6.31);

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn450; Calibrated: 28/09/2015

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left 1RB Low - Head - PBx/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.132 mW/g

Touch Left 1RB Low - Head - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.113 dB


Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.100 mW/g

Maximum value of SAR (measured) = 0.137 mW/g

Date: 28/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I 6

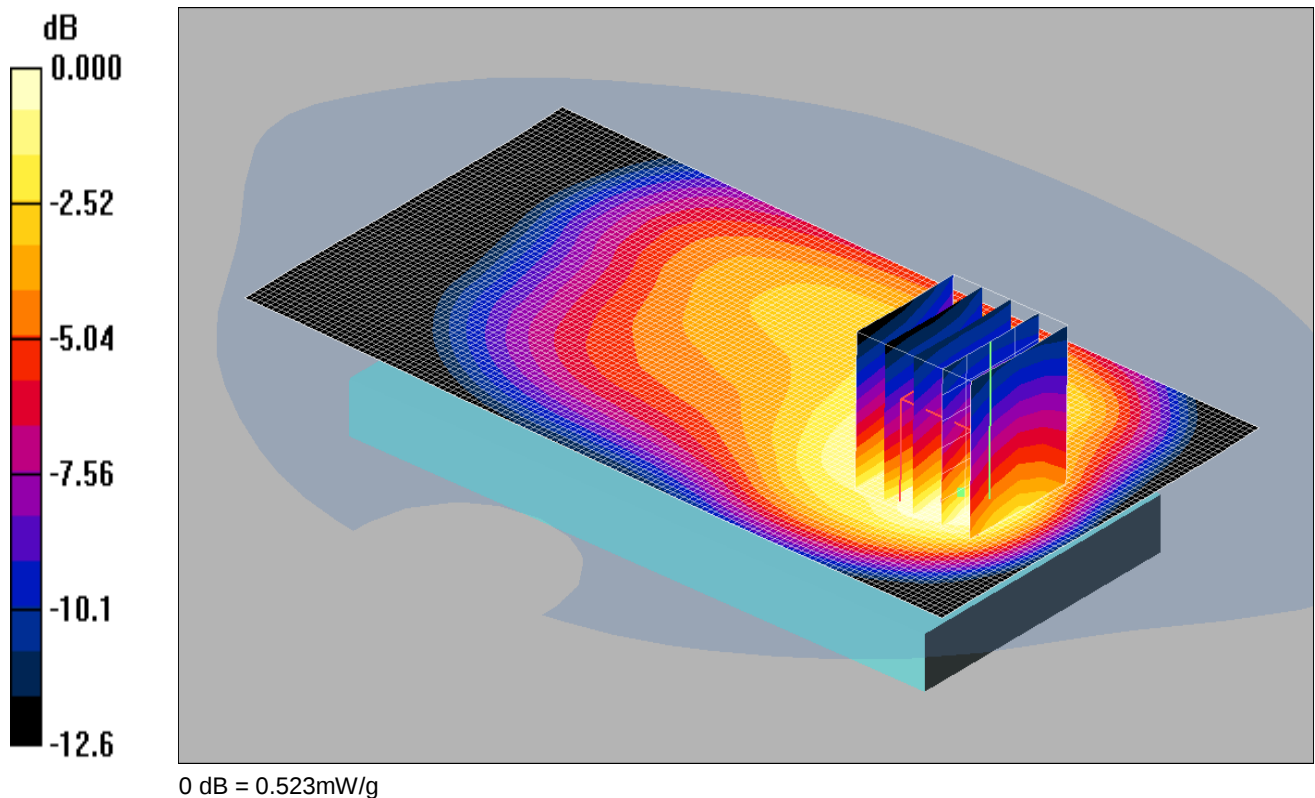

Communication System: LTE - Band 26 / 15MHz Channel; Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.98, 5.98, 5.98);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 26/05/2015
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back 1RB Low - Hotspot - PBx/Area Scan 2 (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.551 mW/g

Back 1RB Low - Hotspot - PBx/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.023 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.523 mW/g

Date: 05/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

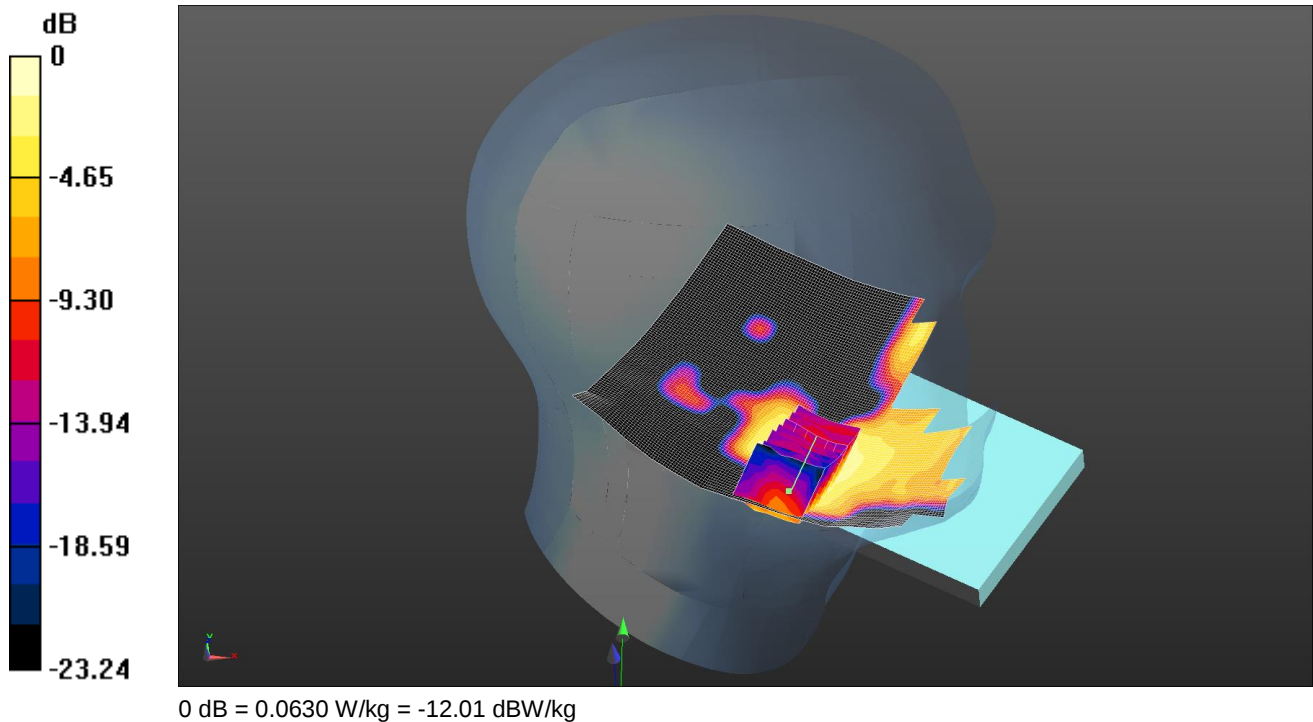

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2310$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 40.143$; $\rho = 1000$ kg/m³
Phantom section: Left Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3335; ConvF(4.78, 4.78, 4.78); Calibrated: 23/07/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn432; Calibrated: 25/08/2015
- Phantom: SAMB (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7372)

Configuration/Touch Left 50%RB Low - Head - PB0/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0589 W/kg

Configuration/Touch Left 50%RB Low - Head - PB0/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.103 V/m; Power Drift = 0.33 dB


Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0630 W/kg

Date: 23/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

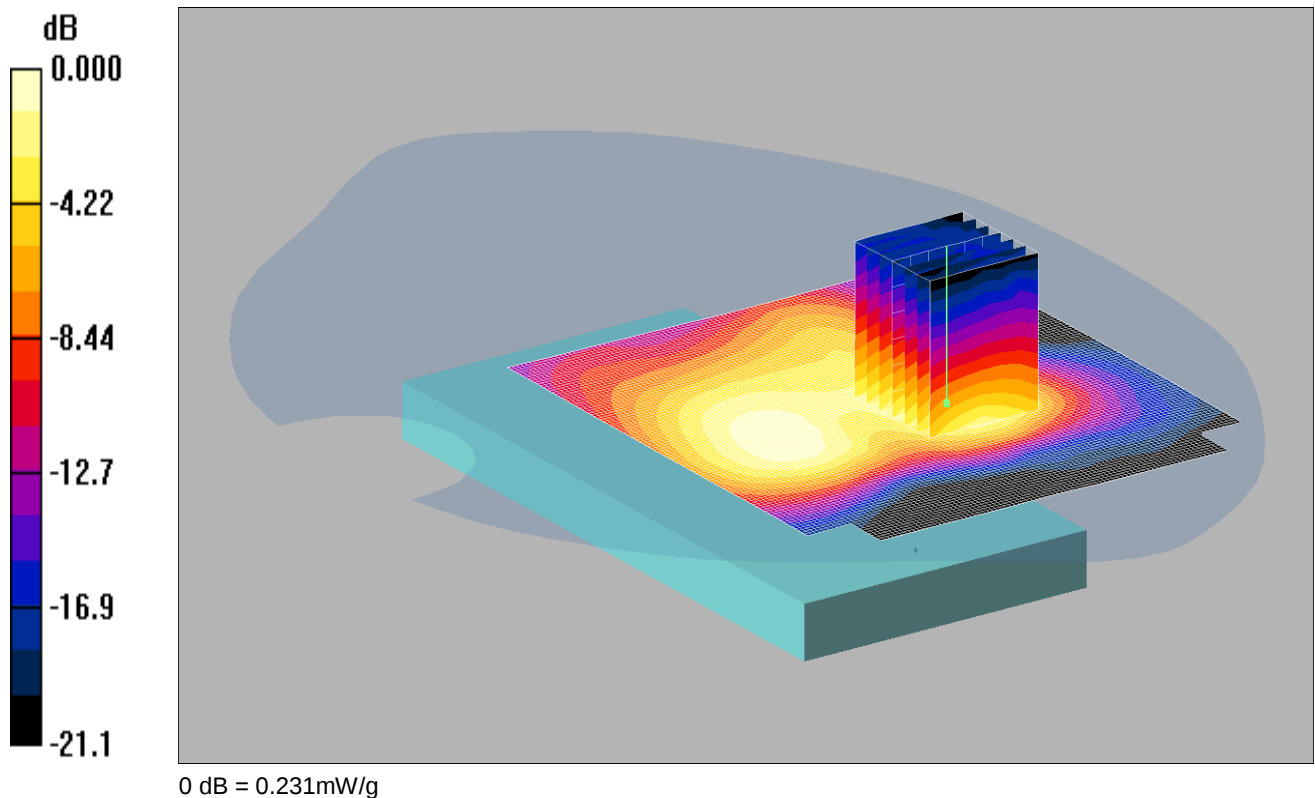

Communication System: LTE - Band 30/ 10MHz Channel; Frequency: 2310 MHz; Duty Cycle: 1:1.5625
Medium: 2300/2450 MHz MSL Medium parameters used (interpolated): $f = 2310$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.54, 4.54, 4.54);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn432; Calibrated: 25/08/2015
- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back 1 RB Low - Hotspot - PB1/Area Scan (101x111x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.238 mW/g

Back 1 RB Low - Hotspot - PB1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.47 V/m; Power Drift = -0.158 dB


Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.231 mW/g

Date: 16/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I 6

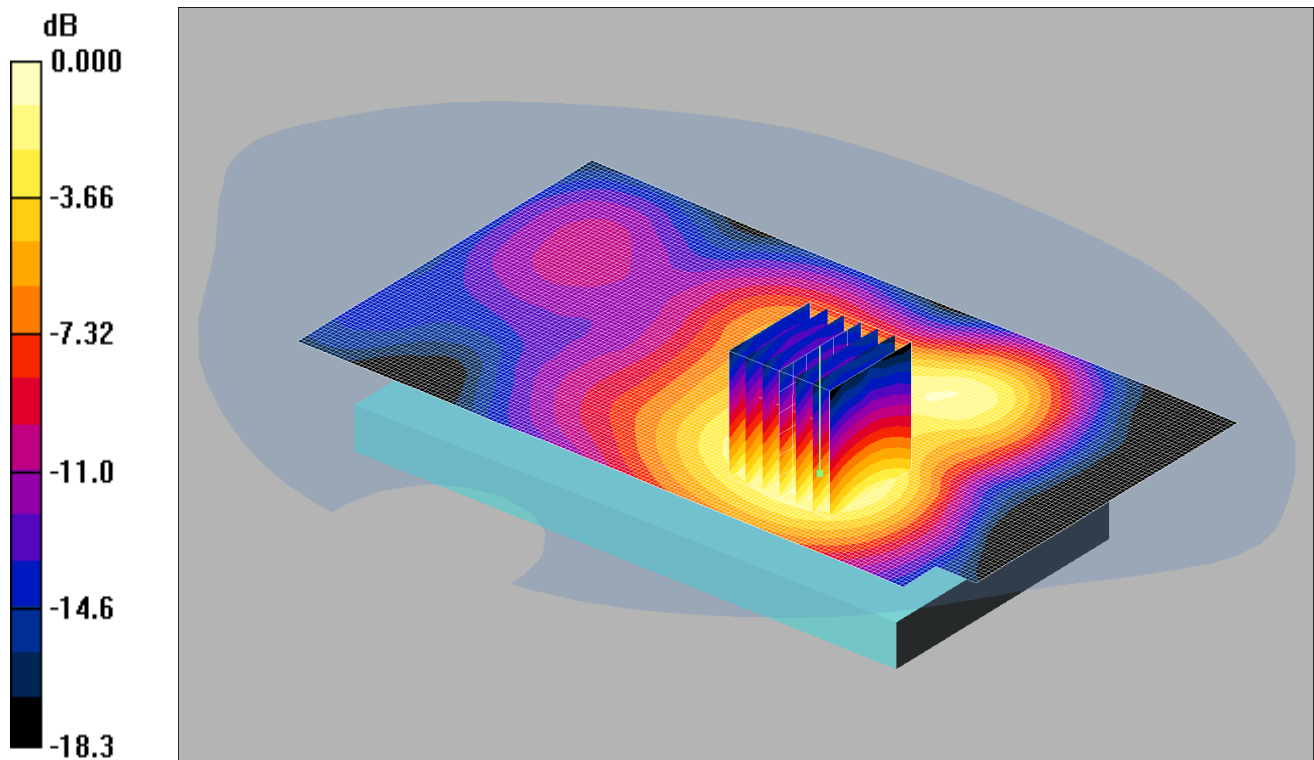

0 dB = 0.254mW/g

Communication System: LTE - Band 30/ 10MHz Channel; Frequency: 2310 MHz; Duty Cycle: 1:1.5625
Medium: 2300/2450 MHz MSL Medium parameters used (interpolated): $f = 2310$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.54, 4.54, 4.54);

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn432; Calibrated: 25/08/2015

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back of EUT 1RB Low - Bodyworn - PB0 Flavor1/Area Scan (91x161x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.259 mW/g

Back of EUT 1RB Low - Bodyworn - PB0 Flavor1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.43 V/m; Power Drift = 0.027 dB


Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.254 mW/g

Date: 29/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

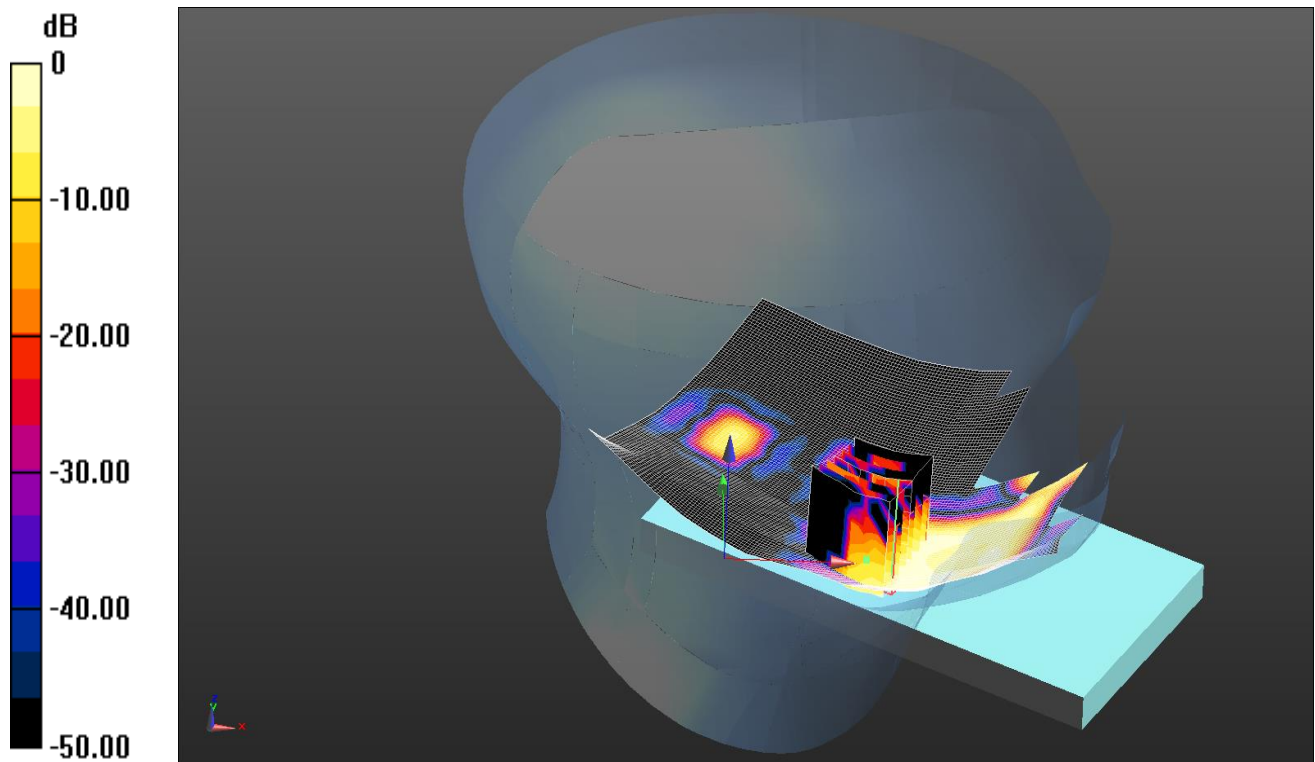

0 dB = 0.0327 W/kg = -14.85 dBW/kg

Communication System: UID 0, LTE TDD 20MHz(Duty Cycle 43%) (0); Frequency: 2593 MHz;Duty Cycle: 1:2.30675
Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.971$ S/m; $\epsilon_r = 38.232$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.33, 4.33, 4.33); Calibrated: 23/07/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn432; Calibrated: 25/08/2015
- Phantom: SAMB (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Left 1RB Middle - Head - PBx 2 2/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0535 W/kg

Configuration/Touch Left 1RB Middle - Head - PBx 2 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.181 V/m; Power Drift = 1.38 dB


Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00855 W/kg

Maximum value of SAR (measured) = 0.0327 W/kg

Date: 13/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I 6

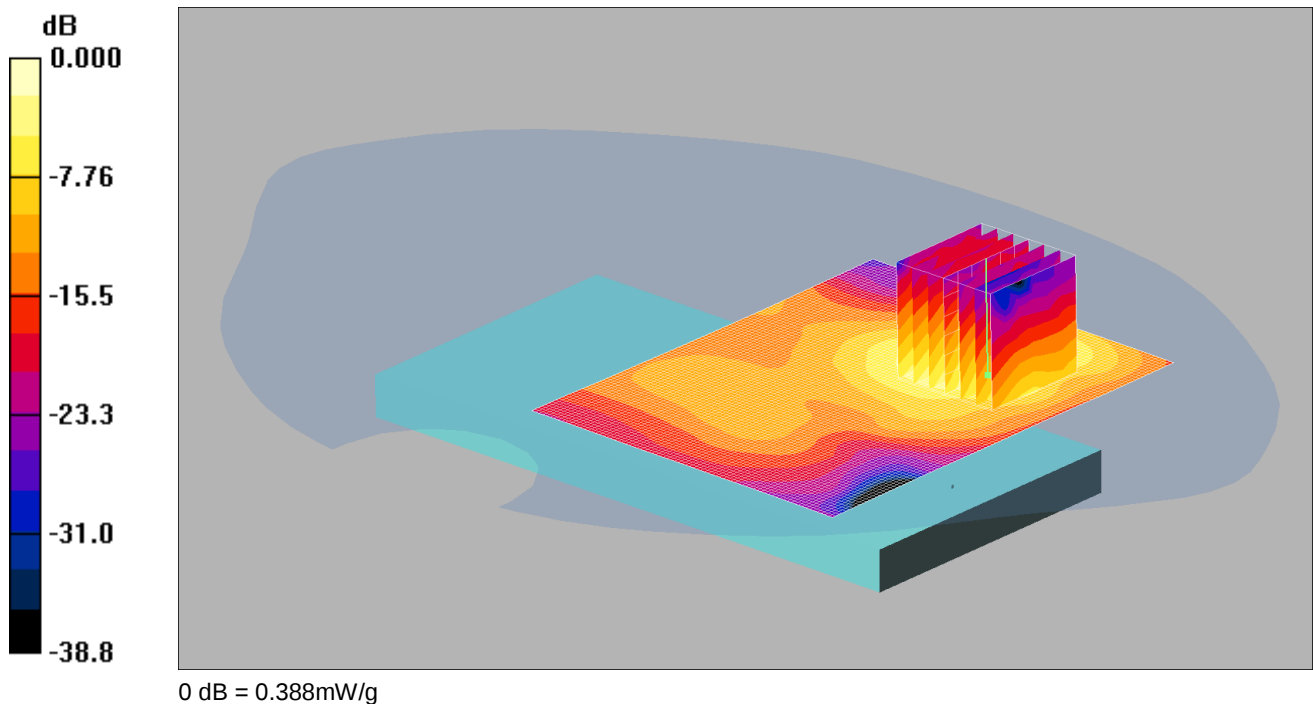

Communication System: LTE - Band 41/ 20MHz Channel; Frequency: 2593 MHz; Duty Cycle: 1:2.30675
Medium: 2600 MHz MSL Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.16$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.1, 4.1, 4.1);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn432; Calibrated: 25/08/2015
- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back 1RB Middle - Hotspot - PBx/Area Scan (101x81x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.380 mW/g

Back 1RB Middle - Hotspot - PBx/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.121 dB


Peak SAR (extrapolated) = 0.687 W/kg

SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.388 mW/g

Date: 23/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

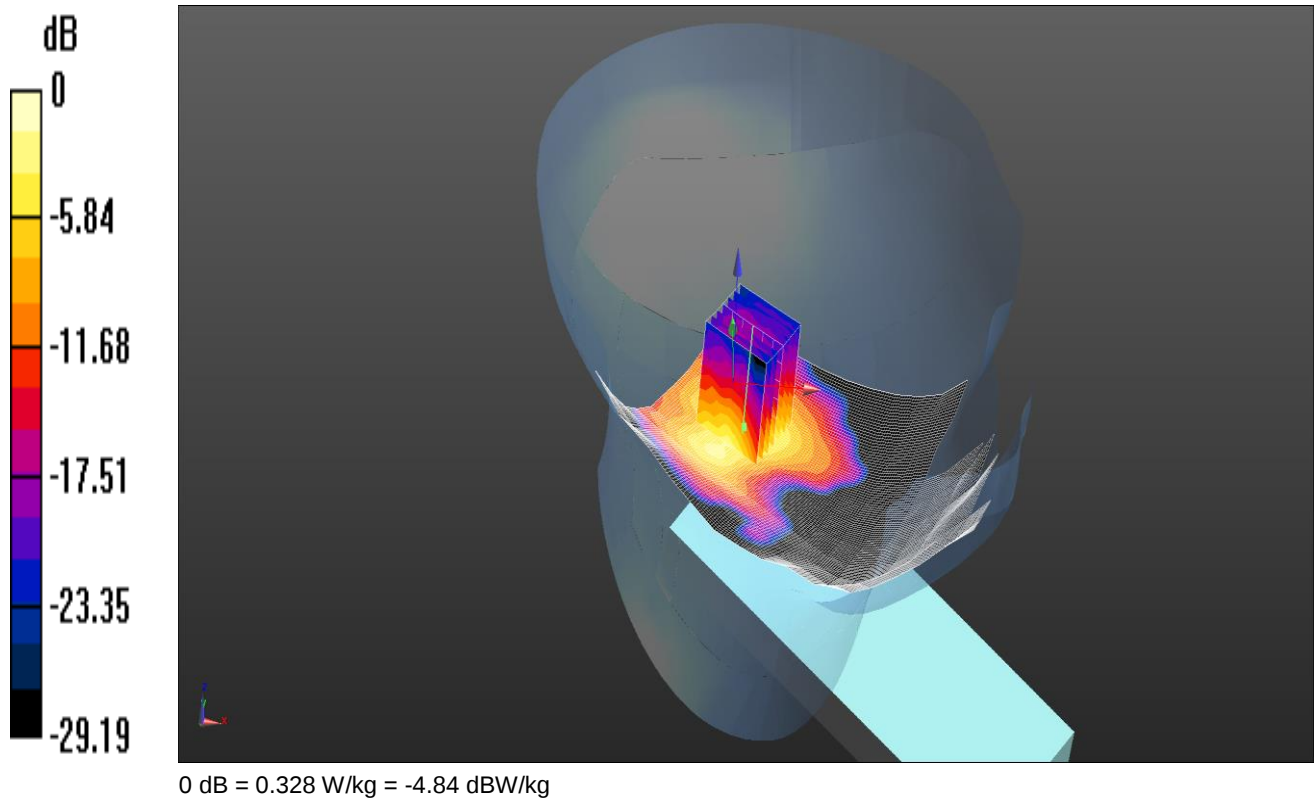

Communication System: UID 0, WLAN 802.11 (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.802$ S/m; $\epsilon_r = 39.992$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.42, 4.42, 4.42); Calibrated: 23/07/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn432; Calibrated: 25/08/2015
- Phantom: SAMB (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Tilt Left 802.11b MIMO Ant 1&2 - Head - PBx/Area Scan 2 (101x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.250 W/kg

Configuration/Tilt Left 802.11b MIMO Ant 1&2 - Head - PBx/Ant1 Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.380 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

Date: 07/05/16

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

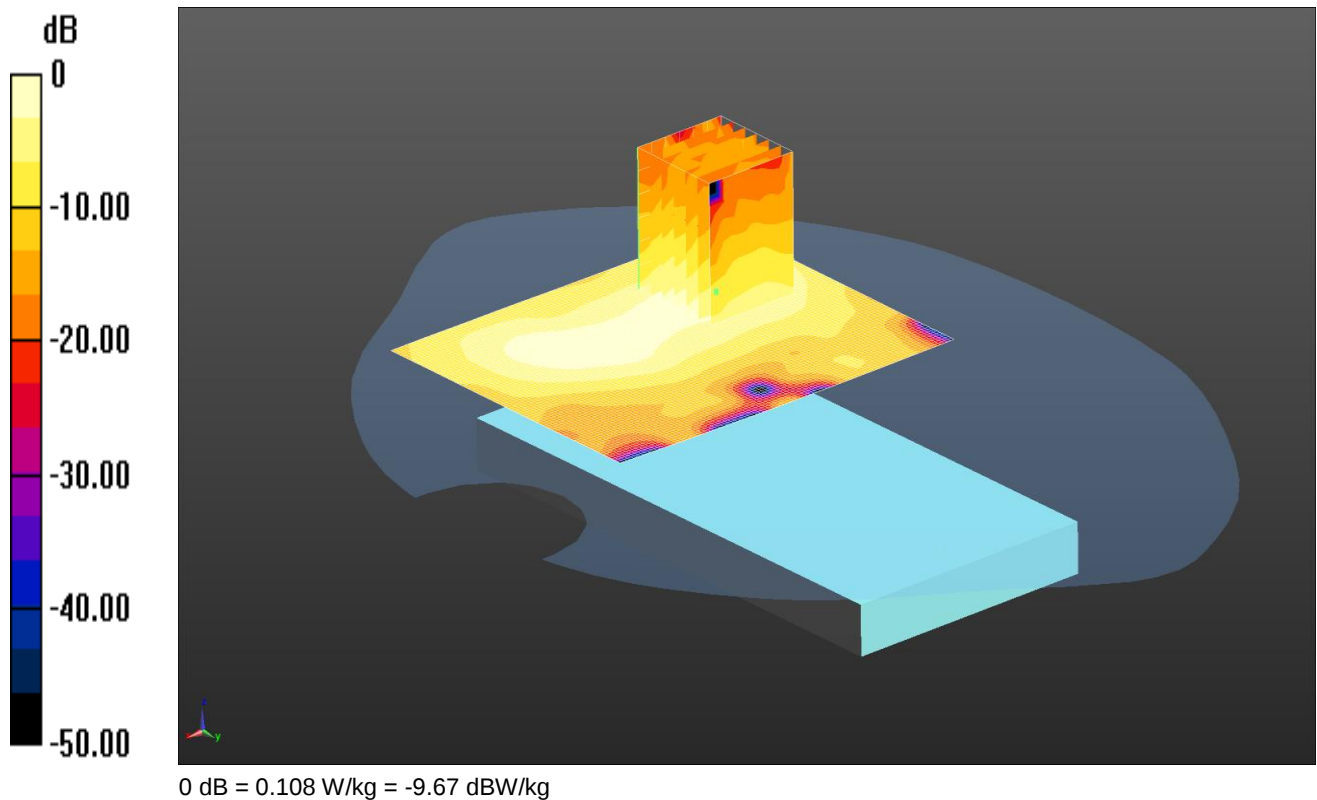

Communication System: UID 0, WLAN 802.11 (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.009$ S/m; $\epsilon_r = 51.935$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.04, 7.04, 7.04); Calibrated: 06/10/15;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn431; Calibrated: 17/11/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back 802.11b MIMO Ant 1&2 - Hotspot - PBx/Area Scan (101x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.108 W/kg

Configuration/Back 802.11b MIMO Ant 1&2 - Hotspot - PBx/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.047 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

Date: 21/04/16

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

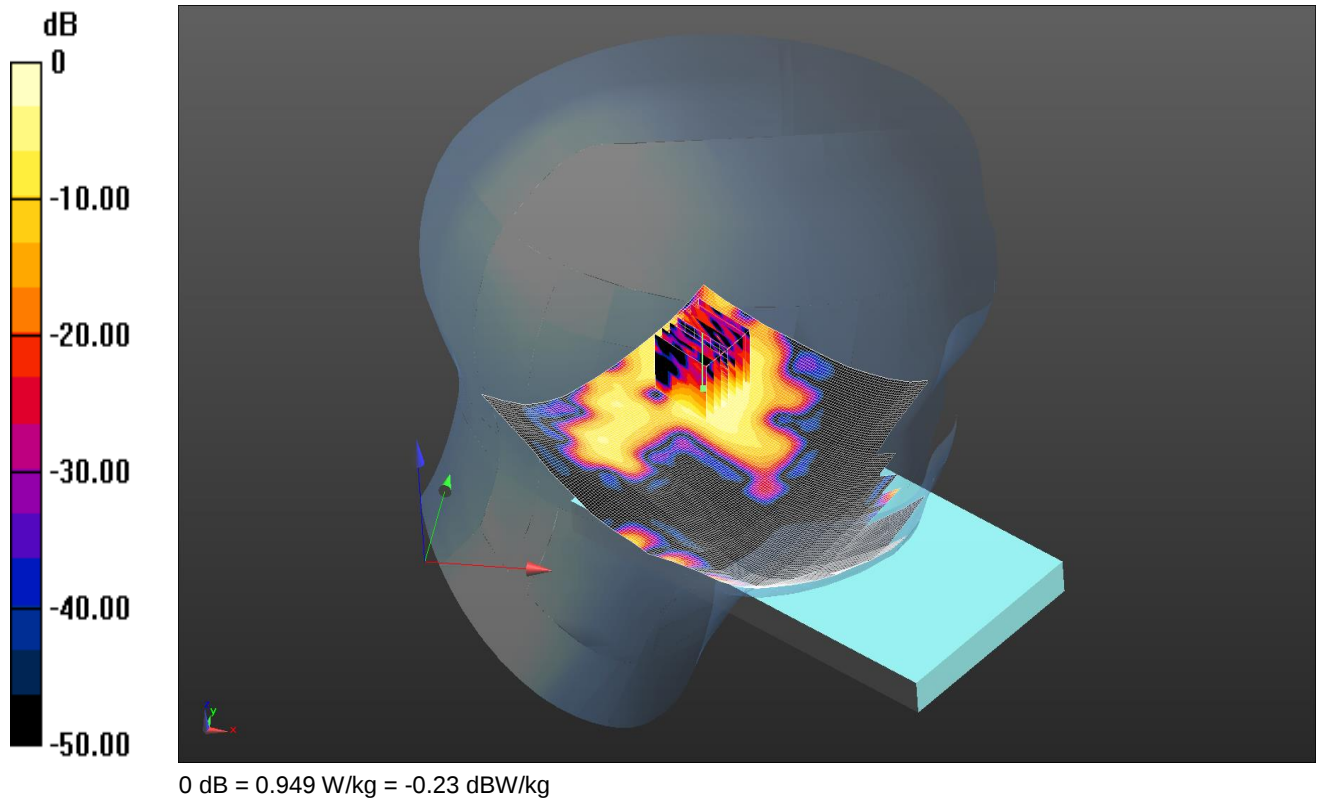

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5250/5600/5750 MHz HSL Medium parameters used: $f = 5500$ MHz; $\sigma = 4.921$ S/m; $\epsilon_r = 34.234$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(4.5, 4.5, 4.5); Calibrated: 21/03/16;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn431; Calibrated: 17/11/15
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Left 802.11a MIMO Ant 1&2 - Head - PBx/Area Scan (121x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Configuration/Touch Left 802.11a MIMO Ant 1&2 - Head - PBx/Ant1 Zoom Scan (7x7x12) (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.44 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.949 W/kg

Date: 03/05/16

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I 6

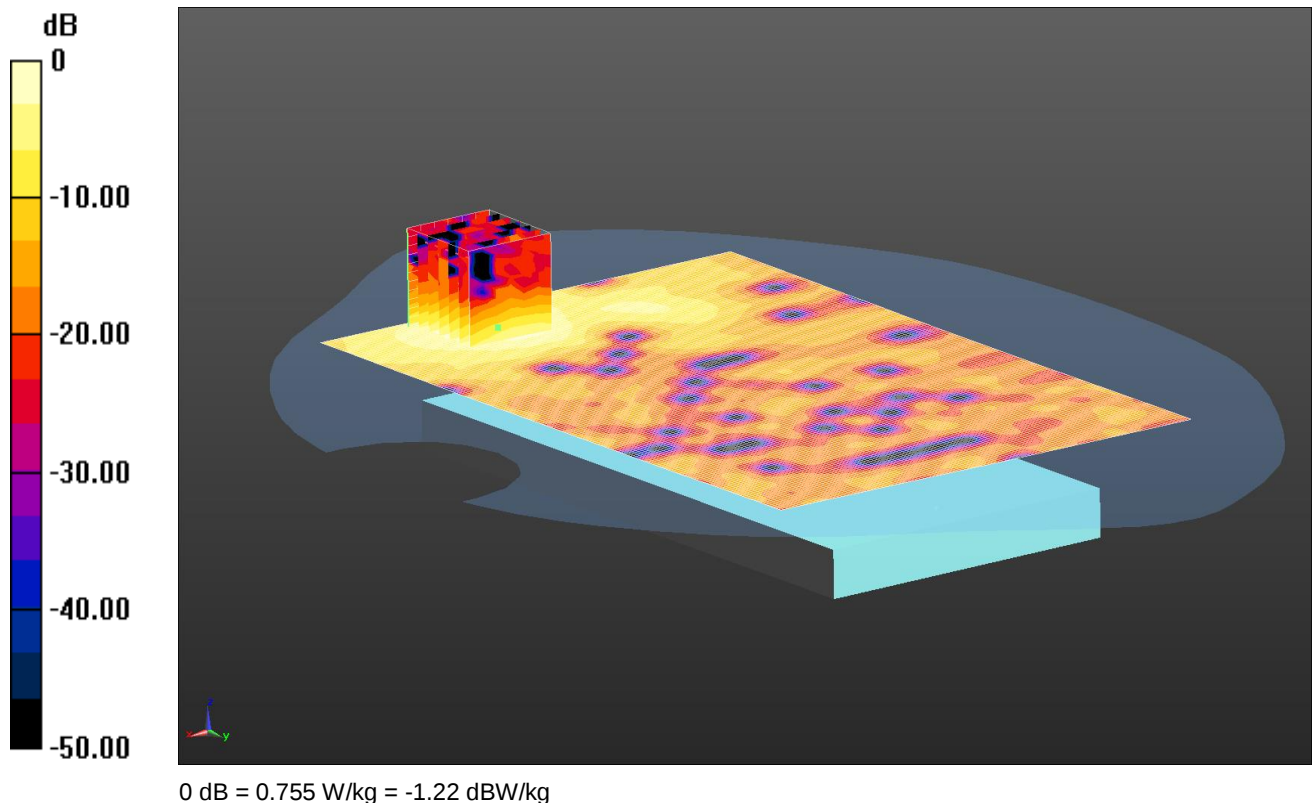

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5765 MHz; Duty Cycle: 1:1

Medium: 5250/5600/5750 MHz MSL Medium parameters used (interpolated): $f = 5765$ MHz; $\sigma = 6.067$ S/m; $\epsilon_r = 48.056$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.99, 3.99, 3.99); Calibrated: 06/10/15;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn431; Calibrated: 17/11/15
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back 802.11a MIMO Ant 1&2 - Hotspot - PBx/Area Scan (121x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.762 W/kg

Configuration/Back 802.11a MIMO Ant 1&2 - Hotspot - PBx/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.87 V/m; Power Drift = -0.20 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.755 W/kg

Date: 20/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I 6

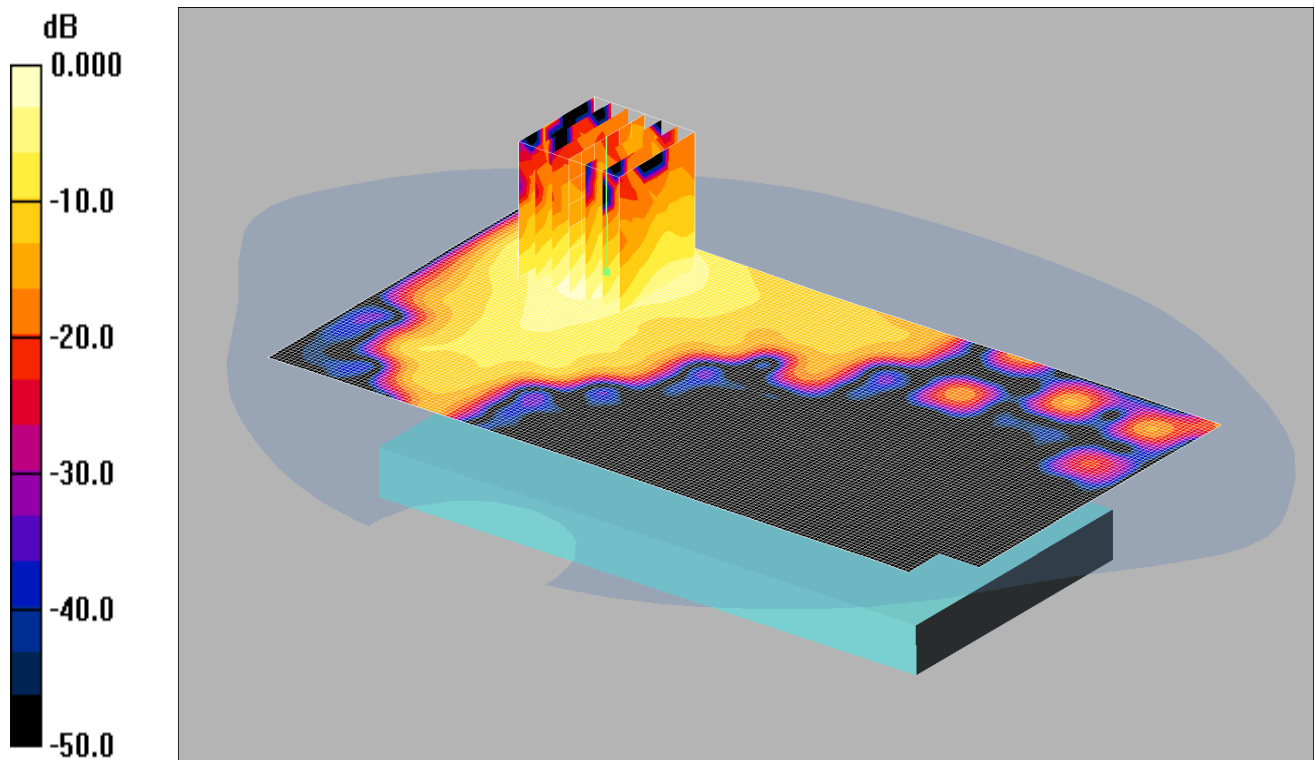

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: 2300/2450 MHz MSL Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 2.05$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.31, 4.31, 4.31);

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn432; Calibrated: 25/08/2015

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back - Bluetooth - Hotspot - PBx/Area Scan (91x171x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.033 mW/g

Back - Bluetooth - Hotspot - PBx/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.31 V/m; Power Drift = -0.002 dB


Peak SAR (extrapolated) = 0.054 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.033 mW/g

Date: 27/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

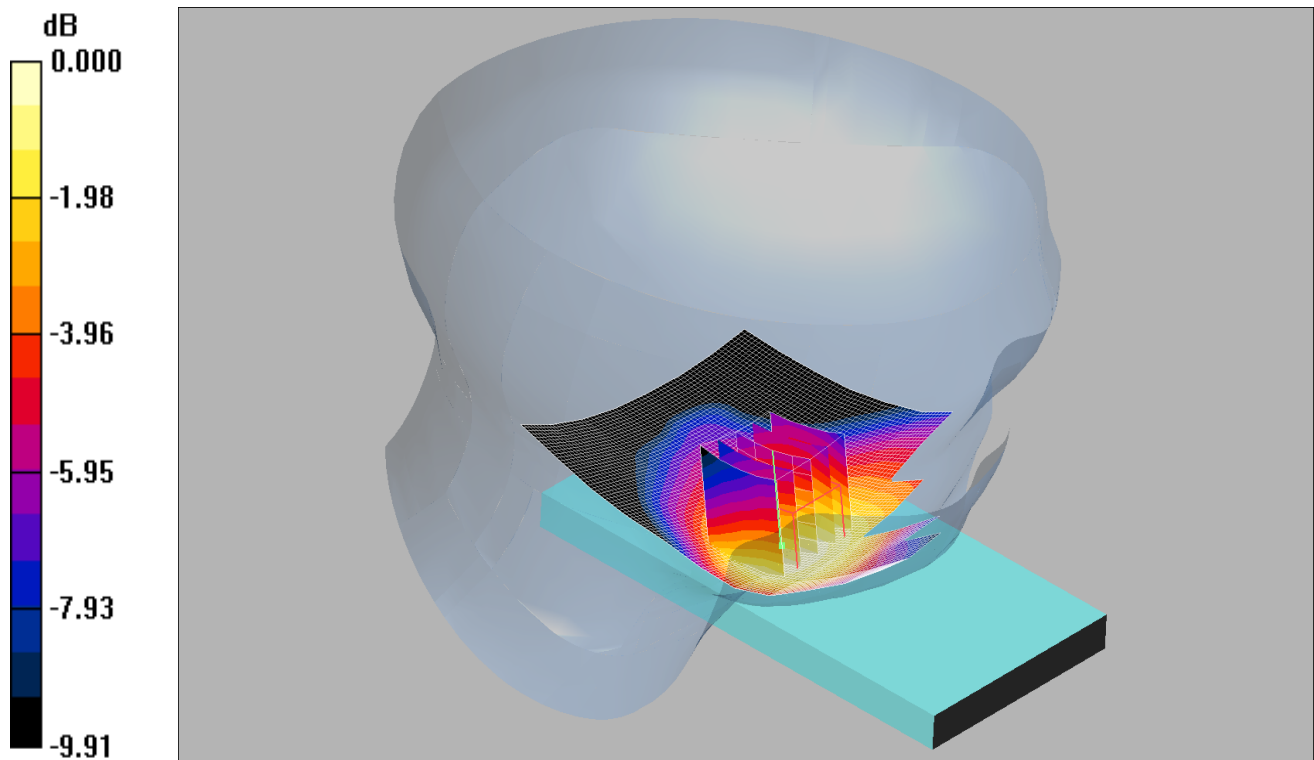

0 dB = 0.116mW/g

Communication System: GSM 850 MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1586; ConvF(6.31, 6.31, 6.31);

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn450; Calibrated: 28/09/2015

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Head - PBx/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.116 mW/g

Touch Left - Head - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.70 V/m; Power Drift = 0.632 dB


Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.116 mW/g

Date: 26/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

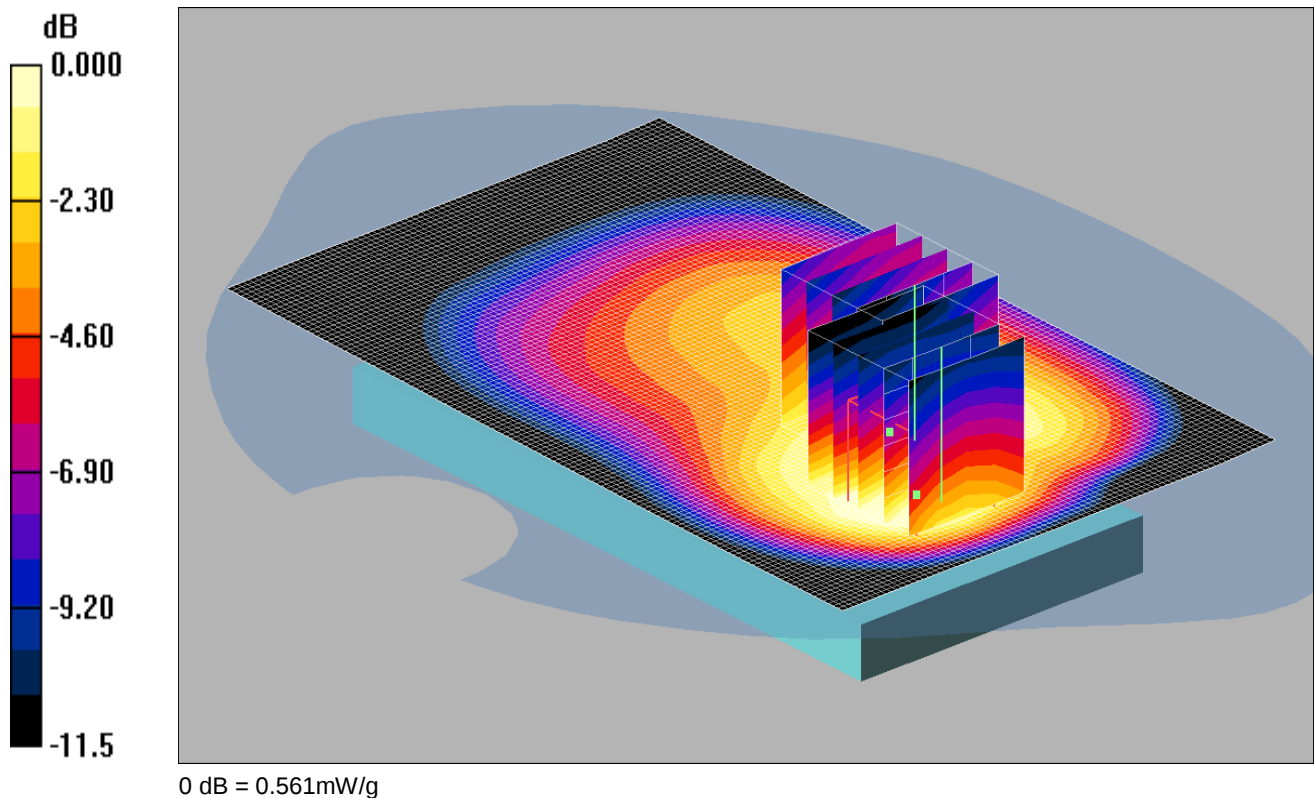

Communication System: GPRS 850 MHz 3TX; Frequency: 848.8 MHz; Duty Cycle: 1:2.67

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.98, 5.98, 5.98);

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/05/2015

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back - Hotspot - PBx/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.662 mW/g

Back - Hotspot - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.318 mW/g

Maximum value of SAR (measured) = 0.661 mW/g

Back - Hotspot - PBx/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.731 W/kg


SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.353 mW/g

Maximum value of SAR (measured) = 0.561 mW/g

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

Date: 26/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

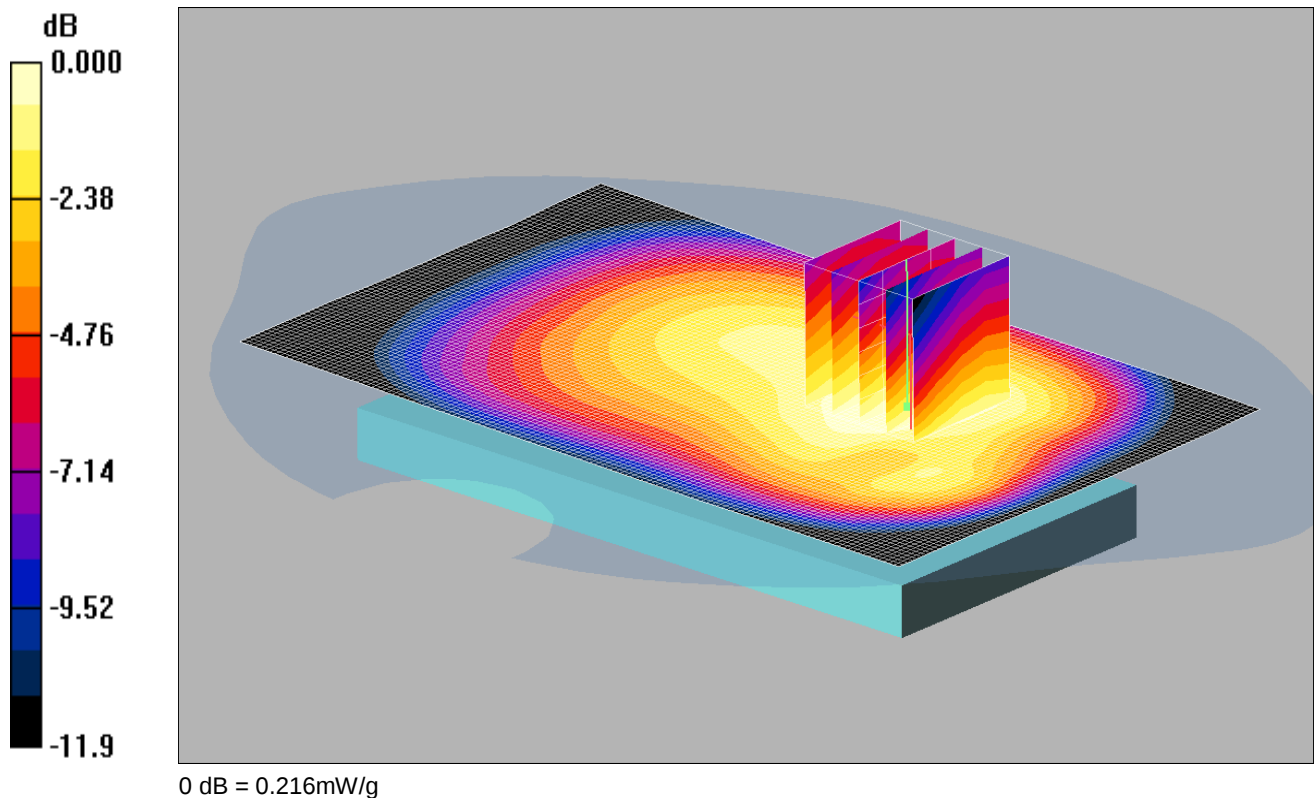

Communication System: GSM 850 MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.98, 5.98, 5.98);

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/05/2015

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back - Hotspot - PBx/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.220 mW/g

Back - Hotspot - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.005 dB


Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

Date: 16/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

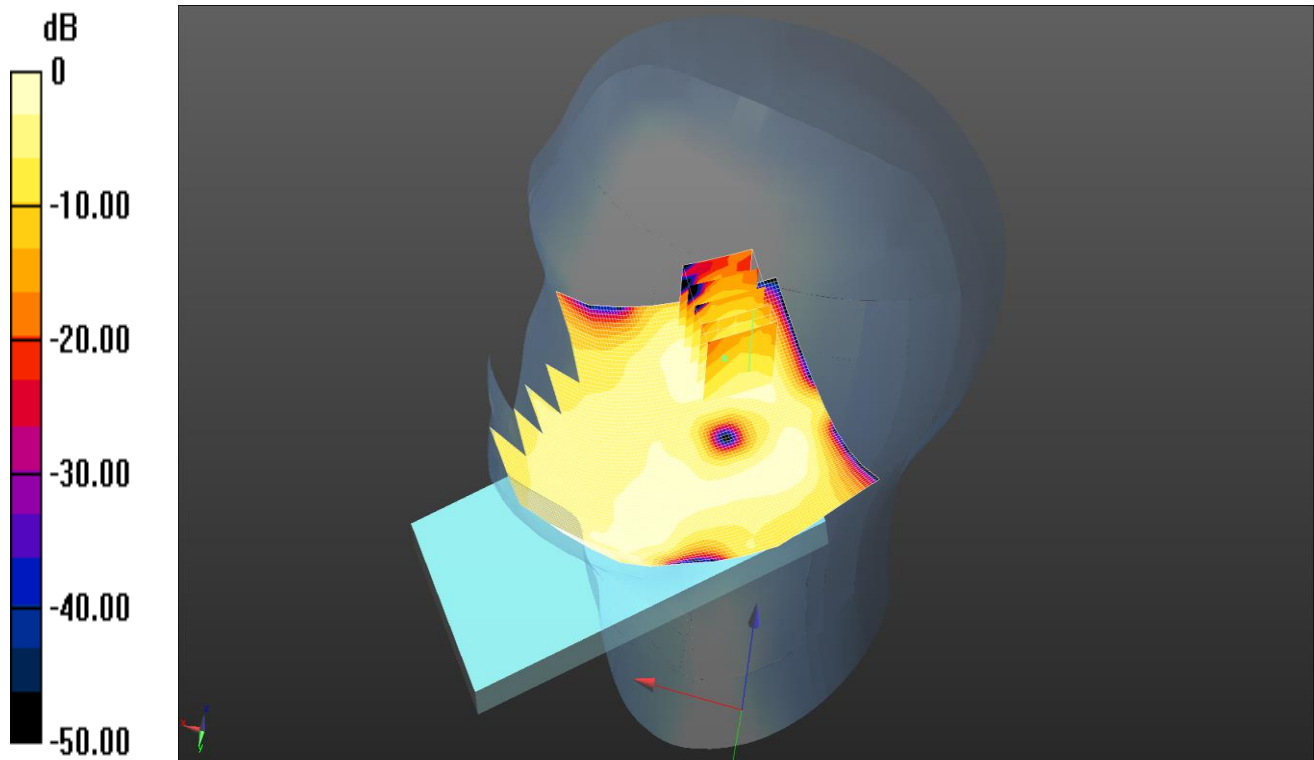

0 dB = 0.0181 W/kg = -17.42 dBW/kg

Communication System: UID 0, Generic GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: 1900 HSL Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 39.816$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(5.07, 5.07, 5.07); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/TILT Right - Head - PB0/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0213 W/kg

Configuration/TILT Right - Head - PB0/Zoom Scan (7x7x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.421 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.0092 W/kg

Maximum value of SAR (measured) = 0.0181 W/kg

Date: 19/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

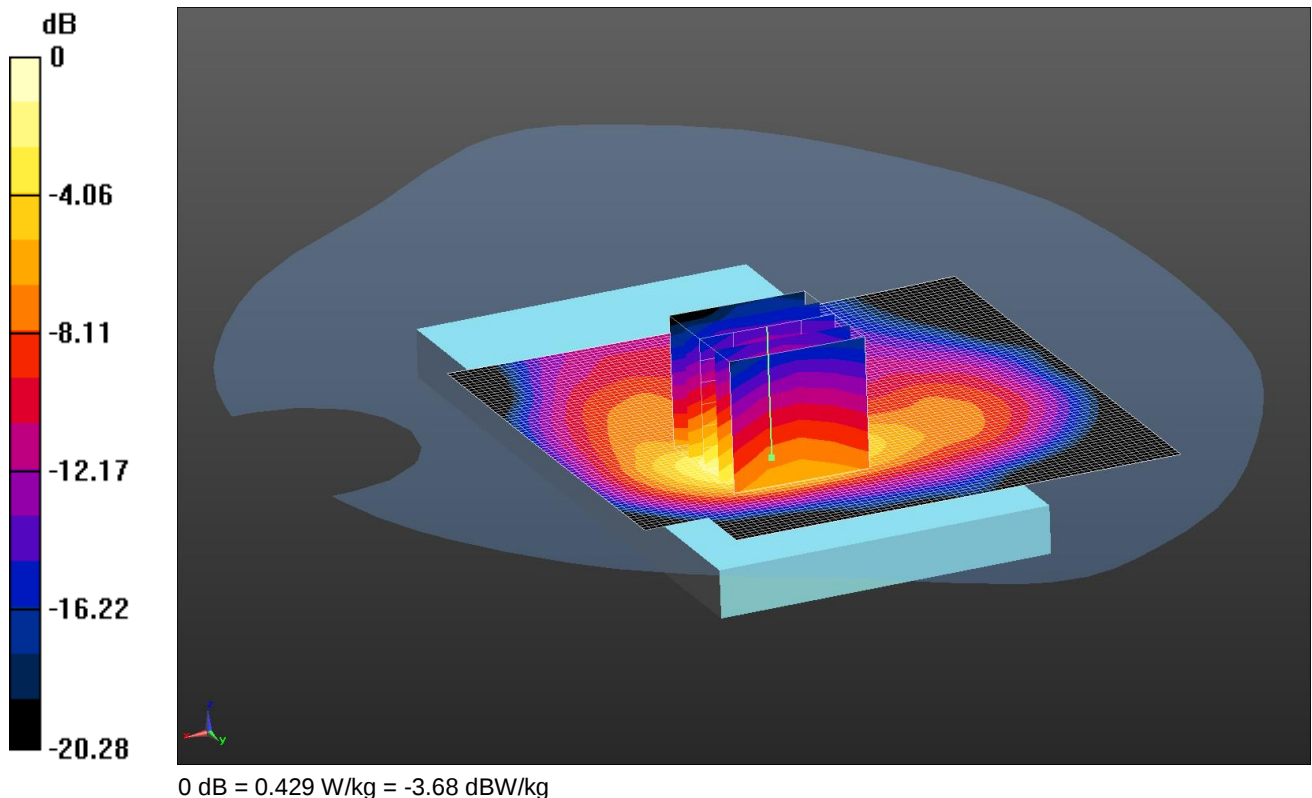

Communication System: UID 0, GPRS 3Tx (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.66993

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.571$ S/m; $\epsilon_r = 50.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(7.84, 7.84, 7.84); Calibrated: 26/04/2016;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/02/2016
- Phantom: SAM 1-2 (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1817
- ; SEMCAD X Version 14.6.10 (7372)

Configuration/Back - Hotspot - PBx/Area Scan 2 (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.358 W/kg

Configuration/Back - Hotspot - PBx/Zoom Scan 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.088 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

Date: 20/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

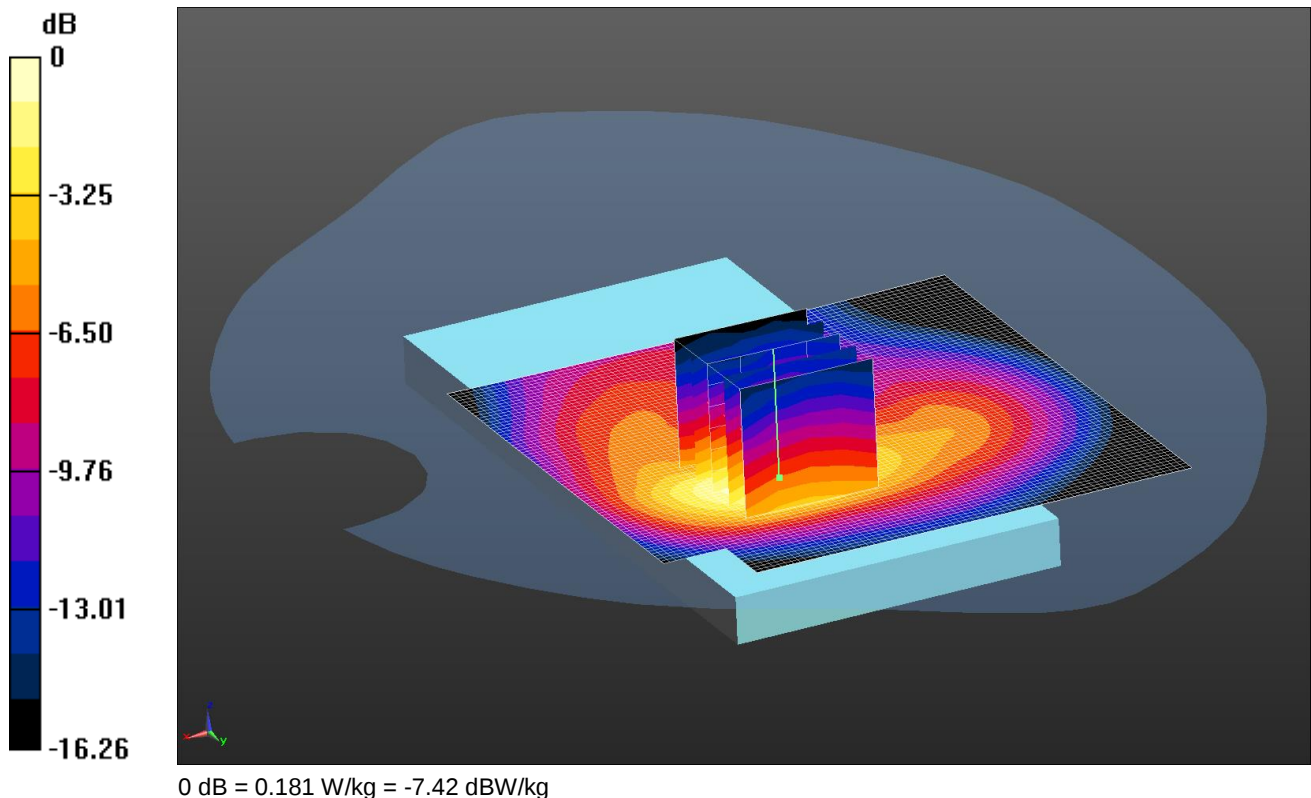

Communication System: UID 0, Generic GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.571$ S/m; $\epsilon_r = 50.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(7.84, 7.84, 7.84); Calibrated: 26/04/2016;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn450; Calibrated: 28/09/2015
- Phantom: SAM 1-2 (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1817
- ; SEMCAD X Version 14.6.10 (7372)

Configuration/Back - Bodyworn - PBx 2 2/Area Scan 2 2 (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.170 W/kg

Configuration/Back - Bodyworn - PBx 2 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.653 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

Date: 16/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

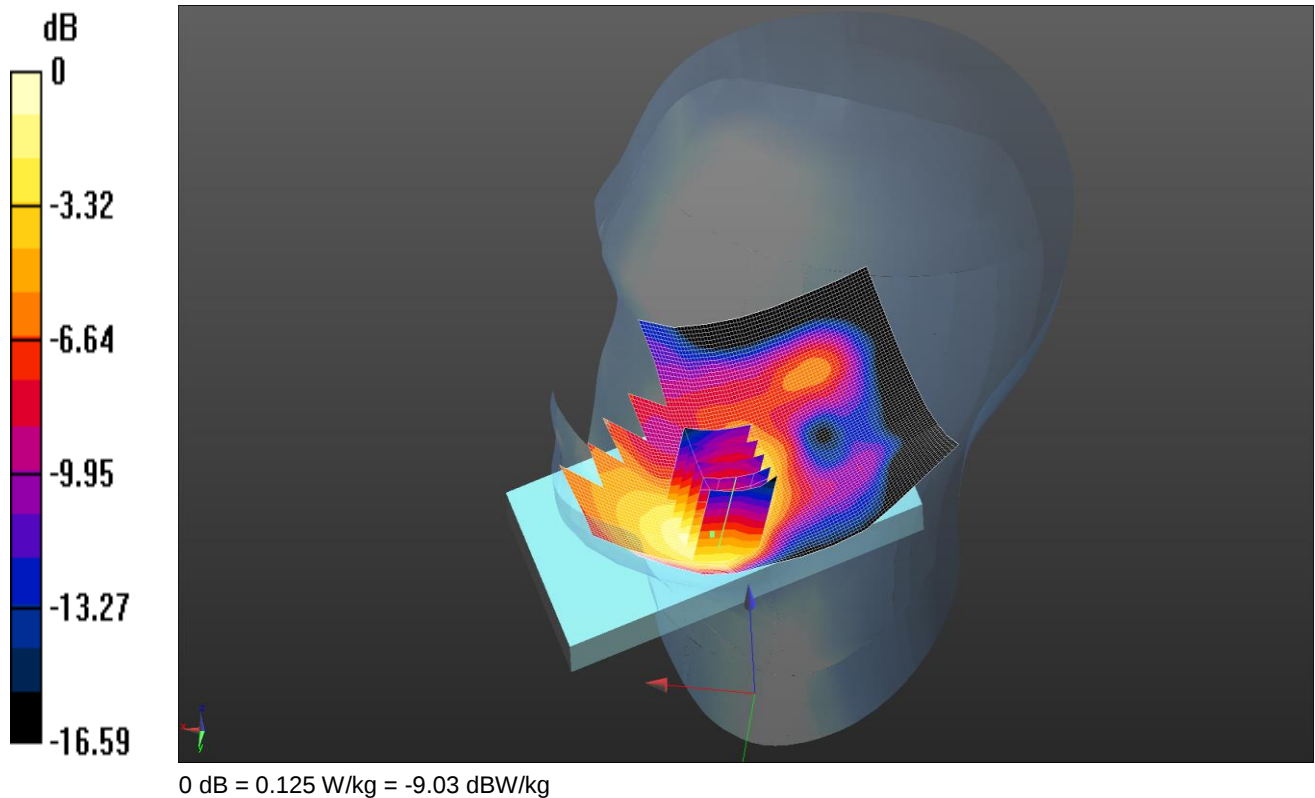

Communication System: UID 0, UMTS FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 HSL Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.012$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(5.07, 5.07, 5.07); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right - Head - PB0/Area Scan 2 2 (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.123 W/kg

Configuration/Touch Right - Head - PB0/Zoom Scan (7x7x7) 2 2 (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.667 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

Date: 17/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

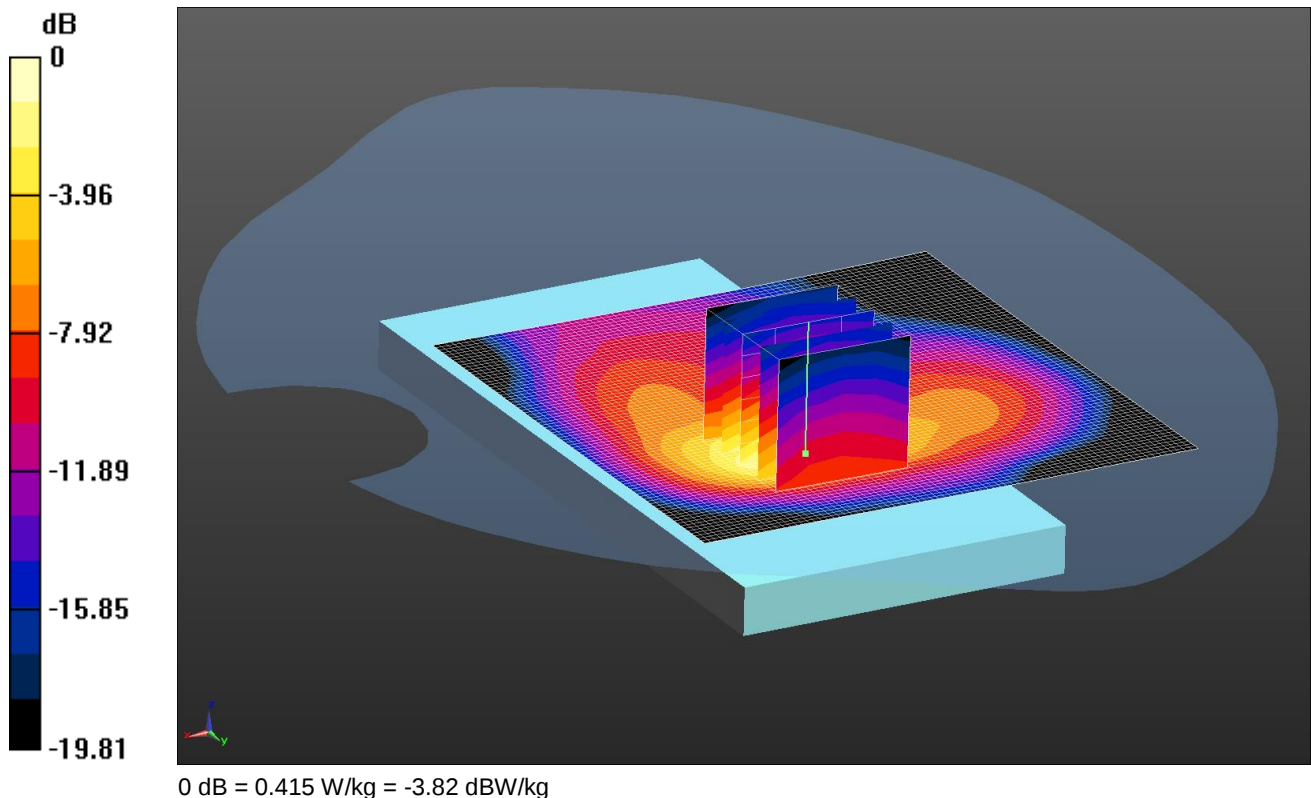

Communication System: UID 0, UMTS FDD (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.543$ S/m; $\epsilon_r = 51.646$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(7.84, 7.84, 7.84); Calibrated: 26/04/2016;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/02/2016
- Phantom: SAM 1-2 (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1817
- ; SEMCAD X Version 14.6.10 (7372)

Configuration/Back - Hotspot - PB1/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.342 W/kg

Configuration/Back - Hotspot - PB1/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.425 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.695 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

Date: 17/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

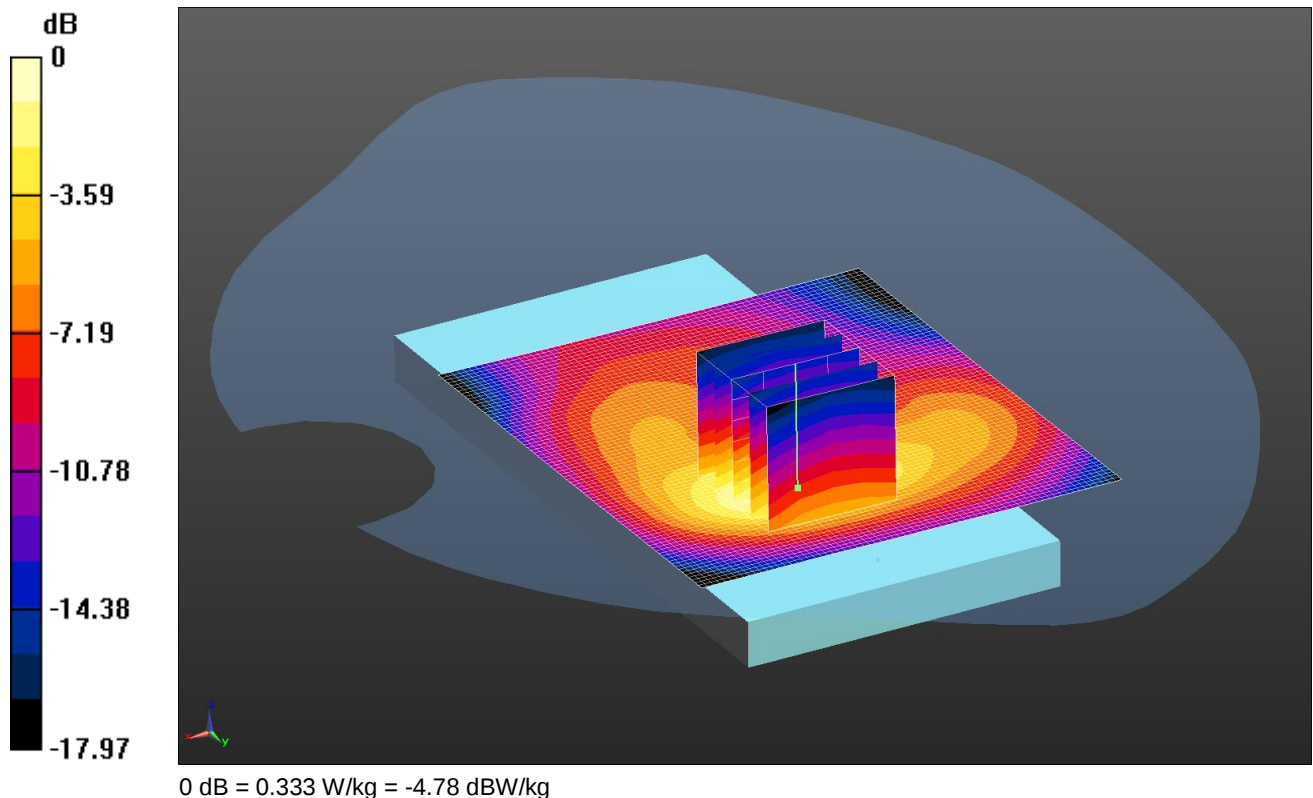

Communication System: UID 0, UMTS FDD (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.543$ S/m; $\epsilon_r = 51.646$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(7.84, 7.84, 7.84); Calibrated: 26/04/2016;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/02/2016
- Phantom: SAM 1-2 (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1817
- ; SEMCAD X Version 14.6.10 (7372)

Configuration/Back - Bodyworn - PB0/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.324 W/kg

Configuration/Back - Bodyworn - PB0/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.330 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

Date: 26/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

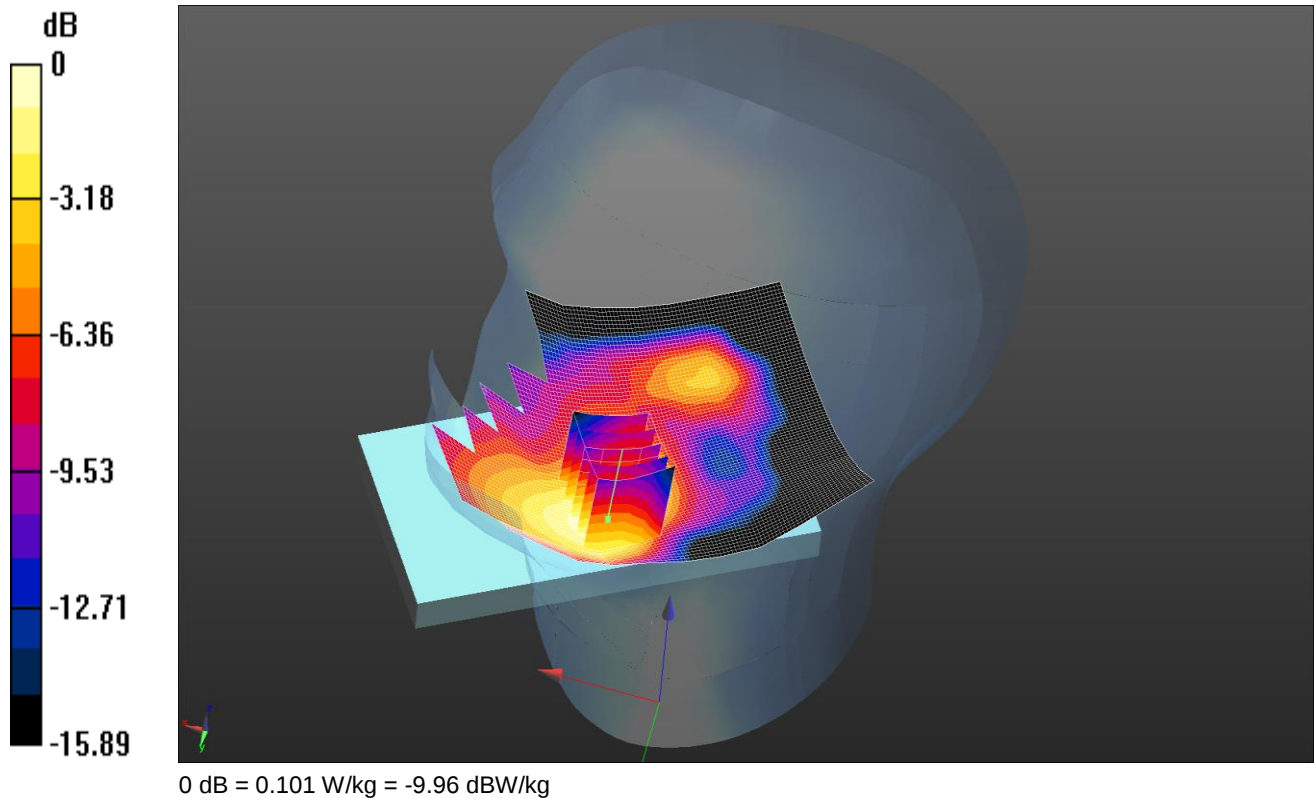

Communication System: UID 0, UMTS FDD (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.295$ S/m; $\epsilon_r = 40.845$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(5.27, 5.27, 5.27); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right - Head - PB0/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0976 W/kg

Configuration/Touch Right - Head - PB0/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.303 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

Date: 27/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

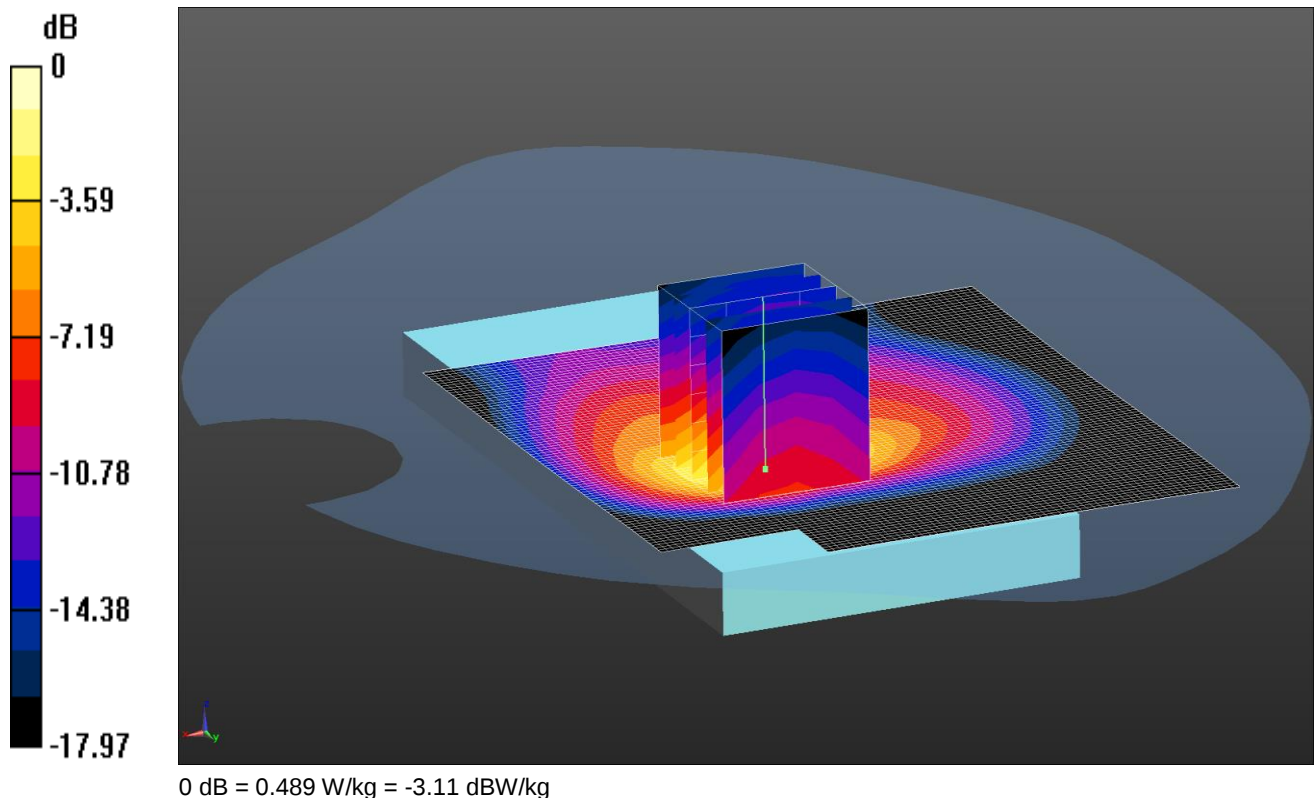

Communication System: UID 0, UMTS FDD (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.486$ S/m; $\epsilon_r = 52.788$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.93, 4.93, 4.93); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM B (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back - Hotspot - PB1/Area Scan 2 2 (81x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.450 W/kg

Configuration/Back - Hotspot - PB1/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.24 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.489 W/kg

Date: 28/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

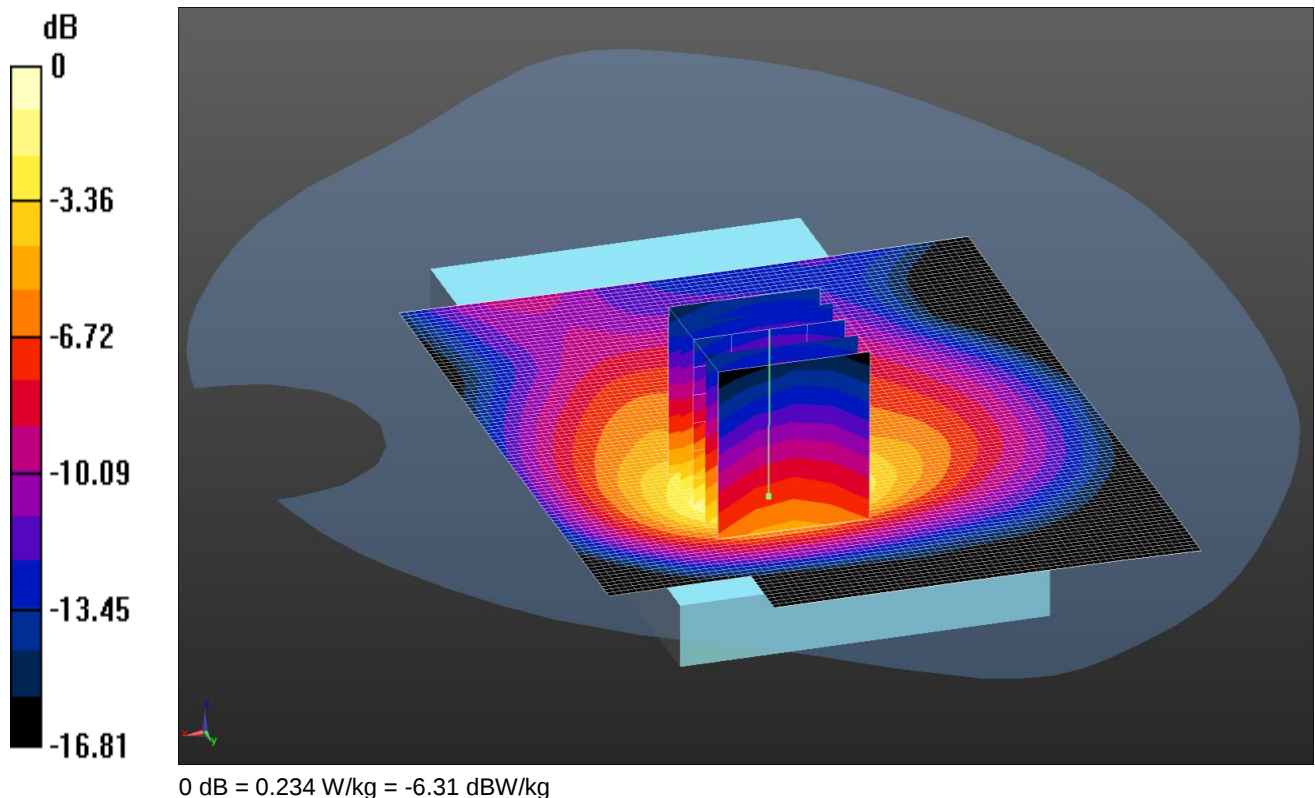

Communication System: UID 0, UMTS FDD (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.486$ S/m; $\epsilon_r = 52.788$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.93, 4.93, 4.93); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM B (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back - Bodyworn - PB0/Area Scan 2 2 (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.228 W/kg

Configuration/Back - Bodyworn - PB0/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.53 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

Date: 21/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

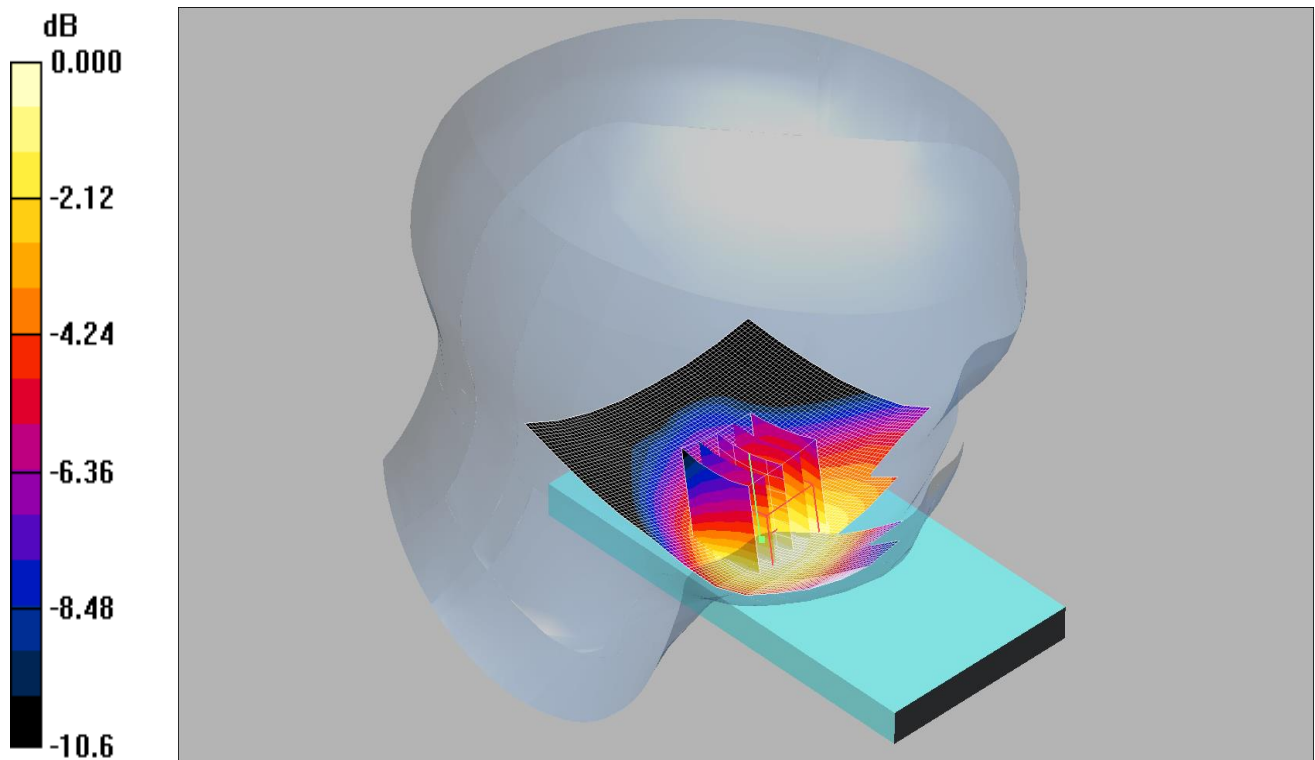

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1586; ConvF(6.31, 6.31, 6.31);

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn450; Calibrated: 28/09/2015

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Head - PBx/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.195 mW/g

Touch Left - Head - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.35 V/m; Power Drift = -0.046 dB


Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.131 mW/g

Maximum value of SAR (measured) = 0.193 mW/g

Date: 22/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

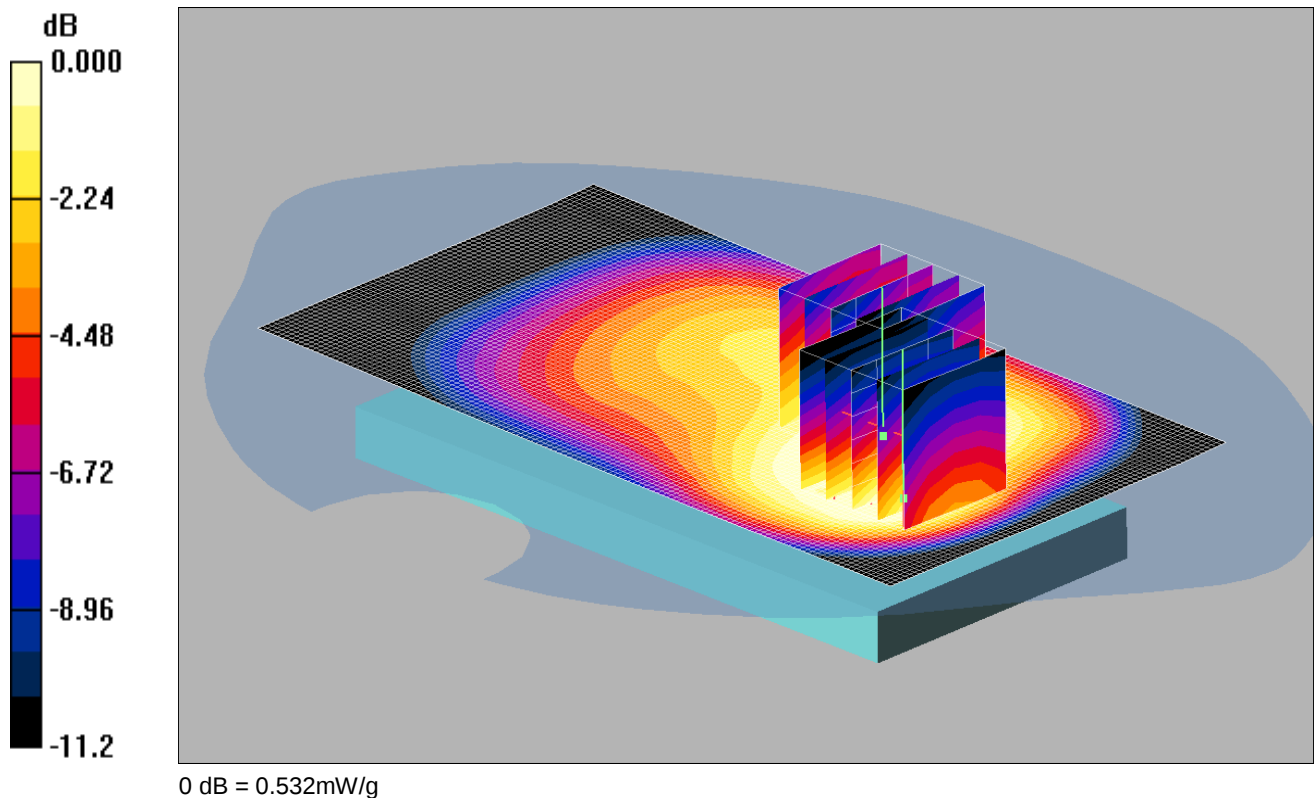

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.98, 5.98, 5.98);

- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/05/2015

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back - Hotspot - PBx/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.770 mW/g

Back - Hotspot - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.497 mW/g; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.531 mW/g

Back - Hotspot - PBx/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.667 W/kg


SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.532 mW/g

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

Date: 18/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

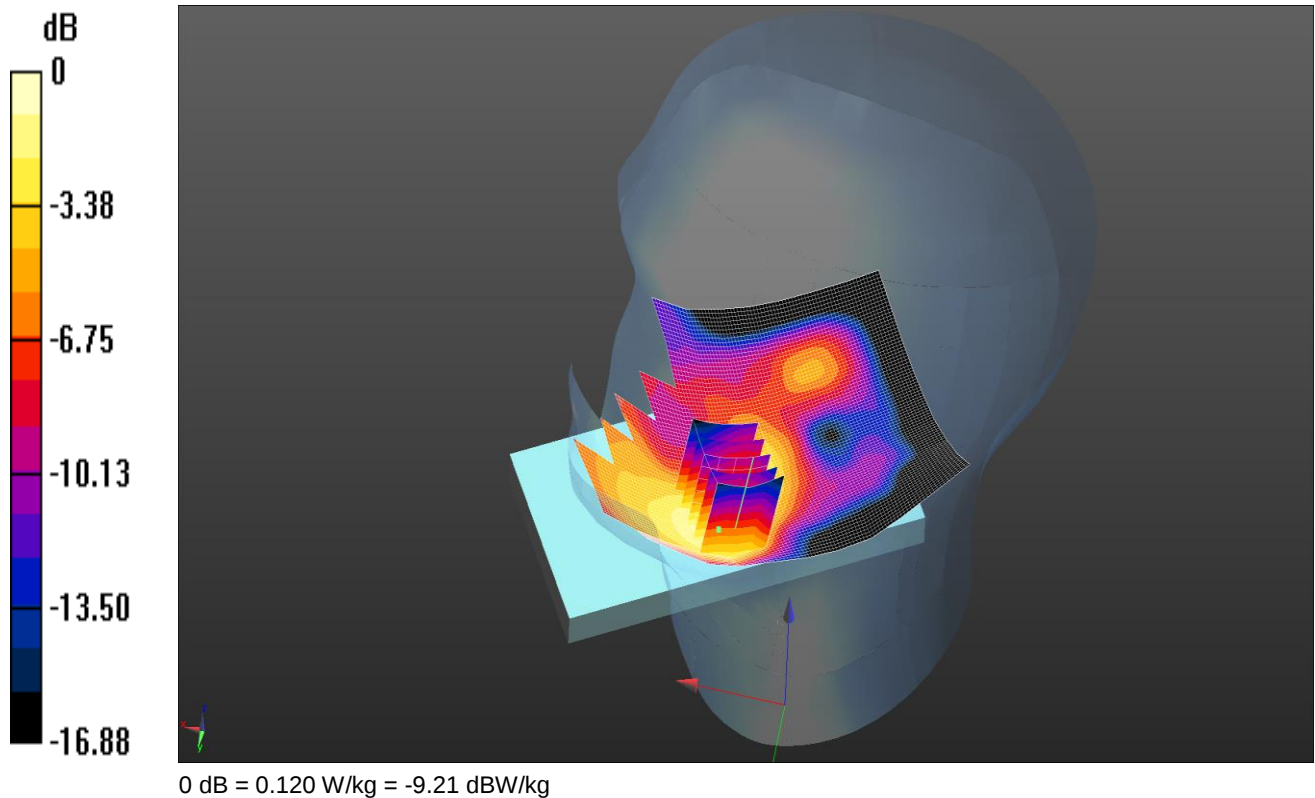

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 HSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 38.978$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(5.07, 5.07, 5.07); Calibrated: 25/8/2015;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016

- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836

- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right 50%RB Low - Head - PB0/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.117 W/kg

Configuration/Touch Right 50%RB Low - Head - PB0/Zoom Scan (7x7x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.050 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

Date: 5/5/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

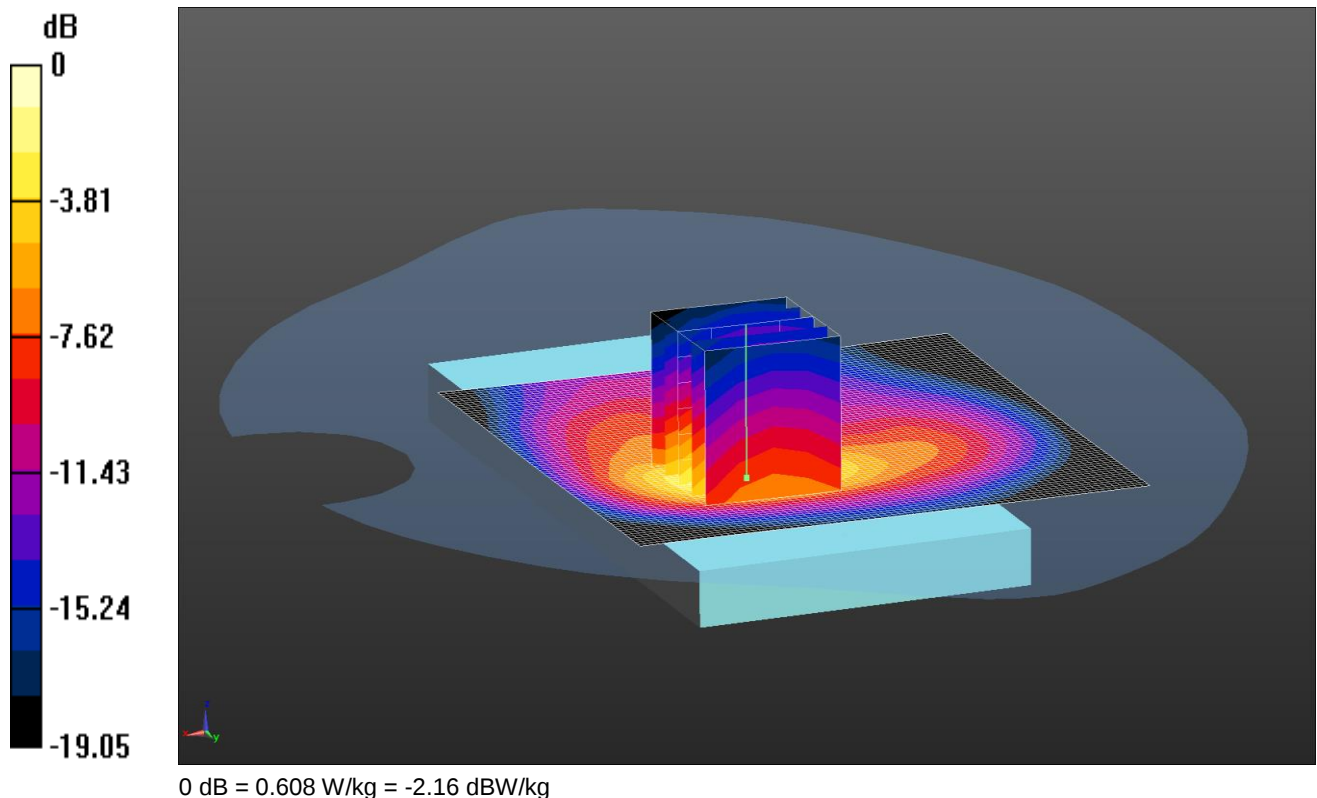

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.592$ S/m; $\epsilon_r = 51.333$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.78, 4.78, 4.78); Calibrated: 25/8/2015;

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016

- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836

- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back 1RB Low - Hotspot - PB1/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.484 W/kg

Configuration/Back 1RB Low - Hotspot - PB1/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.78 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.970 W/kg

SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.608 W/kg

Date: 6/5/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

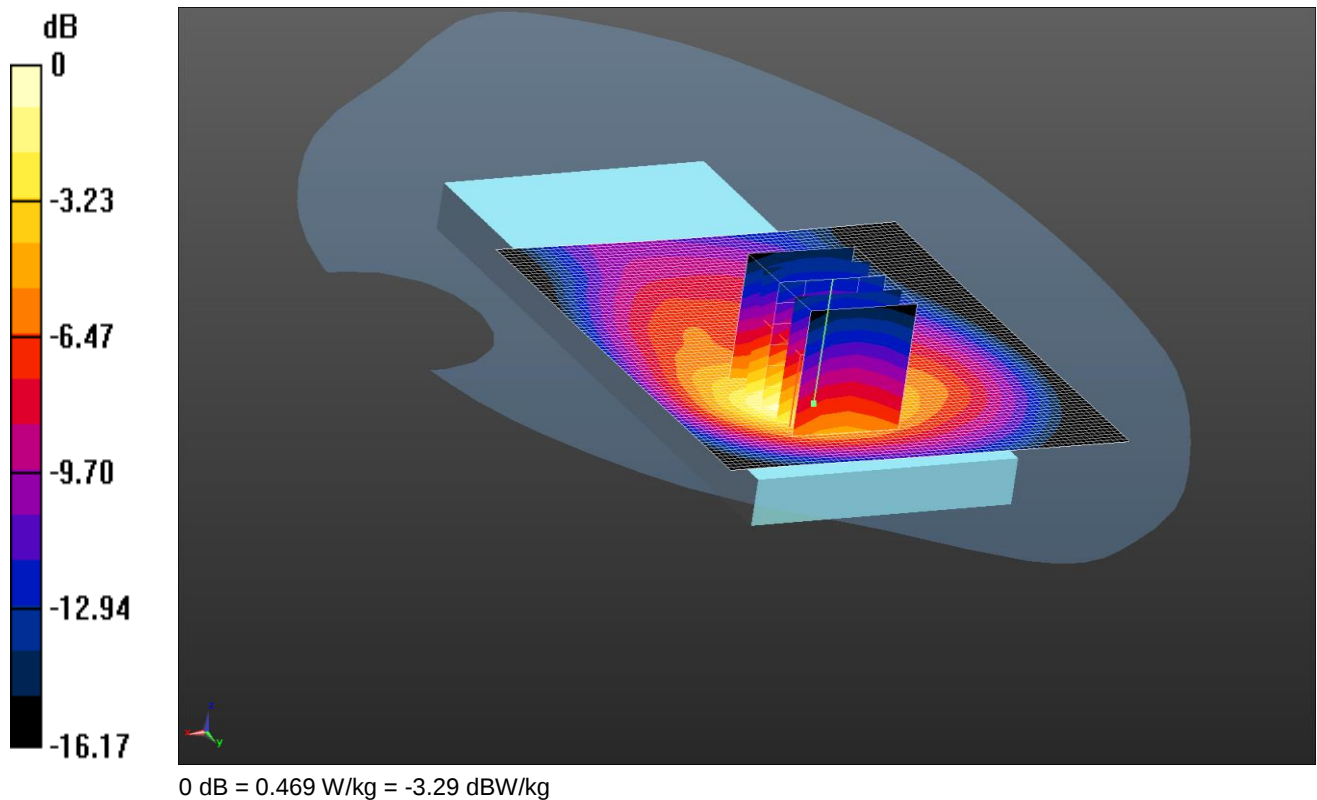

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: 1900 MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 51.366$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.78, 4.78, 4.78); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back 1RB Low - Bodyworn - PB0/Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm.
Maximum value of SAR (interpolated) = 0.459 W/kg

Configuration/Back 1RB Low - Bodyworn - PB0/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.58 V/m; Power Drift = 0.2dB


Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.469 W/kg

Date: 25/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I 6

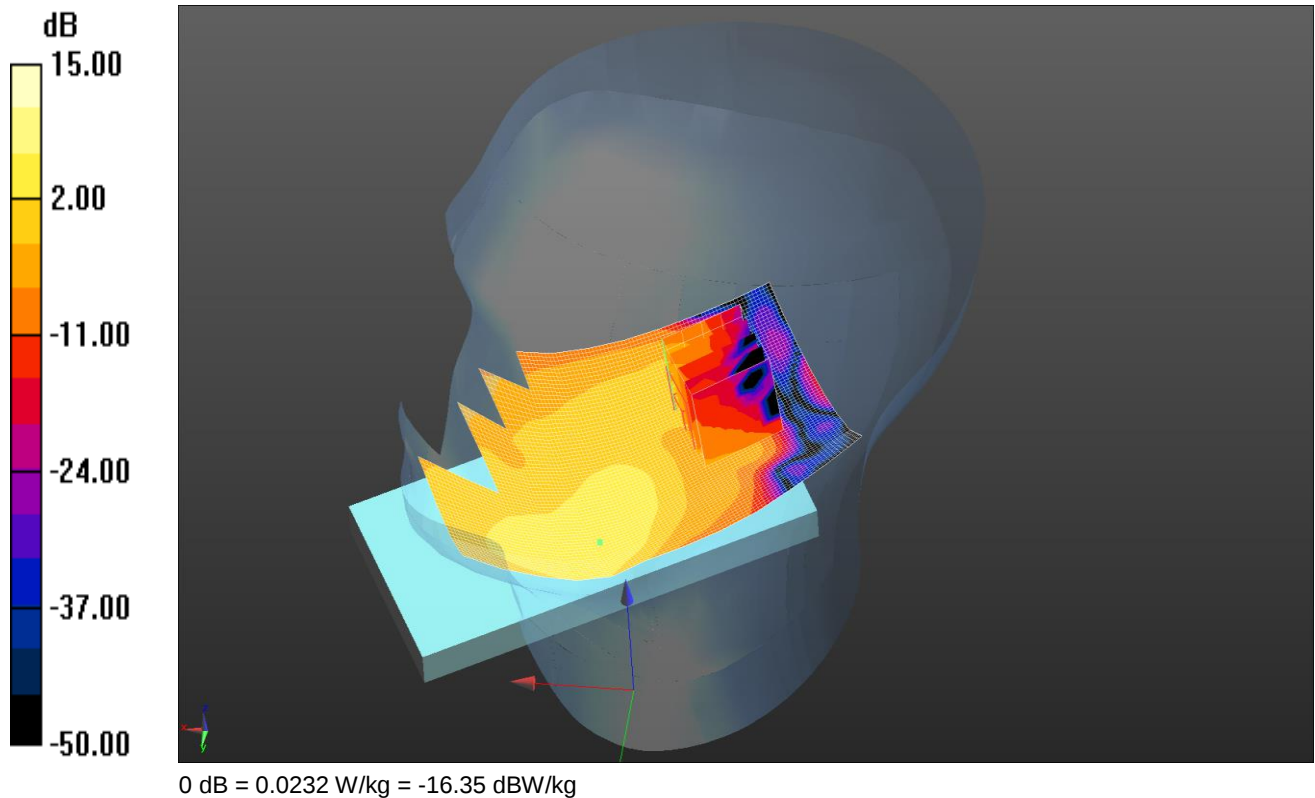

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: 1800 MHz HSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.288$ S/m; $\epsilon_r = 40.872$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(5.27, 5.27, 5.27); Calibrated: 25/8/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right 1RB Low - Head - PB0 2/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0953 W/kg

Configuration/Touch Right 1RB Low - Head - PB0 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.156 V/m; Power Drift = 0.60 dB


Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00782 W/kg

Maximum value of SAR (measured) = 0.0232 W/kg

Date: 3/5/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

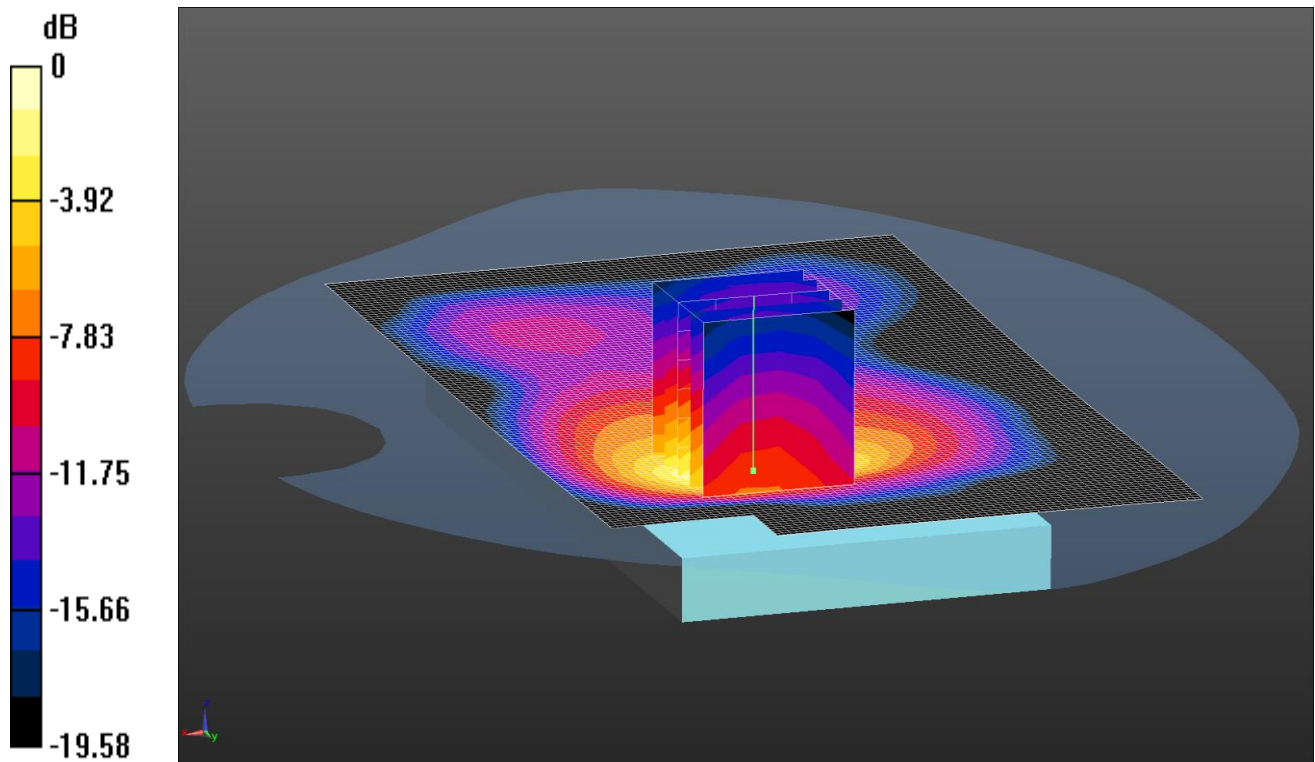

0 dB = 0.241 W/kg = -6.18 dBW/kg

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.102$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.93, 4.93, 4.93); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM B (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back 50%RB Low - Hotspot - PB1 2/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.244 W/kg

Configuration/Back 50%RB Low - Hotspot - PB1 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.79 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

Date: 28/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

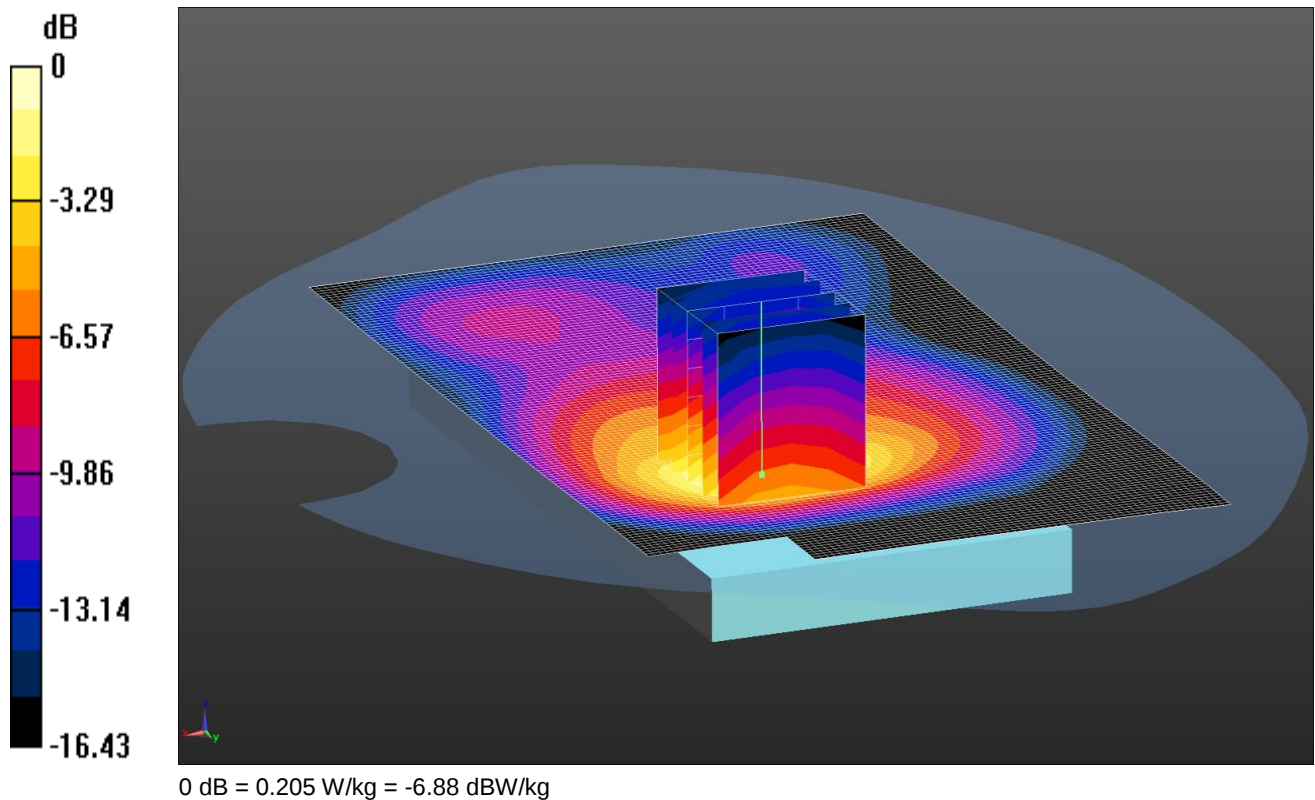

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: 1800 MHz MSL Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 52.804$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(4.93, 4.93, 4.93); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM B (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back - Bodyworn - PB0/Area Scan 2 2 (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.198 W/kg

Configuration/Back - Bodyworn - PB0/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.12 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.205 W/kg

Date: 21/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

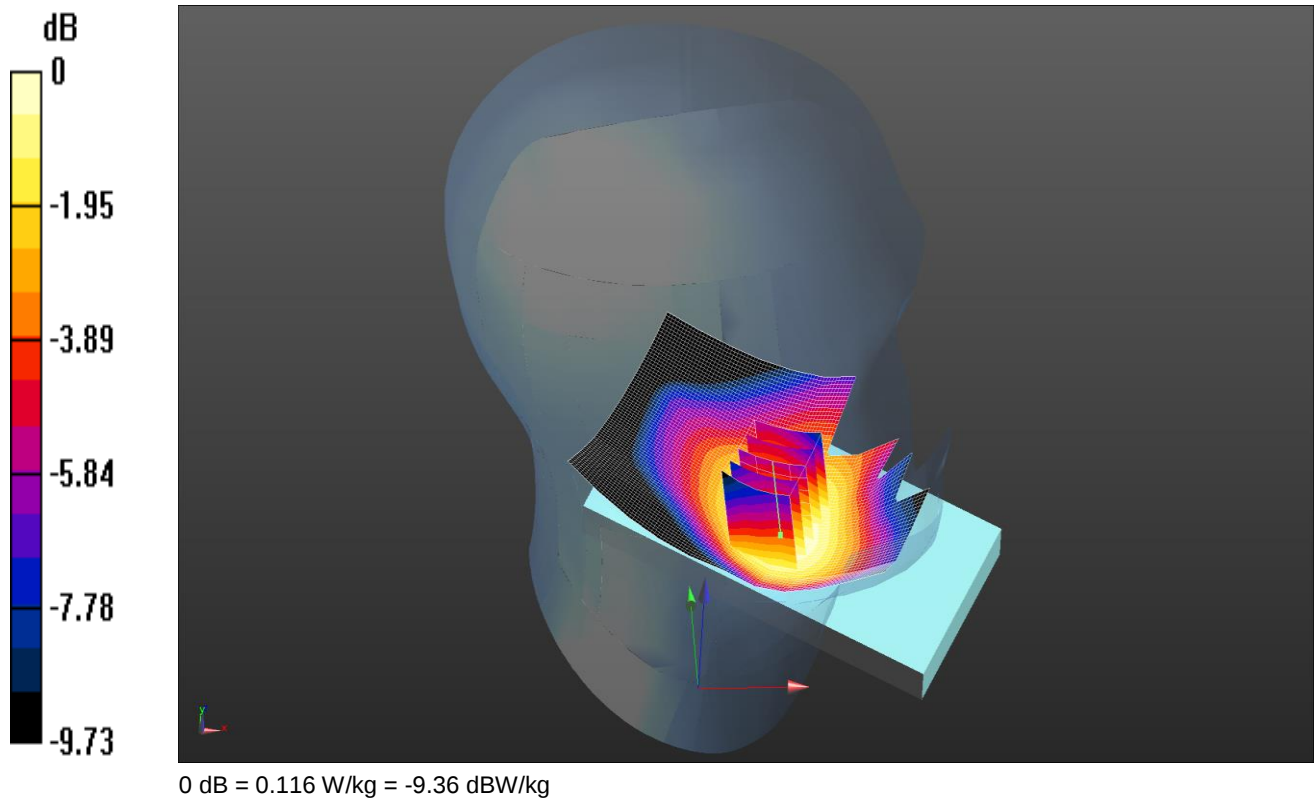

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 844 MHz; Duty Cycle: 1:1
Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 40.494$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(6.42, 6.42, 6.42); Calibrated: 25/8/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM B (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Left 1RB Middle - Head - PBx/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.120 W/kg

Configuration/Touch Left 1RB Middle - Head - PBx/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.446 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

Date: 09/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

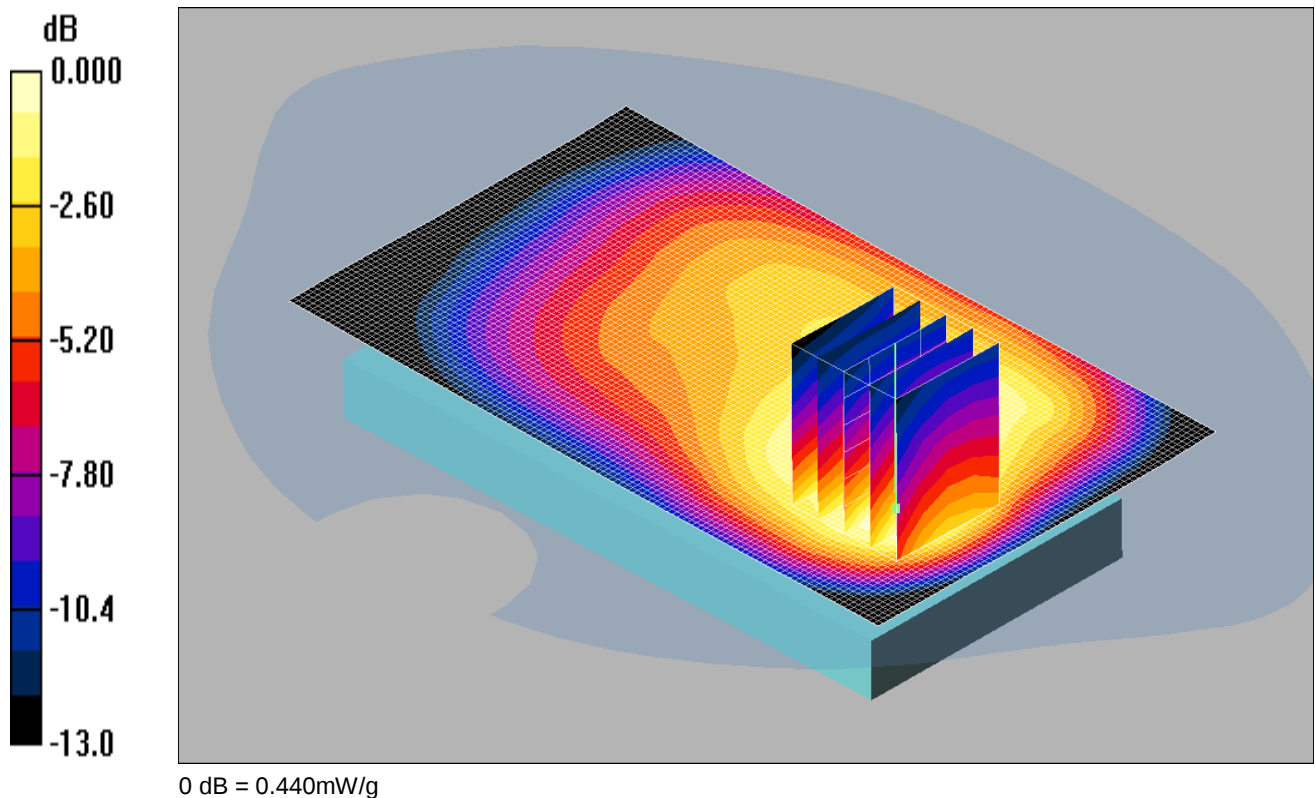

Communication System: LTE Band 5 / 10MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.991$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.05, 6.05, 6.05);

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn450; Calibrated: 28/09/2015

- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back 1RB Middle - Hotspot - PBx/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.476 mW/g

Back 1RB Middle - Hotspot - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.169 dB


Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

Date: 26/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

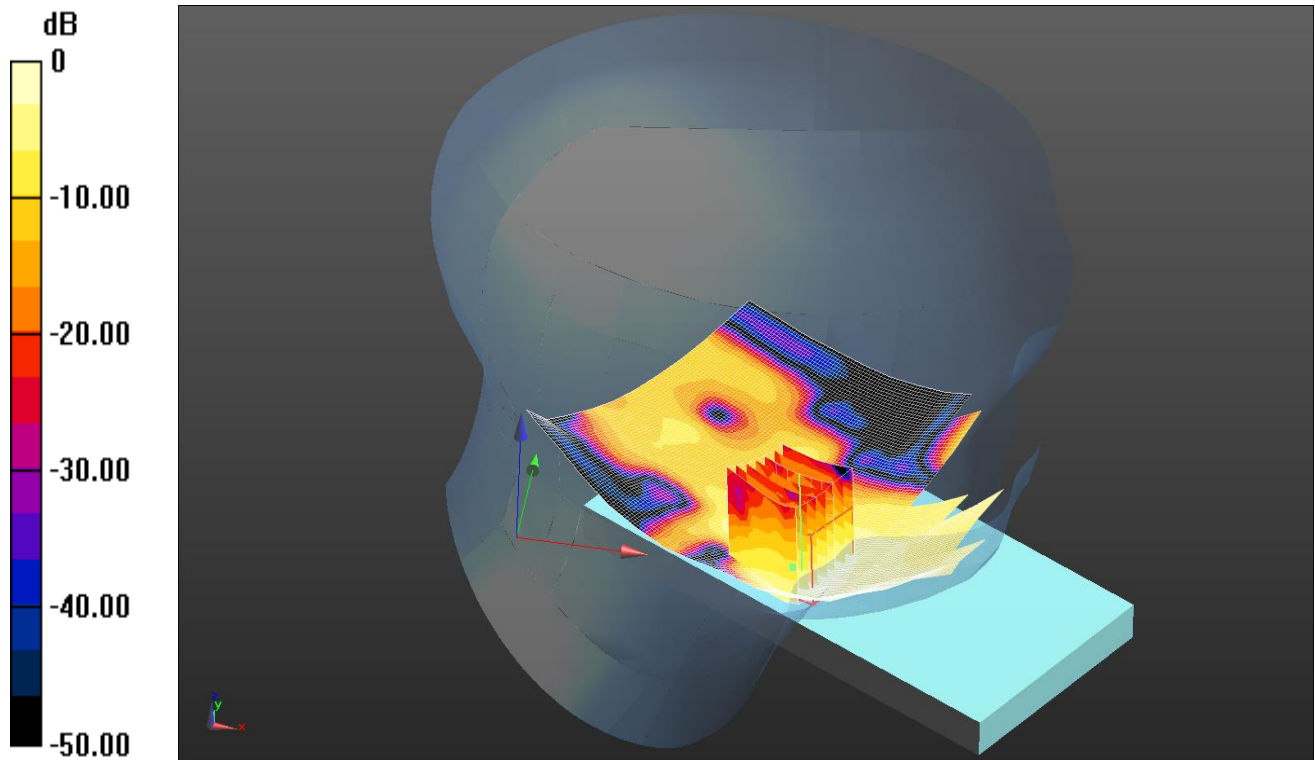


0 dB = 0.0818 W/kg = -10.87 dBW/kg

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.914$ S/m; $\epsilon_r = 38.417$; $\rho = 1000$ kg/m³
Phantom section: Left Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3335; ConvF(4.33, 4.33, 4.33); Calibrated: 23/07/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn432; Calibrated: 25/08/2015
- Phantom: SAMB (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)
Configuration/Touch Left 1RB Low - Head - PB0/Area Scan (101x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0651 W/kg
Configuration/Touch Left 1RB Low - Head - PB0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 5.466 V/m; Power Drift = 0.20 dB
Peak SAR (extrapolated) = 0.116 W/kg
SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.029 W/kg
Maximum value of SAR (measured) = 0.0818 W/kg

Date: 18/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

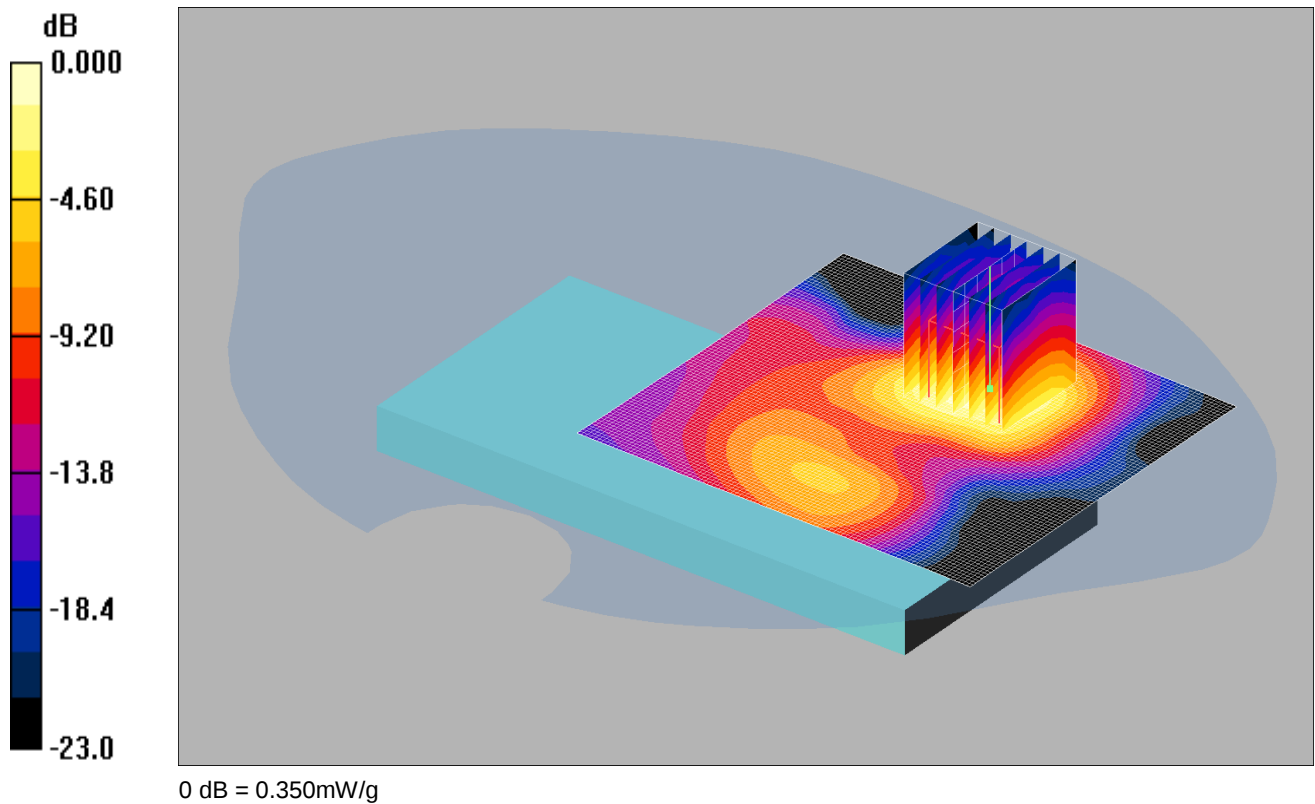

Communication System: LTE - Band 7/ 20MHz Channel; Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: 2600 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.14$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.16, 4.16, 4.16);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn432; Calibrated: 25/08/2015
- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back 1RB Middle - Hotspot - PB1/Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.359 mW/g

Back 1RB Middle - Hotspot - PB1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.89 V/m; Power Drift = 0.039 dB


Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

Date: 11/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

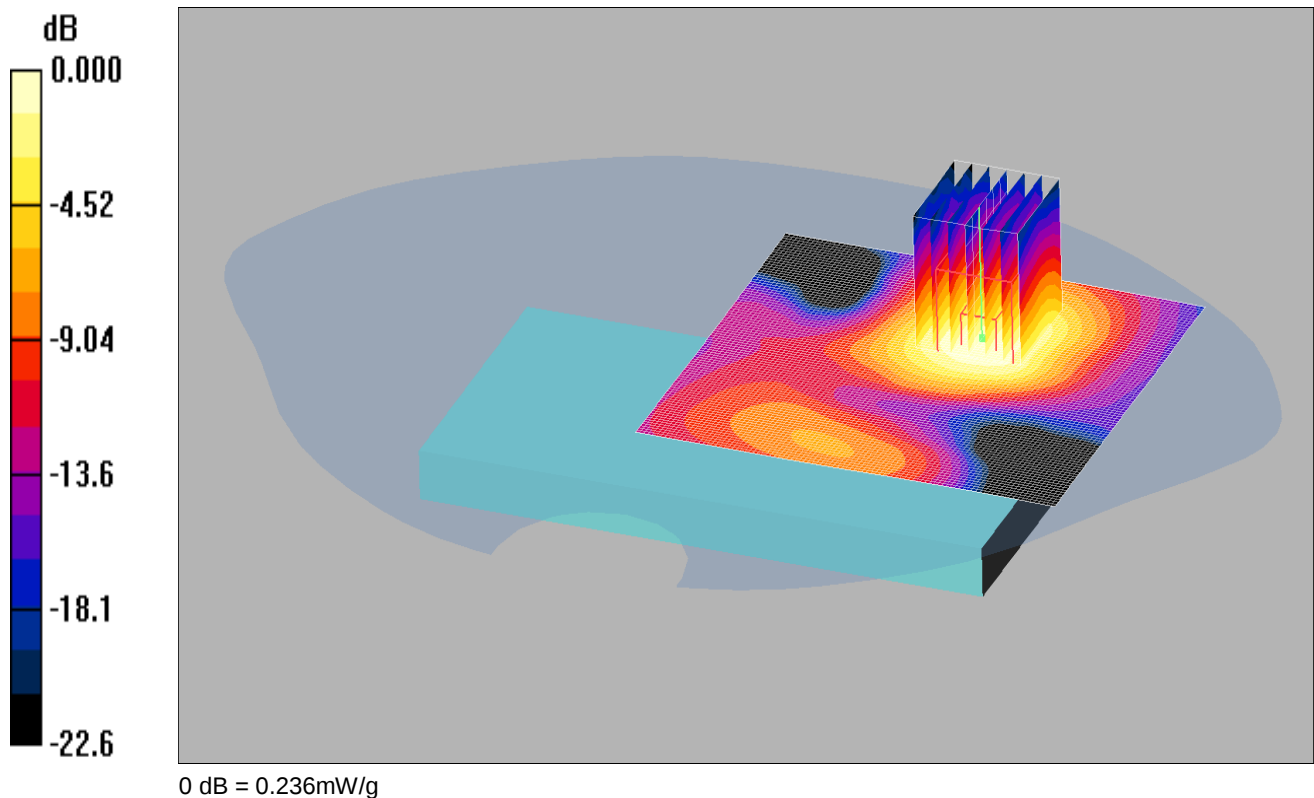

Communication System: LTE - Band 7/ 20MHz Channel; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: 2600 MHz MSL Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.16, 4.16, 4.16);

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn432; Calibrated: 25/08/2015

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back 1RB Low - Bodyworn - PB0 2/Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.230 mW/g

Back 1RB Low - Bodyworn - PB0 2/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.53 V/m; Power Drift = 0.018 dB


Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.099 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

Date: 16/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

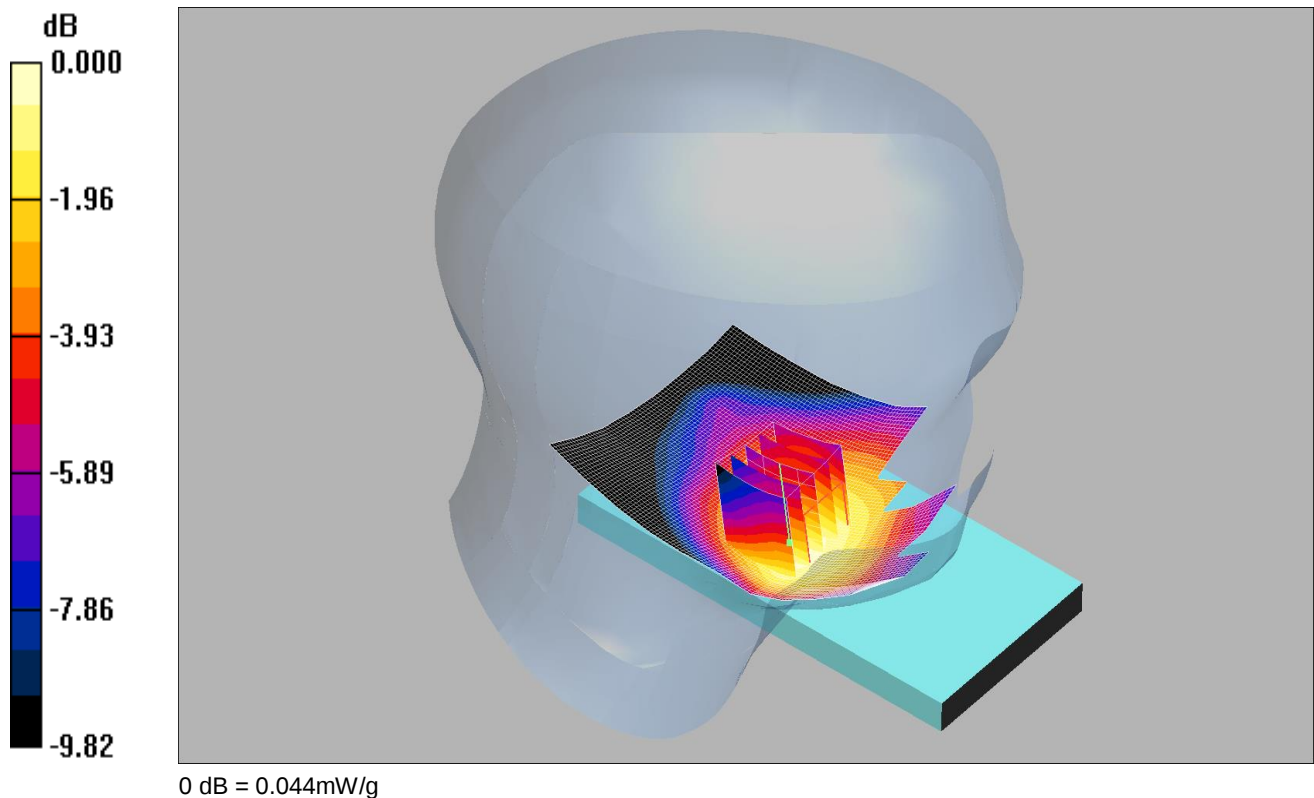

Communication System: LTE - Band 12 / 10MHz Channel; Frequency: 704 MHz; Duty Cycle: 1:1
Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 704$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1586; ConvF(6.6, 6.6, 6.6);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn450; Calibrated: 28/09/2015
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Head - PBx/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.043 mW/g

Touch Left - Head - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.48 V/m; Power Drift = -0.130 dB


Peak SAR (extrapolated) = 0.052 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

Date: 11/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

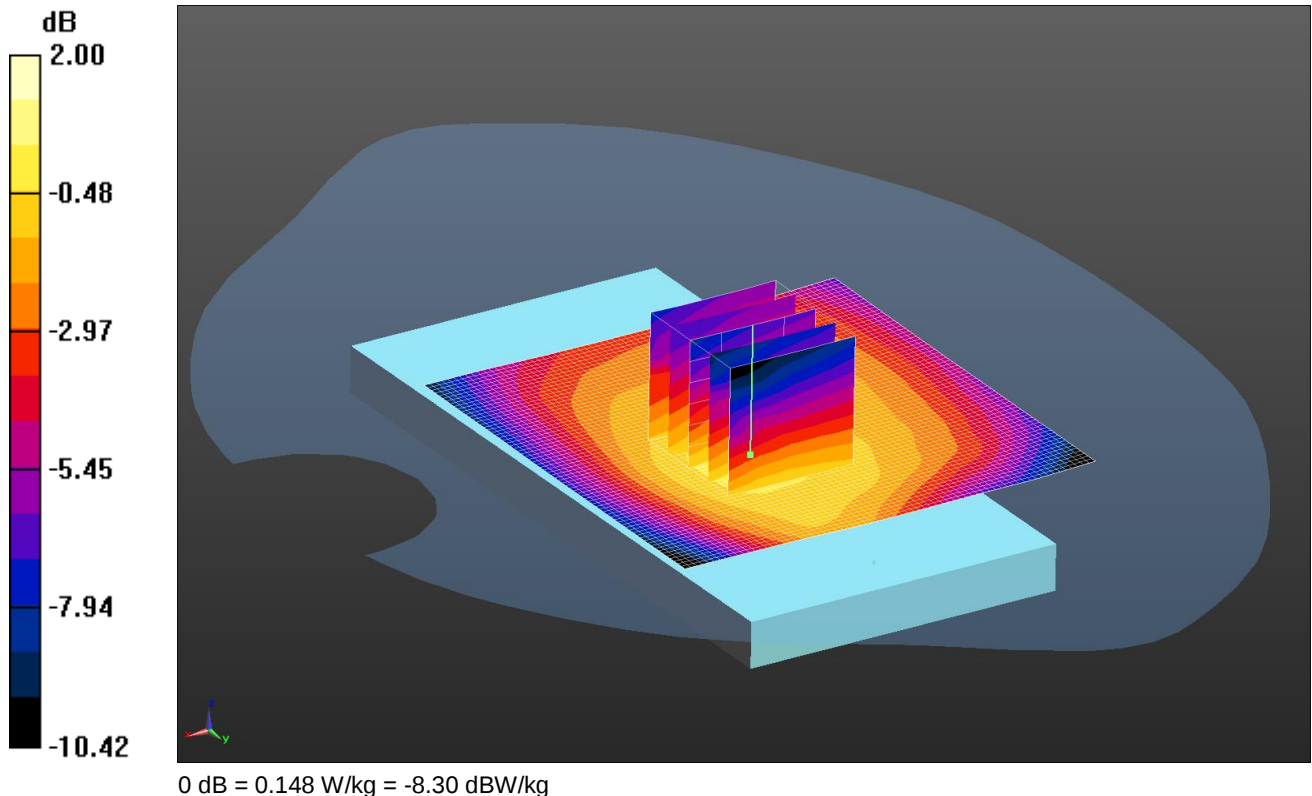

Communication System: UID 0, LTE - Band 12 / 10MHz Channel; Frequency: 711 MHz; Duty Cycle: 1:1
Medium: 900/750 MHz MSL Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 53.916$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.11, 6.11, 6.11); Calibrated: 22/04/2016;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn450; Calibrated: 28/09/2015
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- ; SEMCAD X Version 14.6.10 (7372)

Configuration/Back 1RB low - Hotspot - PBx 2/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.144 W/kg

Configuration/Back 1RB low - Hotspot - PBx 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.24 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

Date: 18/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

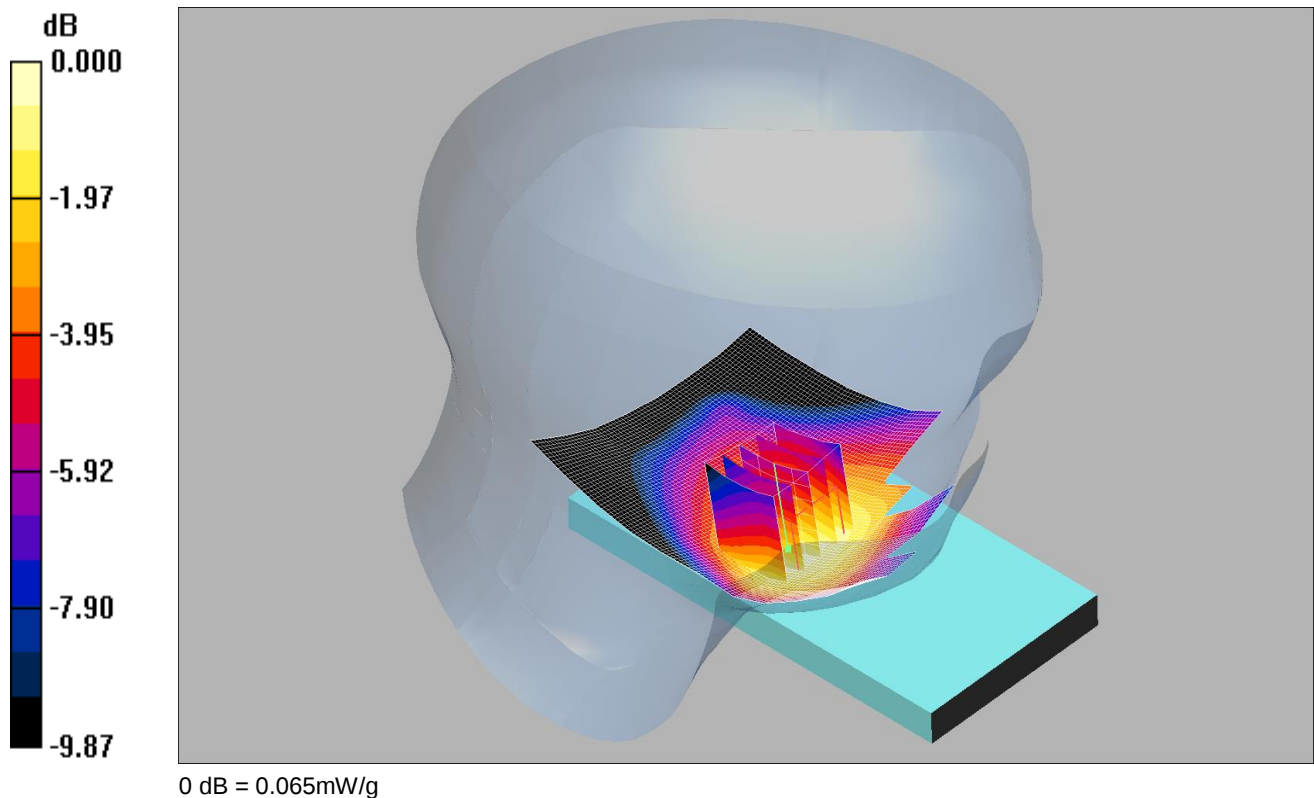

Communication System: LTE - Band 13 / 10MHz Channel; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1586; ConvF(6.6, 6.6, 6.6);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn450; Calibrated: 28/09/2015
- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Head - PBx/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.064 mW/g

Touch Left - Head - PBx/Zoom Scan (5x5x7) 3 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.10 V/m; Power Drift = 0.093 dB


Peak SAR (extrapolated) = 0.081 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

Date: 13/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

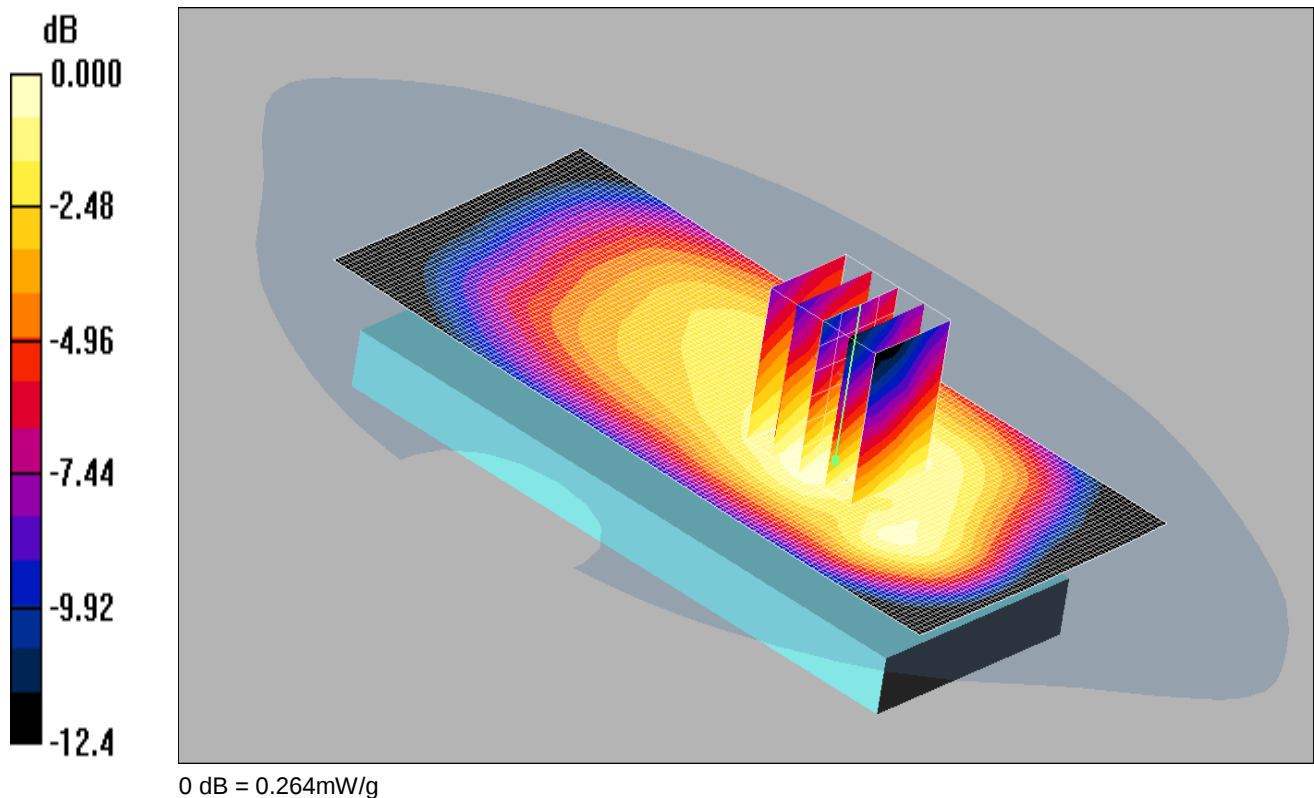

Communication System: LTE - Band 13 / 10MHz Channel; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: 900/750 MHz MSL Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.949$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1528; ConvF(6.11, 6.11, 6.11);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn450; Calibrated: 28/09/2015
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back 1RB High - Hotspot - PBx 3/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.262 mW/g

Back 1RB High - Hotspot - PBx 3/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.2 V/m; Power Drift = 0.071 dB
Peak SAR (extrapolated) = 0.330 W/kg
SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.181 mW/g
Maximum value of SAR (measured) = 0.264 mW/g

Date: 19/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

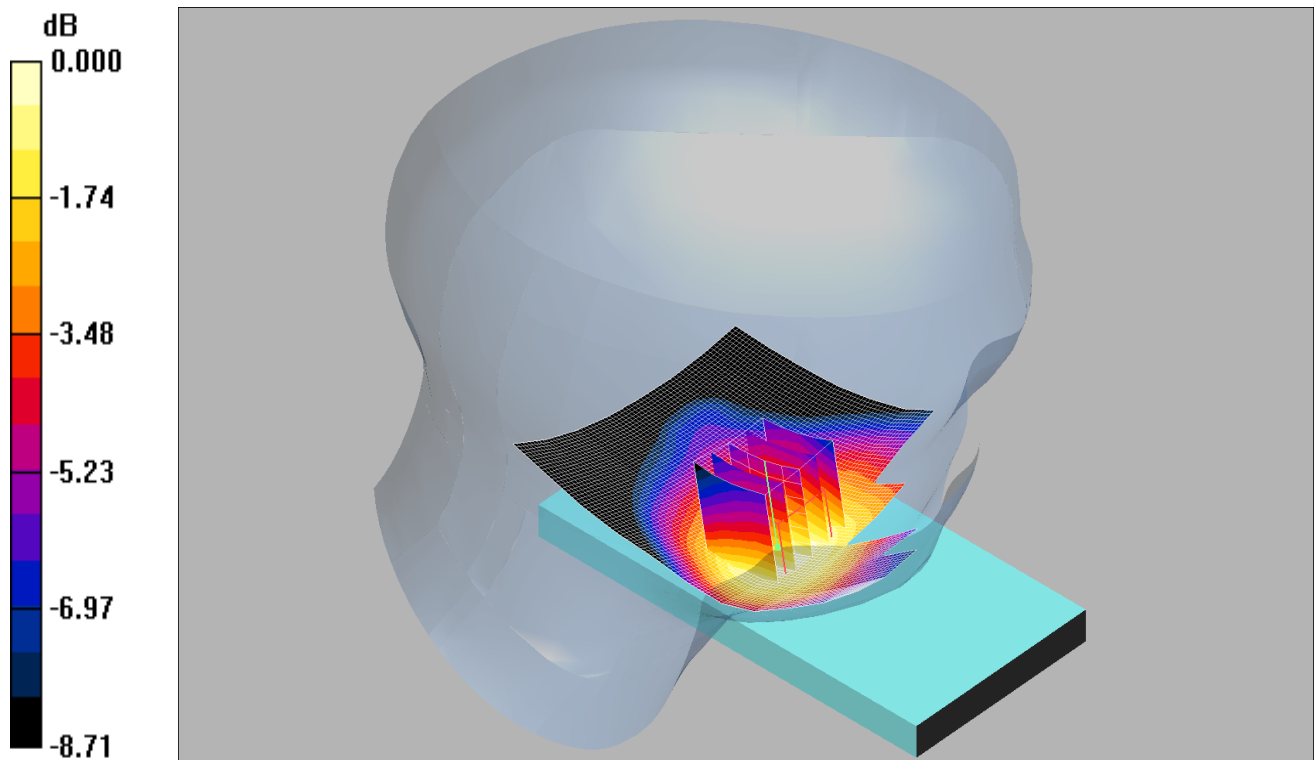

0 dB = 0.042mW/g

Communication System: LTE - Band 17 / 10MHz Channel; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 710$ MHz; $\sigma = 0.838$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1586; ConvF(6.6, 6.6, 6.6);

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn450; Calibrated: 28/09/2015

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left - Head - PBx/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.041 mW/g

Touch Left - Head - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.37 V/m; Power Drift = 0.000 dB


Peak SAR (extrapolated) = 0.050 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

Date: 17/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

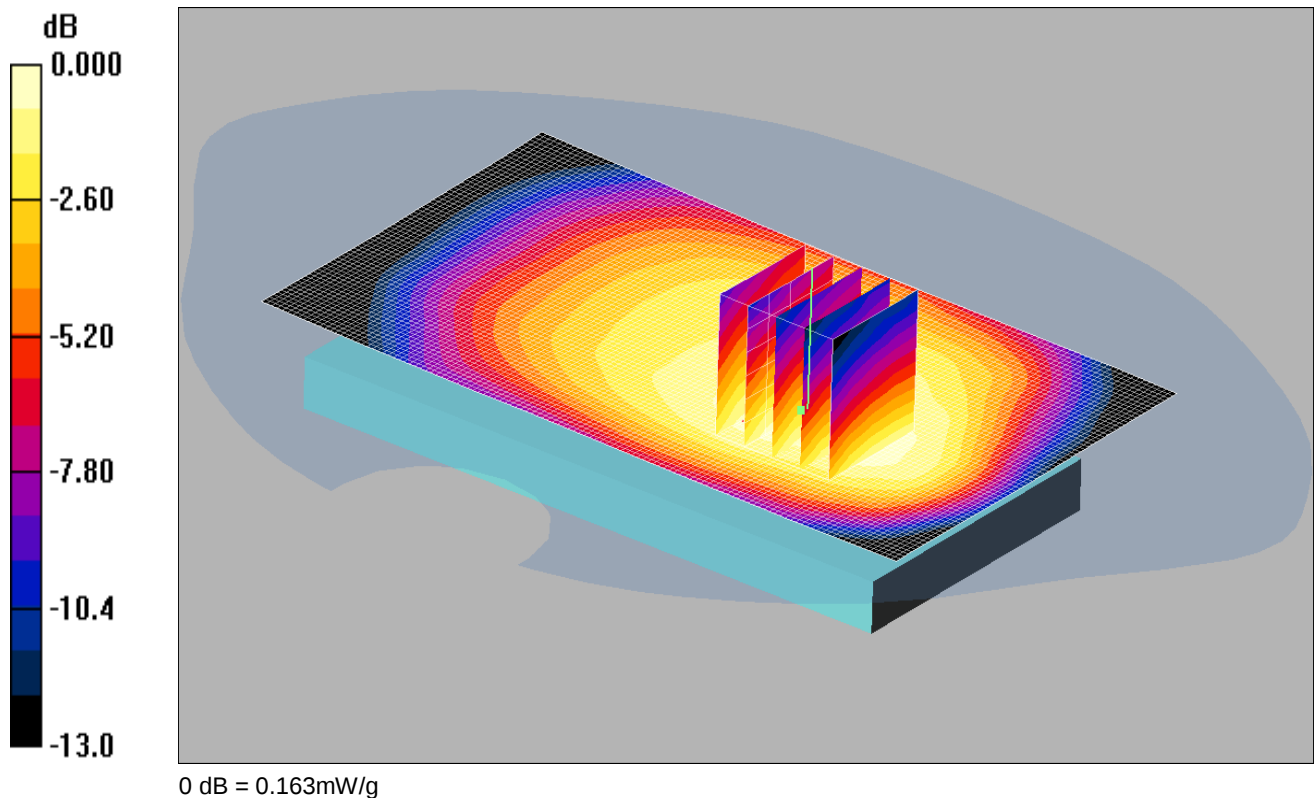

Communication System: LTE - Band 17 / 10MHz Channel; Frequency: 709 MHz; Duty Cycle: 1:1
Medium: 900/750 MHz MSL Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(6.11, 6.11, 6.11);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn450; Calibrated: 28/09/2015
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back 1RB High - Hotspot - PBx 3 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.159 mW/g

Back 1RB High - Hotspot - PBx 3 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.038 dB


Peak SAR (extrapolated) = 0.201 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.163 mW/g

Date: 19/4/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

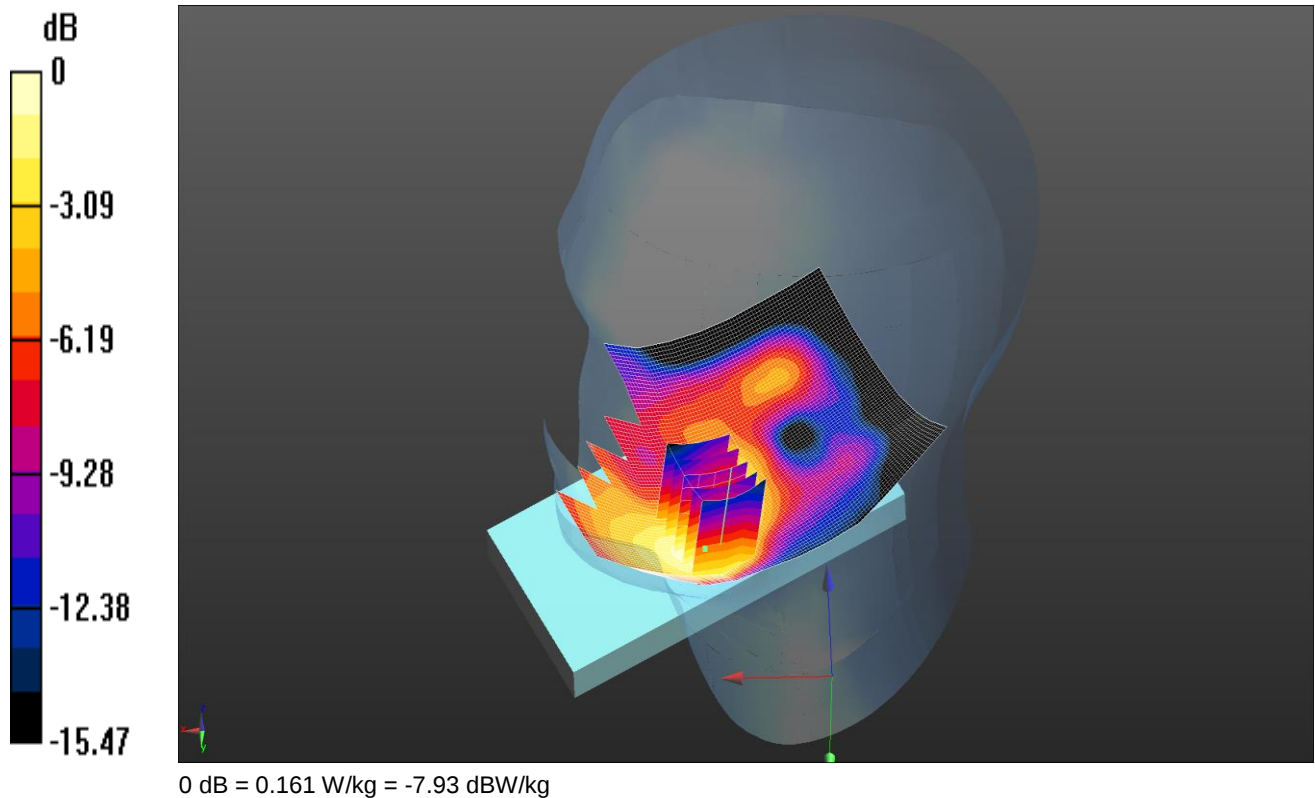

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: 1900 HSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.173$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3341; ConvF(5.07, 5.07, 5.07); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Touch Right 1RB Low - Head - PB0/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.169 W/kg

Configuration/Touch Right 1RB Low - Head - PB0/Zoom Scan (7x7x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.17 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

Date: 9/5/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

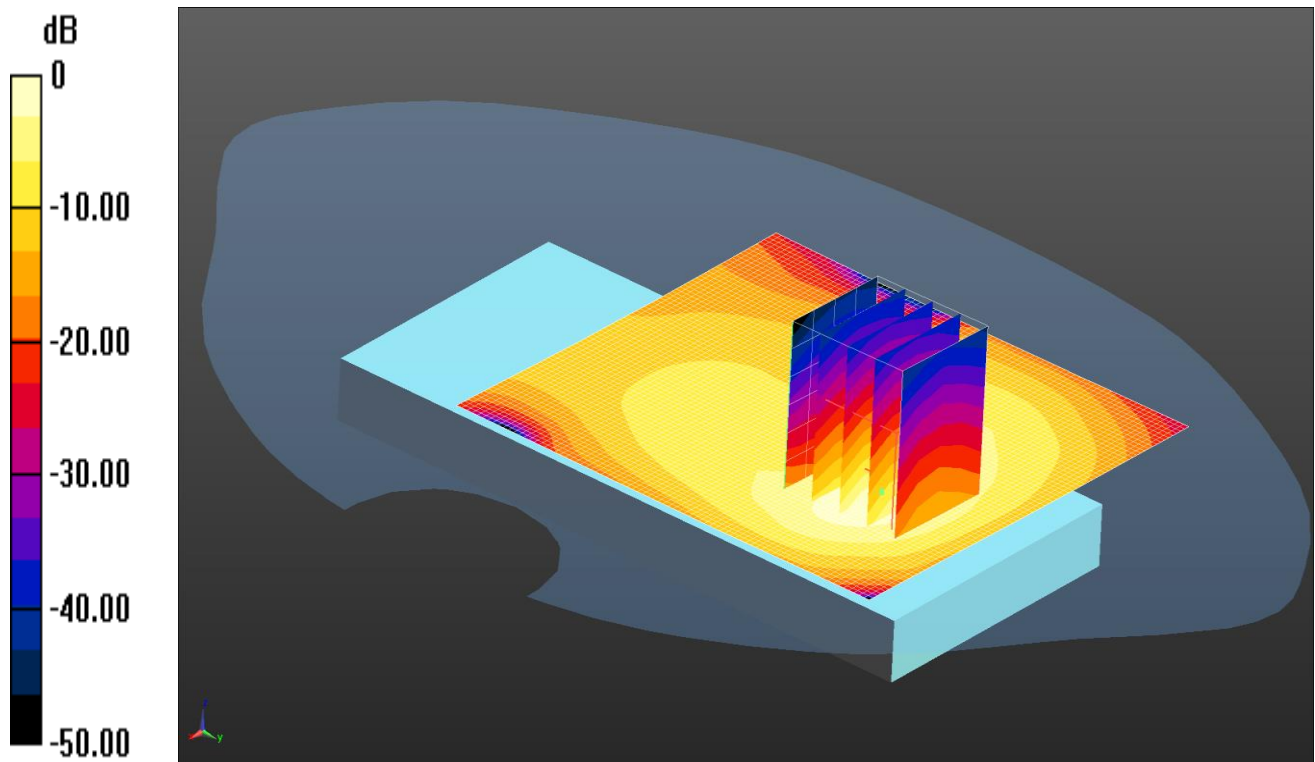

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 51.761$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3341; ConvF(4.78, 4.78, 4.78); Calibrated: 25/8/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/2/2016
- Phantom: SAM A (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1836
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back 1RB Low - Hotspot - PB1 2/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.466 W/kg

Configuration/Back 1RB Low - Hotspot - PB1 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.094 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.475 W/kg

Date: 16/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

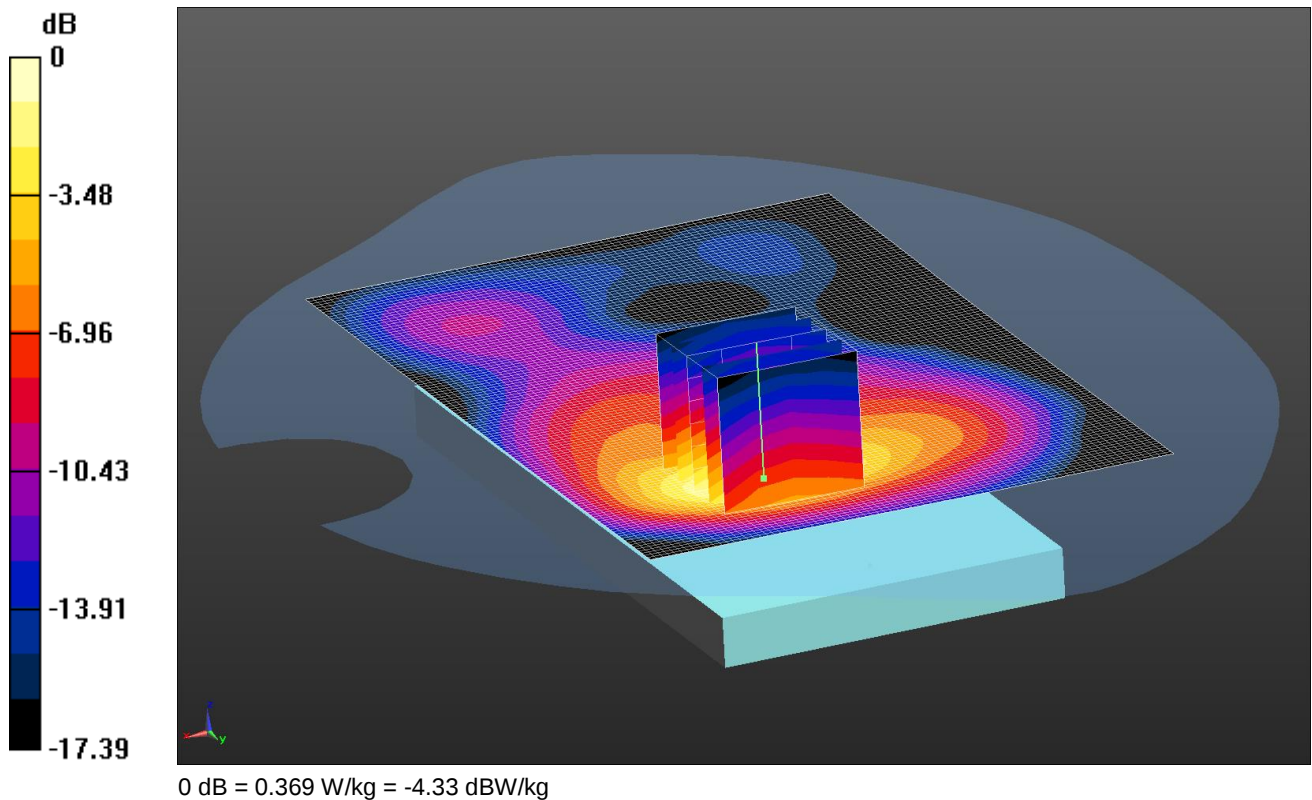

Communication System: UID 0, LTE FDD Bands - 20MHz Channel BW (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.495$ S/m; $\epsilon_r = 51.771$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(7.84, 7.84, 7.84); Calibrated: 26/04/2016;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 12/02/2016
- Phantom: SAM 1-2 (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1817
- ; SEMCAD X Version 14.6.10 (7372)

Configuration/Back 1RB Low - Bodyworn - PB0/Area Scan (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.354 W/kg

Configuration/Back 1RB Low - Bodyworn - PB0/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.605 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.369 W/kg

Date: 06/05/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

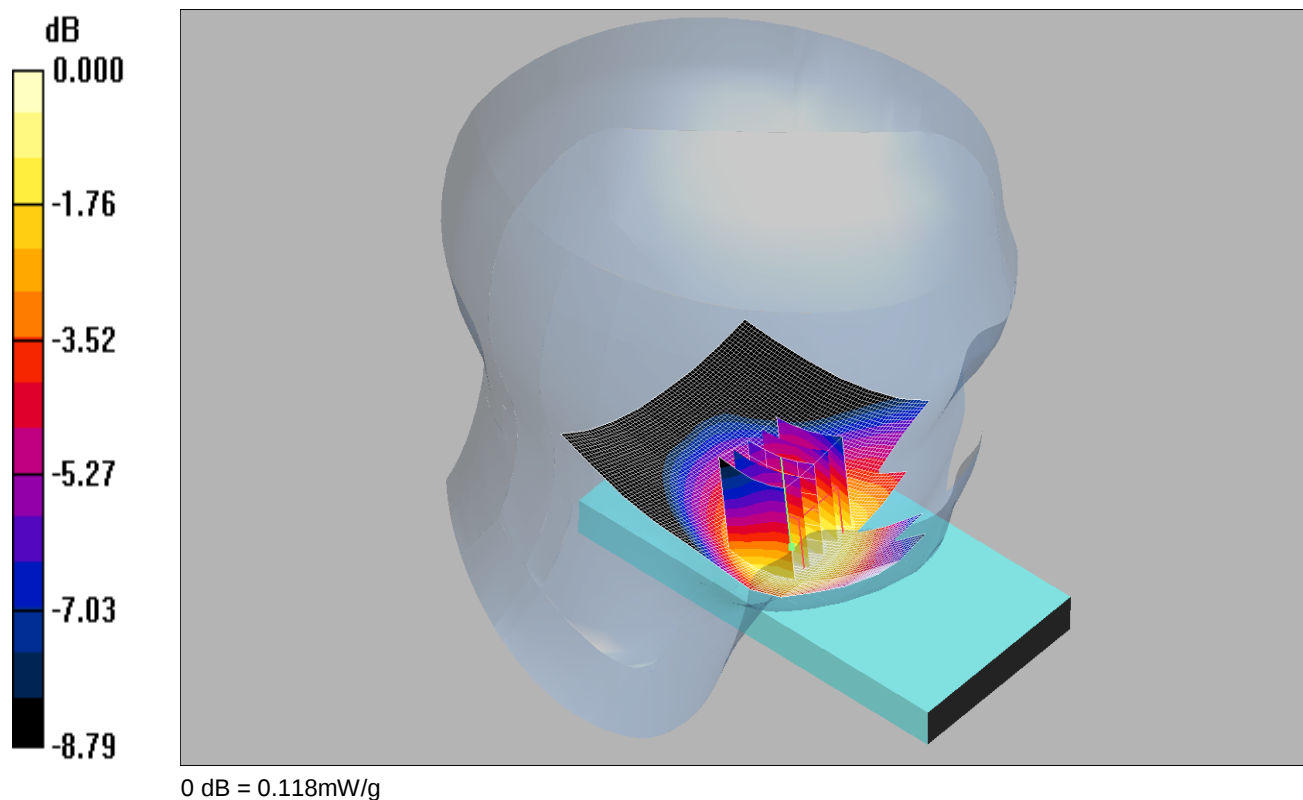

Communication System: LTE Band 26 / 15MHz; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.909$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1586; ConvF(6.31, 6.31, 6.31);

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn450; Calibrated: 28/09/2015

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Left 1RB Low - Head - PBx/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.119 mW/g

Touch Left 1RB Low - Head - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.014 dB


Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.087 mW/g

Maximum value of SAR (measured) = 0.118 mW/g

Date: 28/04/2016

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

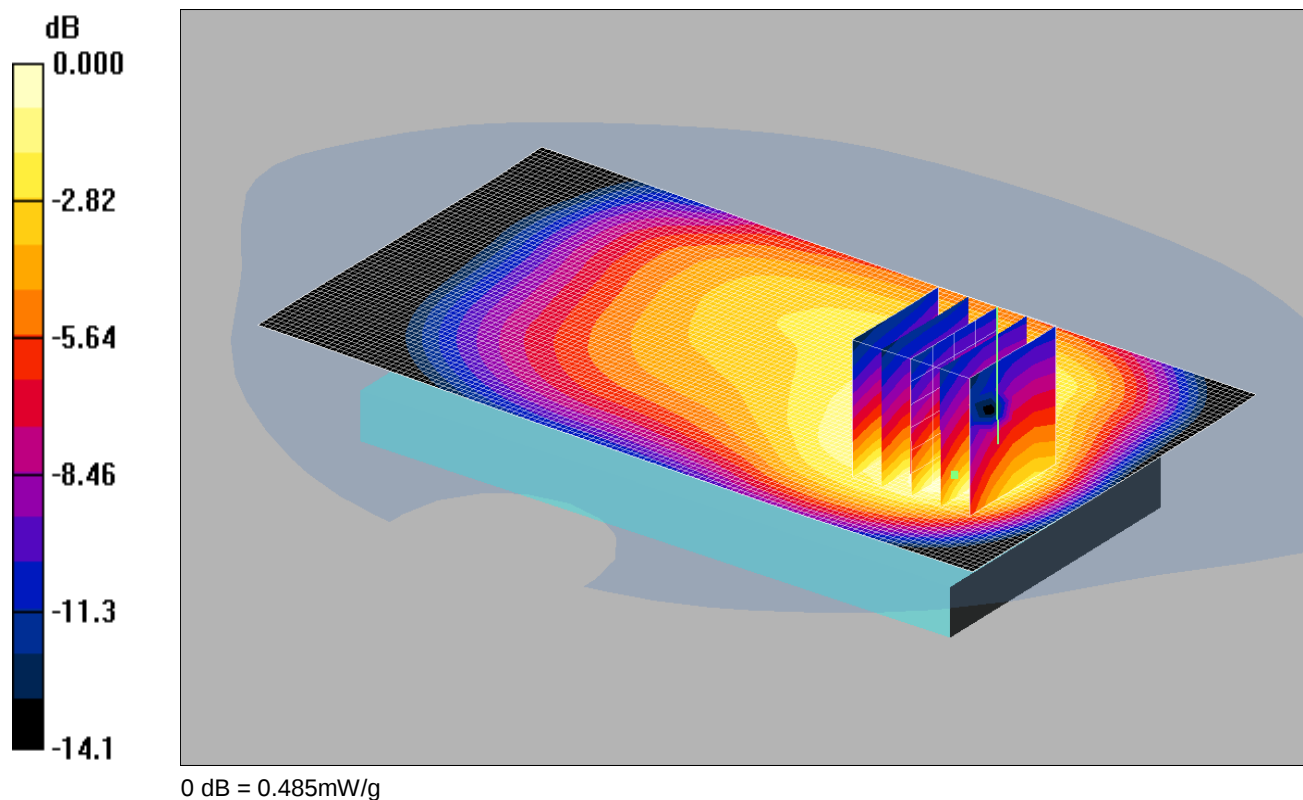

Communication System: LTE - Band 26 / 15MHz Channel; Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(5.98, 5.98, 5.98);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 26/05/2015
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back 1RB Low - Hotspot - PBx/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.527 mW/g

Back 1RB Low - Hotspot - PBx/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.3 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.912 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.485 mW/g

DUT: Model Name: Solarin; Model Number: SR0020-W; FCC ID: 2AIP8I

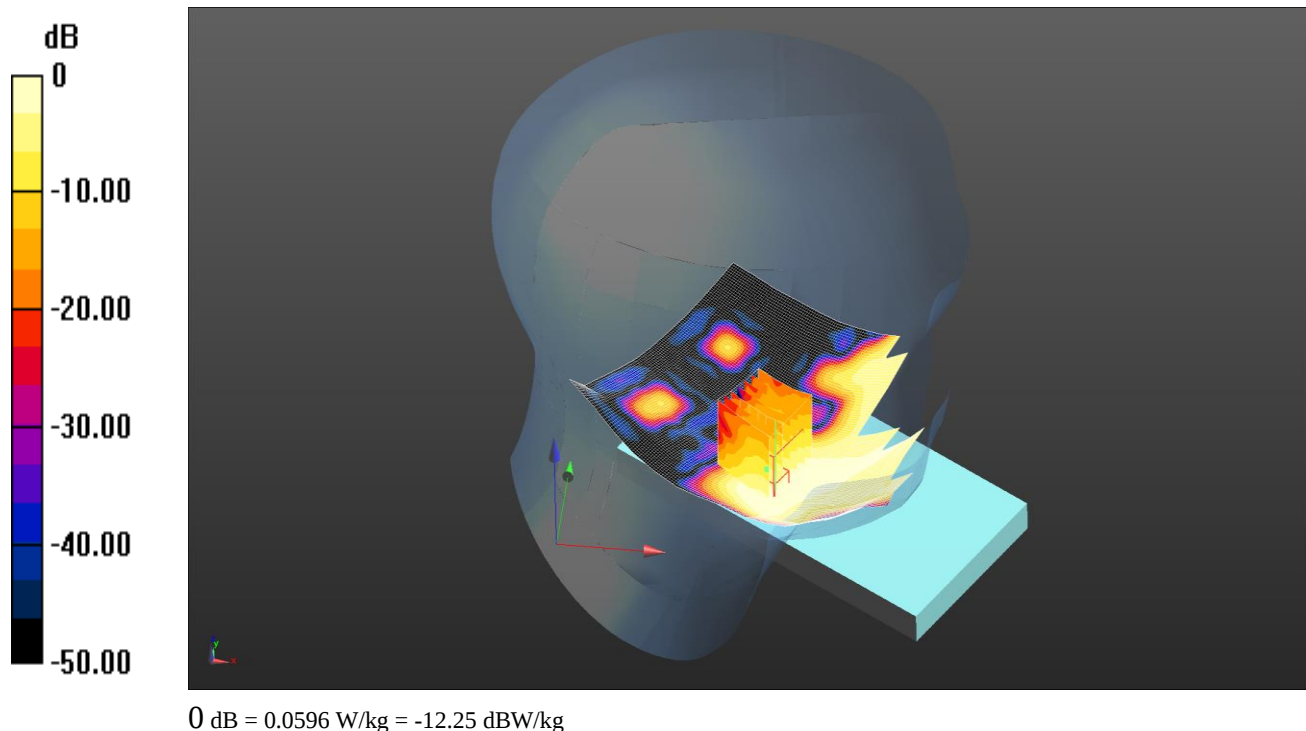

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2310$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 40.143$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.78, 4.78, 4.78); Calibrated: 23/07/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn432; Calibrated: 25/08/2015
- Phantom: SAMB (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7372)

Configuration/Touch Left 50%RB Low - Head - PB0/Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0473 W/kg

Configuration/Touch Left 50%RB Low - Head - PB0/Zoom Scan (7x7x7) 2 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.625 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0596 W/kg