

Page 1 of 28

APPLICATION CERTIFICATION On Behalf of American Lighting Inc.

RF remote controller Model No.: AL-RF

FCC ID: 2AIQ4-AL-RF

Prepared for : American Lighting Inc.

Address : 11775 E. 45th AVE Denver, United States, 80239

Prepared by : ACCURATE TECHNOLOGY CO., LTD

Address : F1, Bldg. A&D, Changyuan New Material Port, Keyuan

Rd. Science & Industry Park, Nanshan, Shenzhen,

Guangdong P.R. China

Tel: 3013623000 Fax: (0755) 26503396

Report Number : ATE20161161
Date of Test : Jun 13-16, 2016
Date of Report : Jun 17, 2016






TABLE OF CONTENTS

Description Page

Test Report Certification

1. (GENERAL INFORMATION	4
1.1.	. Description of Device (EUT)	4
1.2.	. Description of Test Facility	5
1.3.	. Measurement Uncertainty	5
2. I	MEASURING DEVICE AND TEST EQUIPMENT	6
3. §	SUMMARY OF TEST RESULTS	7
4.	THE FIELD STRENGTH OF RADIATION EMISSION	8
4.1.		
4.2.		9
4.3.		
4.4.	. Operating Condition of EUT	9
4.5.		
4.6.	. The Field Strength of Radiation Emission Measurement Results	11
5. 2	20DB OCCUPIED BANDWIDTH	13
5.1.		13
5.2.		13
5.3.		
5.4.		
5.5.		
5.6.		
6. 1	RELEASE TIME MEASUREMENT	
6.1.		
6.2.	8	
6.3.		
6.4.		
6.5.		
6.6.		
7. A	AVERAGE FACTOR MEASUREMENT	
7.1.		17
7.2.		17
7.3.		
7.4.	· · · · · · · · · · · · · · · · · · ·	
7.5.		
7.6.		
	ANTENNA REQUIREMENT	
8.1.	1	
8.2.	Antenna Construction	19



Page 3 of 28

Test Report Certification

Applicant : American Lighting Inc.

Manufacturer : Gateway Plastic Hardware & Lighting Co., Ltd.

EUT Description : RF remote controller

Model No. : AL-RF

Trade Mark : AMERICAN LIGHTING

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.231a ANSI C63.10-2013

The device described above is tested by ACCURATE TECHNOLOGY CO., LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231a. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO., LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO., LTD.

Date of Test:	Jun 13-16, 2016
Date of Report :	Jun 17, 2016
Prepared by :	Mark Cher
	(Mark Chen, Engineer)
Approved & Authorized Signer :	Lemil
	(Sean Liu, Manager)



Page 4 of 28

1. GENERAL INFORMATION

1.1.Description of Device (EUT)

EUT : RF remote controller

Model Number : AL-RF

Power Supply : DC 12V (Power by battery)

Modulation: : ASK antenna gain : 0dBi

Operation : 433.92MHz

Frequency

Type of Antenna : PCB antenna

Applicant : American Lighting Inc.

Address : 11775 E. 45th AVE Denver, United States, 80239

Manufacturer : Gateway Plastic Hardware & Lighting Co., Ltd.

Address : Jingfu Road, Xincheng Industrial Area, Hengli Town,

Dongguan, Guangdong

Date of sample

received

: Jun 13, 2016

Date of Test : Jun 13-16, 2016



Page 5 of 28

1.2.Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC

The Registration Number is 752051

Listed by Industry Canada

The Registration Number is 5077A-2

Accredited by China National Accreditation Committee

for Laboratories

The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO., LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.

Science & Industry Park, Nanshan, Shenzhen, Guangdong

P.R. China

1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2


(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2

(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2

(Above 1GHz)





2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Туре	S/N	Calibrated dates	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 9, 2016	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 9, 2016	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 9, 2016	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 9, 2016	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 14, 2016	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 14, 2016	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 14, 2016	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan. 14, 2016	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 9, 2016	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 9, 2016	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 9, 2016	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 9, 2016	1 Year



Page 7 of 28

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(b)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(a)(1)	Release Time Measurement	Compliant
Section 15.203	Antenna Requirement	Compliant

The product is a manually operated transmitter.

Section 15.231 (a) (2), (3), (4) and (5) are not applicable.

All normal using modes of the normal function were tested but only the worst test data of the worst mode is recorded by this report.

Note: The power supply mode of the EUT is DC 12V, According to the FCC standard requir ements, conducted emission is not applicable.

Page 8 of 28



4. THE FIELD STRENGTH OF RADIATION EMISSION

4.1.Block Diagram of Test Setup


4.1.1.Block diagram of connection between the EUT and simulators



(EUT: RF remote controller)

4.1.2.Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

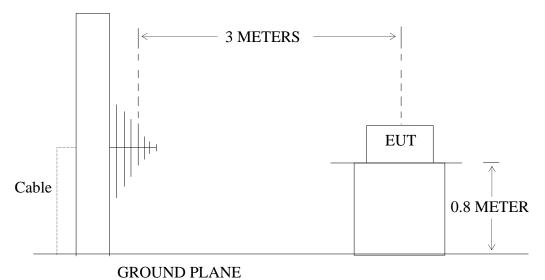

(EUT: RF remote controller)



Page 9 of 28

4.2. The Field Strength of Radiation Emission Measurement Limits

4.2.1.Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(b)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [µV/m]	Field Strength of Spurious Emission [Average] [µV/m]
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250
Above 470	12500	1250

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(F) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(F) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

4.2.2. Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section15.209.

4.3. Configuration of EUT on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. RF remote controller (EUT)

Model Number : AL-RF Serial Number : N/A

Manufacturer : Gateway Plastic Hardware & Lighting Co., Ltd.

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipment.
- 4.4.3. Let the EUT work in TX mode measure it.



Page 10 of 28

4.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground(Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120 kHz in 30-1000 MHz, and 1 MHz in 1000-4000 MHz.

The frequency range from 30 MHz to 4000 MHz is checked.



Report No.: ATE20161161 Page 11 of 28

4.6. The Field Strength of Radiation Emission Measurement Results **PASS.**

The frequency range 30MHz to 4000MHz is investigated.

note controller		
7	Power Supply:	DC 12V
	Test Engineer:	Star
	F	11 5

Frequency	Reading	Factor	Average	Result(d	dBμV/m)	Limit(d	dBμV/m)	Margi	n(dB)	Polarization
(MHz)	(dBµV/m)	Corr.	Factor				1		1	
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
433.92	100.37	-13.51	-8.18	78.68	86.86	80.8	100.80	-2.12	-13.94	
867.64	62.38	-5.01	-8.18	49.19	57.37	60.80	80.80	-11.61	-23.43	
1301.76	67.74	-11.00	-8.18	48.56	56.74	60.80	80.80	-12.24	-24.06	Horizontal
1735.680	67.44	-9.79	-8.18	49.47	57.65	60.80	80.80	-11.33	-23.15	
2169.600	60.51	-8.36	-8.18	43.97	52.15	60.80	80.80	-16.83	-28.65	
433.92	90.56	-13.51	-8.18	68.87	77.05	80.8	100.80	-11.93	-23.75	
867.64	53.37	-5.01	-8.18	40.18	48.36	60.8	80.80	-20.62	-32.44	
1301.76	67.59	-11.00	-8.18	48.41	56.59	60.8	80.80	-12.39	-24.21	Vertical
1735.680	67.81	-9.79	-8.18	49.84	58.02	60.8	80.80	-10.96	-22.78	
2169.600	61.18	-8.36	-8.18	44.64	52.82	60.8	80.80	-16.16	-27.98	

Note:

- 1. Emissions attenuated more than 20 dB below the permissible value are not reported.
- 2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Amplifier Gain

- 3. FCC Limit for Average Measurement = $41.6667(433.92)-7083.3333 = 10996.6812 \,\mu\text{V/m} = 80.8 \,\mu\text{V/m}$
- 4. The spectral diagrams in appendix I display the measurement of peak values.
- 5. Average value= PK value + Average Factor (duty factor)
- 6. If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.
- 7. The EUT is tested radiation emission in three axes(X,Y,Z). The worst emissions are reported in three axes.



Page 12 of 28

8. Pulse Desensitization Correction Factor

Pulse Width (PW) = 0.84ms

2/PW = 2/0.84ms = 2.4kHz

RBW (100 kHz) > 2/PW (2.4 kHz)

Therefore PDCF is not needed





Page 13 of 28

5. 20DB OCCUPIED BANDWIDTH

5.1.Block Diagram of Test Setup


5.1.1.Block diagram of connection between the EUT and simulators



(EUT: RF remote controller)

5.1.2.Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

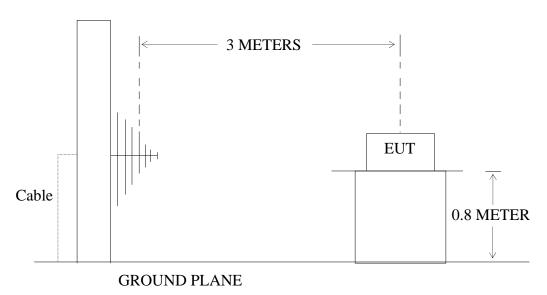

(EUT: RF remote controller)

5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is $433.92 \text{ MHz} \times 0.25\% = 1084.8 \text{ kHz}$. Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.



Page 14 of 28

5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1.RF remote controller (EUT)

Model Number : AL-RF Serial Number : N/A

Manufacturer : Gateway Plastic Hardware & Lighting Co., Ltd.

5.4. Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3.Let the EUT work in TX mode measure it.

5.5.Test Procedure


- 5.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10 kHz, VBW = 30 kHz, Span = 1MHz.
- 5.5.2.Set SPA Max hold, Mark peak, -20 dB.

5.6.Measurement Result

The EUT does meet the FCC requirement.

-20 dB bandwidth = 56 kHz < 1084.8 kHz.

The spectral diagrams in appendix I.





6. RELEASE TIME MEASUREMENT

6.1.Block Diagram of Test Setup


6.1.1.Block diagram of connection between the EUT and simulators



(EUT: RF remote controller)

6.1.2.Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

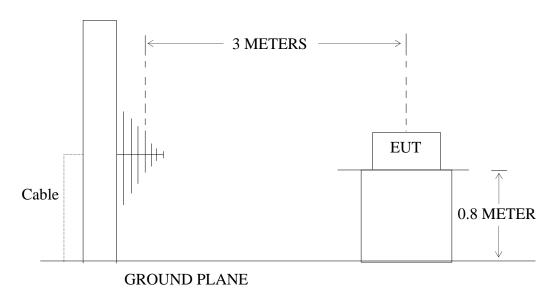

(EUT: RF remote controller)

6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)

Section 15.231(a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.



Page 16 of 28

6.3.EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. RF remote controller (EUT)

Model Number : AL-RF Serial Number : N/A

Manufacturer : Gateway Plastic Hardware & Lighting Co., Ltd.

6.4. Operating Condition of EUT

- 6.4.1. Setup the EUT and simulator as shown as Section 6.1.
- 6.4.2. Turn on the power of all equipment.
- 6.4.3.Let the EUT work in TX mode measure it.

6.5. Test Procedure


- 6.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz. Sweep time = 5s.
- 6.5.2.Set EUT as normal operation and press Transmitter button.
- 6.5.3.Set SPA View. Delta Mark time.

6.6. Measurement Result

The release time less than 5 seconds.

Release Time = 0.85s

The spectral diagrams in appendix I.





7. AVERAGE FACTOR MEASUREMENT

7.1.Block Diagram of Test Setup


7.1.1.Block diagram of connection between the EUT and simulators



(EUT: RF remote controller)

7.1.2.Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

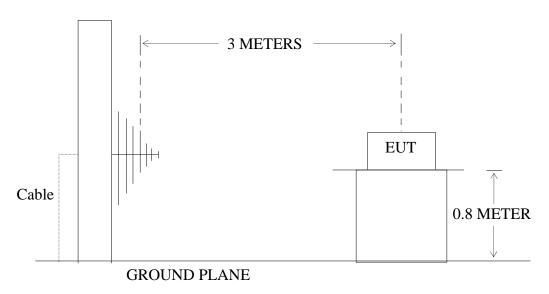

7.2. Average factor Measurement according to ANSI C63.10-2013

ANSI C63.10-2013 Section 7.5 Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval.64 The following procedure is an example of how the average value may be determined. The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in Equation (10):

Average factor in $dB = 20 \log (duty \text{ cycle})$



Page 18 of 28

7.3.EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. RF remote controller (EUT)

Model Number : AL-RF Serial Number : N/A

Manufacturer : Gateway Plastic Hardware & Lighting Co., Ltd.

7.4. Operating Condition of EUT

- 7.4.1. Setup the EUT and simulator as shown as Section 7.1.
- 7.4.2. Turn on the power of all equipment.
- 7.4.3.Let the EUT work in TX mode measure it.

7.5.Test Procedure

- 7.5.1.The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.
- 7.5.2.Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz.
- 7.5.3.Set EUT as normal operation.
- 7.5.4.Set SPA View. Delta Mark time.

7.6. Measurement Result

The duty cycle is simply the on time divided by the period:

The duration of one cycle = 70.66ms

Effective period of the cycle = $(2.1\times5) + (0.84\times20)$ ms = 27.3 ms

DC =27.3ms/70.66ms=0.39

Therefore, the average factor is found by 20log0.39= -8.18dB

The spectral diagrams in appendix I.



Page 19 of 28


8. ANTENNA REQUIREMENT

8.1. The Requirement


According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. Antenna Construction

Device is equipped with PCB antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 0dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

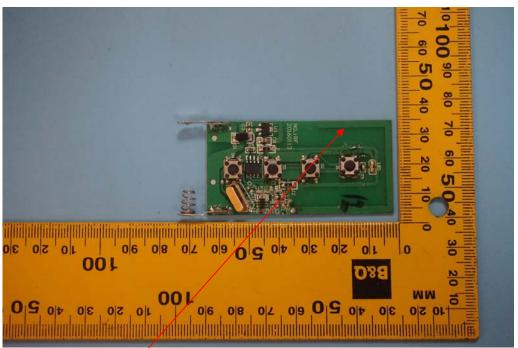


Antenna





APPENDIX I (Test Curves)





ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: STAR2016 #1171 Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: RF remote controller

Mode: TX
Model: AL-RF

Manufacturer: Gateway Plastic Hardware & Lighting Co., Ltd.


Note: Report No.:ATE20161161

Polarization: Horizontal Power Source: DC 12V

> Date: 16/06/15/ Time: 9/27/08

Engineer Signature: star

Distance: 3m

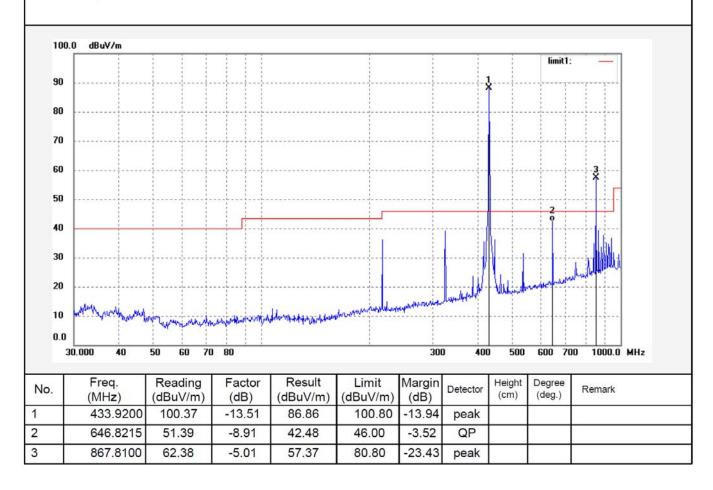



Site: 1# Chamber Tel:+86-0755-26503290

Fax:+86-0755-26503396

Page 22 of 28



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China

Polarization: Vertical
Power Source: DC 12V

Date: 16/06/15/ Time: 9/24/34

Engineer Signature: star

Distance: 3m

Job No.: STAR2016 #1170 Standard: FCC Class B 3M Radiated


Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 % EUT: RF remote controller

Mode: TX Model: AL-RF

Manufacturer: Gateway Plastic Hardware & Lighting Co., Ltd.

Note: Report No.:ATE20161161

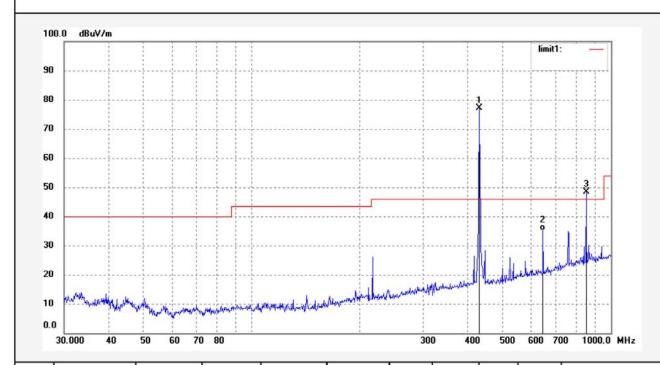

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9200	90.56	-13.51	77.05	100.80	-23.75	peak			
2	646.8215	43.99	-8.91	35.08	46.00	-10.92	QP			
3	867.8400	53.37	-5.01	48.36	80.80	-32.44	peak			



Site: 1# Chamber

Page 23 of 28



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China

an Rd, Tel:+86-0755-26503290 R.China Fax:+86-0755-26503396

Job No.: STAR2016 #1172 Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 % EUT: RF remote controller

Mode: TX Model: AL-RF

Manufacturer: Gateway Plastic Hardware & Lighting Co., Ltd.


Note: Report No.:ATE20161161

Polarization: Horizontal Power Source: DC 12V

Date: 16/06/15/ Time: 9/29/27

Engineer Signature: star

Distance: 3m

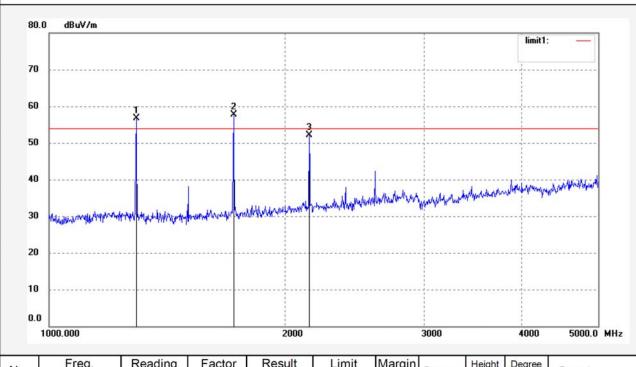

	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1		1301.760	67.74	-11.00	56.74	80.80	-24.06	peak			
2	2	1735.680	67.44	-9.79	57.65	80.80	-23.15	peak			
3	3	2169.600	60.51	-8.36	52.15	80.80	-28.65	peak			



Page 24 of 28



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 1# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: STAR2016 #1173

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 % EUT: RF remote controller

Mode: TX

Model: AL-RF

Manufacturer: Gateway Plastic Hardware & Lighting Co., Ltd.

Note: Report No.:ATE20161161

Polarization: Vertical Power Source: DC 12V

Date: 16/06/15/ Time: 9/33/34

Engineer Signature: star

Distance: 3m

									limit1	: -	
70											
60			2 X								
50				3		 I					
40									. e sillouith a h	White Marie	
				i i	ki .		ti alla		Mukana A.K.	P. Mari	
30	Had to be the suppression of	Problem of the second	han garanteed test	weetherstar interest	apappa Jalana Jalana ang mangka	Hursphotopy	haybarrablym	m-hallydryty.	Multina ADO		
30 20	and the obtained and the	Partie Palamente Heymen	hinagarakall Nix	weberharde enternan	derenand Marketin	Newsphilipaye	haybar an blow		Water 1 KAC		
	ing the strong parating	Palamental Professional	his governed but	and depth spilot is polarished	de production de la constante	lywestyddolfodd	haghar yahlar		Wd XX	***	
20		Palamania Para	hin governed Nich	and beginning the grade gr	April de de la constante de la	Nyursiph-dray/	haighearhabhn		wa Y		
20 10 0.0		Parliamentalistical	hin governed his	2000	April Land March March	[hu-siph-topy	3000		4000	5000.0	
20 10 0.0		Reading (dBuV/m)	Factor (dB)		Limit (dBuV/m)	Margin (dB)		Height (cm)			

80.80

-27.98

peak


3

2169.600


61.18


-8.36

52.82






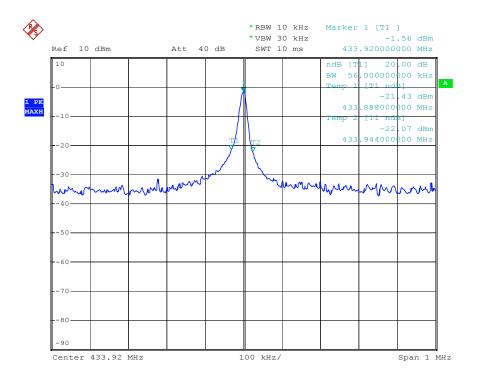






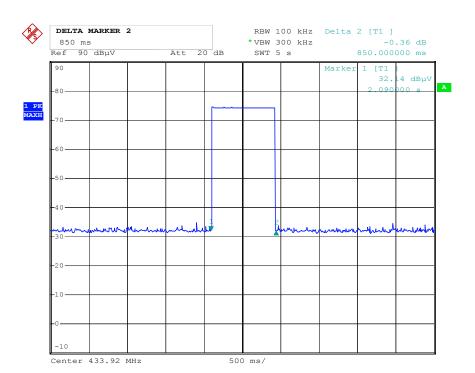



Release Time = 0.85s






The graph shows the pattern of coding during the signal transmission. The duration of one cycle = 70.66 ms.

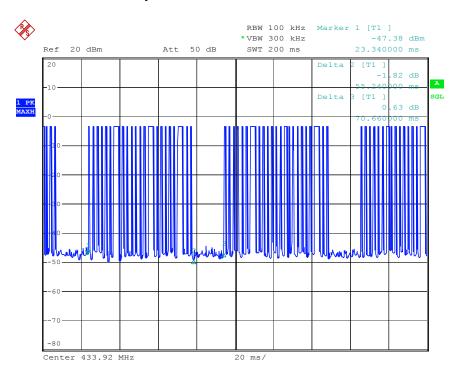






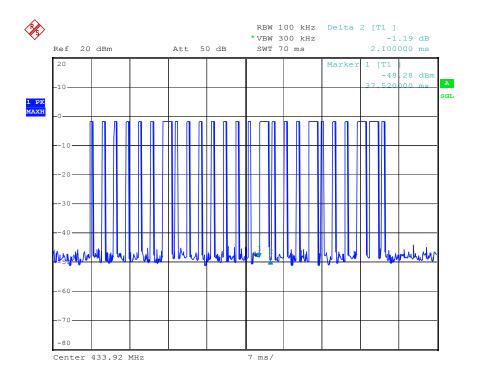

The graph shows the duration of 'on' signal. From marker 2 to marker 1, duration is 2.1ms.

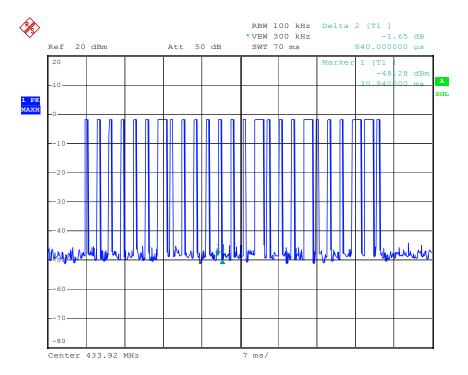

The graph shows the duration of 'on' signal. From marker 2 to marker 1, duration is 0.84ms.