


TEST REPORT

Applicant: Hexing Electrical Co., Ltd
Address: 1418-35 Moganshan Road, Shangcheng Industrial Zone, 310011, Hangzhou City, China
Equipment Type: LoRaWAN Module
Model Name: MJP00
Brand Name: HEXING
FCC ID: 2AIUZ-MJP00
Test Standard: 47 CFR Part 15 Subpart C (refer to section 3.1)
Sample Arrival Date: Jul. 01, 2025
Test Date: Jul. 09, 2025 - Jul. 18, 2025
Date of Issue: Aug. 07, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Li Ganming**Checked by:** Ye Hongji**Approved by:** Sunny Zou
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Aug. 07, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Software List	9
4.4	Measurement Uncertainty	10
4.5	Description of Test Setup	10
4.6	Measurement Results Explanation Example	13
5	TEST ITEMS	14
5.1	Antenna Requirements	14
5.2	Number of Hopping Frequencies	15
5.3	Peak Output Power	16
5.4	Occupied Bandwidth	17
5.5	Carrier Frequency Separation	18

5.6	Time of Occupancy (Dwell time)	19
5.7	Conducted Spurious Emission & Authorized-band band-edge	20
5.8	Conducted Emission	21
5.9	Radiated Spurious Emission	22
5.10	Band Edge (Restricted-band band-edge).....	24
ANNEX A	TEST RESULT	25
A.1	Number of Hopping Frequency	25
A.2	Peak Output Power	26
A.3	20 dB and 99% bandwidth	27
A.4	Hopping Frequency Separation.....	29
A.5	Average Time of Occupancy	30
A.6	Conducted Spurious Emissions & Authorized-band band-edge	31
A.7	Conducted Emissions.....	35
A.8	Radiated Spurious Emission	37
A.9	Band Edge (Restricted-band band-edge).....	42
ANNEX B	TEST SETUP PHOTOS	43
ANNEX C	EUT EXTERNAL PHOTOS	43
ANNEX D	EUT INTERNAL PHOTOS	43

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Hexing Electrical Co., Ltd
Address	1418-35 Moganshan Road, Shangcheng Industrial Zone, 310011, Hangzhou City, China

2.2 Manufacturer Information

Manufacturer	Hexing Electrical Co., Ltd
Address	1418-35 Moganshan Road, Shangcheng Industrial Zone, 310011, Hangzhou City, China

2.3 General Description for Equipment under Test (EUT)

EUT Name	LoRaWAN Module
Model Name Under Test	MJP00
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	PB-02505-0V02
Software Version	FP61286V02R019M001
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	LoRa
-----------------------------------	------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	Frequency hopping system
Modulation Type	LoRa
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Frequency Range	The frequency range used is 902 MHz to 928 MHz.
Number of Channel	127
Tested Channel	0 (902.3 MHz), 63 (914.9 MHz), 126 (927.6 MHz)
Antenna Type	Dipole Antenna
Antenna Gain	5.76 dBi
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
CH0	902.3	CH32	908.7	CH64	915.2	CH96	921.6
CH1	902.5	CH33	908.9	CH65	915.4	CH97	921.8
CH2	902.7	CH34	909.1	CH66	915.6	CH98	922
CH3	902.9	CH35	909.3	CH67	915.8	CH99	922.2
CH4	903.1	CH36	909.5	CH68	916	CH100	922.4
CH5	903.3	CH37	909.7	CH69	916.2	CH101	922.6
CH6	903.5	CH38	909.9	CH70	916.4	CH102	922.8
CH7	903.7	CH39	910.1	CH71	916.6	CH103	923
CH8	903.9	CH40	910.3	CH72	916.8	CH104	923.2
CH9	904.1	CH41	910.5	CH73	917	CH105	923.4
CH10	904.3	CH42	910.7	CH74	917.2	CH106	923.6
CH11	904.5	CH43	910.9	CH75	917.4	CH107	923.8
CH12	904.7	CH44	911.1	CH76	917.6	CH108	924
CH13	904.9	CH45	911.3	CH77	917.8	CH109	924.2
CH14	905.1	CH46	911.5	CH78	918	CH110	924.4
CH15	905.3	CH47	911.7	CH79	918.2	CH111	924.6
CH16	905.5	CH48	911.9	CH80	918.4	CH112	924.8
CH17	905.7	CH49	912.1	CH81	918.6	CH113	925
CH18	905.9	CH50	912.3	CH82	918.8	CH114	925.2
CH19	906.1	CH51	912.5	CH83	919	CH115	925.4
CH20	906.3	CH52	912.7	CH84	919.2	CH116	925.6
CH21	906.5	CH53	912.9	CH85	919.4	CH117	925.8
CH22	906.7	CH54	913.1	CH86	919.6	CH118	926
CH23	906.9	CH55	913.3	CH87	919.8	CH119	926.2
CH24	907.1	CH56	913.5	CH88	920	CH120	926.4
CH25	907.3	CH57	913.7	CH89	920.2	CH121	926.6
CH26	907.5	CH58	913.9	CH90	920.4	CH122	926.8
CH27	907.7	CH59	914.1	CH91	920.6	CH123	927
CH28	907.9	CH60	914.3	CH92	920.8	CH124	927.2
CH29	908.1	CH61	914.5	CH93	921	CH125	927.4
CH30	908.3	CH62	914.7	CH94	921.2	CH126	927.6
CH31	908.5	CH63	914.9	CH95	921.4	/	/

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Test Verdict

No.	Description	FCC Part No.	Modulation Technology	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	N/A	--	Pass ^{Note}
2	Number of Hopping Frequencies	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	Frequency hopping system	Low/Middle/High	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	Frequency hopping system	Low/Middle/High	ANNEX A.3	Pass
5	Carrier Frequency Separation	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.5	Pass
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Frequency hopping system	Hopping Mode; Low/Middle/High	ANNEX A.6	Pass
8	Conducted Emission	15.207	Frequency hopping system	Low/Middle/High	ANNEX A.7	Pass
9	Radiated Spurious Emission	15.209 15.247(d)	Frequency hopping system	Low/Middle/High	ANNEX A.8	Pass
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Frequency hopping system	Low/High	ANNEX A.9	Pass

Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	44% to 68%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+21.8°C to +25.1°C
Working Voltage of the EUT	NV (Normal Voltage)	5 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2025.04.28	2026.04.27
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2025.06.16	2026.06.15
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2024.08.01	2025.07.31
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2025.04.28	2026.04.27
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2024.05.16	2027.05.15
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2024.07.28	2027.07.27
Amplifier	COM-MV	LSCX_LNA1-12G-01	7210214	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	7210209	2024.08.01	2025.07.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-01162	2023.08.04	2026.08.03
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2024.11.28	2025.11.27
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2025.04.29	2026.04.28
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2025.02.14	2028.02.13

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

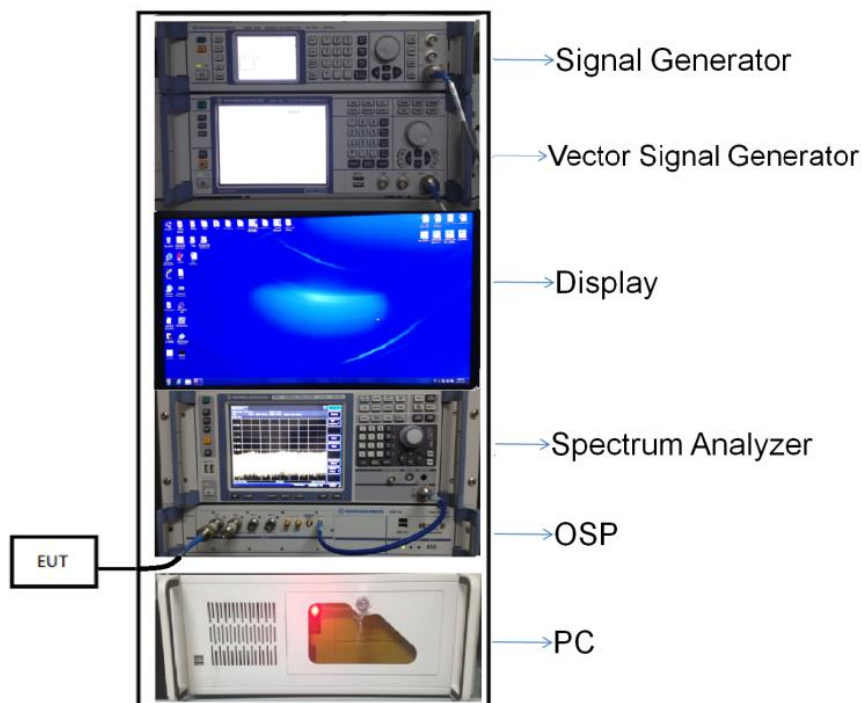


(Diagram 1)

4.5.2 For AC Power Supply Port Test

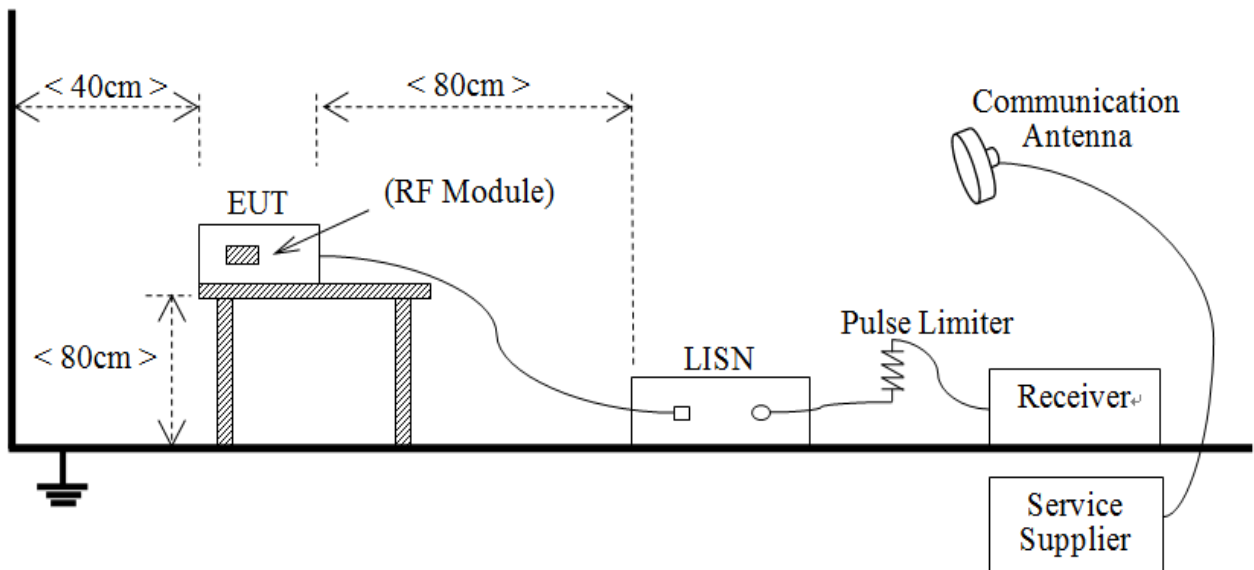


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

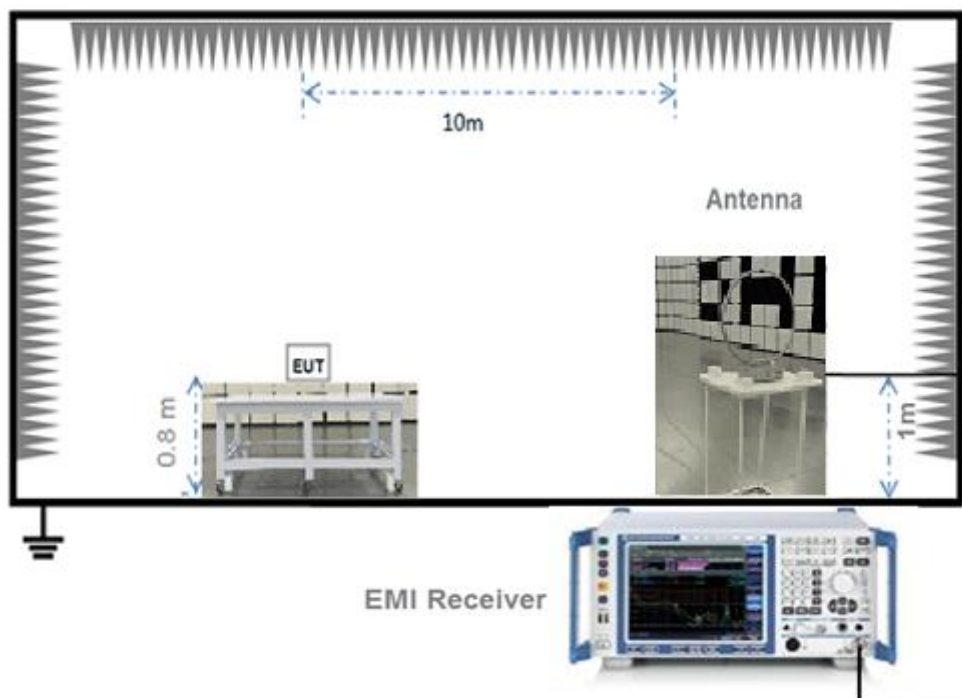


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

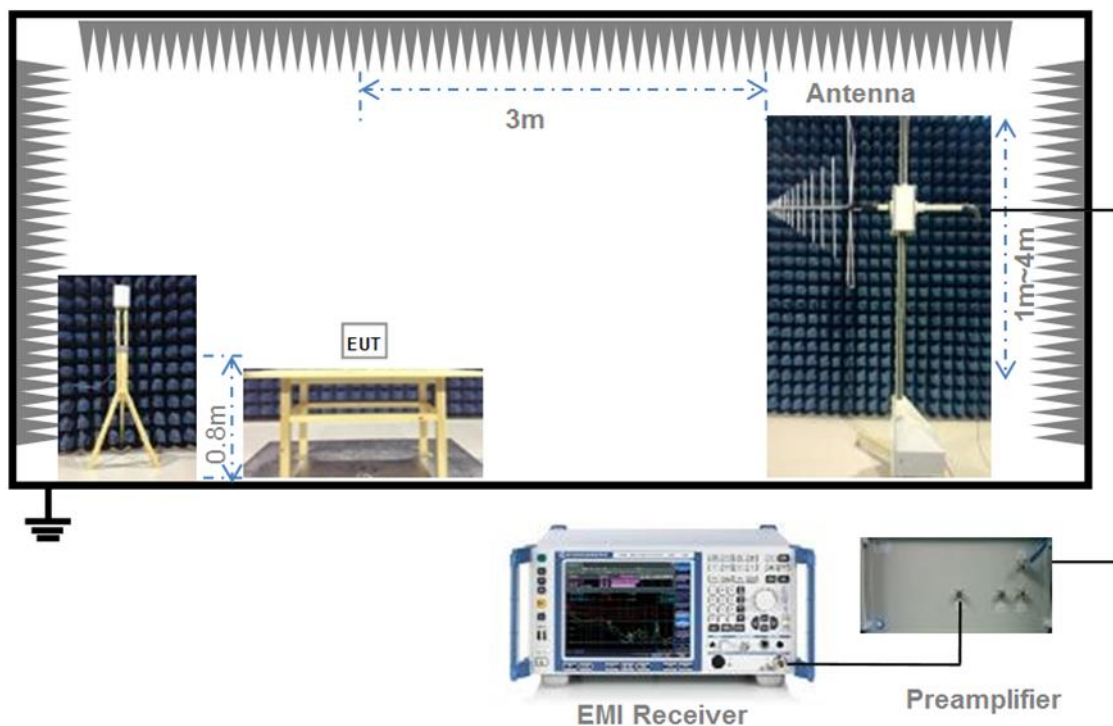

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

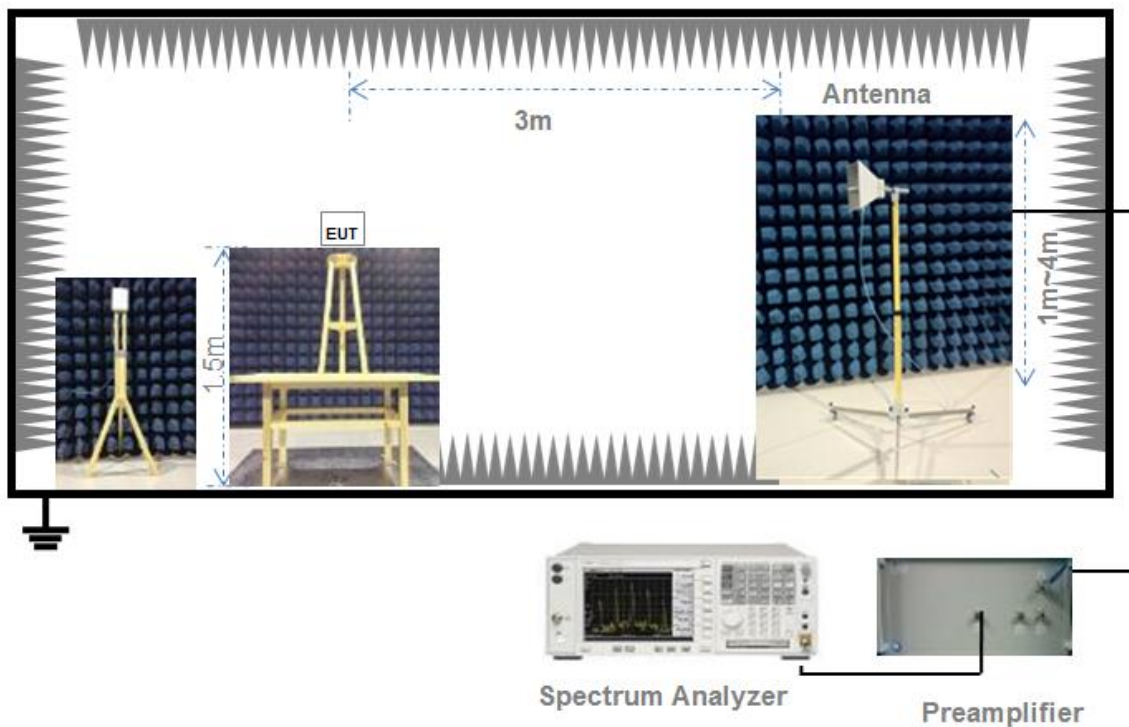

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a)

For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6 and A.7

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	902/F(kHz)	300
0.490 - 1.705	9020/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
LoRa	902-928	127	50	Pass

Test Plot

LoRa

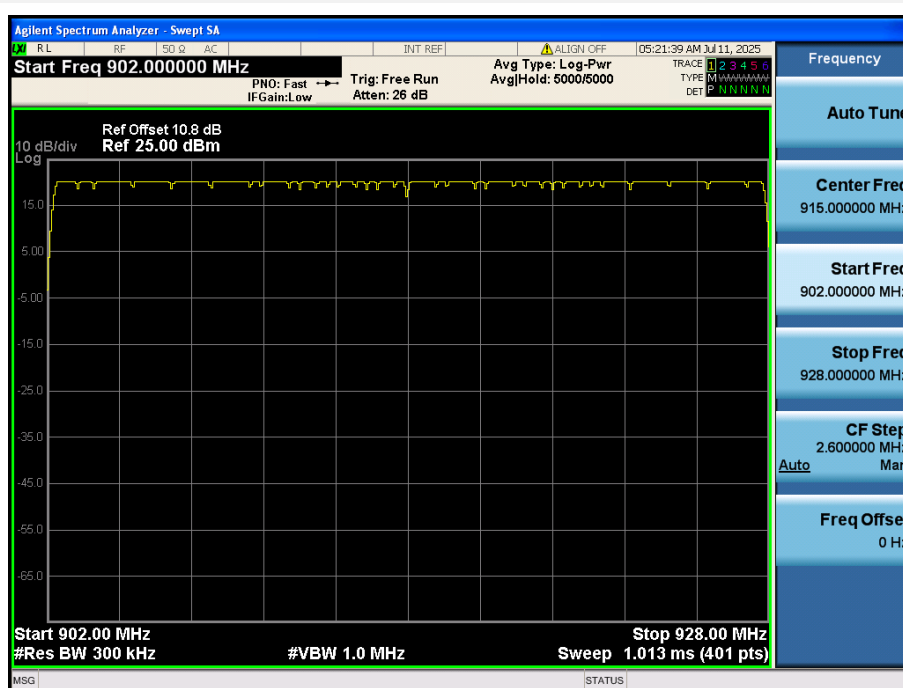


A.2 Peak Output Power

Test Data


Channel	Measured Output Peak Power		Limit		Verdict
	LoRa		dBm	mW	
	dBm	mW			
Low	20.05	101.11	30	1000	Pass
Middle	20.05	101.16			Pass
High	19.97	99.40			Pass

Test Plots


LOW CHANNEL

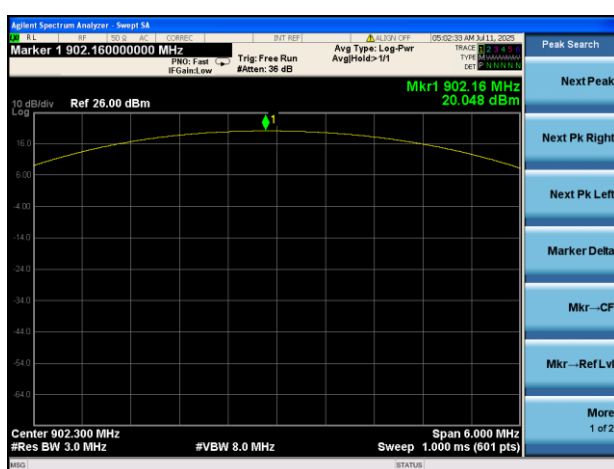

MIDDLE CHANNEL

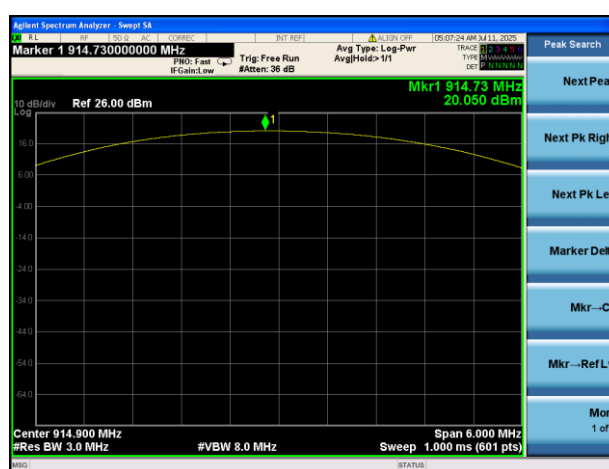

HIGH CHANNEL

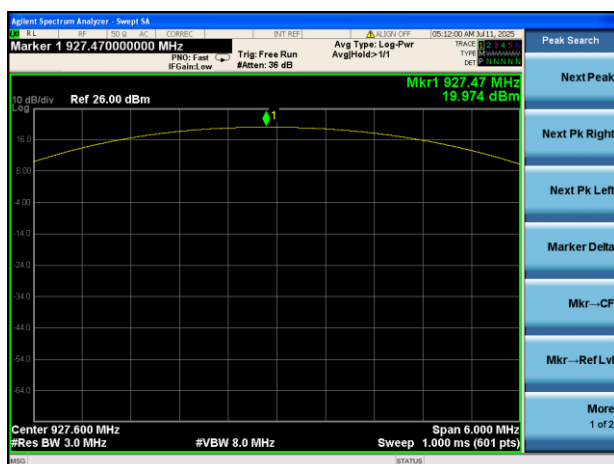

A.3 20 dB and 99% bandwidth

Test Data

LoRa			
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Verdict
Low	0.191	0.162	Pass
Middle	0.198	0.162	Pass
High	0.191	0.164	Pass


Test Plots

20 dB Bandwidth

LOW CHANNEL



MIDDLE CHANNEL

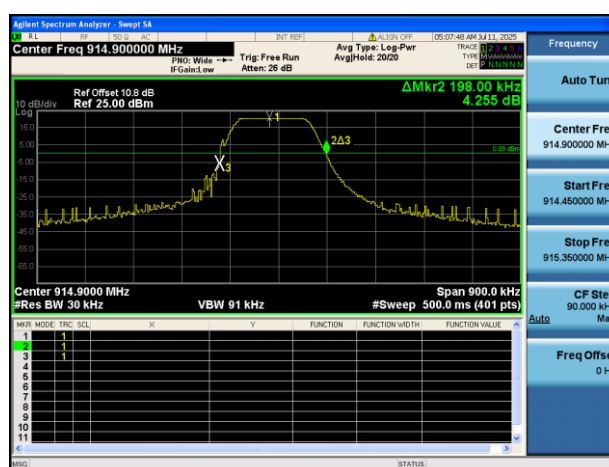


HIGH CHANNEL




99% Bandwidth


LOW CHANNEL

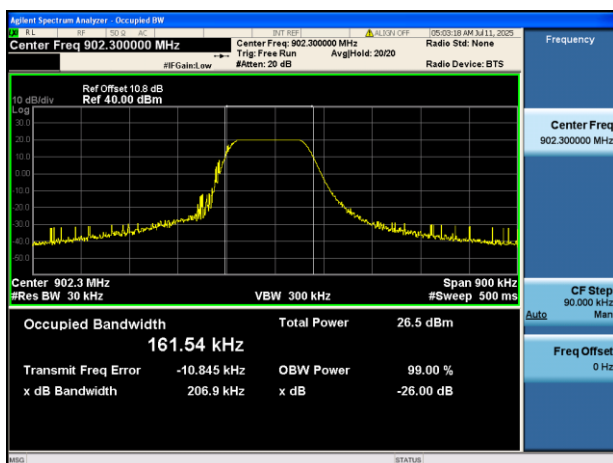

MIDDLE CHANNEL

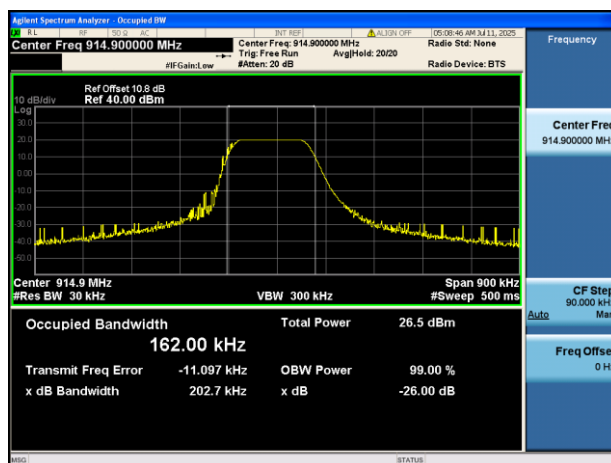

HIGH CHANNEL

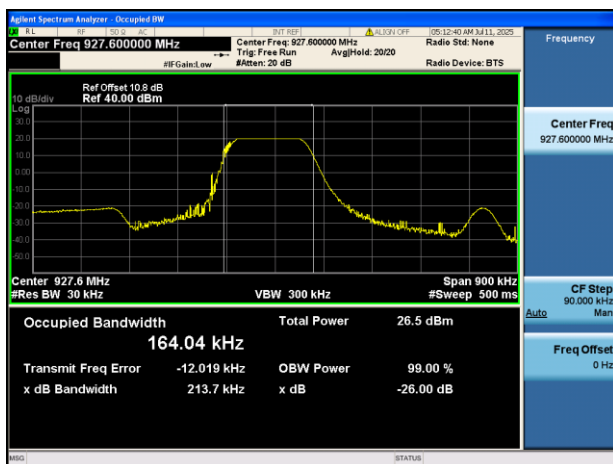


A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Verdict
LoRa	0.200	0.198	Pass

Test Plot

LoRa

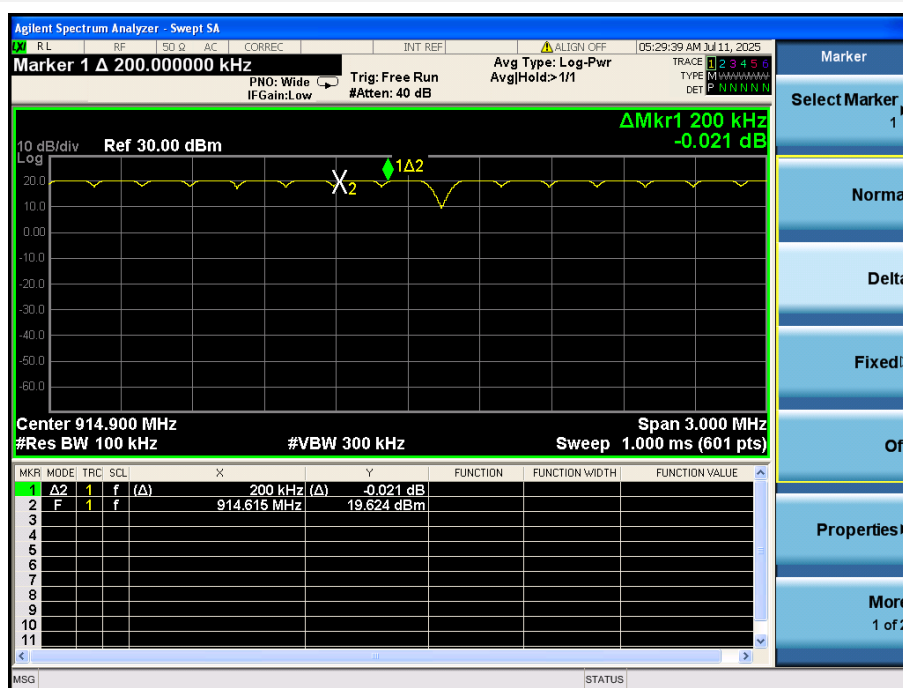


A.5 Average Time of Occupancy

Test Data

LoRa			
Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
180.0	180.0	0.4	Pass

Test Plot

LoRa

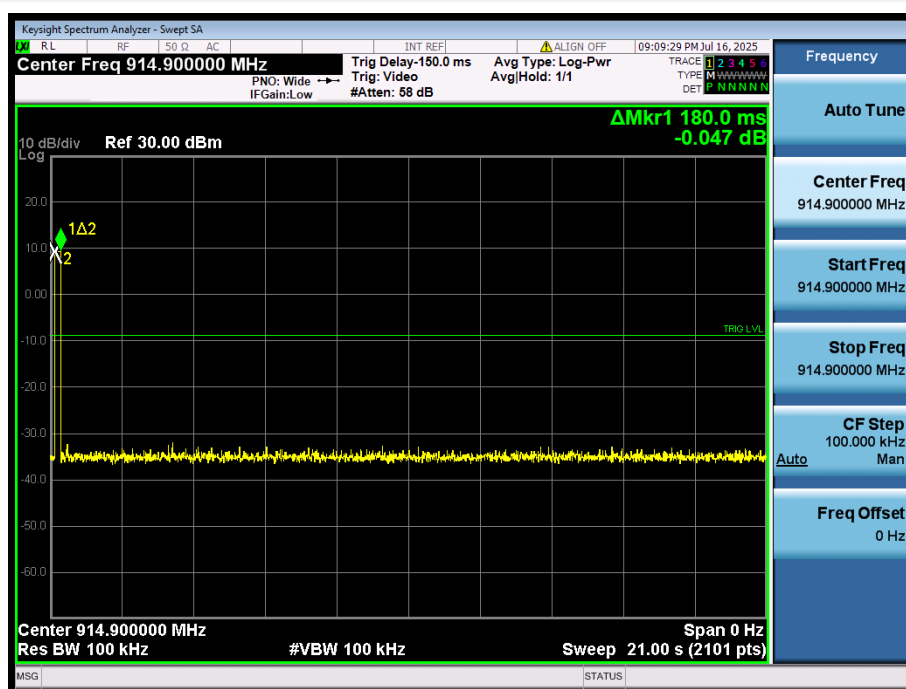

A.6 Conducted Spurious Emissions & Authorized-band band-edge


Test Data

LoRa				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-25.20	20.06	0.064	Pass
Middle	-30.39	20.00	-0.003	Pass
High	-20.30	20.01	0.012	Pass


LoRa				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Hopping	-26.62	20.22	0.222	Pass

Test Plots


LOW CHANNEL, CARRIER LEVEL

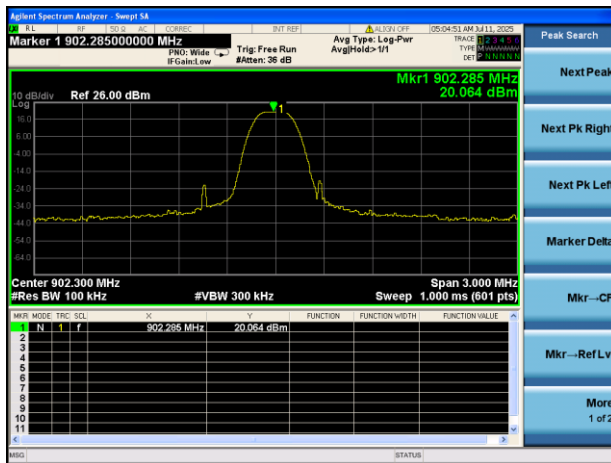


LOW CHANNEL, Band Edge

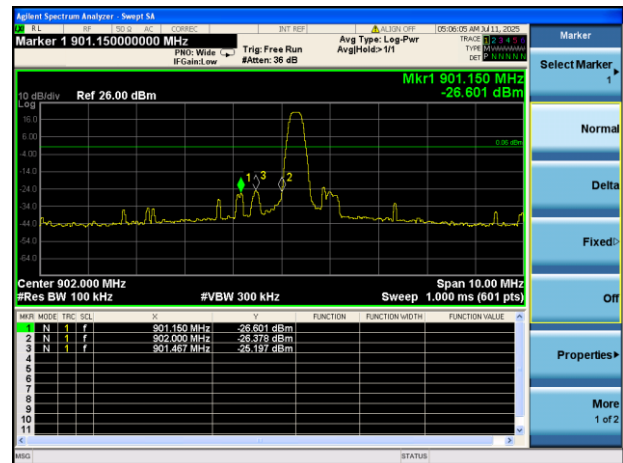


LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

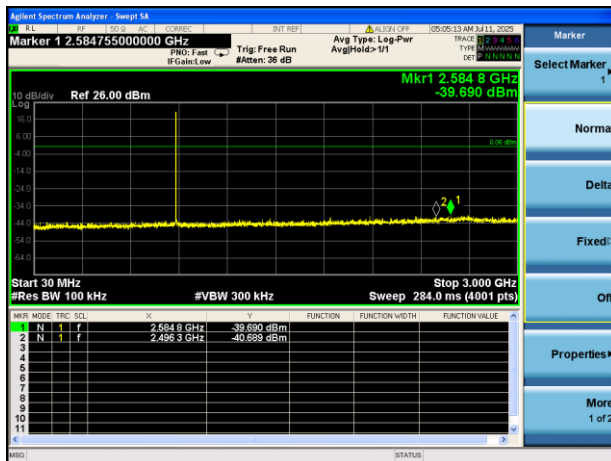


LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

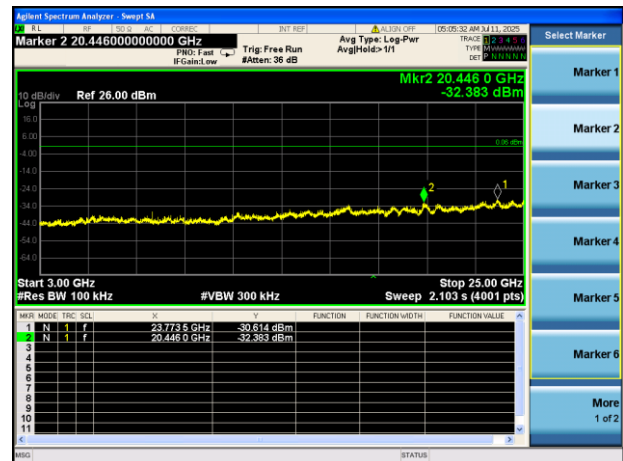


MIDDLE CHANNEL, CARRIER LEVEL

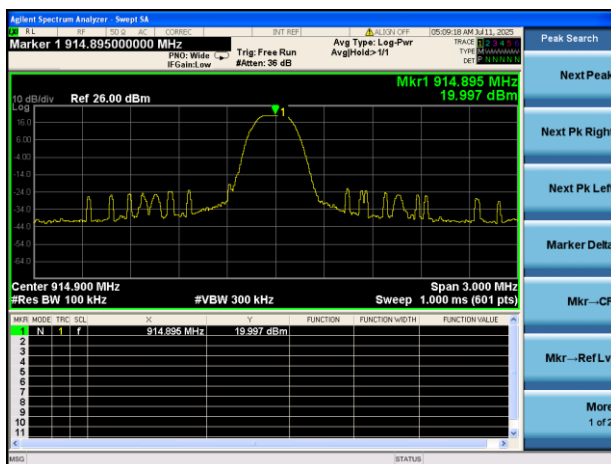


MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

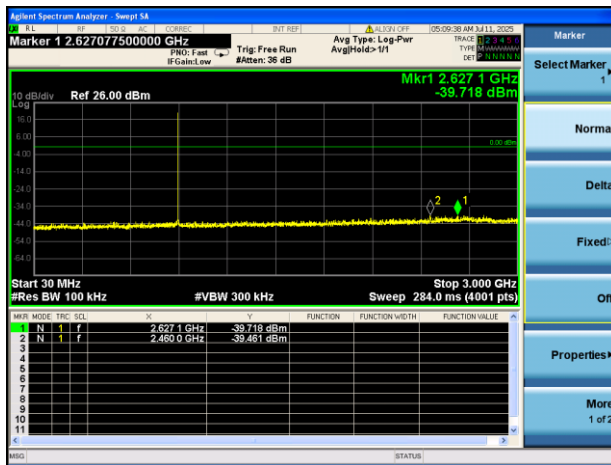


MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

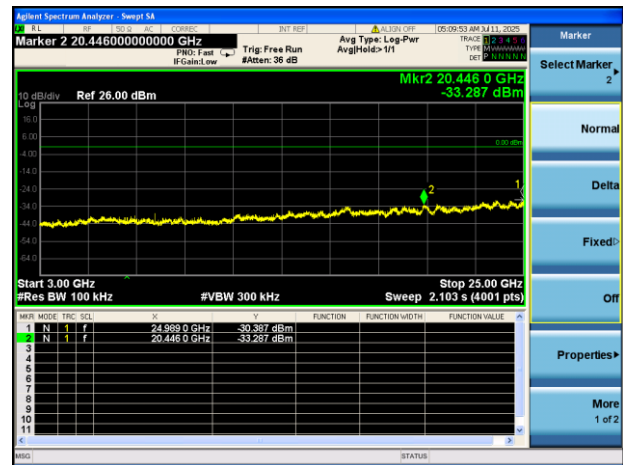


HIGH CHANNEL, CARRIER LEVEL

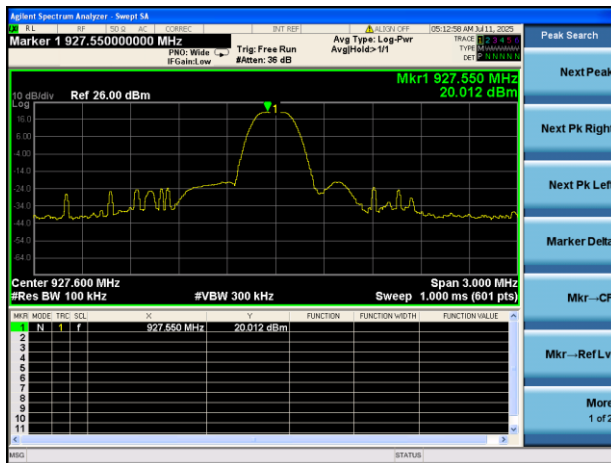


HIGH CHANNEL, BAND EDGE

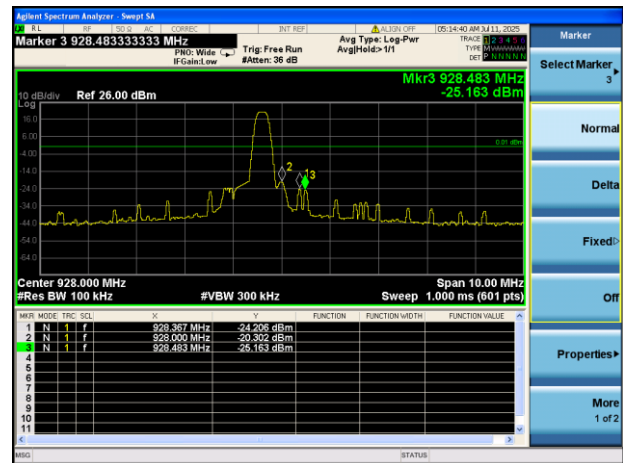


HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

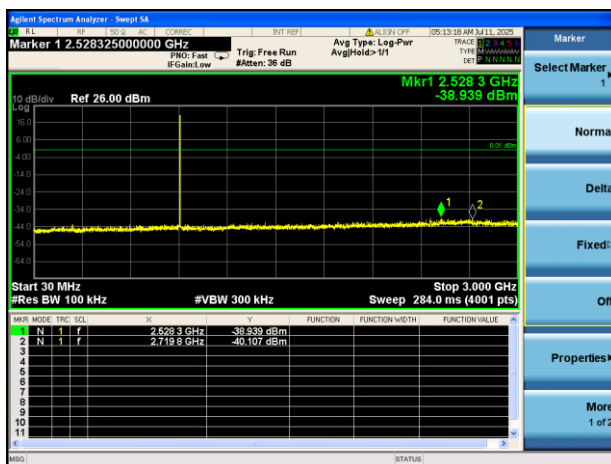


HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

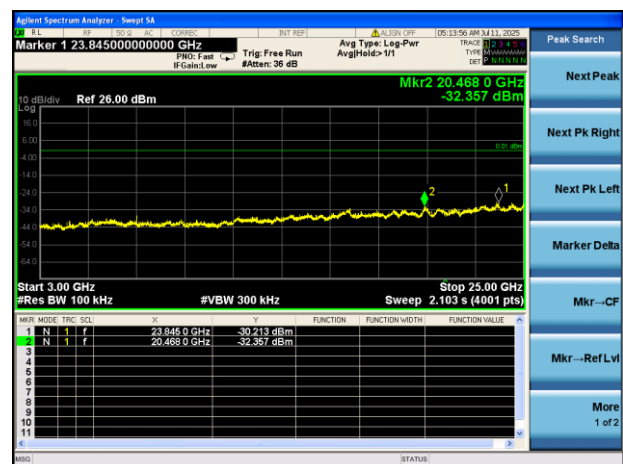


HOPPING, CARRIER LEVEL

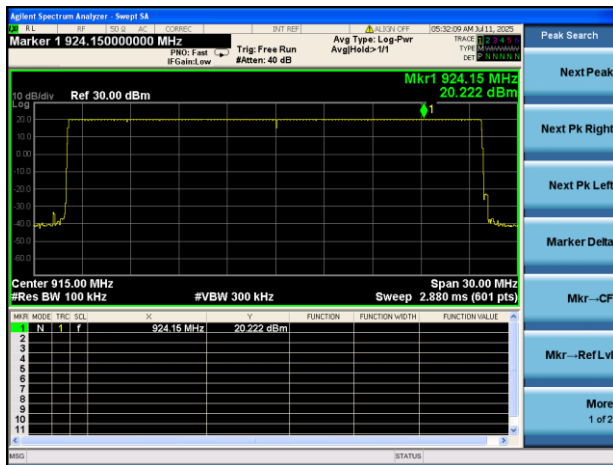


HOPPING BAND EDGE (LOW)

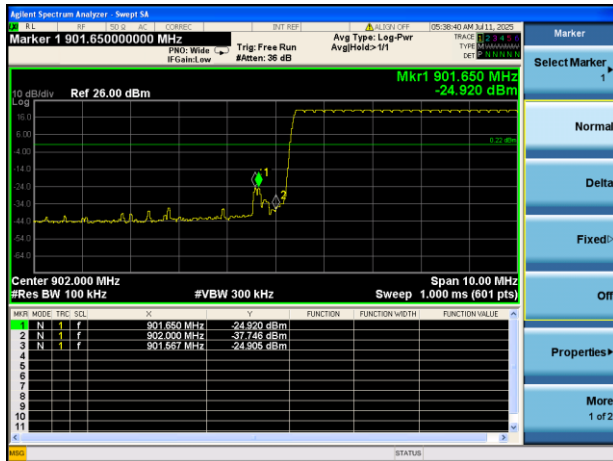


HOPPING BAND EDGE (HIGH)

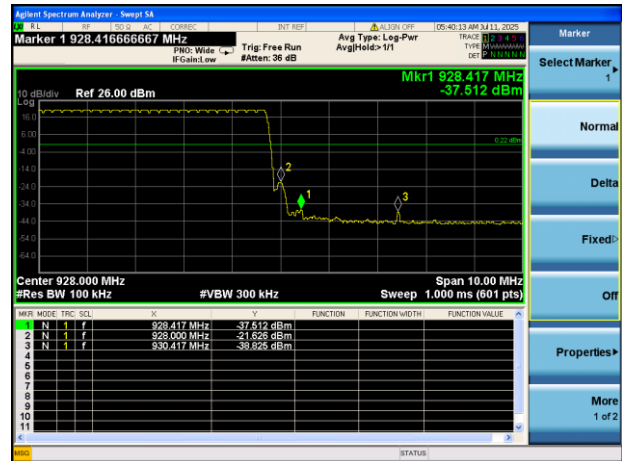

HOPPING Mode, SPURIOUS 30 MHz ~ 3 GHz

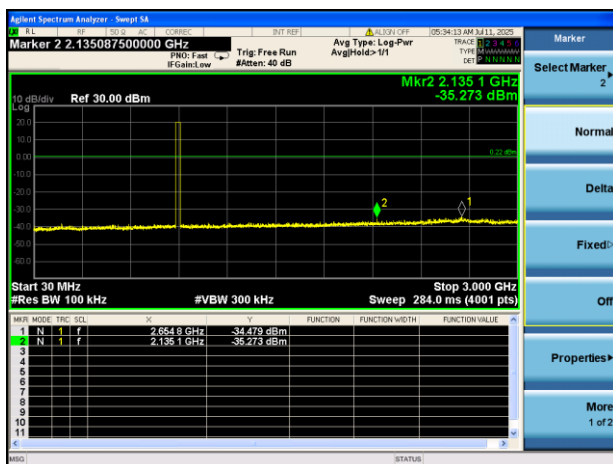

Hopping Mode, SPURIOUS 3 GHz ~ 25 GHz

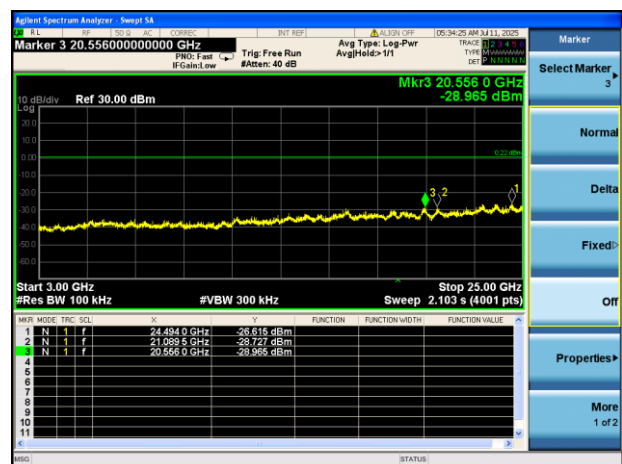

A.7 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

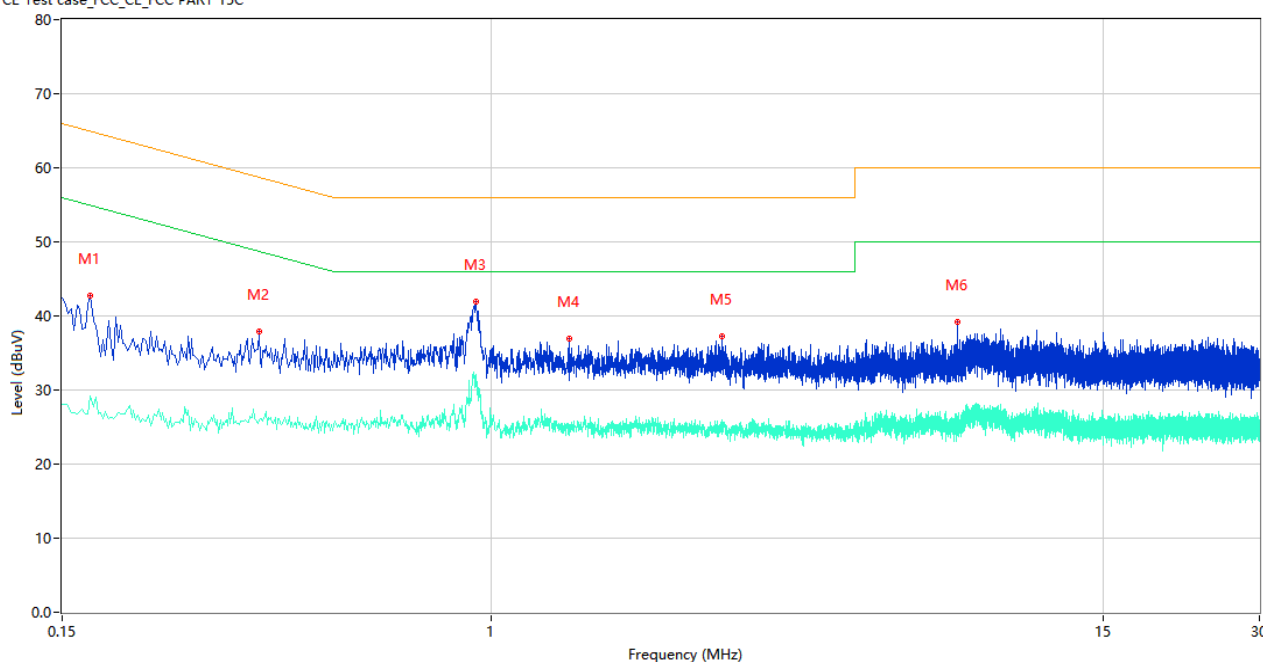

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.170	42.66	9.85	64.96	22.30	Peak	L	Pass
1**	0.170	29.19	9.85	54.96	25.77	AV	L	Pass
2	0.358	37.87	10.79	58.77	20.90	Peak	L	Pass
2**	0.358	25.98	10.79	48.77	22.79	AV	L	Pass
3	0.936	41.96	10.16	56.00	14.04	Peak	L	Pass
3**	0.936	32.11	10.16	46.00	13.89	AV	L	Pass
4	1.412	36.87	9.88	56.00	19.13	Peak	L	Pass
4**	1.412	25.26	9.88	46.00	20.74	AV	L	Pass
5	2.788	37.28	10.40	56.00	18.72	Peak	L	Pass
5**	2.788	26.03	10.40	46.00	19.97	AV	L	Pass
6	7.880	39.16	10.26	60.00	20.84	Peak	L	Pass
6**	7.880	25.63	10.26	50.00	24.37	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

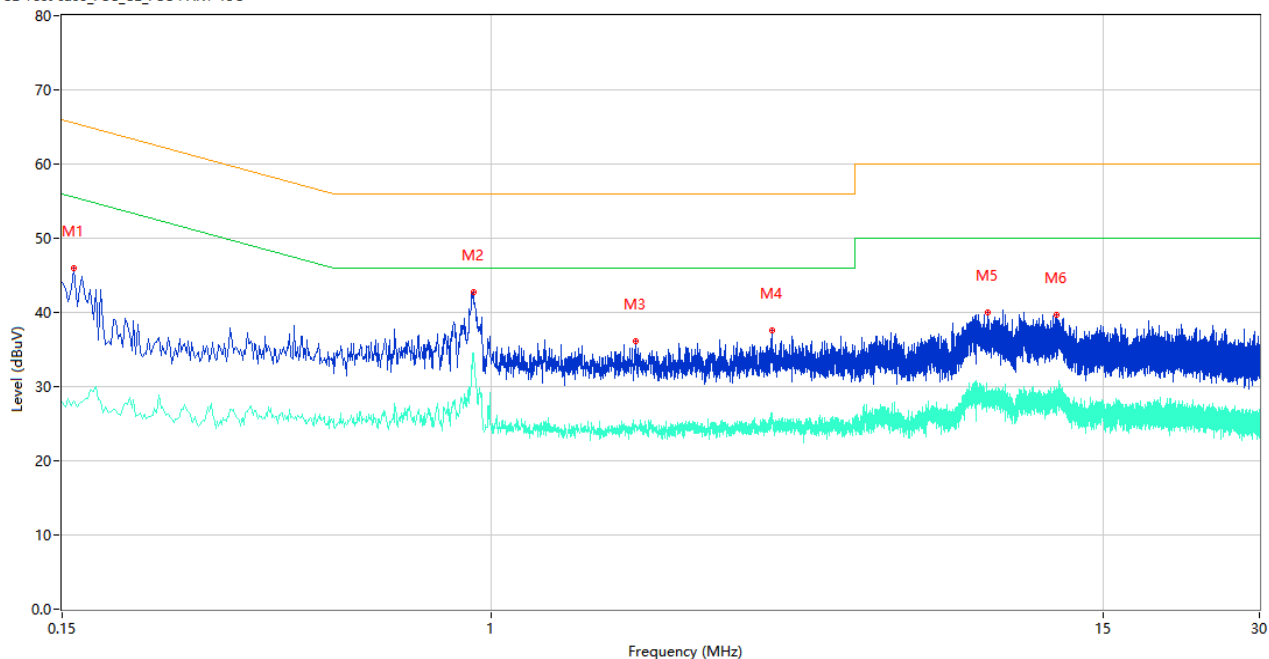

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	46.01	9.86	65.57	19.56	Peak	N	Pass
1**	0.158	28.14	9.86	55.57	27.43	AV	N	Pass
2	0.926	42.77	10.18	56.00	13.23	Peak	N	Pass
2**	0.926	34.53	10.18	46.00	11.47	AV	N	Pass
3	1.894	36.10	10.76	56.00	19.90	Peak	N	Pass
3**	1.894	24.89	10.76	46.00	21.11	AV	N	Pass
4	3.470	37.64	10.24	56.00	18.36	Peak	N	Pass
4**	3.470	26.12	10.24	46.00	19.88	AV	N	Pass
5	9.006	40.07	10.55	60.00	19.93	Peak	N	Pass
5**	9.006	28.58	10.55	50.00	21.42	AV	N	Pass
6	12.240	39.67	10.45	60.00	20.33	Peak	N	Pass
6**	12.240	29.84	10.45	50.00	20.16	AV	N	Pass

A.8 Radiated Spurious Emission

Note ¹: The symbol of “--” in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data

LOW CHANNEL, 30 MHz to 1 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.904	20.95	40.0	19.05	Peak	355.00	100	Horizontal	Pass
2	137.927	20.93	43.5	22.57	Peak	355.00	100	Horizontal	Pass
3	217.983	32.77	43.5	10.73	Peak	112.00	400	Horizontal	Pass
4	261.818	24.62	43.5	18.88	Peak	112.00	400	Horizontal	Pass
5	460.774	29.88	46.0	16.12	Peak	332.00	200	Horizontal	Pass
6	748.553	37.61	46.0	8.39	Peak	332.00	200	Horizontal	Pass

LOW CHANNEL, 30 MHz to 1 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	56.662	23.64	40.0	16.36	Peak	227.00	400	Vertical	Pass
2	139.352	26.40	43.5	17.10	Peak	227.00	400	Vertical	Pass
3	157.162	29.19	43.5	14.31	Peak	228.00	400	Vertical	Pass
4	405.942	28.93	46.0	17.07	Peak	228.00	400	Vertical	Pass
5	637.900	35.61	46.0	10.39	Peak	267.00	200	Vertical	Pass
6	777.906	35.30	46.0	10.70	Peak	267.00	200	Vertical	Pass

MIDDLE CHANNEL, 30 MHz to 1 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	57.139	16.77	40.0	23.23	Peak	208.00	300	Horizontal	Pass
2	134.982	21.60	43.5	21.90	Peak	208.00	300	Horizontal	Pass
3	220.008	34.38	43.5	9.12	Peak	61.00	100	Horizontal	Pass
4	256.664	25.41	43.5	18.09	Peak	61.00	100	Horizontal	Pass
5	460.187	28.76	46.0	17.24	Peak	269.00	200	Horizontal	Pass
6	744.018	36.49	46.0	9.51	Peak	269.00	200	Horizontal	Pass

MIDDLE CHANNEL, 30 MHz to 1 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.208	24.13	40.0	15.87	Peak	149.00	400	Vertical	Pass
2	139.755	30.99	43.5	12.51	Peak	149.00	400	Vertical	Pass
3	155.442	28.64	43.5	14.86	Peak	98.00	300	Vertical	Pass
4	409.691	29.47	46.0	16.53	Peak	98.00	300	Vertical	Pass
5	636.139	32.99	46.0	13.01	Peak	180.00	200	Vertical	Pass
6	778.927	39.41	46.0	6.59	Peak	180.00	200	Vertical	Pass

HIGH CHANNEL, 30 MHz to 1 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.207	18.58	40.0	21.42	Peak	197.00	100	Horizontal	Pass
2	136.924	21.77	43.5	21.73	Peak	197.00	100	Horizontal	Pass
3	217.258	32.45	43.5	11.05	Peak	273.00	100	Horizontal	Pass
4	257.702	23.06	43.5	20.44	Peak	273.00	100	Horizontal	Pass
5	457.267	30.38	46.0	15.62	Peak	59.00	200	Horizontal	Pass
6	748.117	32.67	46.0	13.33	Peak	59.00	200	Horizontal	Pass

HIGH CHANNEL, 30 MHz to 1 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	57.569	25.59	40.0	14.41	Peak	37.00	200	Vertical	Pass
2	140.831	26.57	43.5	16.93	Peak	37.00	200	Vertical	Pass
3	155.024	23.82	43.5	19.68	Peak	345.00	300	Vertical	Pass
4	410.615	26.83	46.0	19.17	Peak	345.00	300	Vertical	Pass
5	635.396	30.12	46.0	15.88	Peak	30.00	200	Vertical	Pass
6	778.440	36.97	46.0	9.03	Peak	30.00	200	Vertical	Pass

LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1335.242	44.69	74.0	29.31	Peak	355.00	100	Horizontal	Pass
1**	1335.242	26.73	54.0	27.27	AV	355.00	100	Horizontal	Pass
2	2971.491	52.87	74.0	21.13	Peak	136.00	200	Horizontal	Pass
2**	2971.491	41.63	54.0	12.37	AV	136.00	200	Horizontal	Pass
3	4913.589	51.57	74.0	22.43	Peak	82.00	200	Horizontal	Pass
3**	4913.589	44.38	54.0	9.62	AV	82.00	200	Horizontal	Pass
4	7622.718	54.58	74.0	19.42	Peak	309.00	200	Horizontal	Pass
4**	7622.718	37.51	54.0	16.49	AV	309.00	200	Horizontal	Pass
5	12472.511	51.43	74.0	22.57	Peak	324.00	100	Horizontal	Pass
5**	12472.511	43.13	54.0	10.87	AV	324.00	100	Horizontal	Pass
6	16856.767	52.27	74.0	21.73	Peak	28.00	300	Horizontal	Pass
6**	16856.767	42.66	54.0	11.34	AV	28.00	300	Horizontal	Pass

LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1467.865	41.06	74.0	32.94	Peak	156.00	400	Vertical	Pass
1**	1467.865	33.18	54.0	20.82	AV	156.00	400	Vertical	Pass
2	2992.215	52.57	74.0	21.43	Peak	84.00	200	Vertical	Pass
2**	2992.215	39.16	54.0	14.84	AV	84.00	200	Vertical	Pass
3	4923.957	54.40	74.0	19.60	Peak	314.00	200	Vertical	Pass
3**	4923.957	43.85	54.0	10.15	AV	314.00	200	Vertical	Pass
4	7970.869	57.54	74.0	16.46	Peak	44.00	200	Vertical	Pass
4**	7970.869	44.57	54.0	9.43	AV	44.00	200	Vertical	Pass
5	12441.379	49.23	74.0	24.77	Peak	159.00	200	Vertical	Pass
5**	12441.379	44.21	54.0	9.79	AV	159.00	200	Vertical	Pass
6	17453.821	54.40	74.0	19.60	Peak	189.00	300	Vertical	Pass
6**	17453.821	46.93	54.0	7.07	AV	189.00	300	Vertical	Pass

MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1334.742	44.16	74.0	29.84	Peak	200.00	400	Horizontal	Pass
1**	1334.742	30.30	54.0	23.70	AV	200.00	400	Horizontal	Pass
2	2975.888	48.49	74.0	25.51	Peak	354.00	300	Horizontal	Pass
2**	2975.888	39.63	54.0	14.37	AV	354.00	300	Horizontal	Pass
3	4911.745	53.89	74.0	20.11	Peak	127.00	200	Horizontal	Pass
3**	4911.745	39.56	54.0	14.44	AV	127.00	200	Horizontal	Pass
4	7625.151	56.52	74.0	17.48	Peak	210.00	200	Horizontal	Pass
4**	7625.151	42.86	54.0	11.14	AV	210.00	200	Horizontal	Pass
5	12472.164	49.99	74.0	24.01	Peak	69.00	200	Horizontal	Pass
5**	12472.164	47.13	54.0	6.87	AV	69.00	200	Horizontal	Pass
6	16857.669	53.99	74.0	20.01	Peak	135.00	400	Horizontal	Pass
6**	16857.669	40.41	54.0	13.59	AV	135.00	400	Horizontal	Pass

MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1465.837	45.64	74.0	28.36	Peak	353.00	100	Vertical	Pass
1**	1465.837	31.10	54.0	22.90	AV	353.00	100	Vertical	Pass
2	2993.741	51.16	74.0	22.84	Peak	202.00	400	Vertical	Pass
2**	2993.741	38.86	54.0	15.14	AV	202.00	400	Vertical	Pass
3	4925.595	52.54	74.0	21.46	Peak	45.00	200	Vertical	Pass
3**	4925.595	40.04	54.0	13.96	AV	45.00	200	Vertical	Pass
4	7965.636	56.73	74.0	17.27	Peak	44.00	400	Vertical	Pass
4**	7965.636	41.30	54.0	12.70	AV	44.00	400	Vertical	Pass
5	12445.783	49.05	74.0	24.95	Peak	88.00	400	Vertical	Pass
5**	12445.783	44.71	54.0	9.29	AV	88.00	400	Vertical	Pass
6	17454.788	55.80	74.0	18.20	Peak	254.00	400	Vertical	Pass
6**	17454.788	44.43	54.0	9.57	AV	254.00	400	Vertical	Pass

HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1338.624	44.95	74.0	29.05	Peak	38.00	100	Horizontal	Pass
1**	1338.624	29.86	54.0	24.14	AV	38.00	100	Horizontal	Pass
2	2974.251	51.16	74.0	22.84	Peak	259.00	300	Horizontal	Pass
2**	2974.251	40.02	54.0	13.98	AV	259.00	300	Horizontal	Pass
3	4912.083	53.79	74.0	20.21	Peak	290.00	200	Horizontal	Pass
3**	4912.083	43.11	54.0	10.89	AV	290.00	200	Horizontal	Pass
4	7622.930	54.64	74.0	19.36	Peak	172.00	100	Horizontal	Pass
4**	7622.930	41.92	54.0	12.08	AV	172.00	100	Horizontal	Pass
5	12472.260	53.05	74.0	20.95	Peak	201.00	400	Horizontal	Pass
5**	12472.260	46.57	54.0	7.43	AV	201.00	400	Horizontal	Pass
6	16854.358	54.01	74.0	19.99	Peak	206.00	200	Horizontal	Pass
6**	16854.358	43.26	54.0	10.74	AV	206.00	200	Horizontal	Pass

HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1469.993	45.86	74.0	28.14	Peak	337.00	200	Vertical	Pass
1**	1469.993	30.36	54.0	23.64	AV	337.00	200	Vertical	Pass
2	2988.160	50.05	74.0	23.95	Peak	112.00	100	Vertical	Pass
2**	2988.160	40.32	54.0	13.68	AV	112.00	100	Vertical	Pass
3	4921.826	49.18	74.0	24.82	Peak	348.00	200	Vertical	Pass
3**	4921.826	44.00	54.0	10.00	AV	348.00	200	Vertical	Pass
4	7965.082	56.78	74.0	17.22	Peak	101.00	300	Vertical	Pass
4**	7965.082	41.44	54.0	12.56	AV	101.00	300	Vertical	Pass
5	12445.554	49.33	74.0	24.67	Peak	35.00	400	Vertical	Pass
5**	12445.554	45.35	54.0	8.65	AV	35.00	400	Vertical	Pass
6	17453.877	55.76	74.0	18.24	Peak	150.00	300	Vertical	Pass
6**	17453.877	46.56	54.0	7.44	AV	150.00	300	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	610.862	41.97	54.0	12.03	Peak	350.00	200	Horizontal	Pass
2	612.780	44.38	54.0	9.62	Peak	209.00	300	Horizontal	Pass

HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	959.594	43.75	54.0	10.25	Peak	118.00	300	Horizontal	Pass
2	962.013	43.56	54.0	10.44	Peak	13.00	300	Horizontal	Pass

HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1008.439	44.82	54.0	9.18	Peak	142.00	100	Horizontal	Pass
2	1163.720	47.12	54.0	6.88	Peak	247.00	200	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2570069-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2570069-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2570069-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--