



TEST REPORT

Applicant Name : Inrico Technologies Co., Ltd
Address : 3/F, Building No.118, High Tech Industrial Park, 72 Guowei Road, Luohu District, Shenzhen, China
Report Number: SZGMA210719-29779E-RF-00CA1
FCC ID: 2AIV6-2-T529A

Test Standard (s)

FCC PART 27; FCC PART 22H; FCC PART 24E

Sample Description

Product Type: Intelligent Two Way Radio
Model No.: T529A
Trade Mark: Inrico
Date Received: 2021/07/19
Date of Test: 2021/08/04~2021/11/26
Report Date: 2021/12/03

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Fan Yang
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

Version 2: 2021-11-09

Page 1 of 19

FCC -2G,3G,4G

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE DESCRIPTION	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §1.1307(B)&§2.1093 - RF EXPOSURE INFORMATION.....	11
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53- SPURIOUS RADIATED EMISSIONS.....	12
APPLICABLE STANDARD	12
TEST PROCEDURE	12
TEST DATA	12

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2:1850-1910 MHz(TX), 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910MHz(TX); 1930-1990MHz(RX) LTE Band 4: 1710-1755MHz(TX); 2110-2155MHz(RX) LTE Band 5: 824-849MHz(TX); 869-894MHz(RX) LTE Band 7: 2500-2570MHz(TX); 2620-2690MHz(RX) LTE Band 12: 699-716MHz(TX); 729-746MHz(RX) LTE Band 17: 704-716MHz(TX); 734-746MHz(RX) LTE B38: 2570-2620 MHz(TX&RX) LTE B40: 2305-2315 MHz(TX&RX) / 2350-2360 MHz(TX&RX) LTE Band 66: 1710-1780MHz(TX); 2110-2200MHz(RX)
Modulation Technique	GMSK, 8PSK, BPSK, QPSK, 16QAM
Voltage Range	DC5V from adapter or DC 3.7V From Battery
Sample number	SZGMA210719-29779E-RFA1-S1 (RE) SZGMA210719-29779E-RFA1-S2 (RF Conducted Test) (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: HJ-0501000E1-US Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 5.0V, 1000mA

Objective

This test report is in accordance with Part 2-Subpart J, Part 22-Subpart H, Part24-Subpart E, and Subpart 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 - Miscellaneous Wireless Communications Services

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		±0.73dB
Unwanted Emission, conducted		±1.6dB
RF Frequency		±0.082*10 ⁻⁷
Emissions, Radiated	30MHz - 1GHz	±4.28dB
	1GHz- 18GHz	±4.98dB
	18GHz-26.5GHz	±5.06dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The final qualification test was performed with the EUT operating at normal mode.

The test items were performed with the EUT operating at testing mode. Test was performed with channels as below table:

Frequency band	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
GPRS/EDGE 850	0.25	824.2	836.6	848.8
GPRS/EDGE 1900	0.25	1850.2	1880	1909.8
WCDMA Band 2	4.2	1852.4	1880	1907.6
WCDMA Band 5	4.2	826.4	836.6	846.6
LTE Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
LTE Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745
LTE Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844
LTE Band 7	5	2502.5	2535	2567.5
	10	2505	2535	2565
	15	2507.5	2535	2562.5
	20	2510	2535	2560
LTE Band 12	1.4	699.7	707.5	715.3
	3	700.5	707.5	714.5
	5	701.5	707.5	713.5
	10	704	707.5	711

Frequency band	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
LTE Band 17	5	706.5	710	713.5
	10	709	710	711
LTE Band 38	5	2572.5	2595	2617.5
	10	2575	2595	2615
	15	2577.5	2595	2612.5
	20	2580	2595	2610
LTE Band 40 Lower 2305-2315MHz	5	2307.5	2310	2312.5
	10	/	2310	/
LTE Band 40 Upper 2350-2360MHz	5	2352.5	2355	2357.5
	10	/	2355	/
LTE B66	1.4	1710.7	1745	1779.3
	3	1711.5	1745	1778.5
	5	1712.5	1745	1777.5
	10	1715	1745	1775
	15	1717.5	1745	1772.5
	20	1720	1745	1770

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606

Support Cable Description

Cable Description	Length (m)	From / Port	To
Un-shielded Un-detachable AC cable	1.2	AC Power	CMW500

Block Diagram of Test Setup

For Radiated emission

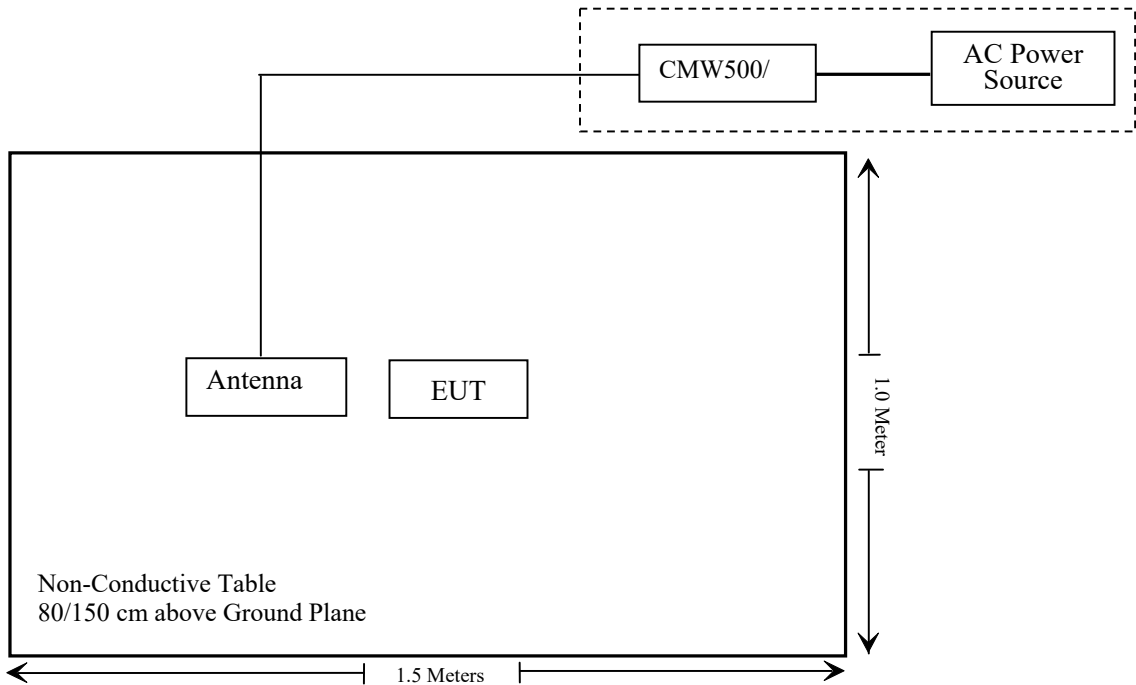

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 , §2.1093	RF Exposure (SAR)	Compliant*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (a) (b) (c) (d) (h);	RF Output Power	Compliant**
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant**
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53;	Spurious Emissions at Antenna Terminal	Compliant**
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliant
§ 22.917 (a); § 24.238 (a); §27.53 (c) (h) (m)	Band Edge	Compliant**
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliant**

Note:

Compliant *: Please refer to SAR report number: CR21120024-SAA1

Compliant **: EUT is electrical identical with the product Intelligent Two Way Radio (model: T529A, FCC ID: 2AIV6-T529A) under Inrico Technologies Co., Ltd. The difference between those two products is EUT is enable the BT&Wi-Fi function by software and remove the NFC circuit, and the current device had been tested and verified the RF parameters consistently with the original device, test data of these items please refer to the test report: RDG200407009-00B.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde& Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2020/11/28	2021/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.7	2020/12/25	2021/12/24
CD	High Pass Filter	HPM-1.2/18G -60	110	2020/12/25	2021/12/24
Unknown	Band Reject Filter	MSF824-862 MS-1147	201706003	2020/12/25	2021/12/24
Unknown	Band Reject Filter	MSF1850-191 0MS-1148	201706003	2020/12/25	2021/12/24
Unknown	Band Reject Filter	MSF1710-178 5MS-1150	201706003	2020/12/25	2021/12/24
Unknown	Band Reject Filter	MSF2495-257 0MS-1152	201706003	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2020/01/05	2023/01/04
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-655	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
PASTERNAK	Horn Antenn	PE9852/2F-20	1120	2020/01/05	2023/01/04
PASTERNAK	Horn Antenn	PE9852/2F-20	1120	2020/01/05	2023/01/04

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Signal Generator	68369B	004114	2021/7/31	2022/7/30
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2020/12/25	2021/12/24
Radiated Emission Test Software: EZ EMC V 1.1.4.2					

* Statement of Traceability: Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b)&§2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: CR21120024-SAA1

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53- SPURIOUS RADIATED EMISSIONS**Applicable Standard**

FCC § 2.1053, §22.917(a)& § 24.238(a) & § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Fan Yang on 2021-09-09.

EUT operation mode: Transmitting

The worst case is as below:

Frequency (MHz)	Receiver Reading (dBm)	Turntable	Rx Antenna		Substituted Factor (dB/m)	Absolute Level	Limit	Margin
		Angle				(dBm)	(dBm)	(dB)
		Degree	Height (m)	Polar (H/V)				
GSM850, Low Channel								
Test frequency range: 30MHz-10GHz								
Low Channel								
42.01	-63.95	144	2.1	H	2.9	-61.05	-13	48.05
42.01	-59.18	161	2.0	V	-0.4	-59.58	-13	46.58
1648.4	-47.22	37	1.8	H	-2.32	-49.54	-13	36.54
1648.4	-32.66	360	1.2	V	-2.29	-34.95	-13	21.95
Middle Channel								
42.01	-63.86	88	1.1	H	2.9	-60.96	-13	47.96
42.01	-59.64	108	1.1	V	-0.4	-60.04	-13	47.04
1673.2	-46.91	185	2.1	H	-2.34	-49.25	-13	36.25
1673.2	-31.93	4	1.8	V	-2.31	-34.24	-13	21.24
High Channel								
42.01	-64.16	303	1.9	H	2.9	-61.26	-13	48.26
42.01	-59.75	128	2.1	V	-0.4	-60.15	-13	47.15
1697.6	-46.94	66	1.3	H	-2.38	-49.32	-13	36.32
1697.6	-31.83	66	2.1	V	-2.34	-34.17	-13	21.17
PCS1900								
Test frequency range: 30MHz-20GHz								
Low Channel								
42.01	-62.42	150	1.4	H	2.9	-59.52	-13	46.52
42.01	-57.92	345	1.1	V	-0.4	-58.32	-13	45.32
3700.4	-49.17	204	1.9	H	4.72	-44.45	-13	31.45
3700.4	-50.23	62	1.8	V	4.61	-45.62	-13	32.62
Middle Channel								
42.01	-61.88	261	1.8	H	2.9	-58.98	-13	45.98
42.01	-58.75	356	1.6	V	-0.4	-59.15	-13	46.15
3760	-50.02	166	1.1	H	4.94	-45.08	-13	32.08
3760	-49.73	291	2.1	V	4.85	-44.88	-13	31.88
High Channel								
42.01	-62.41	285	1.2	H	2.9	-59.51	-13	46.51
42.01	-57.83	329	1.5	V	-0.4	-58.23	-13	45.23
3819.6	-49.51	321	1.6	H	5.25	-44.26	-13	31.26
3819.6	-49.17	30	1.2	V	5.08	-44.09	-13	31.09

Frequency (MHz)	Receiver Reading (dBm)	Turntable	Rx Antenna		Substituted Factor (dB/m)	Absolute Level	Limit	Margin
		Angle				(dBm)	(dBm)	(dB)
		Degree	Height	Polar				
			(m)	(H/V)				
WCDMA BAND 2								
Test frequency range: 30MHz-20GHz								
Low Channel								
42.01	-58.26	29	1.3	H	2.9	-55.36	-13	42.36
42.01	-57.81	217	1.1	V	-0.4	-58.21	-13	45.21
3704.8	-49.08	117	1.3	H	4.75	-44.33	-13	31.33
3704.8	-49.87	283	1.7	V	4.62	-45.25	-13	32.25
Middle Channel								
42.01	-60.15	218	1.2	H	2.9	-57.25	-13	44.25
42.01	-57.96	305	1.9	V	-0.4	-58.36	-13	45.36
3760	-49.05	309	1.6	H	4.94	-44.11	-13	31.11
3760	-50.42	243	1.1	V	4.85	-45.57	-13	32.57
High Channel								
42.01	-61.16	260	1.3	H	2.9	-58.26	-13	45.26
42.01	-59.47	65	2.0	V	-0.4	-59.87	-13	46.87
3815.2	-49.64	28	2.0	H	5.22	-44.42	-13	31.42
3815.2	-50.70	263	1.4	V	5.05	-45.65	-13	32.65
WCDMA BAND5								
Test frequency range: 30MHz-10GHz								
Low Channel								
42.01	-61.11	120	1.4	H	2.9	-58.21	-13	45.21
42.01	-58.68	124	1.7	V	-0.4	-59.08	-13	46.08
1652.8	-41.96	200	1.1	H	-2.32	-44.28	-13	31.28
1652.8	-43.36	321	2.1	V	-2.29	-45.65	-13	32.65
Middle Channel								
42.01	-60.42	334	1.4	H	2.9	-57.52	-13	44.52
42.01	-58.29	204	1.1	V	-0.4	-58.69	-13	45.69
1673.2	-42.01	199	1.9	H	-2.34	-44.35	-13	31.35
1673.2	-46.94	104	1.2	V	-2.31	-49.25	-13	36.25
High Channel								
42.01	-61.08	164	1.4	H	2.9	-58.18	-13	45.18
42.01	-59.17	344	2.1	V	-0.4	-59.57	-13	46.57
1693.2	-41.91	290	2.0	H	-2.38	-44.29	-13	31.29
1693.2	-42.74	48	1.4	V	-2.34	-45.08	-13	32.08

Frequency (MHz)	Receiver Reading (dBm)	Turntable	Rx Antenna		Substituted Factor (dB/m)	Absolute Level	Limit	Margin
		Angle				(dBm)	(dBm)	(dB)
		Degree	Height	Polar				
			(m)	(H/V)				
LTE BAND2								
Test frequency range: 30MHz-20GHz								
1.4MHz, Low Channel								
42.01	-60.07	255	2.1	H	2.9	-57.17	-13	44.17
42.01	-59.01	299	1.1	V	-0.4	-59.41	-13	46.41
3701.4	-49.56	115	1.2	H	4.72	-44.84	-13	31.84
3701.4	-50.15	155	1.7	V	4.61	-45.54	-13	32.54
1.4MHz,Middle Channel								
42.01	-60.97	206	2.0	H	2.9	-58.07	-13	45.07
42.01	-58.71	120	1.5	V	-0.4	-59.11	-13	46.11
3760	-49.18	8	1.2	H	4.94	-44.24	-13	31.24
3760	-49.91	274	2.0	V	4.85	-45.06	-13	32.06
1.4MHz,High Channel								
42.01	-60.98	74	1.9	H	2.9	-58.08	-13	45.08
42.01	-58.65	344	1.4	V	-0.4	-59.05	-13	46.05
3818.6	-49.58	154	1.6	H	5.25	-44.33	-13	31.33
3818.6	-50.25	255	1.4	V	5.08	-45.17	-13	32.17
LTE BAND 4								
Test frequency range: 30MHz-20GHz								
1.4MHz, Low Channel								
42.01	-61.02	218	2.0	H	2.9	-58.12	-13	45.12
42.01	-59.23	4	1.4	V	-0.4	-59.63	-13	46.63
3421.4	-48.27	178	1.4	H	2.72	-45.55	-13	32.55
3421.4	-48.66	117	1.1	V	2.59	-46.07	-13	33.07
1.4MHz,Middle Channel								
42.01	-61.31	188	1.8	H	2.9	-58.41	-13	45.41
42.01	-58.84	250	1.7	V	-0.4	-59.24	-13	46.24
3465	-48.10	270	1.9	H	3.09	-45.01	-13	32.01
3465	-49.20	273	1.2	V	2.97	-46.23	-13	33.23
1.4MHz,High Channel								
42.01	-61.05	49	1.6	H	2.9	-58.15	-13	45.15
42.01	-58.92	123	1.7	V	-0.4	-59.32	-13	46.32
3508.6	-48.32	43	1.5	H	3.44	-44.88	-13	31.88
3508.6	-48.50	136	1.8	V	3.31	-45.19	-13	32.19

Frequency (MHz)	Receiver Reading (dBm)	Turntable	Rx Antenna		Substituted Factor (dB/m)	Absolute Level	Limit	Margin
		Angle				(dBm)	(dBm)	(dB)
		Degree	Height	Polar				
			(m)	(H/V)				
LTE BAND 5								
Test frequency range: 30MHz-10GHz								
1.4MHz, Low Channel								
42.01	-62.35	193	1.9	H	2.9	-59.45	-13	46.45
42.01	-59.83	332	1.2	V	-0.4	-60.23	-13	47.23
1649.4	-43.47	199	1.7	H	-2.79	-46.26	-13	33.26
1649.4	-42.68	309	1.3	V	-2.73	-45.41	-13	32.41
1.4MHz,Middle Channel								
42.01	-62.48	92	1.5	H	2.9	-59.58	-13	46.58
42.01	-58.37	16	1.2	V	-0.4	-58.77	-13	45.77
1673	-43.44	4	1.0	H	-2.74	-46.18	-13	33.18
1673	-43.00	326	1.9	V	-2.69	-45.69	-13	32.69
1.4MHz,High Channel								
42.01	-62.47	165	1.6	H	2.9	-59.57	-13	46.57
42.01	-58.67	234	1.4	V	-0.4	-59.07	-13	46.07
1696.6	-43.48	182	1.3	H	-2.7	-46.18	-13	33.18
1696.6	-43.58	6	1.4	V	-2.65	-46.23	-13	33.23
LTE BAND 7								
Test frequency range: 30MHz-26.5GHz								
5MHz, Low Channel								
42.01	-63.16	17	2.0	H	2.9	-60.26	-25	35.26
42.01	-58.72	121	2.2	V	-0.4	-59.12	-25	34.12
5005	-54.14	131	2.0	H	8.82	-45.32	-25	20.32
5005	-54.58	144	1.9	V	8.53	-46.05	-25	21.05
5MHz, Middle Channel								
42.01	-63.04	80	1.8	H	2.9	-60.14	-25	35.14
42.01	-58.68	31	1.7	V	-0.4	-59.08	-25	34.08
5070	-53.84	114	2.1	H	9.18	-44.66	-25	19.66
5070	-54.10	252	1.8	V	8.56	-45.54	-25	20.54
5MHz, High Channel								
42.01	-63.66	345	1.7	H	2.9	-60.76	-25	35.76
42.01	-56.85	162	2.0	V	-0.4	-57.25	-25	32.25
5135	-54.88	335	1.0	H	9.47	-45.41	-25	20.41
5135	-53.64	298	1.3	V	8.65	-44.99	-25	19.99

Frequency (MHz)	Receiver Reading (dBm)	Turntable	Rx Antenna		Substituted Factor (dB/m)	Absolute Level	Limit	Margin
		Angle				(dBm)	(dBm)	(dB)
		Degree	Height	Polar				
			(m)	(H/V)				
LTE BAND 12								
Test frequency range: 30MHz-10GHz								
1.4MHz, Low Channel								
42.01	-62.75	305	1.1	H	2.9	-59.85	-13	46.85
42.01	-58.56	240	1.8	V	-0.4	-58.96	-13	45.96
1399.4	-37.74	302	2.1	H	-0.62	-38.36	-13	25.36
1399.4	-35.78	311	1.4	V	-0.84	-36.62	-13	23.62
1.4MHz,Middle Channel								
42.01	-63.76	80	1.8	H	2.9	-60.86	-13	47.86
42.01	-58.23	184	1.1	V	-0.4	-58.63	-13	45.63
1415	-37.97	201	1.7	H	-0.65	-38.62	-13	25.62
1415	-35.27	311	1.8	V	-0.87	-36.14	-13	23.14
1.4MHz,High Channel								
42.01	-62.88	101	1.6	H	2.9	-59.98	-13	46.98
42.01	-58.22	51	1.3	V	-0.4	-58.62	-13	45.62
1430.6	-36.94	230	1.6	H	-0.71	-37.65	-13	24.65
1430.6	-32.25	170	1.7	V	-0.94	-33.19	-13	20.19
LTE BAND 17								
Test frequency range: 30MHz-10GHz								
5MHz, Low Channel								
42.01	-61.16	200	1.2	H	2.9	-58.26	-13	45.26
42.01	-58.78	264	1.7	V	-0.4	-59.18	-13	46.18
1413	-42.00	186	1.3	H	-0.65	-42.65	-13	29.65
1413	-42.27	136	1.7	V	-0.87	-43.14	-13	30.14
5MHz,Middle Channel								
42.01	-61.68	318	1.9	H	2.9	-58.78	-13	45.78
42.01	-59.55	231	1.3	V	-0.4	-59.95	-13	46.95
1420	-40.00	5	1.6	H	-0.67	-40.67	-13	27.67
1420	-41.94	230	1.7	V	-0.91	-42.85	-13	29.85
5MHz,High Channel								
42.01	-61.23	124	1.1	H	2.9	-58.33	-13	45.33
42.01	-59.12	60	1.0	V	-0.4	-59.52	-13	46.52
1427	-40.48	202	1.9	H	-0.71	-41.19	-13	28.19
1427	-42.21	328	1.3	V	-0.94	-43.15	-13	30.15

Frequency (MHz)	Receiver Reading (dBm)	Turntable	Rx Antenna		Substituted Factor (dB/m)	Absolute Level	Limit	Margin
		Angle				(dBm)	(dBm)	(dB)
		Degree	Height	Polar				
			(m)	(H/V)				
LTE BAND 38								
Test frequency range: 30MHz-26.5GHz								
5MHz, Low Channel								
42.01	-63.52	315	1.0	H	2.9	-60.62	-25	35.62
42.01	-58.85	253	1.5	V	-0.4	-59.25	-25	34.25
5145	-52.47	335	1.1	H	9.64	-42.83	-25	17.83
5145	-49.06	13	1.1	V	8.71	-40.35	-25	15.35
5MHz, Middle Channel								
42.01	-64.04	290	1.1	H	2.9	-61.14	-25	36.14
42.01	-59.34	133	1.6	V	-0.4	-59.74	-25	34.74
5190	-52.40	54	1.6	H	9.75	-42.65	-25	17.65
5190	-48.96	14	1.9	V	8.73	-40.23	-25	15.23
5MHz, High Channel								
42.01	-63.94	271	1.5	H	2.9	-61.04	-25	36.04
42.01	-58.81	237	2.2	V	-0.4	-59.21	-25	34.21
5235	-52.51	244	2.0	H	9.83	-42.68	-25	17.68
5235	-49.06	133	1.9	V	8.91	-40.15	-25	15.15
LTE BAND40 Lower								
Test frequency range: 30MHz-24GHz								
5MHz,Low Channel								
42.01	-61.85	105	1.6	H	2.9	-58.95	-40	18.95
42.01	-57.28	194	1.9	V	-0.4	-57.68	-40	17.68
4615	-52.05	175	1.4	H	8.88	-43.17	-40	3.17
4615	-51.30	197	1.7	V	8.28	-43.02	-40	3.02
5MHz,Middle Channel								
42.01	-62.47	188	2.2	H	2.9	-59.57	-40	19.57
42.01	-58.25	181	1.9	V	-0.4	-58.65	-40	18.65
4620	-52.07	334	1.6	H	8.88	-43.19	-40	3.19
4620	-51.40	31	1.4	V	8.28	-43.12	-40	3.12
5MHz,High Channel								
42.01	-62.77	33	1.9	H	2.9	-59.87	-40	19.87
42.01	-57.29	109	2.0	V	-0.4	-57.69	-40	17.69
4625	-52.13	317	1.6	H	8.89	-43.24	-40	3.24
4625	-51.43	279	2.1	V	8.28	-43.15	-40	3.15

Frequency (MHz)	Receiver Reading (dBm)	Turntable	Rx Antenna		Substituted Factor (dB/m)	Absolute Level	Limit	Margin
		Angle				(dBm)	(dBm)	(dB)
		Degree	Height	Polar				
			(m)	(H/V)				
LTE BAND40 Upper								
Test frequency range: 30MHz-24GHz								
5MHz, Low Channel								
42.01	-63.64	155	1.3	H	2.9	-60.74	-40	20.74
42.01	-58.25	142	2.0	V	-0.4	-58.65	-40	18.65
4705	-53.18	68	1.4	H	9.02	-44.16	-40	4.16
4705	-51.53	109	1.4	V	8.29	-43.24	-40	3.24
5MHz,Middle Channel								
42.01	-63.45	324	1.1	H	2.9	-60.55	-40	20.55
42.01	-58.36	205	1.2	V	-0.4	-58.76	-40	18.76
4710	-53.27	250	1.2	H	9.03	-44.24	-40	4.24
4710	-51.47	186	2.1	V	8.29	-43.18	-40	3.18
5MHz,High Channel								
42.01	-63.58	122	1.3	H	2.9	-60.68	-40	20.68
42.01	-58.14	23	1.2	V	-0.4	-58.54	-40	18.54
4715	-52.82	192	1.7	H	9.04	-43.78	-40	3.78
4715	-51.38	328	1.6	V	8.29	-43.09	-40	3.09
LTE BAND66								
Test frequency range: 30MHz-20GHz								
1.4MHz,, Low Channel								
42.01	-61.52	24	1.2	H	2.9	-58.62	-13	45.62
42.01	-57.45	339	1.8	V	-0.4	-57.85	-13	44.85
3241.4	-35.86	276	1.9	H	2.72	-33.14	-13	20.14
3241.4	-34.26	228	1.2	V	2.61	-31.65	-13	18.65
1.4MHz,,Middle Channel								
42.01	-62.79	196	2.0	H	2.9	-59.89	-13	46.89
42.01	-58.67	261	1.0	V	-0.4	-59.07	-13	46.07
3490	-37.47	58	1.7	H	3.52	-33.95	-13	20.95
3490	-36.29	301	1.9	V	3.46	-32.83	-13	19.83
1.4MHz,,High Channel								
42.01	-62.78	218	1.5	H	2.9	-59.88	-13	46.88
42.01	-57.73	176	2.2	V	-0.4	-58.13	-13	45.13
3558.6	-36.92	176	1.1	H	3.87	-33.05	-13	20.05
3558.6	-35.14	85	1.4	V	3.8	-31.34	-13	18.34

Note:

Absolute Level = Reading Level + Substituted Factor

Substituted Factor contains: SG Level - Cable loss+ Antenna Gain

Margin = Limit- Absolute Level

***** END OF REPORT *****