

Appendix H

Test Information:

Sample No.:	2VVL-2	Test Date:	2025.03.19-205.03.31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Lin	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25-27	Relative Humidity: (%)	46-52	ATM Pressure: (kPa)	101
-----------------------	-------	------------------------------	-------	---------------------------	-----

Transmitter Conducted Output Power And ERP/EIRP


Band	Channel	Freq (MHz)	Connection Type	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP(Limit) (dBm)	Verdict
2	9538	1907.6	RMC	23.52	22.21	33.01	PASS
2	9538	1907.6	HSDPA Subtest-1	22.60	21.29	33.01	PASS
2	9538	1907.6	HSDPA Subtest-2	22.42	21.11	33.01	PASS
2	9538	1907.6	HSDPA Subtest-3	21.92	20.61	33.01	PASS
2	9538	1907.6	HSDPA Subtest-4	21.94	20.63	33.01	PASS
2	9538	1907.6	HSUPA Subtest-1	21.90	20.59	33.01	PASS
2	9538	1907.6	HSUPA Subtest-2	22.47	21.16	33.01	PASS
2	9538	1907.6	HSUPA Subtest-3	21.48	20.17	33.01	PASS
2	9538	1907.6	HSUPA Subtest-4	22.58	21.27	33.01	PASS
2	9538	1907.6	HSUPA Subtest-5	21.51	20.20	33.01	PASS
2	9262	1852.4	HSPA+	21.32	20.01	33.01	PASS
2	9400	1880.0	RMC	23.22	21.91	33.01	PASS
2	9400	1880.0	HSDPA Subtest-1	22.54	21.23	33.01	PASS
2	9400	1880.0	HSDPA Subtest-2	22.42	21.11	33.01	PASS
2	9400	1880.0	HSDPA Subtest-3	22.01	20.70	33.01	PASS
2	9400	1880.0	HSDPA Subtest-4	22.01	20.70	33.01	PASS
2	9400	1880.0	HSUPA Subtest-1	21.80	20.49	33.01	PASS
2	9400	1880.0	HSUPA Subtest-2	22.53	21.22	33.01	PASS
2	9400	1880.0	HSUPA Subtest-3	21.51	20.20	33.01	PASS
2	9400	1880.0	HSUPA Subtest-4	22.56	21.25	33.01	PASS
2	9400	1880.0	HSUPA Subtest-5	21.51	20.20	33.01	PASS
2	9262	1852.4	HSPA+	21.50	20.19	33.01	PASS
2	9262	1852.4	RMC	23.54	22.23	33.01	PASS
2	9262	1852.4	HSDPA Subtest-1	22.58	21.27	33.01	PASS
2	9262	1852.4	HSDPA Subtest-2	22.39	21.08	33.01	PASS
2	9262	1852.4	HSDPA Subtest-3	21.96	20.65	33.01	PASS
2	9262	1852.4	HSDPA Subtest-4	21.93	20.62	33.01	PASS
2	9262	1852.4	HSUPA Subtest-1	21.88	20.57	33.01	PASS
2	9262	1852.4	HSUPA Subtest-2	22.52	21.21	33.01	PASS
2	9262	1852.4	HSUPA Subtest-3	21.51	20.20	33.01	PASS
2	9262	1852.4	HSUPA Subtest-4	22.53	21.22	33.01	PASS
2	9262	1852.4	HSUPA Subtest-5	21.43	20.12	33.01	PASS
2	9262	1852.4	HSPA+	21.40	20.09	33.01	PASS
5	4233	846.6	RMC	23.79	20.52	38.45	PASS
5	4233	846.6	HSDPA Subtest-1	23.10	19.83	38.45	PASS
5	4233	846.6	HSDPA Subtest-2	22.96	19.69	38.45	PASS
5	4233	846.6	HSDPA Subtest-3	22.53	19.26	38.45	PASS
5	4233	846.6	HSDPA Subtest-4	22.50	19.23	38.45	PASS
5	4233	846.6	HSUPA Subtest-1	22.45	19.18	38.45	PASS
5	4233	846.6	HSUPA Subtest-2	23.08	19.81	38.45	PASS
5	4233	846.6	HSUPA Subtest-3	21.95	18.68	38.45	PASS
5	4233	846.6	HSUPA Subtest-4	22.99	19.72	38.45	PASS
5	4233	846.6	HSUPA Subtest-5	21.99	18.72	38.45	PASS
5	4132	826.4	HSPA+	21.79	18.52	38.45	PASS
5	4182	836.4	RMC	24.03	20.76	38.45	PASS
5	4182	836.4	HSDPA Subtest-1	23.00	19.73	38.45	PASS
5	4182	836.4	HSDPA Subtest-2	22.87	19.60	38.45	PASS
5	4182	836.4	HSDPA Subtest-3	22.27	19.00	38.45	PASS
5	4182	836.4	HSDPA Subtest-4	22.23	18.96	38.45	PASS
5	4182	836.4	HSUPA Subtest-1	22.31	19.04	38.45	PASS
5	4182	836.4	HSUPA Subtest-2	22.86	19.59	38.45	PASS
5	4182	836.4	HSUPA Subtest-3	21.90	18.63	38.45	PASS
5	4182	836.4	HSUPA Subtest-4	22.88	19.61	38.45	PASS
5	4182	836.4	HSUPA Subtest-5	21.83	18.56	38.45	PASS
5	4132	826.4	HSPA+	21.80	18.53	38.45	PASS
5	4132	826.4	RMC	23.78	20.51	38.45	PASS
5	4132	826.4	HSDPA Subtest-1	23.14	19.87	38.45	PASS
5	4132	826.4	HSDPA Subtest-2	22.80	19.53	38.45	PASS
5	4132	826.4	HSDPA Subtest-3	22.46	19.19	38.45	PASS
5	4132	826.4	HSDPA Subtest-4	22.46	19.19	38.45	PASS
5	4132	826.4	HSUPA Subtest-1	22.38	19.11	38.45	PASS
5	4132	826.4	HSUPA Subtest-2	23.00	19.73	38.45	PASS
5	4132	826.4	HSUPA Subtest-3	22.05	18.78	38.45	PASS
5	4132	826.4	HSUPA Subtest-4	22.92	19.65	38.45	PASS
5	4132	826.4	HSUPA Subtest-5	21.92	18.65	38.45	PASS
5	4132	826.4	HSPA+	21.75	18.48	38.45	PASS

Peak to Average Ratio


Band	Channel	Freq (MHz)	Result (dB)	Limit (dB)	Verdict
2	9538	1907.6	3.54	13	PASS
2	9400	1880.0	3.04	13	PASS
2	9262	1852.4	3.01	13	PASS
5	4233	846.6	3.13	13	PASS
5	4182	836.4	3.07	13	PASS
5	4132	826.4	3.10	13	PASS


Occupied Bandwidth

Band	Channel	Freq (MHz)	OBW (MHz)	26dB BW (MHz)	Verdict
2	9400	1880.0	4.2258	4.703	PASS
5	4182	836.4	4.2113	4.718	PASS

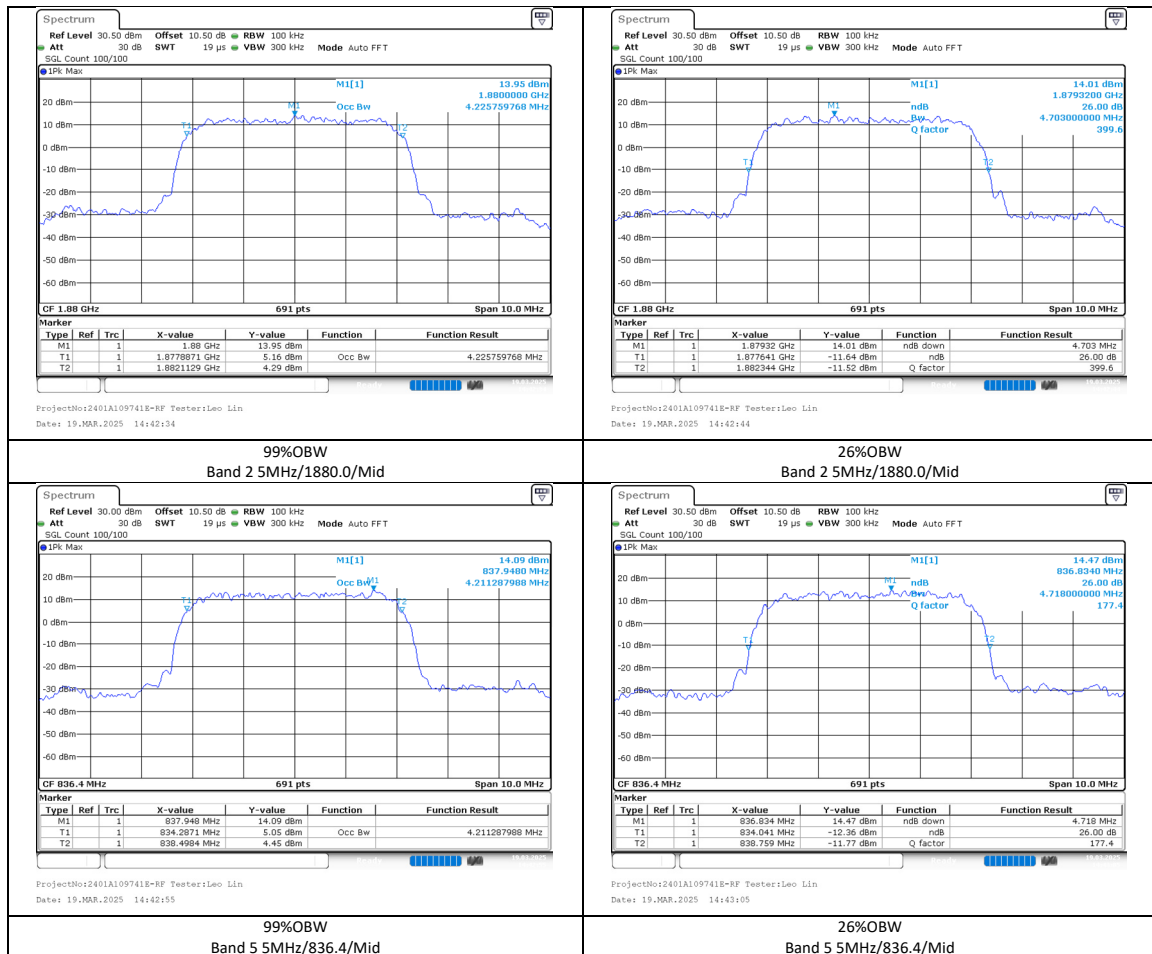






Conducted Spurious Emissions

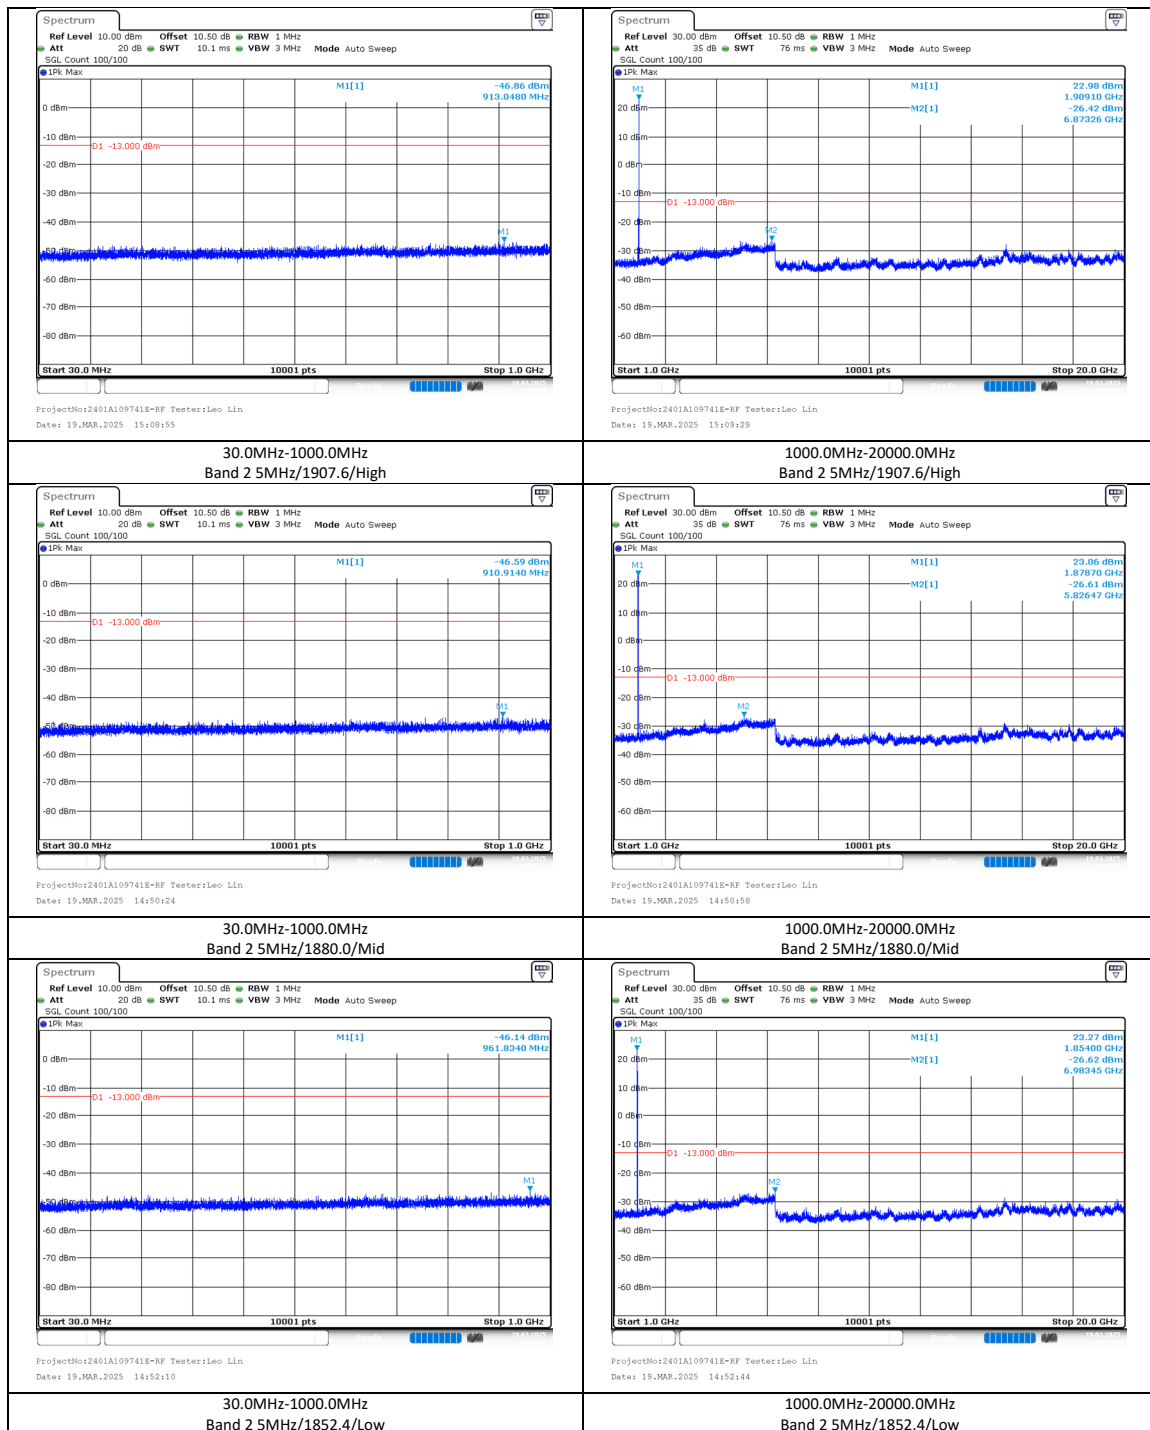

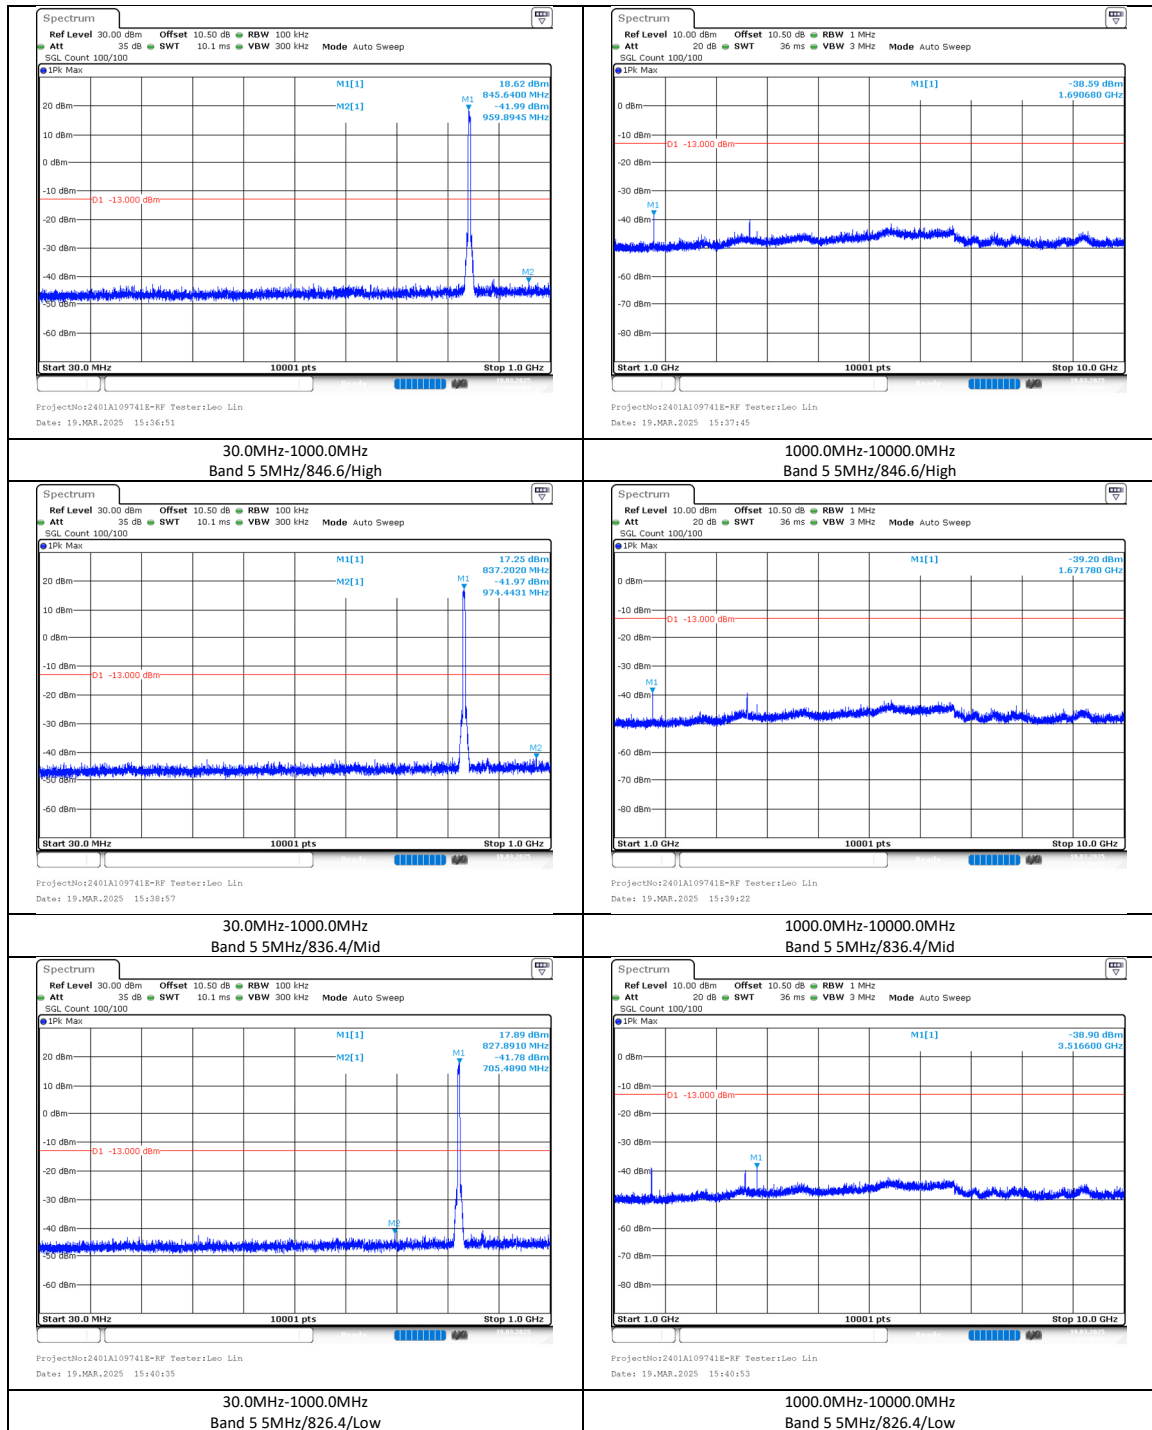

Conducted Band Edge

Band	Channel	Freq (MHz)	Result	Verdict
2	9538	1907.6	see graph	PASS
2	9262	1852.4	see graph	PASS
5	4233	846.6	see graph	PASS
5	4132	826.4	see graph	PASS

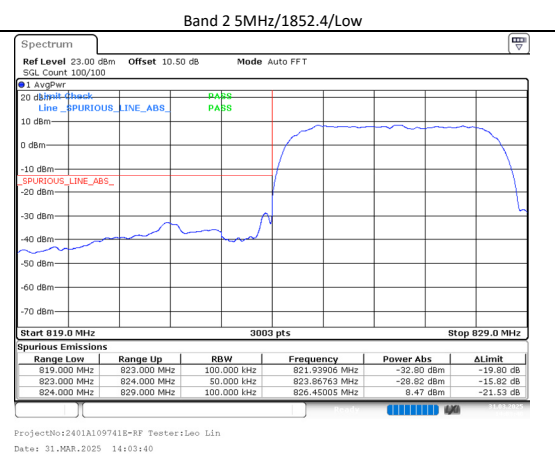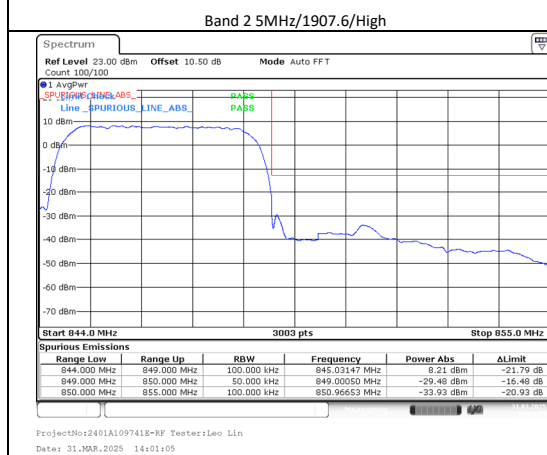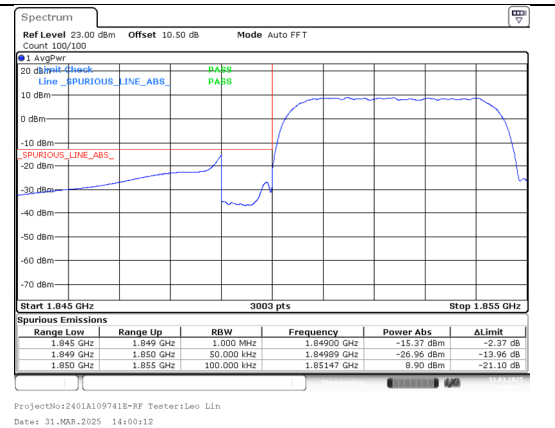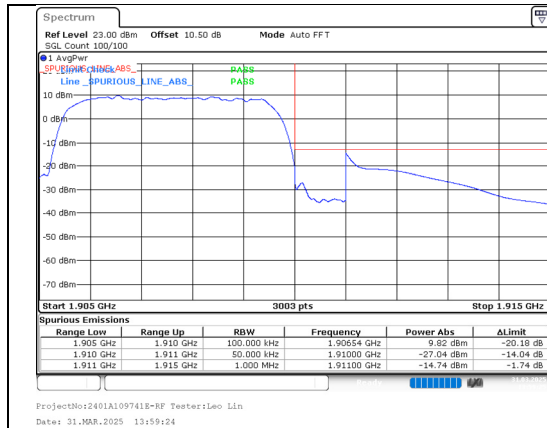

Frequency Stability Error

Band	Channel	Freq (MHz)	Deviation (Hz)	Deviation (ppm)	Limit(ppm)	Verdict	Environment
5	4233	846.6	3.84	0.00454	±2.5	PASS	20°C/3.40V
5	4233	846.6	-2.69	-0.00317	±2.5	PASS	20°C/4.40V
5	4233	846.6	1.89	0.00223	±2.5	PASS	50°C/3.80V
5	4233	846.6	4.92	0.00581	±2.5	PASS	40°C/3.80V
5	4233	846.6	-5.45	-0.00644	±2.5	PASS	30°C/3.80V
5	4233	846.6	4.45	0.00525	±2.5	PASS	20°C3.80V
5	4233	846.6	-1.23	-0.00145	±2.5	PASS	10°C3.80V
5	4233	846.6	-5.97	-0.00705	±2.5	PASS	0°C/3.80V
5	4233	846.6	5.56	0.00656	±2.5	PASS	-10°C/3.80V
5	4233	846.6	-0.12	-0.00014	±2.5	PASS	-20°C/3.80V
5	4233	846.6	-3.10	-0.00367	±2.5	PASS	-30°C/3.80V
5	4182	836.4	-1.22	-0.00146	±2.5	PASS	20°C/3.40V
5	4182	836.4	-0.62	-0.00074	±2.5	PASS	20°C/4.40V
5	4182	836.4	-6.70	-0.00801	±2.5	PASS	50°C/3.80V
5	4182	836.4	-5.41	-0.00647	±2.5	PASS	40°C/3.80V
5	4182	836.4	2.50	0.00299	±2.5	PASS	30°C/3.80V
5	4182	836.4	1.36	0.00163	±2.5	PASS	20°C3.80V
5	4182	836.4	2.79	0.00333	±2.5	PASS	10°C3.80V
5	4182	836.4	-0.16	-0.00019	±2.5	PASS	0°C/3.80V
5	4182	836.4	-5.44	-0.00650	±2.5	PASS	-10°C/3.80V
5	4182	836.4	0.68	0.00081	±2.5	PASS	-20°C/3.80V
5	4182	836.4	-7.90	-0.00945	±2.5	PASS	-30°C/3.80V
5	4132	826.4	-1.66	-0.00201	±2.5	PASS	20°C/3.40V
5	4132	826.4	5.29	0.00640	±2.5	PASS	20°C/4.40V
5	4132	826.4	3.16	0.00382	±2.5	PASS	50°C/3.80V
5	4132	826.4	-2.52	-0.00306	±2.5	PASS	40°C/3.80V
5	4132	826.4	3.66	0.00443	±2.5	PASS	30°C/3.80V
5	4132	826.4	-3.23	-0.00391	±2.5	PASS	20°C3.80V
5	4132	826.4	-1.61	-0.00194	±2.5	PASS	10°C3.80V
5	4132	826.4	3.63	0.00439	±2.5	PASS	0°C/3.80V
5	4132	826.4	0.36	0.00044	±2.5	PASS	-10°C/3.80V
5	4132	826.4	-3.63	-0.00440	±2.5	PASS	-20°C/3.80V
5	4132	826.4	3.48	0.00421	±2.5	PASS	-30°C/3.80V

Frequency Stability Range

Band	Channel (Low/High)	Freq (MHz)	Lower Edge (MHz) (Result)	Limit (1850MHz)	Upper Edge (MHz) (Result)	Limit (1910MHz)	Environment
2	9262/9538	1852.4/1907.6	1850.081	1850.000	1909.945	1910.000	20°C/3.40V
2	9262/9538	1852.4/1907.6	1850.120	1850.000	1909.968	1910.000	20°C/4.40V
2	9262/9538	1852.4/1907.6	1850.016	1850.000	1909.879	1910.000	50°C/3.80V
2	9262/9538	1852.4/1907.6	1850.046	1850.000	1909.891	1910.000	40°C/3.80V
2	9262/9538	1852.4/1907.6	1850.014	1850.000	1909.791	1910.000	30°C/3.80V
2	9262/9538	1852.4/1907.6	1850.094	1850.000	1909.866	1910.000	20°C/3.80V
2	9262/9538	1852.4/1907.6	1850.059	1850.000	1909.910	1910.000	10°C/3.80V
2	9262/9538	1852.4/1907.6	1850.150	1850.000	1909.789	1910.000	0°C/3.80V
2	9262/9538	1852.4/1907.6	1850.099	1850.000	1909.864	1910.000	-10°C/3.80V
2	9262/9538	1852.4/1907.6	1850.170	1850.000	1909.986	1910.000	-20°C/3.80V
2	9262/9538	1852.4/1907.6	1850.159	1850.000	1909.844	1910.000	-30°C/3.80V