



FCC SAR TEST REPORT

Report No: STS1606137H01

Issued for

X Wireless, LLC

PO Box 8667, Gaithersburg, MD 20898, USA

Product Name:	WCDMA/GSM MOBILE PHONE
Brand Name:	VORTEX
Model Name:	MATRIX
Series Model:	N/A
FCC ID:	2AIVG-MATRIX
	ANSI/IEEE Std. C95.1
Test Standard:	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report	Head:0.651 W/kg
SAR (1g):	Body:0.347 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test Sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





Test Report Certification

Applicant's name: X Wireless, LLC

Address PO Box 8667, Gaithersburg, MD 20898, USA

Manufacture's Name.....: X Wireless, LLC

Address PO Box 8667, Gaithersburg, MD 20898, USA

Product description

Product name: WCDMA/GSM MOBILE PHONE

Trademark: VORTEX

Model and/or type reference : MATRIX

Series Model: N/A

ANSI/IEEE Std. C95.1-1992

Standards.....: FCC 47 CFR Part 2 (2.1093)

IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test:

Date (s) of performance of tests...... 04 July 2016

Date of Issue...... 05 July 2016

Test Result.....: Pass

Testing Engineer : Allen Chen

(Allen Chen)

Technical Manager:

Authorized Signatory:

(John Zou)

- CINO 11-5

(Bovey Yang)







Table of Contents

1.General Information	4
1.1 EUT Description	4
1.2 Test Environment	6
1.3 Test Factory	6
2.Test Standards And Limits	7
3. SAR Measurement System	8
3.1 Definition Of Specific Absorption Rate (SAR)	8
3.2 SAR System	8
4. Tissue Simulating Liquids	11
4.1 Simulating Liquids Parameter Check	11
5. SAR System Validation	13
5.1 Validation System	13
5.2 Validation Result	13
6. SAR Evaluation Procedures	14
7. EUT Antenna Location Sketch	15
7.1 SAR test exclusion consider table	16
8. EUT Test Position	17
8.1 Define Two Imaginary Lines On The Handset	17
8.2 Hotspot mode exposure position condition	18
9. Uncertainty	19
9.1 Measurement Uncertainty	19
9.2 System validation Uncertainty	21
10. Conducted Power Measurement	23
10.1 Test Result	23
10.2 Tune-up Power	26
10.3 SAR Test Exclusions Applied	27
11. EUT And Test Setup Photo	28
11.1 EUT Photo	28
11.2 Setup Photo	31
12. SAR Result Summary	36
12.1 Head SAR	36
12.2 Body-worn and Hotspot SAR	37
13. Equipment List	40
Appendix A. System Validation Plots	41
Appendix B. SAR Test Plots	53
Appendix C. Probe Calibration And Dipole Calibration Report	63



1.General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

1.1 EUT Description									
Equipment	WCDN	WCDMA/GSM MOBILE PHONE							
Brand Name	VORTE	VORTEX							
Model No.	MATRI	MATRIX							
Series Model	N/A	N/A							
FCC ID	2AIVG-	2AIVG-MATRIX							
Model Difference	N/A								
Adapter	Output	AC100-240V,200mA, : DC 5V, 700mA	50/60 Hz						
Battery	Charge	Voltage: 3.7V; e Limit: 4.2V; ty: 1300mAh							
Device Category	Portabl	е							
Product stage	Produc	tion unit							
RF Exposure Environment	Genera	l Population / Uncontr	rolled						
IMEI	111111	111111119							
Hardware Version	5110D	W_MMI_V00							
Software Version	LEAGO	OO_OS_1.1_Lite							
Frequency Range	GSM 850:824.2~848.8MHz PCS1900:1850.2~1909.8MHz WCDMA Band II:1852.4~1907.6MHz WCDMA Band V:826.4~846.6MHz WLAN 802.11b/g/n(HT20/40):2412~2462MHz Bluetooth:2402~ 2480MHz								
	Band	Mode	Head (W/kg)	Body Worn and Hotspot(W/kg)					
	PCE	GSM 850	0.428	0.347					
Max. Reported	PCE	GSM 1900	0.500	0.239					
SAR(1g):	PCE	WCDMA Band II	0.651	0.103					
	PCE DTS	WCDMA Band V WIFI	0.410	0.159 0.106					
	DSS	Bluetooth ^{Note}	0.203 0.033	0.106					
1-g Sum SAR	000	Diactootii	0.854	0.453					
FCC Equipment Class	Part 15	ed Portable Transmit Spread Spectrum T Transmission Systen	ter Held to Ear (PCE) ransmitter (DSS)						
Operating Mode:	GSM: GSM Voice; GPRS; EGPRS Class 12; WCDMA:RMC,HSDPA,HSUPA Release 6; WLAN: 802.11 b/g/n(HT20/40); Bluetooth: V3.0 + EDR (GFSK +π/4DQPSK+8DPSK); Bluetooth: V4.0								
Antenna Specification:	GSM,V BT,WIF	GSM,WCDMA: PIFA Antenna BT,WIFI: PIFA Antenna							
SIM Card		rt dual-SIM, dual star es cannot transmittin	ndby, the multiple SIM on a state of the same time	ard with					
Hotspot Mode:	Suppor	rt							
DTM Mode:	Not Su	pport							





Note:

- 1. Bluetooth SAR was estimated
- 2. The dual SIM card mobile has 2 SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active)
- 3. After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 card to perform all tests.
- 4. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power





1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

1.3 Test Factory

Shenzhen STS Test Services Co., Ltd.

Add.: 1/F, Building B, Zhuoke Science Park, No. 190, Chongqing Road, Fuyong,

Baoan District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649; FCC Registration No.: 842334; IC Registration No.: 12108A-1







2.Test Standards And Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
9	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
10	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

4.0

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

1.6

0.08

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE GENERAL POPULATION/UNCONTROLLED EXPOSURE PARTIAL BODY LIMIT 1.6 W/kg



3. SAR Measurement System

3.1 Definition Of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

 $\boldsymbol{\rho}$ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

SATIMO SAR System Diagram:

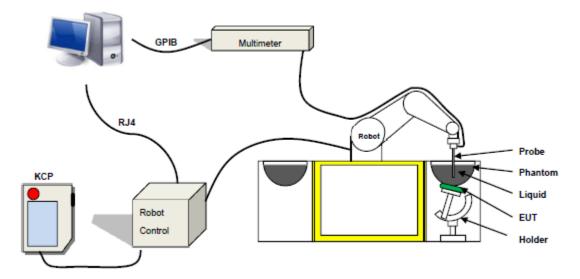

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue



The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 45/15 EPGO281 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter: 2.5 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Distance between dipoles / probe extremity: 2.7 mm

(repeatability better than +/- 1mm)

- Probe linearity: 0±2.60%(±0.11 dB)
- Axial Isotropy: < 0.25 dB
- Spherical Isotropy: < 0.25 dB
- Calibration range: 450MHz to 6GHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1 - MVG COMOSAR Dosimetric E field Dipole



3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



Figure-SN 32/14 SAM115



Figure-SN 32/14 SAM116

3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of \pm 0.5 mm would produce a SAR uncertainty of \pm 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Frequency	Bactericide	DGBE	HEC	NaCl	Sucrose	1,2-Propan ediol	X100	Water	Conductivity	Permittivity
(MHz)	%	%	%	%	%	%	%	%	σ	εr
750	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
835	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
900	/	/	/	0.79		64.81	/	34.40	0.97	41.8
1800	/	13.84	/	0.35	1	1	30.45	55.36	1.38	41.0
1900	/	13.84	1	0.35	/	1	30.45	55.36	1.38	41.0
2000	/	7.99	1	0.16	/	/	19.97	71.88	1.55	41.1
2450	/	7.99	/	0.16	/	/	19.97	71.88	1.88	40.3
2600	1	7.99	/	0.16	1	/	19.97	71.88	1.88	40.3

Tissue dielectric parameters for head and body phantoms							
Frequency	ε		σ S/m				
	Head	Body	Head	Body			
300	45.3	58.2	0.87	0.92			
450	43.5	58.7	0.87	0.94			
900	41.5	55.0	0.97	1.05			
1450	40.5	54.0	1.20	1.30			
1800	40.0	53.3	1.40	1.52			
2450	39.2	52.7	1.80	1.95			
3000	38.5	52.0	2.40	2.73			
5800	35.3	48.2	5.27	6.00			



LIQUID MEASUREMENT RESULTS

Date: 04 July 2016 Ambient condition: Temperature 22.7°C Relative humidity: 49%

Head Simulating Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
025 MH=	835 MHz 22.30	Permitivity:	41.50	40.89	-1.47	±5
033 IVITZ		Conductivity:	0.90	0.92	2.22	± 5
4000 MH-	22.20	Permitivity:	40.00	40.97	2.43	± 5
1900 MHZ	1900 MHz 22.30	Conductivity:	1.40	1.38	-1.43	± 5
2450 MHz 22.30	22.20	Permitivity:	39.20	39.17	-0.08	± 5
	22.30	Conductivity:	1.80	1.83	1.67	± 5

Body Simulating Liquid		Danasatana	T1	Manager	Davida Cara (0/1	Limited[%]
Frequency	Temp. [°C]	Parameters Target		Measured	Deviation[%]	
925 MH-	35 MHz 22.30	Permitivity:	55.20	55.31	0.20	± 5
OSS IVITZ		Conductivity:	0.97	0.94	-3.09	± 5
1900 MHz	22.30	Permitivity:	53.30	53.2	-0.19	± 5
1900 MITZ	22.30	Conductivity:	1.52	1.57	3.29	± 5
2450 MHz 22.30	22.20	Permitivity:	52.70	53.38	1.29	± 5
	22.30	Conductivity:	1.95	1.9	-2.56	± 5






5. SAR System Validation

5.1 Validation System

Each SATIMO system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

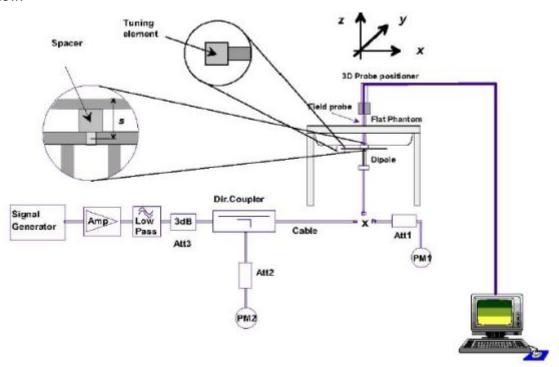

5.2 Validation Result

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

Ambient condition: Temperature 22.7°C Relative humidity: 49%

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg)	Target(W/Kg)	Tolerance(%)	Date
835 Head	100	0.966	9.66	9.56	-0.62	2016-07-04
835 Body	100	0.936	9.36	9.56	-0.21	2016-07-04
1900 Head	100	4.025	40.25	39.7	0.32	2016-07-04
1900 Body	100	3.901	39.01	39.7	-0.54	2016-07-04
2450 Head	100	5.317	53.17	52.4	0.17	2016-07-04
2450 Body	100	5.206	9.66	52.4	-0.25	2016-07-04

Note: The tolerance limit of System validation ±10%.





6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

Area Scan& Zoom Scan:


First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR -distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.



7. EUT Antenna Location Sketch

It is a WCDMA/GSM MOBILE PHONE, support GSM/WCDMA mode.

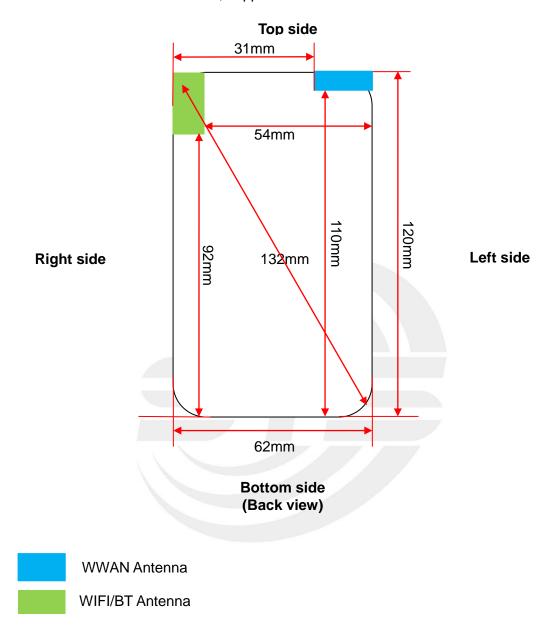



7.1 SAR test exclusion consider table

According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz ~ 6GHz and≤50mm>table, this device SAR test configurations consider as following:

D	Test position configurations								
Band	Front	Back	Right edge	Left edge	Top edge	Bottom edge			
WWAN	<5mm	<5mm	31mm	<5mm	<5mm	110mm			
VVVVAIN	Yes	Yes	No	Yes	Yes	No			
WIFI/BT	<5mm	<5mm	<5mm	54mm	<5mm	92mm			
WIFI/DI	Yes	Yes	Yes	No	Yes	No			

Note:

- 1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
- 2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- 3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <5mm, 5mm is user to determine SAR exclusion threshold
- 4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance ≤50mm are determined by: [(max.power of channel, including tune-up tolerance, Mw)/(min. test separation distance, mm)]*[√f(GHZ))≤3.0 for 1-g SAR and≤7.5 for10-g extremity SAR ,f(GHz) is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison For <50mm distance, we just calculate mW of the exclusion threshold value(3.0)to do compare</p>
- 5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following a)[threshold at 50mm in step 1]+(test separation distance -50mm)*(f (MHz)/150)]Mw, at 100 MHz to 1500 MHz
 b) [threshold at 50mm in step1]+(test separation distance -50mm) *10]mW at> 1500MHz and≤6GHz
- 6. Per KDB 447498 D02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is<0.25db higher than RMC 12.2Kbps,or reported SAR with RMC 12.2kbps setting is ≤1.2W/Kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
- 7. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8.for each frequency band ,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.




8. EUT Test Position

This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.

8.1 Define Two Imaginary Lines On The Handset

- (1)The vertical centerline passes through two points on the front side of the handset the midpoint of the width wt of the handset at the level of the acoustic output, and the midpoint of the width wb of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

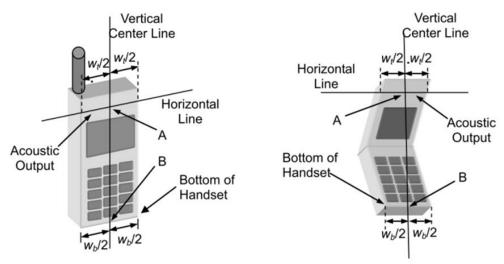

Cheek Position

- 1)To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- 2)To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost



Title Position

- (1)To position the device in the "cheek" position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.




Page 18 of 63

Report No.: STS1606137H01








Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported* SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest *reported* SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.






8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm form that surface or edge.

When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration(surface).



1/F., Building B., Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Baoʻan District, Shenzhen, Guangdong, China Tel: 0755-36886288 Fax: 0755-36886277 Http://www.stsapp.com E-mail: sts@stsapp.com





9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

NO	Source	Tol(%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	1gUi	10gUi	Veff
Meas	urement System□								
1	Probe calibration	5.8	N	1	1	1	5.8	5.8	80
2	Axial isotropy	3.5	R	√3	(1-cp) ^{1/2}	(1-cp) ^{1/2}	1.43	1.43	80
3	Hemispherical isotropy	5.9	R	√3	√Cp	√Cp	2.41	2.41	∞
4	Boundary effect	1.0	R	√3	1	1	0.58	0.58	∞
5	Linearity	4.7	R	√3	1	1	2.71	2.71	∞
6	System Detection limits	1.0	R	√3	1	1	0.58	0.58	∞
7	Readout electronics	0.5	N	1	1	1	0.50	0.50	∞
8	Response time	0	R	√3	1	1	0	0	∞
9	Integration time	1.4	R	√3	1	1	0.81	0.81	∞
10	Ambient noise	3.0	R	√3	1	1	1.73	1.73	∞
11	Ambient reflections	3.0	R	√3	1	1	1.73	1.73	∞
12	Probe positioner mech. restrictions	1.4	R	√3	1	1	0.81	0.81	∞
13	Probe positioning with respect to phantom shell	1.4	R	√3	1	1	0.81	0.81	∞
14	Max.SAR evaluation	1.0	R	√3	1	1	0.6	0.6	8
Test s	ample related								
15	Device positioning	2.6	N	1	1	1	2.6	2.6	11

Shenzhen STS Test Services Co., Ltd.



1				Page 20 of 63 Repo			rt No.: STS1606137H01		
		T	Т	T	Т	1		Т	T
16	Device holder	3	N	1	1	1	3.0	3.0	7
17	Drift of output power	5.0	R	√3	1	1	2.89	2.89	8
Phant	Phantom and set-up								
18	Phantom uncertainty	4.0	R	√3	1	1	2.31	2.31	8
19	Liquid conductivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	5
20	Liquid conductivity (meas)	4	N	1	0.23	0.26	0.92	1.04	5
21	Liquid Permittivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	80
22	Liquid Permittivity (meas)	5.0	N	1	0.23	0.26	1.15	1.30	8
Comb	Combined standard RSS $U_C = \sqrt{\sum_{i=1}^{n} C_i^2 U_i^2}$						10.63%	10.54%	
Expanded uncertainty $U = k \ U_{C} \ , \mbox{k=2}$							21.26%	21.08%	



9.2 System validation Uncertainty

NO	Source	Tol(%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	1gUi	10gUi	Veff
Meas	Measurement System □								
1	Probe calibration	5.8	Ν	1	1	1	5.8	5.8	∞
2	Axial isotropy	3.5	R	√3	(1-cp) ^{1/2}	(1-cp) ^{1/2}	1.43	1.43	∞
3	Hemispherical isotropy	5.9	R	√3	√Cp	√Cp	2.41	2.41	∞
4	Boundary effect	1.0	R	√3	1	1	0.58	0.58	∞
5	Linearity	4.7	R	√3	1	1	2.71	2.71	8
6	System Detection limits	1.0	R	√3	1	1	0.58	0.58	80
7	Modulation response	0	N	1	1	1	0	0	8
8	Readout electronics	0.5	N	1	1	1	0.50	0.50	∞
9	Response time	0	R	√3	1	1	0	0	80
10	Integration time	1.4	R	√3	1	1	0.81	0.81	∞
11	Ambient noise	3.0	R	√3	1	1	1.73	1.73	∞
12	Ambient reflections	3.0	R	√3	1	1	1.73	1.73	∞
13	Probe positioner mech. restrictions	1.4	R	√3	1	1	0.81	0.81	∞
14	Probe positioning with respect to phantom shell	1.4	R	√3	1	1	0.81	0.81	∞
15	Max.SAR evaluation	1.0	R	√3	1	1	0.6	0.6	&
Dipole	•								
16	Deviation of experimental source from	4	N	1	1	1	4.00	4.00	∞



			Page 22 of 63 Repo			ort No.: STS1606137H01			
17	Input power and SAR drit measurement	5	R	√3	1	1	2.89	2.89	80
18	Dipole Axis to liquid Distance	2	R	√3	1	1			8
Phant	Phantom and set-up								
19	Phantom uncertainty	4.0	R	√3	1	1	2.31	2.31	8
20	Uncertainty in SAR correction for deviation(in	2.0	N	1	1	0.84	2	1.68	8
21	Liquid conductivity (target)	2	N	1	1	0.84	2.00	1.68	8
22	Liquid conductivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	5
23	Liquid conductivity (meas)	4	N	1	0.23	0.26	0.92	1.04	5
24	Liquid Permittivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	8
25	Liquid Permittivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	5
26	Liquid Permittivity (meas)	5.0	N	1	0.23	0.26	1.15	1.30	8
Comb	ined standard		RSS	U	$C_C = \sqrt{\sum_{i=1}^n C_i^2 U}$	2 i	10.15%	10.05%	
Expar (P=95	nded uncertainty						20.29%	20.10%	



10. Conducted Power Measurement

10.1 Test Result

Burst Average Power (dBm)							
Band		GSM 850		PCS 1900			
Channel	128	190	251	512	661	810	
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8	
GSM(GMSK, 1-Slot)	32.62	32.79	32.83	27.42	27.50	27.60	
GPRS (GMSK, 1-Slot)	32.51	32.69	32.74	27.36	27.41	27.52	
GPRS (GMSK, 2-Slot)	32.07	32.22	32.28	26.91	26.98	27.10	
GPRS (GMSK, 3-Slot)	30.69	30.91	30.97	25.58	25.62	25.72	
GPRS (GMSK, 4-Slot)	30.23	30.49	30.51	25.15	25.17	25.30	
EGPRS(8PSK, 1-Slot)	32.58	32.58	32.47	27.25	27.32	27.43	
EGPRS(8PSK, 2-Slot)	32.12	32.17	32.00	26.80	26.85	26.95	
EGPRS(8PSK, 3-Slot)	30.75	30.81	30.68	25.47	25.48	25.59	
EGPRS(8PSK, 4-Slot)	29.99	30.05	29.93	24.74	24.70	24.79	

Remark: GPRS, CS4 coding scheme. EGPRS, MCS9 coding scheme. Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link

	Fram- Average Power(dBm)							
Band		GSM 850			PCS 1900			
Channel	128	190	251	512	661	810		
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8		
GSM(GMSK, 1-Slot)	23.59	23.76	23.80	18.39	18.47	18.57		
GPRS (GMSK, 1-Slot)	23.48	23.66	23.71	18.33	18.38	18.49		
GPRS (GMSK, 2-Slot)	26.05	26.20	26.26	20.89	20.96	21.08		
GPRS (GMSK, 3-Slot)	26.43	26.65	26.71	21.32	21.36	21.46		
GPRS (GMSK, 4-Slot)	27.22	27.48	27.50	22.14	22.16	22.29		
EGPRS(8PSK, 1-Slot)	23.55	23.55	23.44	18.22	18.29	18.40		
EGPRS(8PSK, 2-Slot)	26.10	26.15	25.98	20.78	20.83	20.93		
EGPRS(8PSK, 3-Slot)	26.49	26.55	26.42	21.21	21.22	21.33		
EGPRS(8PSK, 4-Slot)	26.98	27.04	26.92	21.73	21.69	21.78		

Remark

- 1. SAR testing was performed on the maximum frame-averaged power mode.
- 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum

burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = Burst averaged power (1 Tx Slot) – 9.03 dB

Frame-averaged power = Burst averaged power (2 Tx Slots) - 6.02 dB

Frame-averaged power = Burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Burst averaged power (4 Tx Slots) – 3.01 dB



WCDMA

Band	WO	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538	
Frequency (MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6	
AMR 12.2Kbps	21.83	21.63	21.68	20.52	19.78	19.77	
RMC 12.2Kbps	21.88	21.67	21.72	20.57	19.83	19.82	
HSDPA Subtest-1	20.95	20.70	20.75	19.66	18.85	18.86	
HSDPA Subtest-2	20.00	19.89	19.89	18.67	17.95	17.98	
HSDPA Subtest-3	19.52	19.45	19.48	18.22	17.49	17.57	
HSDPA Subtest-4	18.99	18.92	18.89	17.61	16.97	16.90	
HSUPA Subtest-1	20.52	20.24	20.27	19.24	18.40	18.41	
HSUPA Subtest-2	19.57	19.41	19.39	18.40	17.55	17.48	
HSUPA Subtest-3	19.15	18.99	18.89	17.90	17.11	17.02	
HSUPA Subtest-4	18.54	18.45	18.25	17.36	16.44	16.51	
HSUPA Subtest-5	17.93	17.92	17.66	16.81	15.87	15.95	

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5	MAX(CM-1,0)

Note: CM=1 for β c/ β d=12/15, β hs/ β c=24/15.For all other combinations of DPDCH, DPCCH, HS-DPCCH,

E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



WIFI

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
	1	2412	11.74
802.11b	6	2437	11.69
	11	2462	11.47
	1	2412	9.85
802.11g	6	2437	9.75
	11	2462	9.65
	1	2412	9.45
802.11n(HT 20)	6	2437	9.52
	11	2462	9.33
	3	2422	8.14
802.11n(HT 40)	6	2437	8.20
	9	2452	8.11

Bluetooth

Mode	Mode Channel Number		Average Power (dBm)
	0	2402	-1.050
GFSK(1Mbps)	39	2441	-1.560
	78	2480	-2.050
	0	2402	-2.060
π/4-DQPSK(2Mbps)	39	2441	-2.550
	78	2480	-3.050
	0	2402	-2.050
8-DPSK(3Mbps)	39	2441	-2.550
	78	2480	-3.040

BT 4.0

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
	0	2402	-6.230
GFSK(1Mbps)	19	2440	-6.580
	39	2480	-7.630



10.2 Tune-up Power

Mode	GSM850(AVG)	GSM1900(AVG)		
GSM/PCS	32±1dBm	27±1dBm		
GPRS (1 Slot)	32±1dBm	27±1dBm		
GPRS (2 Slot)	32±1dBm	27±1dBm		
GPRS (3 Slot)	30±1dBm	25±1dBm		
GPRS (4 Slot)	30±1dBm	25±1dBm		
EDGE (1 Slot)	32±1dBm	27±1dBm		
EDGE (2 Slot)	32±1dBm	26±1dBm		
EDGE (3 Slot)	30±1dBm	25±1dBm		
EDGE (4 Slot)	29±1dBm	24±1dBm		

Mode	WCDMA Band	WCDMA Band			
	V(AVG)	II(AVG)			
AMR	21±1dBm	20±1dBm			
RMC	21±1dBm	20±1dBm			
HSDPA Subtest-1	20±1dBm	19±1dBm			
HSDPA Subtest-2	19±1dBm	18±1dBm			
HSDPA Subtest-3	19±1dBm	18±1dBm			
HSDPA Subtest-4	18±1dBm	17±1dBm			
HSUPA Subtest-1	20±1dBm	19±1dBm			
HSUPA Subtest-2	19±1dBm	18±1dBm			
HSUPA Subtest-3	19±1dBm	17±1dBm			
HSUPA Subtest-4	18±1dBm	17±1dBm			
HSUPA Subtest-5	17±1dBm	16±1dBm			

Mode	WIFI(AVG)
IEEE 802.11b	11±1dBm
IEEE 802.11g	9±1dBm
IEEE 802.11n(HT 20)	9±1dBm
IEEE 802.11n(HT 40)	8±1dBm

Mode	BT(AVG)
GFSK	-2±1dBm
π/4-DQPSK	-3±1dBm
8DPSK	-3±1dBm

Mode	BT 4.0(AVG)		
GFSK	-7±1dBm		



10.3 SAR Test Exclusions Applied

Per FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f(GHZ)}$] \leq 3.0 for 1-g SAR and \leq 7.5 for 10-g extremity SAR, where:

- f(GHZ) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

$$\frac{\textit{Max Power of Channel (mW)}}{\textit{Test Separation Dist (mm)}} * \sqrt{\textit{Frequency(GHz)}} \le 3.0$$

Based on the maximum conducted power of **Bluetooth Head** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth Head SAR was not required; $[(1.107/5)^* \sqrt{2.480}] = 0.24 < 3.0$.

Based on the maximum conducted power of **Bluetooth Body** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth Body SAR was not required; $[(1.107/10)^* \sqrt{2.480}] = 0.12 < 3.0$.

Based on the maximum conducted power of **2.4 GHz WIFI Head** (rounded to the nearest mW) and the antenna to user separation distance,

2.4 GHz WIFI Head SAR was required; $[(21.086/5)^* \sqrt{2.437}] = 4.64 > 3.0$.

Based on the maximum conducted power of **2.4 GHz WIFI Body** (rounded to the nearest mW) and the antenna to user separation distance,

2.4 GHz WIFI Body SAR was required; $[(21.086/10)^* \sqrt{2.437}] = 2.32 < 3.0.$






11. EUT And Test Setup Photo

11.1 EUT Photo



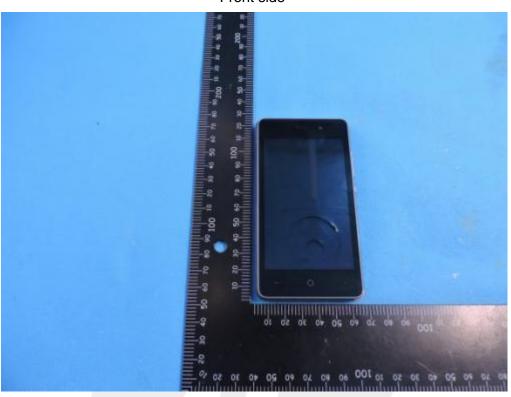


Back side








Top side

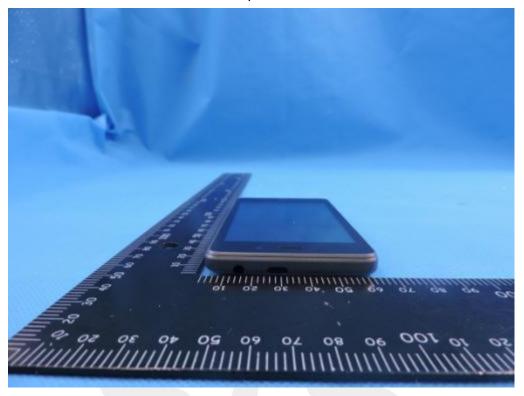


Bottom side

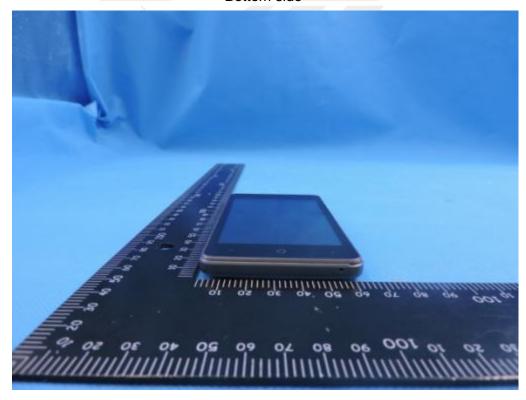








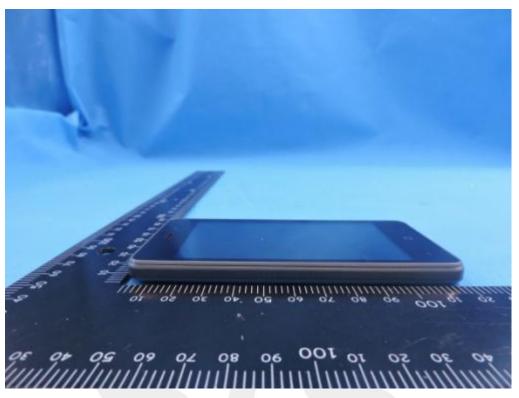


Right side

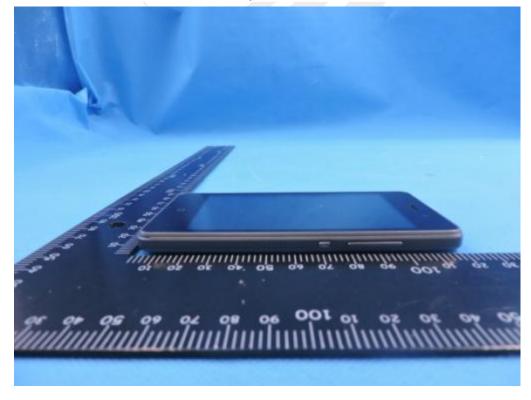




11.2 Setup Photo



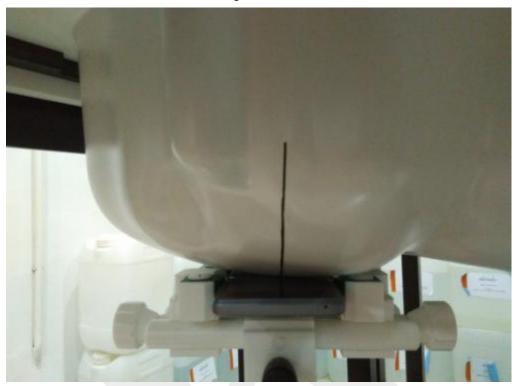


Right Tilt

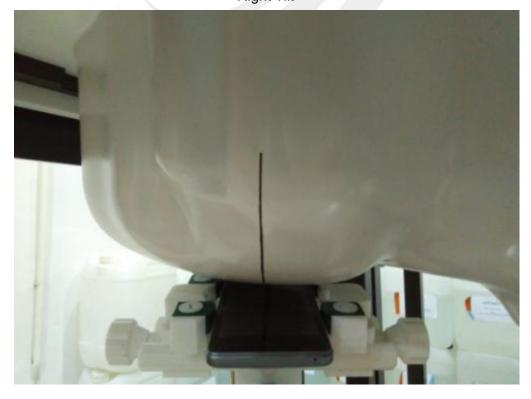



Left Touch

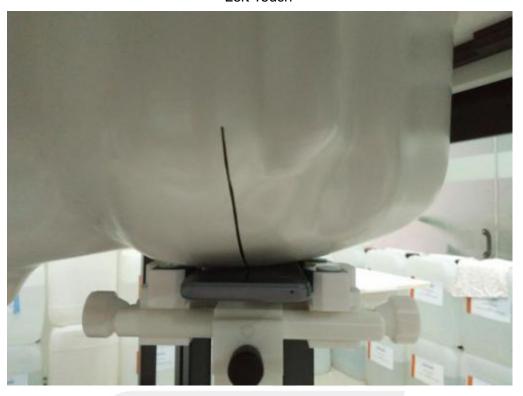

Left Tilt






Body Front side(separation distance is 10mm)



Body Back side(separation distance is 10mm)

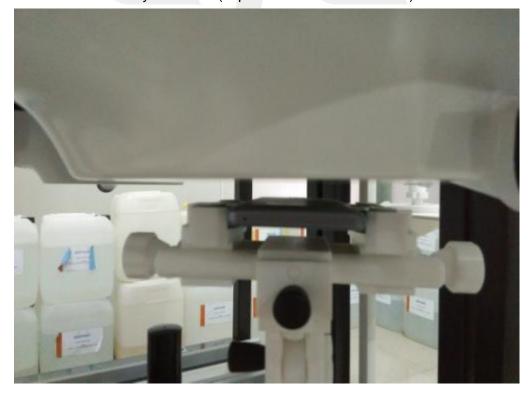




Body left side(separation distance is 10mm)



Body right side(separation distance is 10mm)

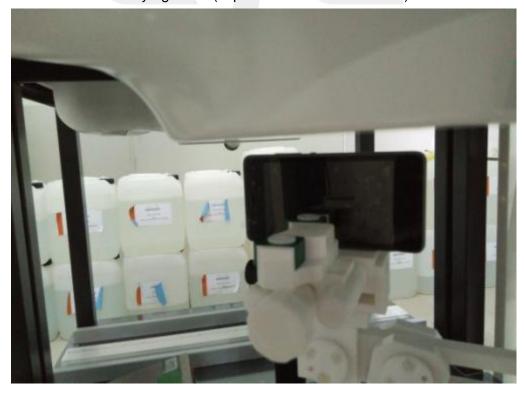




Body top side(separation distance is 10mm)



Liquid depth (15 cm)

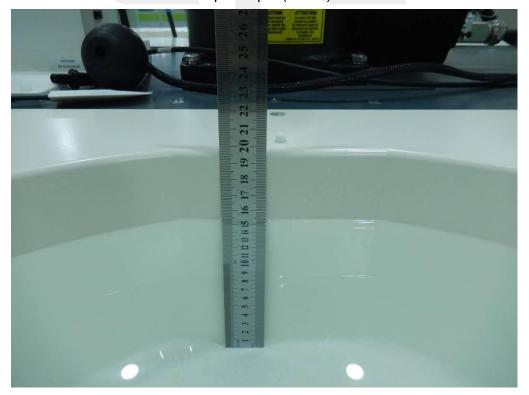





12. SAR Result Summary

12.1 Head SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
		Right Cheek	251	0.400	-3.77	33	32.83	0.416	/
		Right Tilt	251	0.412	-2.75	33	32.83	0.428	1
GSM 850	Voice	Left Cheek	251	0.260	-1.47	33	32.83	0.270	/
		Left Tilt	251	0.274	-3.22	33	32.83	0.285	/
		Right Cheek	810	0.416	3.29	28	27.60	0.456	/
GSM1900	Voice	Right Tilt	810	0.456	0.70	28	27.60	0.500	3
GSW1900		Left Cheek	810	0.280	3.42	28	27.60	0.307	/
		Left Tilt	810	0.236	0.93	28	27.60	0.259	/
	RMC	Right Cheek	9262	0.572	-3.57	21	20.57	0.632	/
WCDMA II		Right Tilt	9262	0.590	-1.44	21	20.57	0.651	5
WCDIVIA II		Left Cheek	9262	0.360	3.41	21	20.57	0.397	/
		Left Tilt	9262	0.358	-3.70	21	20.57	0.395	/
	RMC	Right Cheek	4132	0.399	-2.85	22	21.88	0.410	7
MCDMAN		Right Tilt	4132	0.349	-0.97	22	21.88	0.359	/
WCDMA V		Left Cheek	4132	0.251	3.65	22	21.88	0.258	/
		Left Tilt	4132	0.216	-0.66	22	21.88	0.222	/

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WIFI	DATA	Right Cheek	1	0.044	-2.33	12	11.74	100	0.047	/
		Right Tilt	1	0.041	2.73	12	11.74	100	0.044	/
		Left Cheek	1	0.191	2.69	12	11.74	100	0.203	9
		Left Tilt	1	0.175	-0.80	12	11.74	100	0.186	/

Note:

- 1.Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is \leq 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.131** W/Kg for Head)
- 2. Per KDB865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg





12.2 Body-worn and Hotspot SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
		Front side	190	0.241	3.53	31	30.51	0.270	/
CCM OFO	GPRS	Back side	190	0.310	-2.88	31	30.51	0.347	2
GSM 850	Data-4 Slot	Left side	190	0.181	1.09	31	30.51	0.203	/
		Top side	190	0.099	3.15	31	30.51	0.111	/
		Front side	810	0.185	-2.16	26	25.30	0.217	/
CCMACOO	GPRS	Back side	810	0.104	-2.45	26	25.30	0.122	/
GSM1900	Data-4 Slot	Left side	810	0.037	-3.42	26	25.30	0.043	/
		Top side	810	0.203	-2.67	26	25.30	0.239	4
		Front side	9400	0.023	3.66	21	20.57	0.025	/
WCDMA	RMC	Back side	9400	0.086	-2.19	21	20.57	0.095	/
II	RIVIC	Left side	9400	0.027	-0.66	21	20.57	0.030	/
		Top side	9400	0.096	-0.37	21	20.57	0.106	6
WCDMA V		Front side	4183	0.127	2.04	22	21.88	0.131	/
	RMC	Back side	4183	0.155	-3.57	22	21.88	0.159	8
	KIVIC	Left side	4183	0.091	-0.12	22	21.88	0.094	/
		Top side	4183	0.045	0.17	22	21.88	0.046	/

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
		Front side	6	0.027	-2.57	12	11.74	100	0.029	/
WIFI	802.11b	Back side	6	0.100	-2.49	12	11.74	100	0.106	10
VVIFI	602.110	Right side	6	0.072	-1.17	12	11.74	100	0.076	/
		Top side	6	0.013	1.24	12	11.74	100	0.014	/

Note:

- 1. The test separation of all above table is 10mm.
- 2. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.069** W/Kg for Body)
- 3. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous state
Head	1. GSM + WIFI
	2. GSM + Bluetooth
	3. WCDMA + WIFI
	4. WCDMA + Bluetooth
	1. GSM + WIFI
	2. GSM + Bluetooth
Body	3. WCDMA + WIFI
	4. WCDMA + Bluetooth

NOTE:

- 1. Bluetooth and WIFI can't simultaneous transmission at the same time.
- 2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
- 3. Based upon KDB 447498 D01 v05, BT SAR is excluded as below table.
- 4. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- 5. For minimum test separation distance \leq 50mm,Bluetooth standalone SAR is excluded according to [(max. power of channel, including tune-up tolerance, mW)/ (min. test separation distance, mm) · [\sqrt{f} (GHz) /x] \leq 3.0 for 1-g SAR and \leq 7.5 for 10-g extremity SAR
- 6. The reported SAR summation is calculated based on the same configuration and test position.
- 7. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - a) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[\sqrt{f} (GHz) /x] W/kg for test separation distances \leq 50 mm; Where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is >50mm.

Estimated SAR		Maximum Power		Antenna	Frequency(GHz)	Stand alone
		mW	to user(mm)		SAR(1g) [W/kg]	
DT	Head	4	0.704	5	2.402	0.033
ВТ	Body	-1	0.794	10	2.402	0.016



Page 39 of 63 Report No.: STS1606137H01

Simultaneous Mode	Position	Mode	Max. 1-g SAR (W/kg)	1-g Sum SAR (W/kg)	
	Head	GSM Voice	0.500	0.703	
GSM + WIFI	пеац	WIFI	0.203		
GSWI + WIFI	Body	GSM Data	0.347	0.453	
	Бойу	WIFI	0.106	0.455	
	Head	GSM Voice	0.500	0.522	
GSM + Bluetooth	пеаа	Bluetooth	0.033	0.533	
GSIVI + BIUE(OO(II)	Pody	GSM Data	0.347	0.363	
	Body	Bluetooth	0.016	0.303	
	Head	WCDMA RMC	0.651	0.854	
WCDMA + WIFI	пеац	WIFI	0.203	U.00 4	
WCDIVIA + WIFI	Dode	WCDMA RMC	0.159	2.005	
	Body	WIFI	0.106	0.265	
	Head	WCDMA RMC	0.651	0.694	
WCDMA + Bluetooth	пеаи	Bluetooth	0.033	0.684	
WCDIVIA + DIUE(00(I)			0.159	0.175	
)	Body	Bluetooth	0.016	0.175	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Kind of Equipment	Manufacturer	туре мо.	SN 30/14	Last Calibration	Calibrated Offili
835MHz Dipole	SATIMO	SID835	DIP0G835-332	2014.09.01	2017.08.31
1900MHz Dipole	SATIMO	SID1900	SN 30/14 DIP1G900-333	2014.09.01	2017.08.31
2450MHzDipole	SATIMO	SID2450	SN 30/14 DIP2G450-335	2014.09.01	2017.08.31
E-Field Probe	MVG	SSE2	SN 45/15 EPGO281	2015.10.12	2016.10.11
Antenna	SATIMO	ANTA3	SN 07/13 ZNTA52	2014.09.01	2017.08.31
Waveguide	SATIMO	SWG5500	SN 13/14 WGA32	2014.09.01	2017.08.31
Phantom1	SATIMO	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	SATIMO	SAM	SN 32/14 SAM116	N/A	N/A
SAR TEST BENCH	SATIMO	GSM and WCDMA mobile phone POSITIONNIN G SYSTEM	SN 32/14 MSH97	N/A	N/A
SAR TEST BENCH	SATIMO	LAPTOP POSITIONNIN G SYSTEM	SN 32/14 LSH29	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 32/14 OCPG52	2015.09.01	2016.08.31
Multi Meter	Keithley	Multi Meter 2000	4050073	2015.11.20	2016.11.19
Signal Generator	Agilent	N5182A	MY50140530	2015.11.18	2016.11.17
Power Meter	R&S	NRP	100510	2015.10.25	2016.10.24
Power Meter	HP	EPM-442A	GB37170267	2015.10.24	2016.10.23
Power Sensor	R&S	NRP-Z11	101919	2015.10.24	2016.10.23
Power Sensor	HP	8481A	2702A65976	2015.10.24	2016.10.23
Network Analyzer	Agilent	5071C	EMY46103472	2015.12.12	2016.12.11
Attenuator 1	PE	PE7005-10	N/A	2015.10.25	2016.10.24
Attenuator 2	PE	PE7005-3	N/A	2015.10.24	2016.10.23
Attenuator 3	Woken	WK0602-XX	N/A	2015.12.12	2016.12.11
Dual Directional Coupler	Agilent	778D	50422	2015.11.18	2016.11.17



Appendix A. System Validation Plots

System Performance Check Data (835MHz Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-07-04

Measurement duration: 13 minutes 27 seconds

Experimental conditions


Phantom	Validation plane		
Device Position	-		
Band	835MHz		
Channels	-		
Signal	CW		
Frequency (MHz)	835MHz		
Relative permittivity (real part)	40.89		
Relative permittivity	18.72		
Conductivity (S/m)	0.92		
Power drift (%)	1.33		
Ambient Temperature:	22.7°C		
Liquid Temperature:	22.3°C		
ConvF:	1.78		
Crest factor:	1:1		

Maximum location: X=1.00, Y=0.00

SAR Peak: 1.40 W/kg

SAR 10g (W/Kg)	0.654628
SAR 1g (W/Kg)	0.966254



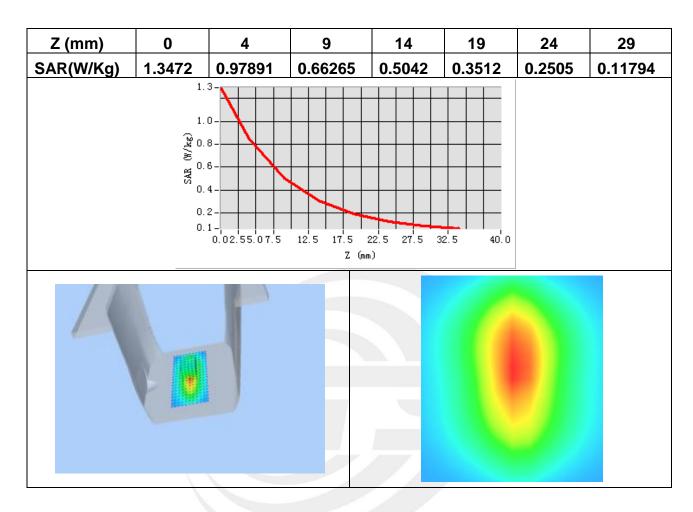



System Performance Check Data (835MHz Body)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-07-04

Measurement duration: 14 minutes 13 seconds

Experimental conditions.


Probe	
Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity (real part)	55.31
Relative permittivity	21.408187
Conductivity (S/m)	0.94
Power drift (%)	-0.78
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	1.85
Crest factor:	1:1

Maximum location: X=1.00, Y=0.00

SAR Peak: 1.45 W/kg

SAR 10g (W/Kg)	0.621563
SAR 1g (W/Kg)	0.936157



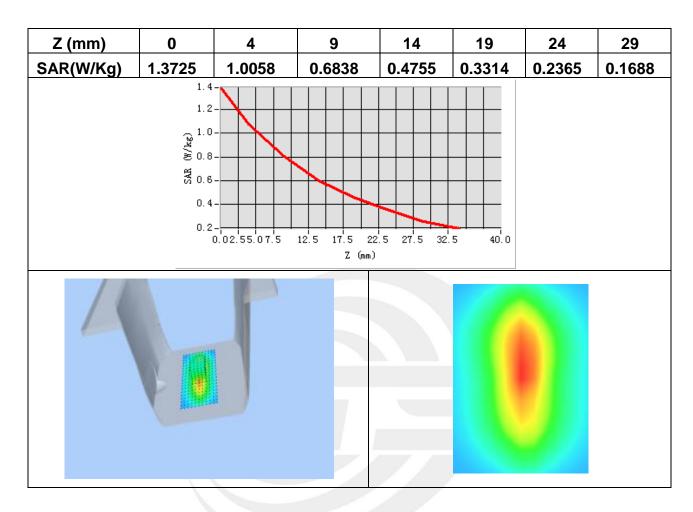



System Performance Check Data (1900MHz Head)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-07-04

Measurement duration: 14 minutes 12 seconds

Experimental conditions.

Phantom	Validation plane		
Device Position	-		
Band	1900MHz		
Channels	-		
Signal	CW		
Frequency (MHz)	1900MHz		
Relative permittivity (real part)	40.97		
Relative permittivity	13.26		
Conductivity (S/m)	0.38		
Power drift (%)	0.32		
Ambient Temperature:	22.7°C		
Liquid Temperature:	22.3°C		
Probe	SN 45/15 EPGO281		
ConvF:	2.10		
Crest factor:	1:1		

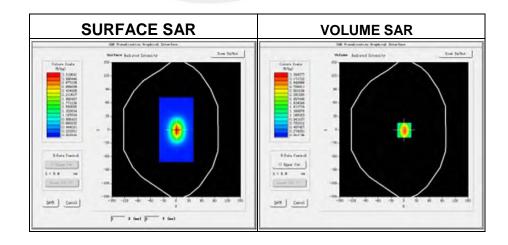






Report No.: STS1606137H01

Maximum location: X=1.00, Y=0.00

SAR Peak: 5.80 W/kg

SAR 10g (W/Kg)	2.125965
SAR 1g (W/Kg)	4.024756

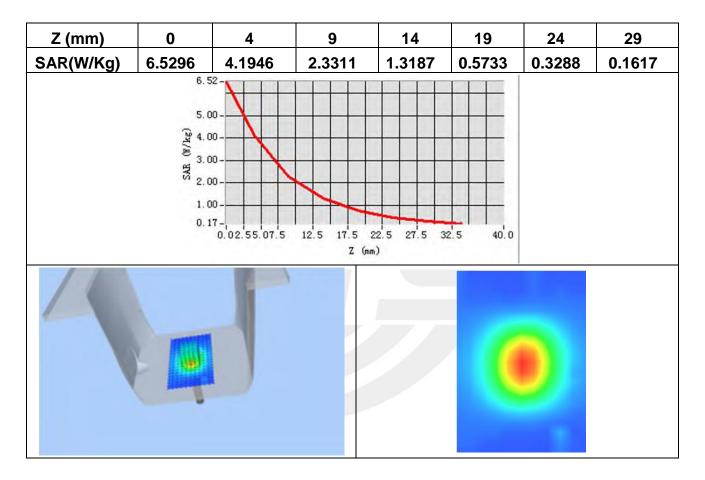



System Performance Check Data (1900MHz Body)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-07-04

Measurement duration: 14 minutes 46 seconds

Experimental conditions.

Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900
Relative permittivity (real part)	53.2
Relative permittivity	12.87531
Conductivity (S/m)	1.57
Power drift (%)	0.92
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
Probe	SN 45/15 EPGO281
ConvF:	2.16
Crest factor:	1:1

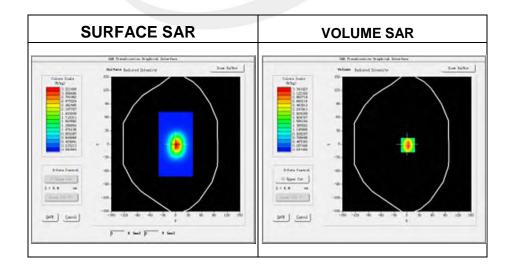






Report No.: STS1606137H01

Maximum location: X=2.00, Y=2.00

SAR Peak: 5.30 W/kg

SAR 10g (W/Kg)	2.326456
SAR 1g (W/Kg)	3.901254

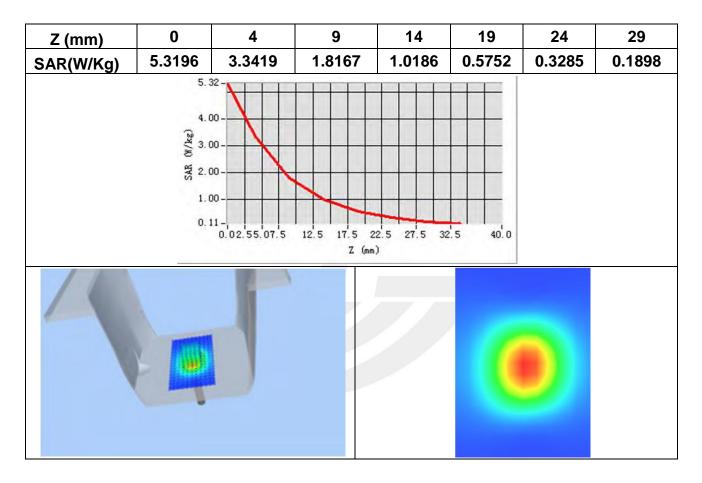



System Performance Check Data (2450MHz Head)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm


Date of measurement: 2016-07-04

Measurement duration: 13 minutes 51 seconds

Experimental conditions.

Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity (real part)	39.17
Relative permittivity	12.930000
Conductivity (S/m)	1.83
Power drift (%)	-1.08
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 45/15 EPGO281
ConvF	2.21
Crest factor:	1:1










Report No.: STS1606137H01

Maximum location: X=7.00, Y=6.00

SAR 10g (W/Kg)	2.515496
SAR 1g (W/Kg)	5.317246

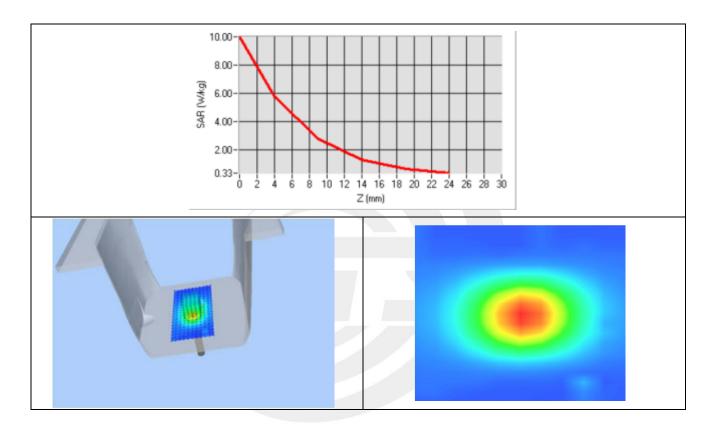



System Performance Check Data (2450MHz Body)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-07-04

Measurement duration: 14 minutes 23 seconds

Experimental conditions.

Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity (real part)	53.38
Relative permittivity	12.930000
Conductivity (S/m)	1.9
Power drift (%)	-0.54
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 45/15 EPGO281
ConvF	2.28
Crest factor:	1:1

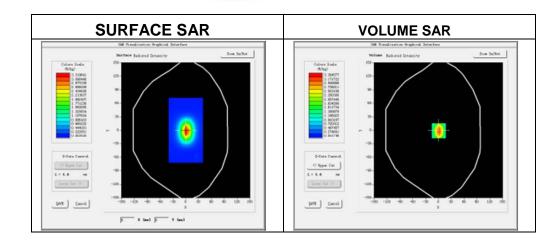








Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	2.344656
SAR 1g (W/Kg)	5.206254

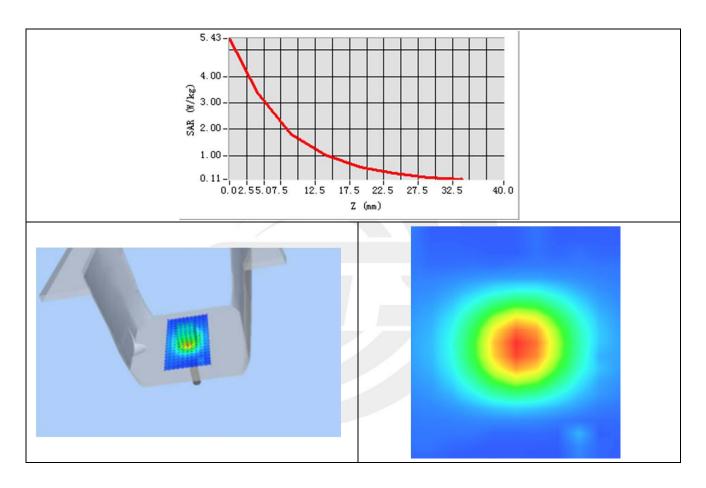





Appendix B. SAR Test Plots


Plot 1: DUT: WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

Test Data	2016-07-04
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	High
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	848.8
Relative permittivity (real part)	41.5
Conductivity (S/m)	0.90
Variation (%)	-2.75

Maximum location: X=-3.00, Y=6.00

SAR Peak: 0.72 W/kg

SAR 10g (W/Kg)	0.212029
SAR 1g (W/Kg)	0.411639

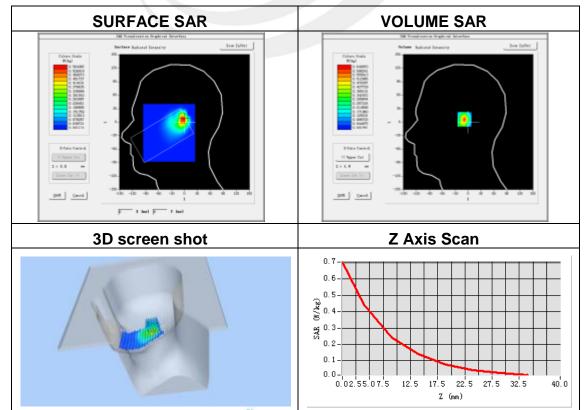

1/F., Building B, Zhuoke Science Park, No. 190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, Chin Tel: 0755-36886288 Fax: 0755-36886277 Http://www.stsapp.com E-mail: sts@stsapp.com




Plot 2: DUT: WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

Test Data	2016-07-04
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	GPRS 850
Channels	High
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	848.8
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	-2.88

Maximum location: X=-6.00, Y=32.00 SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.216614
SAR 1g (W/Kg)	0.309747

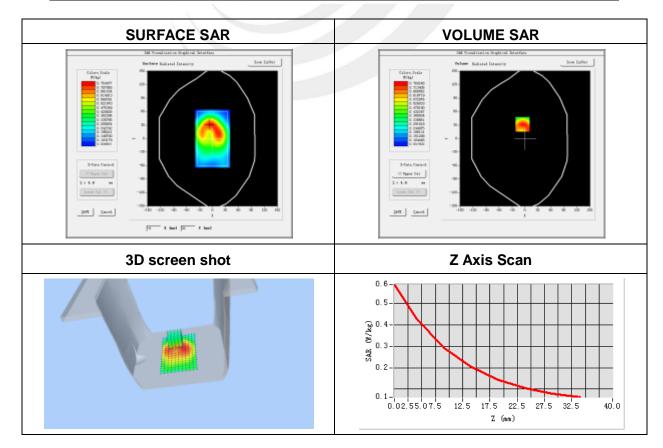




Plot 3: DUT: WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

Test Data	2016-07-04
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomCoon	5x5x7,dx=8mm dy=8mm dz=5mm,
ZoomScan	Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 4.0)
Frequency (MHz)	1909.8
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	0.70

Maximum location: X=-1.00, Y=8.00

SAR Peak: 0.84 W/kg

SAR 10g (W/Kg)	0.208495
SAR 1g (W/Kg)	0.456470

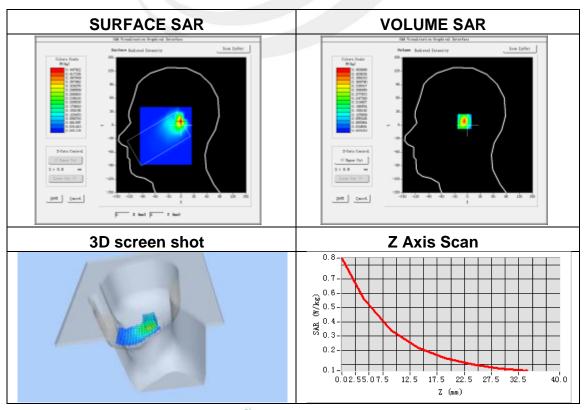






Plot 4: DUT: WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

	•
Test Data	2016-07-04
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Top side
Band	GPRS 1900
Channels	High
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1909.8
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-2.67

Maximum location: X=8.00, Y=-16.00 SAR Peak: 0.37 W/kg

	<u> </u>
SAR 10g (W/Kg)	0.093801
SAR 1g (W/Kg)	0.203431

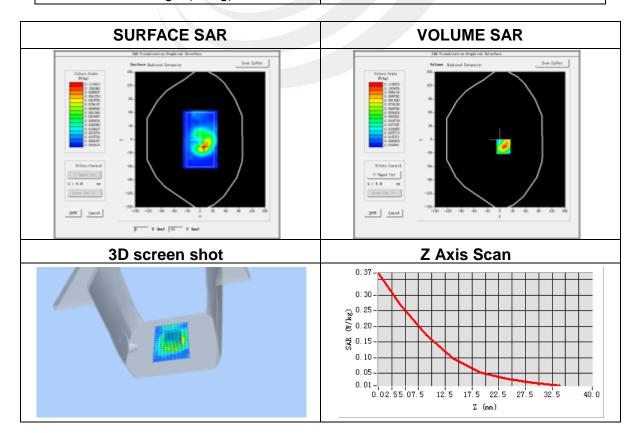




Plot 5: DUT: WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

2016-07-04
22.70
22.30
SN 45/15 EPGO281
2.10
dx=8mm dy=8mm, h= 5.00 mm
5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Right head
Tilt
WCDMA II
Low
WCDMA (Crest factor: 1.0)
1852.4
40.00
1.40
-1.44

Maximum location: X=-2.00, Y=8.00 SAR Peak: 1.04 W/kg

SAR 10g (W/Kg)	0.268016
SAR 1g (W/Kg)	0.590272

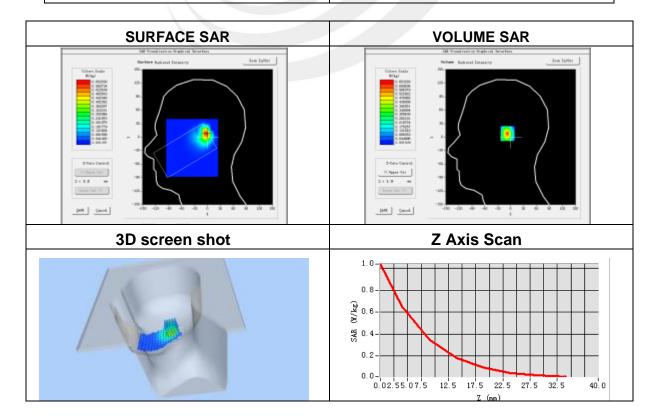




Plot 6: DUT: WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

	•
Test Data	2016-07-04
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,
Zoomscan	Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Top side
Band	WCDMA II
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1852.4
Relative permittivity (real part)	39.71
Conductivity (S/m)	1.40
Variation (%)	-0.37

Maximum location: X=15.00, Y=-8.00 SAR Peak: 0.30 W/kg

	<u> </u>
SAR 10g (W/Kg)	0.031925
SAR 1g (W/Kg)	0.096301

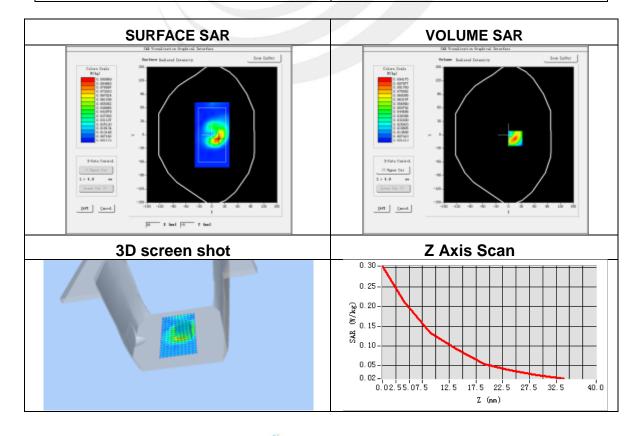




Plot 7: DUT: WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

Test Data	2016-07-04
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	-2.85

Maximum location: X=-23.00, Y=8.00 SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.254609
SAR 1g (W/Kg)	0.398818

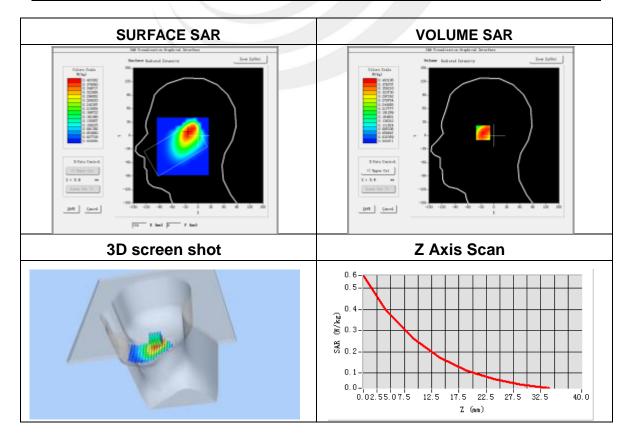

1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-36886288 Fax: 0755-36886277 Http://www.stsapp.com E-mail: sts@stsapp.com




Plot 8: DUT: WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

Test Data	2016-07-04
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,
Zoomscan	Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	-3.57

Maximum location: X=-8.00, Y=25.00 SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.106220
SAR 1g (W/Kg)	0.155071

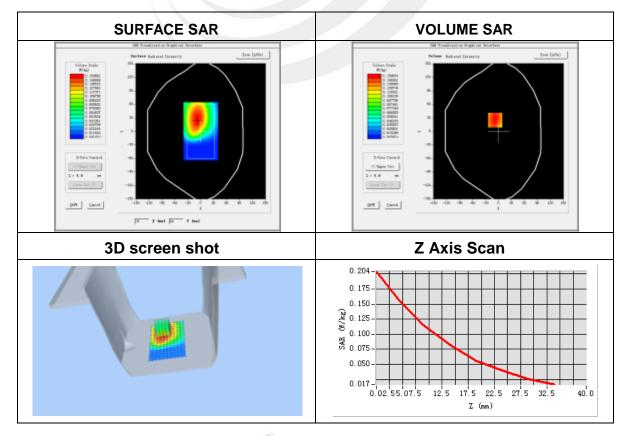

1/F., Building B, Zhuoke Science Park, No.190,Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong,China Tel: 0755-36886288 Fax: 0755-36886277 Http://www.stsapp.com E-mail: sts@stsapp.com




Plot 9: DUT:WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

Test Data	2016-07-04
Probe	SN 45/15 EPGO281
ConvF	2.21
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	Low
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79
Variation (%)	2.69

Maximum location: X=-14.00, Y=29.00 SAR Peak: 0.40 W/kg

/	
SAR 10g (W/Kg)	0.074107
0 (0/	
SAR 1g (W/Kg)	0.190826

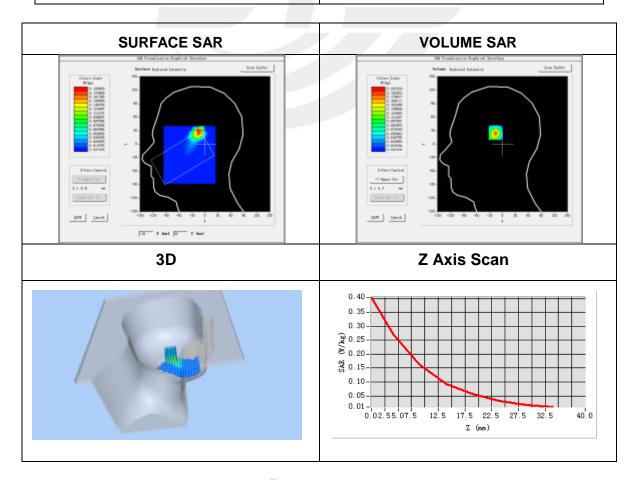




Plot 10: DUT: WCDMA/GSM MOBILE PHONE; EUT Model: MATRIX

	1
Test Data	2016-07-04
Probe	SN 45/15 EPGO281
ConvF	2.28
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	IEEE 802.11b ISM
Channels	Low
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	52.40
Conductivity (S/m)	1.94
Variation (%)	-2.49

Maximum location: X=16.00, Y=-13.00 SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.041770
SAR 1g (W/Kg)	0.099870

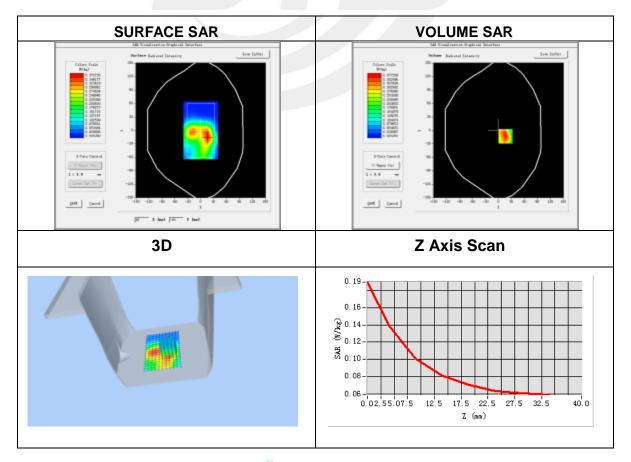







Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.



1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-36886288 Fax: 0755-36886277 Http://www.stsapp.com E-mail: sts@stsapp.com