



element

---

Report on the Radio Testing

For

Extronics LTD

on

iTAG X30

Report no. TRA-064113-47-00B

20th June 2025

RF915 14



Report Number: TRA-064113-47-00B  
Issue: B

REPORT ON THE RADIO TESTING OF AN  
Extronics LTD  
iTAG X30  
WITH RESPECT TO SPECIFICATION  
FCC 47CFR 15.247

TEST DATE: 30/07/2024 to 06/08/2024

Tested by:

Written by:



p.p. Michael Else  
Radio Test Engineer

Approved by:

Date: 20th June 2025

John Charters  
Laboratory Manager

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF915 14



## 1 Revision Record

<b><i>Issue Number</i></b>	<b><i>Issue Date</i></b>	<b><i>Revision History</i></b>
A	09 September 2024	Original
B	20th June 2025	Updated FCCID, Table Headings, Photo labels

## 2 Summary

TEST REPORT NUMBER: TRA-064113-47-00B

WORKS ORDER NUMBER: TRA-064113-00

PURPOSE OF TEST: Testing of radio frequency equipment per the relevant authorisation requirements of chapter of CFR (code of federal regulations) Part 2, subpart J & ISED Canada RSS-Gen

TEST SPECIFICATION: 47CFR15.247

EQUIPMENT UNDER TEST (EUT): iTAG X30

FCC IDENTIFIER: 2AIZEEXTRFID00004

EUT SERIAL NUMBER: PCB16, PCB17 & PCB18

MANUFACTURER/AGENT: Extronics LTD

ADDRESS: Extronics Ltd, 1 Dalton Way, Midpoint 18, Midpoint 18, Middlewich, Chesire, CW10 0HU, United Kingdom

CLIENT CONTACT: Julian Poyner  
☎ +441606 539 636  
✉ Julian.Poyner@extronics.com

ORDER NUMBER: PO0029556

TEST DATE: 30/07/2024 to 06/08/2024

TESTED BY: Michael Else  
Element

## 2.1 Test Summary

<b>Test Method and Description</b>	<b>Requirement Clause FCC 47 CFR</b>	<b>Applicable to this equipment</b>	<b>Result / Note</b>
Radiated spurious emissions (restricted bands of operation and cabinet radiation)	15.205	<input checked="" type="checkbox"/>	Pass
AC power line conducted emissions	15.207	<input type="checkbox"/>	Note 1
6 dB bandwidth	15.247 (a) (2)	<input checked="" type="checkbox"/>	Pass
Occupied bandwidth (99% bandwidth)	N/A	<input checked="" type="checkbox"/>	Pass
Conducted output power	Peak	<input checked="" type="checkbox"/>	Pass
	Maximum	<input checked="" type="checkbox"/>	
Undesirable / unwanted emissions	15.247 (d)	<input checked="" type="checkbox"/>	Pass
Power spectral density	15.247 (e)	<input checked="" type="checkbox"/>	Pass
Pulsed operation correction	15.35 (c)	<input type="checkbox"/>	N/A

### Specific Note:

1. The EUT has a rechargeable battery, but as per client's declaration, it doesn't transmit while charging.

### General Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

### General notes

The decision rule for compliance is not inherent within this specification and compliance is based on the customer requesting a simple acceptance rule based on understanding and acceptance of Elements Measurement Uncertainty values.

### 3 Contents

1	Revision Record.....	3
2	Summary.....	4
2.1	Test Summary.....	5
3	Contents.....	6
4	Introduction .....	7
5	Test Specifications .....	8
5.1	Normative References .....	8
5.2	Deviations from Test Standards .....	8
6	Glossary of Terms.....	9
7	Equipment under Test.....	10
7.1	EUT Identification.....	10
7.2	System Equipment.....	10
7.3	EUT Mode of Operation .....	10
7.4	EUT Radio Parameters .....	10
7.4.1	General .....	10
7.4.2	Antennas.....	11
7.5	EUT Description .....	11
8	Modifications .....	12
9	EUT Test Setup .....	13
9.1	Block Diagram.....	13
9.2	General Set-up Photograph .....	14
9.3	Measurement software.....	15
10	General Technical Parameters.....	16
10.1	Normal Conditions.....	16
10.2	Varying Test Conditions .....	16
11	Radiated emissions.....	17
11.1	Definitions .....	17
11.2	Test Parameters.....	17
11.3	Test Limit.....	17
11.4	Test Method .....	18
11.5	Test Equipment.....	19
11.6	Test Results .....	20
12	Occupied Bandwidth .....	24
12.1	Definition .....	24
12.2	Test Parameters.....	24
12.3	Test Limit.....	24
12.4	Test Method .....	25
12.5	Test Equipment.....	25
12.6	Test Results .....	26
13	Maximum peak conducted output power.....	28
13.1	Definition .....	28
13.2	Test Parameters.....	28
13.3	Test Limit.....	28
13.4	Test Method .....	29
13.5	Test Equipment.....	29
13.6	Test Results .....	30
14	Out-of-band and conducted spurious emissions .....	32
14.1	Definition .....	32
14.2	Test Parameters.....	32
14.3	Test Limit.....	32
14.4	Test Method .....	33
14.5	Test Equipment.....	33
14.6	Test Results .....	34
15	Power spectral density .....	36
15.1	Definition .....	36
15.2	Test Parameters.....	36
15.3	Test Limit.....	36
15.4	Test Method .....	37
15.5	Test Equipment.....	37
15.6	Test Results .....	38
16	Measurement Uncertainty .....	40
17	RF Exposure .....	43
18	Appendix A – Declaration of similarity .....	44

## 4 Introduction

This report TRA-064113-47-00B presents the results of the Radio testing on a Extronics LTD, iTAG X30 to specification FCC Title 47 CFR 15 Radio Frequency Devices.

The testing was carried out for Extronics LTD by Element, at the address detailed below.

<input checked="" type="checkbox"/> Element Skelmersdale	<input type="checkbox"/> Element Surrey Hills
Unit 1	Unit 15 B
Pendle Place	Henley Business Park
Skelmersdale	Pirbright Road
West Lancashire	Normandy
WN8 9PN	Guildford
UK	GU3 2DX
	UK

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are ISO/IEC 17025:2017 accredited calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

### FCC Site Listing:

The test laboratory is accredited for the above sites under the US-UK MRA,

### Designation number(s):

Element Surrey Hills	UK2027
Element Skelmersdale	UK2020

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

## 5 Test Specifications

### 5.1 *Normative References*

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

### 5.2 *Deviations from Test Standards*

There were no deviations from the test standard.

## 6 Glossary of Terms

<b>§</b>	denotes a section reference from the standard, not this document
<b>AC</b>	Alternating Current
<b>ANSI</b>	American National Standards Institute
<b>BW</b>	bandwidth
<b>C</b>	Celsius
<b>CFR</b>	Code of Federal Regulations
<b>CW</b>	Continuous Wave
<b>dB</b>	decibel
<b>dBm</b>	dB relative to 1 milliwatt
<b>DC</b>	Direct Current
<b>DSSS</b>	Direct Sequence Spread Spectrum
<b>EIRP</b>	Equivalent Isotropically Radiated Power
<b>ERP</b>	Effective Radiated Power
<b>EUT</b>	Equipment under Test
<b>FCC</b>	Federal Communications Commission
<b>FHSS</b>	Frequency Hopping Spread Spectrum
<b>Hz</b>	hertz
<b>IC</b>	Industry Canada
<b>ITU</b>	International Telecommunication Union
<b>LBT</b>	Listen before Talk
<b>m</b>	metre
<b>max</b>	maximum
<b>MIMO</b>	Multiple Input and Multiple Output
<b>min</b>	minimum
<b>MRA</b>	Mutual Recognition Agreement
<b>N/A</b>	Not Applicable
<b>PCB</b>	Printed Circuit Board
<b>PDF</b>	Portable Document Format
<b>Pt-mpt</b>	Point-to-multipoint
<b>Pt-pt</b>	Point-to-point
<b>RF</b>	Radio Frequency
<b>RH</b>	Relative Humidity
<b>RMS</b>	Root Mean Square
<b>Rx</b>	receiver
<b>s</b>	second
<b>SVSWR</b>	Site Voltage Standing Wave Ratio
<b>Tx</b>	transmitter
<b>UKAS</b>	United Kingdom Accreditation Service
<b>V</b>	volt
<b>W</b>	watt
<b>Ω</b>	ohm

## 7 Equipment under Test

### 7.1 EUT Identification

- Name: iTAG X30
- Serial Number: PCB16, PCB17 & PCB18
- Model Number: X30
- Software Revision: Not Applicable
- Build Level / Revision Number: Not Applicable

### 7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

*Not Applicable – No support/monitoring equipment required.*

### 7.3 EUT Mode of Operation

The EUT was set to transmit a modulated signal on the required Frequency.

### 7.4 EUT Radio Parameters

#### 7.4.1 General

<b>Frequency of operation:</b>	2402 MHz to 2480 MHz
<b>Modulation type(s):</b>	GFSK
<b>Occupied channel bandwidth(s):</b>	739.3 kHz / 794.2 kHz / 789.2 kHz
<b>Channel spacing:</b>	2 MHz
<b>Nominal Supply Voltage:</b>	3.7 V Lithium Ion Re-chargeable battery
<b>Duty cycle:</b>	100%

#### 7.4.2 Antennas

<b>Type:</b>	F Type PCB Antenna
<b>Frequency range:</b>	2400 MHz to 2480 MHz
<b>Gain:</b>	1.7 dBi
<b>Mounting:</b>	PCB

#### 7.5 EUT Description

The EUT is a personnel location tag.


## **8 Modifications**

No modifications were performed during this assessment.

## 9 EUT Test Setup

### 9.1 *Block Diagram*

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:




## 9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:



30 MHz to 1 GHz

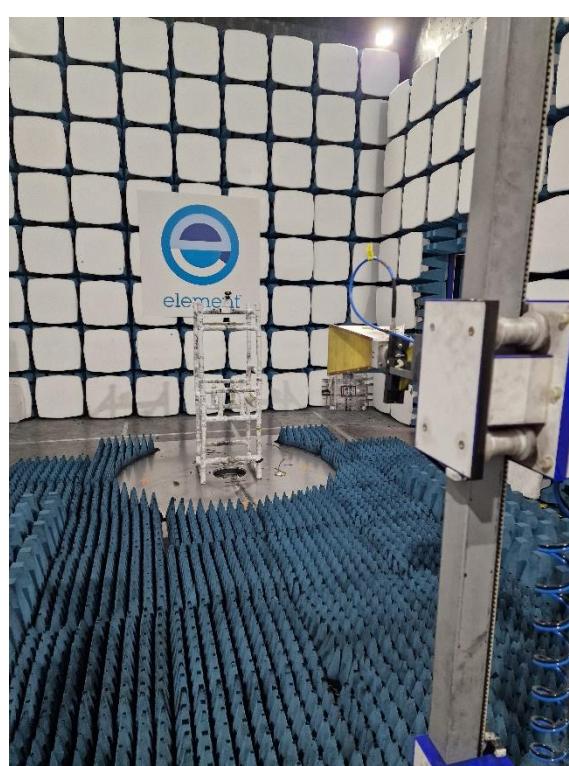

1 GHz to 26.5 GHz

### **9.3 *Measurement software***

Where applicable, the following software was used to perform measurements contained within this report.

Element Emissions R5

## 10 General Technical Parameters

### 10.1 Normal Conditions

The EUT was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 3.7 VDC from Lithium batteries.

### 10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band.

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	<i>Category</i>	<i>Nominal</i>	<i>Variation</i>
<input type="checkbox"/>	Mains	110 VAC +/-2 %	85 % and 115 %
<input checked="" type="checkbox"/>	Battery	New battery	N/A

## 11 Radiated emissions

### 11.1 Definitions

#### *Spurious emissions*

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

#### *Restricted bands*

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

### 11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Chamber REF940
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Frequencies Measured:	2402 MHz / 2440 MHz / 2480 MHz
Deviations from Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz; Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak; Above 1 GHz: RMS average and Peak

### Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 59 % RH	20 % RH to 75 % RH (as declared)

### 11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

#### General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

Frequency (MHz)	Field Strength ( /m at 3 m)	Field Strength (dB /m at 3 m)
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

On frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function. On frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit.

#### 11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB $\mu$ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB $\mu$ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

**Figure i Test Setup**

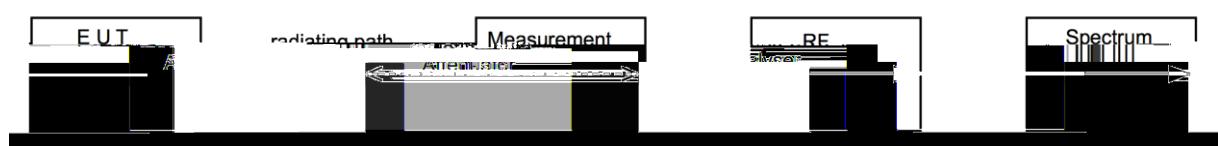


### 11.5 Test Equipment


Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Emissions R5	Element	Radiated Test Software	REF9000	Cal Not Required
ATS	Rainford EMC	Radio Chamber - PP	REF940	2026-01-29
ESR7	R&S	EMI Receiver	U456	2025-03-08
CBL611/B	Chase	Bilog	U573	2024-10-14
6201-69	Watkins Johnson	PreAmp	U372	2025-03-15
FSU50	R&S	Spectrum Analyser	U544	2024-11-28
3115	EMCO	1-18GHz Horn	U223	2026-01-17
8449B	Agilent	Pre Amp	L572	2024-10-30
SN 4478	BSC	2.4G Band Stop Filter	U543	2025-02-15
AFH-07000	Atlantic Microwave	High Pass Filter	U558	2025-02-15
PAM-840A	Com-Power	Pre-Amp (18 - 40 GHz)	REF2390	2024-10-02
LB-180400-25-C-KF	A Info Inc	Horn Antenna	REF2246	2024-09-23

## 11.6 Test Results


Frequency: 2402 MHz; Power Setting: +8 dBm;

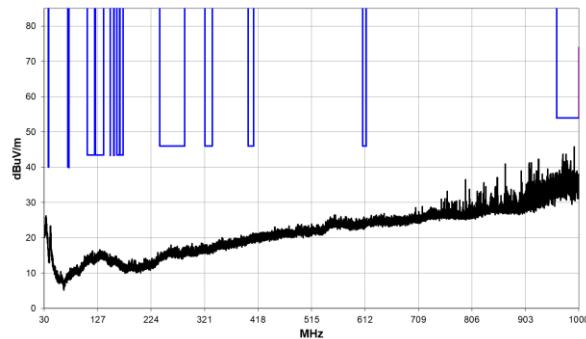


30 MHz to 1 GHz

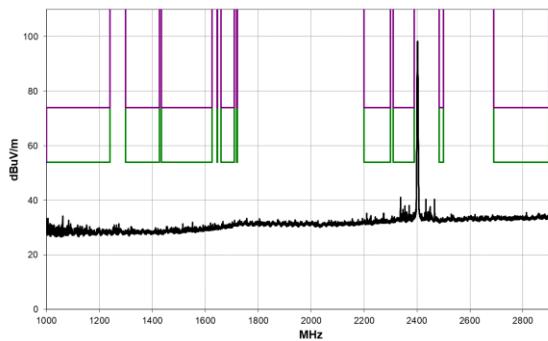


1 GHz to 3 GHz

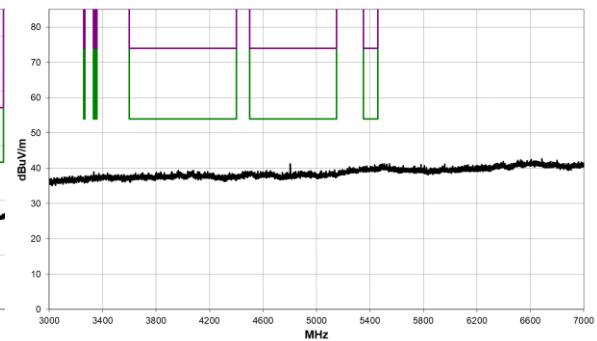

3 GHz to 7 GHz

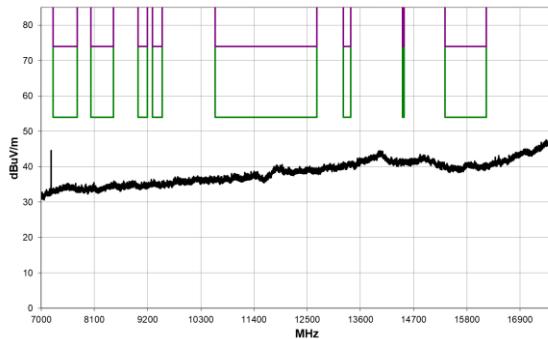


7 GHz to 18 GHz

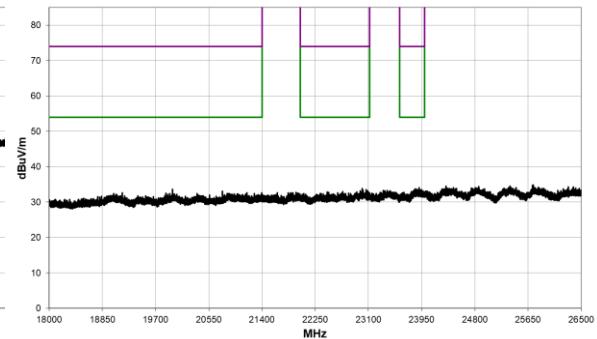


18 GHz to 26.5 GHz


Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2370.158	59.3	-4.1	1.76	344.1	3.0	0.0	Horz	PK	0.0	55.2	74.0	-18.8
2369.958	36.7	-4.1	1.76	344.1	3.0	0.0	Horz	AV	0.0	32.6	54.0	-21.4
4801.642	53.2	3.1	2.05	324.0	3.0	0.0	Horz	PK	0.0	56.3	74.0	-17.7
4804.458	49.7	3.1	2.0	58.1	3.0	0.0	Vert	PK	0.0	52.8	74.0	-21.2

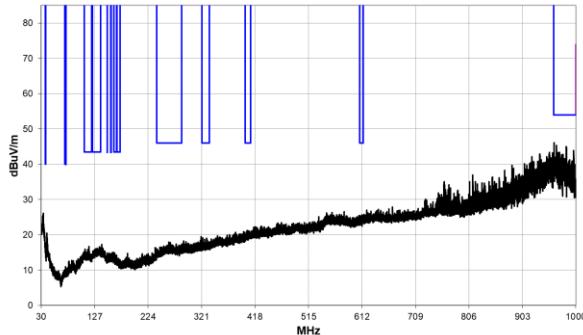**Frequency: 2440 MHz; Power Setting: +8 dBm;**


30 MHz to 1 GHz

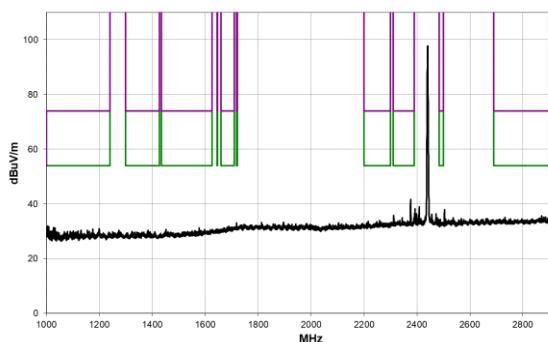


1 GHz to 3 GHz

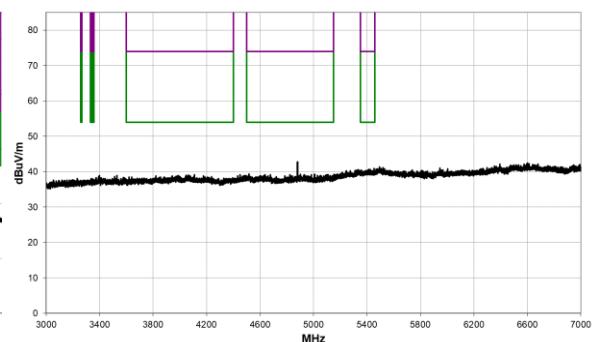

3 GHz to 7 GHz

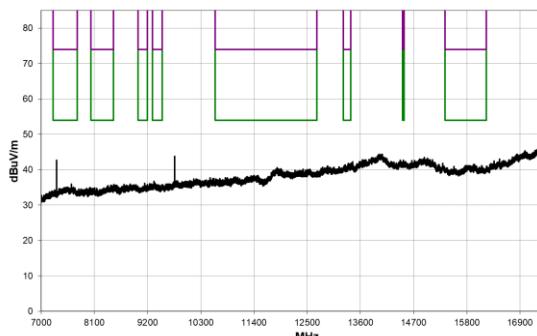


7 GHz to 18 GHz

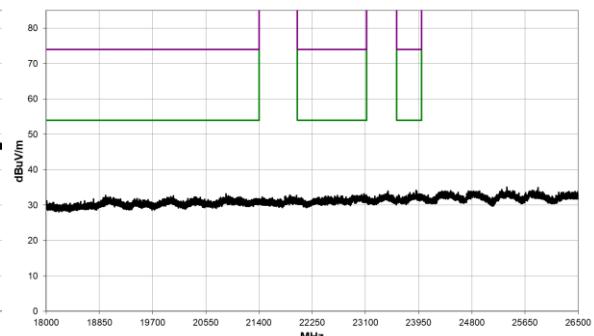


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	External Attenuation (dB)	Polarity/Transducer Type	Detect or	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
No Significant emissions within 20 dB of the limit.									

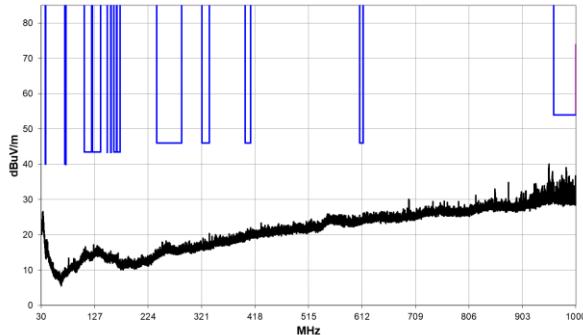
**Frequency: 2480 MHz; Power Setting: +8 dBm;**

30 MHz to 1 GHz

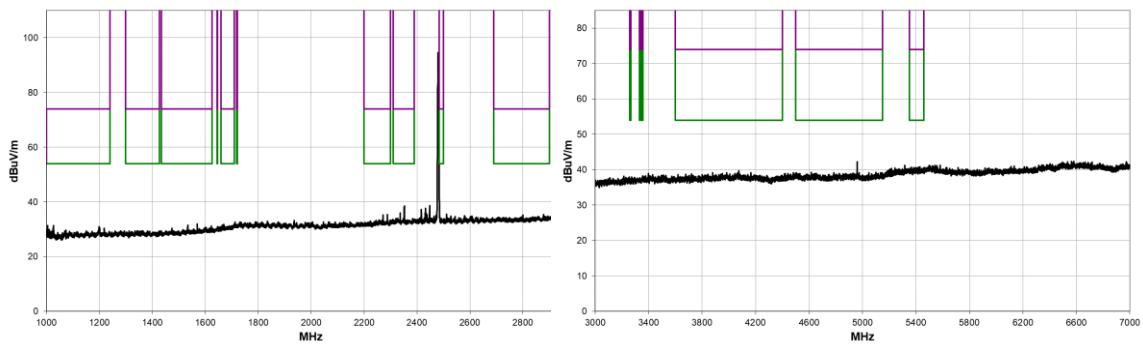

1 GHz to 3 GHz

3 GHz to 7 GHz

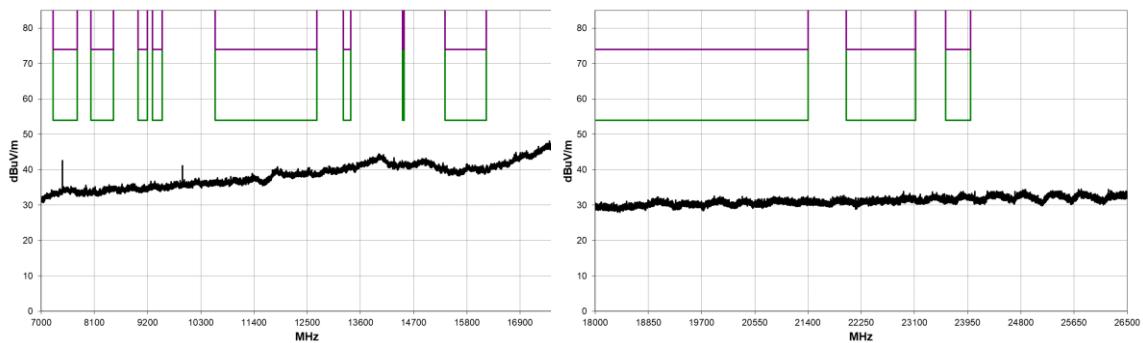


7 GHz to 18 GHz


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	External Attenuation (dB)	Polarity/Transducer Type	Detect or	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compare d to Spec. (dB)
No Significant emissions within 20 dB of the limit.									

## Lower Radiated Band Edge

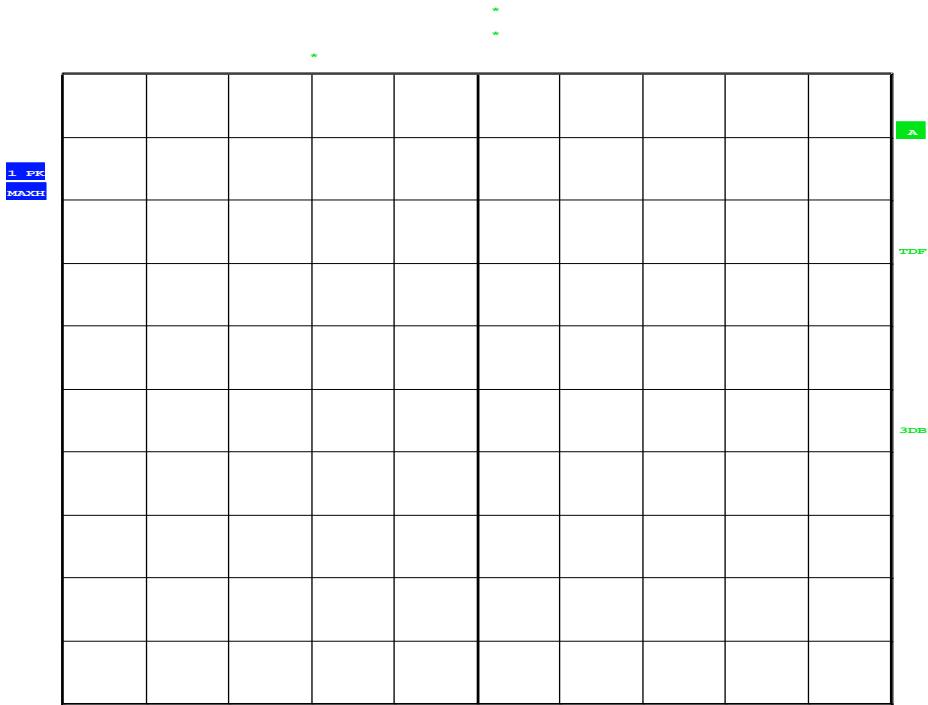

## Upper Radiated Band Edge

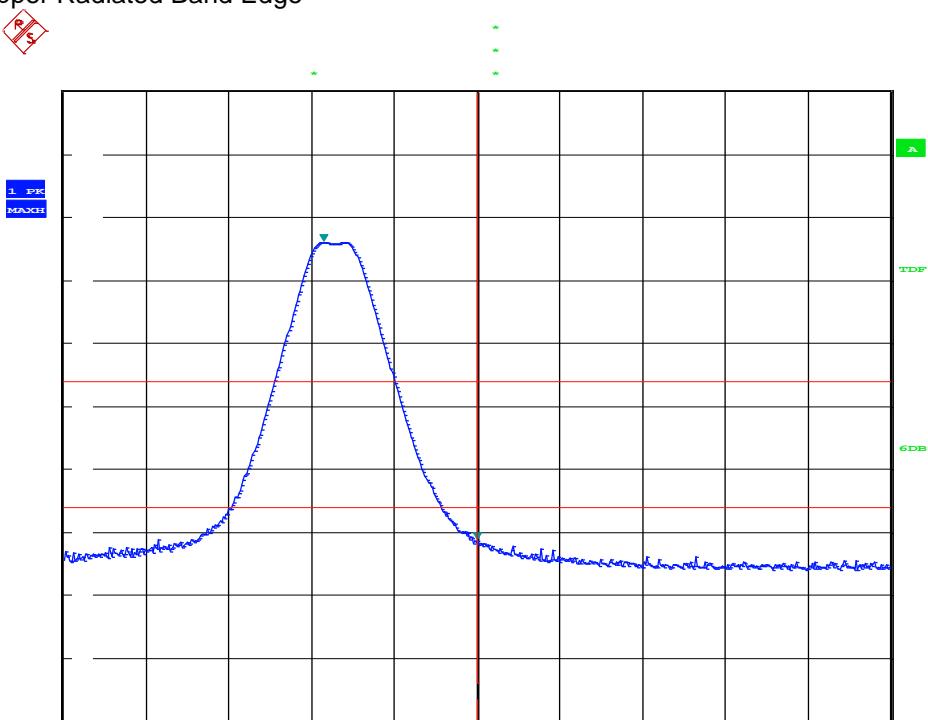

## 12 Occupied Bandwidth

### 12.1 Definition

The emission bandwidth ( $x$  dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated  $x$  dB below the maximum in-band spectral density of the modulated signal.

The 99% emission bandwidth is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

### 12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	REF940
Test Standard and Clause:	6 dB Bandwidth: ANSI C63.10-2013, Clause 11.8
EUT Channels / Frequencies Measured:	2402 MHz / 2440 MHz / 2480 MHz
EUT Channel Bandwidths:	2 MHz
EUT Test Modulations:	GFSK
Deviations From Standard:	None
Measurement BW:	IC: 50 kHz FCC: 100 kHz
(IC requirement: 1% to 5% OBW; FCC requirement: 100 kHz)	
Spectrum Analyzer Video BW:	300 kHz
(requirement at least 3x RBW)	
Measurement Span:	5 MHz
(requirement 2 to 5 times OBW)	
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 56 % RH	20 % RH to 75 % RH (as declared)

### 12.3 Test Limit


The minimum -6 dB bandwidth shall be at least 500 kHz.

## 12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure iii Test Setup**

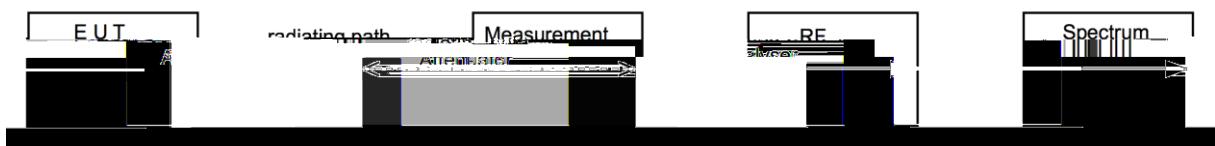

## 12.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSW 43	R&S	Spectrum Analyser	U728	2025-06-12


## 12.6 Test Results

<b>Bandwidth Type: 6 dB; Modulation: GFSK; Power setting: +8dB</b>				
<b>Frequency (MHz)</b>	<b><math>F_L</math> (MHz)</b>	<b><math>F_H</math> (MHz)</b>	<b>Bandwidth (kHz)</b>	<b>Result</b>
2402	2401.6803	2402.4196	739.3	PASS
2440	2439.6454	2440.4396	794.2	PASS
2480	2479.6404	2480.4296	789.2	PASS

### Bottom Channel, 2402 MHz




## Middle Channel, 2440 MHz

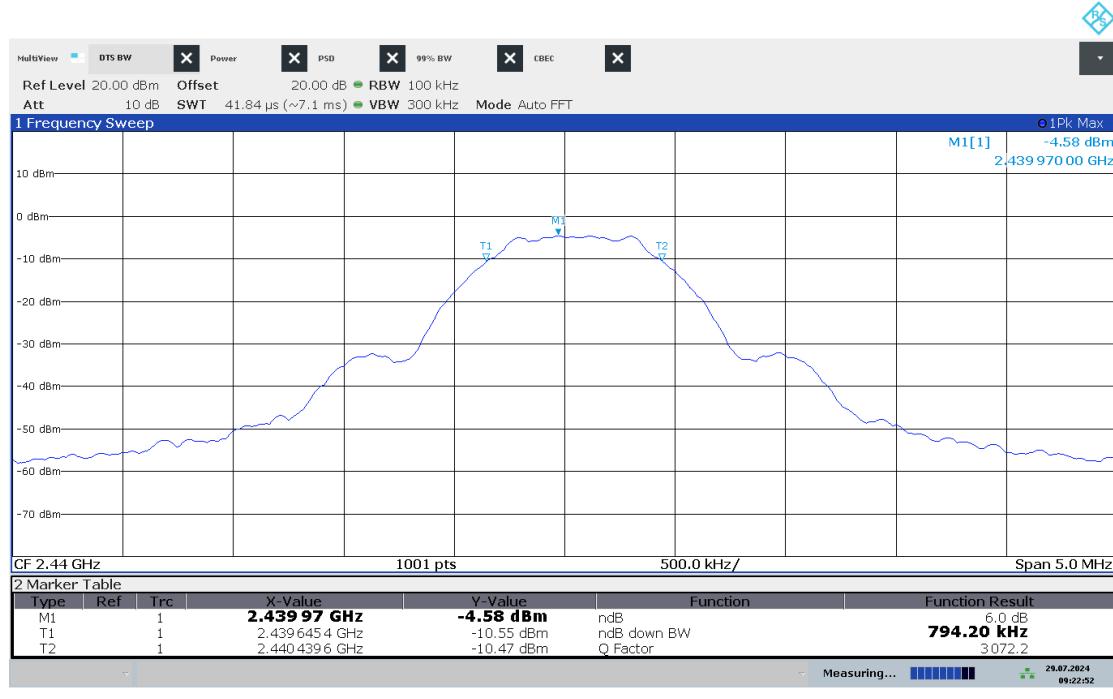

09:22:53 29.07.2024

## Top Channel, 2480 MHz

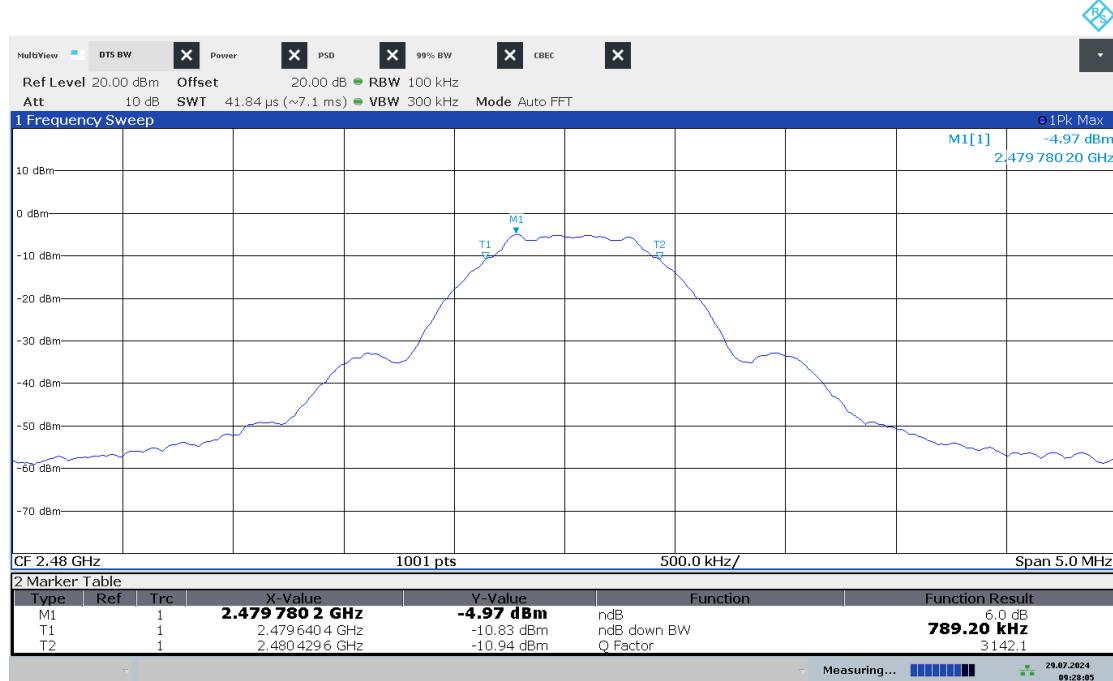

09:28:06 29.07.2024

## 13 Maximum peak conducted output power

### 13.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

### 13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	REF940
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.9.1
EUT Channels / Frequencies Measured:	2402 MHz / 2440 MHz / 2480 MHz
EUT Channel Bandwidths:	2 MHz
Deviations From Standard:	None
Measurement BW:	2 MHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 MHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	Mains Power = 85 % and 115 % of Nominal (FCC only requirement); Battery Power = new battery.

### Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 58 % RH	20 % RH to 75 % RH (as declared)

### 13.3 Test Limit

FCC:


For systems employing digital modulation techniques operating in the bands 902 to 928 MHz, 2400 to 2483.5 MHz and 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

### 13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure iv Test Setup**

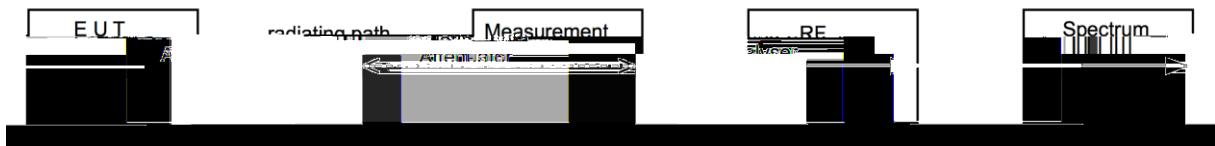

### 13.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Emissions R5	Element	Radiated Test Software	REF9000	Cal Not Required
ATS	Rainford EMC	Radio Chamber - PP	REF940	2026-01-29
FSU50	R&S	Spectrum Analyser	U544	2024-11-28
3115	EMCO	1-18GHz Horn	U223	2026-01-17
8449B	Agilent	Pre Amp	L572	2024-10-30

### 13.6 Test Results

FCC:

The following formula was used to convert field strength ( $E$ ) in volts/metre to conducted output power in watts:

$$\text{Conducted Output Power} = (E \times d)^2 / (30 \times G)$$

Where,


$E$  is the electric field strength in V/m

$d$  is the measurement distance in meters (m)


$G$  is the antenna numerical gain referenced to isotropic gain

Modulation: GFSK; Power setting: +8dBm					
Frequency (MHz)	Peak Field Strength (dB V/m)	Peak Field Strength (V/m)	Distance (m)	Maximum peak conducted output power (W)	Result
2402	99.57	0.095169985	3	0.00184	PASS
2440	98.74	0.086496792	3	0.00152	PASS
2480	96	0.063095734	3	0.00081	PASS


Bottom Channel, 2402 MHz

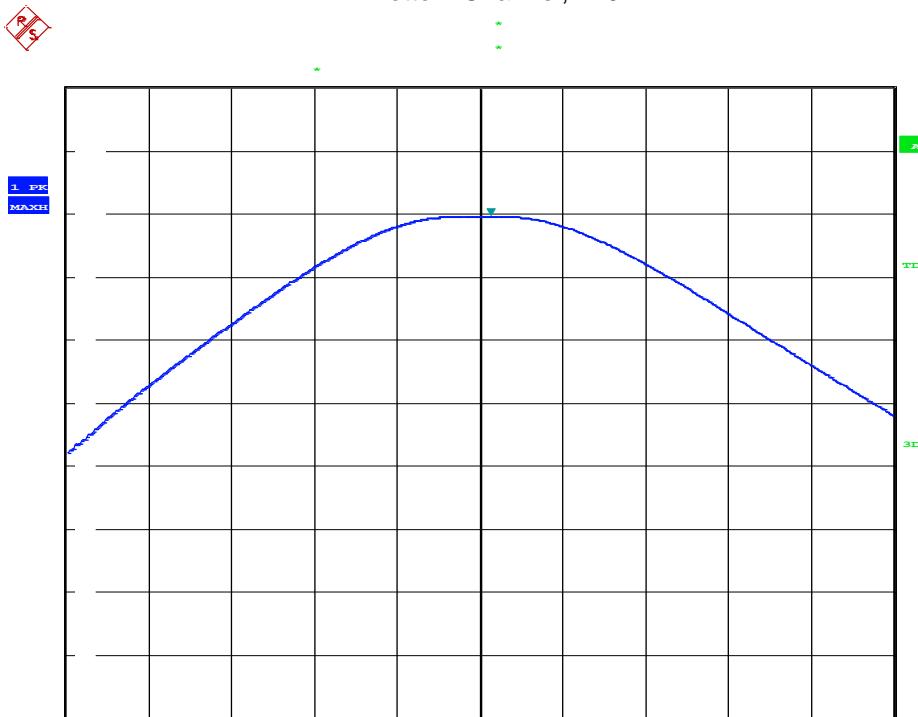

Middle Channel, 2440 MHz

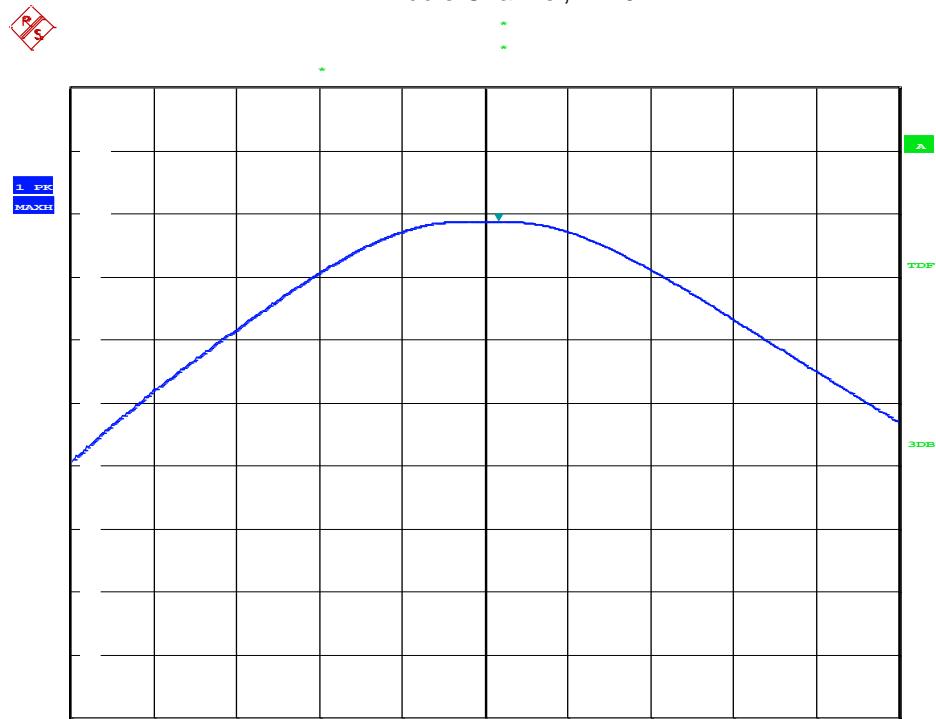

Top Channel, 2480 MHz

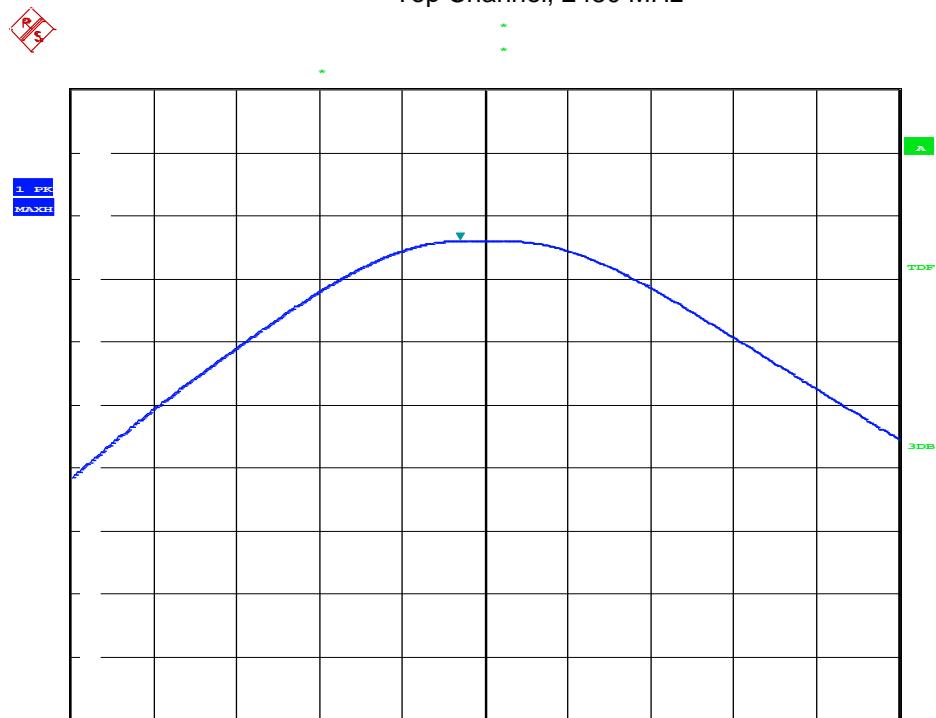

## 14 Out-of-band and conducted spurious emissions

### 14.1 Definition

*Out-of-band emission.*

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

*Spurious emission.*

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

### 14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	REF940
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.11
EUT Channels / Frequencies Measured:	2402 MHz / 2440 MHz / 2480 MHz
EUT Channel Bandwidths:	2 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	30 MHz to 26.5 GHz

### Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 58 % RH	20 % RH to 75 % RH (as declared)

### 14.3 Test Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

#### 14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

**Figure v Test Setup**

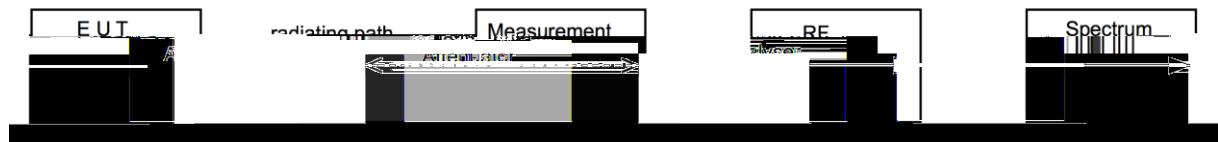

#### 14.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Emissions R5	Element	Radiated Test Software	REF9000	Cal Not Required
ATS	Rainford EMC	Radio Chamber - PP	REF940	2026-01-29
ESR7	R&S	EMI Receiver	U456	2025-03-08
CBL611/B	Chase	Bilog	U573	2024-10-14
6201-69	Watkins Johnson	PreAmp	U372	2025-03-15
FSU50	R&S	Spectrum Analyser	U544	2024-11-28
3115	EMCO	1-18GHz Horn	U223	2026-01-17
8449B	Agilent	Pre Amp	L572	2024-10-30
SN 4478	BSC	2.4G Band Stop Filter	U543	2025-02-15
AFH-07000	Atlantic Microwave	High Pass Filter	U558	2025-02-15
PAM-840A	Com-Power	Pre-Amp (18 - 40 GHz)	REF2390	2024-10-02
LB-180400-25-C-KF	A Info Inc	Horn Antenna	REF2246	2024-09-23


## 14.6 Test Results

Modulation: GFSK; Frequency 2402 MHz						
Emission Frequency (MHz)	Peak Field Strength (dB V/m)	Distance (m)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions See Plots in Section 11						PASS

Modulation: GFSK; Frequency 2440 MHz						
Emission Frequency (MHz)	Peak Field Strength (dB V/m)	Distance (m)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions See Plots in Section 11						PASS

Modulation: GFSK; Frequency 2480 MHz						
Emission Frequency (MHz)	Peak Field Strength (dB V/m)	Distance (m)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions See Plots in Section 11						PASS

Lower Bandedge compliance

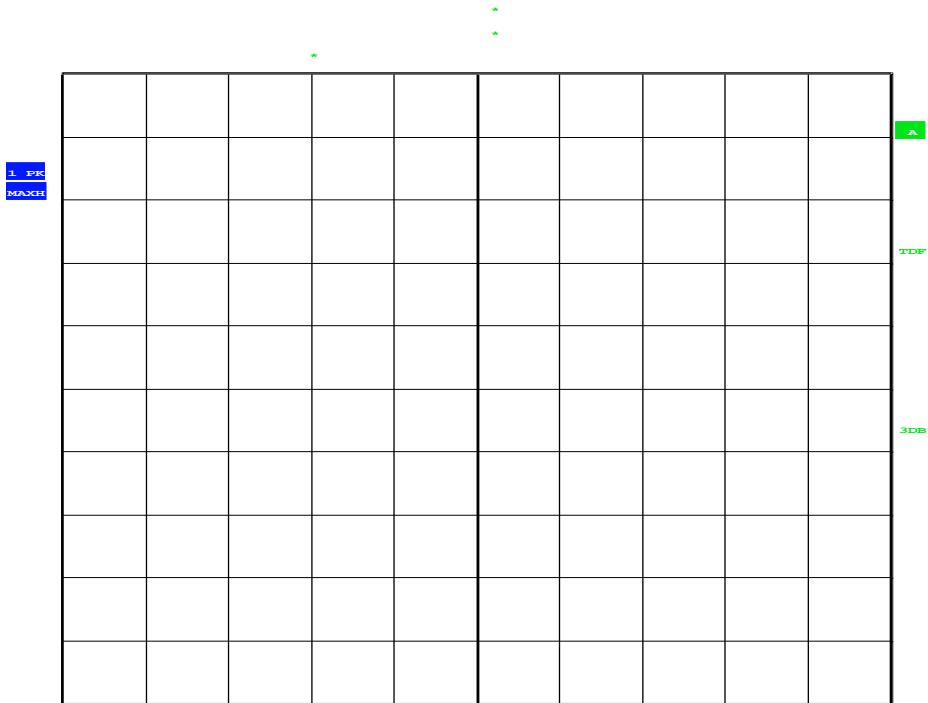

## 15 Power spectral density

### 15.1 Definition

The power per unit bandwidth.

### 15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	REF 940
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.10
EUT Channels / Frequencies Measured:	2402 MHz / 2440 MHz / 2480 MHz
EUT Channel Bandwidths:	2 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Span: (requirement 1.5 times DTS BW)	1191.3 MHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 56.3 % RH	20 % RH to 75 % RH (as declared)

### 15.3 Test Limit

For equipment operating in the bands 902 - 928 MHz and 2400 - 2483.5 MHz the transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

For equipment operating in the band 5725 - 5850 MHz the output power spectral density shall not exceed 30 dBm in any 500 kHz band

#### 15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per the test set-up diagram below, the peak emission of the EUT was measured on a spectrum analyser, with path losses taken into account.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

#### Test Set-up Diagram



#### 15.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Emissions R5	Element	Radiated Test Software	REF9000	Cal Not Required
ATS	Rainford EMC	Radio Chamber - PP	REF940	2026-01-29
FSU50	R&S	Spectrum Analyser	U544	2024-11-28
3115	EMCO	1-18GHz Horn	U223	2026-01-17
8449B	Agilent	Pre Amp	L572	2024-10-30

## 15.6 Test Results


The following formula may be used to convert field strength (FS) in volts/metre to transmitter output power (TP) in watts:

$$TP = (FS \times D)^2 / (30 \times G)$$


where D is the distance in metres between the two antennas and G is the antenna numerical gain referenced to isotropic gain.

Modulation: GFSK; Power setting: +8 dBm					
Channel Frequency (MHz)	Peak Field Strength	Distance (m)	Antenna Gain (dBi)	Max. Power (dBm)	Result
2402	99.05	3.00	1.70	2.12	Pass
2440	98.24	3.00	1.70	1.31	Pass
2480	95.37	3.00	1.70	-1.56	Pass


Bottom Channel, 2402 MHz

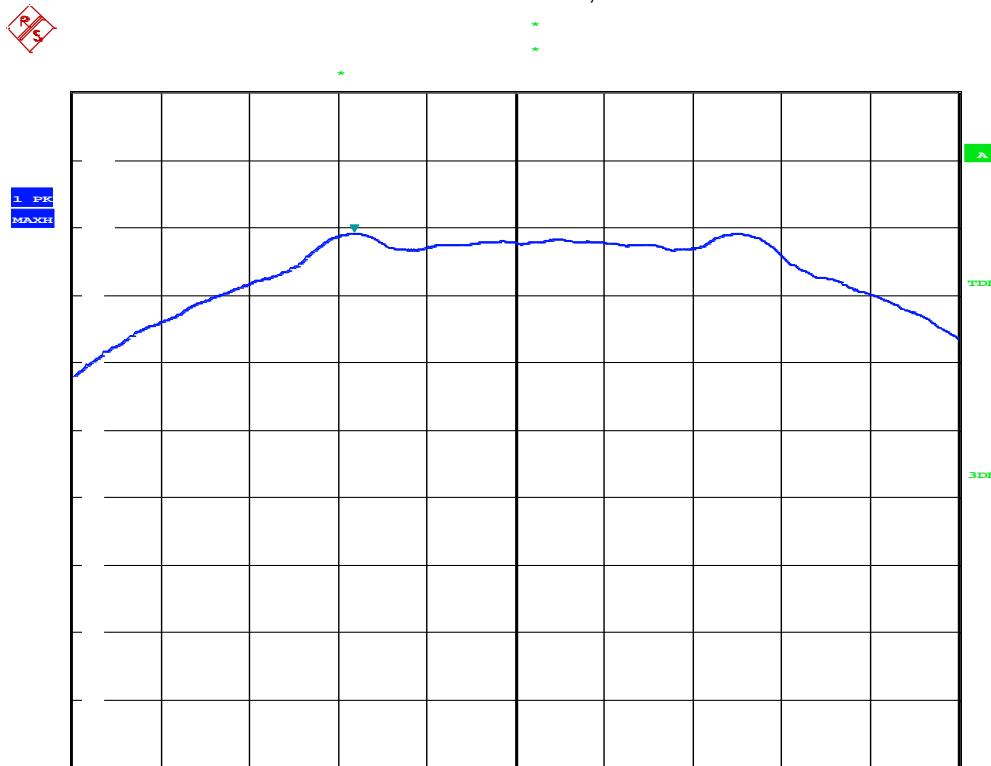

Middle Channel, 2440 MHz

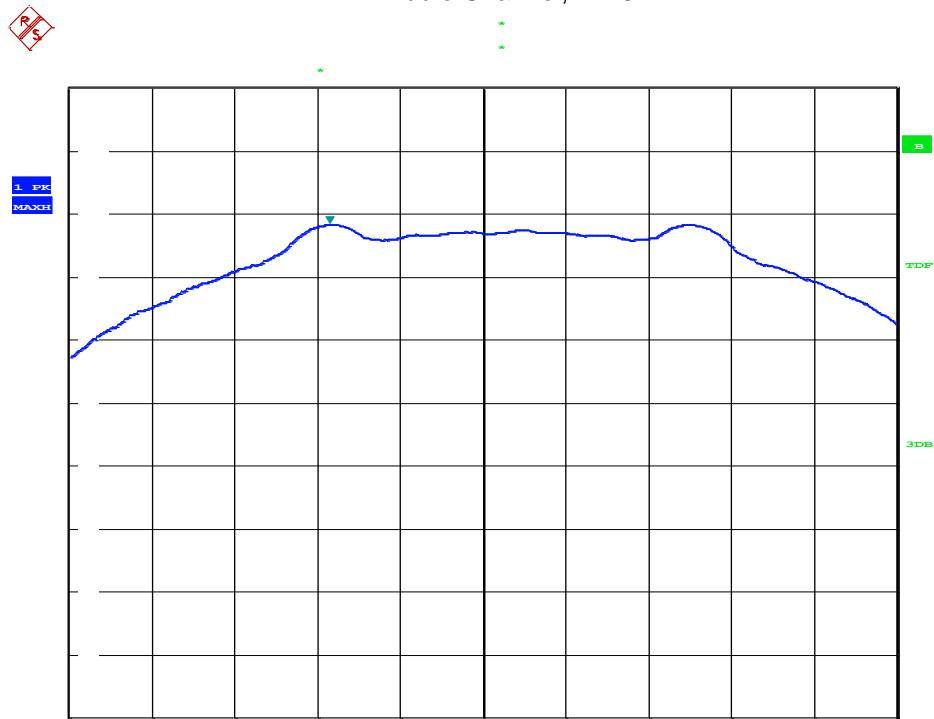

Top Channel, 2480 MHz

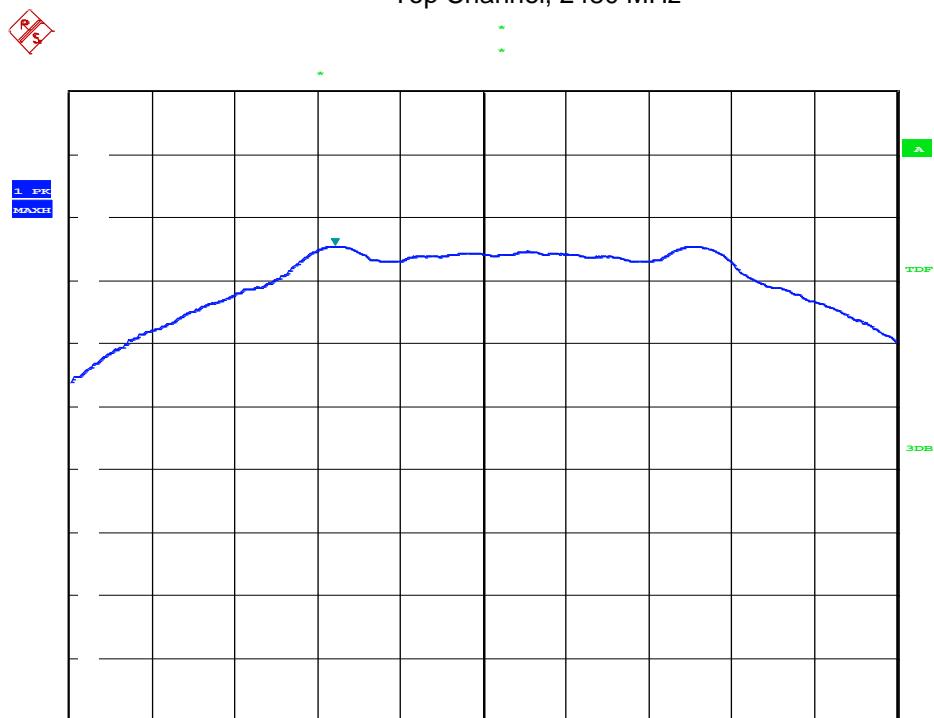

## 16 Measurement Uncertainty

### Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence where no required test level exists.

Test/Measurement	Budget Number	MU
<b>Conducted RF Power, Power Spectral Density, Adjacent Channel Power and Spurious emissions</b>		
Absolute RF power (via antenna connector) Sampling Power Meter to 8 GHz	MU4001	<b>0.9 dB</b>
Carrier Power and PSD - Spectrum Analysers	MU4004	<b>1.7 dB</b>
Adjacent Channel Power	MU4002	<b>1.9 dB</b>
Transmitter conducted spurious emissions (Including emissions due to intermodulation)	MU4041	<b>0.9 dB</b>
Conducted power and spurious emissions 40 GHz to 50 GHz	MU4042	<b>2.4 dB</b>
Conducted power and spurious emissions 50 GHz to 75 GHz	MU4043	<b>2.5 dB</b>
Conducted power and spurious emissions 75 GHz to 110 GHz	MU4044	<b>2.4 dB</b>
<b>Radiated RF Power and Spurious emissions ERP and EIRP</b>		
Effective Radiated Power Reverb Chamber	MU4020	<b>3.7 dB</b>
Effective Radiated Power	MU4021	<b>4.7 dB</b>
TRP Emissions 30 MHz to 1 GHz using CBL6111 or CBL6112 Bilog Antenna	MU4046	<b>5.3 dB</b>
TRP Emissions 1 GHz to 18 GHz using HL050 Log Periodic Antenna	MU4047	<b>5.1 dB</b>
TRP Emissions 18 GHz to 26.5 GHz using Standard Gain Horn	MU4048	<b>2.7 dB</b>
TRP Emissions 26.5 GHz to 40 GHz using Standard Gain Horn	MU4049	<b>2.7 dB</b>
In-band (3450-3650 MHz) TRP using CATR_ASH_B2	MU4051	<b>4.1 dB</b>
Cellular Radiated Spurious Emissions in a SAC 30 MHz to 180 MHz	MU4052	<b>6.3 dB</b>
Cellular Radiated Spurious Emissions in a SAC 180 MHz to 18 GHz	MU4052	<b>3.6 dB</b>
Cellular Radiated Spurious Emissions in a FAR 30 MHz to 180 MHz	MU4052	<b>5.4 dB</b>
Cellular Radiated Spurious Emissions in a FAR 180 MHz to 18 GHz	MU4052	<b>3.0 dB</b>
<b>Spurious Emissions Electric and Magnetic Field</b>		
Radiated Spurious Emissions 30 MHz to 1 GHz (Including emissions due to intermodulation)	MU4037	<b>4.8 dB</b>
Radiated Spurious Emissions 1-18 GHz (Including emissions due to intermodulation)	MU4032	<b>4.5 dB</b>
E Field Emissions 18 GHz to 26 GHz	MU4024	<b>3.2 dB</b>
E Field Emissions 26 GHz to 40 GHz	MU4025	<b>3.3 dB</b>
E Field Emissions 40 GHz to 50 GHz	MU4026	<b>3.5 dB</b>
E Field Emissions 50 GHz to 75 GHz	MU4027	<b>3.6 dB</b>
E Field Emissions 75 GHz to 110 GHz	MU4028	<b>3.6 dB</b>
Radiated Magnetic Field Emissions	MU4031	<b>2.3 dB</b>

<b>Test/Measurement</b>	<b>Budget Number</b>	<b>MU</b>
<b>Frequency Measurements</b>		
Frequency Deviation	MU4022	<b>3.7 kHz</b>
Frequency error using CMTA test set	MU4023	<b>113.441 Hz</b>
Frequency error using GPS locked frequency source	MU4045	<b>0.0413 ppm</b>
<b>Bandwidth/Spectral Mask Measurements</b>		
Channel Bandwidth	MU4005	<b>3.87%</b>
Transmitter Mask Amplitude	MU4039	<b>1.3 dB</b>
Transmitter Mask Frequency	MU4040	<b>2.59%</b>
<b>Time Domain Measurements</b>		
Transmission Time	MU4038	<b>4.40%</b>
<b>Dynamic Frequency Selection (DFS) Parameters</b>		
DFS Analyser - Measurement Time	MU4006	<b>678.984 µs</b>
DFS Generator - Frequency Error	MU4007	<b>91.650 Hz</b>
DFS Threshold Conducted	MU4008	<b>1.3 dB</b>
DFS Threshold Radiated	MU4009	<b>3.2 dB</b>
<b>Receiver Parameters</b>		
EN 300 328 Receiver Blocking	MU4010	<b>1.1 dB</b>
EN 301 893 Receiver Blocking	MU4011	<b>1.1 dB</b>
EN 303 340 Adjacent Channel Selectivity	MU4012	<b>1.1 dB</b>
EN 303 340 Overloading	MU4013	<b>1.1 dB</b>
EN 303 340 Receiver Blocking	MU4014	<b>1.1 dB</b>
EN 303 340 Receiver Sensitivity	MU4015	<b>0.9 dB</b>
EN 303 372-1 Image Rejection	MU4016	<b>1.4 dB</b>
EN 303 372-1 Receiver Blocking	MU4017	<b>1.1 dB</b>
EN 303 372-2 Adjacent Channel Selectivity	MU4018	<b>1.1 dB</b>
EN 303 372-2 Dynamic Range	MU4019	<b>0.9 dB</b>
Receiver Blocking Talk Mode Conducted	MU4033	<b>1.2 dB</b>
Receiver Blocking Talk Mode- radiated	MU4034	<b>3.4 dB</b>
Rx Blocking, listen mode, blocking level	MU4035	<b>3.2 dB</b>
Rx Blocking, listen mode, radiated Threshold Measurement	MU4036	<b>3.4 dB</b>
Adjacent Sub Band Selectivity	MU4003	<b>4.2 dB</b>

<b>Test/Measurement</b>	<b>Budget Number</b>	<b>MU</b>
<b>Rohde &amp; Schwarz TS8997</b>		
Carrier frequency	MU4050	<b>5.2 ppm</b>
RF Output Power	MU4050	<b>1.0 dB</b>
Peak Power	MU4050	<b>0.8 dB</b>
Power Spectral Density	MU4050	<b>1.0 dB</b>
Occupied Channel Bandwidth	MU4050	<b>2.08 %</b>
Transmitter unwanted emissions in-band	MU4050	<b>0.9 dB</b>
Transmitter unwanted emissions in the spurious domain 30 MHz to 1 GHz	MU4050	<b>0.6 dB</b>
Transmitter unwanted emissions in the spurious domain 1 GHz to 12.75 GHz	MU4050	<b>1.8 dB</b>
Receiver Spurious emission 30 MHz to 1 GHz	MU4050	<b>0.6 dB</b>
Receiver Spurious emission 1 GHz to 12.75 GHz	MU4050	<b>1.8 dB</b>
Duty Cycle	MU4050	<b>0.02 %</b>
Tx Sequence	MU4050	<b>0.02 %</b>
Tx Gap	MU4050	<b>0.02 %</b>
Medium Utilisation	MU4050	<b>0.1 %</b>
Accumulated Transmit Time	MU4050	<b>0.01 %</b>
Minimum Frequency Occupation Time	MU4050	<b>0.01 %</b>
Hopping Frequency Separation	MU4050	<b>0.6 %</b>
Receiver blocking (for bit streams)	MU4050	<b>3.0 dB</b>
Channel Access Mechanism / Adaptivity / DFS / Contention Based Protocol	MU4050	<b>1.8 dB</b>

*All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence where no required test level exists.*

## 17 RF Exposure

### General SAR test reduction & exclusion guidance

#### KDB 447498

Section 4.3 General SAR test reduction and exclusion guidance

For Standalone SAR exclusion consideration, when SAR Exclusion Threshold requirement in KDB 447498 is satisfied, standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

The SAR Test Exclusion Threshold for frequencies in the range 100 MHz to 6 GHz, and for test separation distance of  $\leq$  50 mm, is determined as follows.

$$\text{SAR Exclusion Threshold (SARET)} = (NT \times TSD_A) / \sqrt{f_{GHz}}$$

Where,

NT = Numeric Threshold (3.0 for 1-g SAR and 7.5 for 10-g SAR)

TSD<sub>A</sub> = Minimum Test separation distance or 50 mm (whichever is lower)

f<sub>GHz</sub> = Transmit frequency in GHz

<i>Channel Frequency (MHz)</i>	<i>Maximum Conducted Power (mW)</i>	<i>SAR Exclusion Threshold at 5 mm (mW)</i>	<i>SAR Evaluation</i>
2402	1.8	9.7	Not Required
2440	1.5	9.6	Not Required
2480	0.8	9.5	Not Required

Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

## 18 Appendix A – Declaration of similarity

### Declaration of Similarity



August 2024

To whom it may concern:

The tag tested in this report is the iTAG X30.

The construction of the iTAG X20 and iTAG X10 are the same as the iTAG X30. The only difference is the firmware features and functions available to the user.

Dr Julian R Poyner

Engineering Director

Extronics Limited, registered in England and Wales no. 03076287  
Registered office 1 Dalton Way, Midpoint 18, Middlewich, Cheshire, UK CW10 0HU  
Tel: +44 (0) 845 277 9000. E-mail: [info@extronics.com](mailto:info@extronics.com) Web: [www.extronics.com](http://www.extronics.com)