

## Meas1.Body Top Side 0mm GSM 850 Ch190

Date: 2025/5/14

Communication System Band: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.918$  S/m;  $\epsilon_r = 42.587$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.99, 9.99, 9.99); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch190/Area Scan (51x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.270 W/kg


**Ch190/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.039 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.699 W/kg

**SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.114 W/kg**

Maximum value of SAR (measured) = 0.486 W/kg

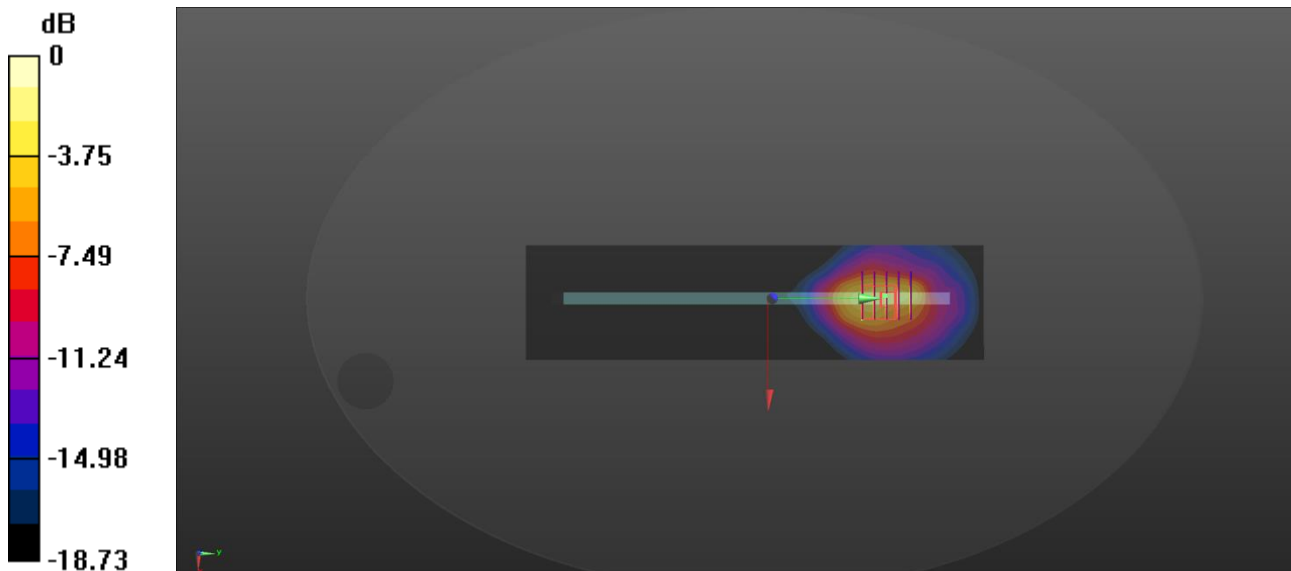

0 dB = 0.486 W/kg

## Meas2.Body Top Side 0mm GSM 1900 Ch512

Date: 2025/5/15

Communication System Band: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.453$  S/m;  $\epsilon_r = 39.251$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.33, 8.33, 8.33); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch512 2/Area Scan (51x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


**Ch512 2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.086 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.303 W/kg**

Maximum value of SAR (measured) = 1.24 W/kg

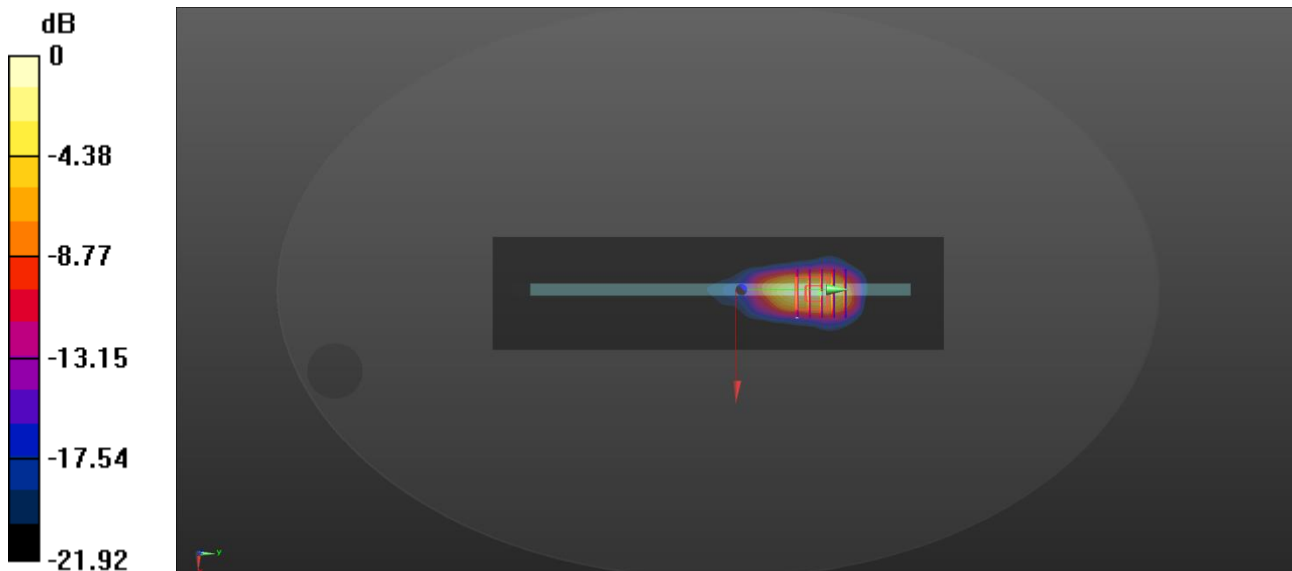

0 dB = 1.24 W/kg

### Meas3.Body Top Side 0mm WCDMA B2 Ch9400

Date: 2025/5/15

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.444$  S/m;  $\epsilon_r = 39.194$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.33, 8.33, 8.33); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch9400/Area Scan (51x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.868 W/kg


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.237 W/kg**

Maximum value of SAR (measured) = 0.938 W/kg

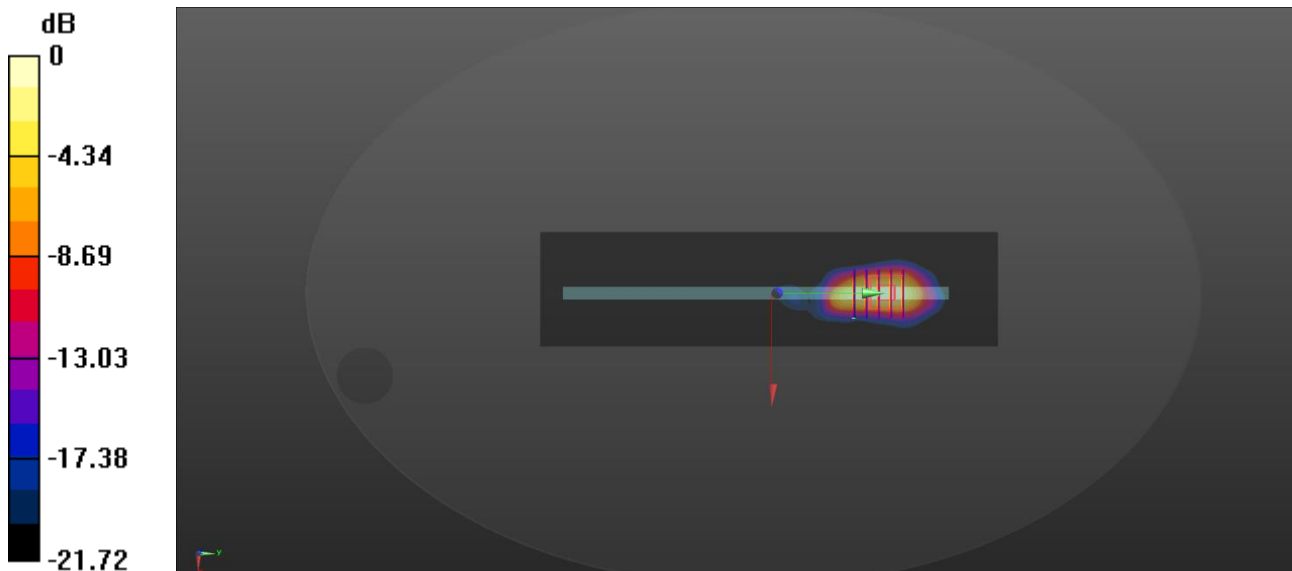

0 dB = 0.938 W/kg

## Meas4.Body Top Side 0mm WCDMA B4 Ch1412

Date: 2025/5/13

Communication System Band: IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.4$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 39.532$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch1412/Area Scan (51x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.892 W/kg


**Ch1412/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.253 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

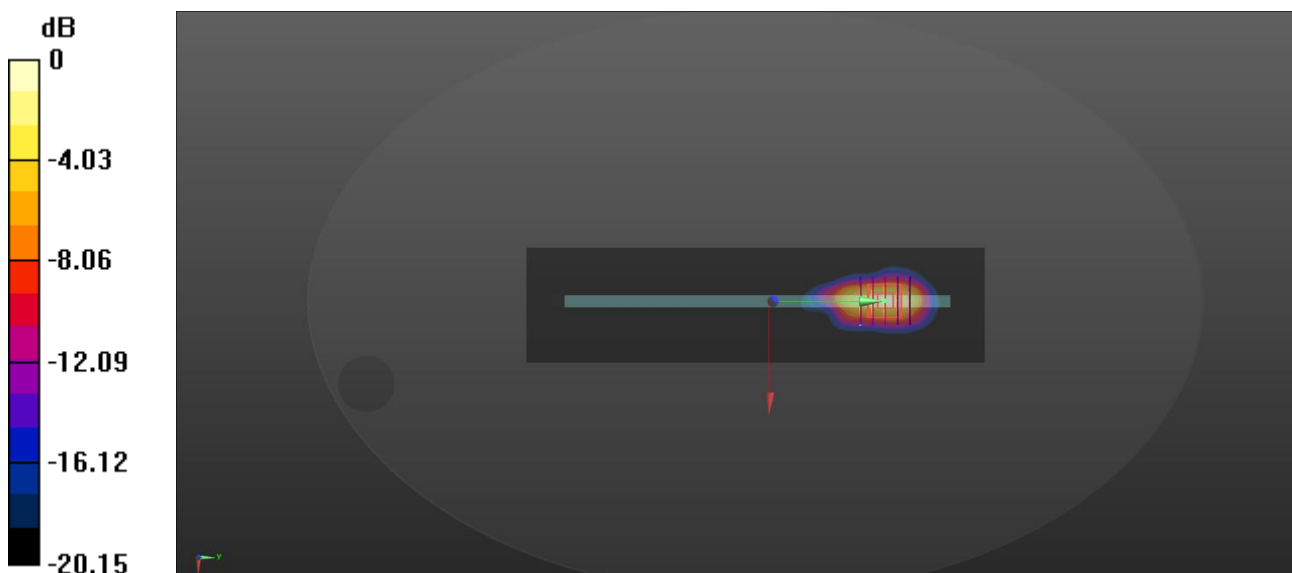

0 dB = 1.04 W/kg

## Meas5.Body Back Side 0mm WCDMA B5 Ch4182

Date: 2025/5/14

Communication System Band: V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.918$  S/m;  $\epsilon_r = 42.587$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.99, 9.99, 9.99); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch4182/Area Scan (81x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.76 W/kg

**SAR(1 g) = 0.715 W/kg; SAR(10 g) = 0.345 W/kg**

Maximum value of SAR (measured) = 1.29 W/kg

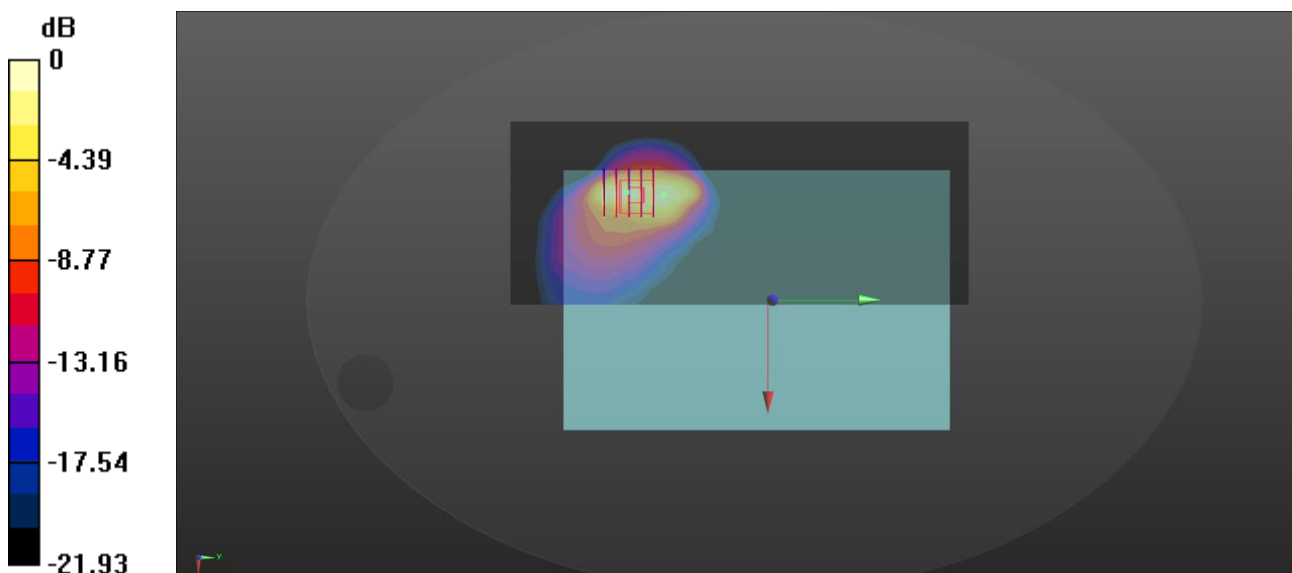

0 dB = 1.29 W/kg

## Meas6.Body Top Side 0mm LTE B7 Ch21350

Date: 2025/5/16

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.943$  S/m;  $\epsilon_r = 38.456$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.59, 7.59, 7.59); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch21350/Area Scan (61x251x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 1.63 W/kg

**Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 1.199 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 1.96 W/kg  
**SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.218 W/kg**  
Maximum value of SAR (measured) = 1.46 W/kg

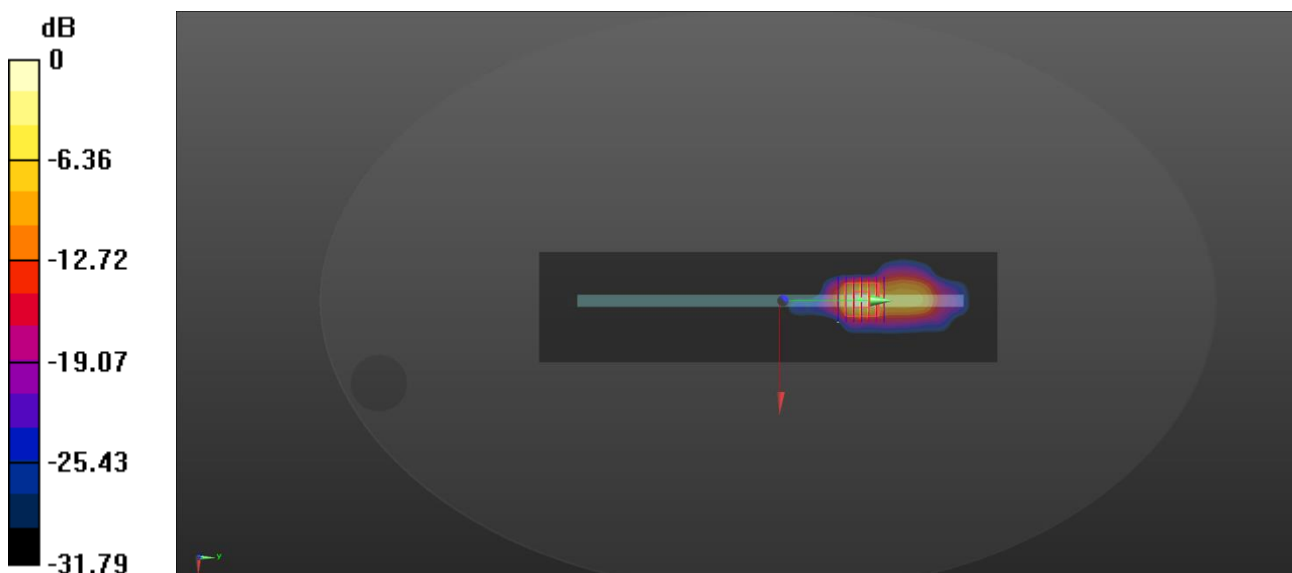

0 dB = 1.46 W/kg

## Meas7.Body Top Side 0mm LTE B12 Ch23095

Date: 2025/5/13

Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 43.169$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.29, 10.29, 10.29); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch23095/Area Scan (51x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.453 W/kg


**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.939 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.14 W/kg

**SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.217 W/kg**

Maximum value of SAR (measured) = 1.39 W/kg

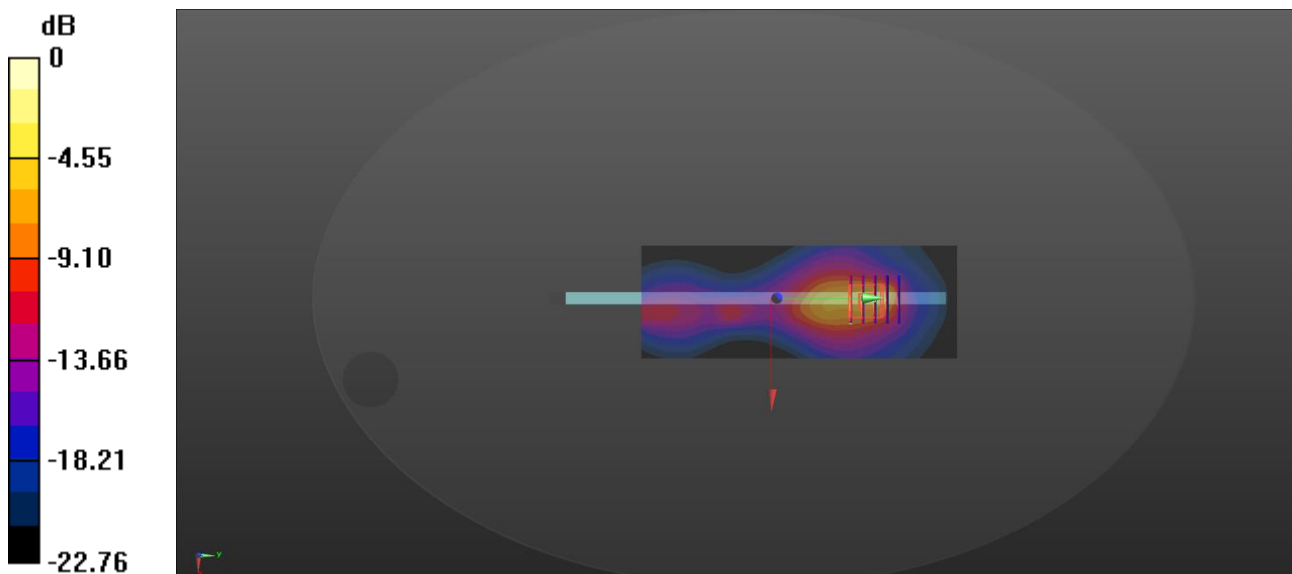

0 dB = 1.39 W/kg

## Meas8.Body Top Side 0mm LTE B13 Ch23230

Date: 2025/5/13

Communication System Band: Band 13, E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 42.792$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.29, 10.29, 10.29); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch23230/Area Scan (51x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.329 W/kg


**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.507 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.823 W/kg

**SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.133 W/kg**

Maximum value of SAR (measured) = 0.563 W/kg

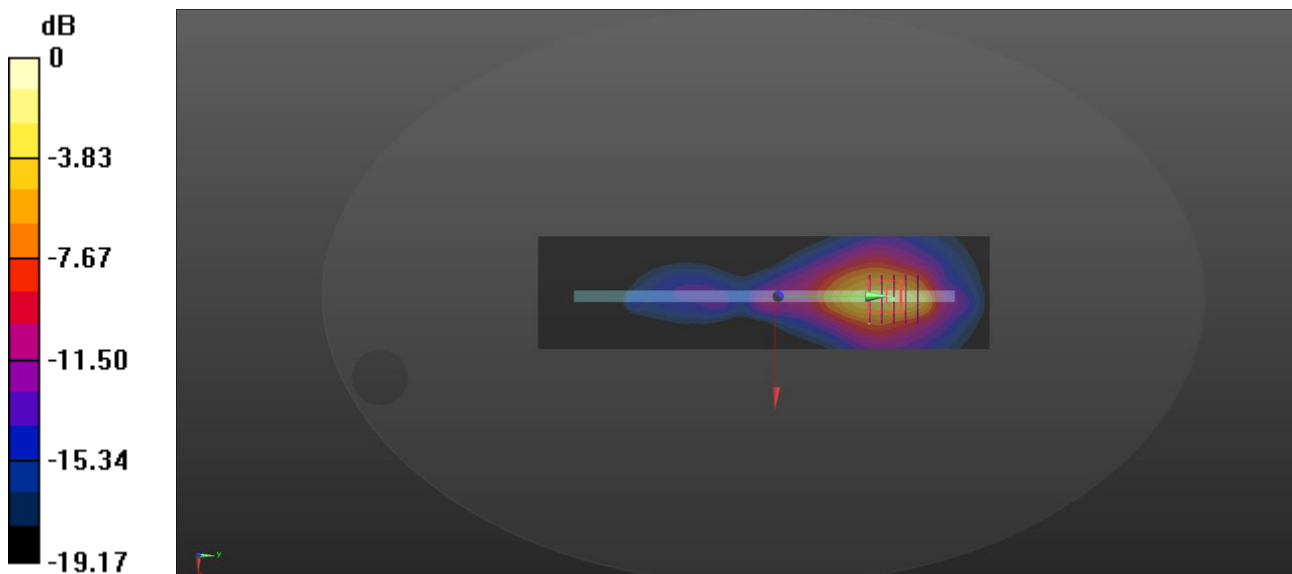

0 dB = 0.563 W/kg

## Meas9.Body Back Side 0mm LTE B25 Ch26365

Date: 2025/5/15

Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1882.5$  MHz;  $\sigma = 1.446$  S/m;  $\epsilon_r = 39.195$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.33, 8.33, 8.33); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch26365/Area Scan (81x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg


**Ch26365/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.310 W/kg**

Maximum value of SAR (measured) = 1.24 W/kg

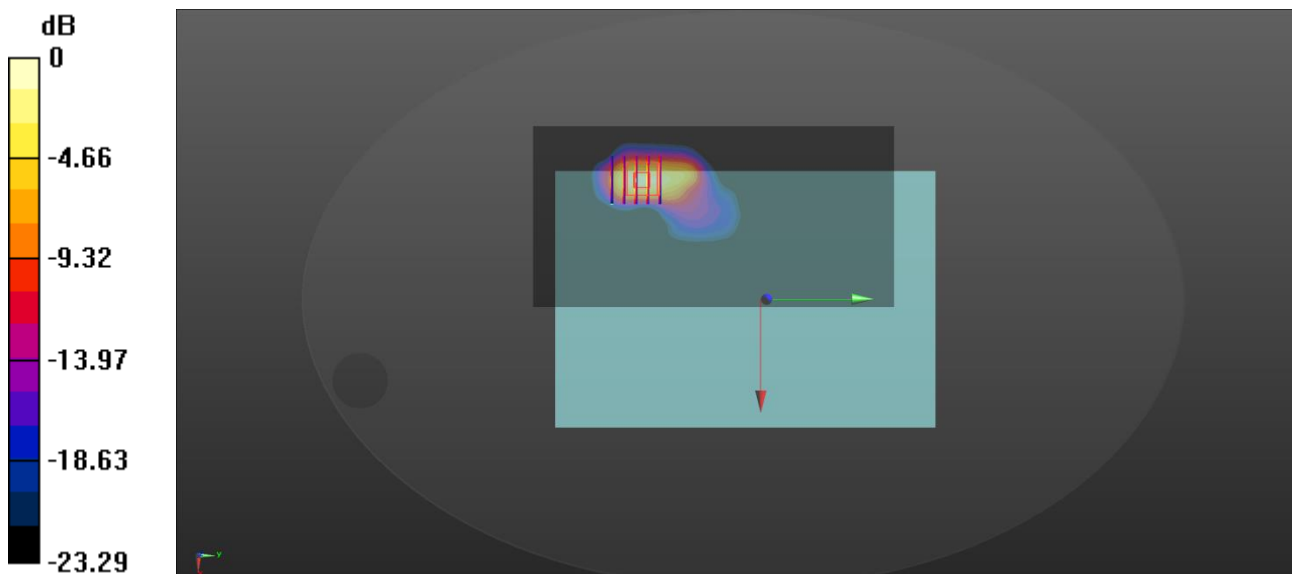

0 dB = 1.24 W/kg

## Meas10.Body Top Side 0mm LTE B26 Ch26865

Date: 2025/5/14

Communication System Band: Band26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 42.587$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.99, 9.99, 9.99); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch26865/Area Scan (51x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.261 W/kg


**Ch26865/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.851 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.655 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.461 W/kg

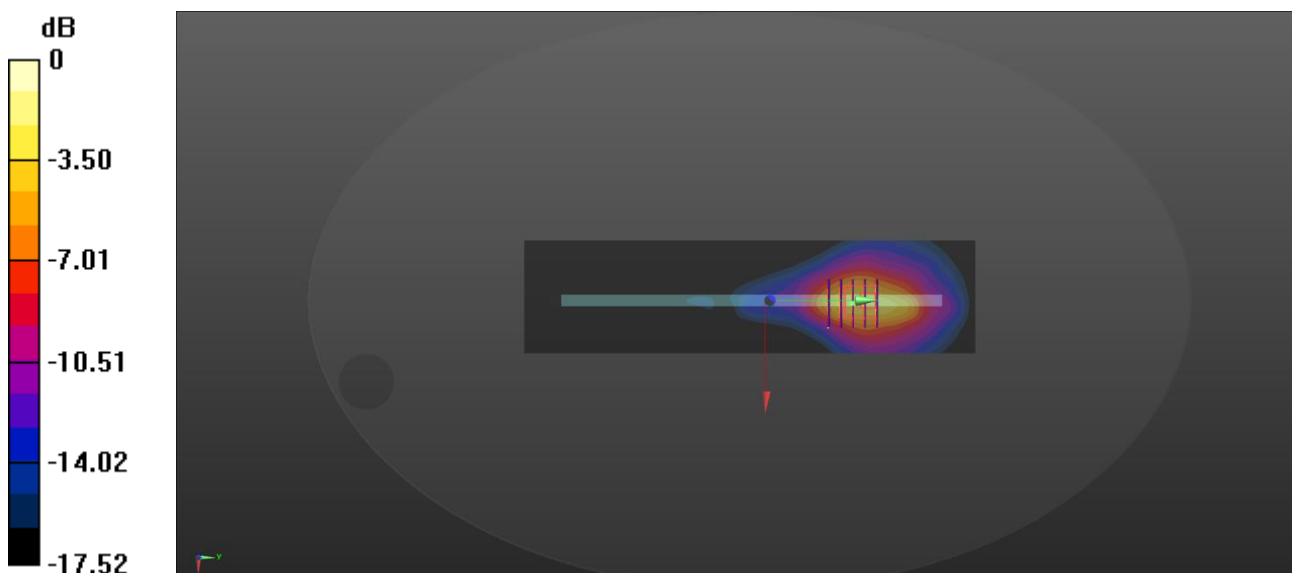

0 dB = 0.461 W/kg

## Meas11.Body Top Side 0mm LTE B66 Ch132572

Date: 2025/5/13

Communication System Band: Band66; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 39.441$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch132572/Area Scan (51x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.40 W/kg


**Ch132572/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.309 W/kg**

Maximum value of SAR (measured) = 1.27 W/kg

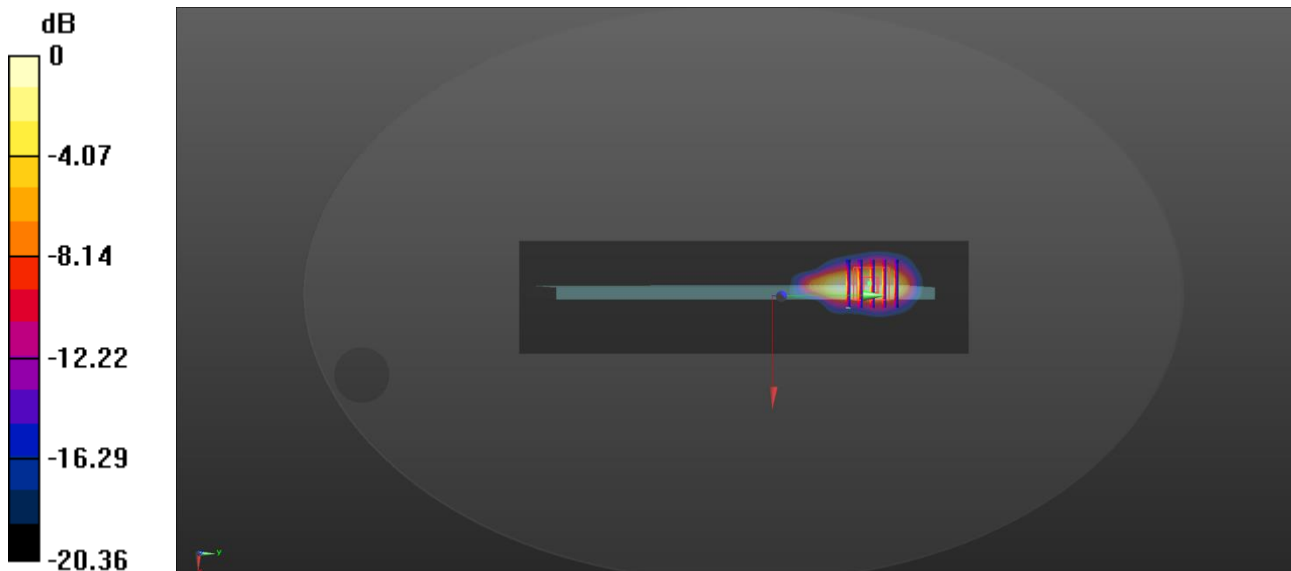

0 dB = 1.27 W/kg

## Meas12.Body Back Side 0mm LTE B41 Ch40620

Date: 2025/5/16

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.967$  S/m;  $\epsilon_r = 38.356$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.59, 7.59, 7.59); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch40620/Area Scan (101x201x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.949 W/kg


**Ch40620/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.150 W/kg**

Maximum value of SAR (measured) = 0.951 W/kg

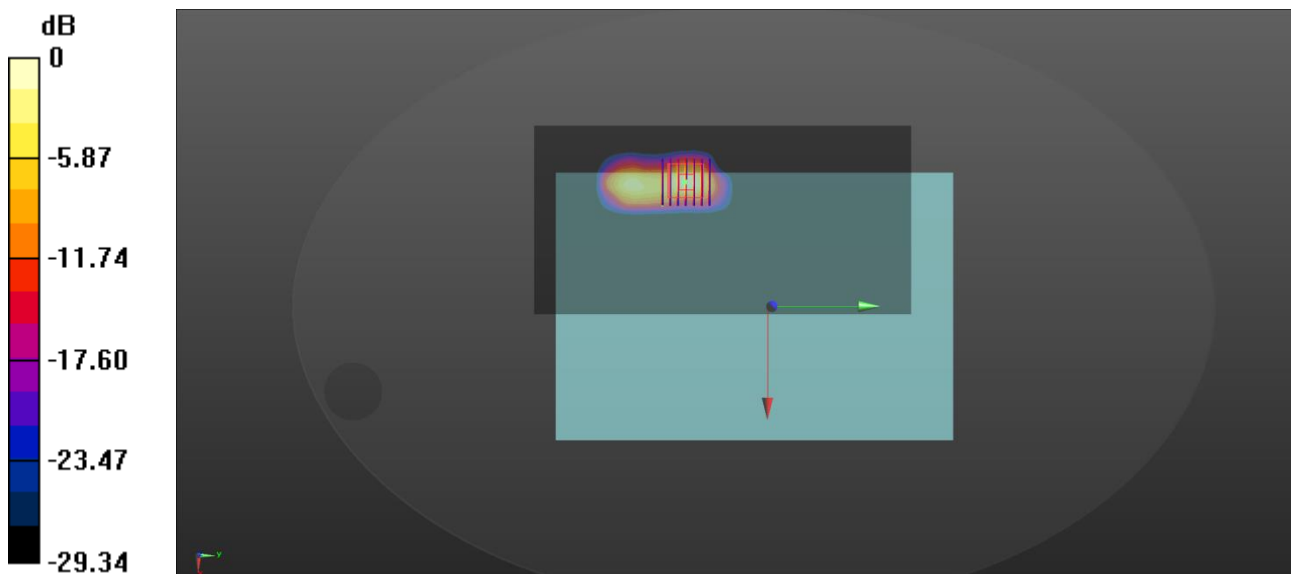

0 dB = 0.951 W/kg

## Meas13.Body Back Side 0mm BT Ch39

Date: 2025/5/16

Communication System Band: BT; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.832$  S/m;  $\epsilon_r = 38.674$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch39/Area Scan (81x191x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.348 W/kg


**Ch39/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.549 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.407 W/kg

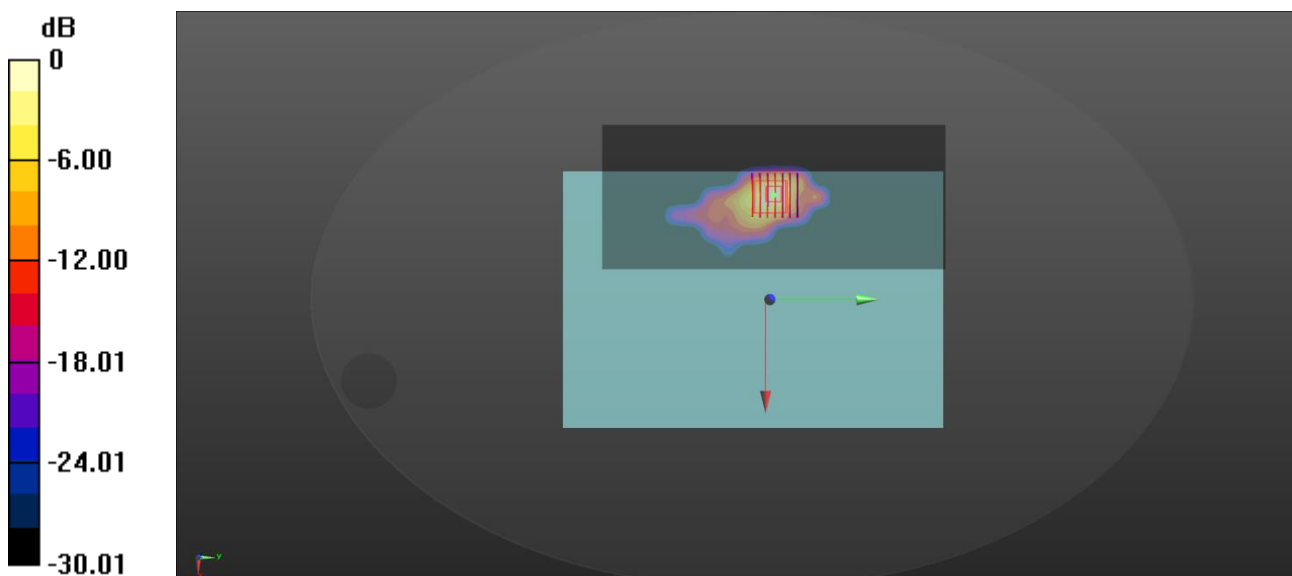

0 dB = 0.407 W/kg

## Meas14.Body Back Side 0mm WLAN 2.4G 11b Ch6

Date: 2025/5/16

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.83$  S/m;  $\epsilon_r = 38.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch6/Area Scan (71x181x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.252 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.358 W/kg

**SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.237 W/kg

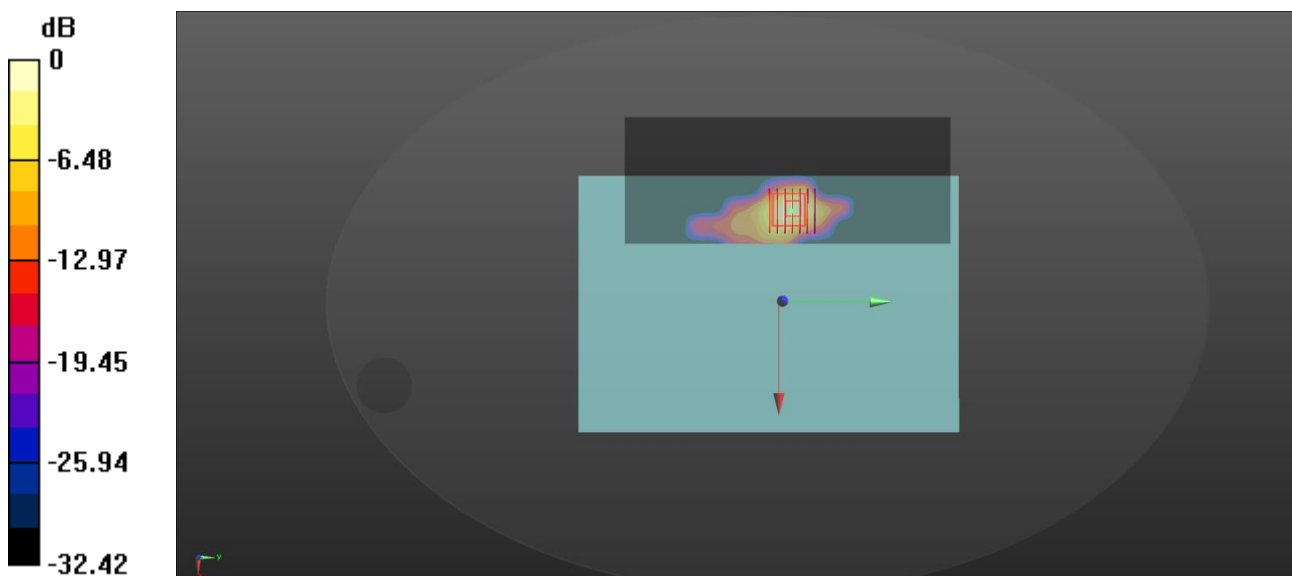

0 dB = 0.237 W/kg

## Meas15.Body Back Side 0mm WLAN 5.2G Ch44

Date: 2025/5/17

Communication System Band: WLAN(a); Frequency: 5220 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5220$  MHz;  $\sigma = 4.581$  S/m;  $\epsilon_r = 35.475$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.74, 5.74, 5.74); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch44/Area Scan (81x221x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.689 W/kg


**Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.724 W/kg

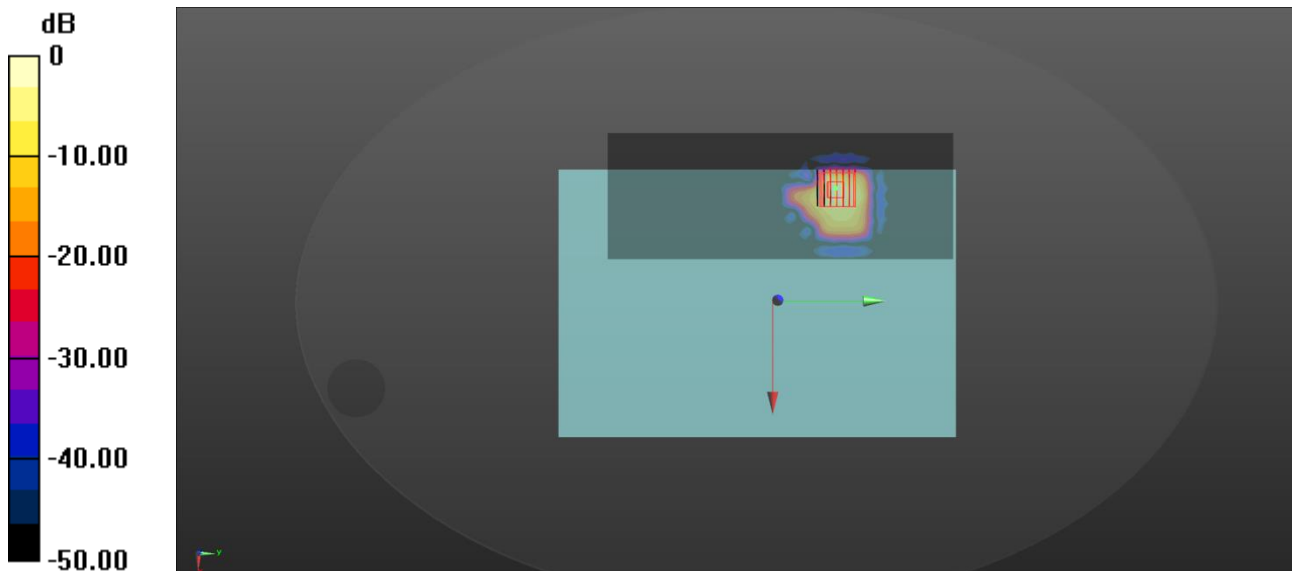

0 dB = 0.724 W/kg

## Meas16.Body Back Side 0mm WLAN 5.3G Ch60

Date: 2025/5/17

Communication System Band: WLAN(a); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.677$  S/m;  $\epsilon_r = 35.518$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.50, 5.50, 5.50); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch60/Area Scan (91x201x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.05 W/kg


**Ch60/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.059 W/kg**

Maximum value of SAR (measured) = 0.845 W/kg

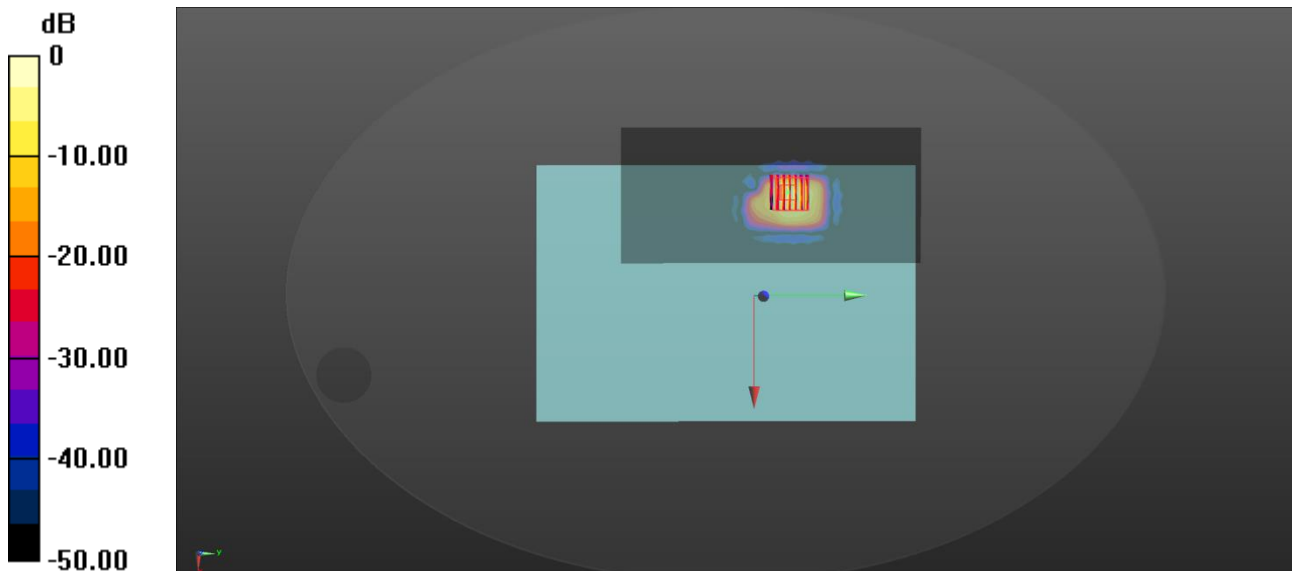

0 dB = 0.845 W/kg

## Meas17.Body Top Side 0mm WLAN 5.6G Ch116

Date: 2025/5/17

Communication System Band: WLAN(a); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.963$  S/m;  $\epsilon_r = 34.92$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.00, 5.00, 5.00); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch116/Area Scan (81x281x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.31 W/kg


**Ch116/Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.06 W/kg

**SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 1.21 W/kg

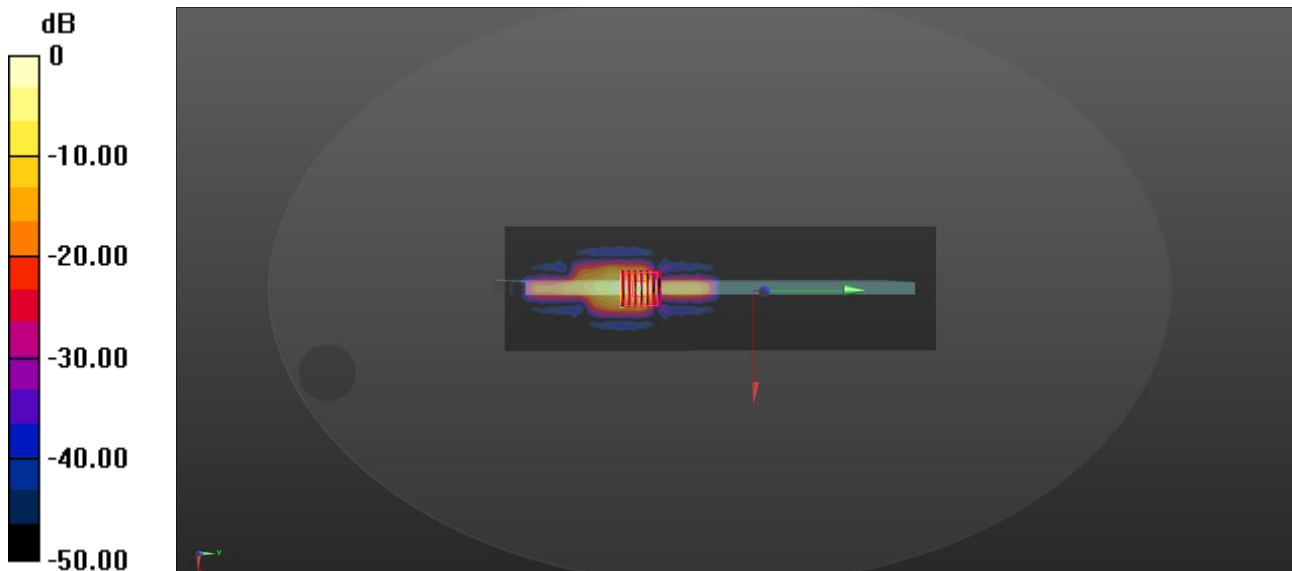

0 dB = 1.21 W/kg

## Meas18.Body Top Side 0mm WLAN 5.8G Ch157

Date: 2025/5/18

Communication System Band: WLAN(a); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.175$  S/m;  $\epsilon_r = 34.514$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.0°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.04, 5.04, 5.04); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: TP:1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch157/Area Scan (81x281x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.981 W/kg


**Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

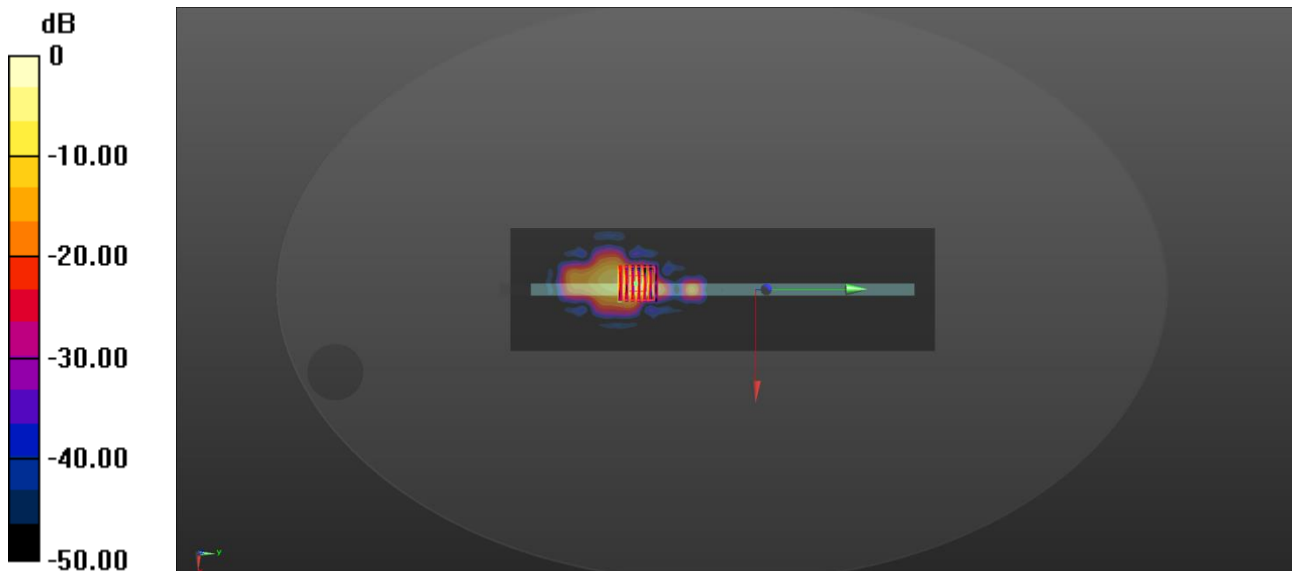

0 dB = 1.18 W/kg