



For Question,
Please Contact with WSCT
www.wsct-cert.com

TEST REPORT

FCC ID: 2AIZN-X6720B

Product: Mobile Phone

Model No.: X6720B

Trade Mark: Infinix

Report No.: WSCT-ANAB-R&E240700032A-LE

Issued Date: 12 August 2024

Issued for:

INFINIX MOBILITY LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Building A-B, Baoli'an Industrial Park, No. 58 Tangtou Avenue, Shiyao Street,
Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description	5
4. Genera Information	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	7
5. Facilities and Accreditations	8
5.1. FACILITIES	8
5.2. ACCREDITATIONS	8
5.3. MEASUREMENT UNCERTAINTY	9
5.4. MEASUREMENT INSTRUMENTS	10
6. Test Results and Measurement Data	11
6.1. ANTENNA REQUIREMENT	11
6.2. CONDUCTED EMISSION	12
6.3. CONDUCTED OUTPUT POWER	16
6.4. EMISSION BANDWIDTH	21
6.5. POWER SPECTRAL DENSITY	26
6.6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	31
6.7. RADIATED SPURIOUS EMISSION MEASUREMENT	42
7. Test Setup Photographs	53



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

1. Test Certification

Product:	Mobile Phone
Model No.:	X6720B
Trade Mark:	Infinix
Applicant:	INFINIX MOBILITY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	INFINIX MOBILITY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of receipt:	16 June 2024
Date of Test:	17 June 2024 to 09 August 2024
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 KDB 558074 D01 DTS Meas Guidance v04

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: _____



(Wang Xiang)

Checked By: _____



(Qin Shuiquan)

Approved By: _____



(Liu Fuxin)

Date: _____





Report No.: WSCT-ANAB-R&E240700032A-LE

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum conducted output power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

3. EUT Description

Product Name:	Mobile Phone
Model :	X6720B
Trade Mark:	Infinix
Software version:	X6720-H353RS-U-OP-240531V276
Hardware version:	V1.2
Operation Frequency:	2402MHz~2480MHz
Channel Separation:	2MHz
Number of Channel:	40
Modulation Technology:	GFSK
Antenna Type:	FIPA Antenna
Antenna Gain:	-1.62dBi
Operating Voltage:	Adapter: U180XSA Input: 100-240V~50/60Hz 0.6A Output: 5.0V~2.4A or 7.5V~2.4A 18.0W MAX Rechargeable Li-ion Polymer Battery Model: BL-5ABX Rated Voltage: 3.87V Rated Capacity: 4900mAh/18.97Wh Typical Capacity: 5000mAh/19.35Wh Limited Charge Voltage: 4.45V
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2. Antenna gain provided by the customer.





Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
...	...	...	...	...	...	...	...
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark: Channel 0, 19 & 39 have been tested.



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

4. Genera Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%) with Fully-charged battery.
The sample was placed (0.1m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.





For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No. 58 Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

FCC - Designation Number: CN1303

World Standardization Certification & Testing Group(Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Designation Number: CN1303.

ANAB - Certificate Number: AT-3951

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (ANAB). Certification Number: AT-3951



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

5.3.Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Power Spectral Density	$\pm 3.2\text{dB}$
2	Duty Cycle and Tx-Sequence and Tx-Gap	$\pm 1\%$
3	Medium Utilisation Factor	$\pm 1.3\%$
4	Occupied Channel Bandwidth	$\pm 2.4\%$
5	Transmitter Unwanted Emission in the out-of Band	$\pm 1.3\%$
6	Transmitter Unwanted Emissions in the Spurious Domain	$\pm 2.5\%$
7	Receiver Spurious Emissions	$\pm 2.5\%$
8	Conducted Emission Test	$\pm 3.2\text{dB}$
9	RF power, conducted	$\pm 0.16\text{dB}$
10	Spurious emissions, conducted	$\pm 0.21\text{dB}$
11	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
12	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
13	Temperature	$\pm 0.5^{\circ}\text{C}$
14	Humidity	$\pm 2.0\%$



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

5.4.MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	11/05/2023	11/04/2024
LISN	AFJ	LS16	16010222119	11/05/2023	11/04/2024
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2023	11/04/2024
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2023	11/04/2024
Coaxial cable	Megalon	LMR400	N/A	11/05/2023	11/04/2024
GPIO cable	Megalon	GPIO	N/A	11/05/2023	11/04/2024
Spectrum Analyzer	R&S	FSU	100114	11/05/2023	11/04/2024
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2023	11/04/2024
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/05/2023	11/04/2024
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	7/29/2024	7/28/2025
9*6*6 Anechoic	--	--	--	11/05/2023	11/04/2024
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/05/2023	11/04/2024
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2023	11/04/2024
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2023	11/04/2024
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2023	11/04/2024
Loop Antenna	EMCO	6502	00042960	11/05/2023	11/04/2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2023	11/04/2024
Power meter	Anritsu	ML2487A	6K00003613	11/05/2023	11/04/2024
Power sensor	Anritsu	MX248XD	--	11/05/2023	11/04/2024
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2023	11/04/2024





Report No.: WSCT-ANAB-R&E240700032A-LE

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The Bluetooth antenna is a FIPA Antenna. it meets the standards, and the best case gain of the antenna is -1.62dBi.	




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

6.2. Conducted Emission

6.2.1. Test Specification

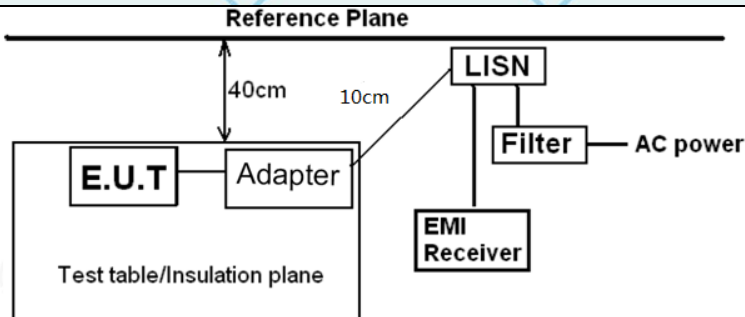Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2014		
Frequency Range:	150 kHz to 30 MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limits:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
Test Setup:	 Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Mode:	Charging + Transmitting Mode		
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2014 on conducted measurement.		
Test Result:	N/A		



Report No.: WSCT-ANAB-R&E240700032A-LE

6.2.2. EUT OPERATING CONDITIONS

The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

Test data


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

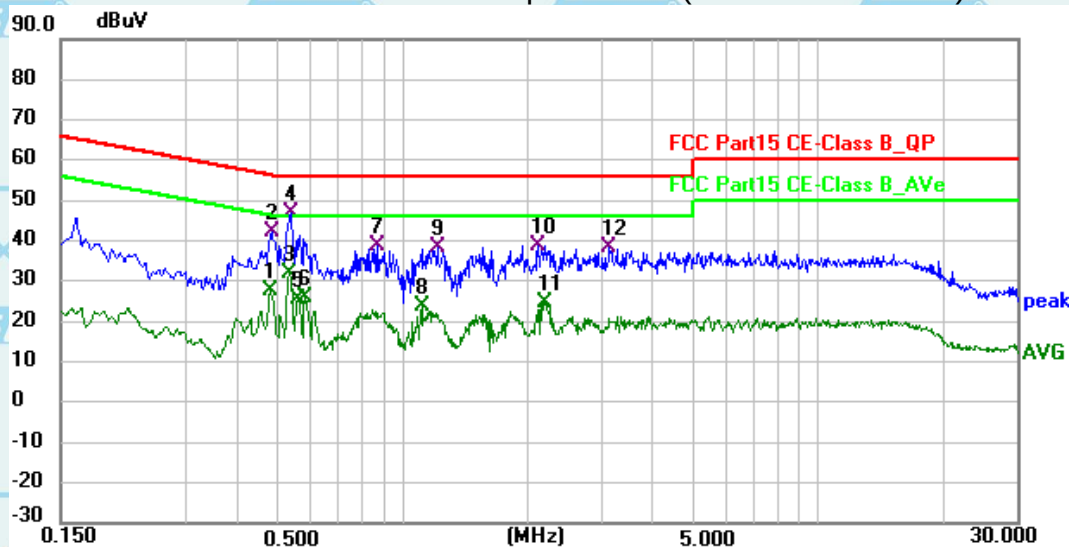

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4785	7.15	20.52	27.67	46.37	-18.70	AVG
2	0.4830	21.89	20.52	42.41	56.29	-13.88	QP
3	0.5325	11.48	20.51	31.99	46.00	-14.01	AVG
4 *	0.5370	26.27	20.52	46.79	56.00	-9.21	QP
5	0.5595	5.14	20.52	25.66	46.00	-20.34	AVG
6	0.5820	5.52	20.52	26.04	46.00	-19.96	AVG
7	0.8745	18.28	20.62	38.90	56.00	-17.10	QP
8	1.1130	3.23	20.66	23.89	46.00	-22.11	AVG
9	1.2120	17.76	20.66	38.42	56.00	-17.58	QP
10	2.1165	18.32	20.61	38.93	56.00	-17.07	QP
11	2.1975	4.21	20.61	24.82	46.00	-21.18	AVG
12	3.1470	17.79	20.59	38.38	56.00	-17.62	QP



Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

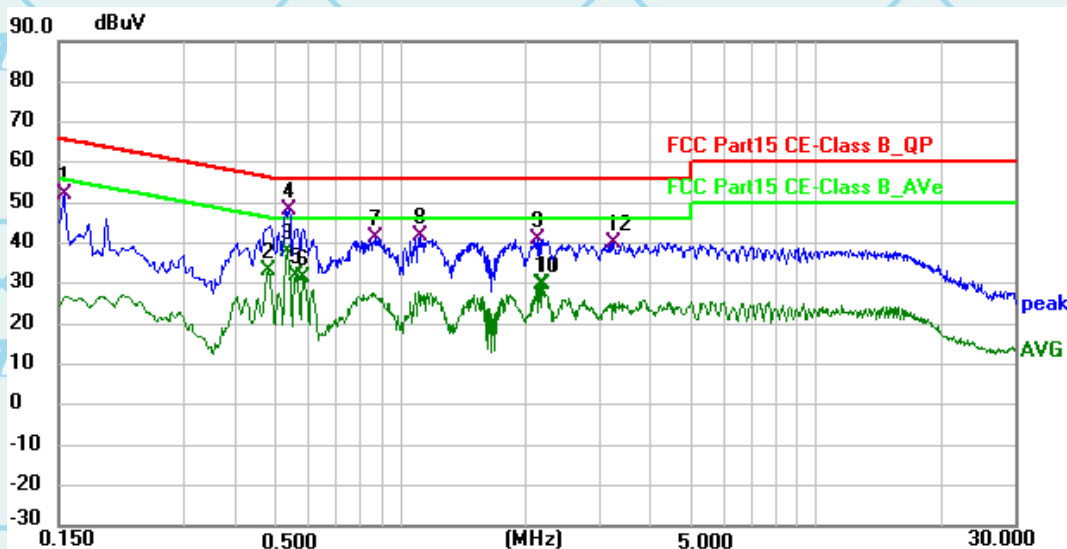

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1545	31.49	20.73	52.22	65.75	-13.53	QP
2	0.4785	12.53	20.52	33.05	46.37	-13.32	AVG
3	0.5325	17.33	20.51	37.84	46.00	-8.16	AVG
4 *	0.5370	27.74	20.52	48.26	56.00	-7.74	QP
5	0.5595	11.53	20.52	32.05	46.00	-13.95	AVG
6	0.5820	10.95	20.52	31.47	46.00	-14.53	AVG
7	0.8745	20.89	20.62	41.51	56.00	-14.49	QP
8	1.1130	21.22	20.66	41.88	56.00	-14.12	QP
9	2.1390	20.41	20.61	41.02	56.00	-14.98	QP
10	2.1705	9.05	20.61	29.66	46.00	-16.34	AVG
11	2.1975	9.32	20.61	29.93	46.00	-16.07	AVG
12	3.2460	19.68	20.59	40.27	56.00	-15.73	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN Factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.






For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

6.3. Conducted Output Power

6.3.1. Test Specification

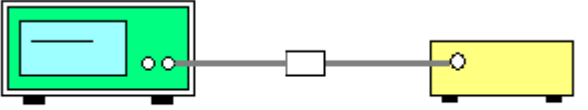Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074
Limit:	30dBm
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	- The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04. - Set spectrum analyzer as following: - Set the RBW $\geq$ DTS bandwidth. - Set VBW $\geq 3 \times$ RBW. - Set span $\geq 3 \times$ RBW - Sweep time = auto couple. - Detector = peak. - Trace mode = max hold. - Allow trace to fully stabilize. - Use peak marker function to determine the peak amplitude level.
Test Result:	PASS



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

6.3.2. Test Data

BLE 1M			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	-1.57	30.00	PASS
Middle	-0.27	30.00	PASS
Highest	-0.71	30.00	PASS

BLE 2M			
Test channel	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.43	30.00	PASS
Middle	-0.3	30.00	PASS
Highest	-0.57	30.00	PASS


Test plots as follows:






Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

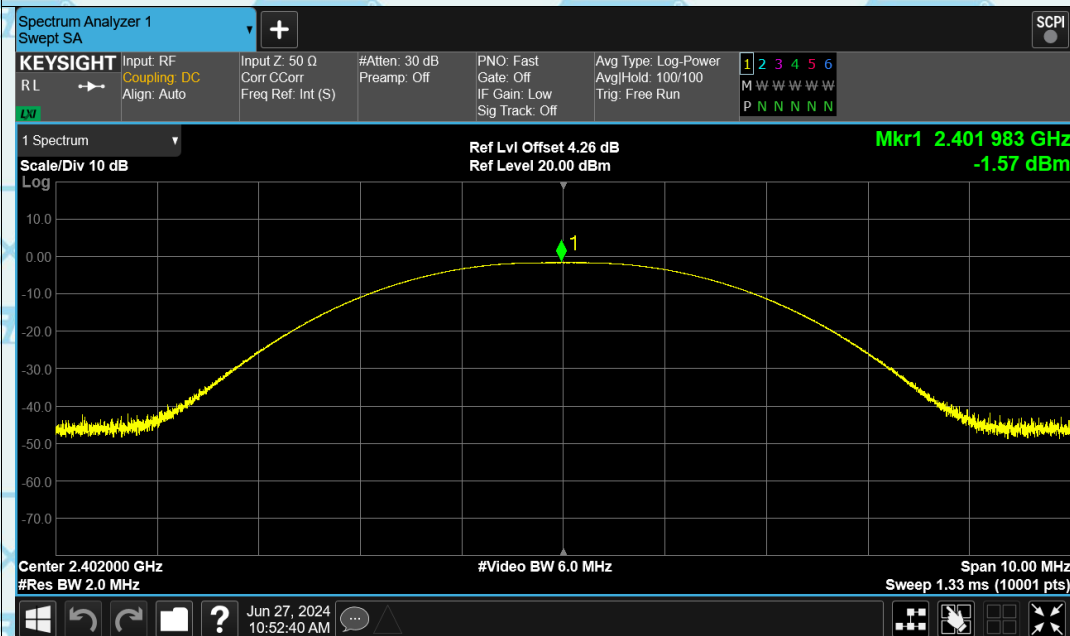


Power NVNT BLE 1M 2440MHz Ant1

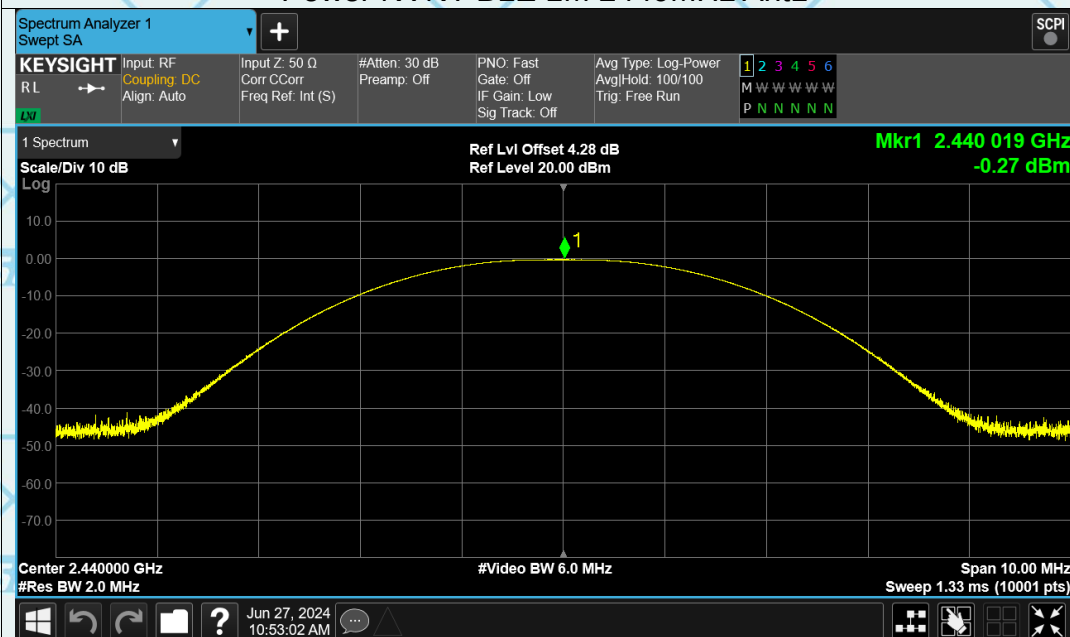




Power NVNT BLE 1M 2480MHz Ant1

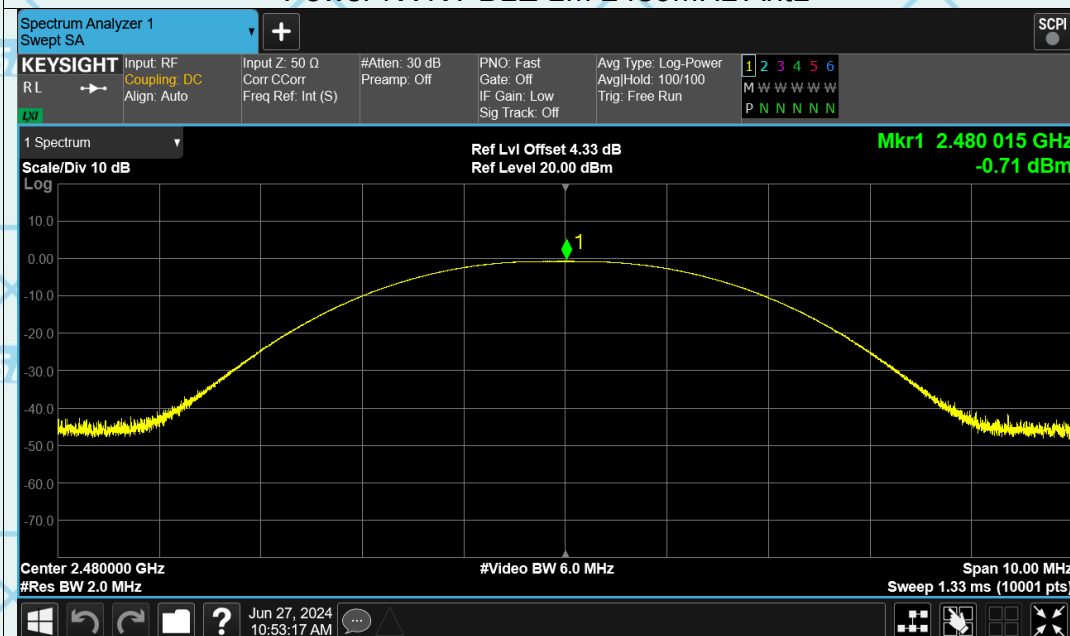


Power NVNT BLE 2M 2404MHz Ant1

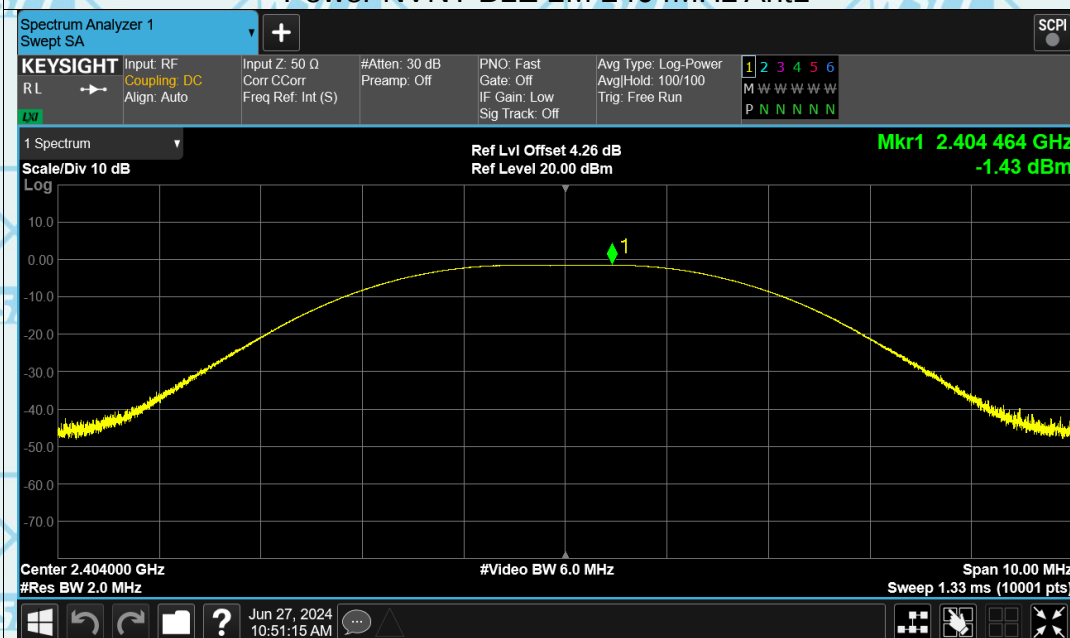




Power NVNT BLE 2M 2440MHz Ant1

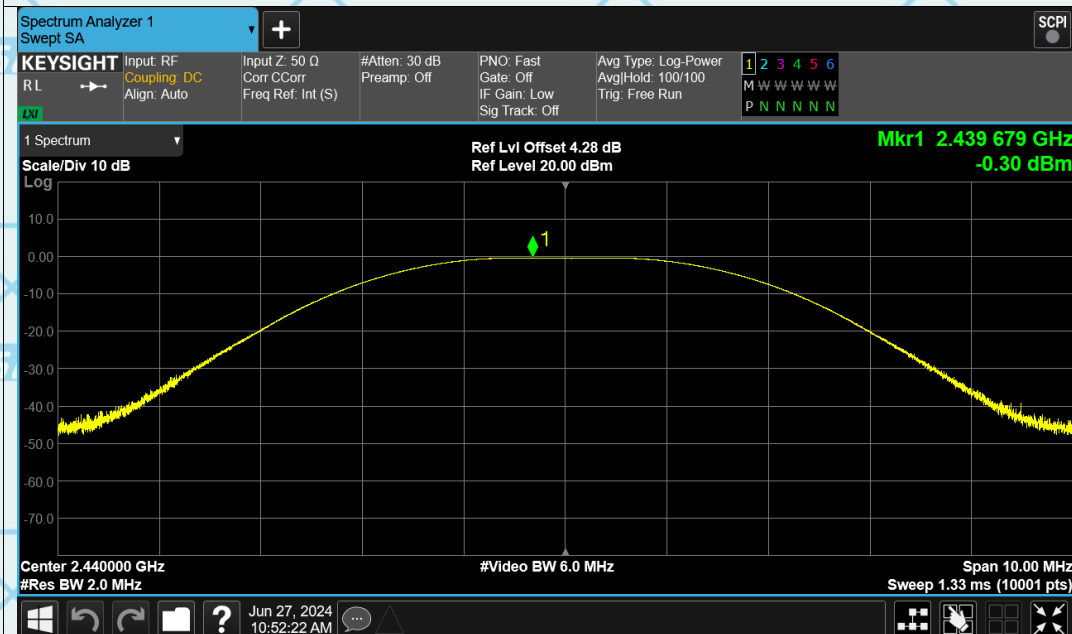

Power NVNT BLE 2M 2478MHz Ant1

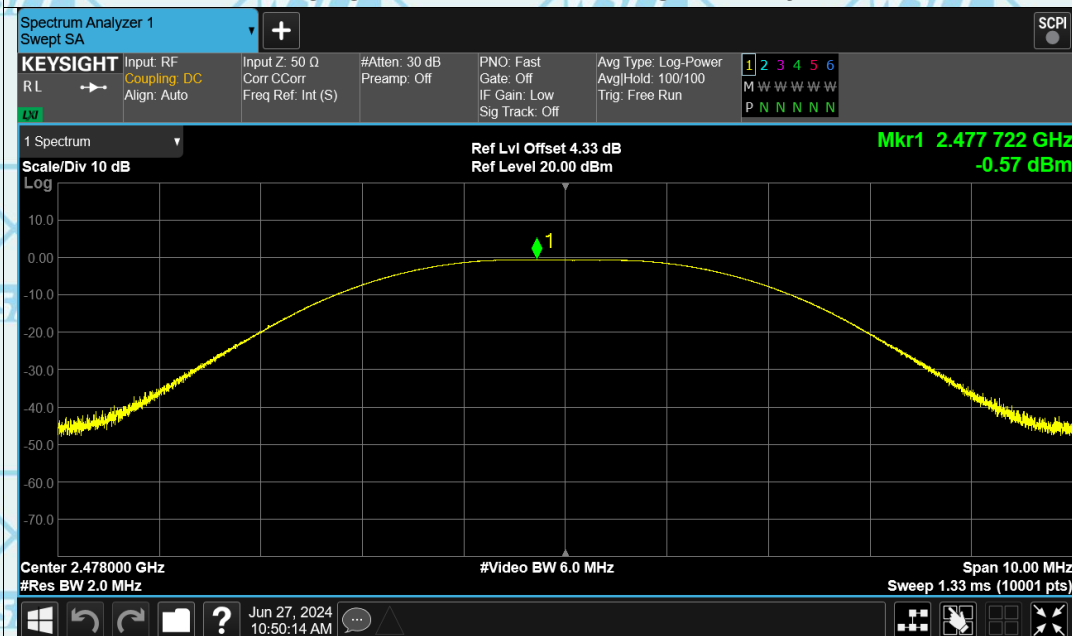




For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

6.4. Emission Bandwidth

6.4.1. Test Specification

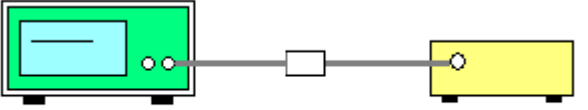Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS



Report No.: WSCT-ANAB-R&E240700032A-LE

6.4.2. Test data**BLE 1M**

Test channel	6dB Emission Bandwidth (kHz)		
	BT LE mode	Limit	Result
Lowest	0.6777	>500k	PASS
Middle	0.6652	>500k	
Highest	0.6622	>500k	

BLE 2M

Test channel	6dB Emission Bandwidth (kHz)		
	BT LE mode	Limit	Result
Lowest	1.133	>500k	PASS
Middle	1.145	>500k	
Highest	1.148	>500k	

Test plots as follows:



Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1



-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1






-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1




-6dB Bandwidth NVNT BLE 2M 2404MHz Ant1

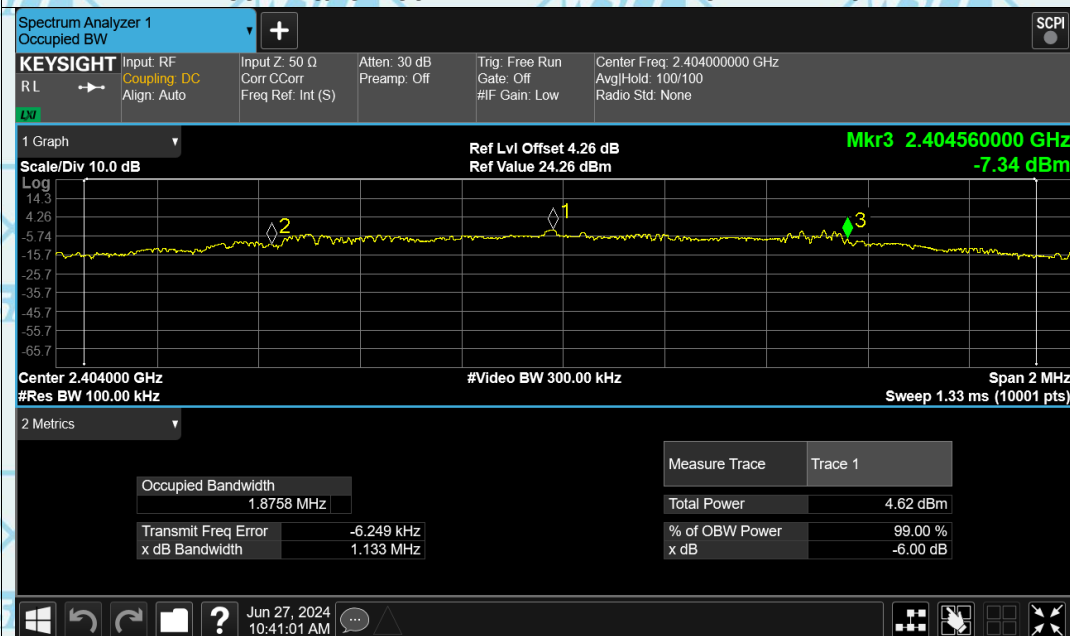




-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

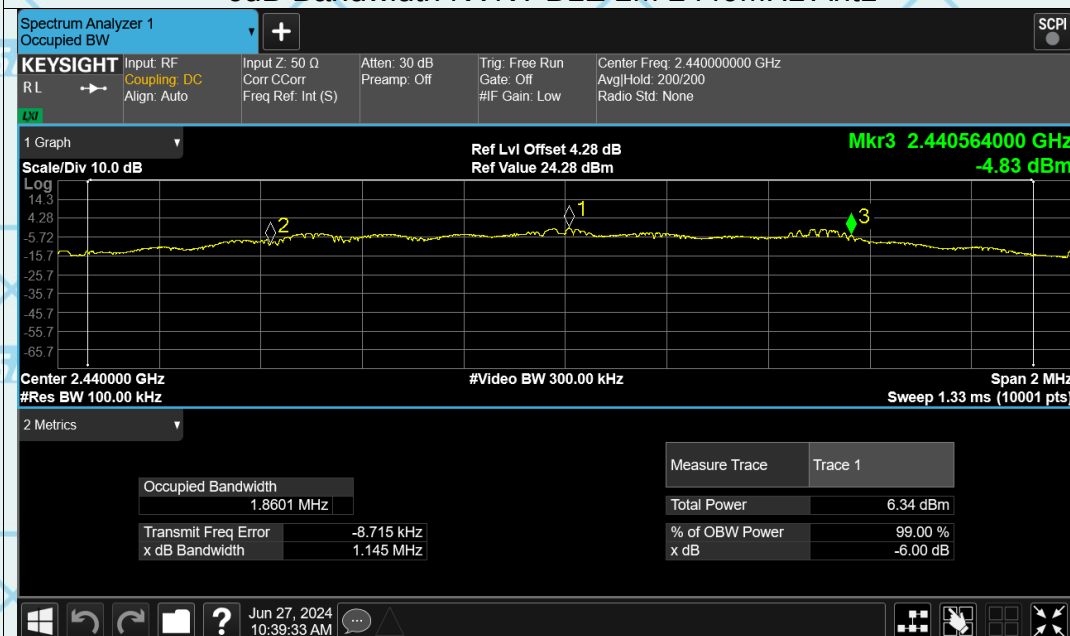

-6dB Bandwidth NVNT BLE 2M 2478MHz Ant1

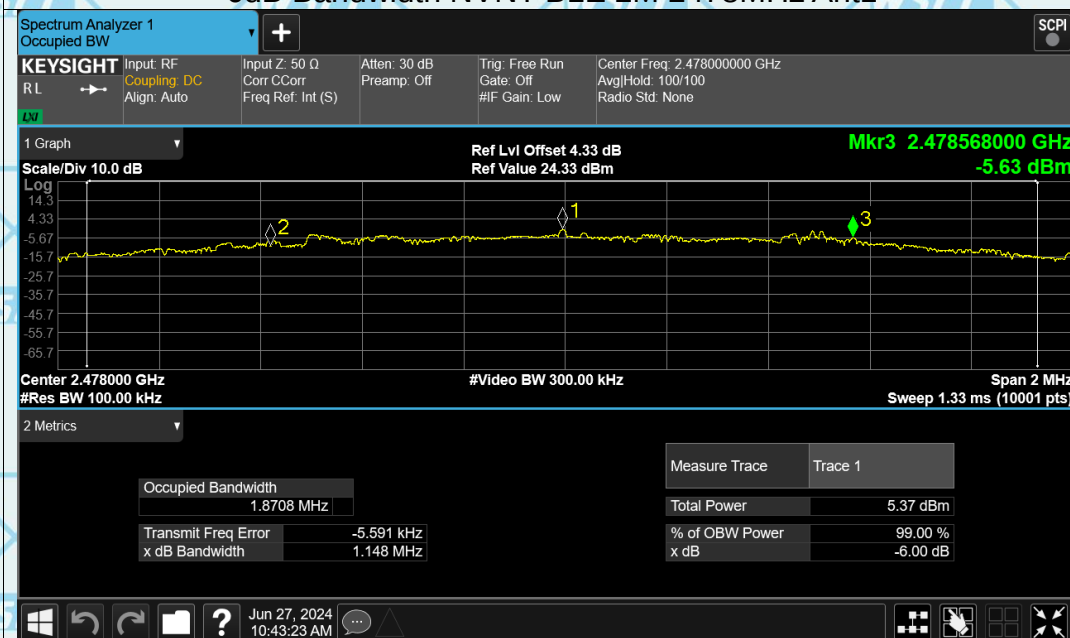



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

6.5. Power Spectral Density

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074
Limit:	The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. Video bandwidth VBW $\geq 3 \times \text{RBW}$. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW) 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 27, 2018
RF cable (9kHz-26.5GHz)	TCT	RE-06	N/A	Sep. 27, 2018
Antenna Connector	TCT	RFC-01	N/A	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

6.5.3. Test data

Test channel	Power Spectral Density (dBm/3kHz)		
	BLE 1M	Limit	Result
Lowest	-17.71	8 dBm/3kHz	PASS
Middle	-16.42	8 dBm/3kHz	
Highest	-16.91	8 dBm/3kHz	


Test channel	Power Spectral Density (dBm/3kHz)		
	BLE 2M	Limit	Result
Lowest	-20.02	8 dBm/3kHz	PASS
Middle	-18.89	8 dBm/3kHz	
Highest	-19.20	8 dBm/3kHz	

Test plots as follows:




Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

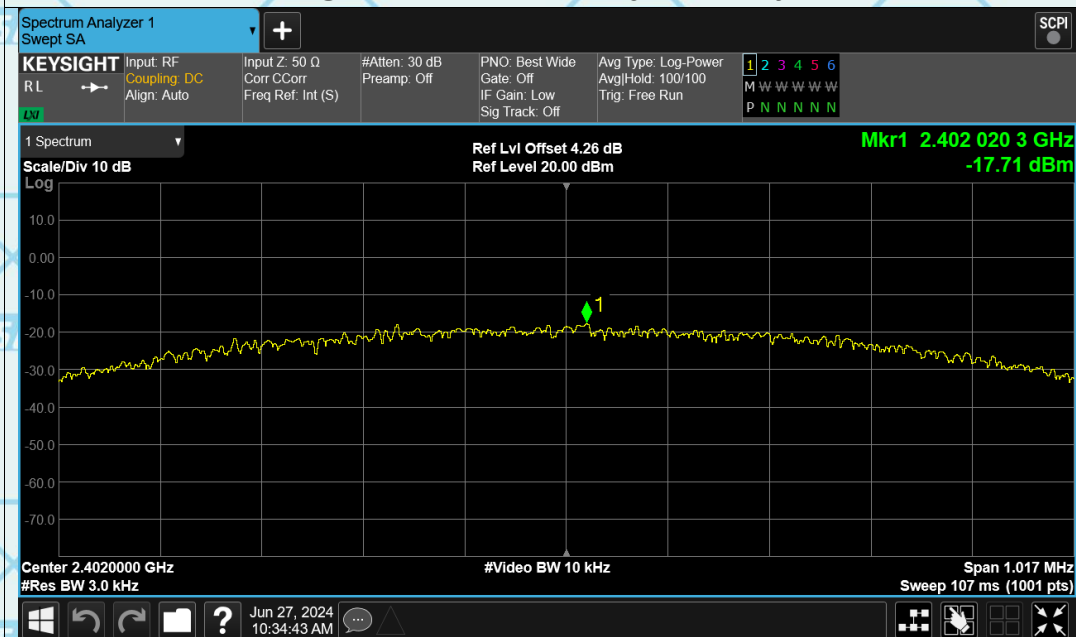


PSD NVNT BLE 1M 2440MHz Ant1

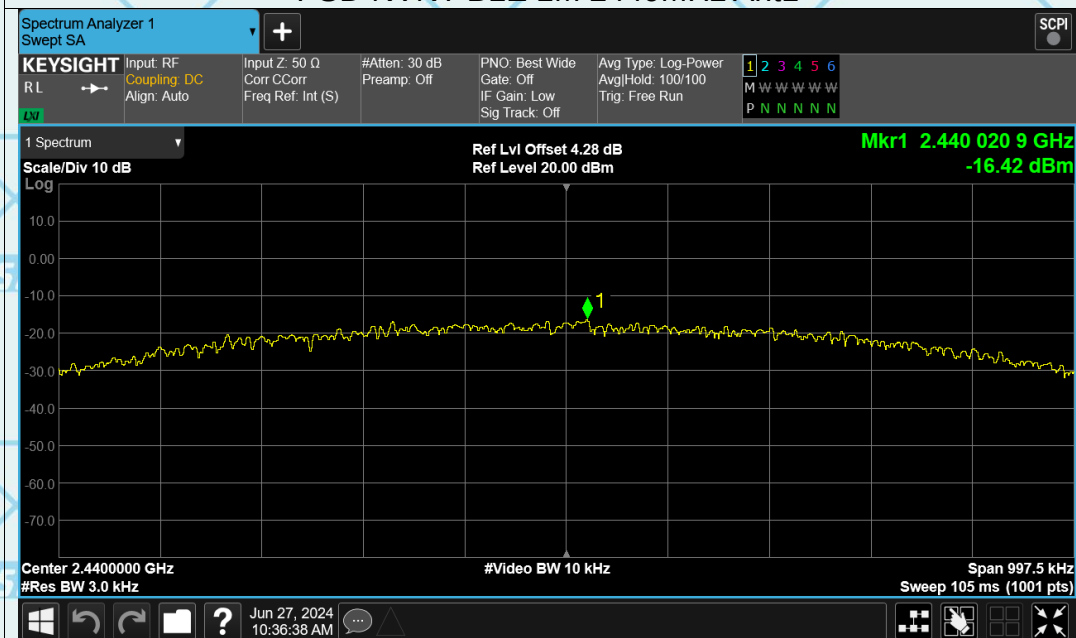




PSD NVNT BLE 1M 2480MHz Ant1

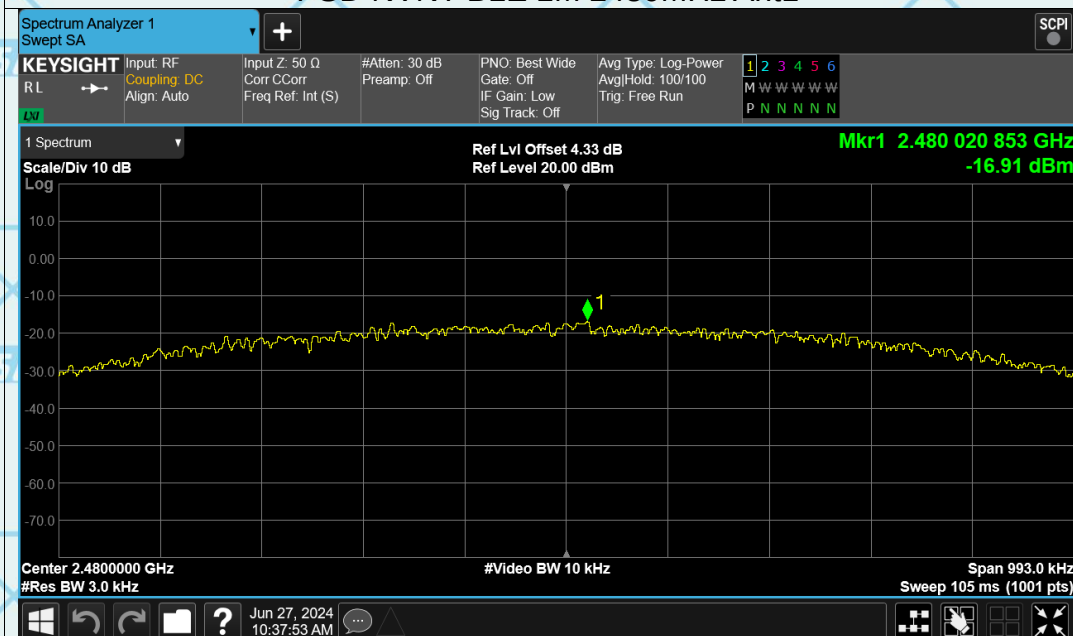


PSD NVNT BLE 2M 2404MHz Ant1

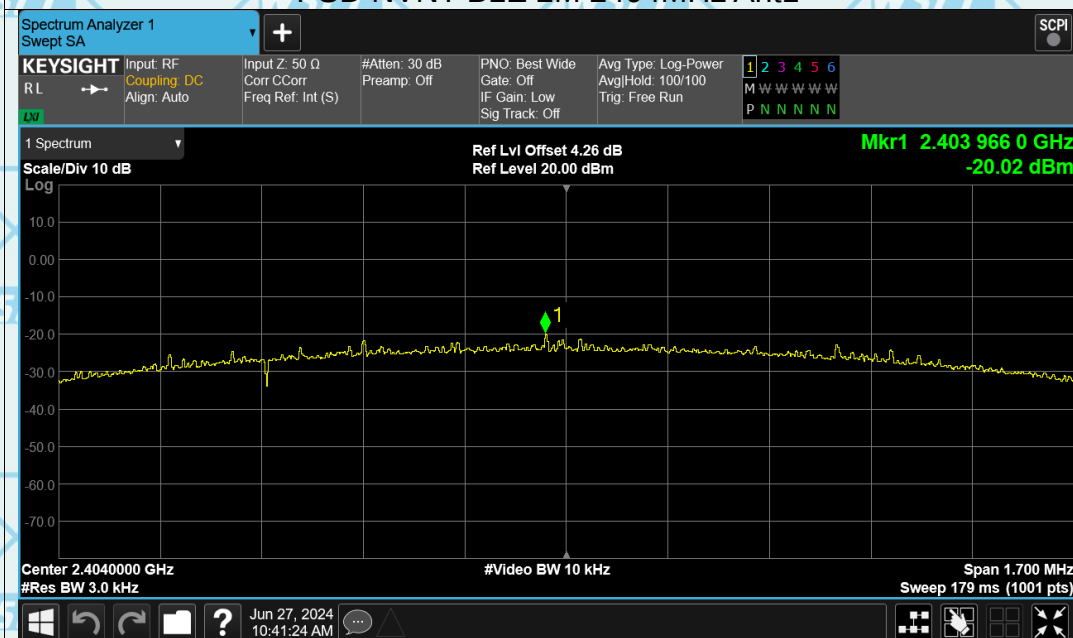




PSD NVNT BLE 2M 2440MHz Ant1

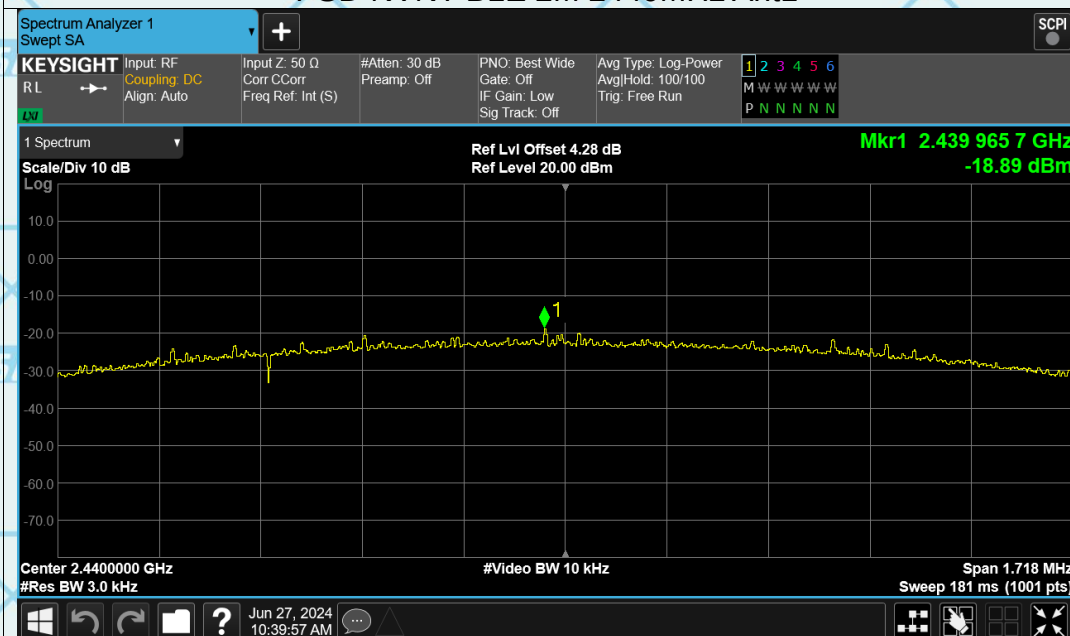

PSD NVNT BLE 2M 2478MHz Ant1

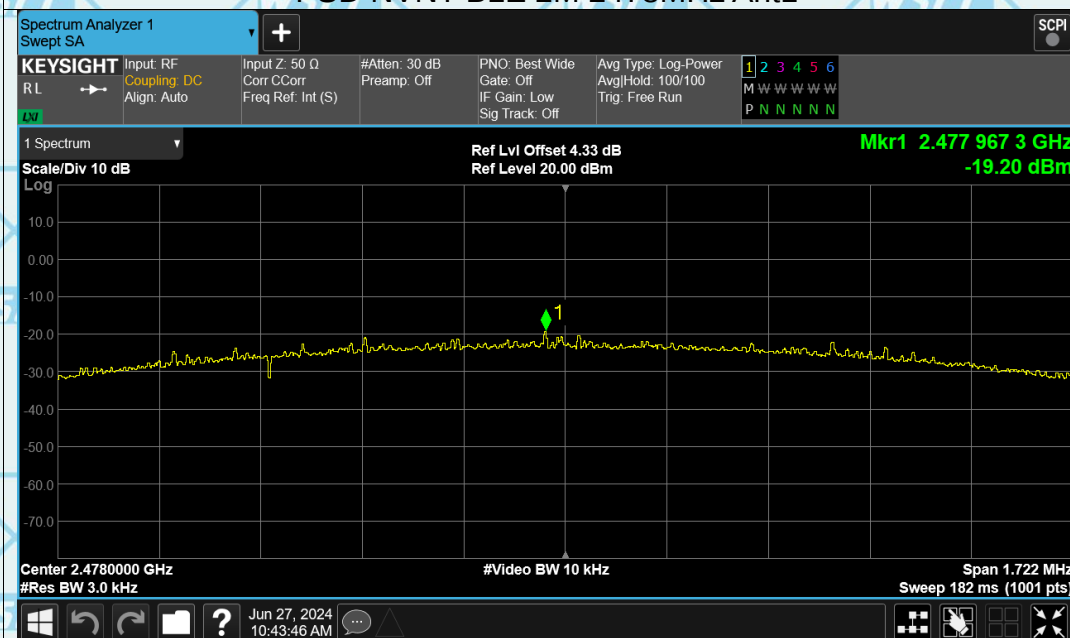



6.6. Conducted Band Edge and Spurious Emission Measurement

6.6.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to item 4.1
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 4. Measure and record the results in the test report. 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS




Report No.: WSCT-ANAB-R&E240700032A-LE


For Question,
Please Contact with WSCT
www.wsct-cert.comTest Data
Band Edge

Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

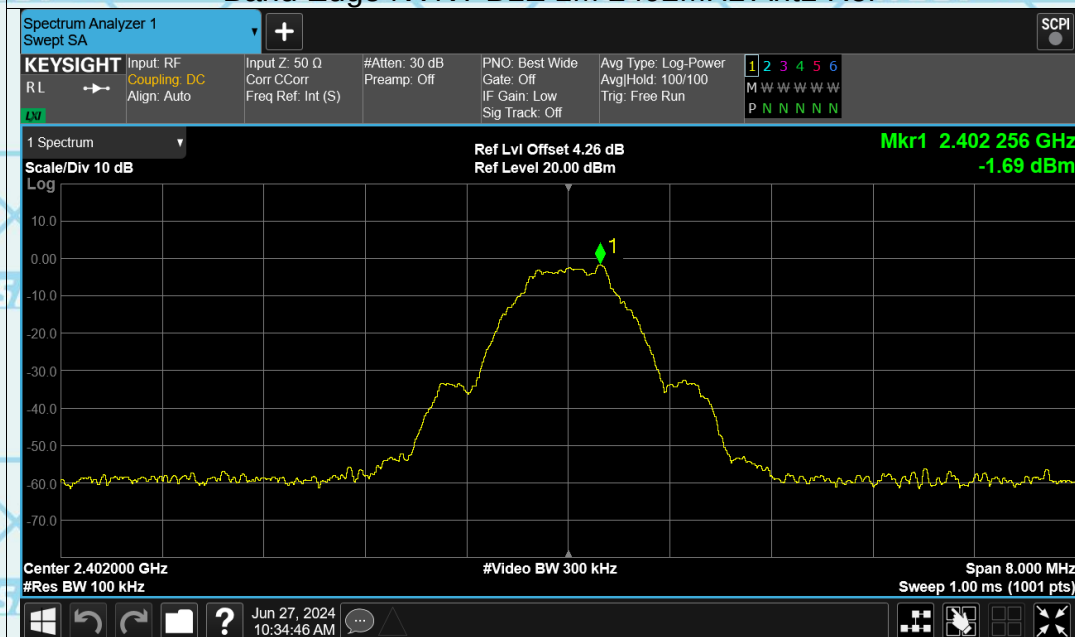


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

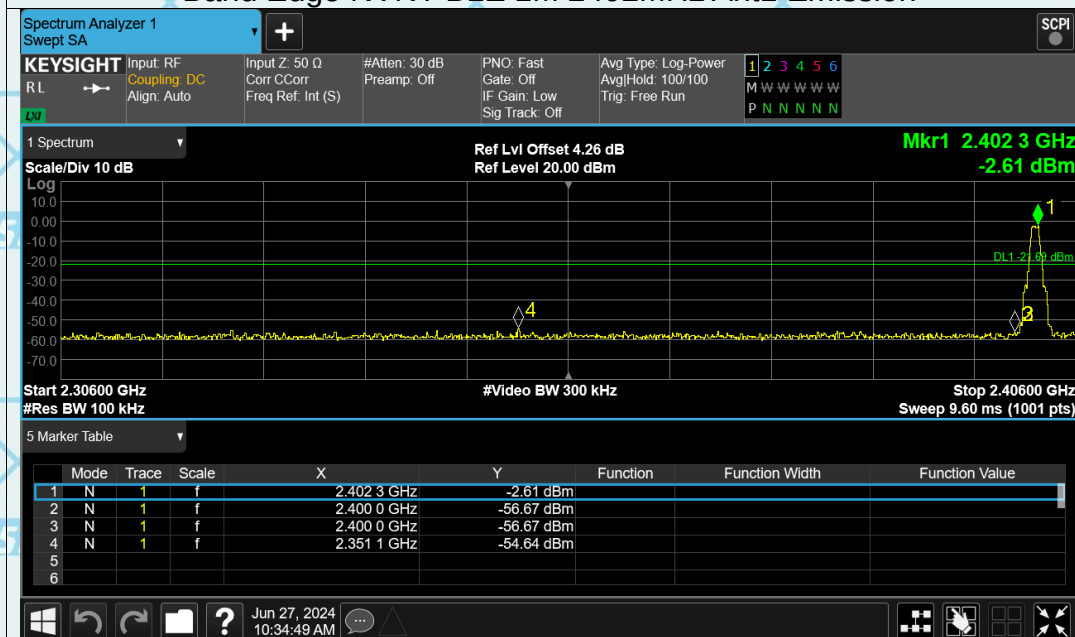




Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

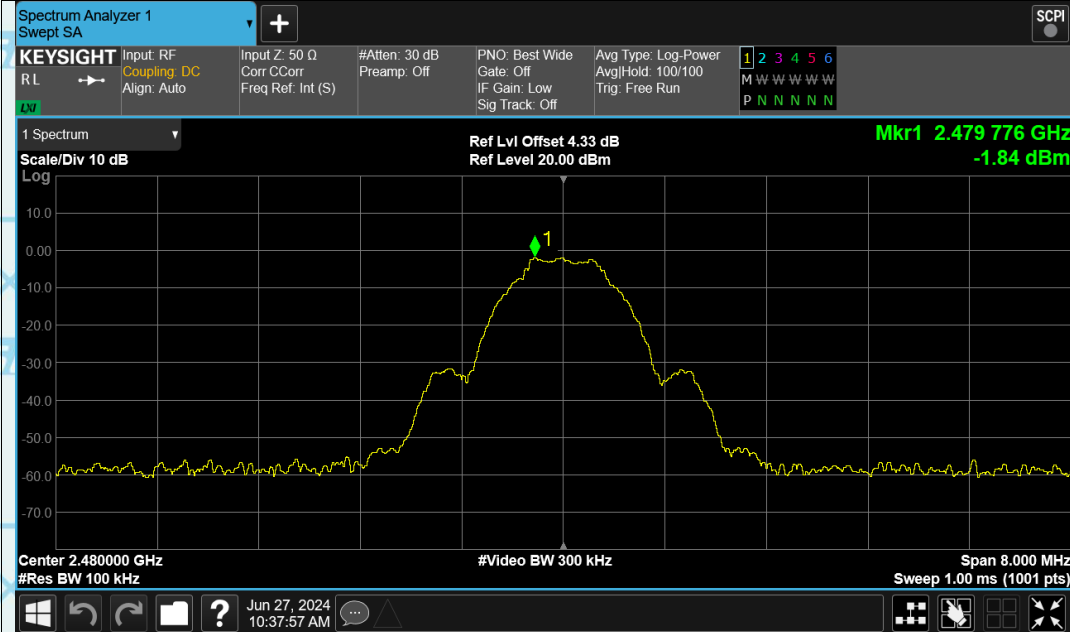


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

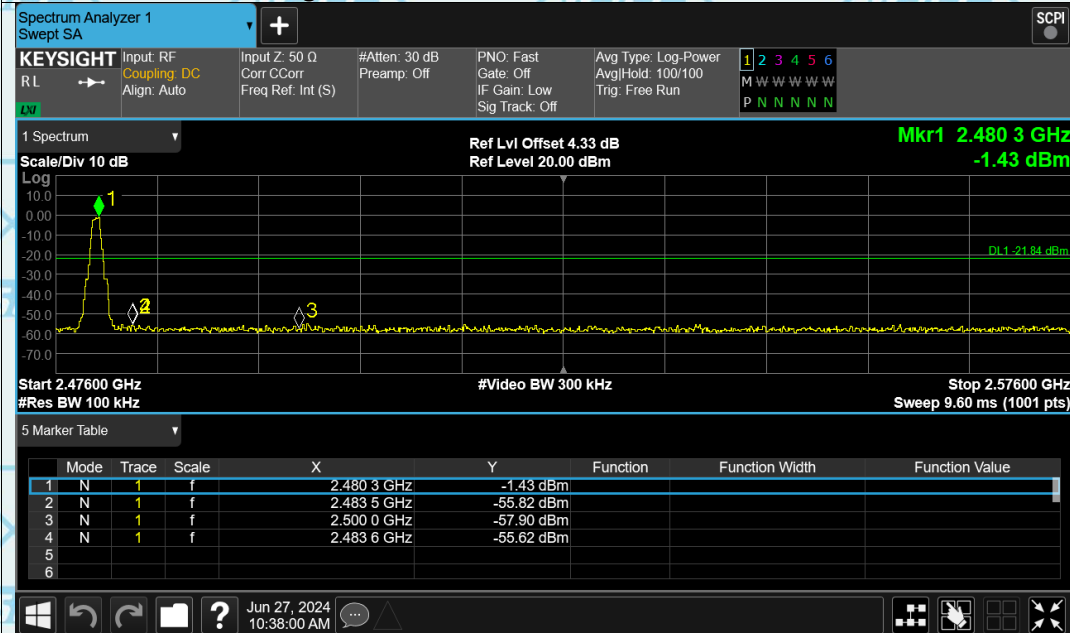




Band Edge NVNT BLE 2M 2404MHz Ant1 Ref

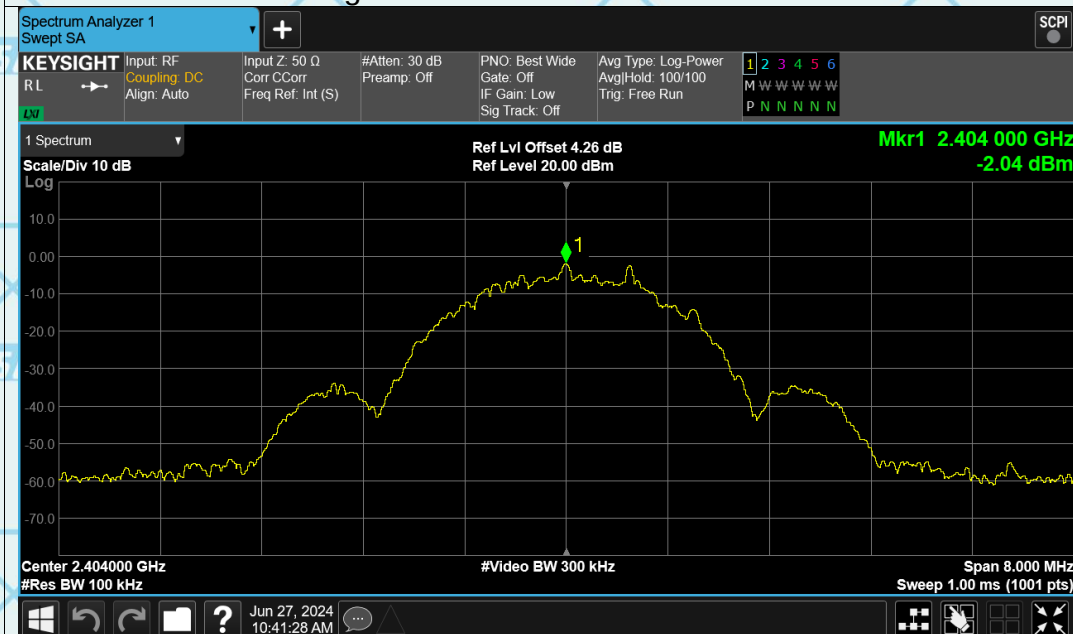


Band Edge NVNT BLE 2M 2404MHz Ant1 Emission

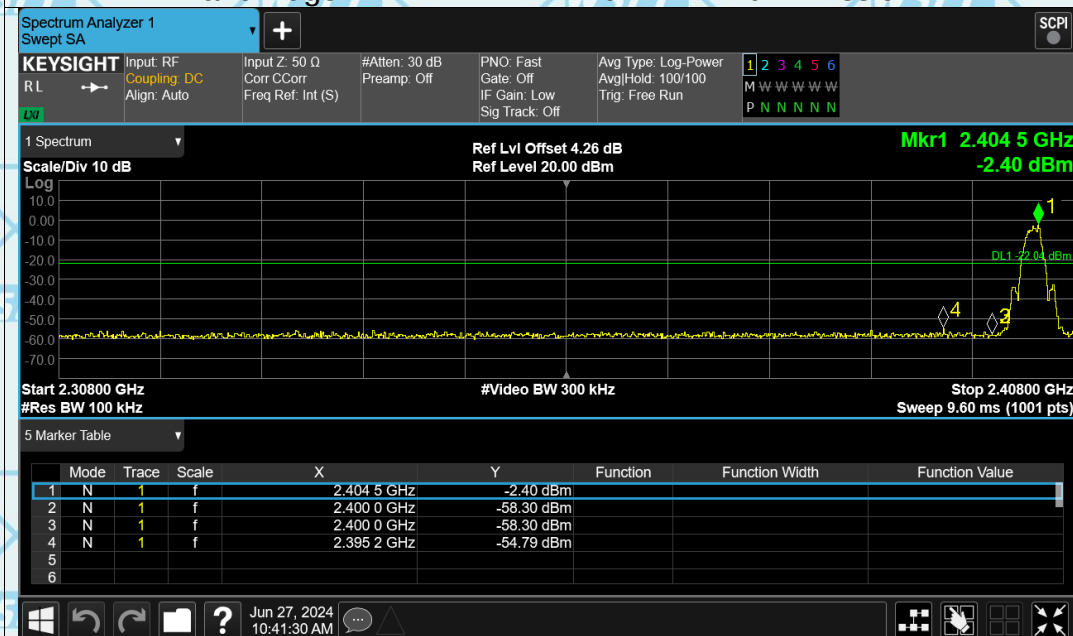




Band Edge NVNT BLE 2M 2478MHz Ant1 Ref

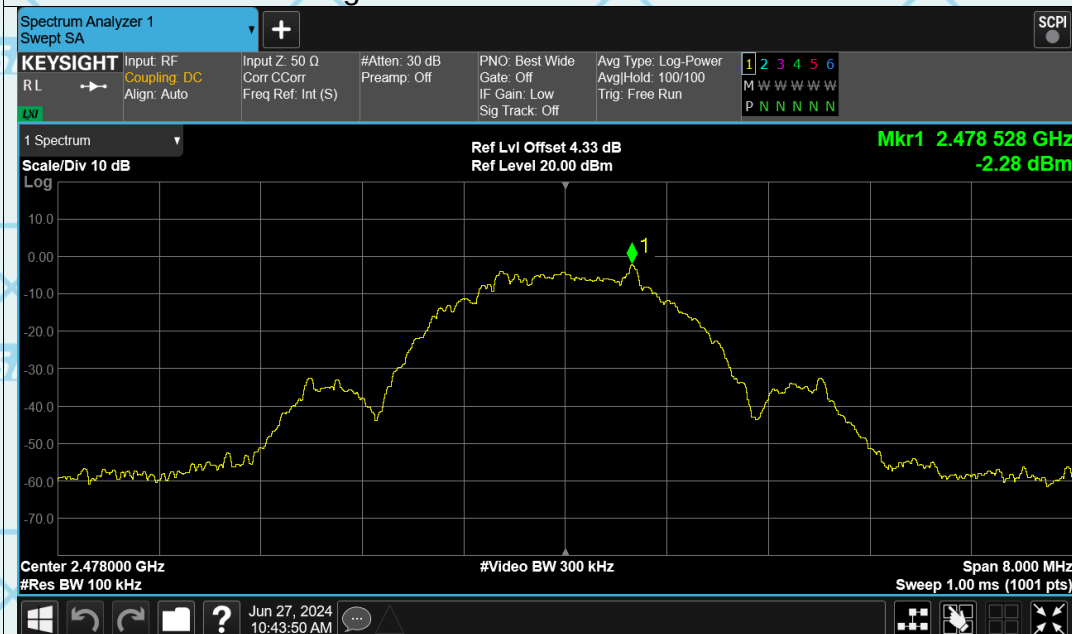

Band Edge NVNT BLE 2M 2478MHz Ant1 Emission

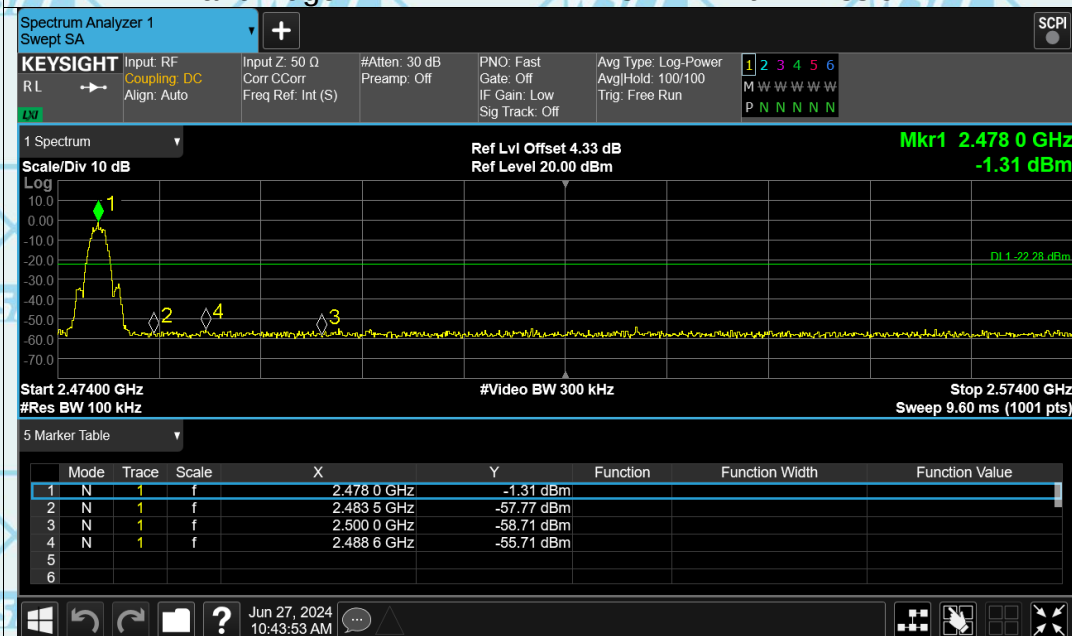




Report No.: WSCT-ANAB-R&E240700032A-LE
Conducted RF Spurious Emission

Certificate Number: AT-3951


For Question,
Please Contact with WSCT
www.wsct-cert.com

Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

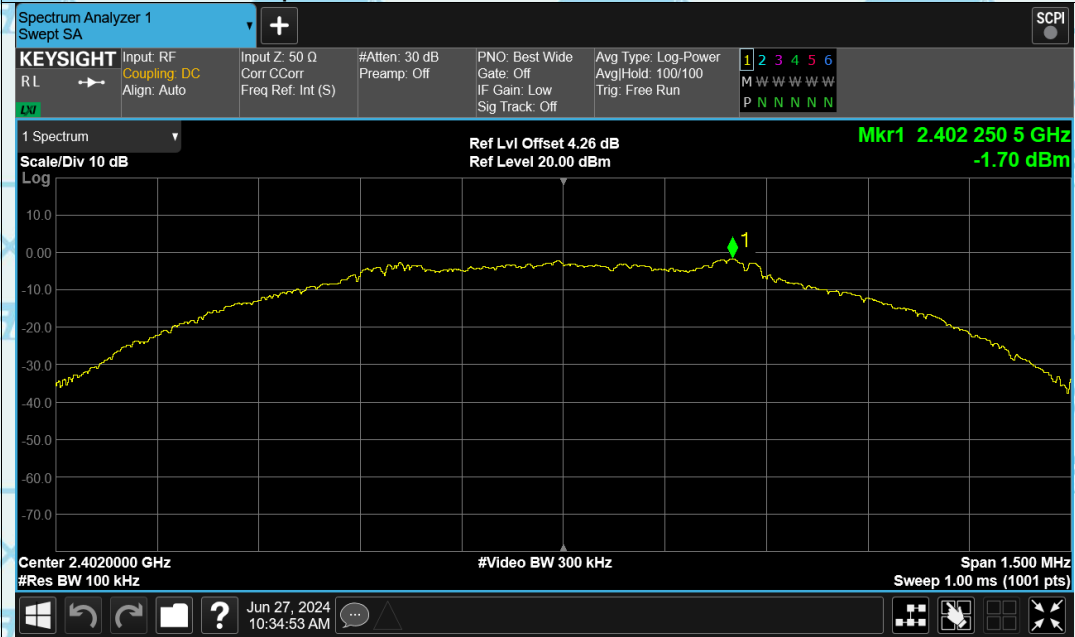


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

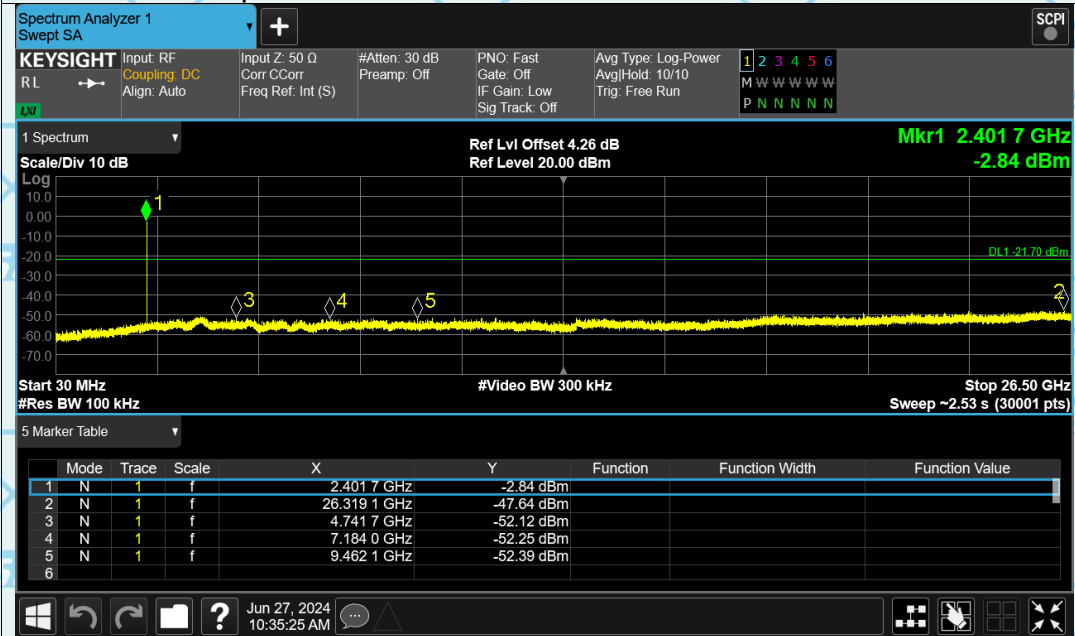




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

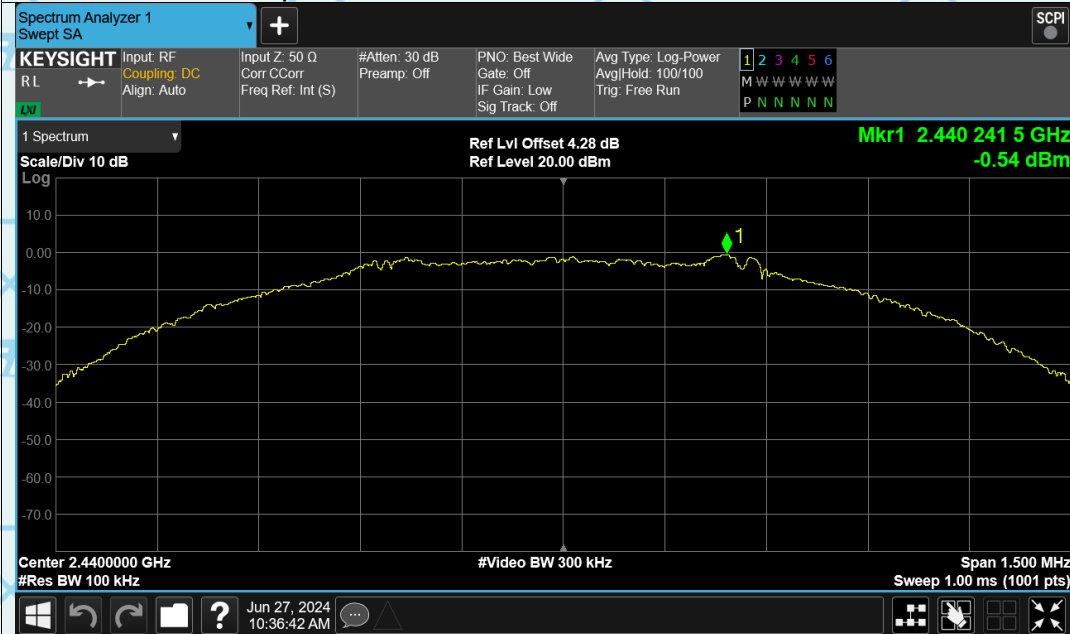


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

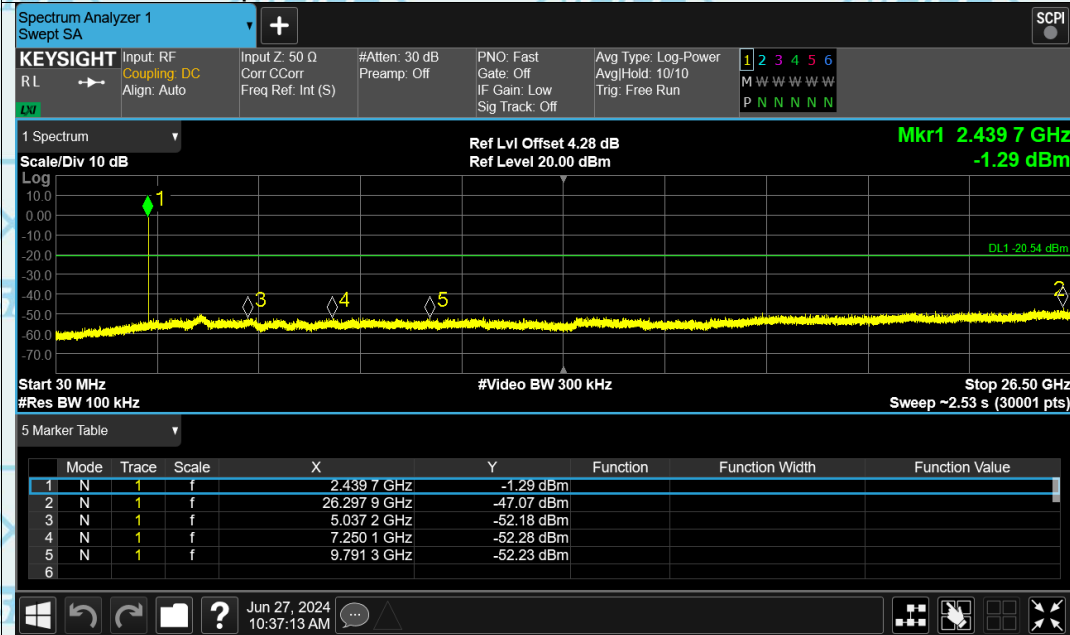




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

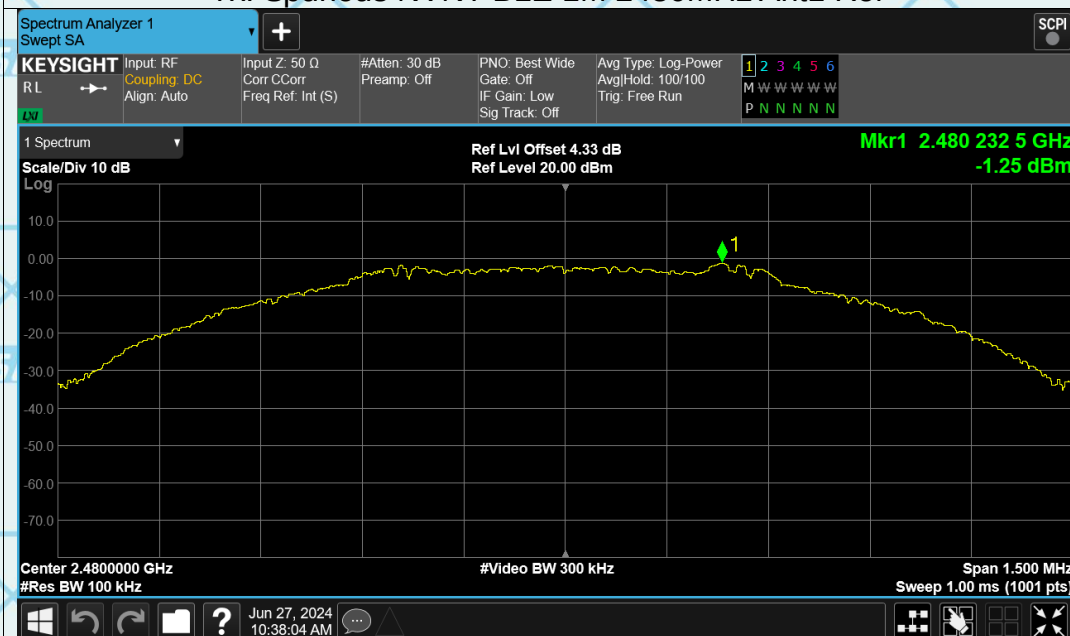


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

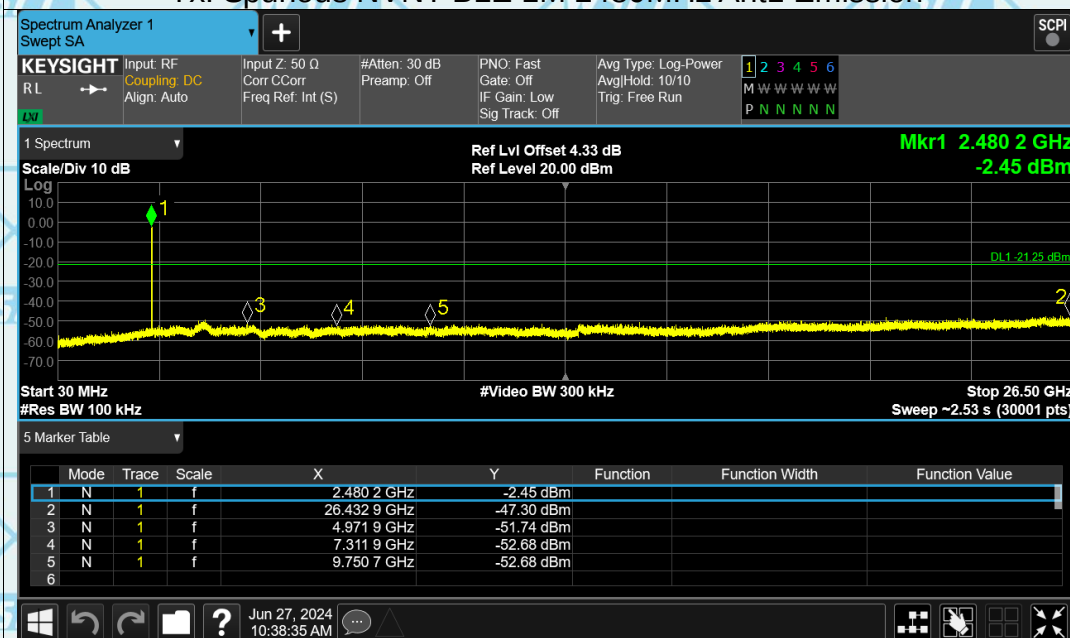




Tx. Spurious NVNT BLE 2M 2404MHz Ant1 Ref

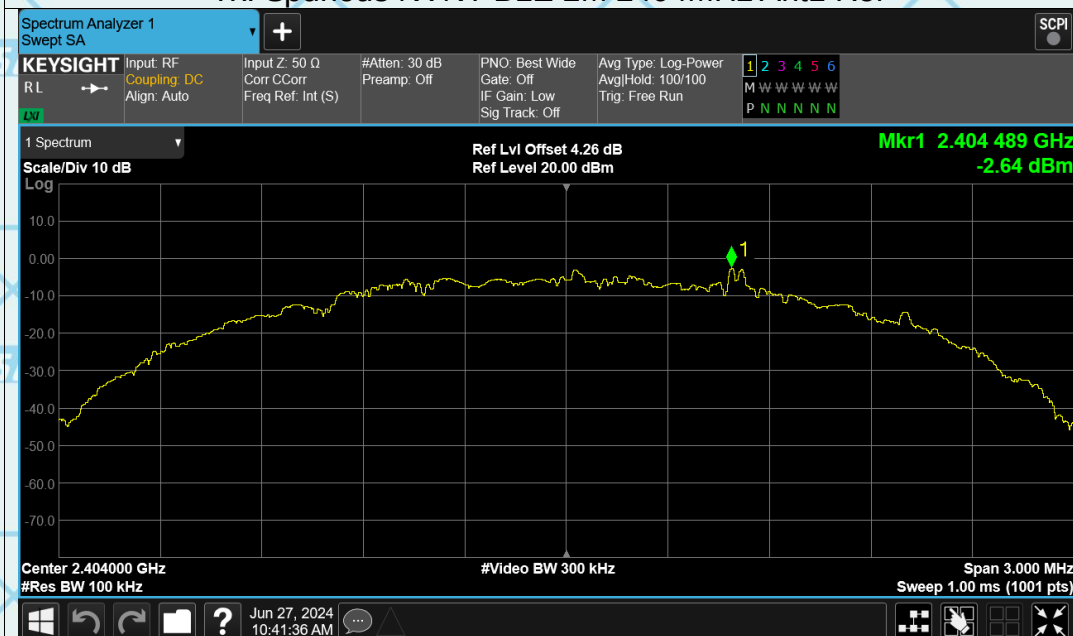


Tx. Spurious NVNT BLE 2M 2404MHz Ant1 Emission

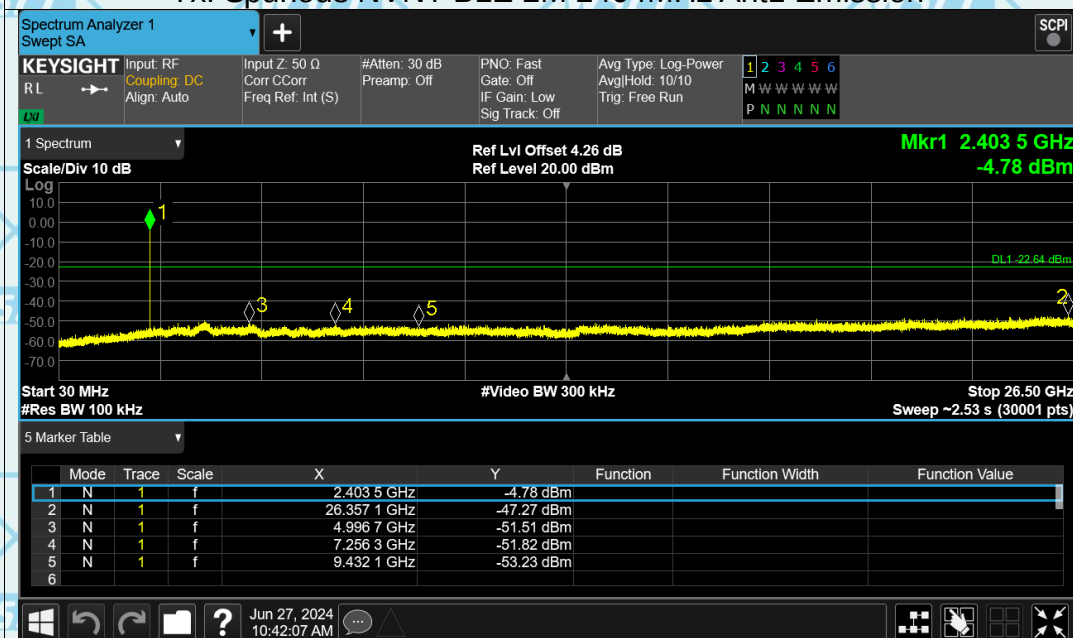




Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

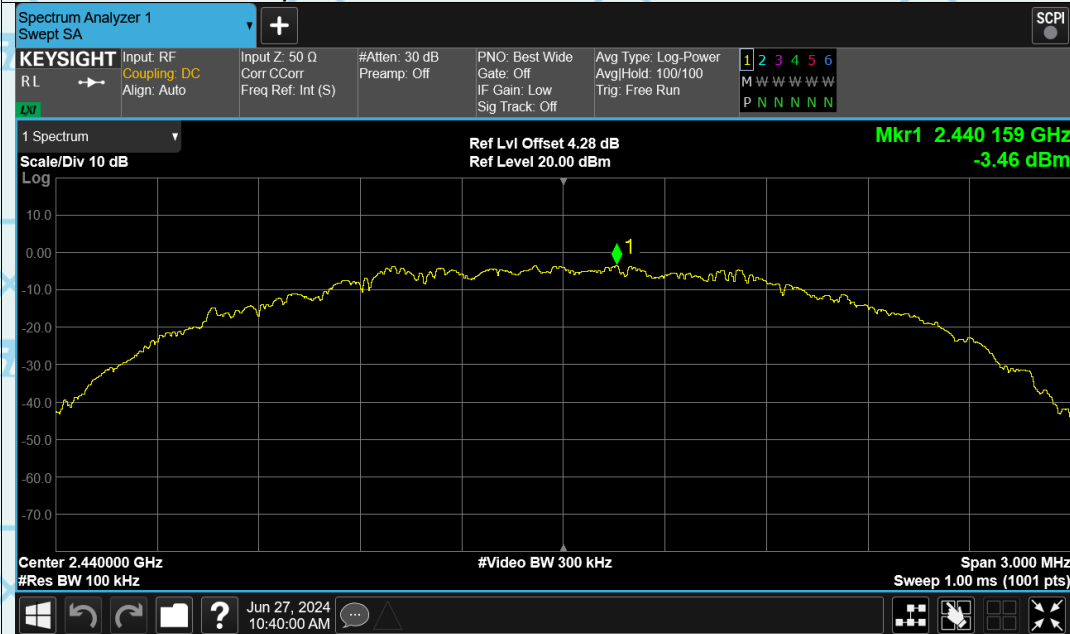


Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

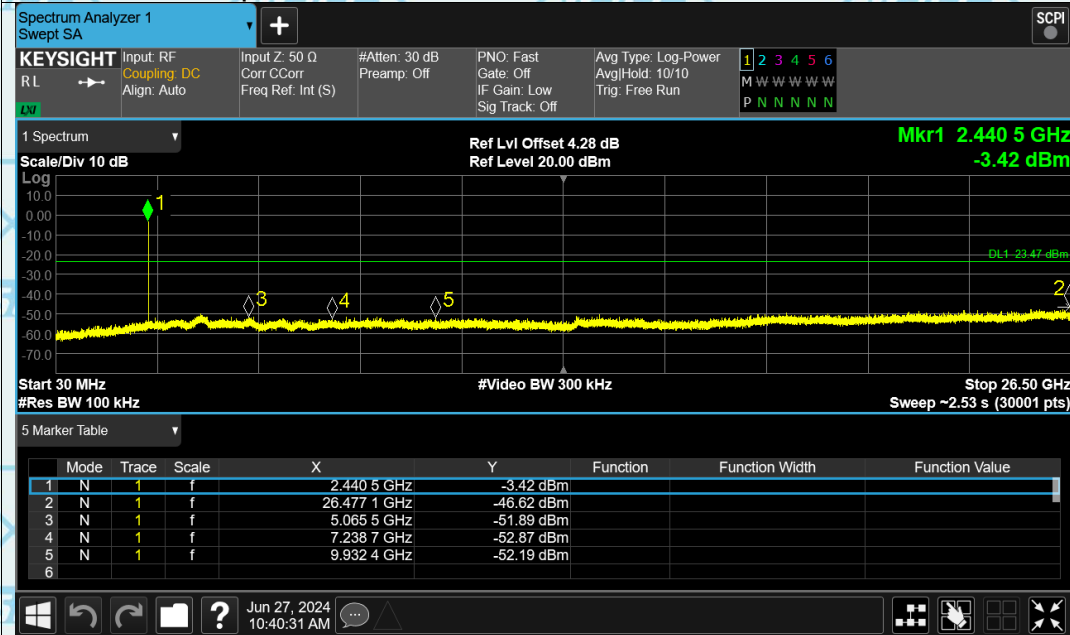




Tx. Spurious NVNT BLE 2M 2478MHz Ant1 Ref

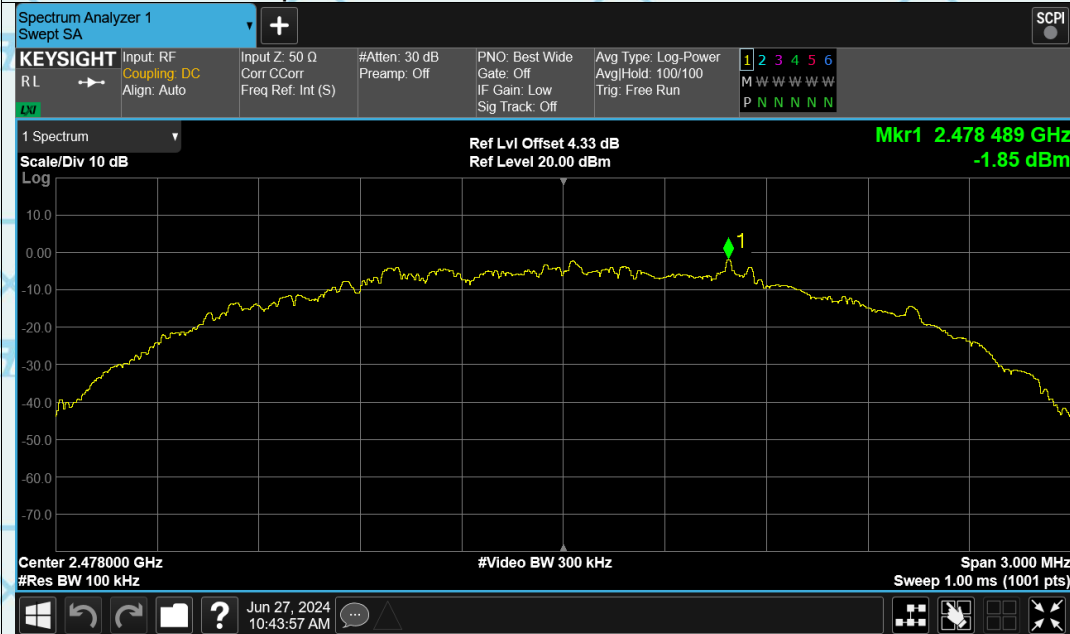


Tx. Spurious NVNT BLE 2M 2478MHz Ant1 Emission

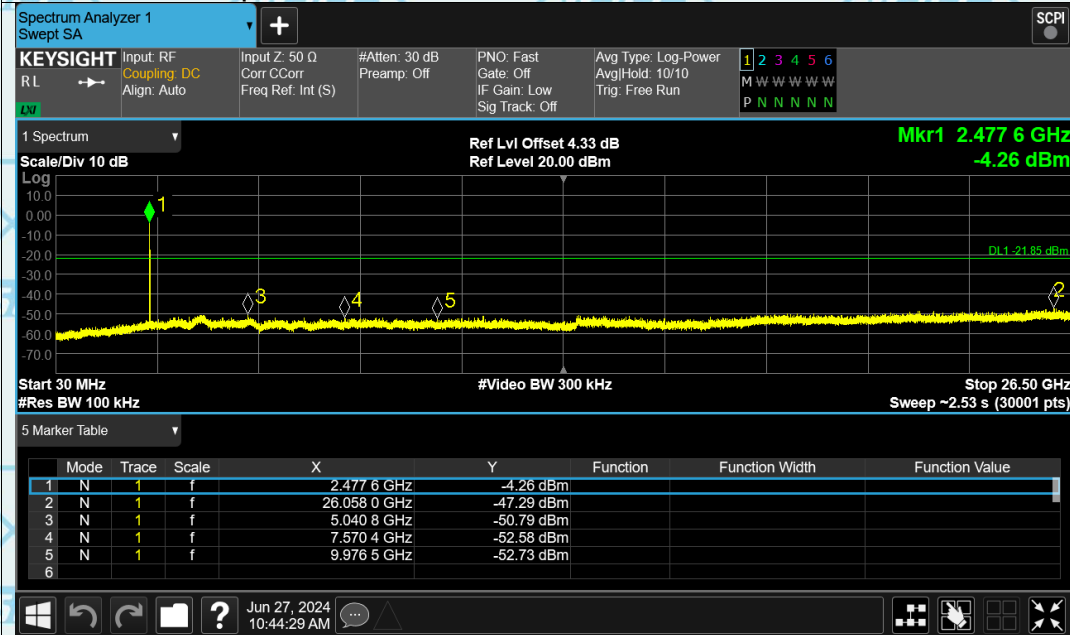




6.7. Radiated Spurious Emission Measurement

6.7.1. Test Specification

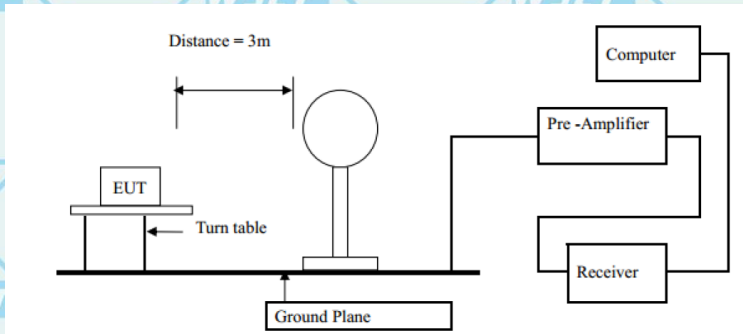
Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2014				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Refer to item 4.1				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)		300	
	0.490-1.705	24000/F(KHz)		30	
	1.705-30	30		30	
	30-88	100		3	
	88-216	150		3	
	216-960	200		3	
	Above 960	500		3	
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	
	Above 1GHz	500	3	Average	
5000		3	Peak		
Test setup:	For radiated emissions below 30MHz				
					
Test setup:	30MHz to 1GHz				



Question,
contact with WSCT
wsct-cert.com

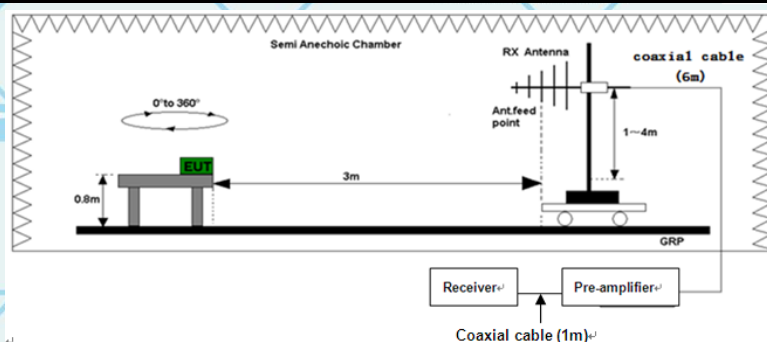

Above 1GHz

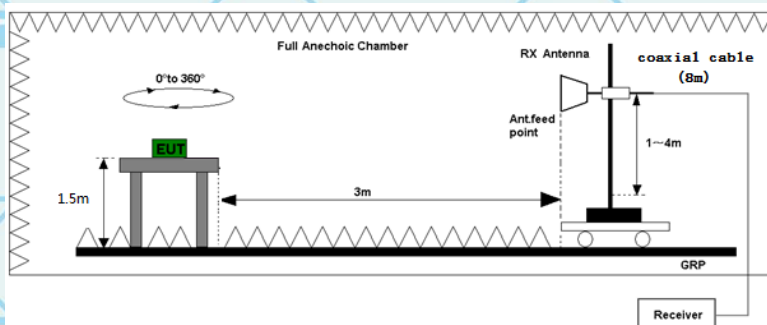**Test Procedure:**

1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.1 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
2. Corrected Reading: Antenna Factor + Cable Loss +



	Read Level - Preamp Factor = Level 3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

6.7.2. Test Data

Please refer to following diagram for individual
Below 1GHz

Horizontal:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	64.7728	43.06	-21.24	21.82	40.00	-18.18	QP
2 *	83.4490	50.48	-23.95	26.53	40.00	-13.47	QP
3	175.3439	45.62	-21.52	24.10	43.50	-19.40	QP
4	190.4050	44.28	-22.99	21.29	43.50	-22.21	QP
5	556.0427	32.82	-14.80	18.02	46.00	-27.98	QP
6	812.3991	33.25	-10.72	22.53	46.00	-23.47	QP



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-LE

Vertical:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	38.9220	53.58	-19.16	34.42	40.00	-5.58	QP
2	53.9527	50.99	-19.23	31.76	40.00	-8.24	QP
3	83.3028	57.83	-23.96	33.87	40.00	-6.13	QP
4	175.4977	42.47	-21.58	20.89	43.50	-22.61	QP
5	421.6879	32.84	-17.16	15.68	46.00	-30.32	QP
6	912.4620	42.08	-9.84	32.24	46.00	-13.76	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)



世标检测认证股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD: Building A-B, Baoli'an industrial Park, No. 58 Tangtuo Avenue, Shiyan Street, Bao'an District Shenzhen, Guangdong china
TEL: 86-755-26996192 226996053 Fax: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com

Member of the WSCT INC.



Report No.: WSCT-ANAB-R&E240700032A-LE

Above 1GHz

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3 BLE 1M and 2M both tested the report and only recorded the worst-case scenario 1M:

Low channel: 2402MHz

Horizontal:

**Susputed Data List**


NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1540.0000	23.71	-0.07	23.78	74	-50.29	2.5	Horizontal	PK	Pass
2	2404.3750	33.26	7.58	25.68	74	-40.74	248.4	Horizontal	PK	Pass
3	3182.5000	36.62	8.53	28.09	74	-37.38	0	Horizontal	PK	Pass
4	7554.0000	35.48	36.33	-0.85	74	-38.52	338.8	Horizontal	PK	Pass
5	10410.0000	43.15	38.67	4.48	74	-30.85	155.9	Horizontal	PK	Pass
6	13170.0000	44.7	39.34	5.36	74	-29.3	323.3	Horizontal	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1540.0000	14.9	-0.07	14.97	54	-39.1	2.5	Horizontal	AV	Pass
2	2404.3750	25.47	7.58	17.89	54	-28.53	248.4	Horizontal	AV	Pass
3	3182.5000	27.25	8.53	18.72	54	-26.75	0	Horizontal	AV	Pass
4	7554.0000	29.14	36.33	-7.19	54	-24.86	338.8	Horizontal	AV	Pass
5	10410.0000	35.36	38.67	-3.31	54	-18.64	155.9	Horizontal	AV	Pass
6	13170.0000	37.68	39.34	-1.66	54	-16.32	323.3	Horizontal	AV	Pass



Vertical:

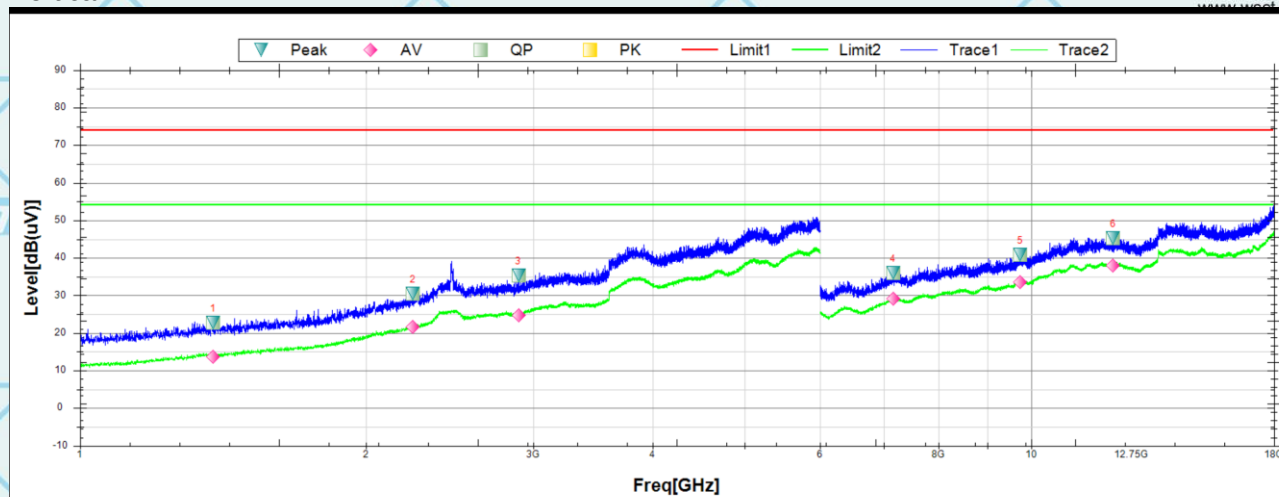

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1380.6250	22.7	-0.61	23.31	74	-51.3	-0.1	Vertical	PK	Pass
2	2240.6250	30.5	4.45	26.05	74	-43.5	100.1	Vertical	PK	Pass
3	2891.2500	35.29	7.28	28.01	74	-38.71	213.6	Vertical	PK	Pass
4	7161.0000	36.01	35.74	0.27	74	-37.99	69.8	Vertical	PK	Pass
5	9744.0000	40.84	37.92	2.92	74	-33.16	0.5	Vertical	PK	Pass
6	12199.5000	45.15	38.66	6.49	74	-28.85	84.2	Vertical	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1380.6250	13.76	-0.61	14.37	54	-40.24	-0.1	Vertical	AV	Pass
2	2240.6250	21.51	4.45	17.06	54	-32.49	100.1	Vertical	AV	Pass
3	2891.2500	24.73	7.28	17.45	54	-29.27	213.6	Vertical	AV	Pass
4	7161.0000	29.06	35.74	-6.68	54	-24.94	69.8	Vertical	AV	Pass
5	9744.0000	33.63	37.92	-4.29	54	-20.37	0.5	Vertical	AV	Pass
6	12199.5000	37.91	38.66	-0.75	54	-16.09	84.2	Vertical	AV	Pass





Report No.: WSCT-ANAB-R&E240700032A-LE

For Question,
Please Contact with WSCT
www.wsct-cert.com

Middle channel: 2440MHz

Horizontal:



Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1261.2500	22.24	-1.5	23.74	74	-51.76	238.8	Horizontal	PK	Pass
2	2283.1250	31.29	4.73	26.56	74	-42.71	2.9	Horizontal	PK	Pass
3	3304.3750	35.78	8.76	27.02	74	-38.22	100.1	Horizontal	PK	Pass
4	7219.5000	36.57	35.83	0.74	74	-37.43	13	Horizontal	PK	Pass
5	10767.0000	43.69	39.17	4.52	74	-30.31	9.4	Horizontal	PK	Pass
6	13459.5000	45.17	40.09	5.08	74	-28.83	201.3	Horizontal	PK	Pass


Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1261.2500	13.1	-1.5	14.6	54	-40.9	238.8	Horizontal	AV	Pass
2	2283.1250	21.88	4.73	17.15	54	-32.12	2.9	Horizontal	AV	Pass
3	3304.3750	27.35	8.76	18.59	54	-26.65	100.1	Horizontal	AV	Pass
4	7219.5000	28.98	35.83	-6.85	54	-25.02	13	Horizontal	AV	Pass
5	10767.0000	36.25	39.17	-2.92	54	-17.75	9.4	Horizontal	AV	Pass
6	13459.5000	38.48	40.09	-1.61	54	-15.52	201.3	Horizontal	AV	Pass





Vertical:

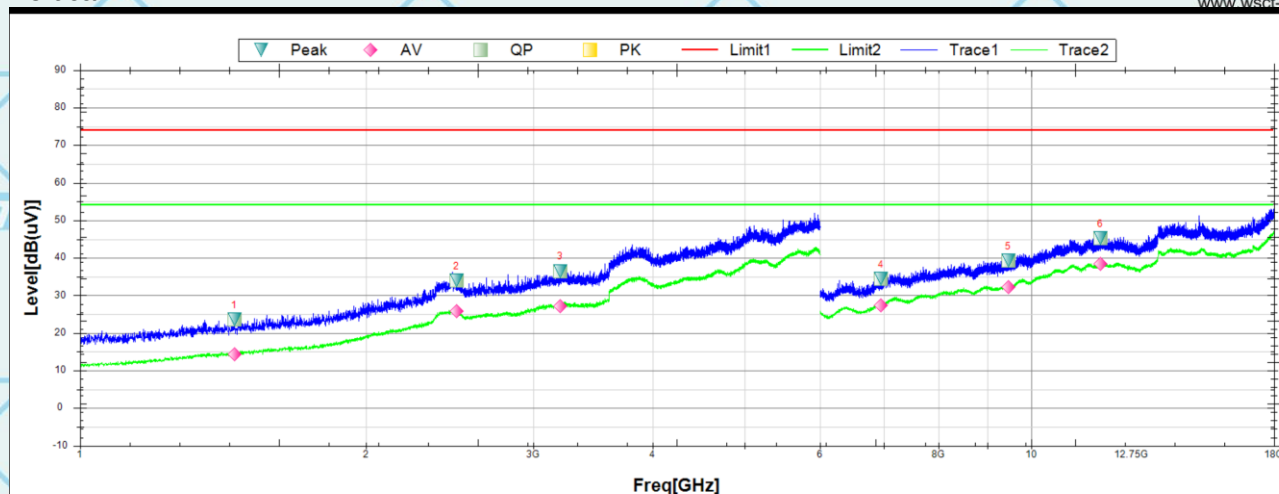

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1453.1250	23.55	-0.34	23.89	74	-50.45	322.5	Vertical	PK	Pass
2	2489.3750	33.91	7.76	26.15	74	-40.09	-0.1	Vertical	PK	Pass
3	3199.3750	36.51	8.71	27.8	74	-37.49	1.9	Vertical	PK	Pass
4	6954.0000	34.33	35.38	-1.05	74	-39.67	134.3	Vertical	PK	Pass
5	9463.5000	39.25	37.72	1.53	74	-34.75	108.1	Vertical	PK	Pass
6	11824.5000	45.22	38.76	6.46	74	-28.78	41.1	Vertical	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1453.1250	14.42	-0.34	14.76	54	-39.58	322.5	Vertical	AV	Pass
2	2489.3750	25.74	7.76	17.98	54	-28.26	-0.1	Vertical	AV	Pass
3	3199.3750	27.14	8.71	18.43	54	-26.86	1.9	Vertical	AV	Pass
4	6954.0000	27.4	35.38	-7.98	54	-26.6	134.3	Vertical	AV	Pass
5	9463.5000	32.11	37.72	-5.61	54	-21.89	108.1	Vertical	AV	Pass
6	11824.5000	38.32	38.76	-0.44	54	-15.68	41.1	Vertical	AV	Pass



Report No.: WSCT-ANAB-R&E240700032A-LE

For Question,
Please Contact with WSCT
www.wsct-cert.com

High channel: 2480MHz

Horizontal:



Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1303.1250	22.16	-1.22	23.38	74	-51.84	2.6	Horizontal	PK	Pass
2	2023.7500	27.45	2.69	24.76	74	-46.55	72.8	Horizontal	PK	Pass
3	3168.1250	35.76	8.37	27.39	74	-38.24	344.4	Horizontal	PK	Pass
4	7482.0000	35.54	36.22	-0.68	74	-38.46	109.3	Horizontal	PK	Pass
5	9849.0000	41.23	37.99	3.24	74	-32.77	299.3	Horizontal	PK	Pass
6	12097.5000	45.54	38.63	6.91	74	-28.46	251.5	Horizontal	PK	Pass

Final Data List


NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1303.1250	13.45	-1.22	14.67	54	-40.55	2.6	Horizontal	AV	Pass
2	2023.7500	19.39	2.69	16.7	54	-34.61	72.8	Horizontal	AV	Pass
3	3168.1250	27.15	8.37	18.78	54	-26.85	344.4	Horizontal	AV	Pass
4	7482.0000	28.19	36.22	-8.03	54	-25.81	109.3	Horizontal	AV	Pass
5	9849.0000	33.48	37.99	-4.51	54	-20.52	299.3	Horizontal	AV	Pass
6	12097.5000	37.93	38.63	-0.7	54	-16.07	251.5	Horizontal	AV	Pass



Report No.: WSCT-ANAB-R&E240700032A-LE

For Question,
Please Contact with WSCT
www.wsct-cert.com

Vertical:

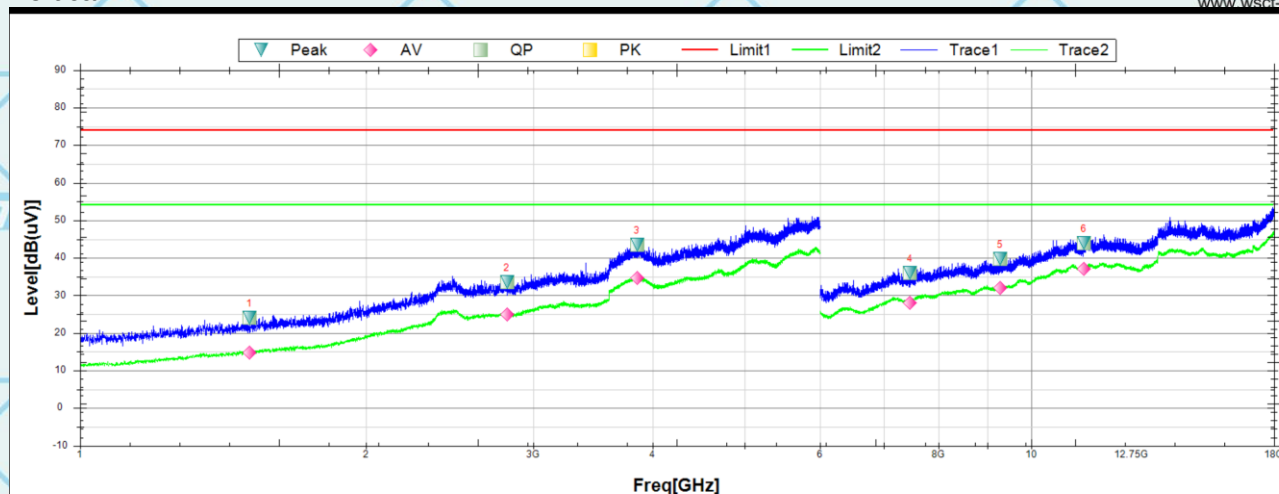

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1507.5000	24.04	-0.26	24.3	74	-49.96	94.9	Vertical	PK	Pass
2	2811.2500	33.5	7.25	26.25	74	-40.5	360	Vertical	PK	Pass
3	3852.5000	43.43	11.34	32.09	74	-30.57	3.1	Vertical	PK	Pass
4	7461.0000	35.98	36.19	-0.21	74	-38.02	247.2	Vertical	PK	Pass
5	9280.5000	39.77	37.6	2.17	74	-34.23	78.6	Vertical	PK	Pass
6	11361.0000	43.85	39.18	4.67	74	-30.15	208.9	Vertical	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1507.5000	14.78	-0.26	15.04	54	-39.22	94.9	Vertical	AV	Pass
2	2811.2500	24.95	7.25	17.7	54	-29.05	360	Vertical	AV	Pass
3	3852.5000	34.63	11.34	23.29	54	-19.37	3.1	Vertical	AV	Pass
4	7461.0000	28.02	36.19	-8.17	54	-25.98	247.2	Vertical	AV	Pass
5	9280.5000	31.88	37.6	-5.72	54	-22.12	78.6	Vertical	AV	Pass
6	11361.0000	37.17	39.18	-2.01	54	-16.83	208.9	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level + Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)



Report No.: WSCT-ANAB-R&E240700032A-LE

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******