




Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

Certificate Number: AT-3951

For Question,
Please Contact with WSCT

11a, 1 GHz to 18 GHz, Channel (5500 MHz), ANT V

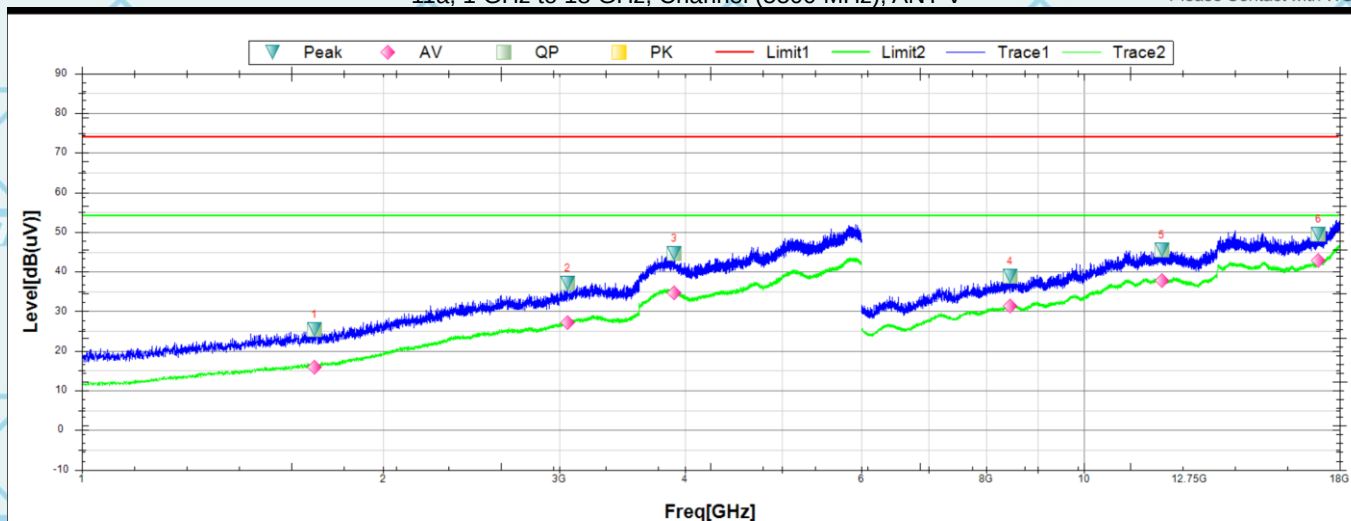

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1706.8750	25.26	0.35	24.91	74	-48.74	360	Vertical	PK	Pass
2	3056.2500	36.97	8.1	28.87	74	-37.03	360	Vertical	PK	Pass
3	3905.0000	44.59	11.27	33.32	74	-29.41	165.4	Vertical	PK	Pass
4	8445.0000	38.84	37.18	1.66	74	-35.16	11.8	Vertical	PK	Pass
5	11965.5000	45.36	38.63	6.73	74	-28.64	232.8	Vertical	PK	Pass
6	17154.0000	49.51	40.83	8.68	74	-24.49	71.4	Vertical	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1706.8750	15.91	0.35	15.56	54	-38.09	360	Vertical	AV	Pass
2	3056.2500	27.02	8.1	18.92	54	-26.98	360	Vertical	AV	Pass
3	3905.0000	34.69	11.27	23.42	54	-19.31	165.4	Vertical	AV	Pass
4	8445.0000	31.23	37.18	-5.95	54	-22.77	11.8	Vertical	AV	Pass
5	11965.5000	37.78	38.63	-0.85	54	-16.22	232.8	Vertical	AV	Pass
6	17154.0000	42.75	40.83	1.92	54	-11.25	71.4	Vertical	AV	Pass




Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

Certificate Number: AT-3951

For Question,
Please Contact with WSCT

11a, 1 GHz to 18 GHz, Channel (5700 MHz), ANT H

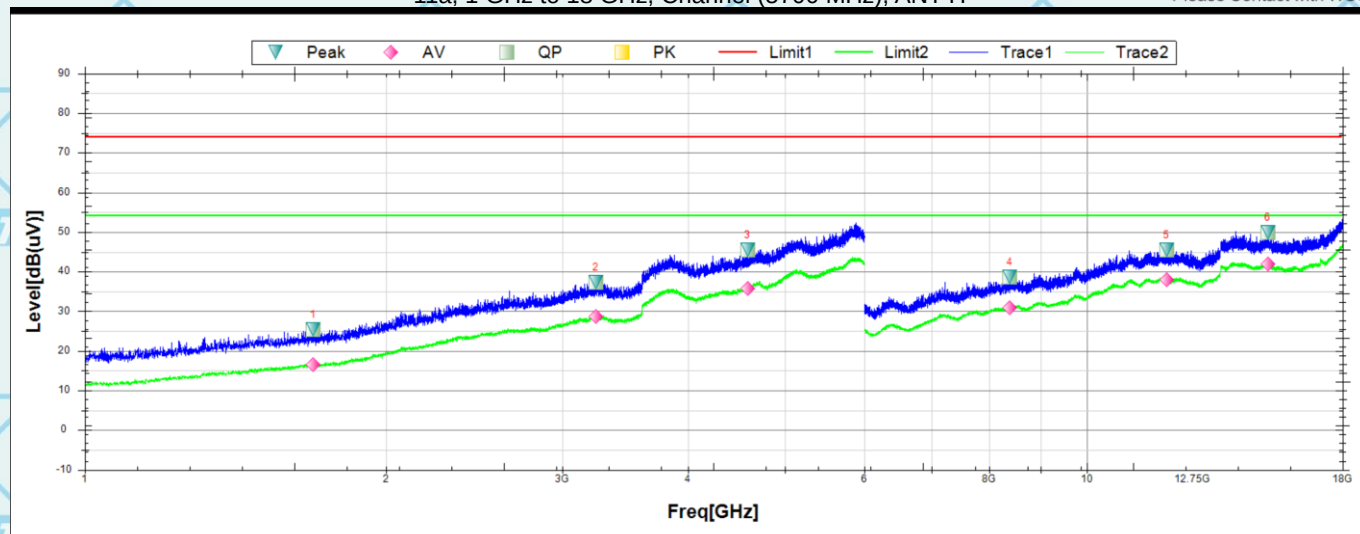

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1690.6250	25.32	0.29	25.03	74	-48.68	148.6	Horizontal	PK	Pass
2	3238.1250	37.21	8.6	28.61	74	-36.79	221.4	Horizontal	PK	Pass
3	4588.7500	45.41	14.05	31.36	74	-28.59	295.5	Horizontal	PK	Pass
4	8380.5000	38.53	37.15	1.38	74	-35.47	85.8	Horizontal	PK	Pass
5	12013.5000	45.44	38.6	6.84	74	-28.56	257.9	Horizontal	PK	Pass
6	15157.5000	49.77	39.71	10.06	74	-24.23	-0.1	Horizontal	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1690.6250	16.53	0.29	16.24	54	-37.47	148.6	Horizontal	AV	Pass
2	3238.1250	28.69	8.6	20.09	54	-25.31	221.4	Horizontal	AV	Pass
3	4588.7500	35.64	14.05	21.59	54	-18.36	295.5	Horizontal	AV	Pass
4	8380.5000	30.9	37.15	-6.25	54	-23.1	85.8	Horizontal	AV	Pass
5	12013.5000	37.85	38.6	-0.75	54	-16.15	257.9	Horizontal	AV	Pass
6	15157.5000	42.01	39.71	2.3	54	-11.99	-0.1	Horizontal	AV	Pass




Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

Certificate Number: AT-3951

For Question,
Please Contact with WSCT

11a, 1 GHz to 18 GHz, Channel (5700 MHz), ANT V

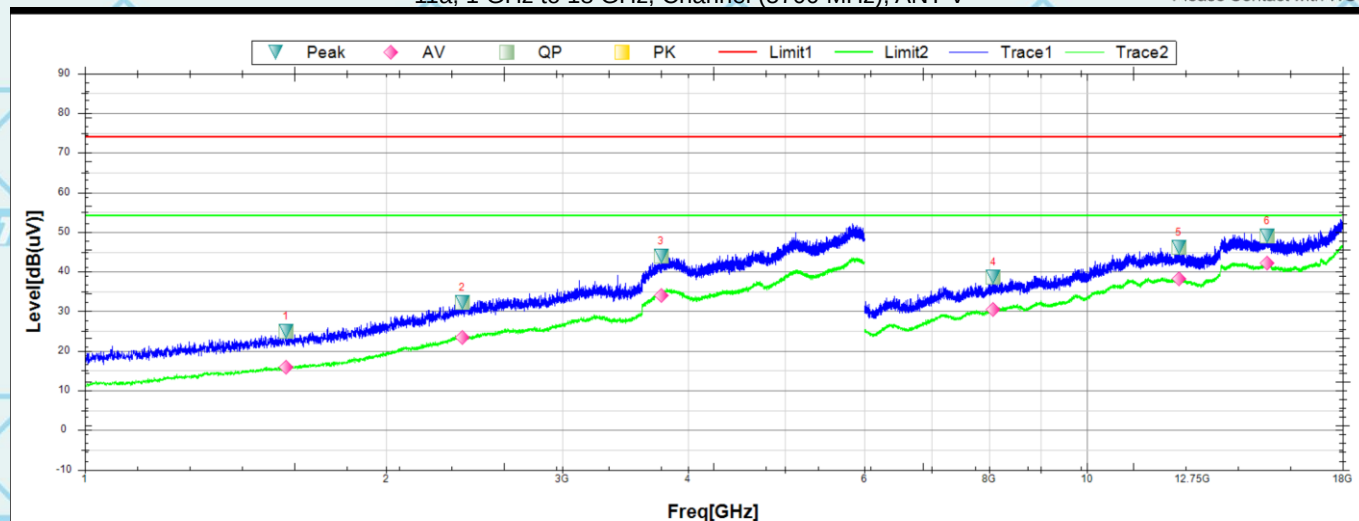

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1587.5000	24.85	-0.03	24.88	74	-49.15	167.8	Vertical	PK	Pass
2	2381.2500	32.28	5.08	27.2	74	-41.72	0.6	Vertical	PK	Pass
3	3761.2500	43.95	10.49	33.46	74	-30.05	105.7	Vertical	PK	Pass
4	8073.0000	38.56	37.03	1.53	74	-35.44	-0.1	Vertical	PK	Pass
5	12354.0000	46.16	38.71	7.45	74	-27.84	7.1	Vertical	PK	Pass
6	15139.5000	49	39.77	9.23	74	-25	72.6	Vertical	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1587.5000	15.84	-0.03	15.87	54	-38.16	167.8	Vertical	AV	Pass
2	2381.2500	23.36	5.08	18.28	54	-30.64	0.6	Vertical	AV	Pass
3	3761.2500	34.03	10.49	23.54	54	-19.97	105.7	Vertical	AV	Pass
4	8073.0000	30.33	37.03	-6.7	54	-23.67	-0.1	Vertical	AV	Pass
5	12354.0000	38.17	38.71	-0.54	54	-15.83	7.1	Vertical	AV	Pass
6	15139.5000	42.05	39.77	2.28	54	-11.95	72.6	Vertical	AV	Pass




Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

Certificate Number: AT-3951

For Question,
Please Contact with WSCT

11a, 1 GHz to 18 GHz, Channel (5745 MHz), ANT H

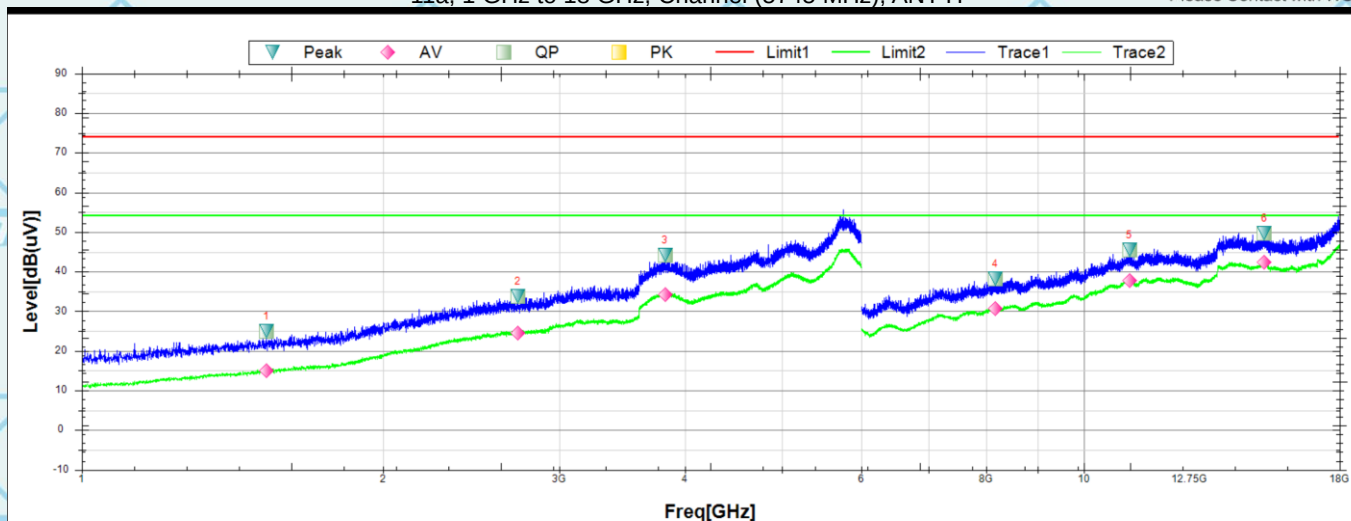

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1528.7500	24.82	-0.25	25.07	74	-49.18	228.8	Horizontal	PK	Pass
2	2725.6250	33.65	6.43	27.22	74	-40.35	68.6	Horizontal	PK	Pass
3	3821.8750	44.2	10.82	33.38	74	-29.8	360.1	Horizontal	PK	Pass
4	8163.0000	38.24	37.07	1.17	74	-35.76	54.7	Horizontal	PK	Pass
5	11106.0000	45.47	39.4	6.07	74	-28.53	163.5	Horizontal	PK	Pass
6	15148.5000	49.64	39.74	9.9	74	-24.36	46.4	Horizontal	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1528.7500	14.99	-0.25	15.24	54	-39.01	228.8	Horizontal	AV	Pass
2	2725.6250	24.49	6.43	18.06	54	-29.51	68.6	Horizontal	AV	Pass
3	3821.8750	34.26	10.82	23.44	54	-19.74	360.1	Horizontal	AV	Pass
4	8163.0000	30.58	37.07	-6.49	54	-23.42	54.7	Horizontal	AV	Pass
5	11106.0000	37.77	39.4	-1.63	54	-16.23	163.5	Horizontal	AV	Pass
6	15148.5000	42.27	39.74	2.53	54	-11.73	46.4	Horizontal	AV	Pass




Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

Certificate Number: AT-3951

For Question,
Please Contact with WSCT

11a, 1 GHz to 18 GHz, Channel (5745 MHz), ANT V

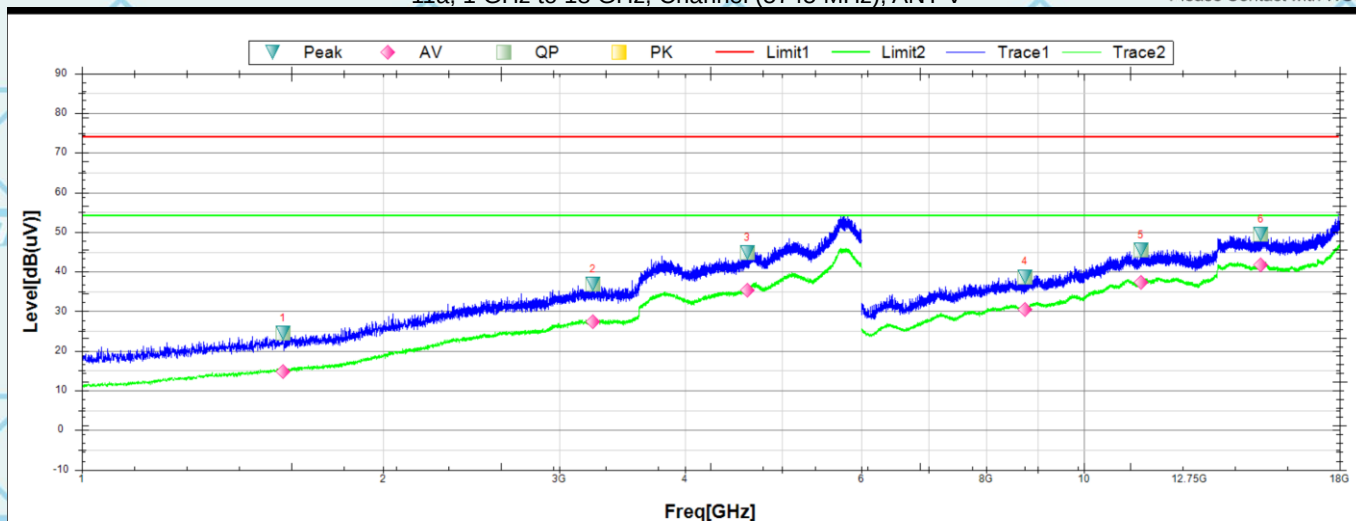

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1587.5000	24.47	-0.03	24.5	74	-49.53	133.2	Vertical	PK	Pass
2	3239.3750	36.89	8.6	28.29	74	-37.11	225.3	Vertical	PK	Pass
3	4618.7500	44.69	14.25	30.44	74	-29.31	360.1	Vertical	PK	Pass
4	8737.5000	38.72	37.3	1.42	74	-35.28	211.4	Vertical	PK	Pass
5	11406.0000	45.52	39.13	6.39	74	-28.48	351.4	Vertical	PK	Pass
6	15030.0000	49.41	40.11	9.3	74	-24.59	99.1	Vertical	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1587.5000	14.75	-0.03	14.78	54	-39.25	133.2	Vertical	AV	Pass
2	3239.3750	27.25	8.6	18.65	54	-26.75	225.3	Vertical	AV	Pass
3	4618.7500	35.34	14.25	21.09	54	-18.66	360.1	Vertical	AV	Pass
4	8737.5000	30.37	37.3	-6.93	54	-23.63	211.4	Vertical	AV	Pass
5	11406.0000	37.25	39.13	-1.88	54	-16.75	351.4	Vertical	AV	Pass
6	15030.0000	41.62	40.11	1.51	54	-12.38	99.1	Vertical	AV	Pass




Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

Certificate Number: AT-3951

For Question,
Please Contact with WSCT

11a, 1 GHz to 18 GHz, Channel (5825 MHz), ANT H

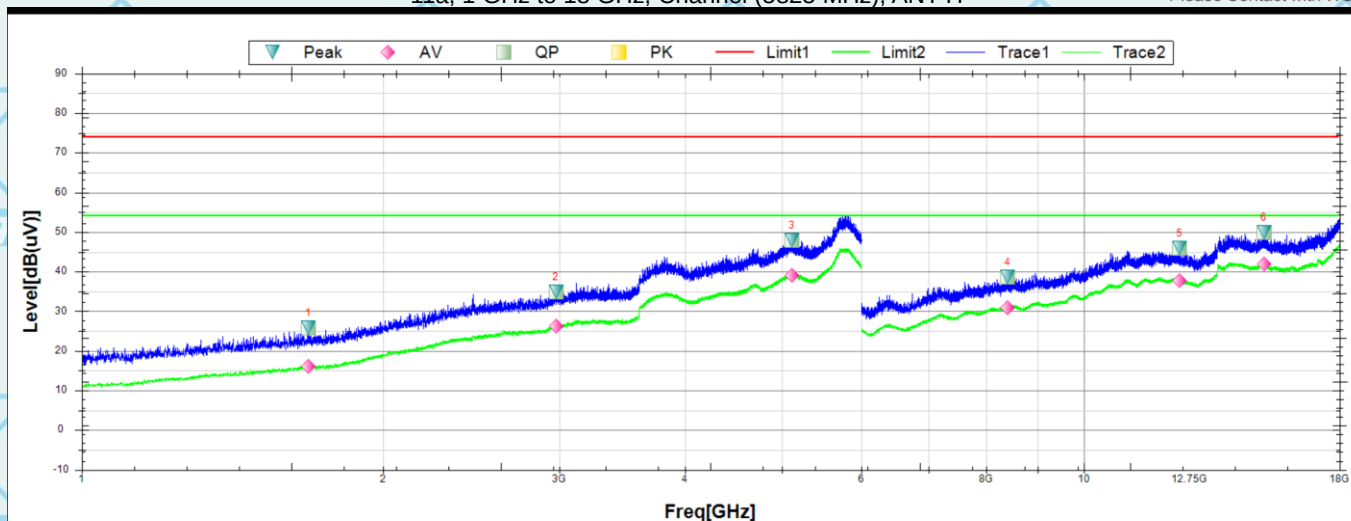

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1683.7500	25.7	0.26	25.44	74	-48.3	288.6	Horizontal	PK	Pass
2	2973.7500	34.89	7.71	27.18	74	-39.11	213.4	Horizontal	PK	Pass
3	5116.8750	47.81	17.02	30.79	74	-26.19	360.2	Horizontal	PK	Pass
4	8397.0000	38.54	37.16	1.38	74	-35.46	329.6	Horizontal	PK	Pass
5	12466.5000	45.83	38.74	7.09	74	-28.17	-0.1	Horizontal	PK	Pass
6	15127.5000	49.85	39.8	10.05	74	-24.15	34.4	Horizontal	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1683.7500	16.02	0.26	15.76	54	-37.98	288.6	Horizontal	AV	Pass
2	2973.7500	26.29	7.71	18.58	54	-27.71	213.4	Horizontal	AV	Pass
3	5116.8750	38.98	17.02	21.96	54	-15.02	360.2	Horizontal	AV	Pass
4	8397.0000	30.92	37.16	-6.24	54	-23.08	329.6	Horizontal	AV	Pass
5	12466.5000	37.8	38.74	-0.94	54	-16.2	-0.1	Horizontal	AV	Pass
6	15127.5000	41.96	39.8	2.16	54	-12.04	34.4	Horizontal	AV	Pass




Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

Certificate Number: AT-3951

For Question,
Please Contact with WSCT

11a, 1 GHz to 18 GHz, Channel (5825 MHz), ANT V

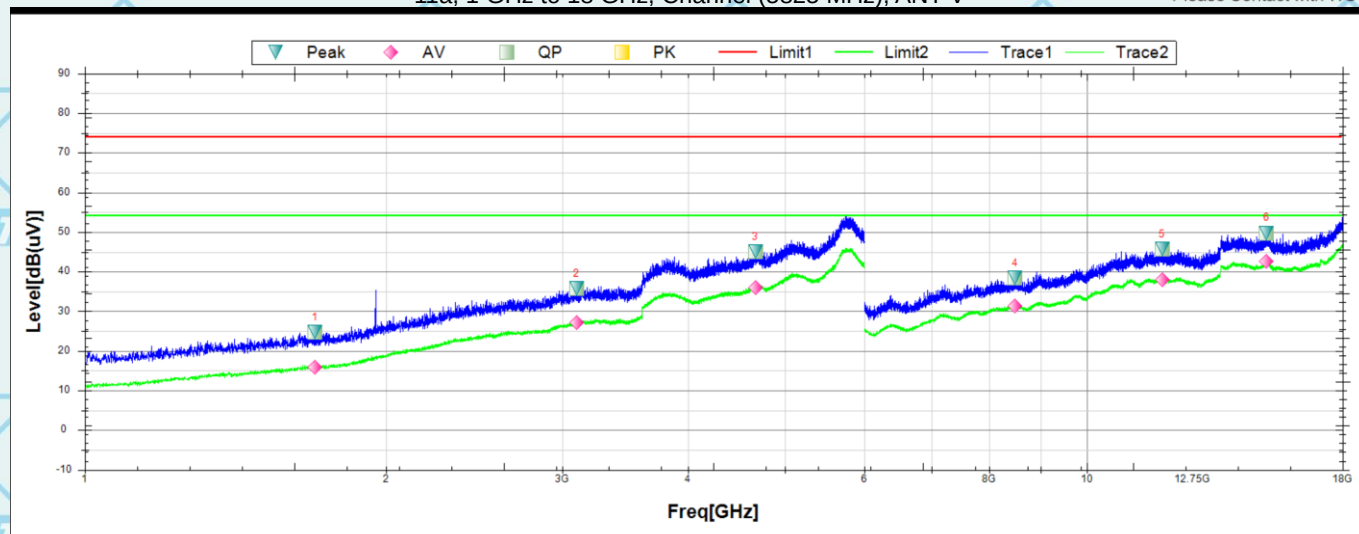

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1698.1250	24.76	0.32	24.44	74	-49.24	167.8	Vertical	PK	Pass
2	3097.5000	35.76	7.89	27.87	74	-38.24	360	Vertical	PK	Pass
3	4670.6250	45.02	14.64	30.38	74	-28.98	142.7	Vertical	PK	Pass
4	8485.5000	38.35	37.19	1.16	74	-35.65	359.1	Vertical	PK	Pass
5	11895.0000	45.69	38.69	7	74	-28.31	199.4	Vertical	PK	Pass
6	15118.5000	49.76	39.83	9.93	74	-24.24	0.1	Vertical	PK	Pass

Final Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1698.1250	15.82	0.32	15.5	54	-38.18	167.8	Vertical	AV	Pass
2	3097.5000	27.09	7.89	19.2	54	-26.91	360	Vertical	AV	Pass
3	4670.6250	35.89	14.64	21.25	54	-18.11	142.7	Vertical	AV	Pass
4	8485.5000	31.31	37.19	-5.88	54	-22.69	359.1	Vertical	AV	Pass
5	11895.0000	38.04	38.69	-0.65	54	-15.96	199.4	Vertical	AV	Pass
6	15118.5000	42.55	39.83	2.72	54	-11.45	0.1	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level+ Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

7.4 ANTENNA REQUIREMENT

Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

Antenna Gain

The Bluetooth antenna is a FIPA Antenna. it meets the standards, and the best case gain of the antenna is -3.73dBi.



Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

7.5 EMISSION BANDWIDTH

7.5.1 TEST EQUIPMENT

Please refer to Section 5 this report.

7.5.2 TEST PROCEDURE

-26dB Bandwidth and 99% Occupied Bandwidth:	
Test Method:	a)The transmitter was radiated to the spectrum analyzer in peak hold mode. b)Measure the maximum width of the emission that is 26 dB down from the peak of the emission Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
Test Equipment Setting – 26dB Bandwidth:	Test Equipment Setting – 99%% Bandwidth:
a)Attenuation: Auto	a)Span: 1.5 times to 5.0 times the OBW
b)Span Frequency: > 26dB Bandwidth	b)RBW: 1 % to 5 % of the OBW
c)RBW: Approximately 1% of the emission bandwidth	c)VBW: $\geq 3 \times$ RBW
d)VBW: VBW > RBW	d)Detector: Peak
e)Detector: Peak	e)Trace: Max Hold
f)Trace: Max Hold	
g)Sweep Time: Auto	
6 dB Bandwidth:	
Test Method:	a)The transmitter was radiated to the spectrum analyzer in peak hold mode. b)Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth. c)Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band. d)Measured the spectrum width with power higher than 6dB below carrier.
Test Equipment Setting:	e)Detector: Peak
a)Attenuation: Auto	f)Trace: Max Hold
b)Span Frequency: > 6dB Bandwidth	g)Sweep Time: Auto
c)RBW: 100kHz	
d)VBW: $\geq 3 \times$ RBW	
Maximum Conducted Output Power Measurement:	
Test Method:	a)The transmitter output (antenna port) was connected to the power meter. b)Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter). c)Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band. d)When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.
Test Equipment Setting: Detector - Average	
Power Spectral Density:	
Test Method:	a)The transmitter output (antenna port) was connected RF switch to the spectrum analyzer. b)Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD). c)Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs. d)When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way. e)For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$



Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

and the final result should ≤ 30 dBm.

Test Equipment Setting:

- | | |
|---|---|
| <p>a) Attenuation: Auto
b) Span Frequency: Encompass the entire emissions bandwidth (EBW) of the signal
c) RBW: 1000 kHz
d) VBW: 3000 kHz</p> | <p>e) Detector: RMS
f) Trace: AVERAGE
g) Sweep Time: Auto
h) Trace Average: 100 times</p> |
|---|---|

Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Frequency Stability Measurement:

- | | |
|---------------------|---|
| <p>Test Method:</p> | <p>a) The transmitter output (antenna port) was connected to the spectrum analyzer.
b) EUT have transmitted absence of modulation signal and fixed channelize.
c) Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
d) Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
e) fc is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 106$ ppm and the limit is less than ± 20 ppm (IEEE 802.11 specification).
f) The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
g) Extreme temperature is $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$</p> |
|---------------------|---|

Test Equipment Setting:

- | | |
|---|----------------------------|
| <p>a) Attenuation: Auto
b) Span Frequency: Entire absence of modulation emissions bandwidth
c) RBW: 10 kHz
d) VBW: 10 kHz</p> | <p>e) Sweep Time: Auto</p> |
|---|----------------------------|

7.5.3 CONFIGURATION OF THE EUT

Same as section 3.4 of this report

7.5.4 EUT OPERATING CONDITION

Same as section 3.5 of this report.



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

7.5.5 LIMIT**-26dB Bandwidth and 99% Occupied Bandwidth:**

Limit: No restriction limits.

-6 dB Bandwidth:

Limit: For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

Test Equipment Setting:

a) Attenuation: Auto

b) Span Frequency: > 6dB Bandwidth

c) RBW: 100kHz

d) VBW: $\geq 3 \times \text{RBW}$

e) Detector: Peak

f) Trace: Max Hold

g) Sweep Time: Auto

Maximum Conducted Output Power Measurement:☒ 5.15~5.25 GHz☐ Limit of Outdoor access point:

The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

☐ Limit of Fixed point-to-point access points:

The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

☐ Limit of Indoor access point:

The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

☒ Limit of Mobile and portable client devices:

The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

☒ 5.25-5.35 GHz & ☒ 5.470-5.725 GHz

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

☒ 5.725~5.85 GHz

The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

Power Spectral Density☒ 5.15~5.25 GHz☐ Limit of Outdoor access point: 17 dBm/MHz☐ Limit of Fixed point-to-point access points: 17 dBm/MHz☐ 5.25-5.35 GHz☐ 5.470-5.725 GHz☒ 5.725~5.85 GHz☐ Limit of Indoor access point: 17 dBm/MHz☒ Limit of Mobile and portable client devices: 11 dBm/MHz

11 dBm/MHz

11 dBm/MHz

30 dBm/500kHz

Frequency Stability Measurement:

Limit: In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE



Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

802.11n specification).

7.5.6 TEST RESULT

-26dB Bandwidth and 99% Occupied Bandwidth

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: -26dB Bandwidth/-6dB Bandwidth and 99% Occupied Bandwidth	Temperature	: 25 °C
Test Voltage	: DC 3.87V	Humidity	: 56%RH
Test Result	: PASS		

-26Db&99% Bandwidth

Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	99%dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
a	5180	20.03	16.448	0.5	Pass
a	5240	21.78	16.420	0.5	Pass
a	5260	19.83	16.410	0.5	Pass
a	5320	20.62	16.462	0.5	Pass
a	5500	21.39	16.445	0.5	Pass
a	5700	20.84	16.448	0.5	Pass
n20	5180	20.09	17.566	0.5	Pass
n20	5240	21.53	17.573	0.5	Pass
n20	5260	19.97	17.546	0.5	Pass
n20	5320	20.76	17.527	0.5	Pass
n20	5500	20.02	17.562	0.5	Pass
n20	5700	20.44	17.553	0.5	Pass
n40	5190	41.61	35.986	0.5	Pass
n40	5230	41.54	35.965	0.5	Pass
n40	5270	42.15	35.944	0.5	Pass
n40	5310	41.69	35.952	0.5	Pass
n40	5510	42.05	35.963	0.5	Pass
n40	5670	42.21	36.066	0.5	Pass
ac20	5180	19.85	17.563	0.5	Pass
ac20	5240	20.22	17.583	0.5	Pass
ac20	5260	19.75	17.546	0.5	Pass
ac20	5320	20.20	17.539	0.5	Pass
ac20	5500	20.08	17.547	0.5	Pass
ac20	5700	19.93	17.559	0.5	Pass
ac40	5190	40.43	35.976	0.5	Pass
ac40	5230	40.35	35.942	0.5	Pass
ac40	5270	40.10	35.946	0.5	Pass
ac40	5310	40.01	35.925	0.5	Pass
ac40	5510	40.27	35.917	0.5	Pass
ac40	5670	40.11	35.999	0.5	Pass
ac80	5210	80.24	75.205	0.5	Pass
ac80	5290	80.31	75.104	0.5	Pass
ac80	5530	80.39	75.267	0.5	Pass
ac80	5610	80.34	75.112	0.5	Pass



Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

-6dB&99% Bandwidth

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	99%dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
a	5745	13.86	16.349	0.5	Pass
a	5825	15.09	16.374	0.5	Pass
n20	5745	15.03	17.532	0.5	Pass
n20	5825	15.27	17.539	0.5	Pass
n40	5755	35.04	35.870	0.5	Pass
n40	5795	35.09	35.819	0.5	Pass
ac20	5745	15.09	17.544	0.5	Pass
ac20	5825	15.01	17.532	0.5	Pass
ac40	5755	33.84	35.826	0.5	Pass
ac40	5795	33.86	35.755	0.5	Pass
ac80	5775	75.10	75.113	0.5	Pass





Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

Certificate Number: AT-3951


For Question,
Please Contact with WSCT
www.wsct-cert.com**-26Db&99% Bandwidth**

Test Graphs

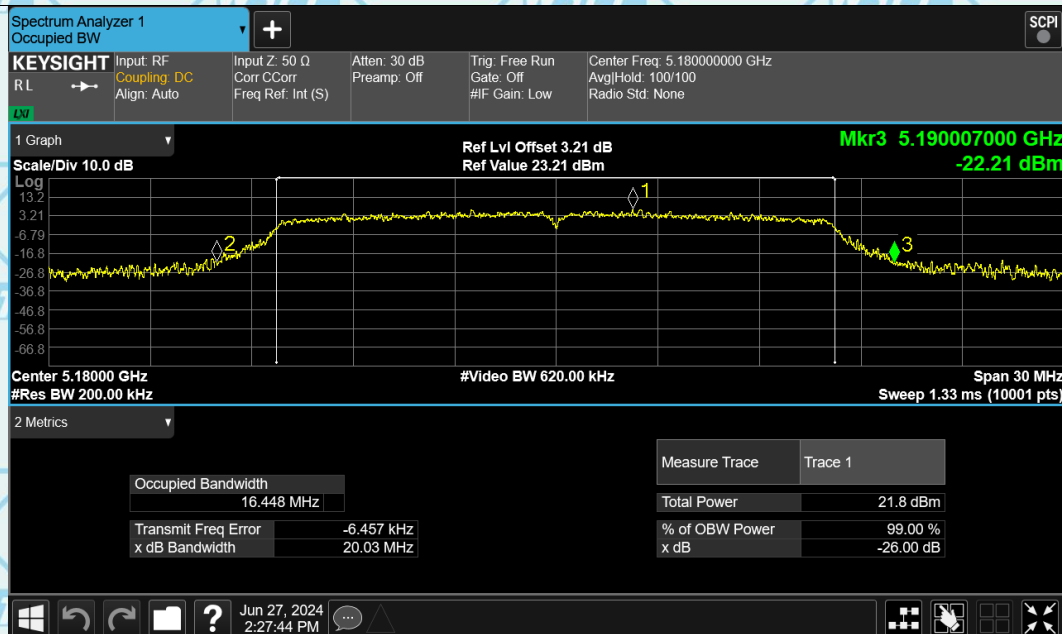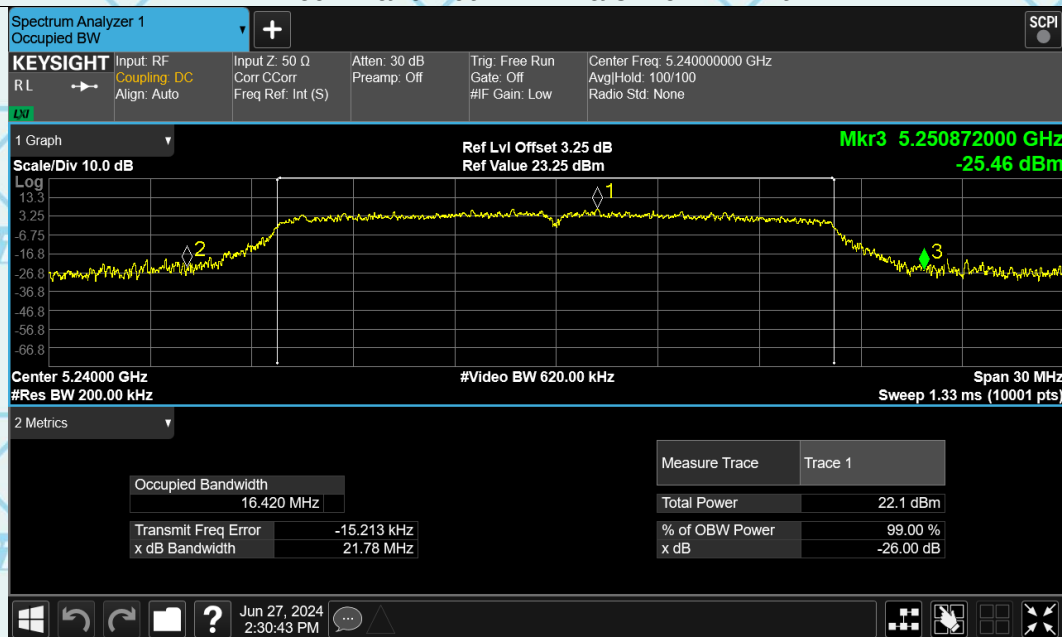
-26dB Bandwidth NVNT a 5180MHz Ant1**-26dB Bandwidth NVNT a 5240MHz Ant1**



-26dB Bandwidth NVNT a 5260MHz Ant1

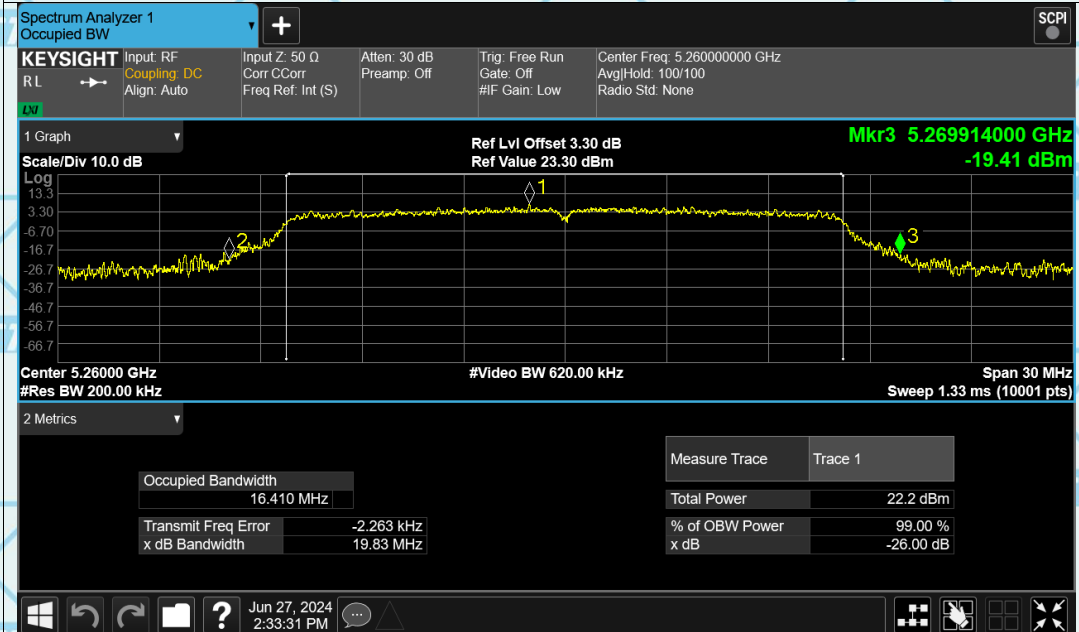


-26dB Bandwidth NVNT a 5320MHz Ant1

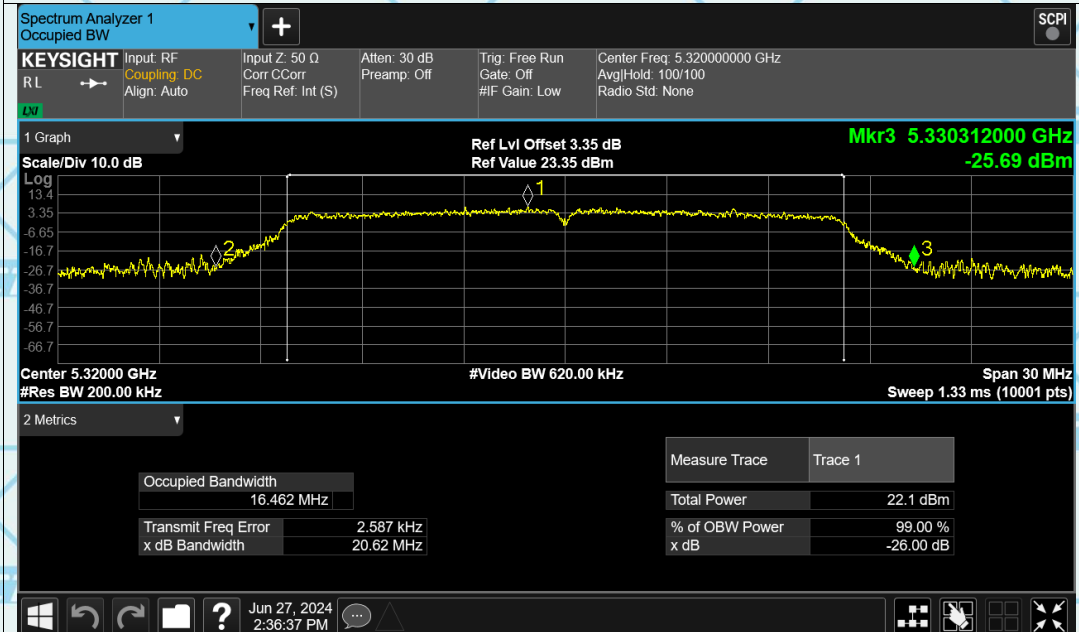






-26dB Bandwidth NVNT a 5500MHz Ant1

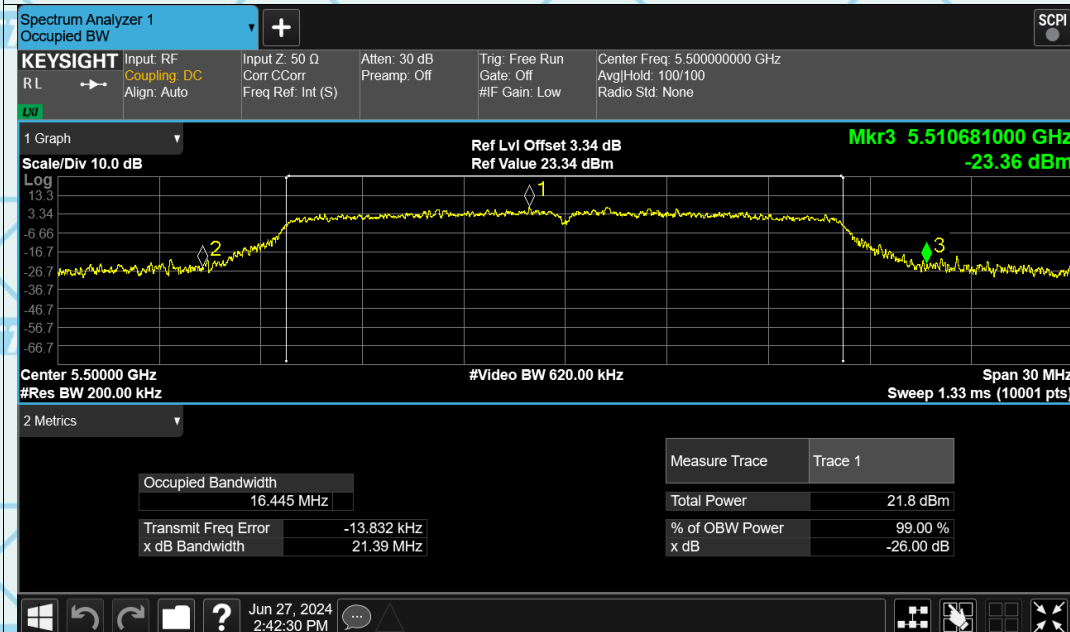


-26dB Bandwidth NVNT a 5700MHz Ant1

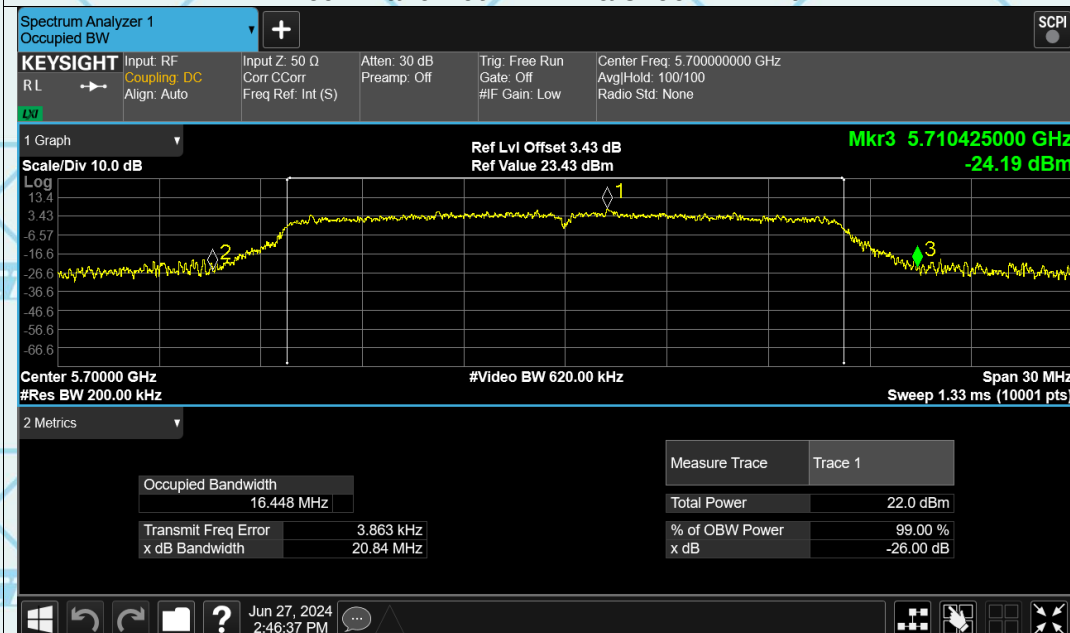

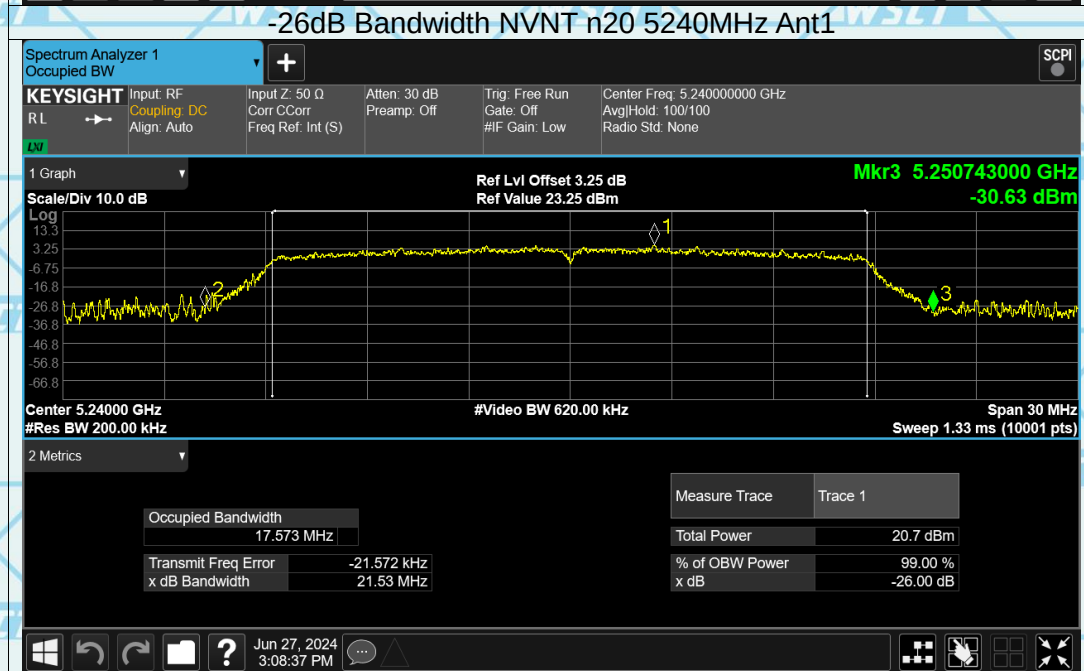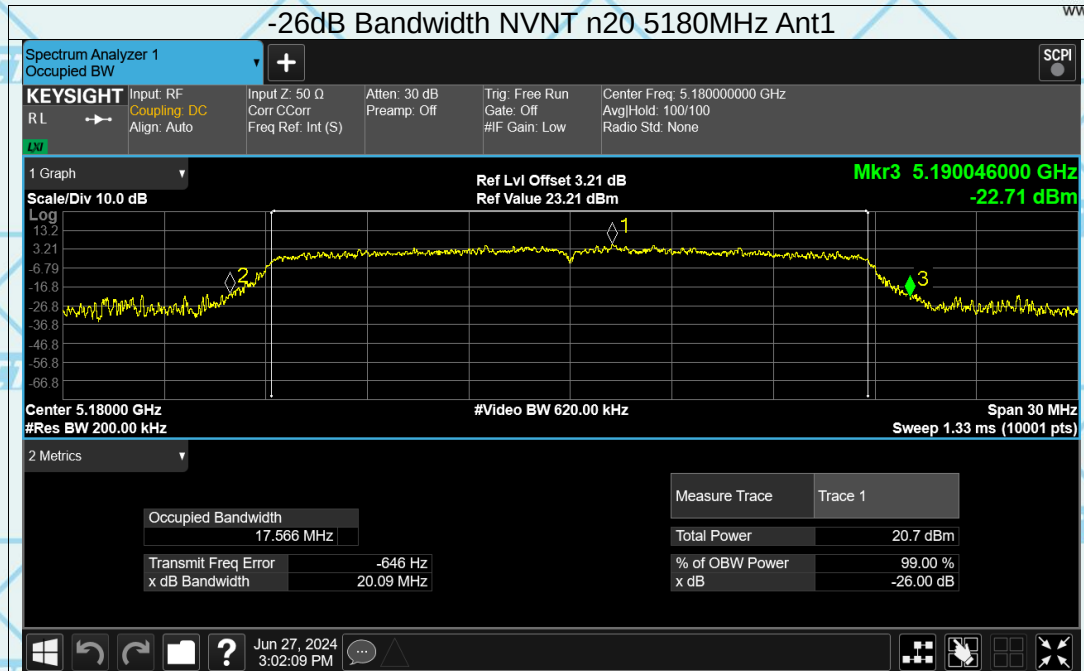








-26dB Bandwidth NVNT n20 5260MHz Ant1


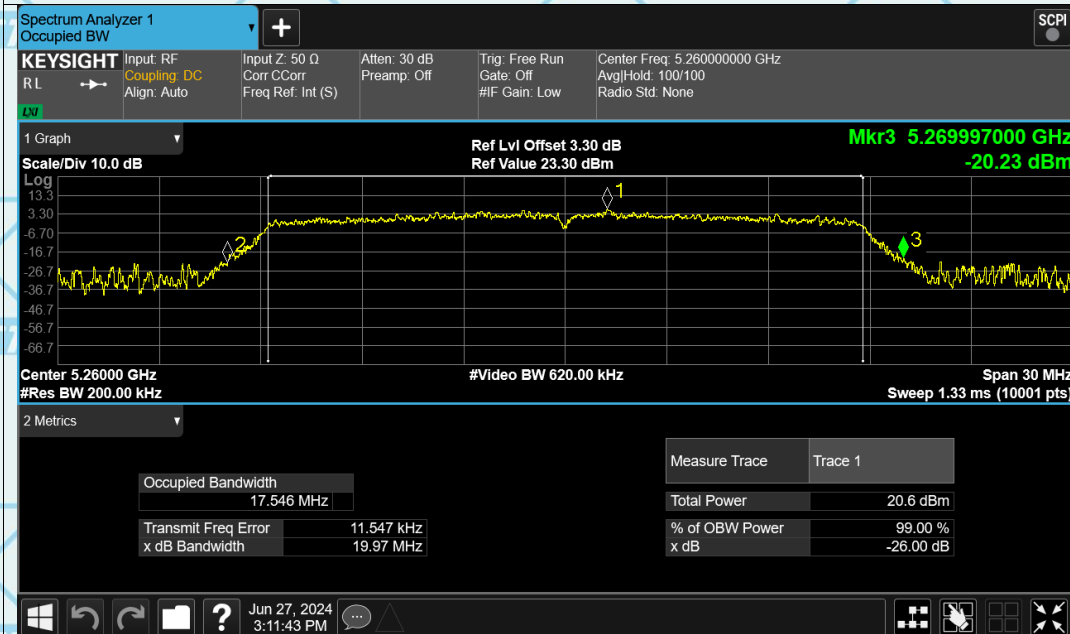




-26dB Bandwidth NVNT n20 5320MHz Ant1

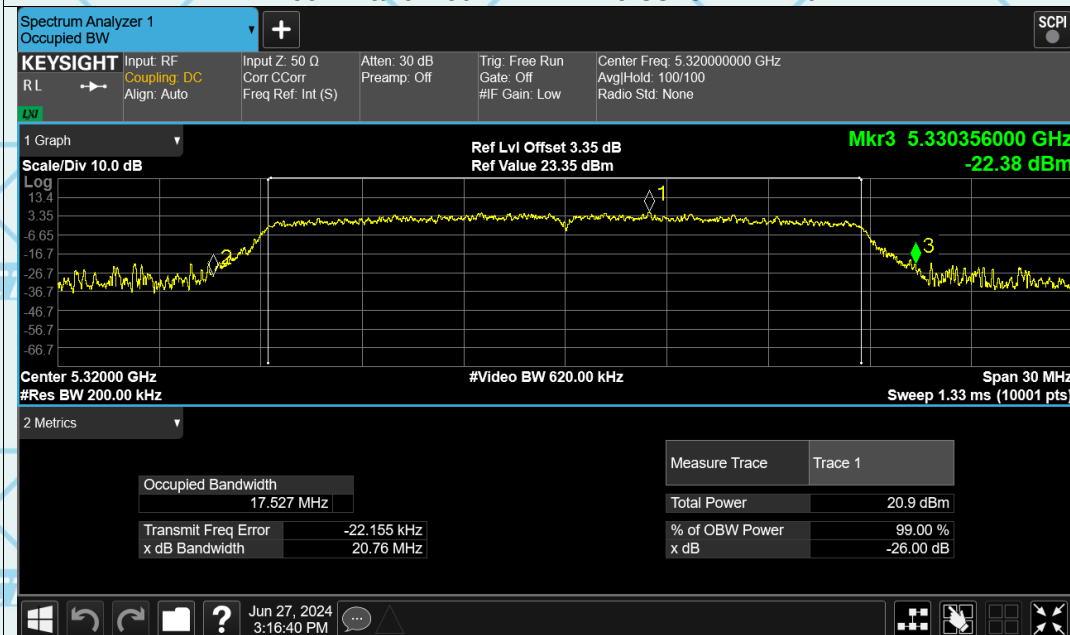

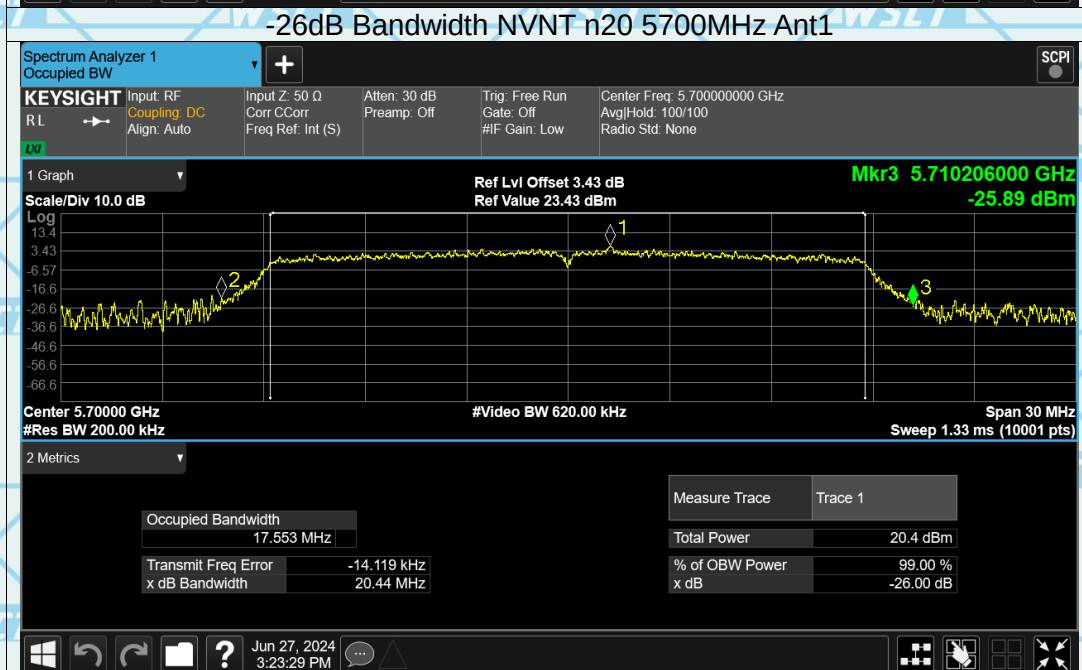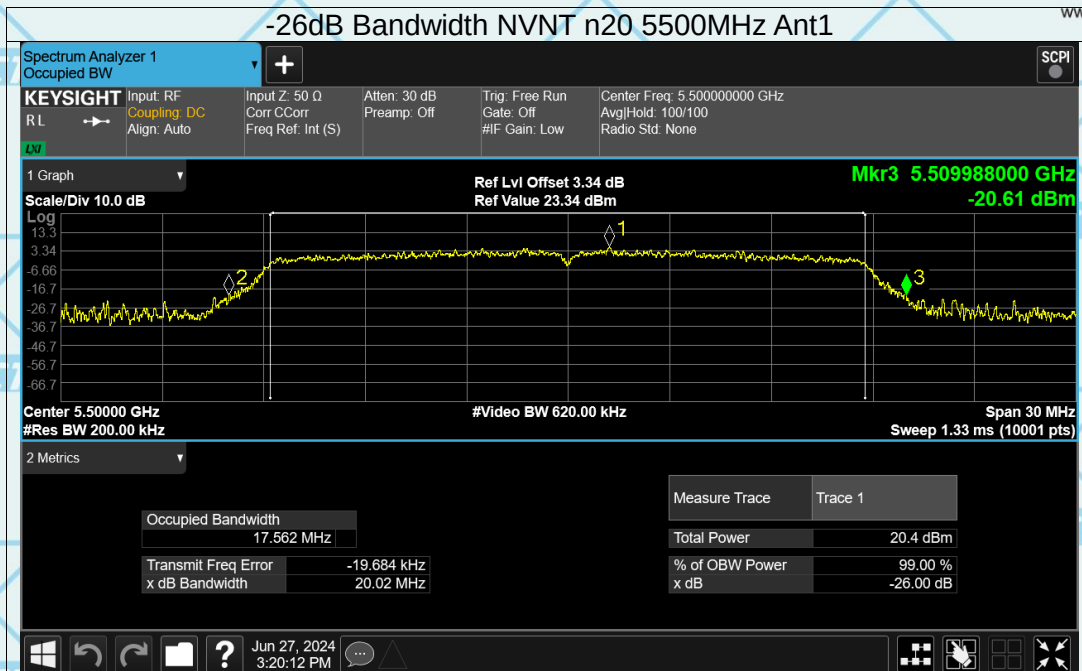

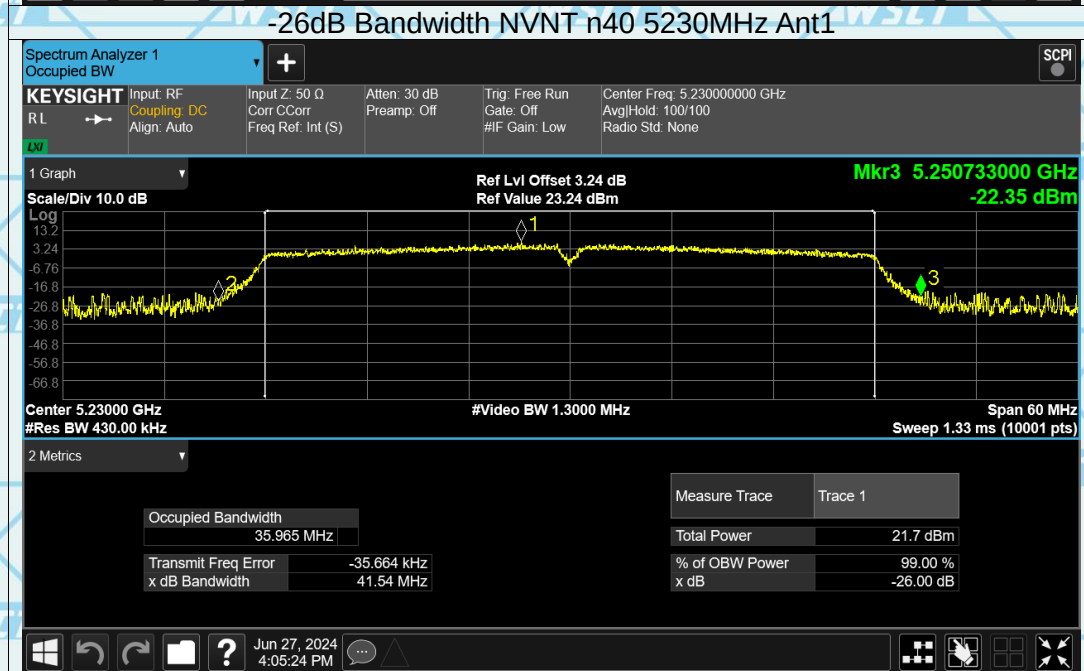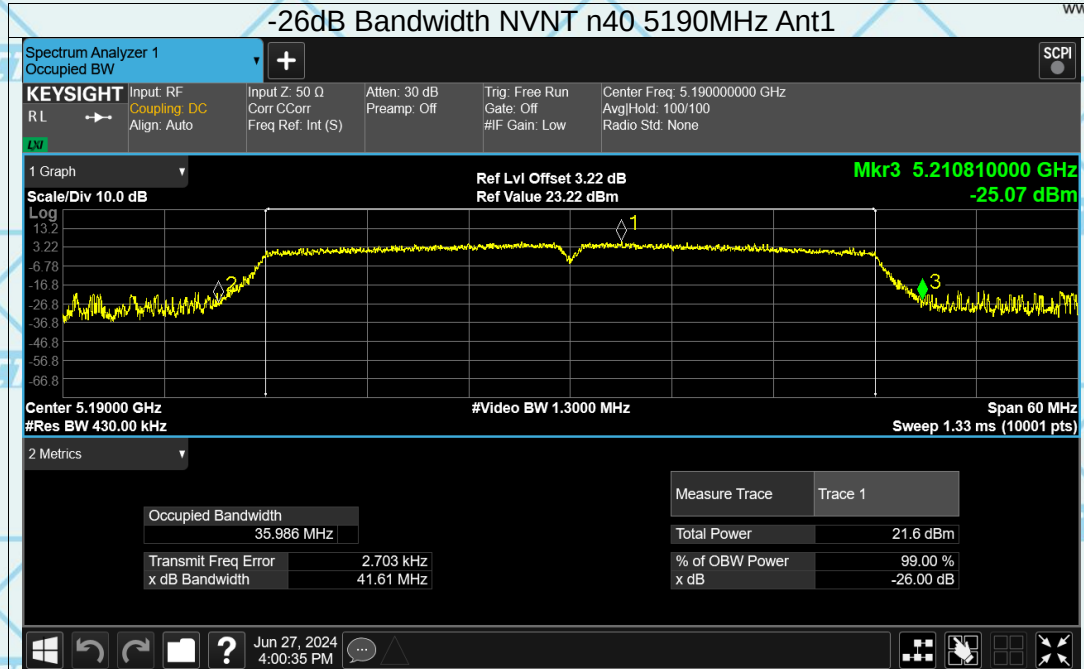


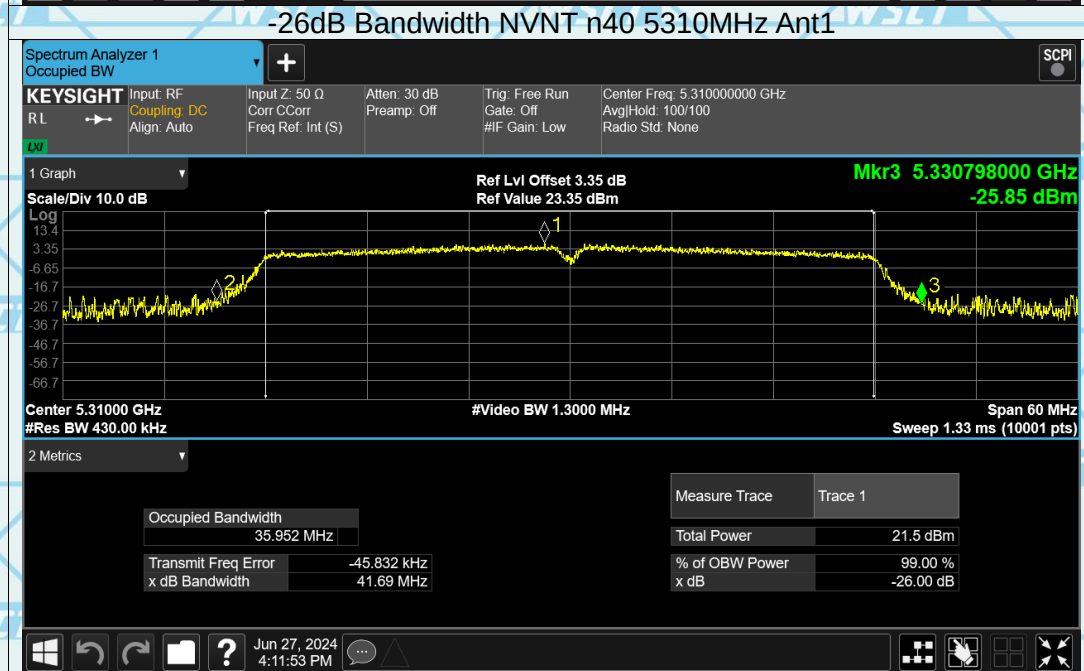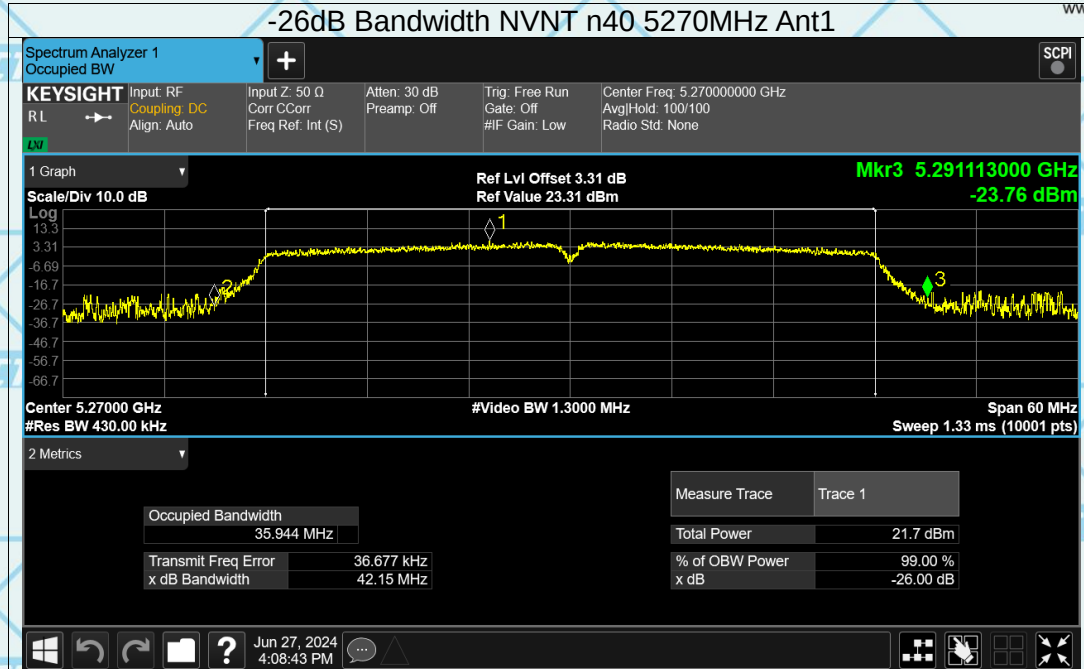

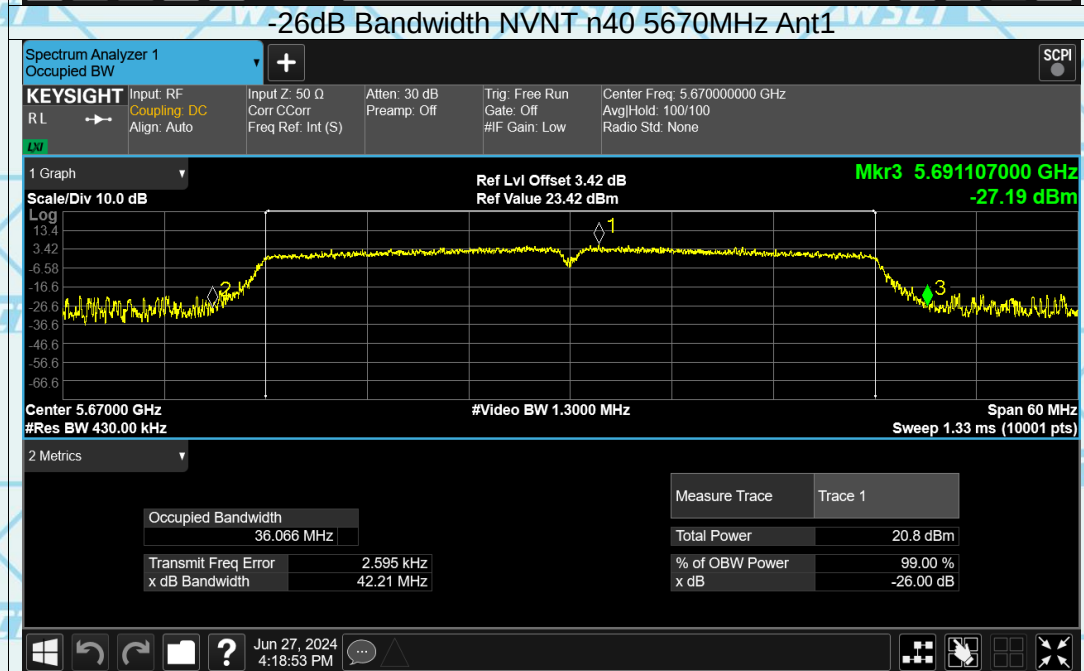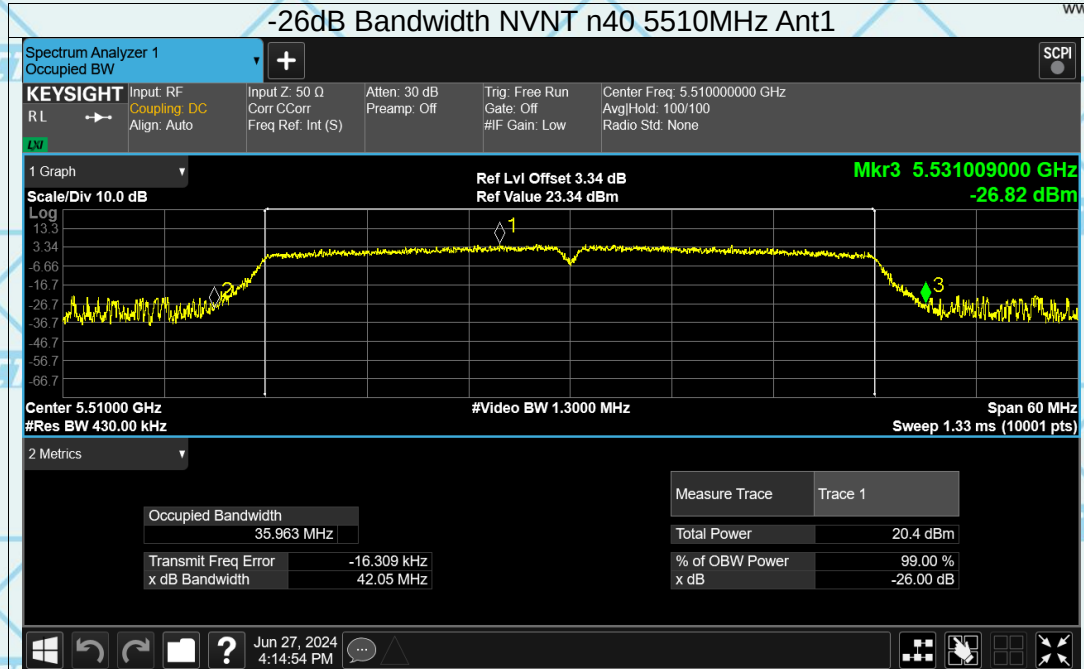




-26dB Bandwidth NVNT ac20 5180MHz Ant1

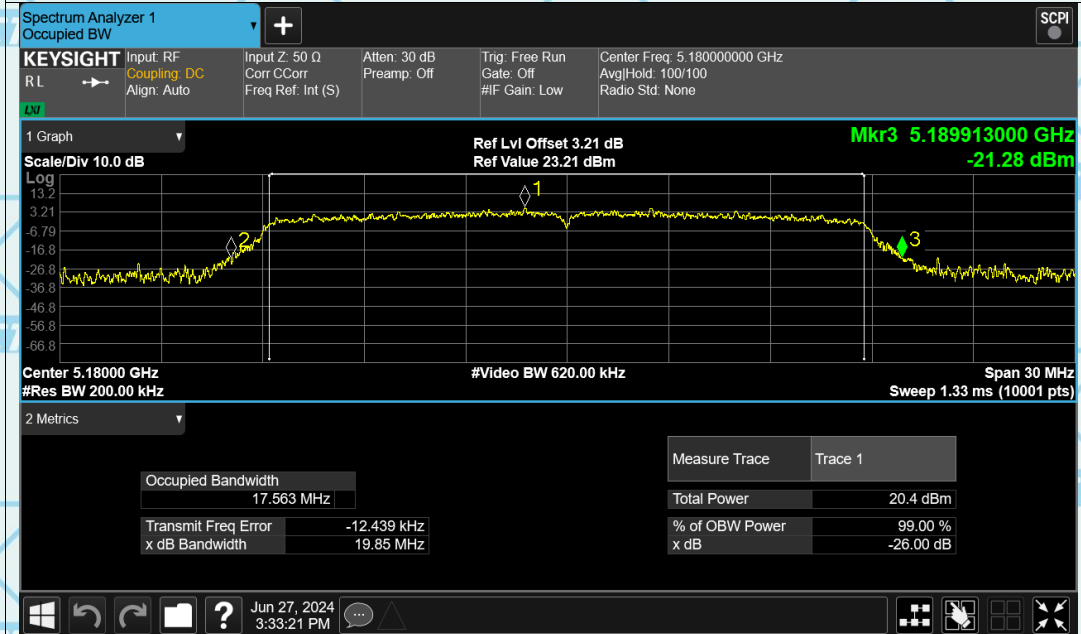


-26dB Bandwidth NVNT ac20 5240MHz Ant1

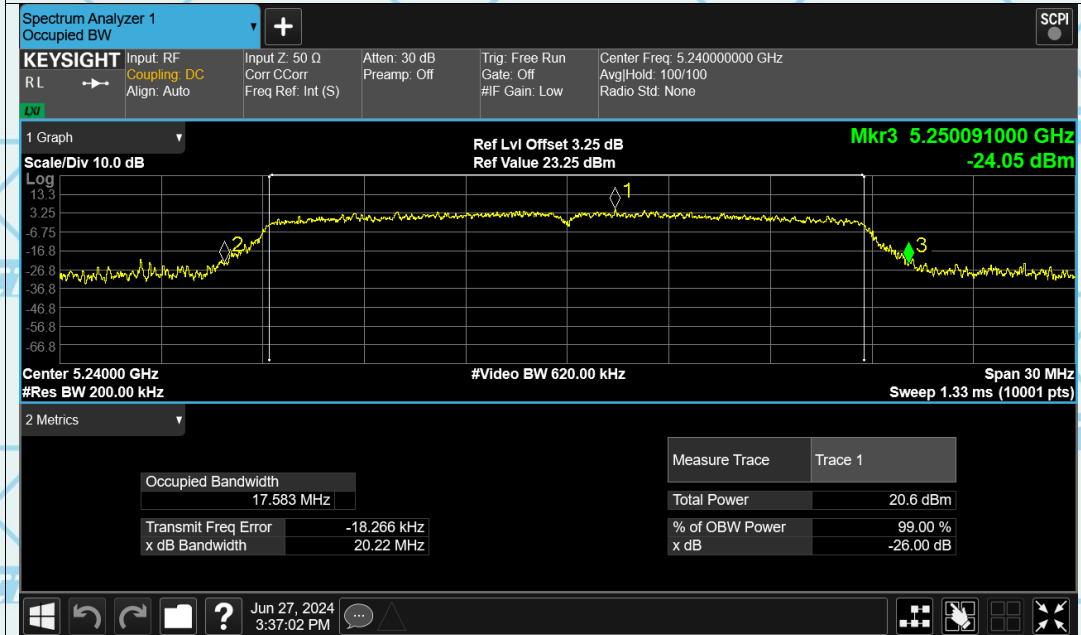




-26dB Bandwidth NVNT ac20 5260MHz Ant1

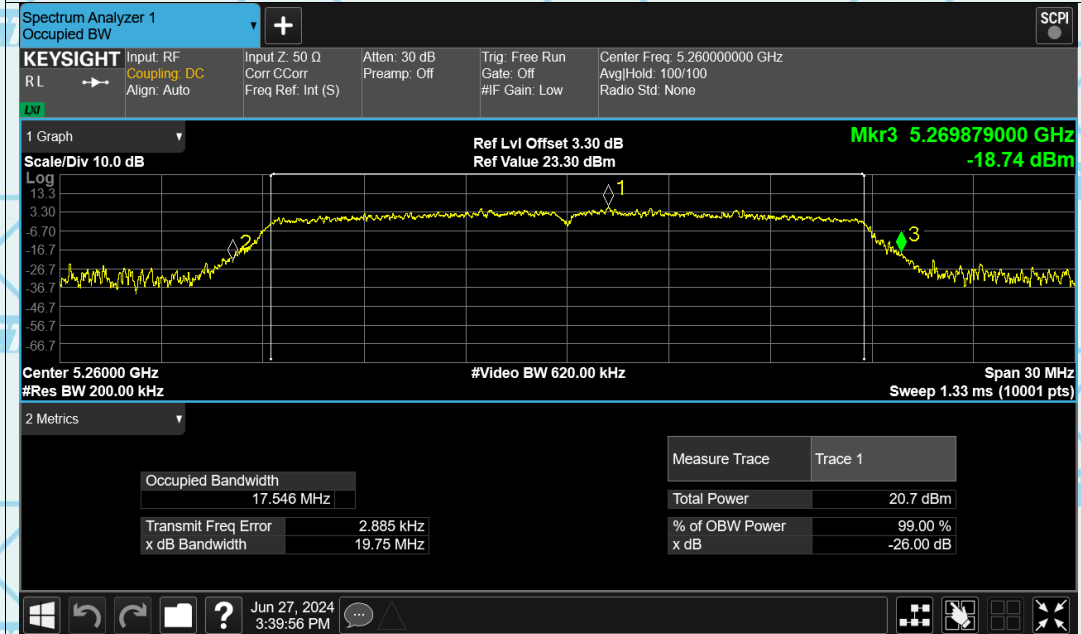


-26dB Bandwidth NVNT ac20 5320MHz Ant1

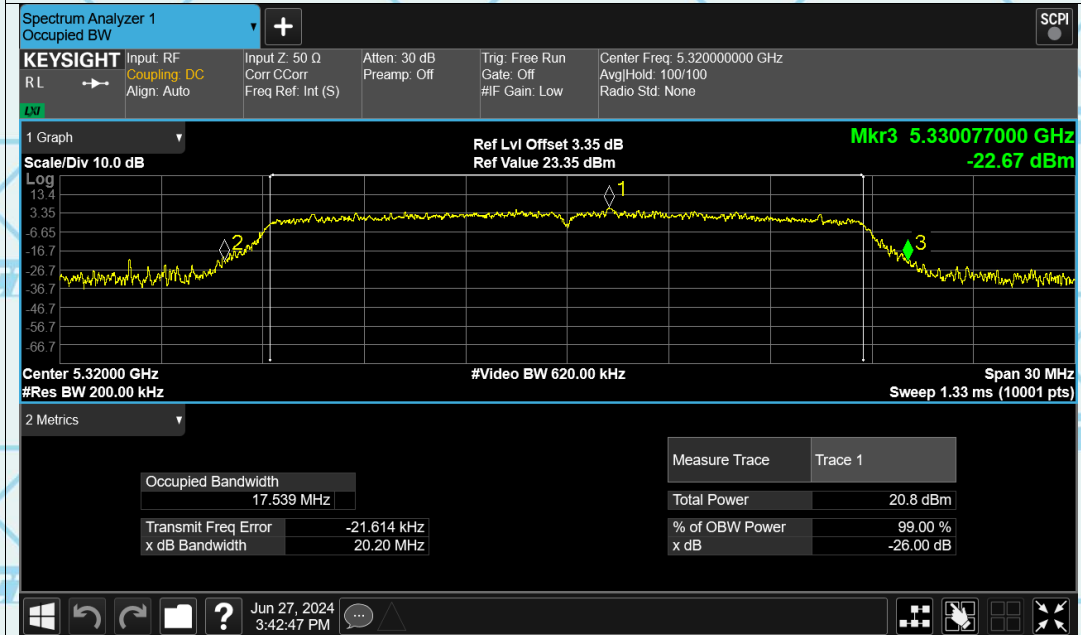




-26dB Bandwidth NVNT ac20 5500MHz Ant1

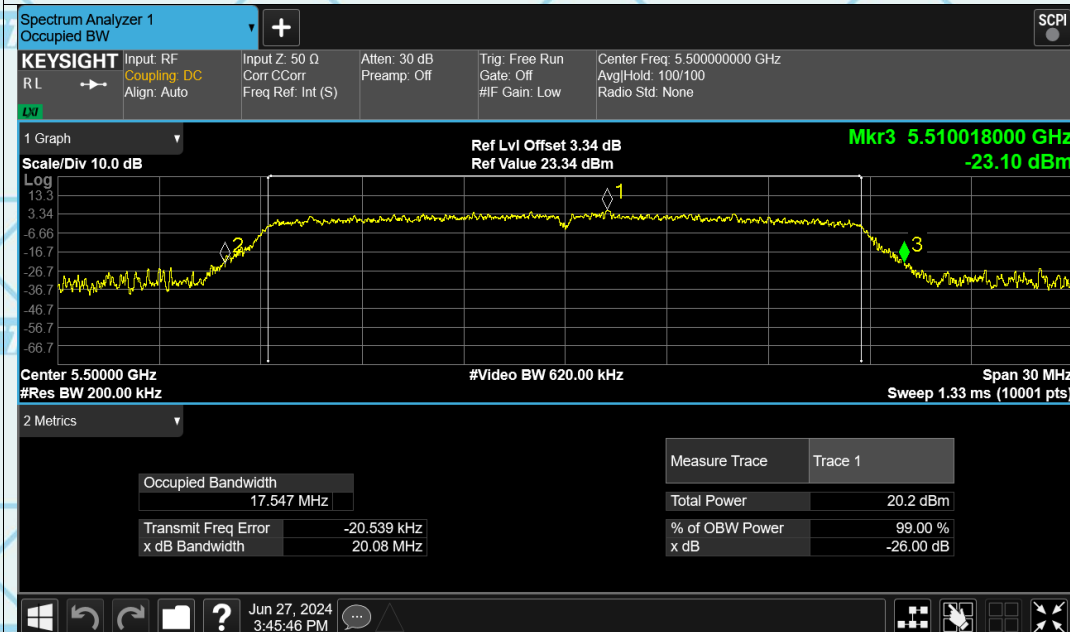


-26dB Bandwidth NVNT ac20 5700MHz Ant1

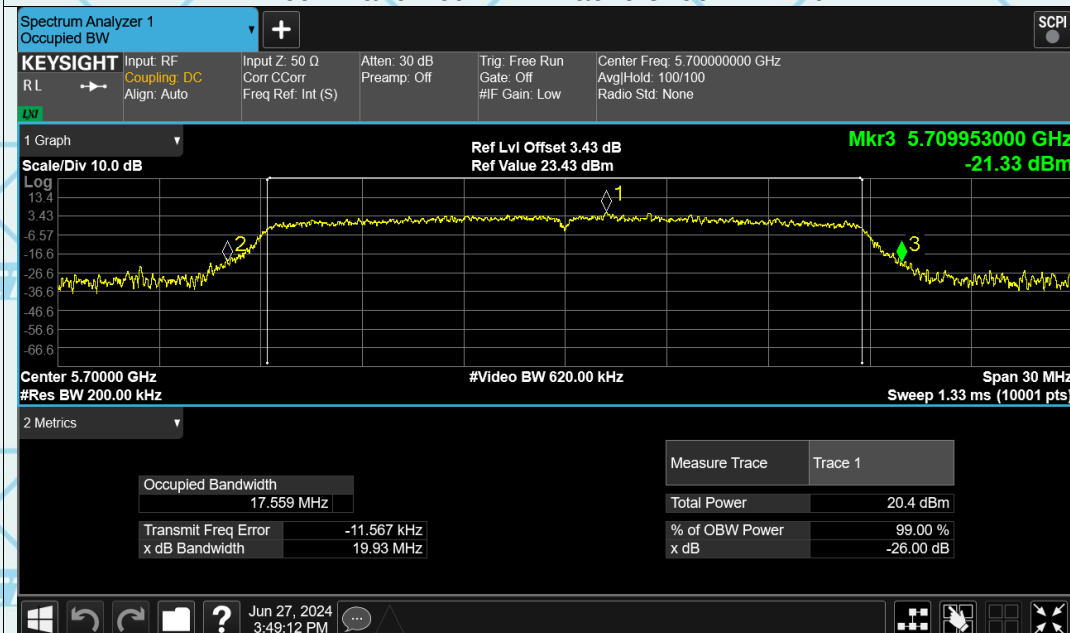




-26dB Bandwidth NVNT ac40 5190MHz Ant1

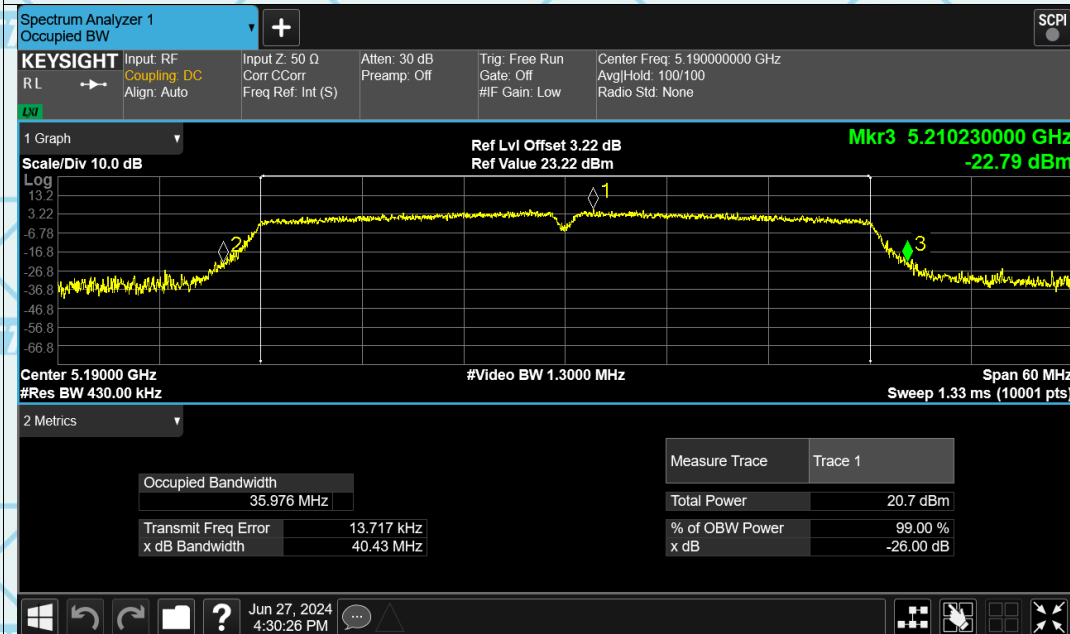


-26dB Bandwidth NVNT ac40 5230MHz Ant1

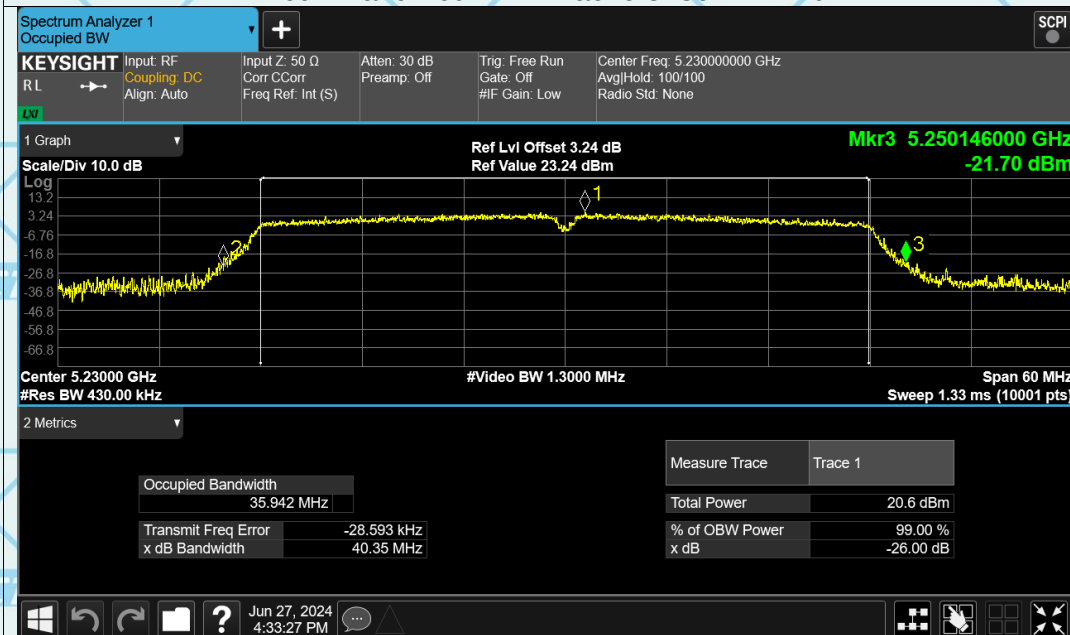




-26dB Bandwidth NVNT ac40 5270MHz Ant1

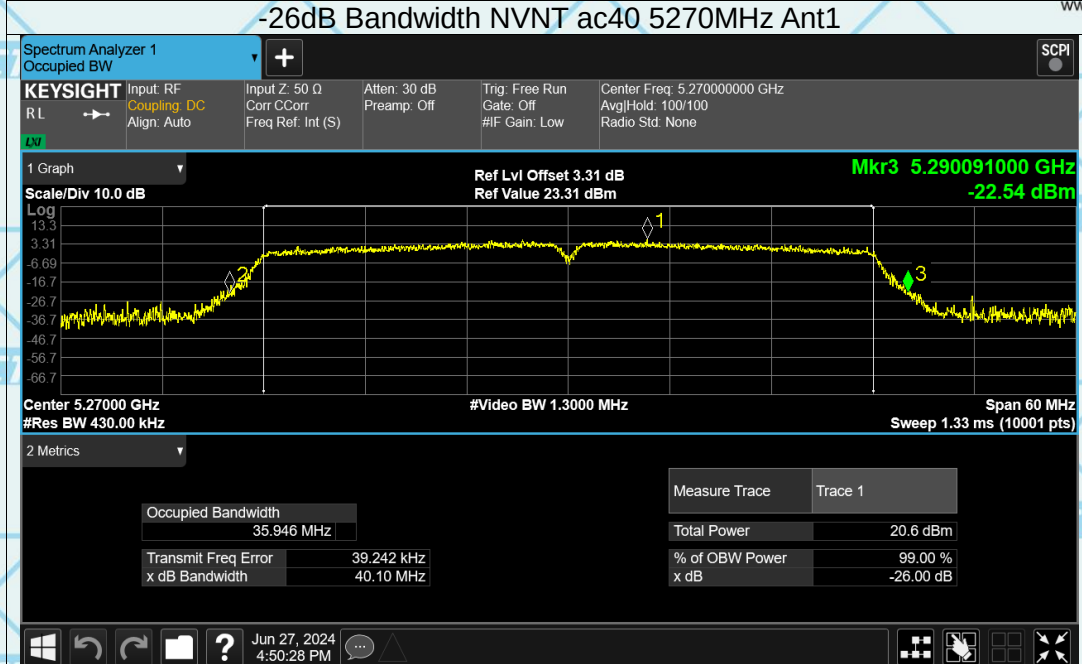


-26dB Bandwidth NVNT ac40 5310MHz Ant1

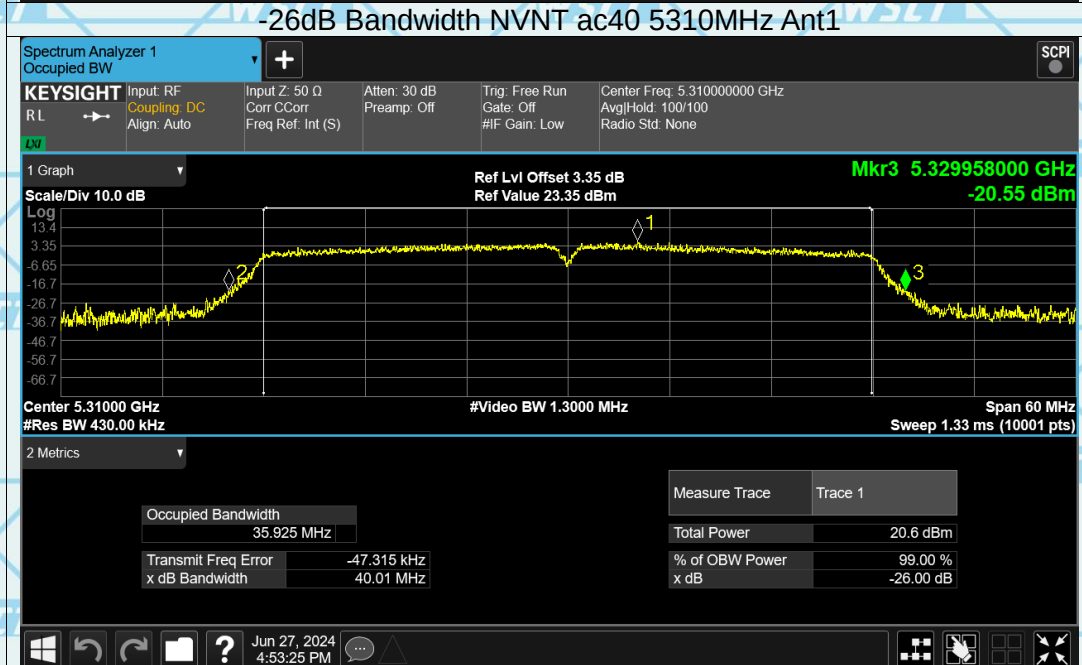




-26dB Bandwidth NVNT ac40 5510MHz Ant1

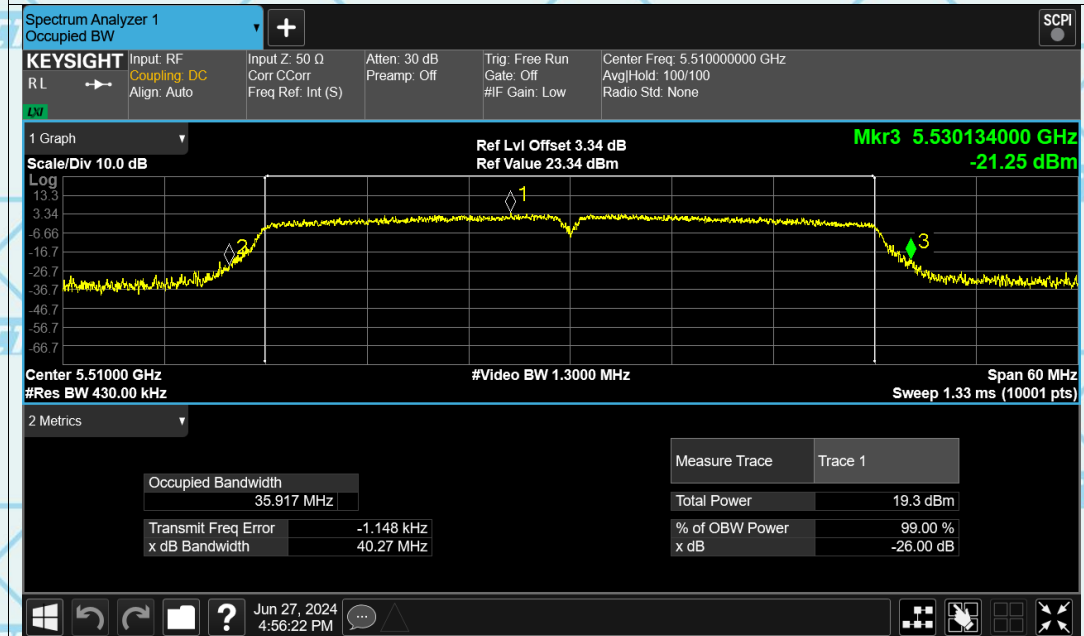


-26dB Bandwidth NVNT ac40 5670MHz Ant1

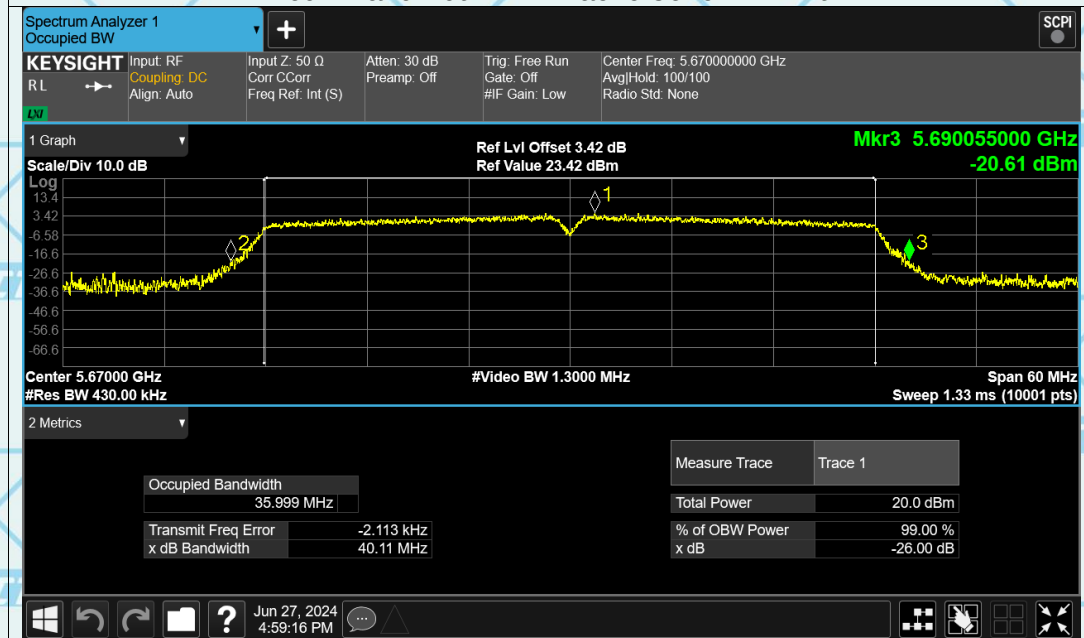




-26dB Bandwidth NVNT ac80 5210MHz Ant1

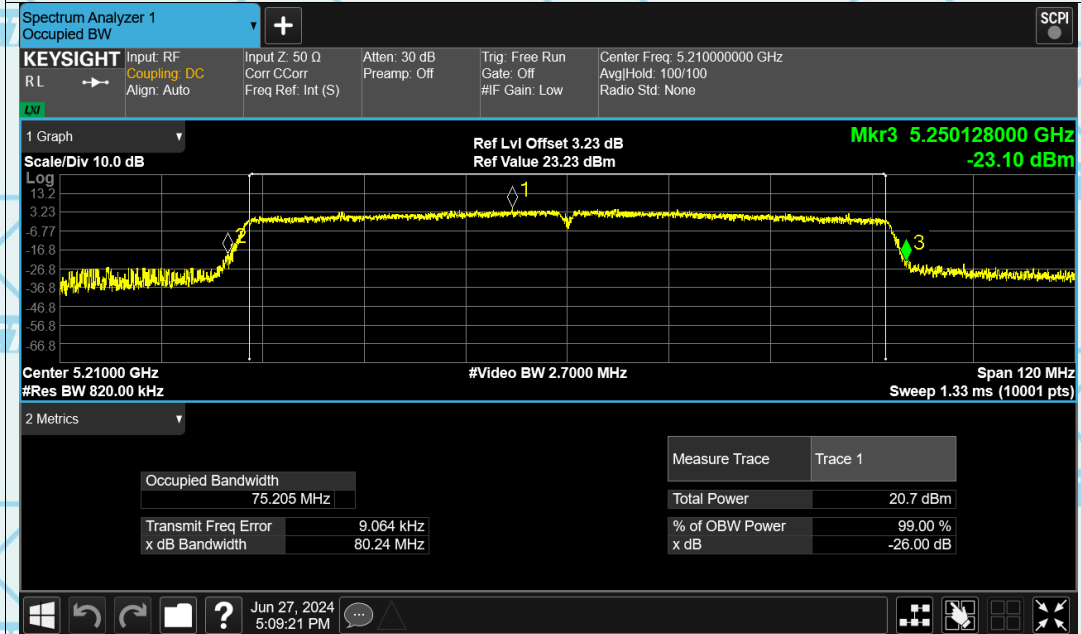


-26dB Bandwidth NVNT ac80 5290MHz Ant1

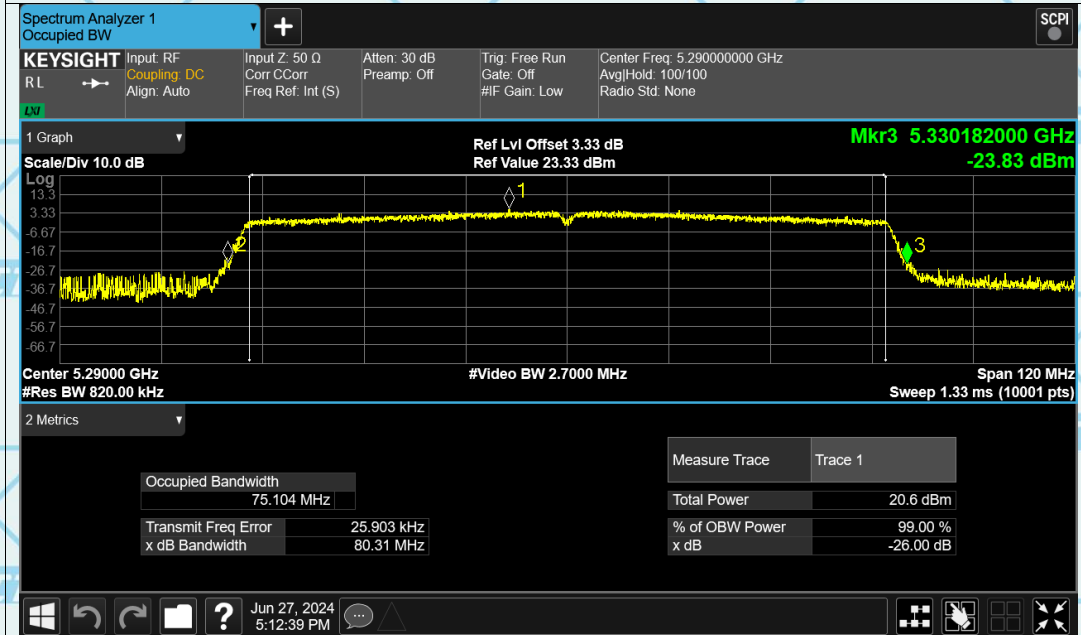




-26dB Bandwidth NVNT ac80 5530MHz Ant1

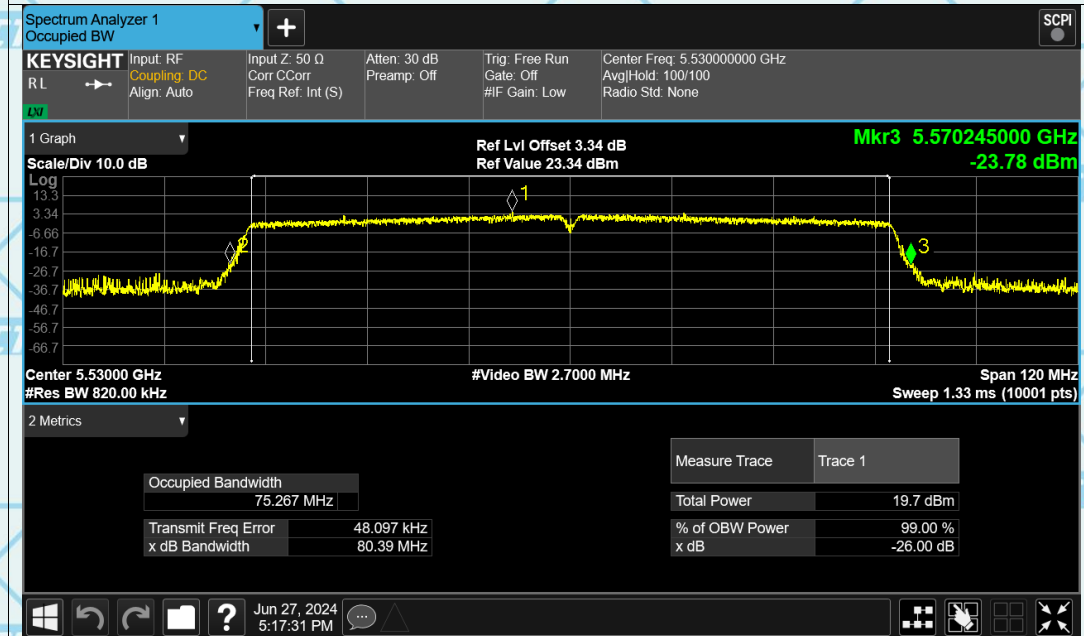

-26dB Bandwidth NVNT ac80 5610MHz Ant1

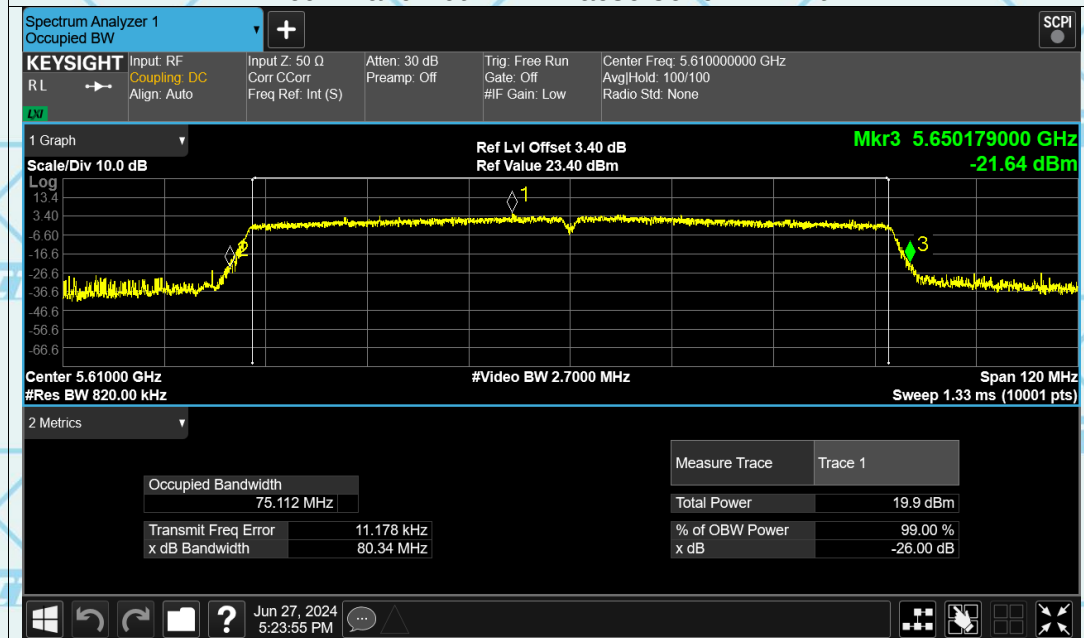





Report No.: WSCT-ANAB-R&E240700032A-Wi-Fi2

Certificate Number: AT-3951


For Question,
Please Contact with WSCT
www.wsct-cert.com**-6dB&99% Bandwidth**

Test Graphs

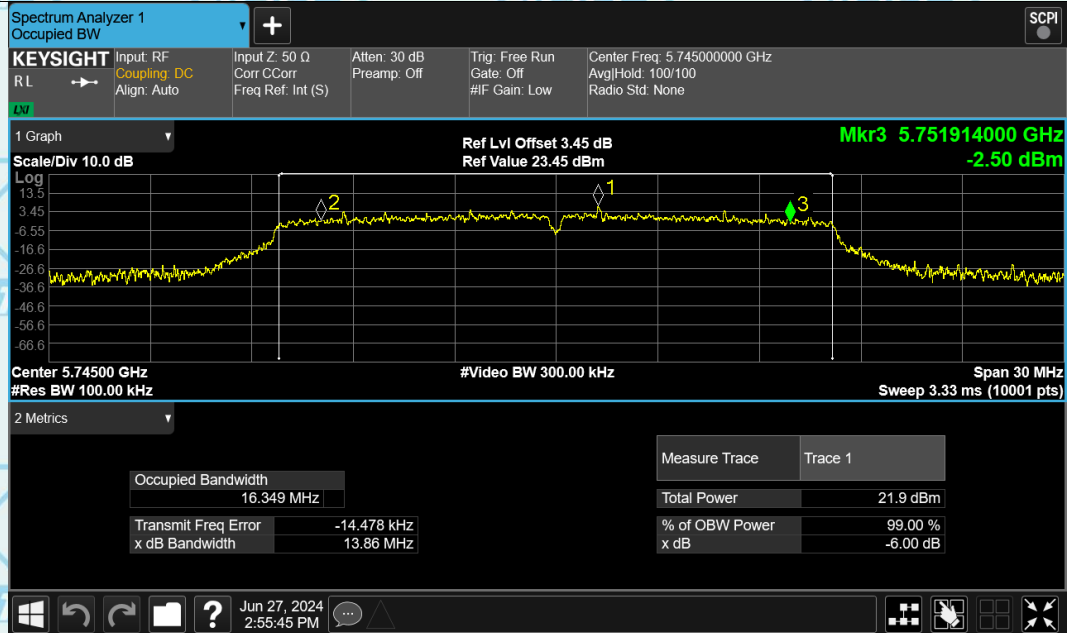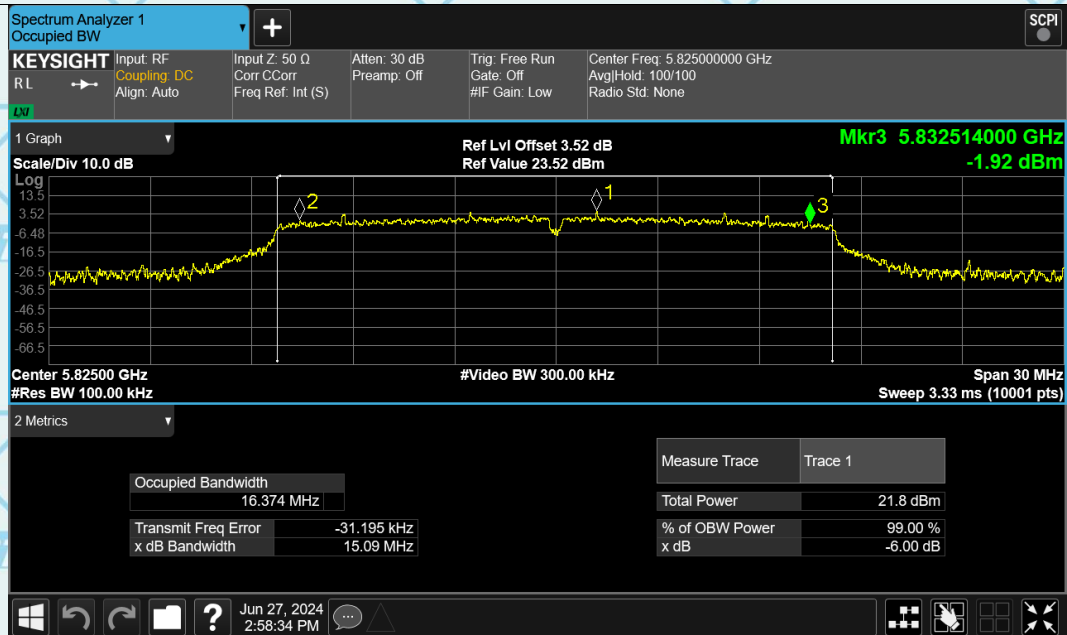
-6dB Bandwidth NVNT a 5745MHz Ant1**-6dB Bandwidth NVNT a 5825MHz Ant1**



-6dB Bandwidth NVNT n20 5745MHz Ant1

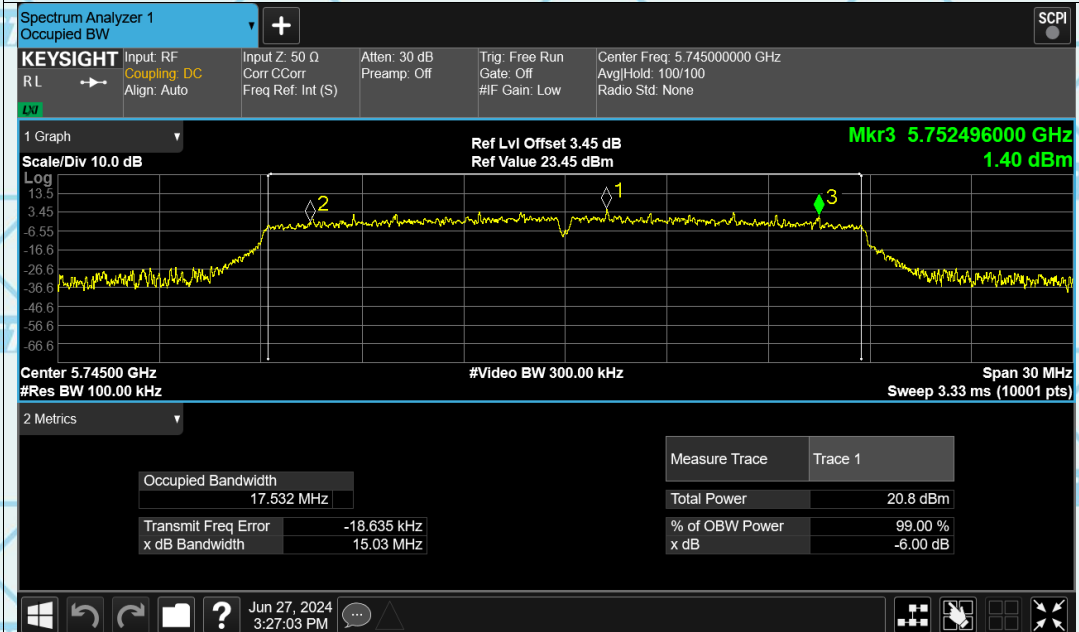


-6dB Bandwidth NVNT n20 5825MHz Ant1

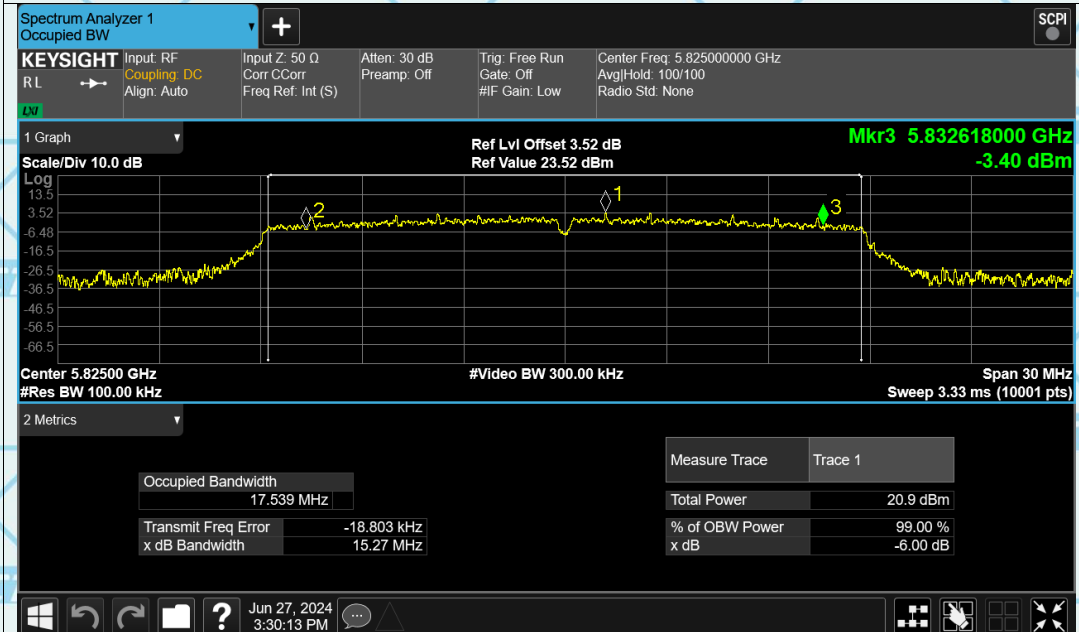



-6dB Bandwidth NVNT n40 5755MHz Ant1

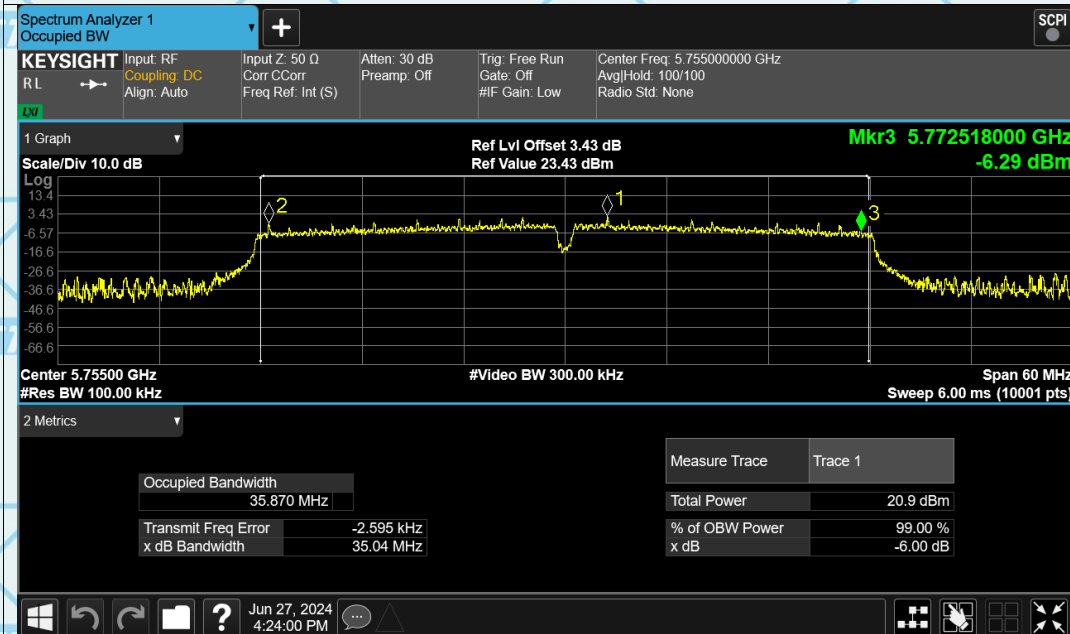

-6dB Bandwidth NVNT n40 5795MHz Ant1

