

**TEST REPORT****FCC ID: 2AIZN-X6720B****Product: Mobile Phone****Model No.: X6720B****Trade Mark: Infinix****Report No.: WSCT-ANAB-R&E240700032A-CBSD****Issued Date: 12 August 2024**

Issued for:

INFINIX MOBILITY LIMITED**FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG**

Issued By:

**World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B, Baoli'an Industrial Park, No. 58 Tangtou Avenue, Shiyan Street,
Bao'an District, Shenzhen, Guangdong, China****TEL: +86-755-26996192****FAX: +86-755-86376605**

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
3.1. TEST METHODOLOGY OF APPLIED STANDARDS	6
3.2. FACILITIES	6
3.3. ACCREDITATIONS	6
4. MEASUREMENT	7
4.1. END USER DEVICE ADDITIONAL REQUIREMENTS.....	7
4.2. MEASUREMENT RESULTS EXPLANATION EXAMPLE	7
4.3. TEST CONFIGURATION OF EQUIPMENT UNDER TEST:.....	7
4.4. MEASUREMENT EQUIPMENT USED	8
4.5. DESCRIPTION OF SUPPORT UNITS	8
4.6. MEASUREMENT RESULT	9
5. Test Setup Photographs	11



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-CBSD

1. Test Certification

Product:	Mobile Phone
Model No.:	X6720B
Trade Mark:	Infinix
Applicant:	INFINIX MOBILITY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	INFINIX MOBILITY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of receipt:	16 June 2024
Date of Test:	17 June 2024 to 09 August 2024
Applicable Standards:	FCC Part 96.47 FCC KDB 940660 D01 Part 96 CBRS Eqpt V02

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Qin Shuiquan

(Qin Shuiquan)


Approved By:

Liu Fuxin

(Liu Fuxin)

Date:

12 August 2024





For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-CBSD

2. Test Result Summary

No.	Item	Standard.	Test Case ID	Result
1	End User Device additional requirement.	Part 96.47	Pass	pass

The UUT is an End User Device. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Eqpt v03

WINNF-TS-0122-V1.0.2 CBRS CBD Test Specification

WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-CBSD

3. EUT Description

Product Name:	Mobile Phone
Model :	X6720B
Trade Mark:	Infinix
Software version:	X6720-H353RS-U-OP-240531V276
Hardware version:	V1.2
Operating Bands	TDD 5G NR Band 77/78
Antenna Type:	FIPA Antenna
Antenna gain:	5G NR 77/78: -2.92dbi
Operation Frequency Range:	NR Band77: 3550-3700 MHz(TX), 3550-3700 MHz(RX); NR Band78: 3550-3700 MHz(TX), 3550-3700 MHz(RX);
Operating Voltage:	Adapter: U180XSA Input: 100-240V~50/60Hz 0.6A Output: 5.0V~2.4A or 7.5V~2.4A 18.0W MAX Rechargeable Li-ion Polymer Battery Model: BL-5ABX Rated Voltage: 3.87V Rated Capacity: 4900mAh/18.97Wh Typical Capacity: 5000mAh/19.35Wh Limited Charge Voltage: 4.45V
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2. Antenna gain provided by the customer.



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-CBSD

3.1. Test Methodology of Applied Standards

FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Eqpt V02

3.2. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No. 58 Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

3.3. ACCREDITATIONS

CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

FCC - Designation Number: CN1303

World Standardization Certification & Testing Group(Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Designation Number: CN1303.

ANAB - Certificate Number: AT-3951

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (ANAB). Certification Number: AT-3951





Report No.: WSCT-ANAB-R&E240700032A-CBSD

4. MEASUREMENT

4.1. End User Device additional requirements

FCC Part 96.47

(a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

(1) An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

4.2. Measurement Results Explanation Example


For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

1. Setup with frequency 3590-3610MHz and power level 18dBm/MHz;
2. Enable AP service from EPC management
3. Check EUD Tx Frequency and power
4. Disable AP service from EPC management
 - a. Check EUD stops transmission within 10seconds.
5. Setup with frequency 3610-3630MHz and power level 5dBm/MHz;
6. Enable AP service from EPC management
7. Check EUD Tx Frequency and power
8. Disable AP service from EPC management
 - a. Check EUD stops transmission within 10seconds.

4.3. Test Configuration of Equipment Under Test:

Connection Diagram of Test System

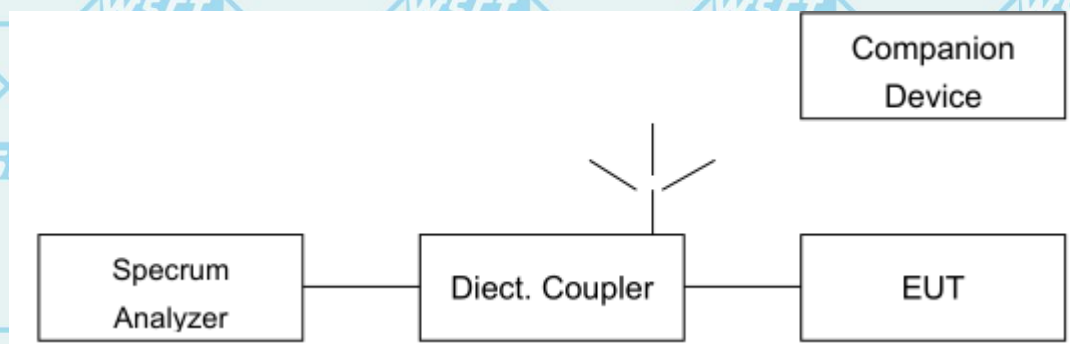

The EUT is an End User Device (EUD) which was connected to a certified Gentek CBSD as the company-ion device to show compliance with Part 96.47 requirement.



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-CBSD

4.4. Measurement Equipment Used

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Spectrum Analyzer	keysight	FSU	100114	11/05/2023	11/04/2024
DC Power Supply	Gwinstek	SPS-3611	GEV856725	11/05/2023	11/04/2024
Attenuator	KEYSIGHT	8494B	TH60073522	11/05/2023	11/04/2024
Attenuator	KEYSIGHT	8494B	TH60073536	11/05/2023	11/04/2024
DC Block	Mini-Circuits	BLK-18-S+	5	11/05/2023	11/04/2024
Power Divider	RF-LAMBDA	RFLT2W1G18G	11-JSPF412	11/05/2023	11/04/2024
2WayDivider	Woken	A02056002D	DSU7AMW9S	11/05/2023	11/04/2024

4.5. Description of Support Units


Description	Manufacturer	Model No.	Serial No.
AP	PC i-	FXG-05TX	N/A
5G NR Base station	Baicells	BSC7048A243 (FCC ID: 2AG32BSC7048A243)	120200056822C2B0002
EPC	Gentek	CSB-3230A-GT1	N/A
PC	Lenovo	TP00067A	PF-OGT3MS



For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-CBSD

4.6. Measurement Result

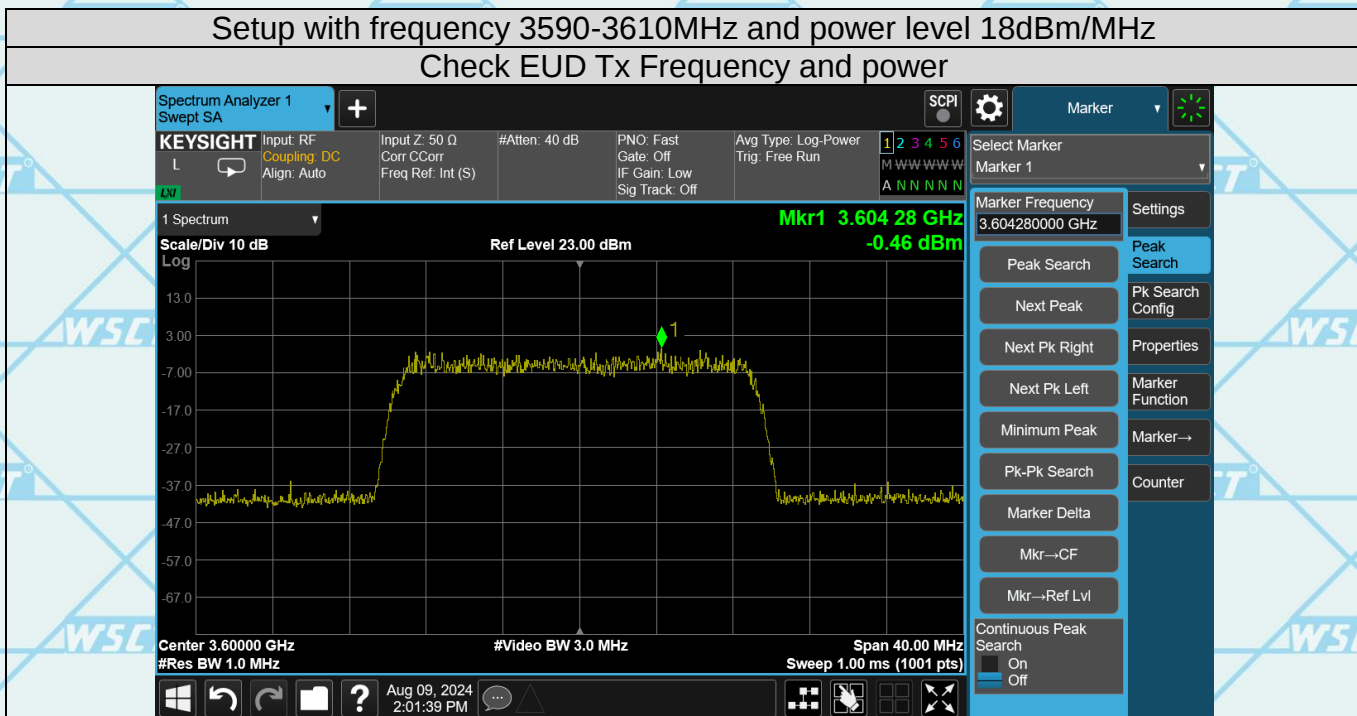


EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.





Setup with frequency 3610-3630MHz and power level 5dBm/MHz Check EUD Tx Frequency and power

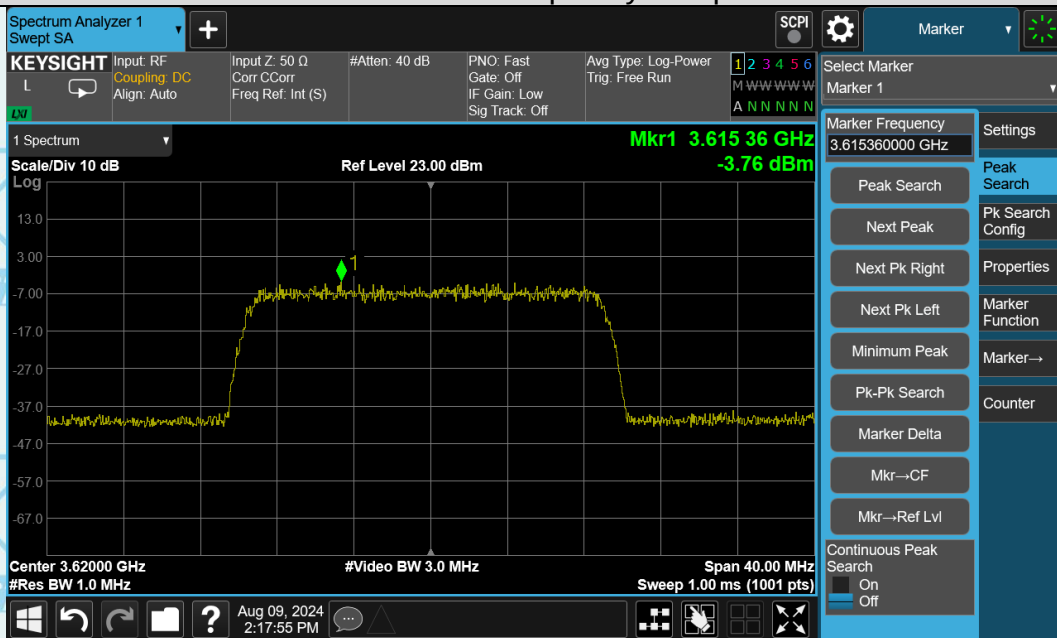

EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.





For Question,
Please Contact with WSCT
www.wsct-cert.com

Report No.: WSCT-ANAB-R&E240700032A-CBSD

5. Test Setup Photographs

Please refer to Annex "Set Up Photos-CBE" for test setup photos

*******END OF REPORT*******

