

Meas1.Head Right Cheek GPRS 850 Ch251 ANT1

Date: 2025/5/20

Communication System Band: GPRS850; Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.576$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(8.85, 9.15, 9.38); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch251/Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.28 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.48 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.537 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

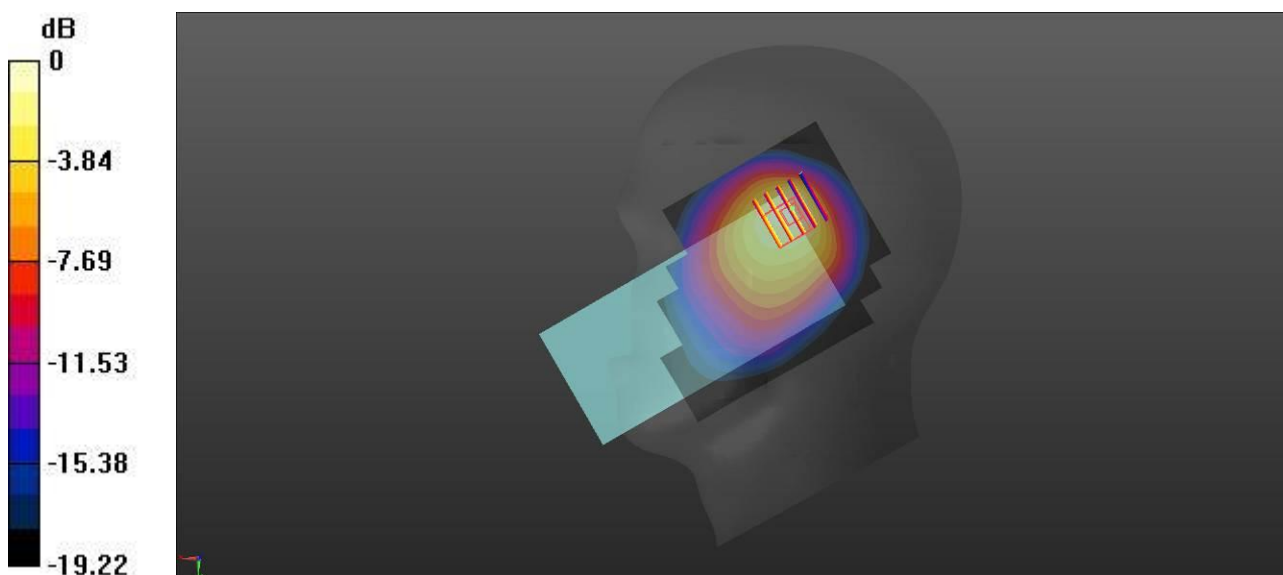

0 dB = 1.29 W/kg

Meas2.Hotspot Top side 10mm GSM 850 Ch190 ANT1

Date: 2025/5/20

Communication System Band: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.585$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(8.85, 9.15, 9.38); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.288 W/kg


Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.76 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

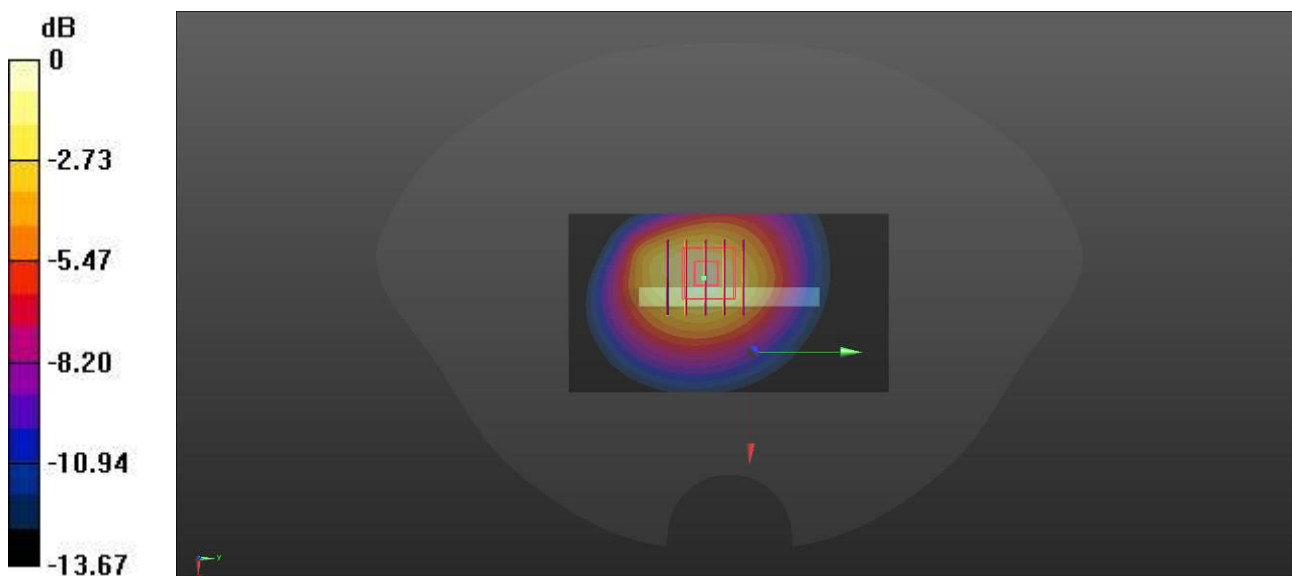

0 dB = 0.316 W/kg

Meas3.Head Right Tilt GPRS 1900 Ch661 ANT1

Date: 2025/5/21

Communication System Band: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.294$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.34, 7.59, 7.78); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (81x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.695 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.601 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.794 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.679 W/kg

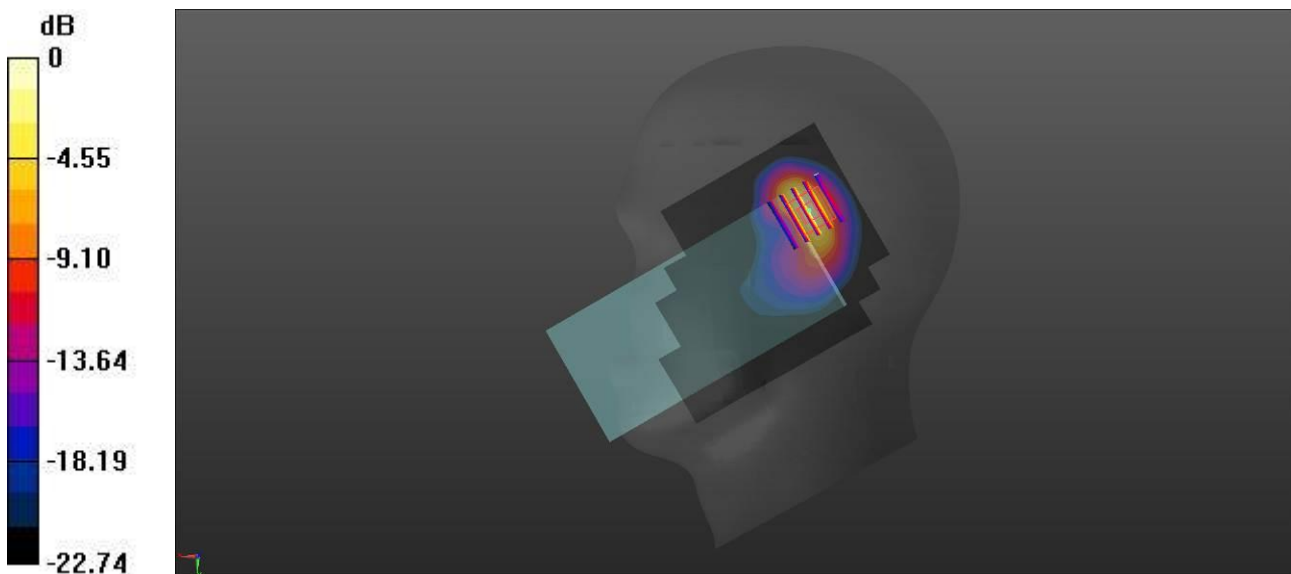

0 dB = 0.679 W/kg

Meas4.Hotspot Top side 10mm GSM 1900 Ch661 ANT1

Date: 2025/5/21

Communication System Band: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.294$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.34, 7.59, 7.78); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.379 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.215 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.389 W/kg

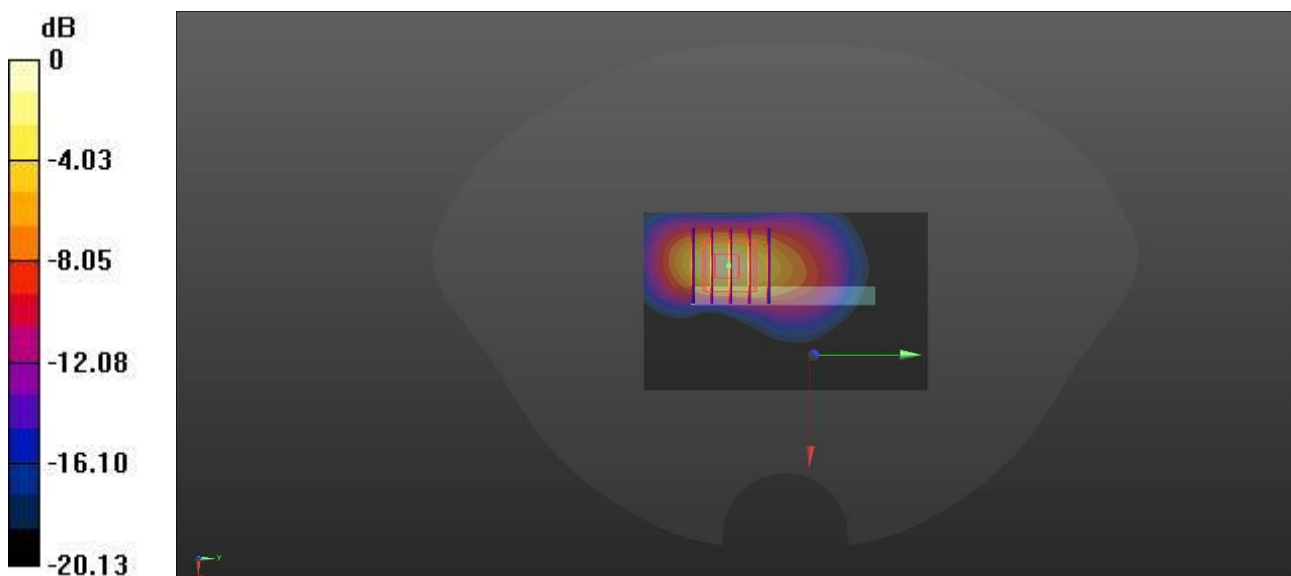

0 dB = 0.389 W/kg

Meas5.Head Right Tilt WCDMA B2 Ch9400 ANT1

Date: 2025/5/21

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.294$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.34, 7.59, 7.78); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (81x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.608 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.841 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.597 W/kg

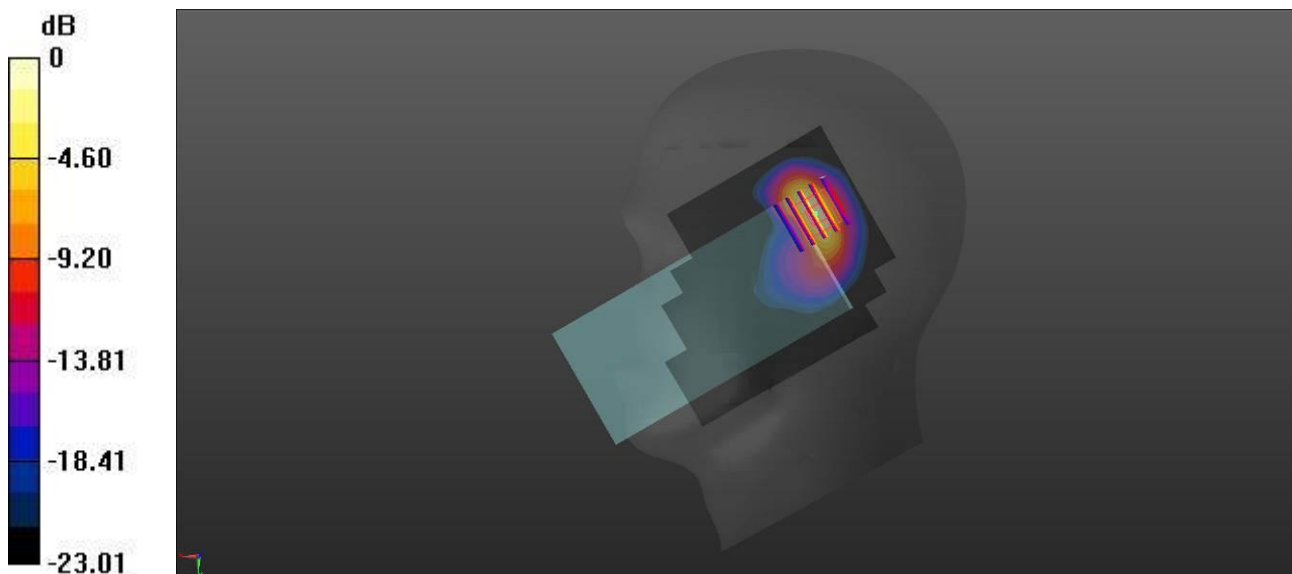

0 dB = 0.597 W/kg

Meas6.Hotspot Top side 10mm WCDMA B2 Ch9400 ANT1

Date: 2025/5/21

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.294$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.34, 7.59, 7.78); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (51x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.315 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.395 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

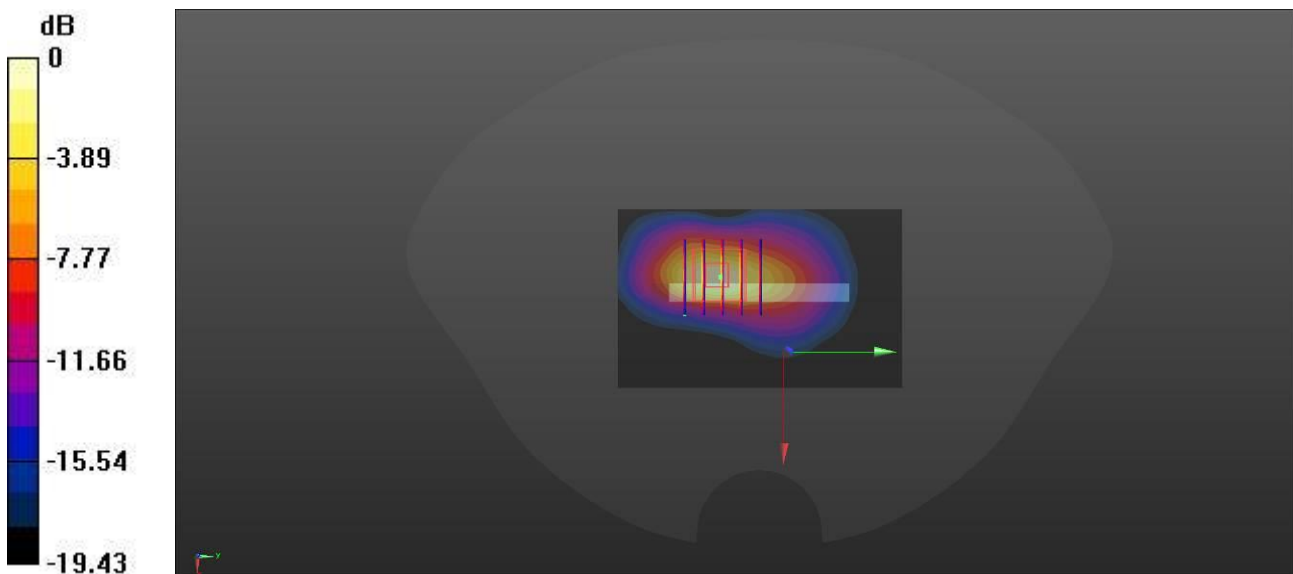

0 dB = 0.328 W/kg

Meas7.Head Right Tilt WCDMA B4 Ch1412 ANT1

Date: 2025/5/22

Communication System Band: IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.532$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.57, 7.83, 8.02); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1412/Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.660 W/kg


Ch1412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.556 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.666 W/kg

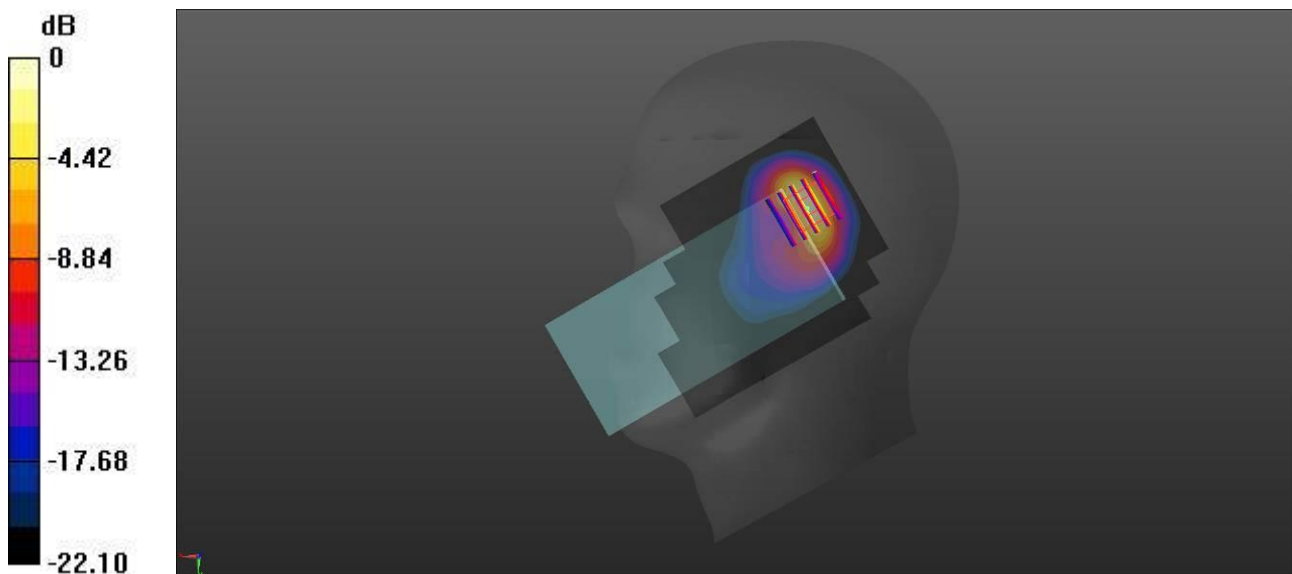

0 dB = 0.666 W/kg

Meas8.Hotspot Top side 10mm WCDMA B4 Ch1412 ANT1

Date: 2025/5/22

Communication System Band: IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.532$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.57, 7.83, 8.02); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1412/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.275 W/kg


Ch1412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.620 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

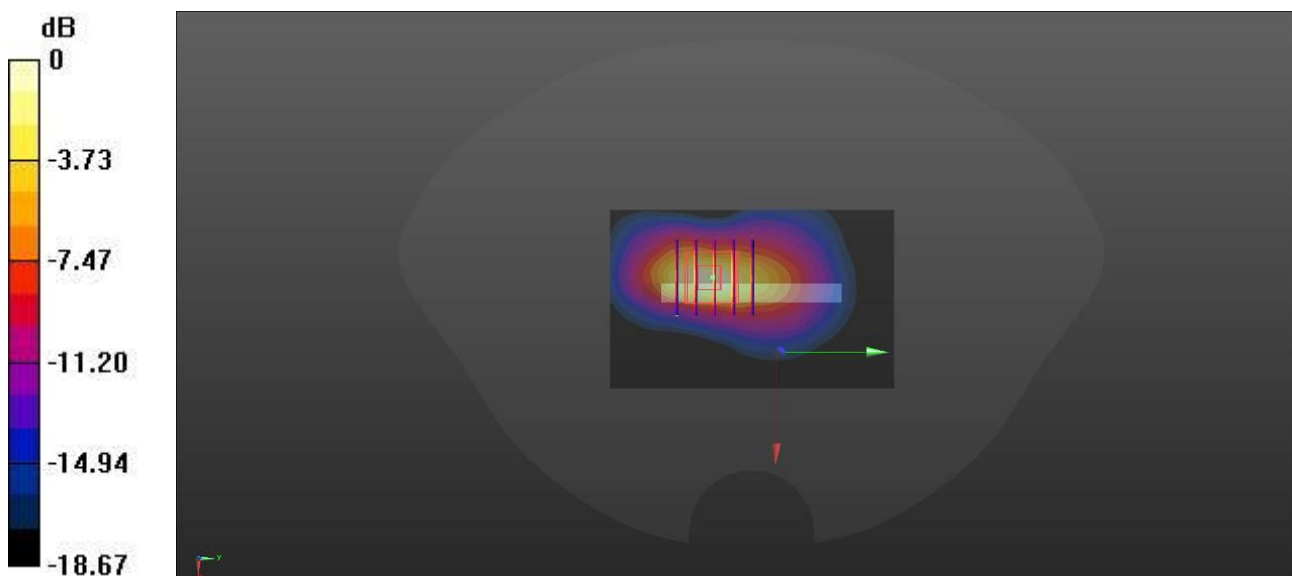

0 dB = 0.289 W/kg

Meas9.Head Right Cheek WCDMA B5 Ch4182 ANT1

Date: 2025/5/20

Communication System Band: V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.585$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(8.85, 9.15, 9.38); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.552 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.61 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.801 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.579 W/kg

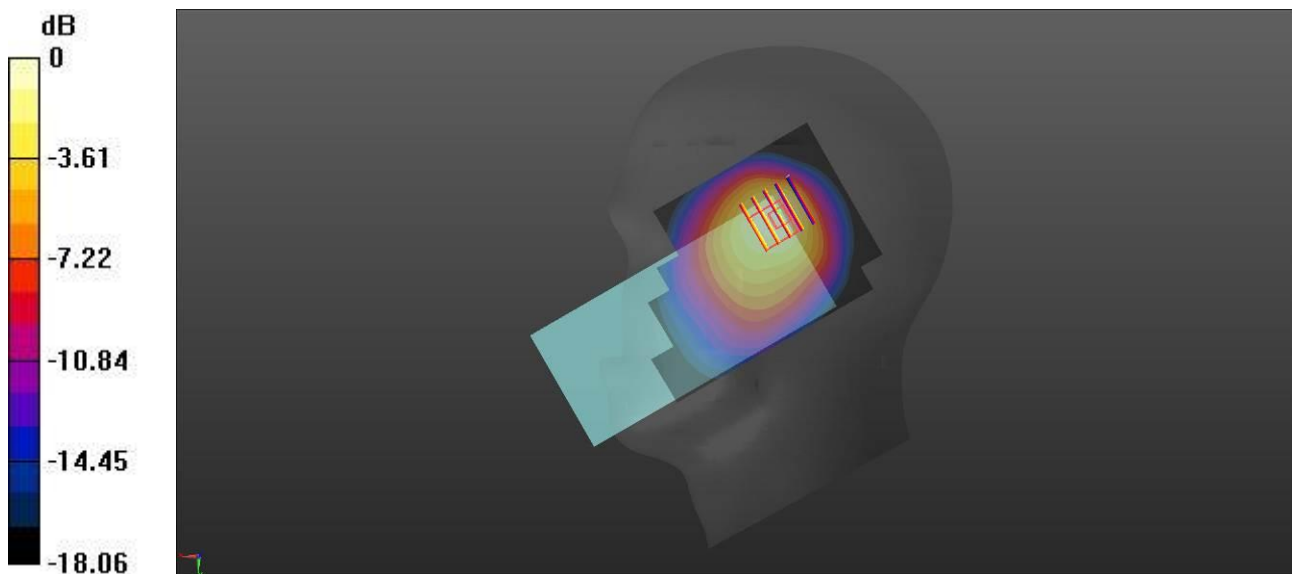

0 dB = 0.579 W/kg

Meas10.Hotspot Back side 10mm WCDMA B5 Ch4182 ANT1

Date: 2025/5/20

Communication System Band: V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.585$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(8.85, 9.15, 9.38); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.258 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.570 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

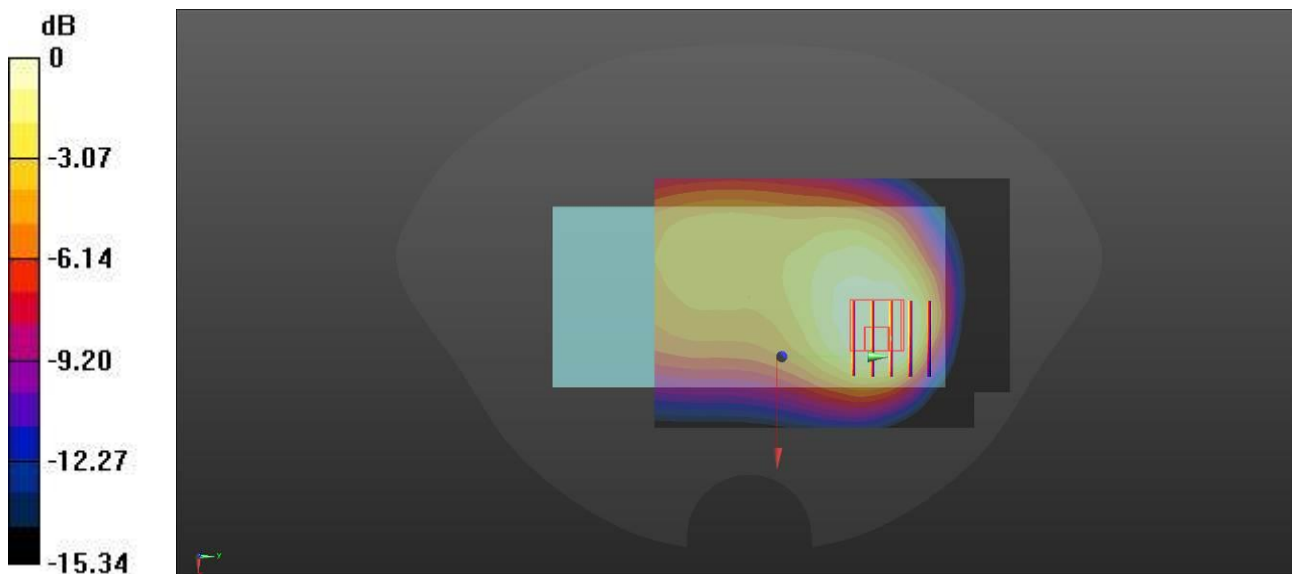

0 dB = 0.221 W/kg

Meas11.Head Right Tilt LTE B2 Ch18900 ANT1

Date: 2025/5/21

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.294$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.34, 7.59, 7.78); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.515 W/kg


Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.394 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.823 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.683 W/kg

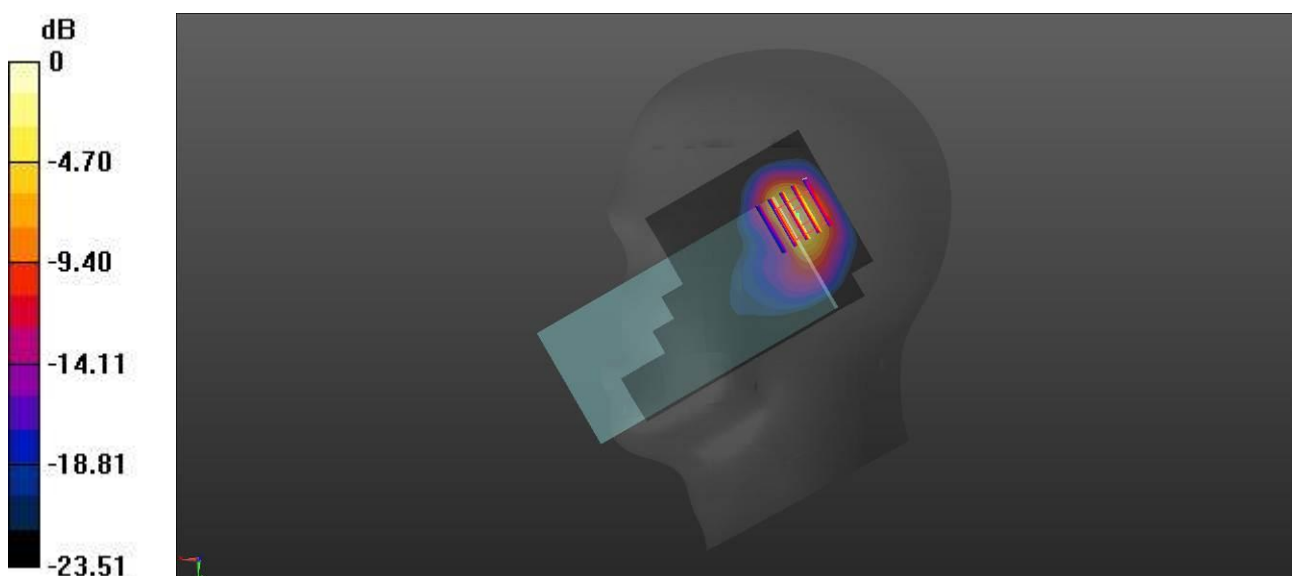

0 dB = 0.683 W/kg

Meas12.Hotspot Top side 10mm LTE B2 Ch18900 ANT1

Date: 2025/5/21

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.294$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.34, 7.59, 7.78); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.320 W/kg


Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.419 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.341 W/kg

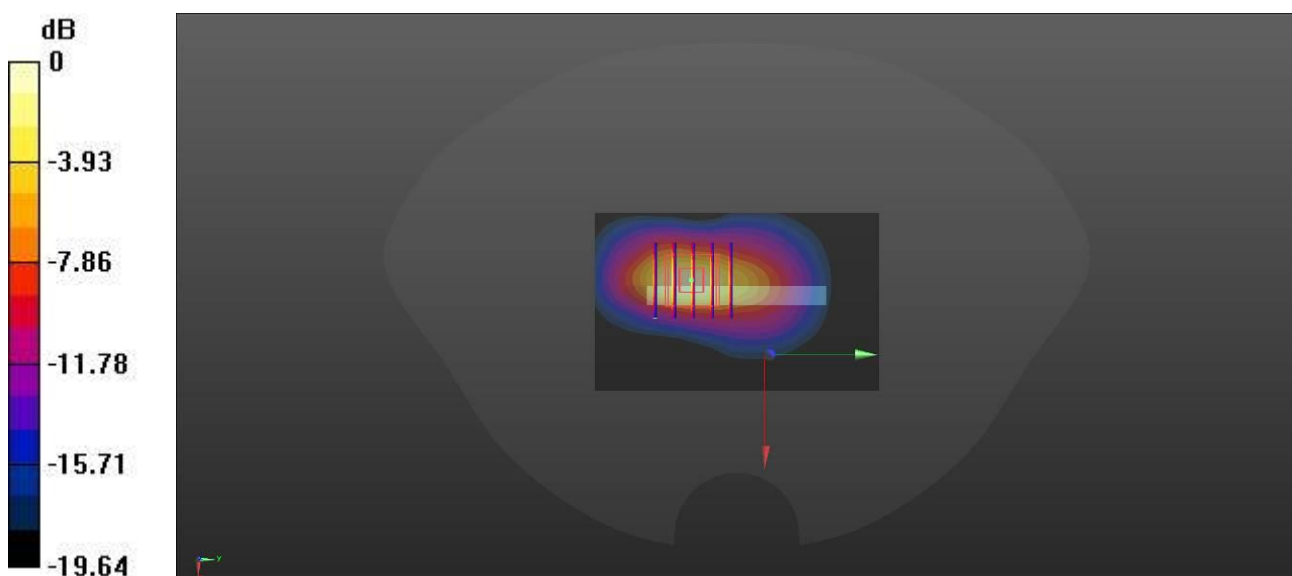

0 dB = 0.341 W/kg

Meas13.Head Right Tilt LTE B4 Ch20175 ANT1

Date: 2025/5/22

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.532$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.57, 7.83, 8.02); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20175/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.637 W/kg


Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.690 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.840 W/kg

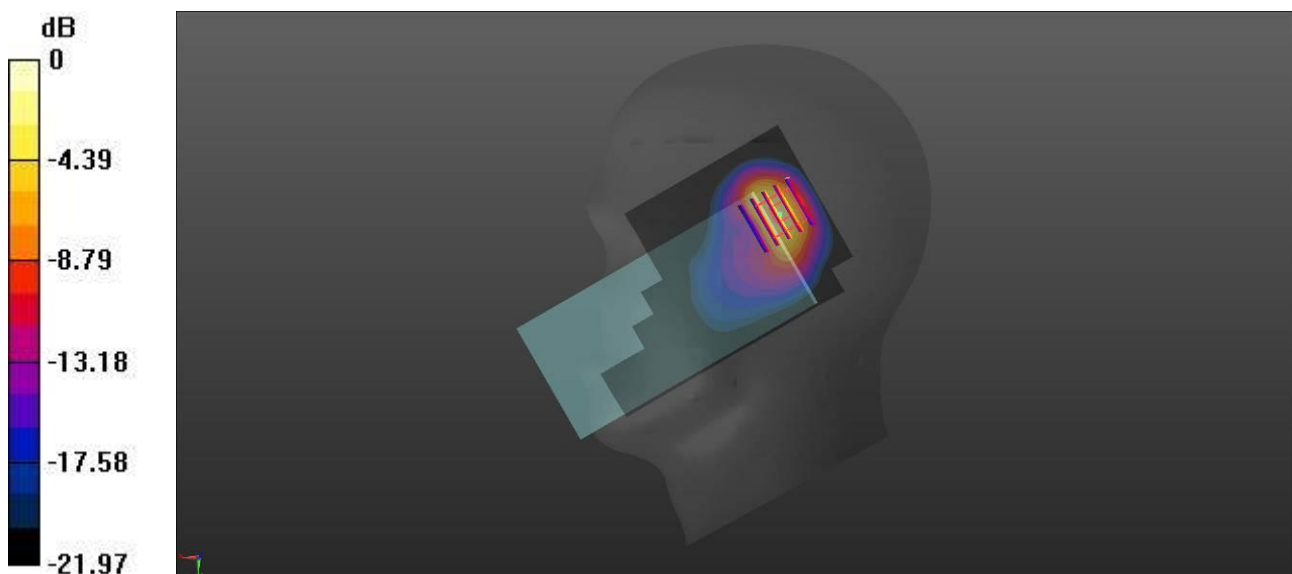

0 dB = 0.840 W/kg

Meas14.Hotspot Top side 10mm LTE B4 Ch20175 ANT1

Date: 2025/5/22

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.532$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.57, 7.83, 8.02); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20175/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.330 W/kg


Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.357 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

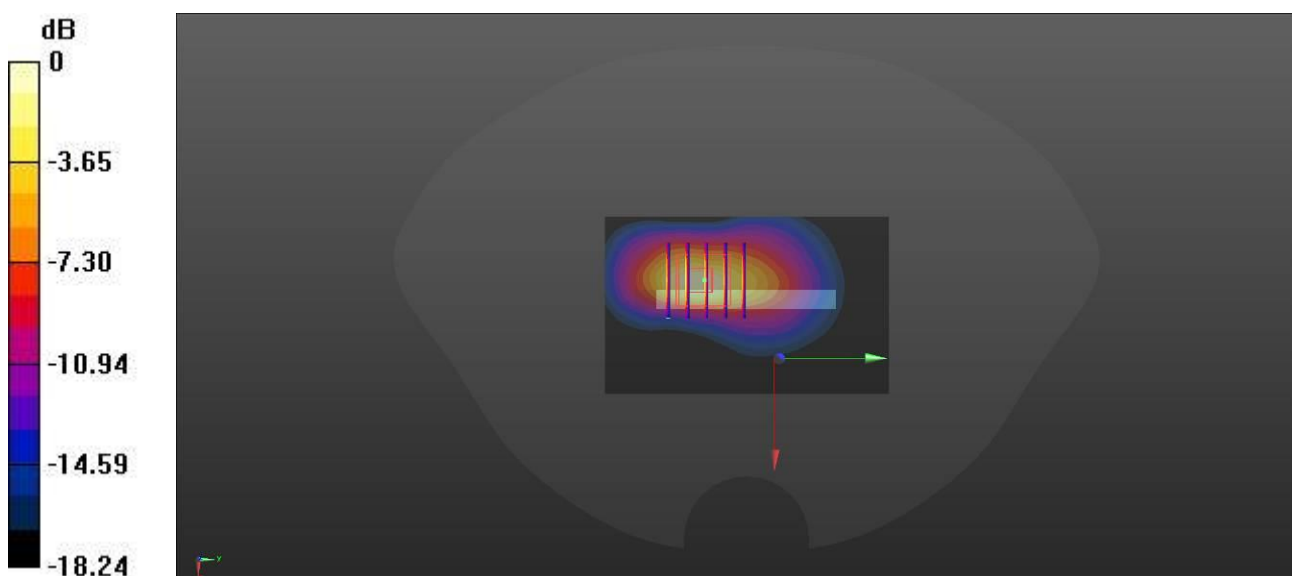

Meas15.Head Right Cheek LTE B5 Ch20525 ANT1

Date: 2025/5/20

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.585$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(8.85, 9.15, 9.38); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20525/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.455 W/kg


Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.86 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.468 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.347 W/kg

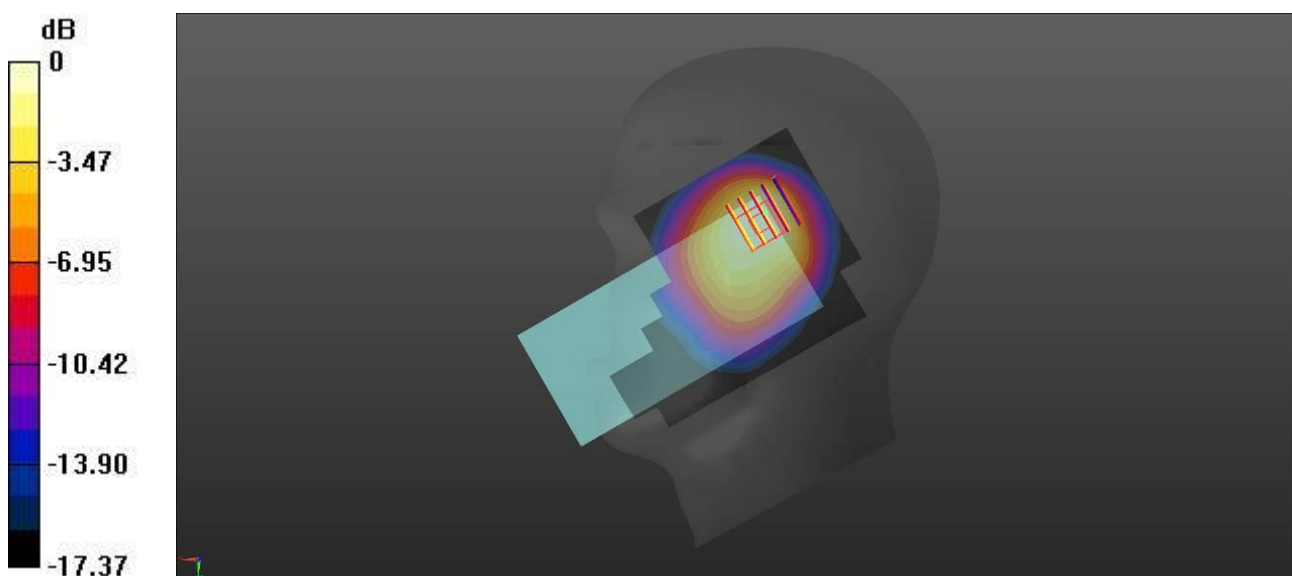

0 dB = 0.347 W/kg

Meas16.Hotspot Top side 10mm LTE B5 Ch20525 ANT1

Date: 2025/5/20

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.585$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(8.85, 9.15, 9.38); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20525/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.134 W/kg


Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.662 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

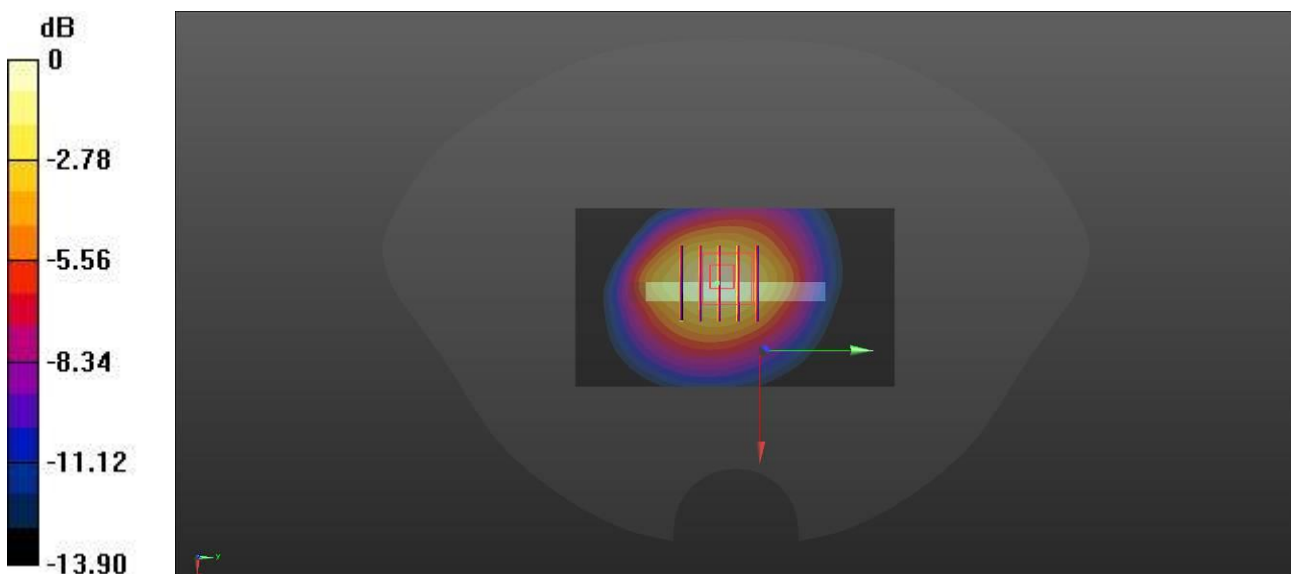

0 dB = 0.130 W/kg

Meas17.Head Right Tilt LTE B7 Ch21350 ANT1

Date: 2025/5/23

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 38.456$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.06, 7.3, 7.48); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.219 W/kg


Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.8830 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

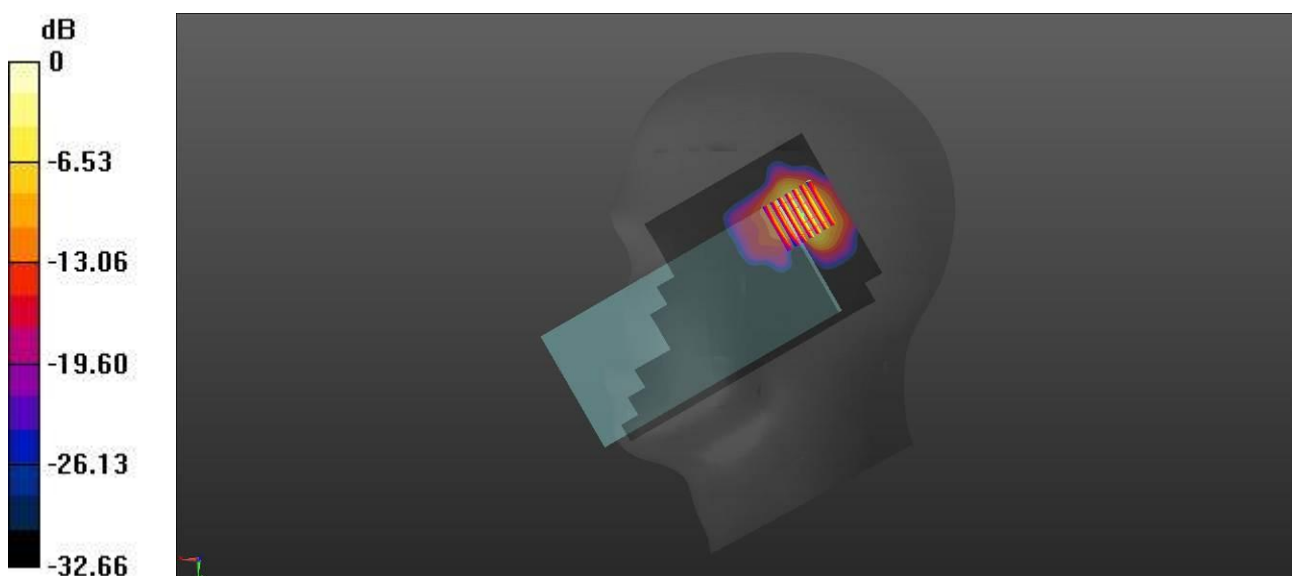

0 dB = 0.201 W/kg

Meas18.Hotspot Bottom side 10mm LTE B7 Ch21350 ANT0

Date: 2025/5/23

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 38.456$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.06, 7.3, 7.48); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.134 W/kg


Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.016 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

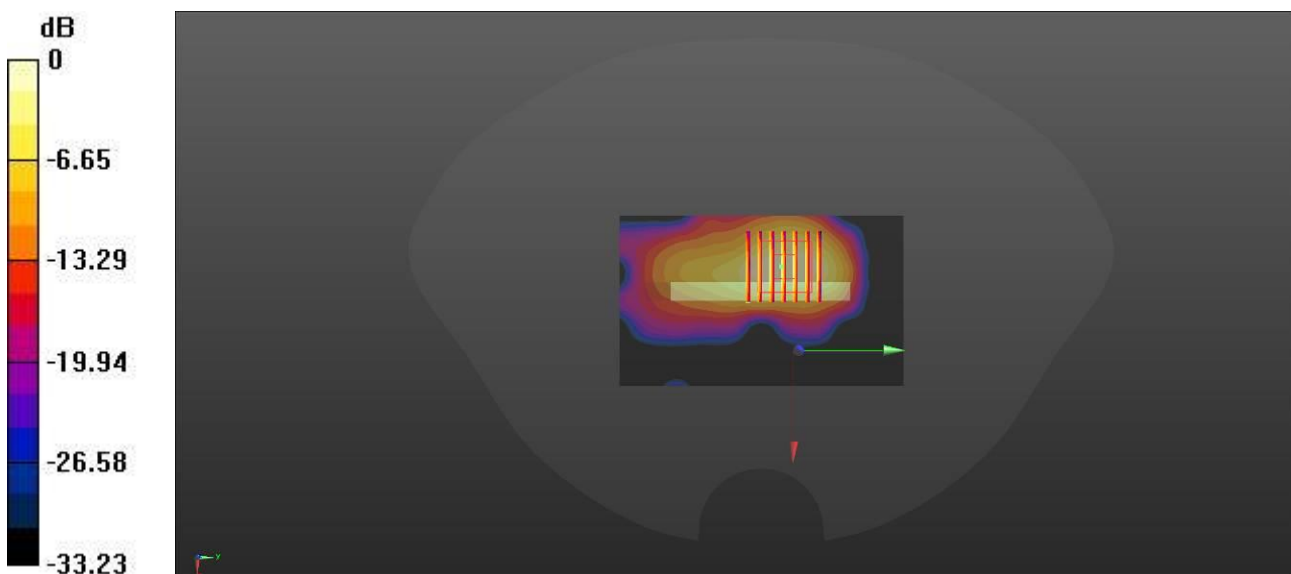

0 dB = 0.130 W/kg

Meas19.Head Right Tilt LTE B41 Ch40640 ANT1

Date: 2025/5/23

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 38.356$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.06, 7.3, 7.48); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40640/Area Scan (91x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.193 W/kg


Ch40640/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.3770 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

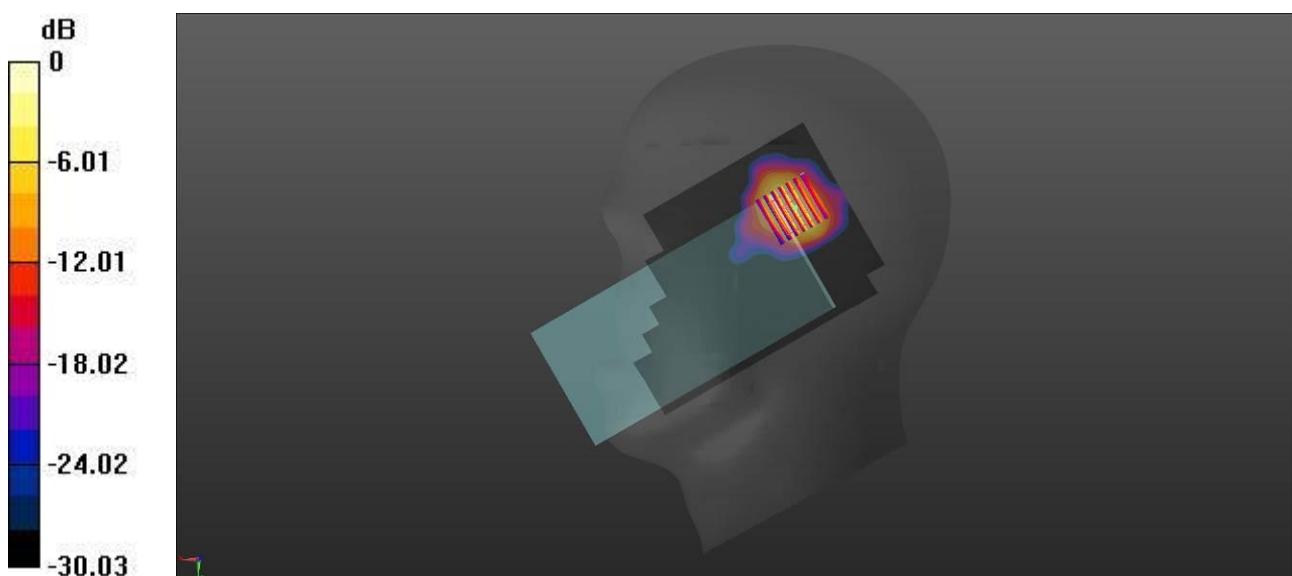

0 dB = 0.234 W/kg

Meas20.Hotspot Bottom side 10mm LTE B41 Ch40640 ANT0

Date: 2025/5/23

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 38.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(7.06, 7.3, 7.48); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40640/Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.179 W/kg


Ch40640/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.466 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.176 W/kg

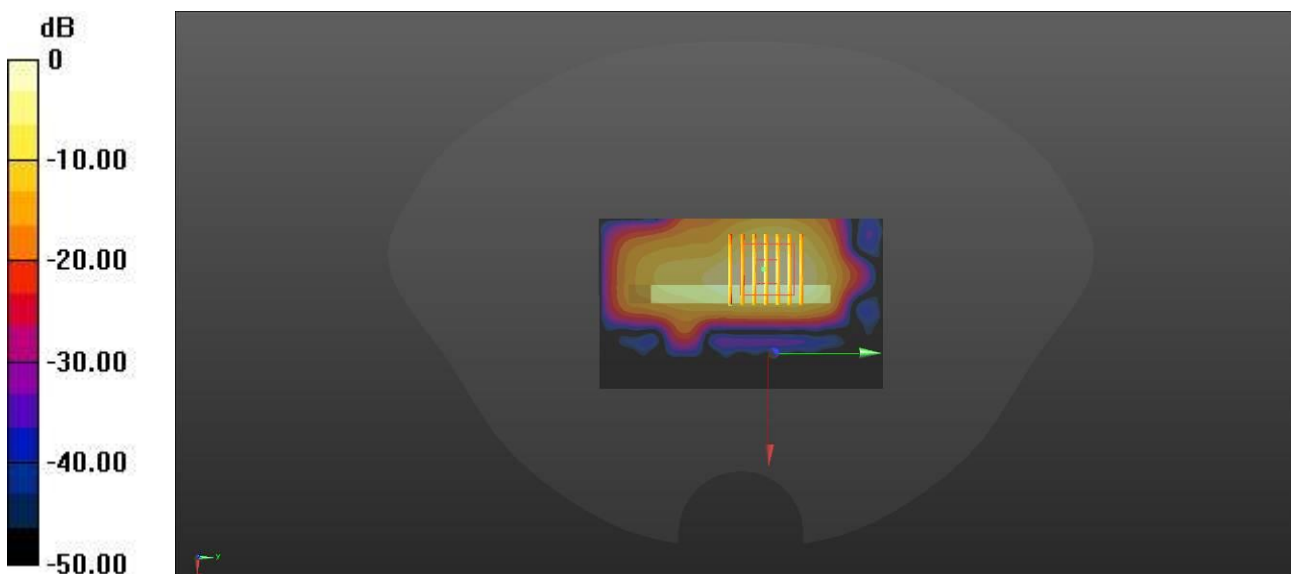

0 dB = 0.176 W/kg

Meas21.Head Left cheek WLAN2.4G Ch11

Date: 2025/5/22

Communication System Band: WLAN(n); Frequency: 2462 MHz; Duty Cycle: 1:1.008

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 38.625$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(6.98, 7.22, 7.4); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.542 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.112 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

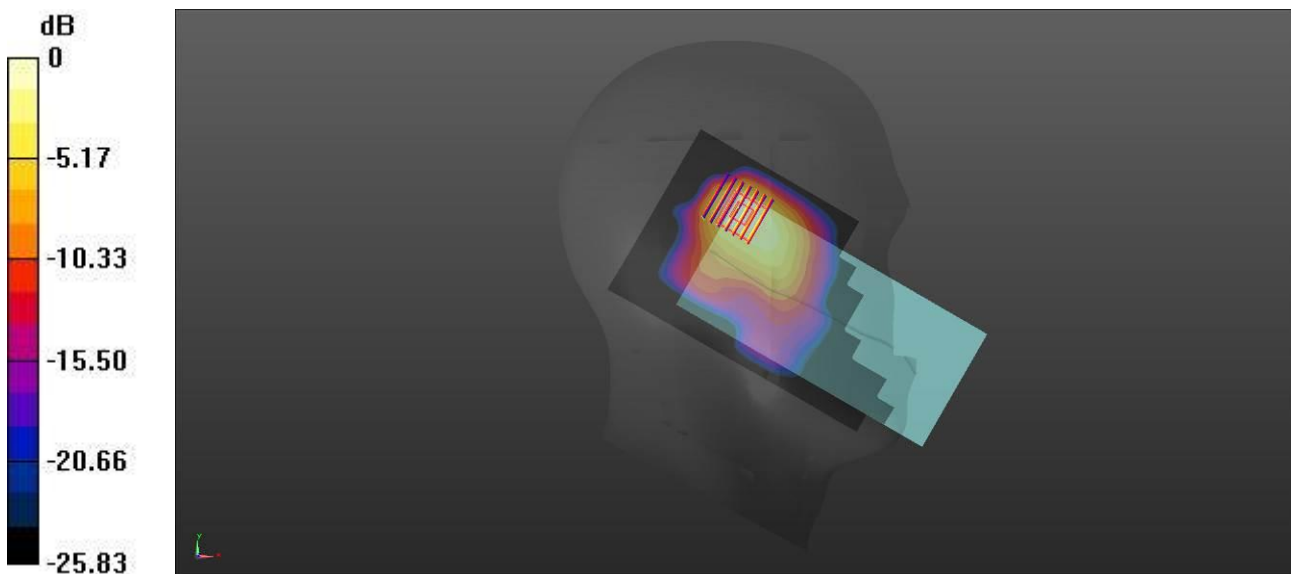

0 dB = 0.454 W/kg

Meas22.Hotspot Back side 10mm WLAN2.4G Ch11

Date: 2025/5/22

Communication System Band: WLAN(b); Frequency: 2462 MHz; Duty Cycle: 1:1.008

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 38.625$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(6.98, 7.22, 7.4); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.208 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.494 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

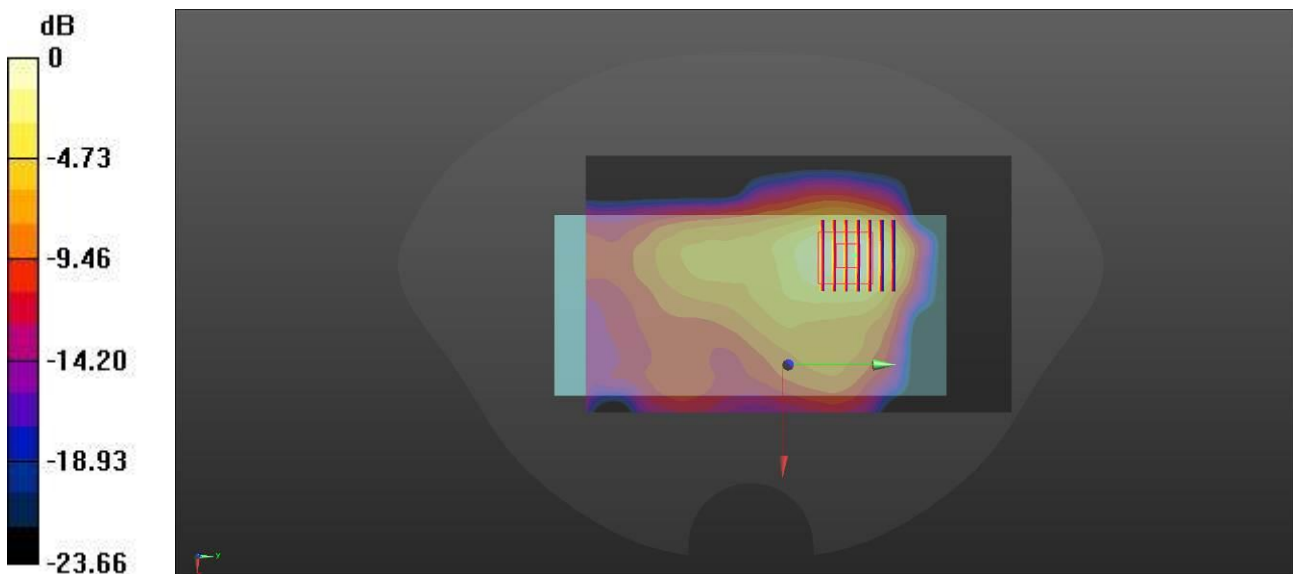

0 dB = 0.217 W/kg

Meas23.Head Left cheek WLAN5.3G Ch64

Date: 2025/5/18

Communication System Band: WLAN(a); Frequency: 5320 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.816$ S/m; $\epsilon_r = 35.146$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(5.44, 5.62, 5.76); Calibrated: 2024/9/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch64/Area Scan (111x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.803 W/kg


Ch64/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.198 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

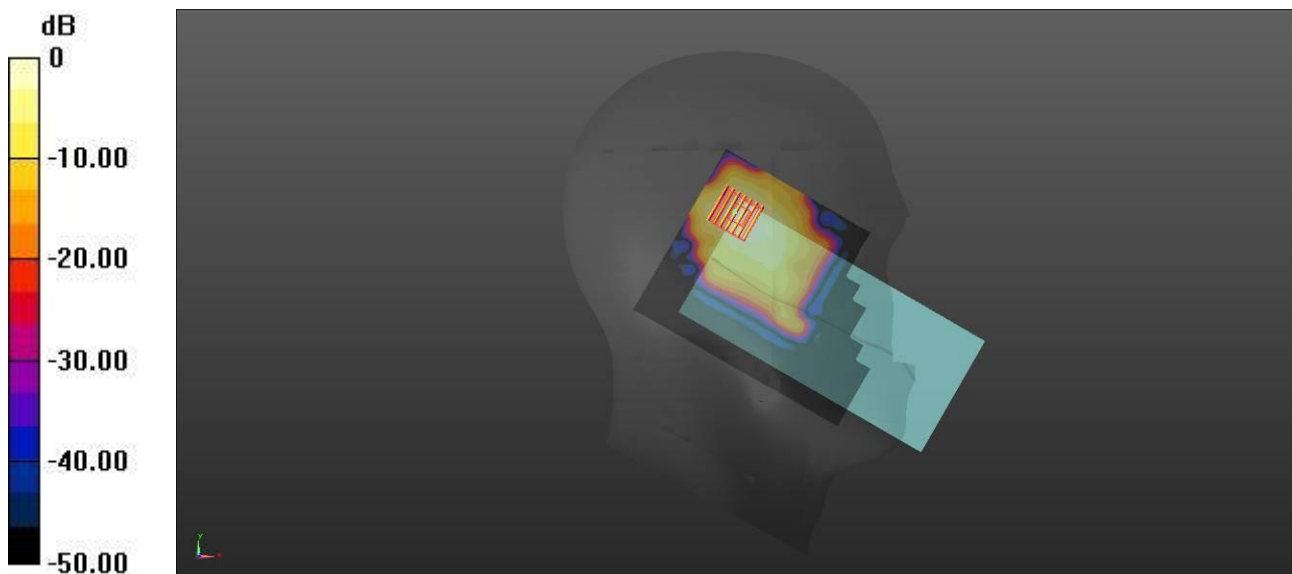

0 dB = 0.817 W/kg

Meas24.Head Left cheek WLAN5.6G Ch116

Date: 2025/5/19

Communication System Band: WLAN(a); Frequency: 5580 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.934$ S/m; $\epsilon_r = 34.602$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(4.91, 5.08, 5.2); Calibrated: 2024/9/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch116/Area Scan (111x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.934 W/kg


Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.911 W/kg

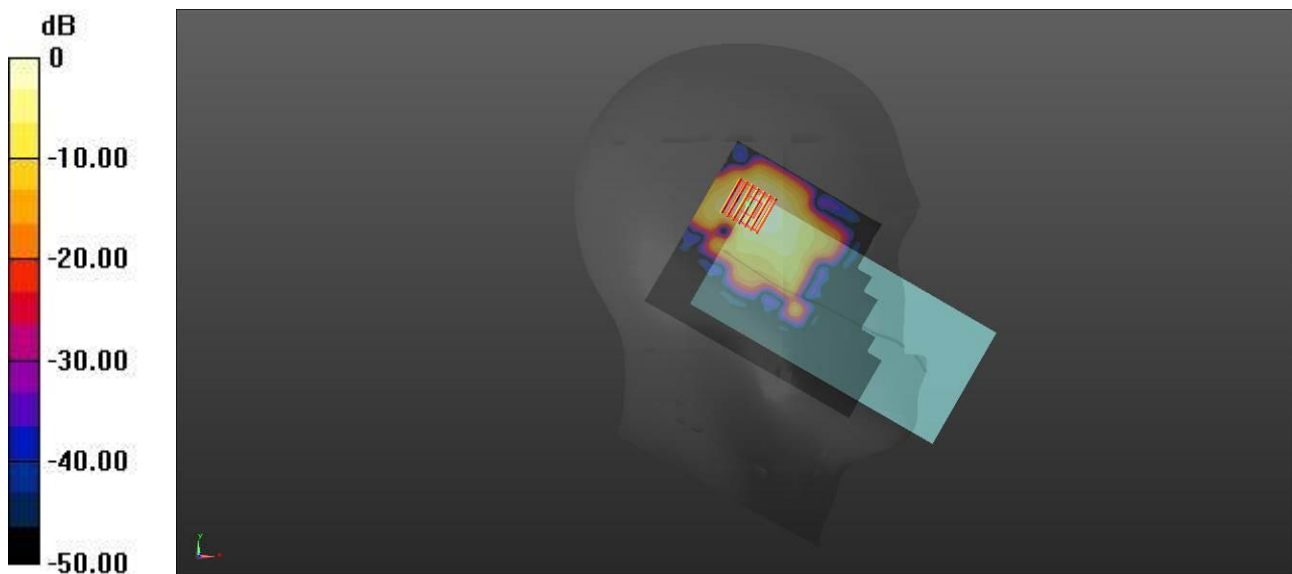

0 dB = 0.911 W/kg

Meas25.Head Left cheek WLAN5.8G Ch149

Date: 2025/5/19

Communication System Band: WLAN(a); Frequency: 5745 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.099$ S/m; $\epsilon_r = 34.285$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(4.98, 5.15, 5.27); Calibrated: 2024/9/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch149/Area Scan (111x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.772 W/kg


Ch149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.741 W/kg

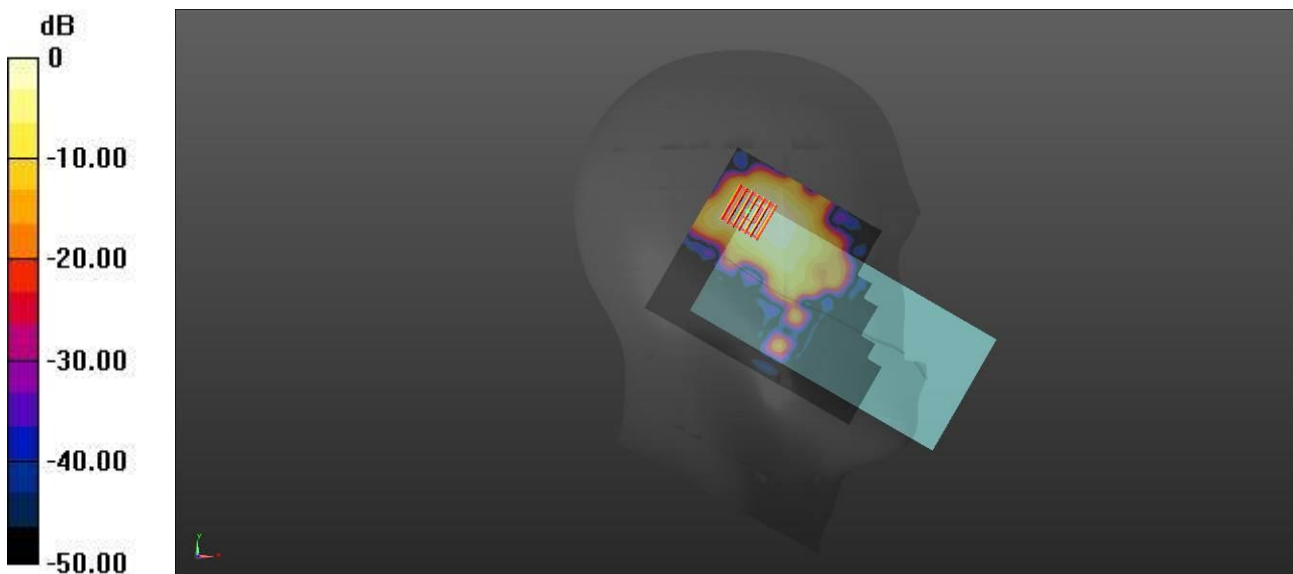

0 dB = 0.741 W/kg

Meas26. Body Back side 10mm WLAN5.3G Ch64

Date: 2025/5/18

Communication System Band: WLAN(a); Frequency: 5320 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.816$ S/m; $\epsilon_r = 35.146$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(5.44, 5.62, 5.76); Calibrated: 2024/9/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch64/Area Scan (101x161x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.657 W/kg


Ch64/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.529 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.618 W/kg

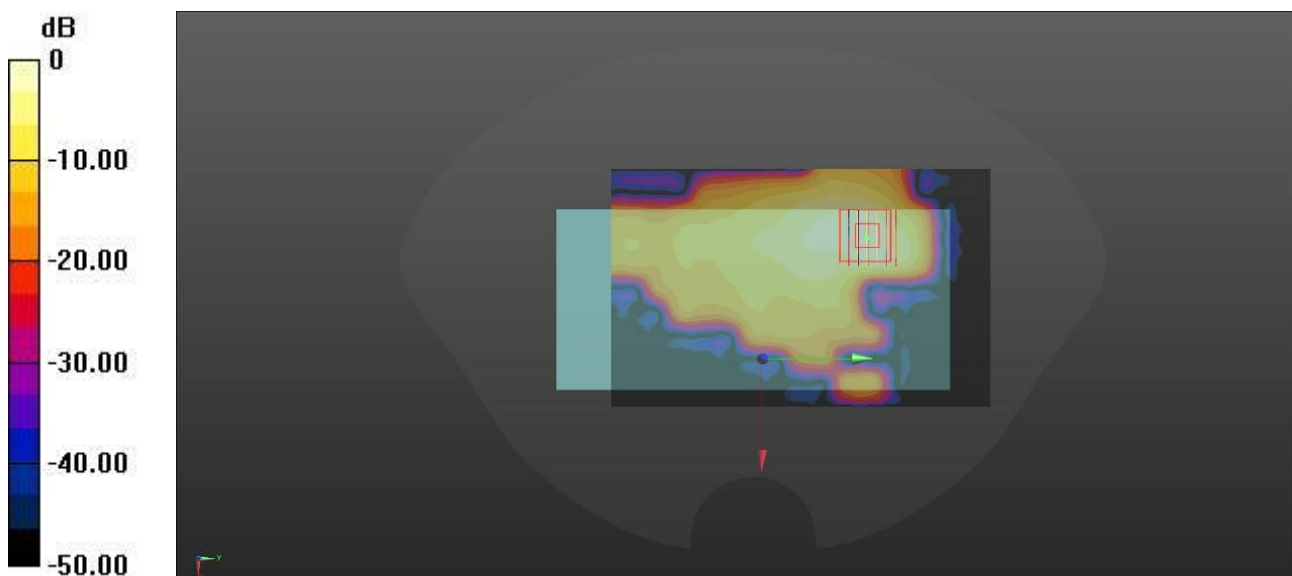

0 dB = 0.618 W/kg

Meas27.Body Back side 10mm WLAN5.6G Ch116

Date: 2025/5/19

Communication System Band: WLAN(a); Frequency: 5580 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.934$ S/m; $\epsilon_r = 34.602$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(4.91, 5.08, 5.2); Calibrated: 2024/9/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch116/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.609 W/kg


Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.329 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.990 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.546 W/kg

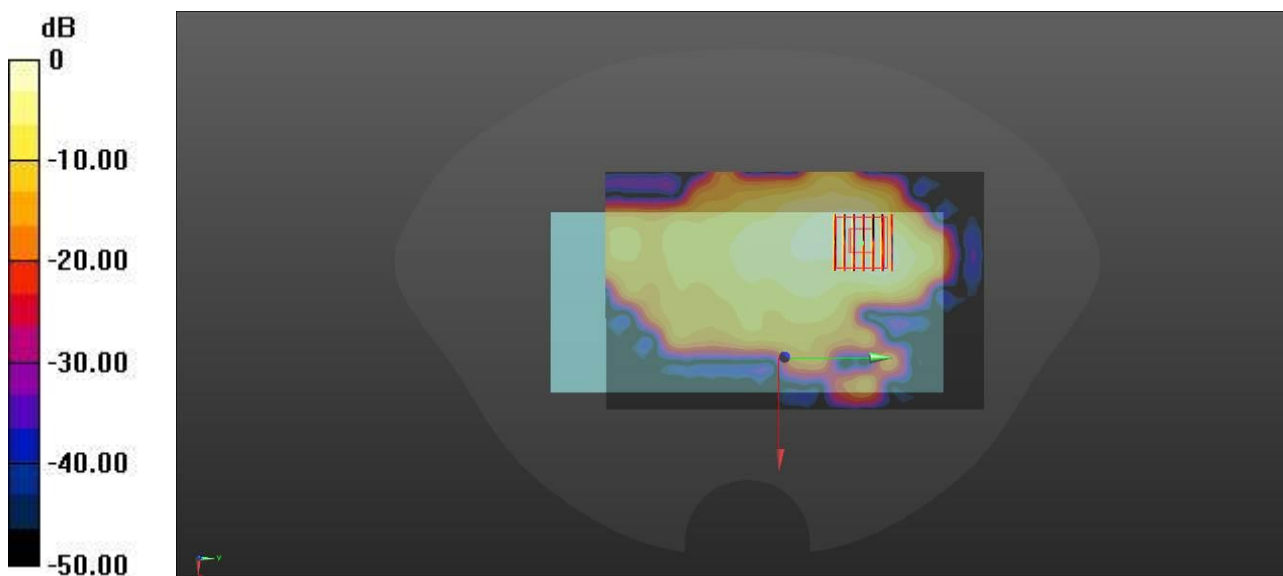

0 dB = 0.546 W/kg

Meas28. Body Back side 10mm WLAN5.8G Ch149

Date: 2025/5/19

Communication System Band: WLAN(a); Frequency: 5745 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.099$ S/m; $\epsilon_r = 34.285$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(4.98, 5.15, 5.27); Calibrated: 2024/9/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch149/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.667 W/kg


Ch149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.736 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.654 W/kg

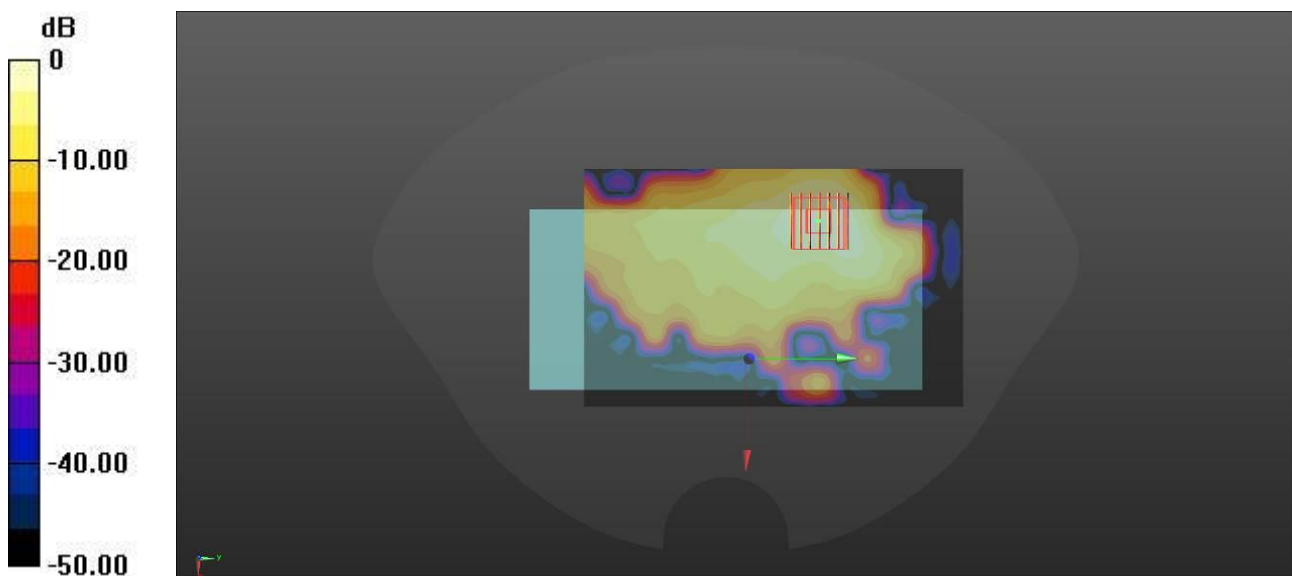

0 dB = 0.654 W/kg

Meas29.Hotspot Right side 10mm WLAN5.2G Ch48

Date: 2025/5/18

Communication System Band: WLAN(a); Frequency: 5240 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.771$ S/m; $\epsilon_r = 35.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(5.44, 5.62, 5.76); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch48/Area Scan (61x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.446 W/kg


Ch48/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.145 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.699 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.421 W/kg

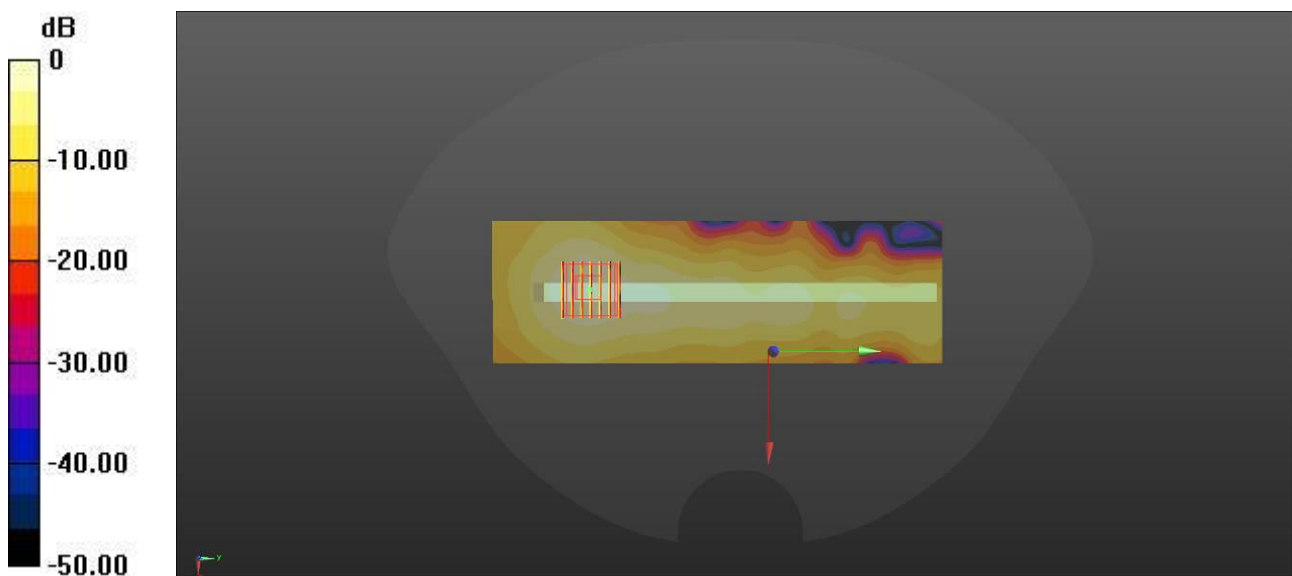

0 dB = 0.421 W/kg

Meas30.Hotspot Right side 10mm WLAN5.8G Ch149

Date: 2025/5/19

Communication System Band: WLAN(a); Frequency: 5745 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.099$ S/m; $\epsilon_r = 34.285$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(4.98, 5.15, 5.27); Calibrated: 2024/9/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch149/Area Scan (69x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.730 W/kg


Ch149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.167 V/m; Power Drift = 2.53 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.728 W/kg

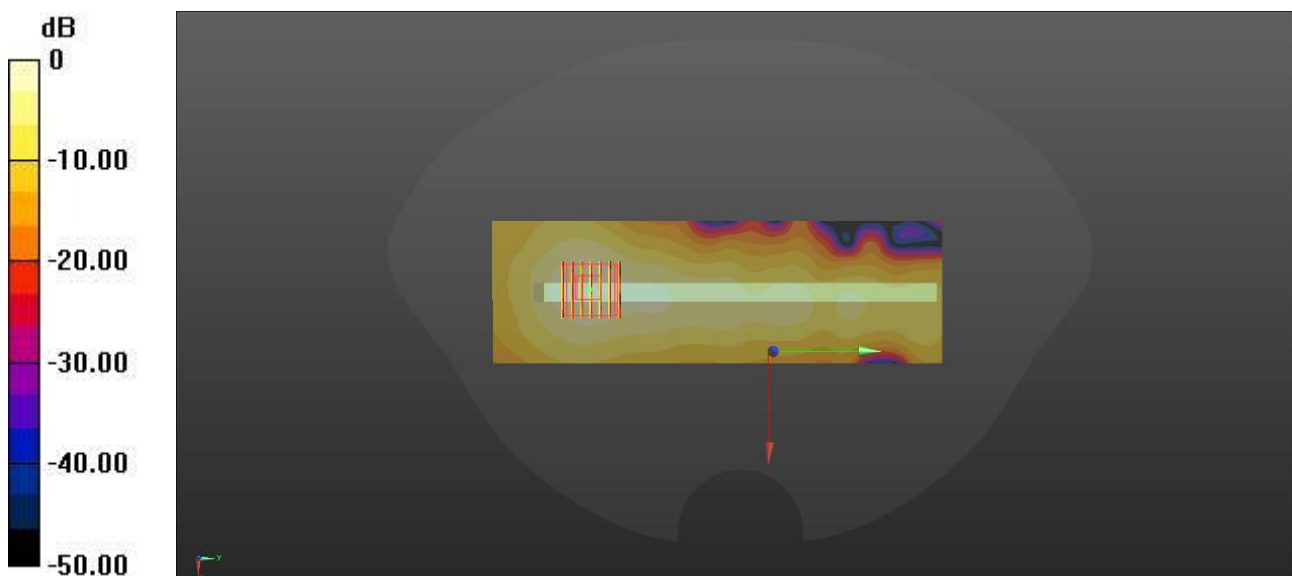

0 dB = 0.728 W/kg

Meas31.Extremity Right side 0mm WLAN5.3G Ch64

Date: 2025/5/18

Communication System Band: WLAN(a); Frequency: 5320 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.816$ S/m; $\epsilon_r = 35.146$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(5.44, 5.62, 5.76); Calibrated: 2024/9/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch64/Area Scan (61x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.71 W/kg


Ch64/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.566 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 5.40 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 3.00 W/kg

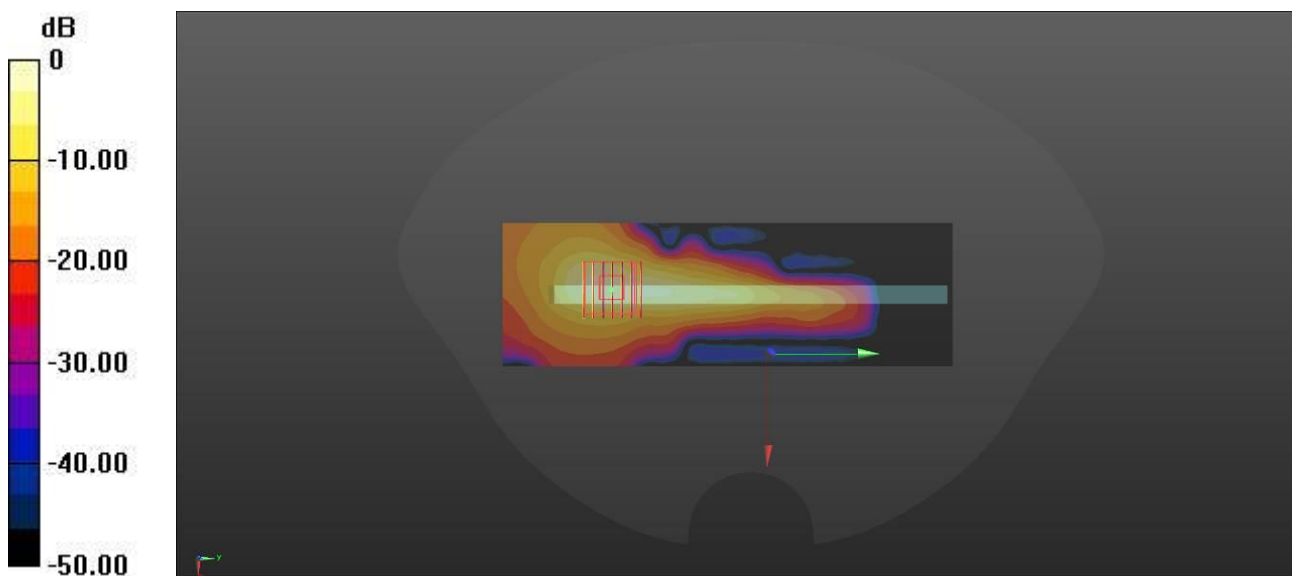

Meas32.Extremity Right side 0mm WLAN5.6G Ch116

Date: 2025/5/19

Communication System Band: WLAN(a); Frequency: 5580 MHz; Duty Cycle: 1:1.032

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.934$ S/m; $\epsilon_r = 34.602$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(4.91, 5.08, 5.2); Calibrated: 2024/9/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch116/Area Scan (61x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.83 W/kg


Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.915 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 7.75 W/kg

SAR(1 g) = 1.5 W/kg; SAR(10 g) = 0.403 W/kg

Maximum value of SAR (measured) = 4.26 W/kg

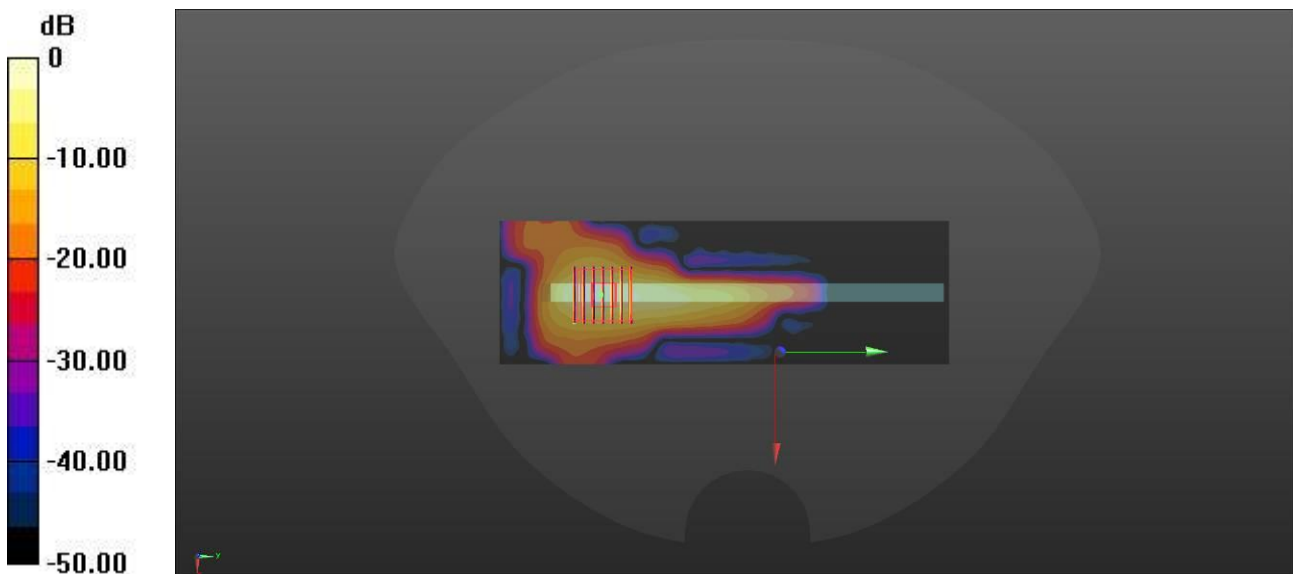

0 dB = 4.26 W/kg

Meas33.Head Left cheek BT Ch78

Date: 2025/5/22

Communication System Band: BT; Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 38.565$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(6.98, 7.22, 7.4); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (91x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.342 W/kg


Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.568 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.280 W/kg

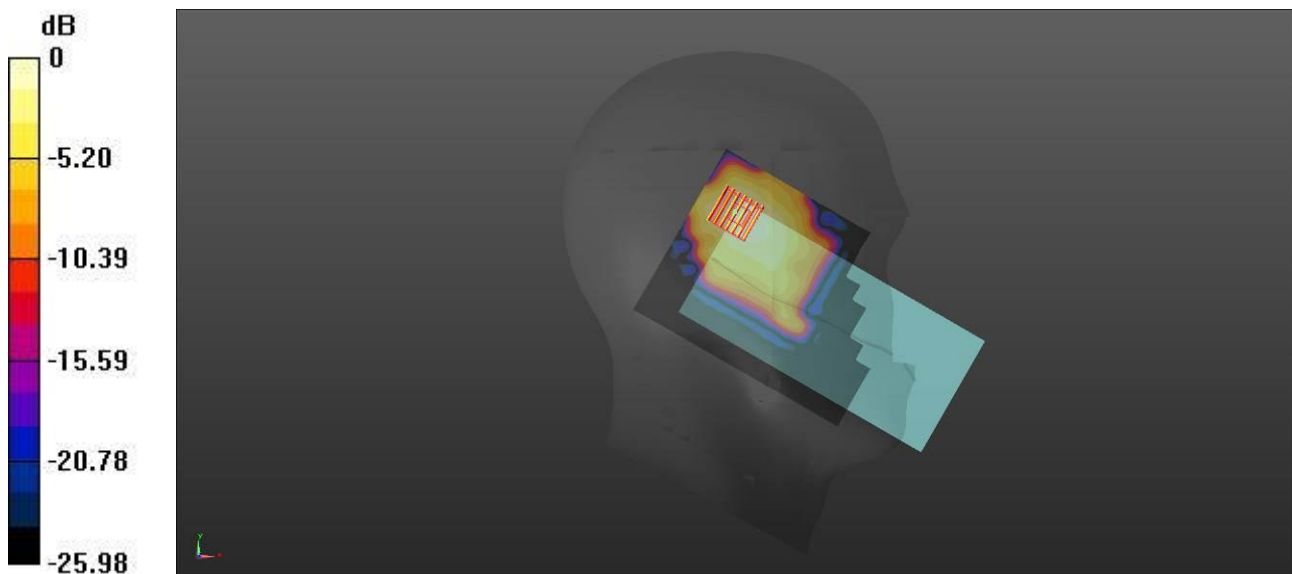

0 dB = 0.280 W/kg

Meas34.Hotspot Right side 10mm BT Ch78

Date: 2025/5/22

Communication System Band: BT; Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 38.565$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7893; ConvF(6.98, 7.22, 7.4); Calibrated: 2024/9/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2025/5/5
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (51x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.124 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.820 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

