

FCC EMC Test Report

Report No.: JYTSZ-R01-2500021

Applicant: INFINIX MOBILITY LIMITED

Address of Applicant: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: X6870

Trade Mark: Infinix

FCC ID: 2AIZN-X6870

Applicable Standards: FCC CFR Title 47 Part 15B

Date of Sample Receipt: 30 Dec., 2024

Date of Test: 31 Dec., 2024 to 03 Mar., 2025

Date of report Issued: 04 Mar., 2025

Test Result: PASS

Project by: _____

Date: _____ 04 Mar., 2025


Reviewed by: _____

Date: _____ 04 Mar., 2025

Approved by: _____

Date: _____ 04 Mar., 2025

Manager



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	04 Mar., 2025	Original

2 Contents

	Page
Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode	4
3.4 Description of Test Auxiliary Equipment	5
3.5 Description of Cable Used.....	5
3.6 Measurement Uncertainty	5
3.7 Additions to, Deviations, or Exclusions from the Method	5
3.8 Laboratory Facility	5
3.9 Laboratory Location.....	6
3.10 Test Instruments List.....	6
4 Measurement Setup and Procedure	7
4.1 Test Setup	7
4.2 Test Procedure	9
5 Test Results.....	10
5.1 Summary	10
5.1.1 Clause and data summary	10
5.1.2 Test Limit.....	10
5.2 Conducted Emission	11
5.3 Radiated Emission	15

3 General Information

3.1 Client Information

Applicant:	INFINIX MOBILITY LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	INFINIX MOBILITY LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

3.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	X6870
Power Supply:	Rechargeable Li-ion Polymer Battery DC3.91V, 5100mAh
AC Adapter:	Model: U450XSB Input: AC100-240V, 50/60Hz, 1.8A Output: DC 5.0V, 3.0A 15.0W or 5.0-10.0V, 4.5A or 11.0V 4.1A 45.0W MAX
Test sample:	SZR012500021-1 SZR012500021-5
Test Sample Condition:	The test samples were provided in good working order with no visible defects. The electrical design and circuit layout of test sample SZR012500021-1 and test sample SZR012500021-5 are completely consistent, except for the material of the back shell. The back shell of sample SZR012500021-1 is plastic, and the back shell of sample SZR012500021-5 is cortical.

3.3 Test Mode

Operating Mode	Detail Description
PC mode	Keep the EUT in Downloading mode(Worst case)
Charging+Recording mode	Keep the EUT in Charging+Recording mode
Charging+Playing mode	Keep the EUT in Charging+Playing mode
FM mode	Keep the EUT in FM receiver mode
GPS mode	Keep the EUT in GPS receiver mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

3.4 Description of Test Auxiliary Equipment

Manufacturer	Description	Model	S/N	FCC ID/DoC
Lenovo	Laptop	ThinkPad T14 Gen 1	SL10Z47277	DoC
HP	Printer	HP LaserJet P1007	VNFP409729	DoC

3.5 Description of Cable Used

Cable Type	Description	Length	From	To
Detached USB Cable	Shielding	1.0m	EUT	PC/Adapter
Detached headset cable	Unshielded	1.2m	EUT	Headset

3.6 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	±3.0 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.4 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	±4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	±5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	±4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB

Note: All the measurement uncertainty value were shown with a coverage $k=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

3.7 Additions to, Deviations, or Exclusions from the Method

No

3.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.10 Test Instruments List


Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-09-2024	01-08-2025
				01-03-2025	01-02-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-05-2024	01-04-2025
				01-03-2025	01-02-2026
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-16-2024	12-15-2025
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-16-2024	12-15-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-17-2024	01-16-2025
				01-15-2025	01-14-2026
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-17-2024	01-16-2025
				01-15-2025	01-14-2026
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	06-11-2024	06-10-2025
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	12-17-2024	12-16-2025
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	12-17-2024	12-16-2025
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	01-17-2024	01-16-2025
				01-15-2025	01-14-2026
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

4 Measurement Setup and Procedure

4.1 Test Setup


1) Conducted emission measurement:

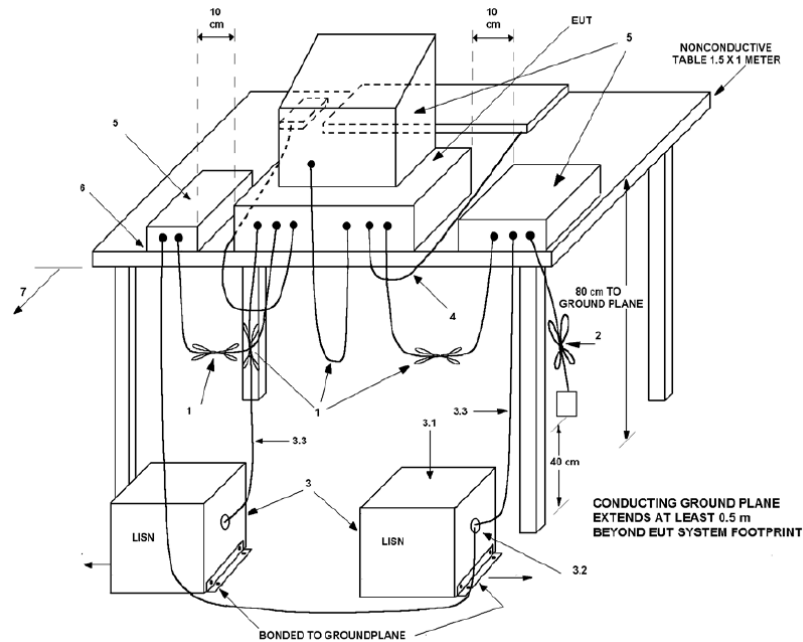


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:

Below 1GHz (3m SAC)

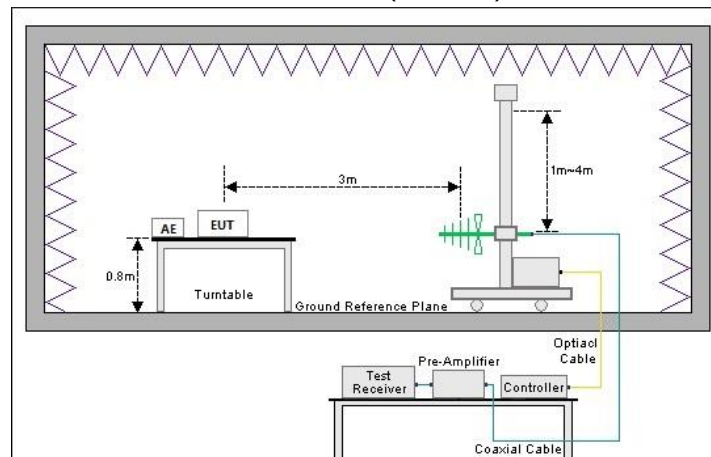

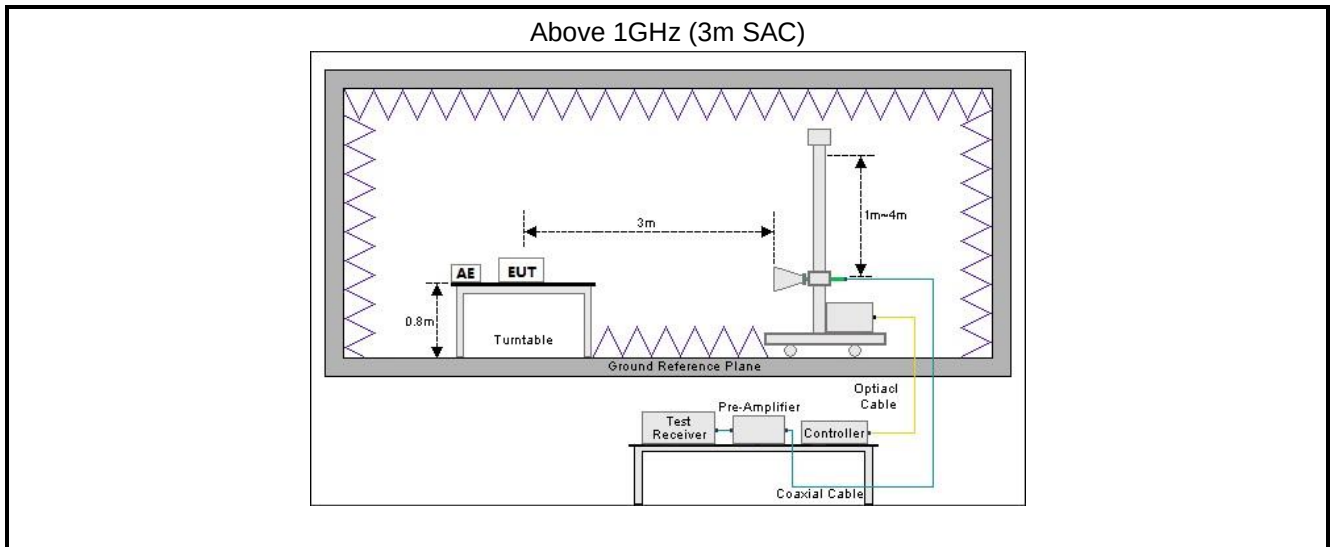

4.2 Test Procedure

Test method	Test step
Conducted emission	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

5 Test Results

5.1 Summary

5.1.1 Clause and data summary

Test items	Standard clause	Test data	Result
Conducted Emission	Part 15.107	See Section 5.2	Pass
Radiated Emission	Part 15.109	See Section 5.3	Pass
Remark: 1. The EUT is a Class B digital device. 2. Pass: The EUT complies with the essential requirements in the standard. 3. N/A: Not Applicable.			
Test Method:	ANSI C63.4:2014		


5.1.2 Test Limit

Test items	Limit																																																					
Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Class A Limit (dBμV)</th><th colspan="2">Class B Limit (dBμV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>79</td><td>66</td><td>66 to 56 Note 1</td><td>56 to 46 Note 1</td></tr><tr><td>0.5 – 5</td><td>73</td><td>60</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>73</td><td>60</td><td>60</td><td>50</td></tr><tr><td colspan="5">Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency.</td></tr><tr><td colspan="5">Note 2: The more stringent limit applies at transition frequencies.</td></tr></table>	Frequency (MHz)	Class A Limit (dBμV)		Class B Limit (dBμV)		Quasi-Peak	Average	Quasi-Peak	Average	0.15 – 0.5	79	66	66 to 56 Note 1	56 to 46 Note 1	0.5 – 5	73	60	56	46	5 – 30	73	60	60	50	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency.					Note 2: The more stringent limit applies at transition frequencies.																							
	Frequency (MHz)		Class A Limit (dBμV)		Class B Limit (dBμV)																																																	
		Quasi-Peak	Average	Quasi-Peak	Average																																																	
	0.15 – 0.5	79	66	66 to 56 Note 1	56 to 46 Note 1																																																	
	0.5 – 5	73	60	56	46																																																	
	5 – 30	73	60	60	50																																																	
	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency.																																																					
Note 2: The more stringent limit applies at transition frequencies.																																																						
Radiated Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Class A Limit (dBμV/m)</th><th colspan="2">Class B Limit (dBμV/m)</th></tr><tr><th>Quasi-Peak @ 3m</th><th>Quasi-Peak @ 10m</th><th>Quasi-Peak @ 3m</th><th>Quasi-Peak @ 10m</th></tr><tr><td>30 – 88</td><td>49.0</td><td>39.0</td><td>40.0</td><td>30.0</td></tr><tr><td>88 – 216</td><td>53.5</td><td>43.5</td><td>43.5</td><td>33.5</td></tr><tr><td>216 – 960</td><td>56.0</td><td>46.0</td><td>46.0</td><td>36.0</td></tr><tr><td>960 – 1000</td><td>60.0</td><td>50.0</td><td>54.0</td><td>44.0</td></tr><tr><td colspan="5">Note: The more stringent limit applies at transition frequencies.</td></tr><tr><th rowspan="2">Frequency</th><th colspan="2">Class A Limit (dBμV/m) @ 3m</th><th colspan="2">Class B Limit (dBμV/m) @ 3m</th></tr><tr><th>Average</th><th>Peake</th><th>Average</th><th>Peake</th></tr><tr><td>Above 1 GHz</td><td>60.0</td><td>80.0</td><td>54.0</td><td>74.0</td></tr><tr><td colspan="5">Note: The measurement bandwidth shall be 1 MHz or greater.</td></tr></table>	Frequency (MHz)	Class A Limit (dBμV/m)		Class B Limit (dBμV/m)		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m	30 – 88	49.0	39.0	40.0	30.0	88 – 216	53.5	43.5	43.5	33.5	216 – 960	56.0	46.0	46.0	36.0	960 – 1000	60.0	50.0	54.0	44.0	Note: The more stringent limit applies at transition frequencies.					Frequency	Class A Limit (dBμV/m) @ 3m		Class B Limit (dBμV/m) @ 3m		Average	Peake	Average	Peake	Above 1 GHz	60.0	80.0	54.0	74.0	Note: The measurement bandwidth shall be 1 MHz or greater.				
	Frequency (MHz)		Class A Limit (dBμV/m)		Class B Limit (dBμV/m)																																																	
		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m																																																	
	30 – 88	49.0	39.0	40.0	30.0																																																	
	88 – 216	53.5	43.5	43.5	33.5																																																	
	216 – 960	56.0	46.0	46.0	36.0																																																	
	960 – 1000	60.0	50.0	54.0	44.0																																																	
	Note: The more stringent limit applies at transition frequencies.																																																					
	Frequency	Class A Limit (dBμV/m) @ 3m		Class B Limit (dBμV/m) @ 3m																																																		
		Average	Peake	Average	Peake																																																	
	Above 1 GHz	60.0	80.0	54.0	74.0																																																	
Note: The measurement bandwidth shall be 1 MHz or greater.																																																						

5.2 Conducted Emission

Test sample: SZR012500021-1

Product name:	Mobile Phone	Product model:	X6870
Test by:	Alan Chen	Test mode:	PC mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

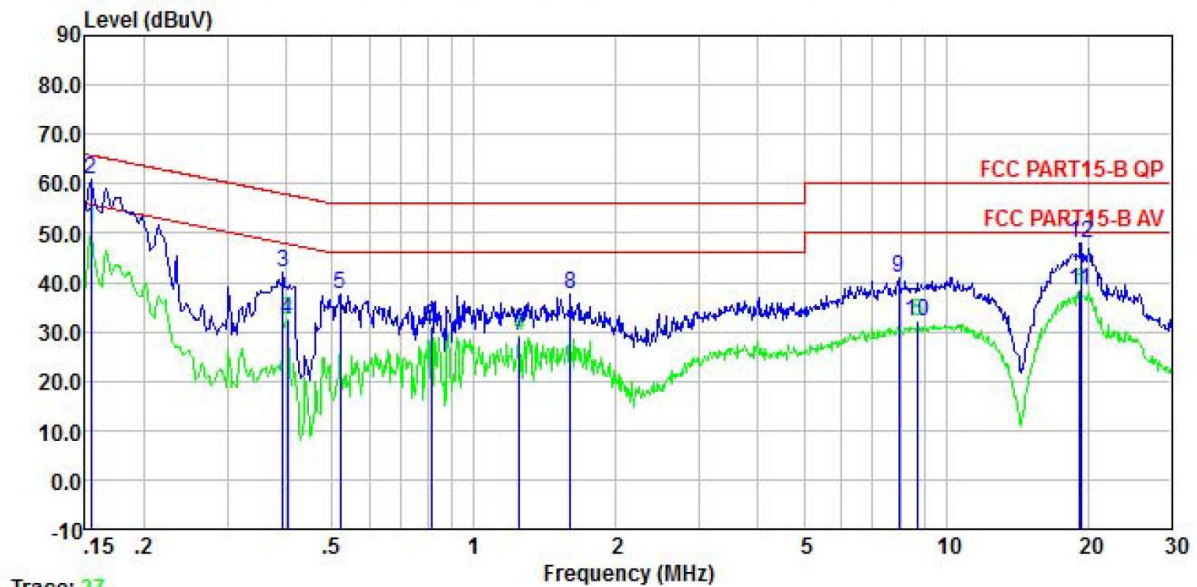


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.154	40.73	0.20	0.00	9.88	0.01	50.82	55.78	-4.96	Average
2	0.154	50.94	0.20	0.00	9.88	0.01	61.03	65.78	-4.75	QP
3	0.393	31.98	0.20	0.00	9.88	0.04	42.10	57.99	-15.89	QP
4	0.402	22.30	0.20	0.00	9.88	0.04	32.42	47.81	-15.39	Average
5	0.521	27.35	0.20	0.00	9.88	0.03	37.46	56.00	-18.54	QP
6	0.813	20.71	0.20	0.00	9.88	0.03	30.82	46.00	-15.18	Average
7	1.249	19.05	0.20	0.00	9.88	0.10	29.23	46.00	-16.77	Average
8	1.602	27.45	0.20	0.00	9.88	0.16	37.69	56.00	-18.31	QP
9	7.935	30.56	0.20	0.00	9.90	0.10	40.76	60.00	-19.24	QP
10	8.729	21.69	0.20	0.00	9.91	0.11	31.91	50.00	-18.09	Average
11	19.224	27.70	0.39	0.00	9.96	0.15	38.20	50.00	-11.80	Average
12	19.428	37.44	0.39	0.00	9.96	0.15	47.94	60.00	-12.06	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Mobile Phone	Product model:	X6870
Test by:	Alan Chen	Test mode:	PC mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

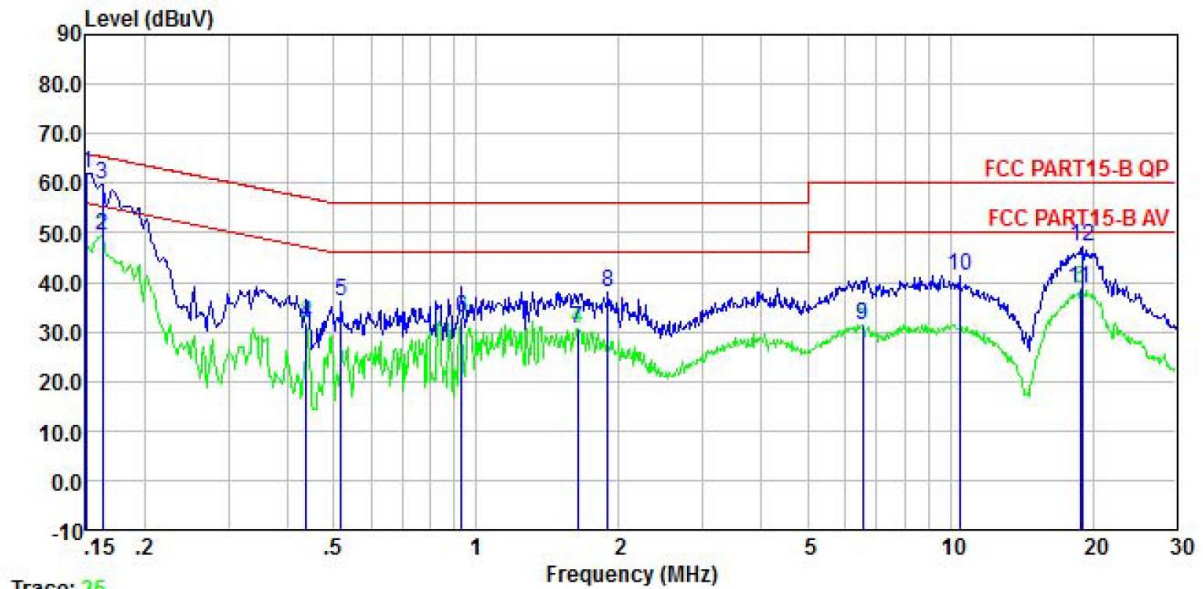


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.151	51.73	0.20	0.00	9.88	0.01	61.82	65.96	-4.14	QP
2	0.162	39.43	0.20	0.00	9.88	0.01	49.52	55.34	-5.82	Average
3	0.162	49.70	0.20	0.00	9.88	0.01	59.79	65.34	-5.55	QP
4	0.437	21.44	0.20	0.00	9.88	0.03	31.55	47.11	-15.56	Average
5	0.518	25.85	0.20	0.00	9.88	0.03	35.96	56.00	-20.04	QP
6	0.933	22.71	0.20	0.00	9.88	0.04	32.83	46.00	-13.17	Average
7	1.636	20.29	0.27	0.00	9.88	0.16	30.60	46.00	-15.40	Average
8	1.898	27.50	0.29	0.00	9.88	0.20	37.87	56.00	-18.13	QP
9	6.523	21.21	0.30	0.00	9.90	0.10	31.51	50.00	-18.49	Average
10	10.452	31.02	0.40	0.00	9.91	0.12	41.45	60.00	-18.55	QP
11	18.820	28.18	0.40	0.00	9.95	0.15	38.68	50.00	-11.32	Average
12	19.021	36.77	0.40	0.00	9.95	0.15	47.27	60.00	-12.73	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Test sample: SZR012500021-5

Product name:	Mobile Phone	Product model:	X6870
Test by:	Alan Chen	Test mode:	PC mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

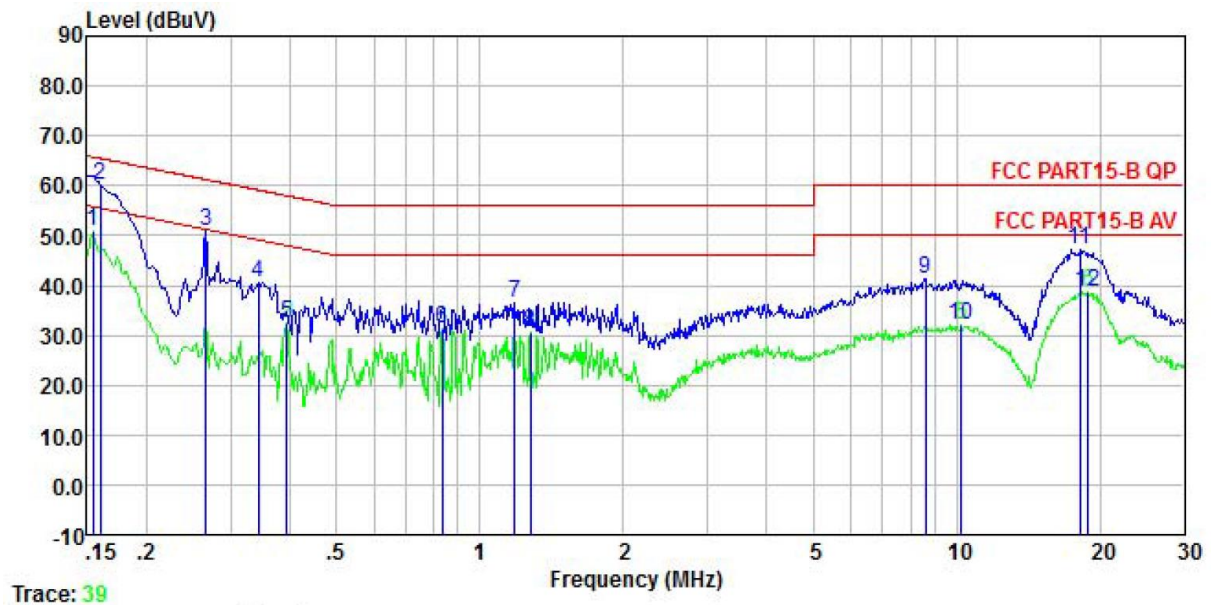


	Read	LISN	Aux	Aux2	Cable	Level	Limit	Over	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.154	40.83	0.20	0.00	9.88	0.01	50.92	55.78	-4.86 Average
2	0.160	50.14	0.20	0.00	9.88	0.01	60.23	65.47	-5.24 QP
3	0.266	40.67	0.20	0.00	9.88	0.02	50.77	61.25	-10.48 QP
4	0.343	30.53	0.20	0.00	9.88	0.02	40.63	59.13	-18.50 QP
5	0.393	22.14	0.20	0.00	9.88	0.04	32.26	47.99	-15.73 Average
6	0.835	21.10	0.20	0.00	9.88	0.03	31.21	46.00	-14.79 Average
7	1.184	26.44	0.20	0.00	9.88	0.09	36.61	56.00	-19.39 QP
8	1.276	20.31	0.20	0.00	9.88	0.11	30.50	46.00	-15.50 Average
9	8.592	31.23	0.20	0.00	9.91	0.11	41.45	60.00	-18.55 QP
10	10.233	21.85	0.20	0.00	9.91	0.13	32.09	50.00	-17.91 Average
11	18.135	36.79	0.37	0.00	9.95	0.15	47.26	60.00	-12.74 QP
12	18.920	28.25	0.38	0.00	9.95	0.15	38.73	50.00	-11.27 Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Mobile Phone	Product model:	X6870
Test by:	Alan Chen	Test mode:	PC mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

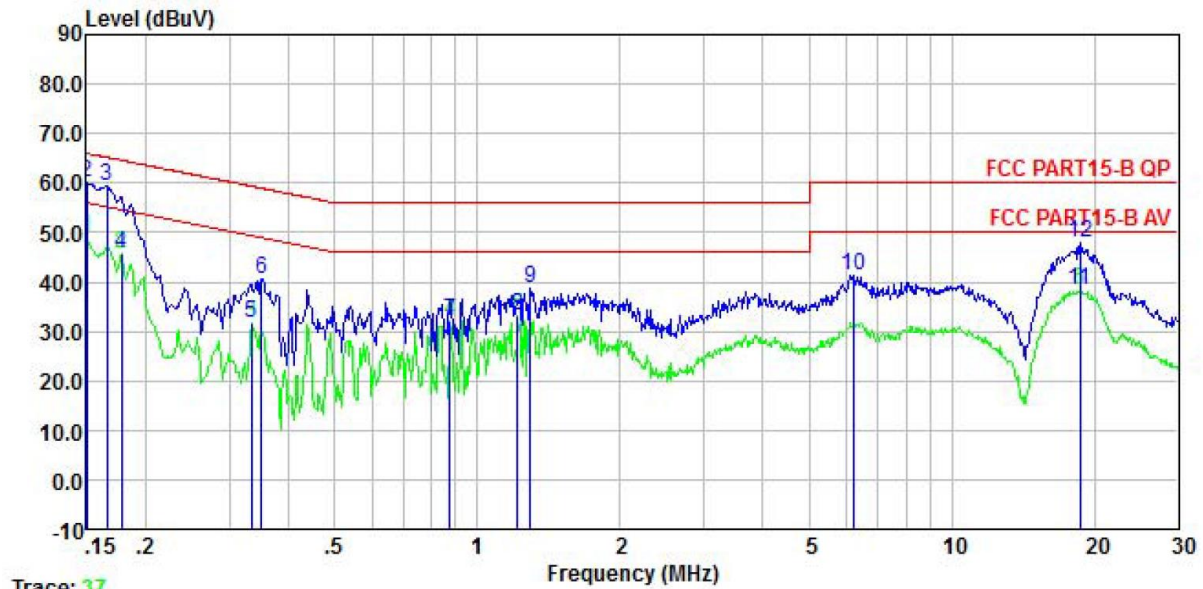

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	38.85	0.20	0.00	9.88	0.01	48.94	56.00	-7.06	Average
2	0.150	49.85	0.20	0.00	9.88	0.01	59.94	66.00	-6.06	QP
3	0.166	49.31	0.20	0.00	9.88	0.01	59.40	65.16	-5.76	QP
4	0.178	35.72	0.20	0.00	9.88	0.01	45.81	54.59	-8.78	Average
5	0.334	21.66	0.20	0.00	9.88	0.02	31.76	49.35	-17.59	Average
6	0.350	30.46	0.20	0.00	9.88	0.02	40.56	58.96	-18.40	QP
7	0.876	21.90	0.20	0.00	9.88	0.04	32.02	46.00	-13.98	Average
8	1.216	22.86	0.23	0.00	9.88	0.10	33.07	46.00	-12.93	Average
9	1.296	28.57	0.24	0.00	9.88	0.11	38.80	56.00	-17.20	QP
10	6.186	31.04	0.30	0.00	9.90	0.09	41.33	60.00	-18.67	QP
11	18.622	27.87	0.40	0.00	9.95	0.15	38.37	50.00	-11.63	Average
12	18.622	37.37	0.40	0.00	9.95	0.15	47.87	60.00	-12.13	QP

Remark:


1. Level = Read level + LISN Factor + Cable Loss.

5.3 Radiated Emission

Test sample: SZR012500021-1

Below 1GHz:

Product Name:	Mobile Phone	Product Model:	X6870
Test By:	Kiran Zeng	Test mode:	PC mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

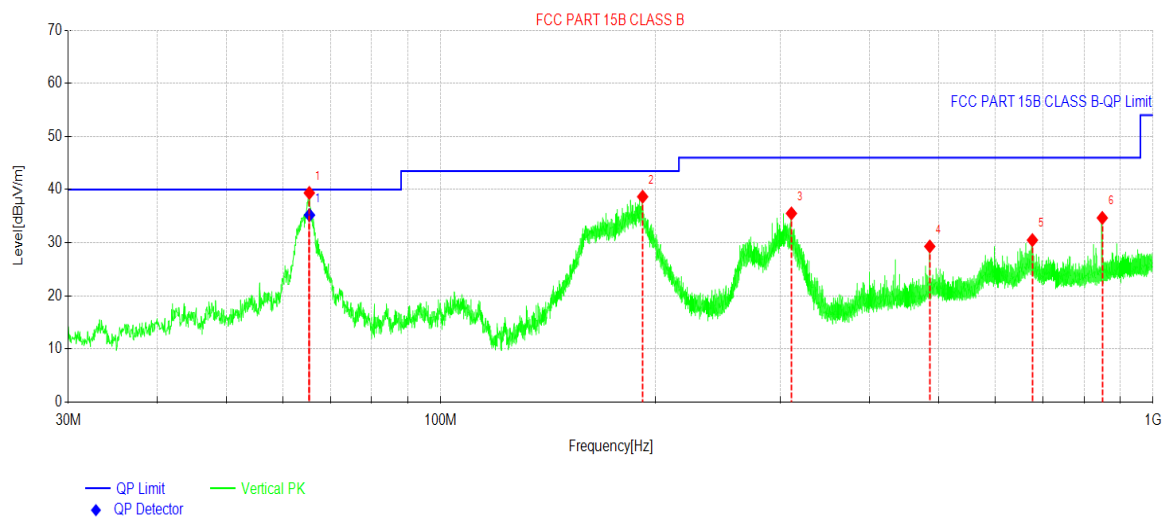

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	65.4068	54.42	-15.05	39.37	40.00	0.63	PK	Vertical
2	192.0951	54.35	-15.69	38.66	43.50	4.84	PK	Vertical
3	310.7320	48.37	-12.86	35.51	46.00	10.49	PK	Vertical
4	486.0198	38.57	-9.27	29.30	46.00	16.70	PK	Vertical
5	677.1679	36.28	-5.79	30.49	46.00	15.51	PK	Vertical
6	848.8664	38.13	-3.46	34.67	46.00	11.33	PK	Vertical


Final Data List

NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Angle [°]	Verdict
1	65.4430	50.25	-15.05	35.20	40.00	4.80	306	PASS

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Mobile Phone	Product Model:	X6870
Test By:	Kiran Zeng	Test mode:	PC mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

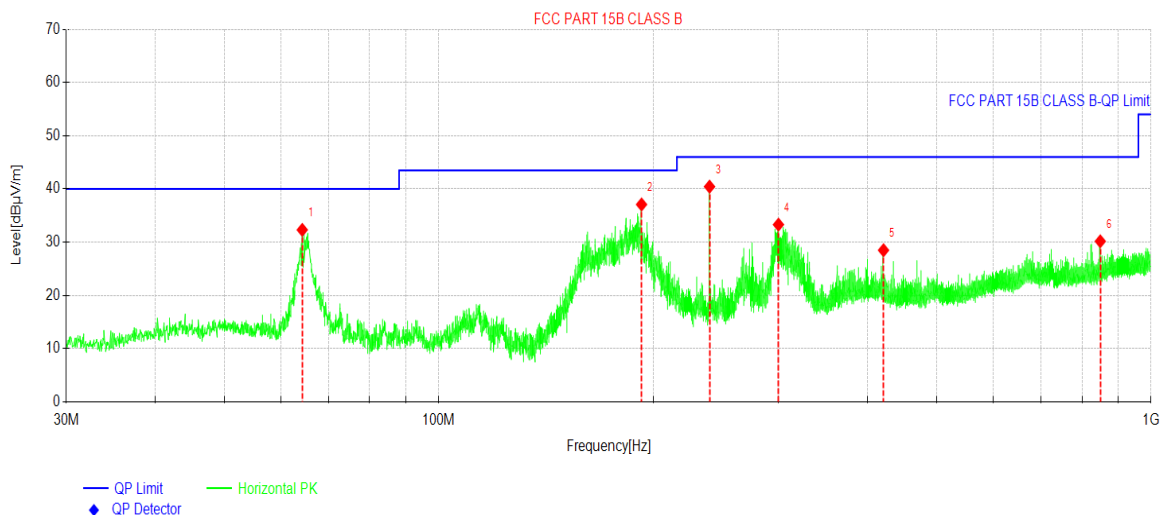

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	64.3397	47.18	-14.86	32.32	40.00	7.68	PK	Horizontal
2	192.6771	52.71	-15.63	37.08	43.50	6.42	PK	Horizontal
3	240.0155	54.65	-14.22	40.43	46.00	5.57	PK	Horizontal
4	299.9160	46.30	-13.00	33.30	46.00	12.70	PK	Horizontal
5	421.2206	38.87	-10.38	28.49	46.00	17.51	PK	Horizontal
6	848.8179	33.63	-3.46	30.17	46.00	15.83	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Product Name:	Mobile Phone	Product Model:	X6870
Test By:	Kiran Zeng	Test mode:	PC mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

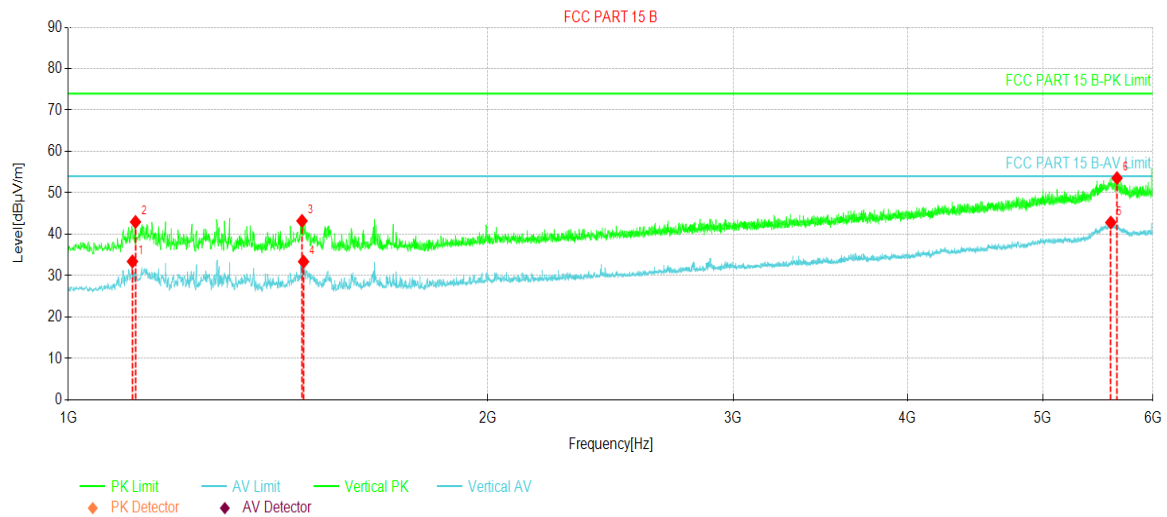


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1111.8890	56.24	33.44	-22.80	54.00	20.56	AV	Vertical
2	1117.5147	65.81	42.98	-22.83	74.00	31.02	PK	Vertical
3	1471.3089	65.91	43.22	-22.69	74.00	30.78	PK	Vertical
4	1475.0594	56.08	33.38	-22.70	54.00	20.62	AV	Vertical
5	5596.1995	47.25	42.83	-4.42	54.00	11.17	AV	Vertical
6	5653.7067	58.41	53.56	-4.85	74.00	20.44	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Mobile Phone	Product Model:	X6870
Test By:	Kiran Zeng	Test mode:	PC mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

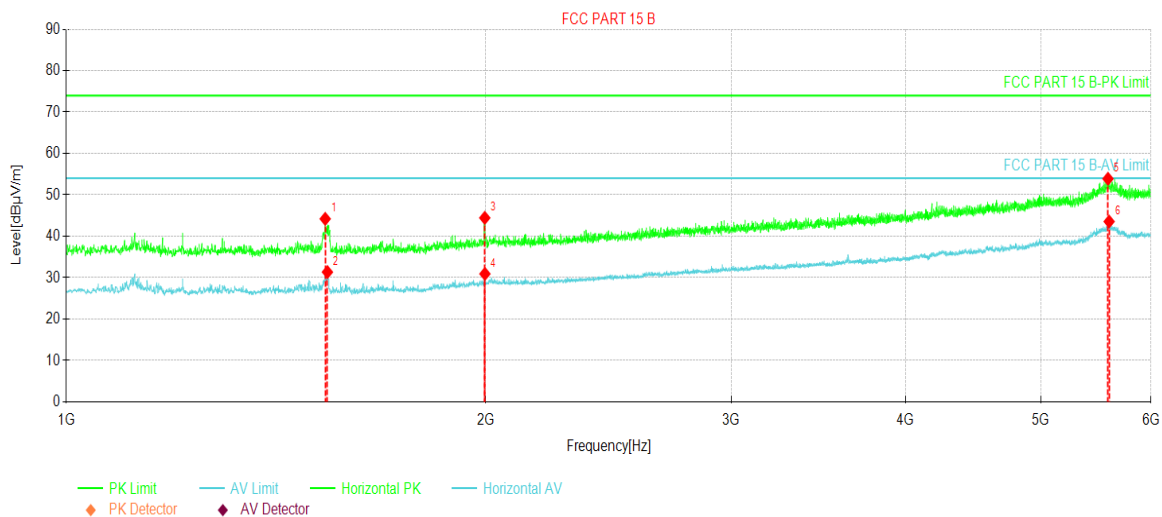

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1533.8167	66.95	44.21	-22.74	74.00	29.79	PK	Horizontal
2	1539.4424	54.09	31.35	-22.74	54.00	22.65	AV	Horizontal
3	1996.3745	65.20	44.44	-20.76	74.00	29.56	PK	Horizontal
4	1996.9996	51.67	30.92	-20.75	54.00	23.08	AV	Horizontal
5	5588.6986	58.43	53.88	-4.55	74.00	20.12	PK	Horizontal
6	5599.3249	47.91	43.55	-4.36	54.00	10.45	AV	Horizontal


Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Test sample: SZR012500021-5

Below 1GHz:

Product Name:	Mobile Phone	Product Model:	X6870
Test By:	Kiran Zeng	Test mode:	PC mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

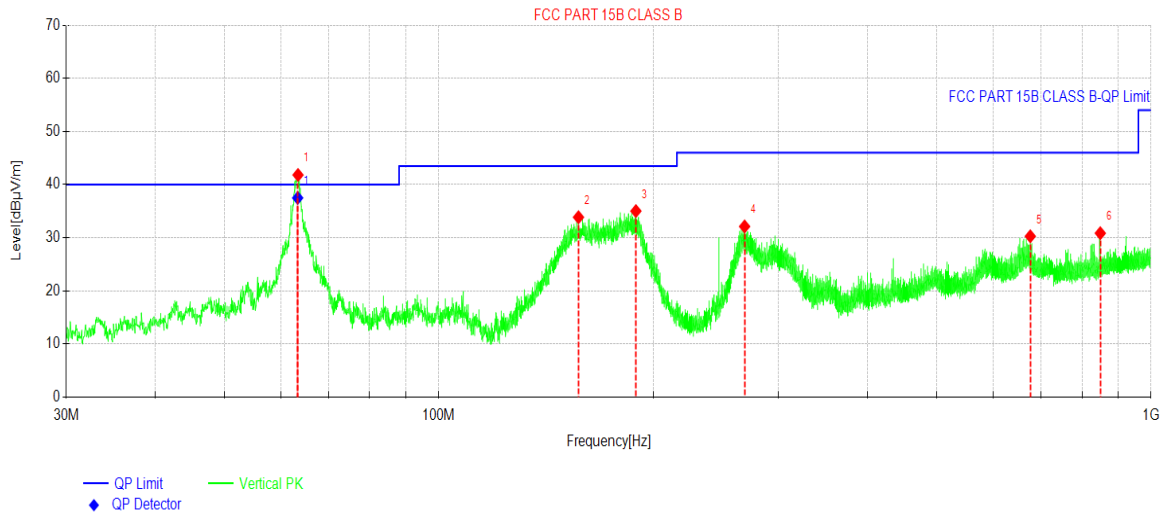

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	63.4667	56.58	-14.77	41.81	40.00	-1.81	PK	Vertical
2	157.1249	51.77	-17.92	33.85	43.50	9.65	PK	Vertical
3	189.1850	51.11	-16.09	35.02	43.50	8.48	PK	Vertical
4	268.8259	45.86	-13.74	32.12	46.00	13.88	PK	Vertical
5	676.9738	36.07	-5.80	30.27	46.00	15.73	PK	Vertical
6	848.9149	34.31	-3.46	30.85	46.00	15.15	PK	Vertical


Final Data List

NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Angle [°]	Verdict
1	63.3958	52.27	-14.78	37.49	40.00	2.51	230	PASS

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Mobile Phone	Product Model:	X6870
Test By:	Kiran Zeng	Test mode:	PC mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

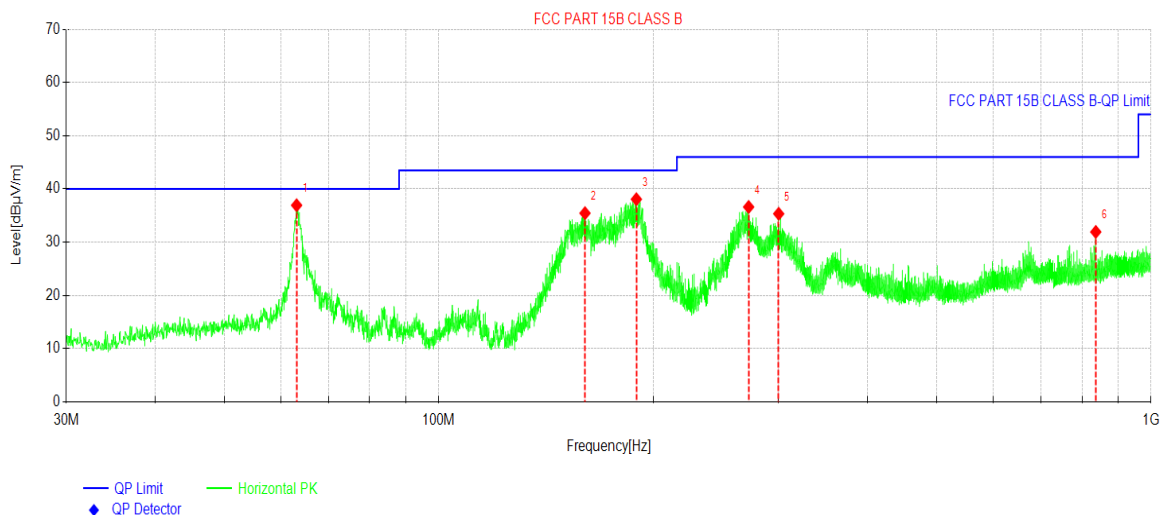

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	63.1757	51.67	-14.74	36.93	40.00	3.07	PK	Horizontal
2	160.4715	53.25	-17.81	35.44	43.50	8.06	PK	Horizontal
3	189.4760	54.13	-16.06	38.07	43.50	5.43	PK	Horizontal
4	272.3666	50.29	-13.68	36.61	46.00	9.39	PK	Horizontal
5	300.1585	48.34	-13.00	35.34	46.00	10.66	PK	Horizontal
6	836.5468	35.71	-3.78	31.93	46.00	14.07	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Product Name:	Mobile Phone	Product Model:	X6870
Test By:	Kiran Zeng	Test mode:	PC mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

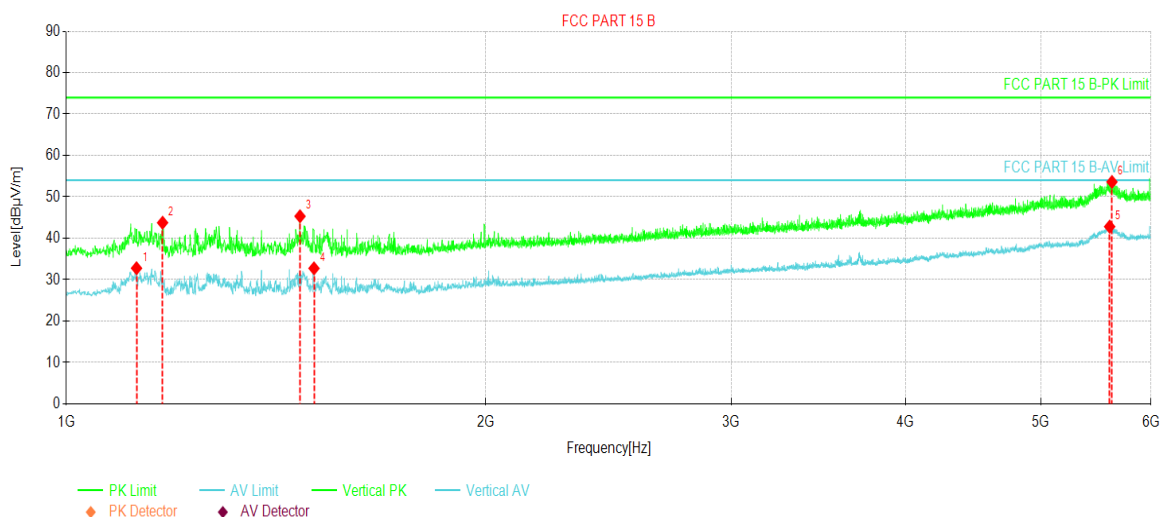


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1123.1404	55.63	32.77	-22.86	54.00	21.23	AV	Vertical
2	1172.5216	66.89	43.76	-23.13	74.00	30.24	PK	Vertical
3	1471.3089	68.01	45.32	-22.69	74.00	28.68	PK	Vertical
4	1505.6882	55.46	32.74	-22.72	54.00	21.26	AV	Vertical
5	5603.7005	47.19	42.81	-4.38	54.00	11.19	AV	Vertical
6	5625.5782	58.19	53.60	-4.59	74.00	20.40	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Mobile Phone	Product Model:	X6870
Test By:	Kiran Zeng	Test mode:	PC mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

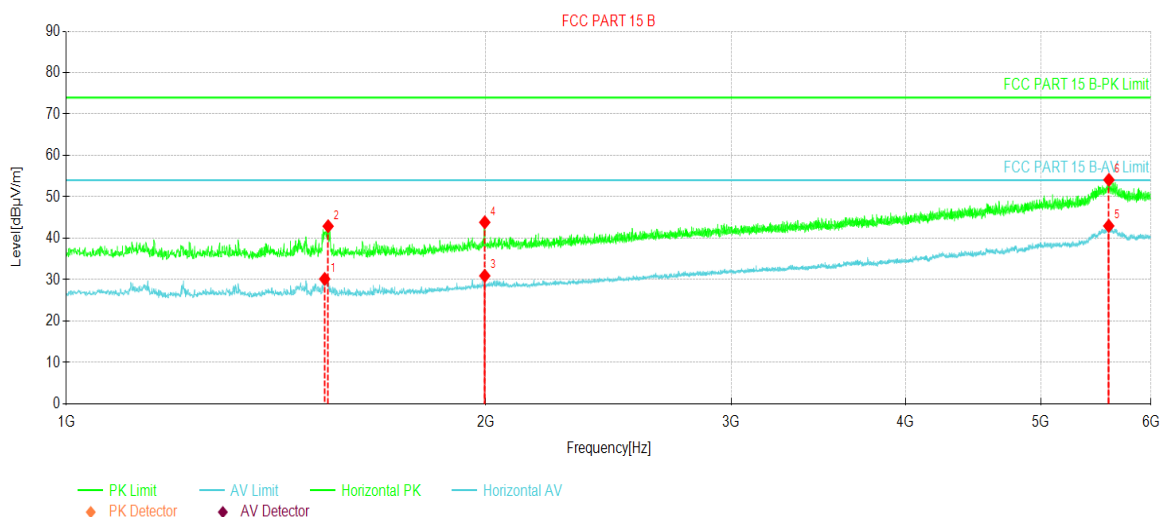

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1532.5666	52.91	30.17	-22.74	54.00	23.83	AV	Horizontal
2	1541.3177	65.66	42.91	-22.75	74.00	31.09	PK	Horizontal
3	1996.3745	51.70	30.94	-20.76	54.00	23.06	AV	Horizontal
4	1996.3745	64.61	43.85	-20.76	74.00	30.15	PK	Horizontal
5	5595.5744	47.42	42.99	-4.43	54.00	11.01	AV	Horizontal
6	5597.4497	58.50	54.11	-4.39	74.00	19.89	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

-----End of report-----