




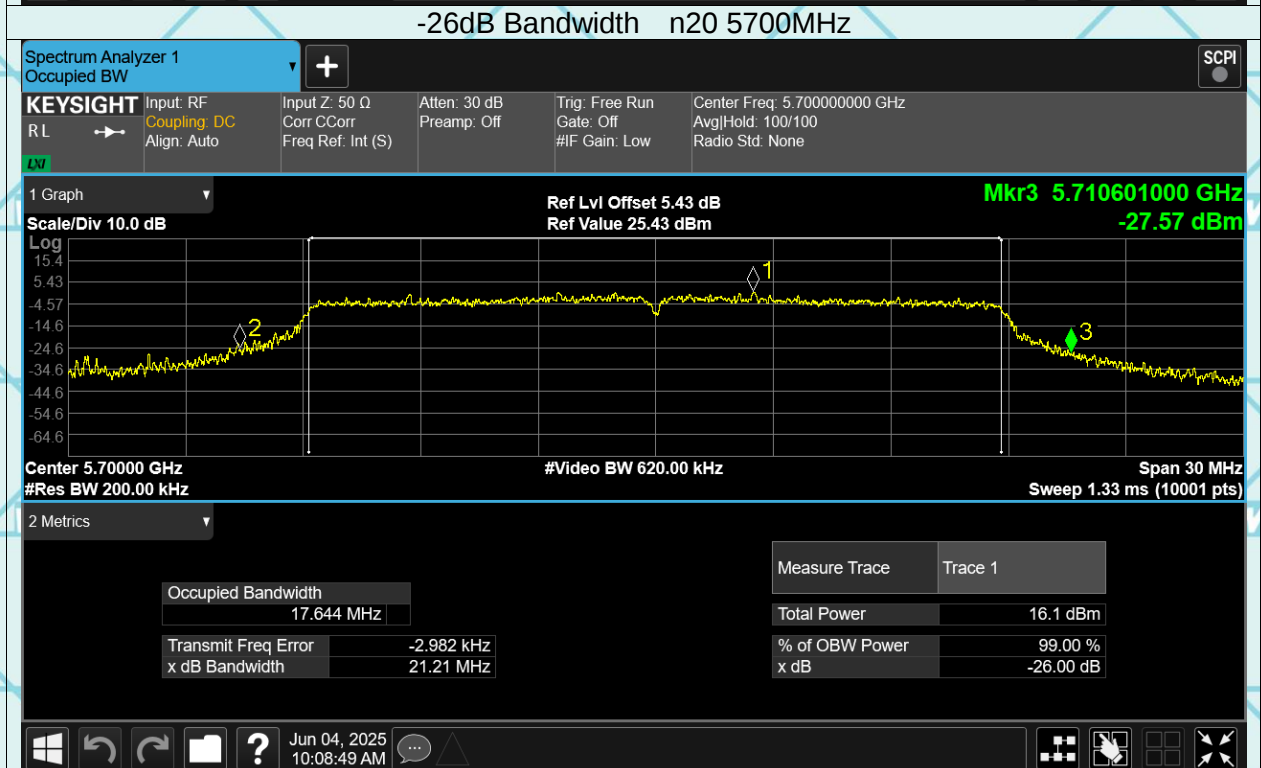
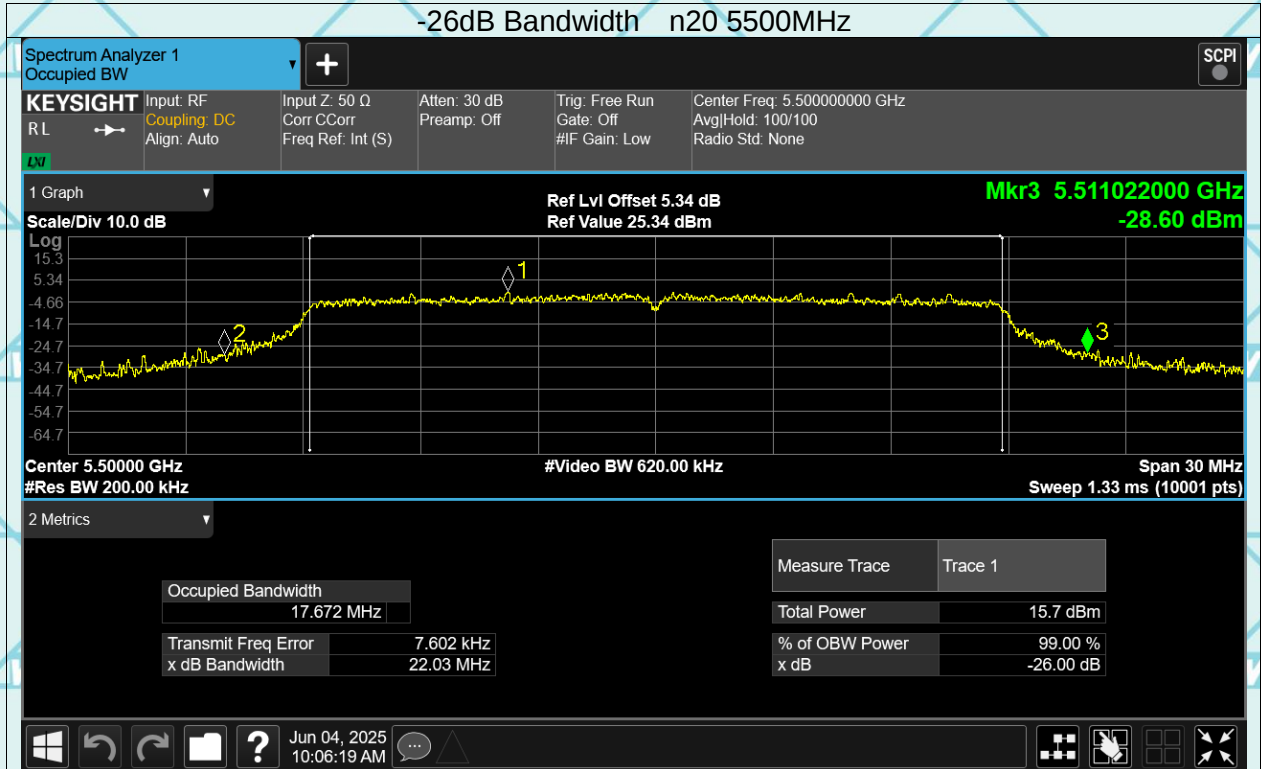
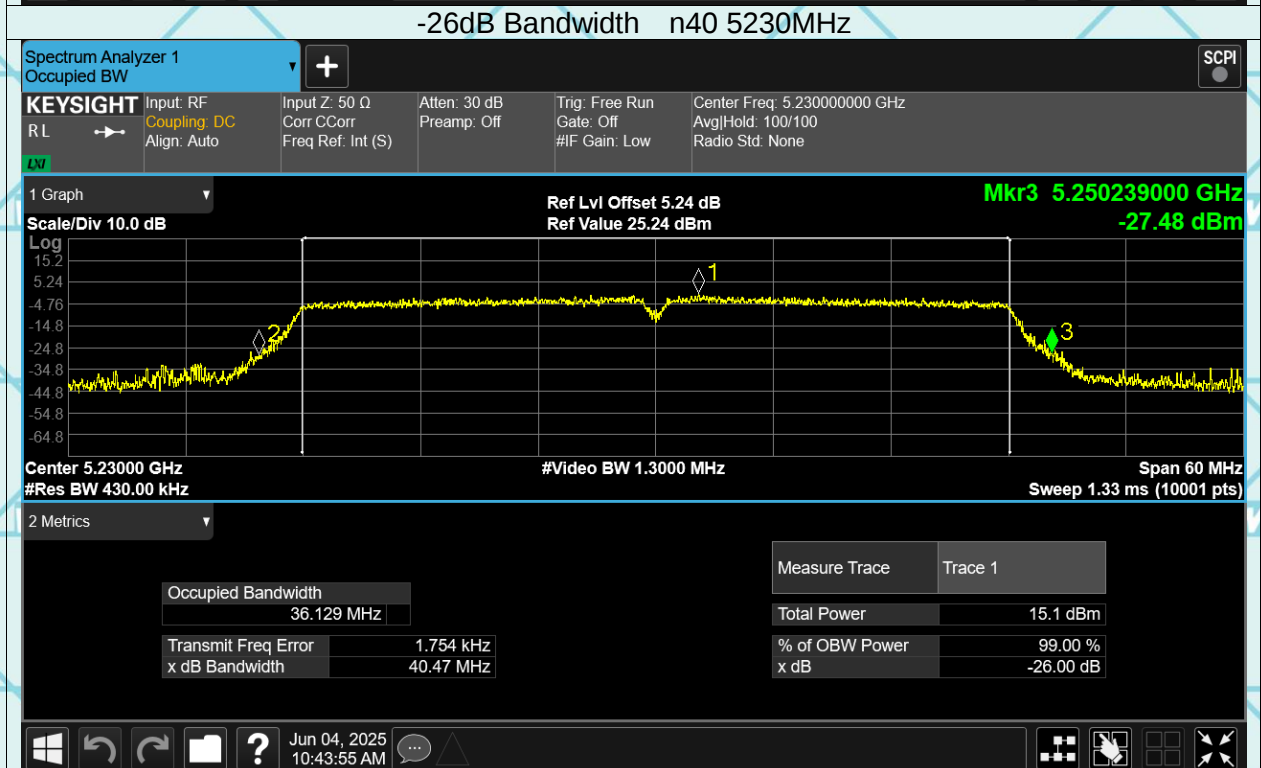
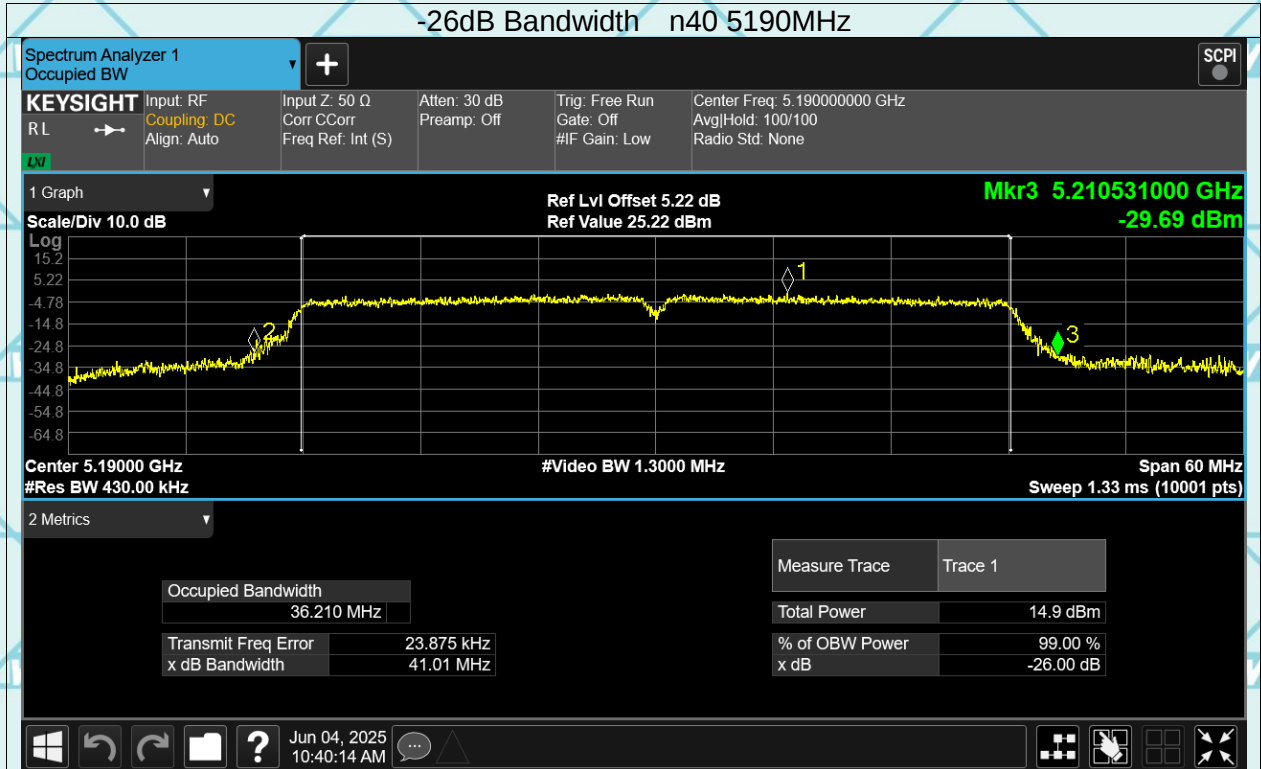
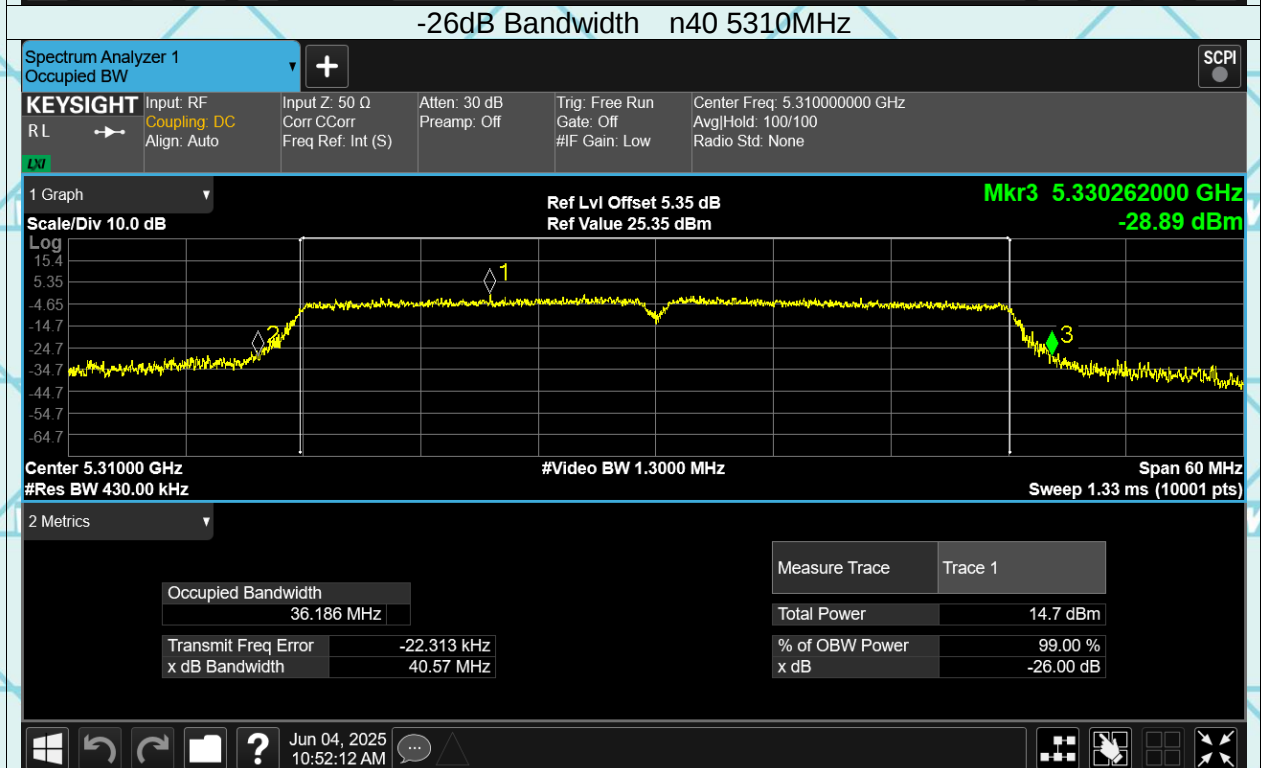



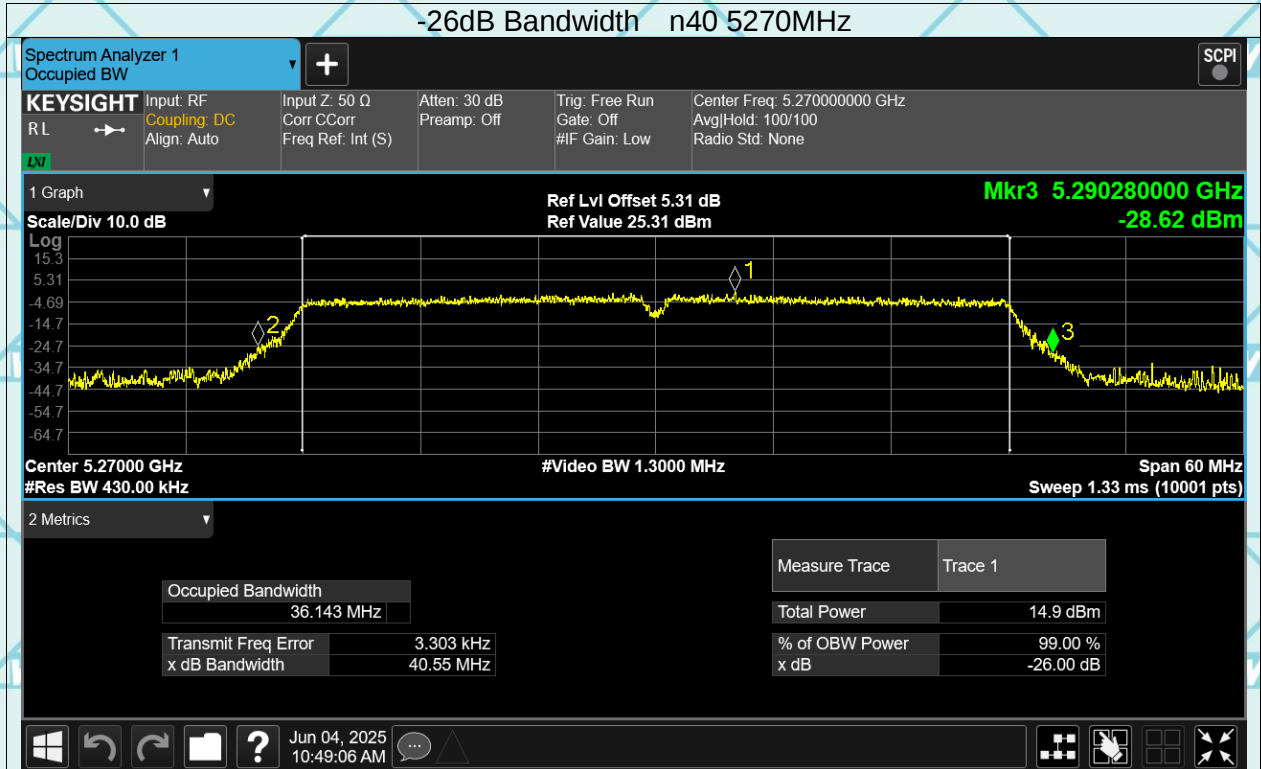



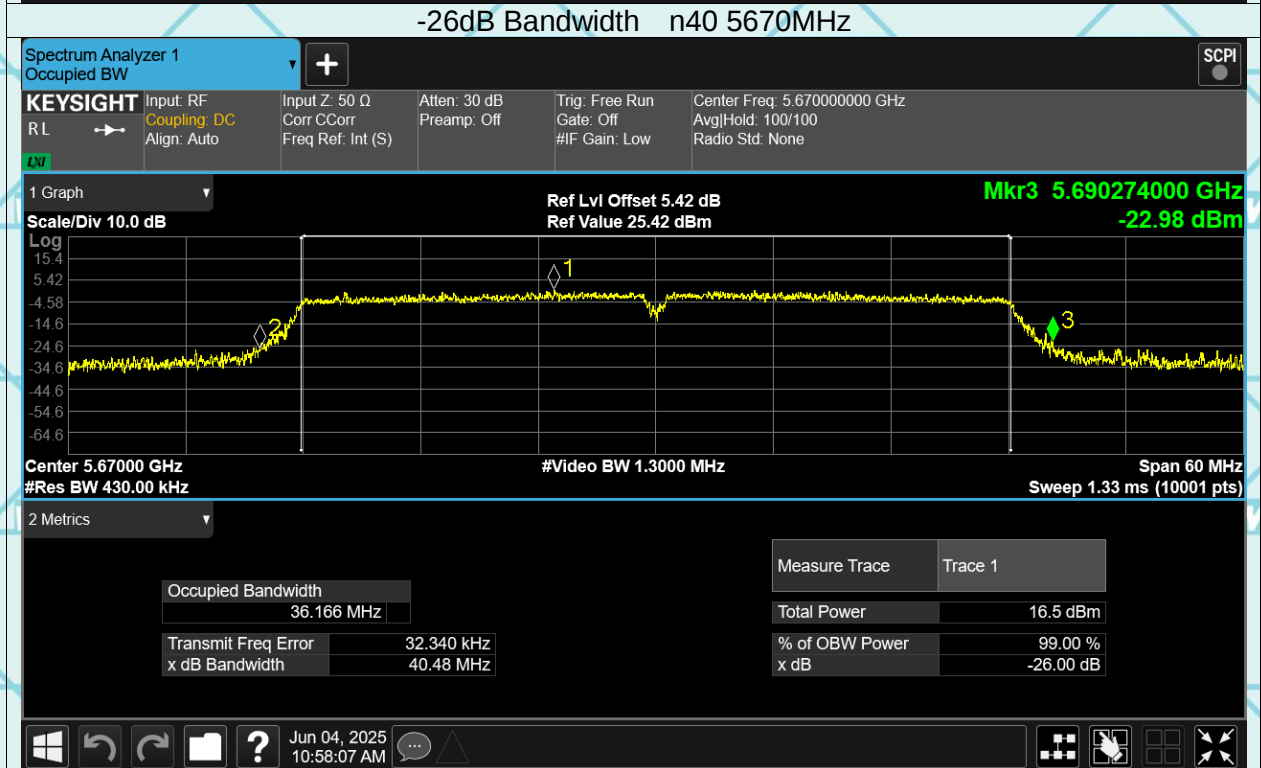



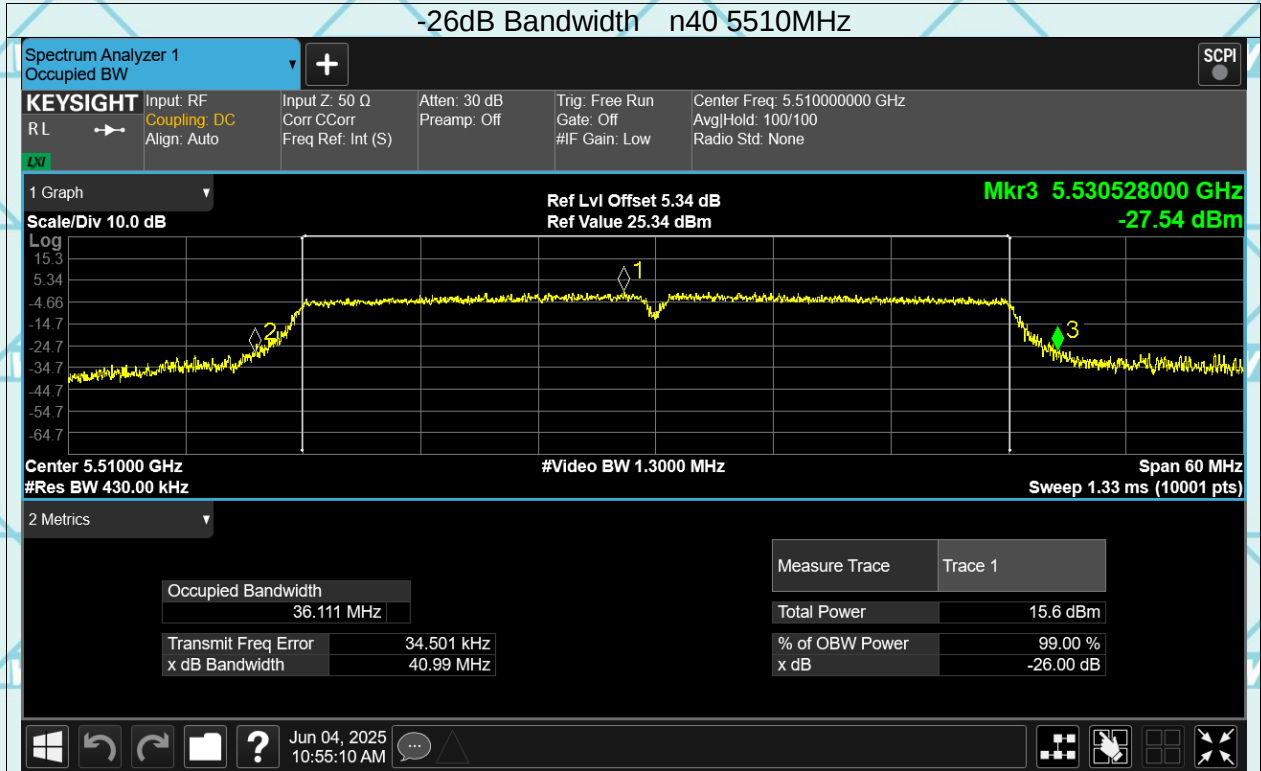



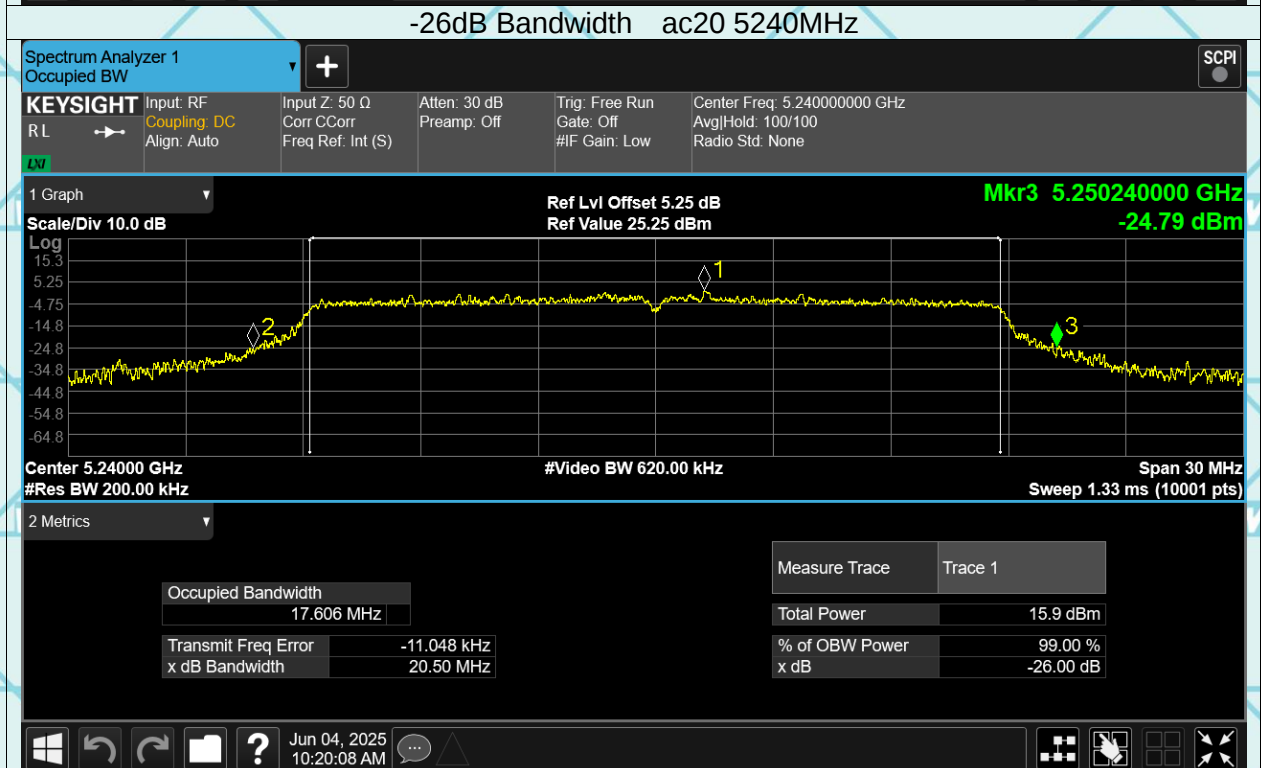



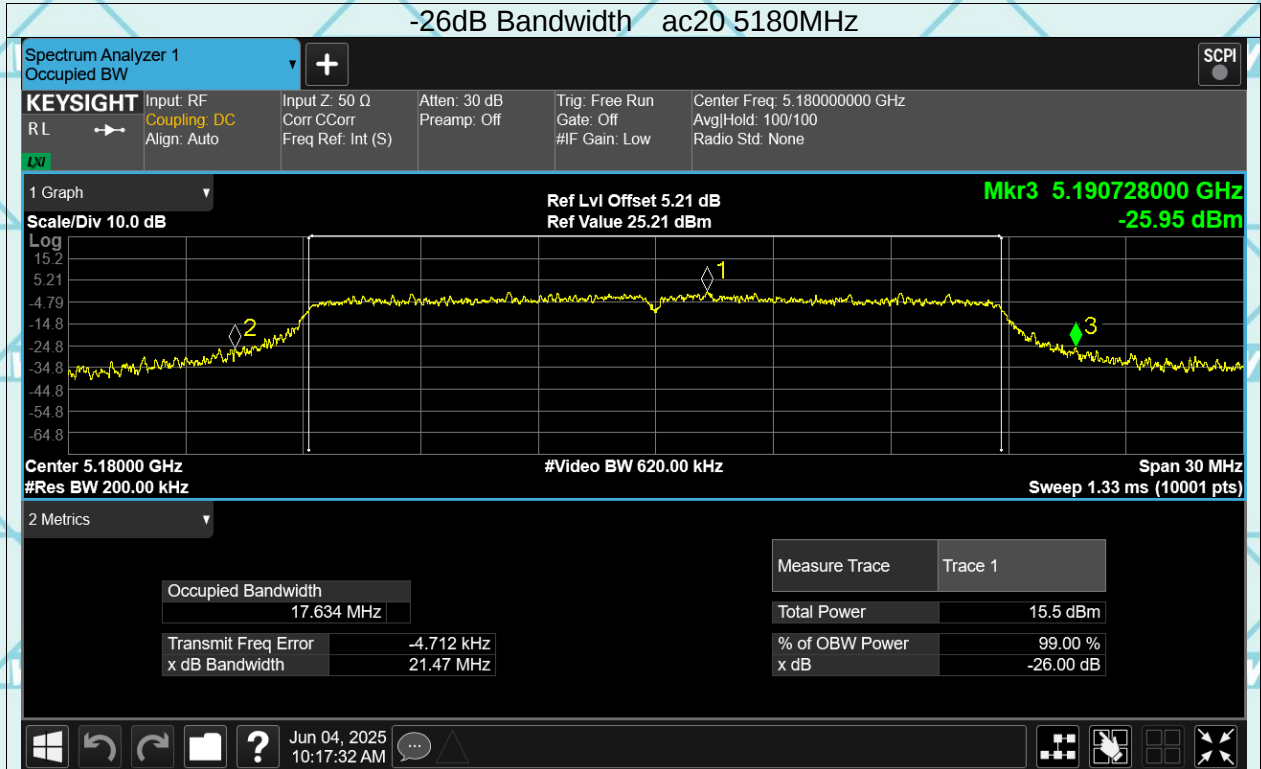


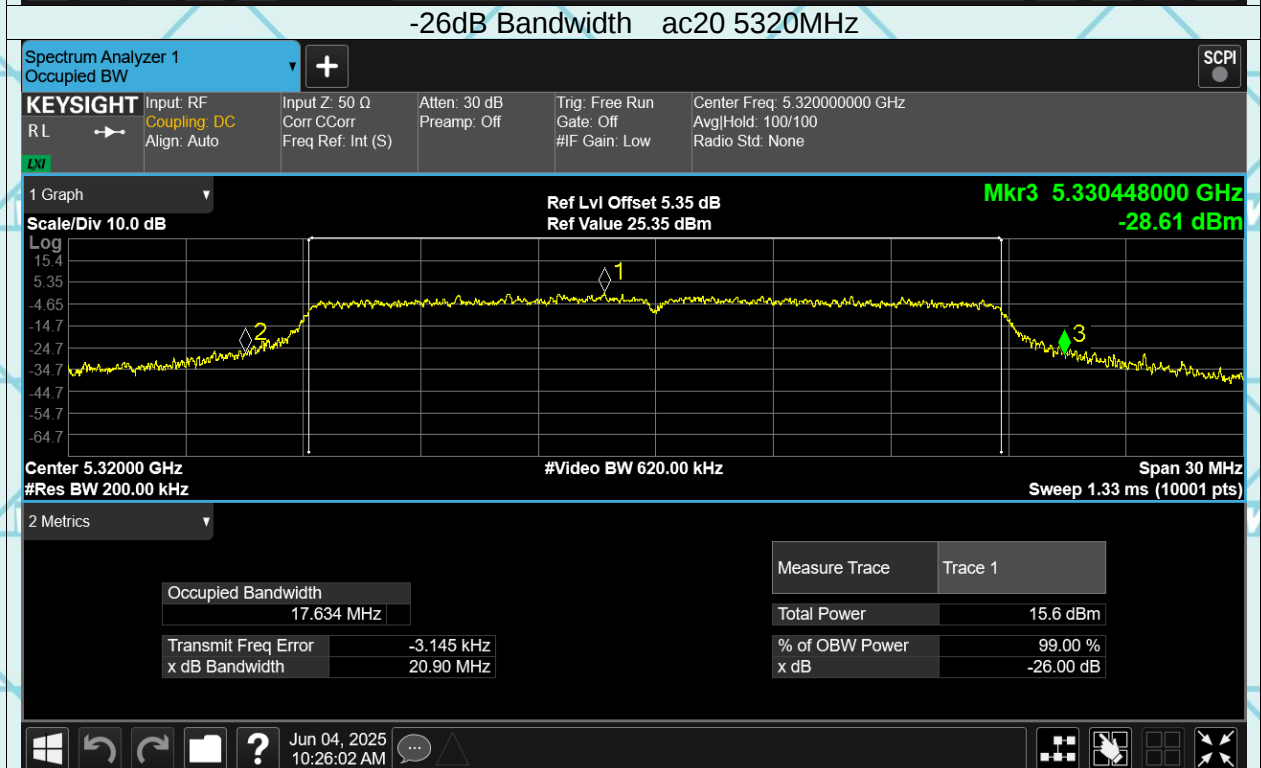
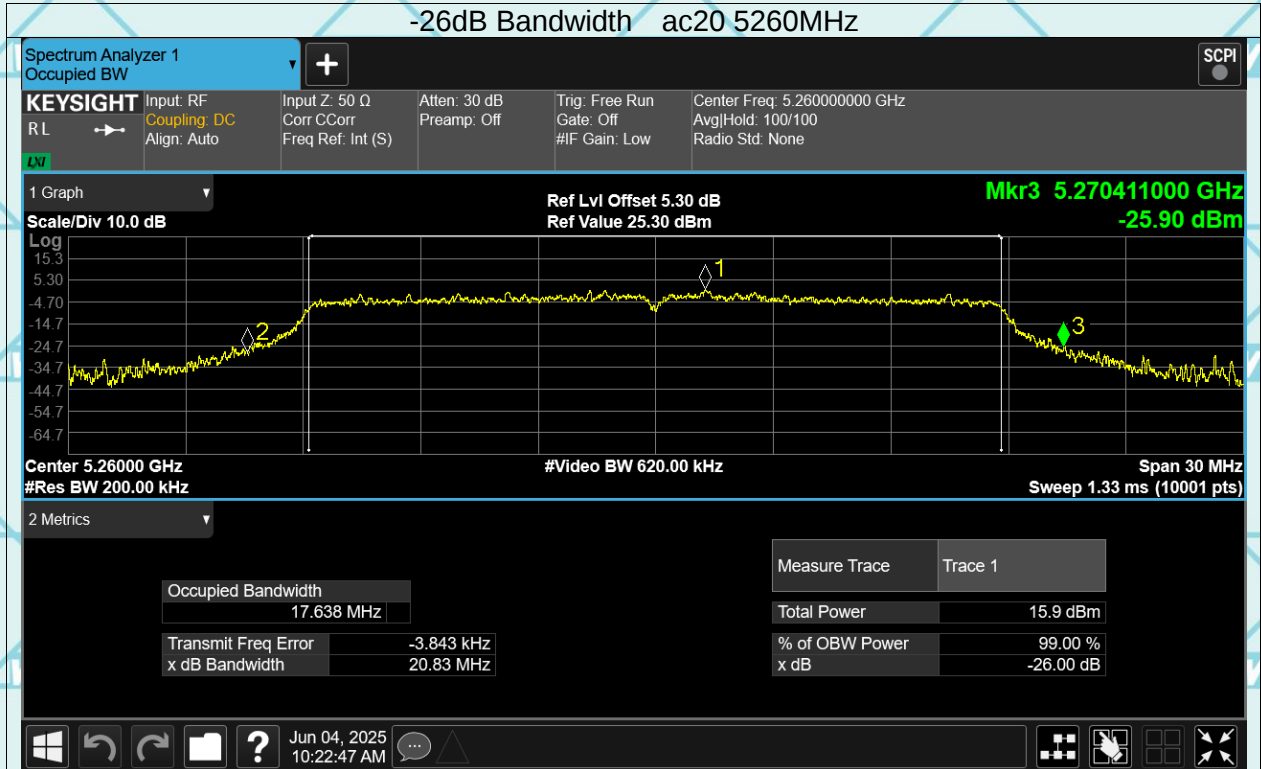


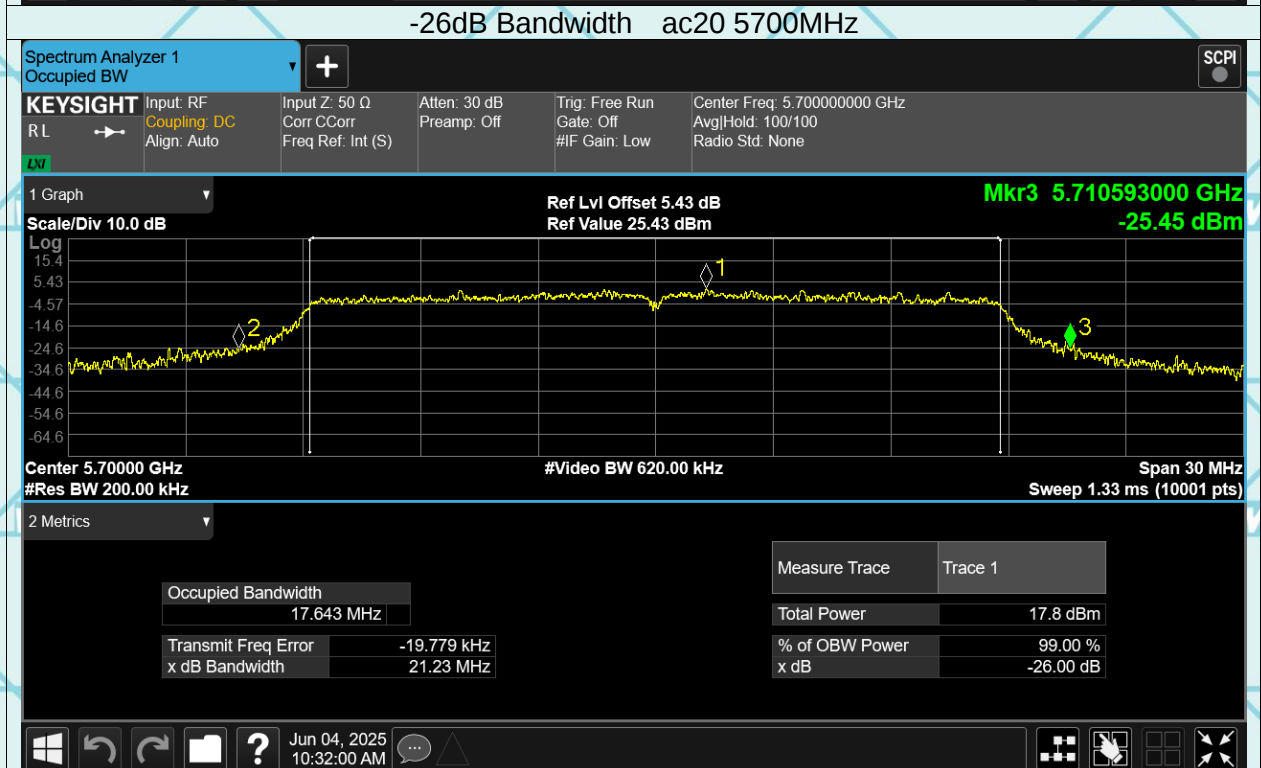
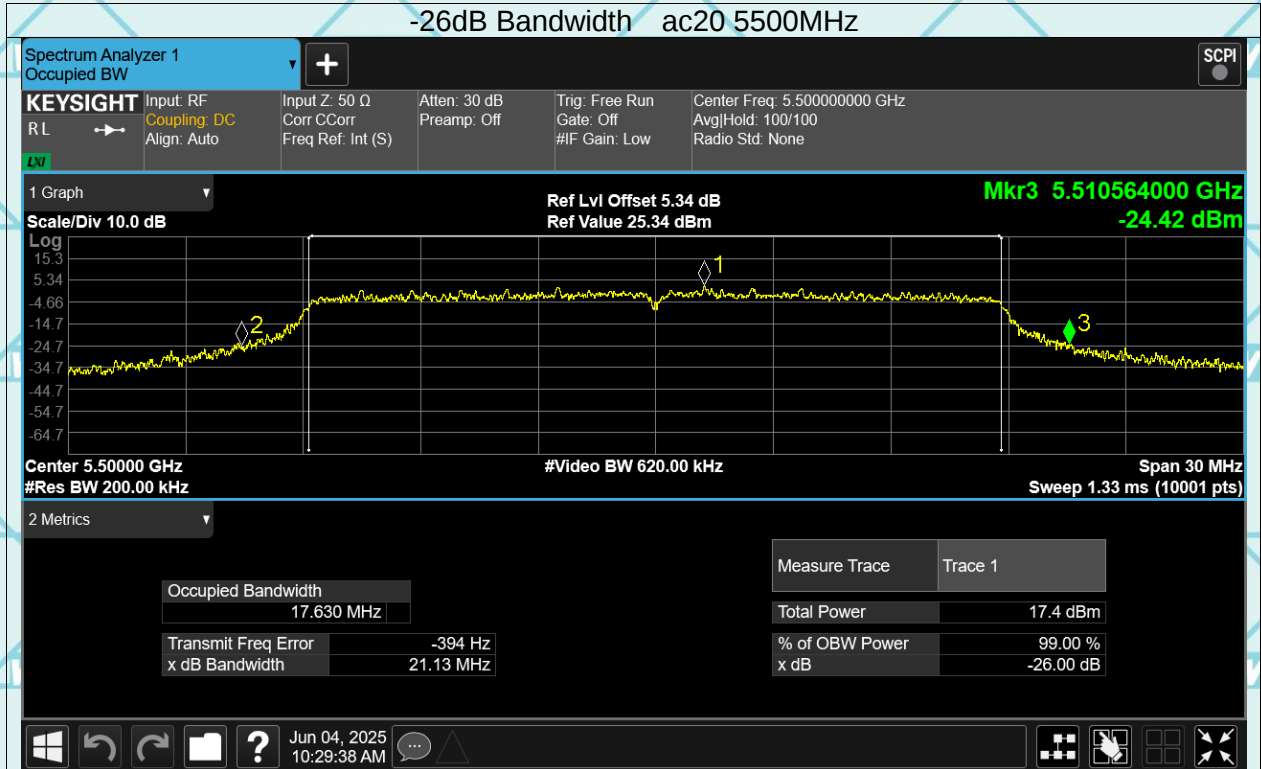


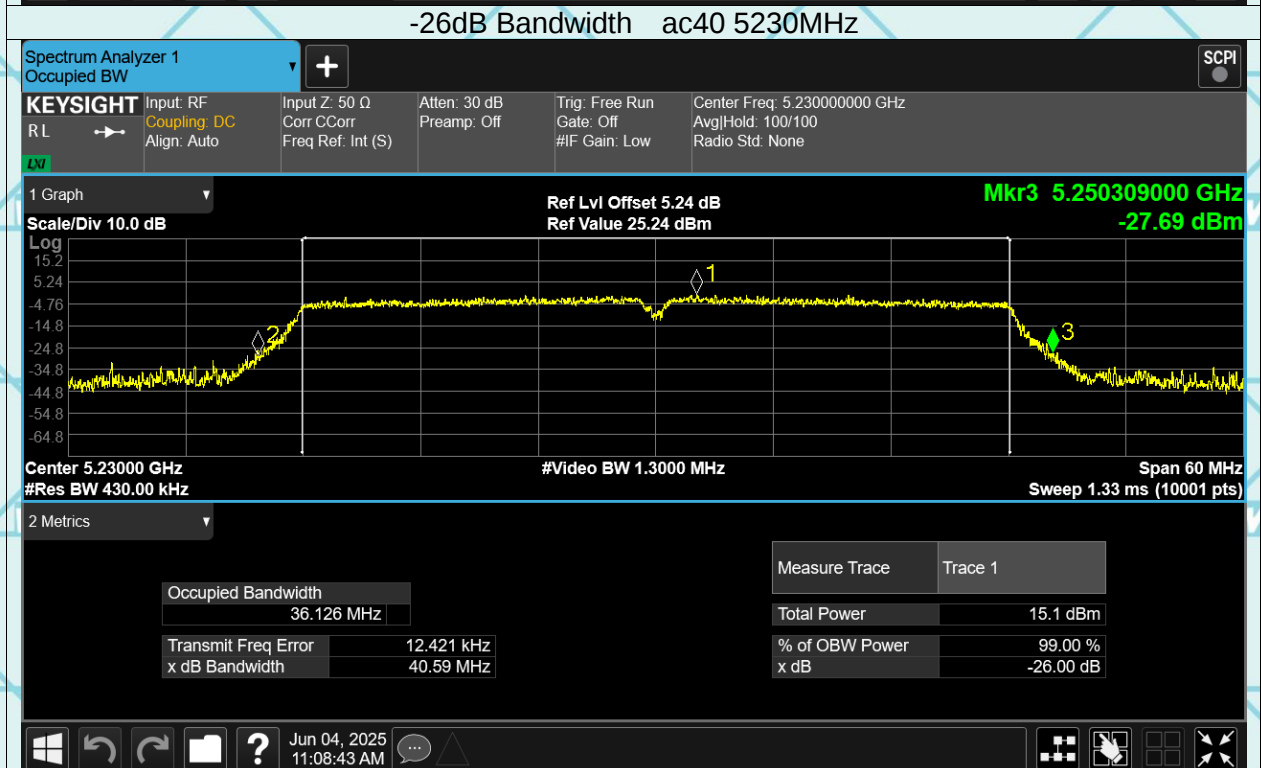
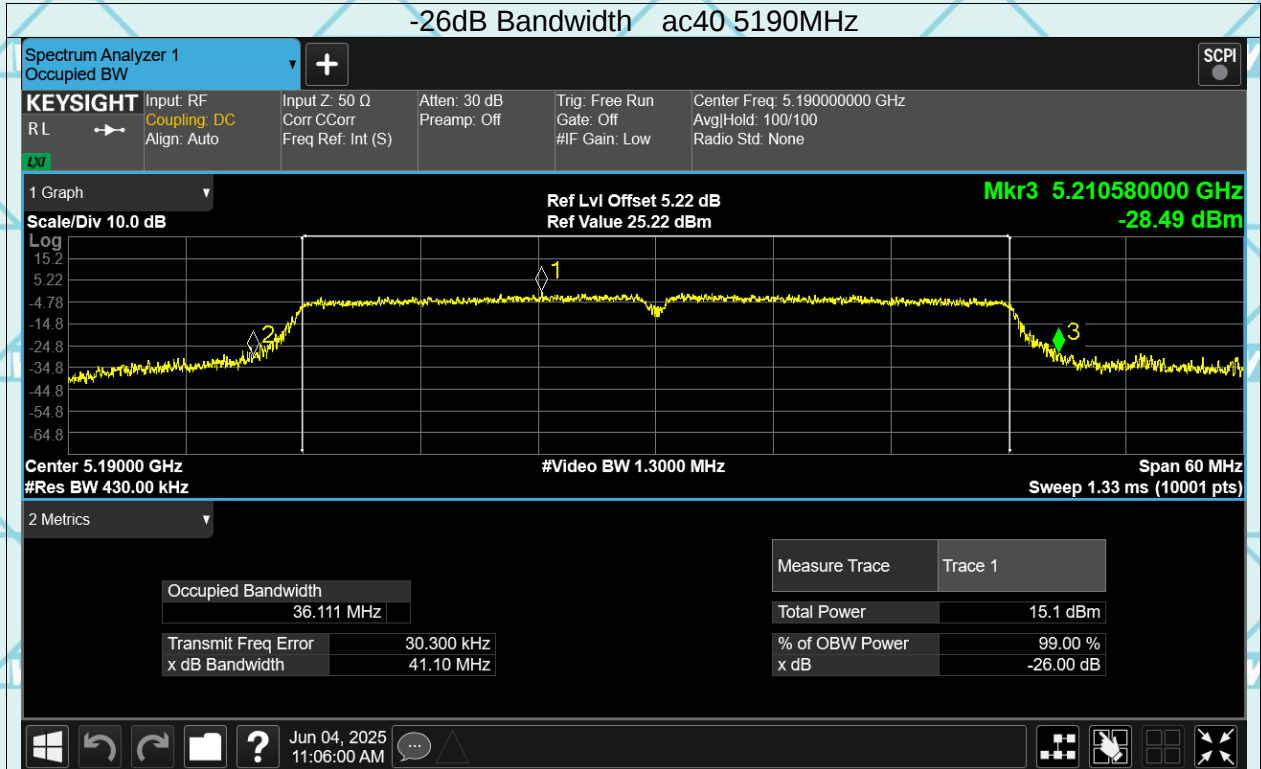


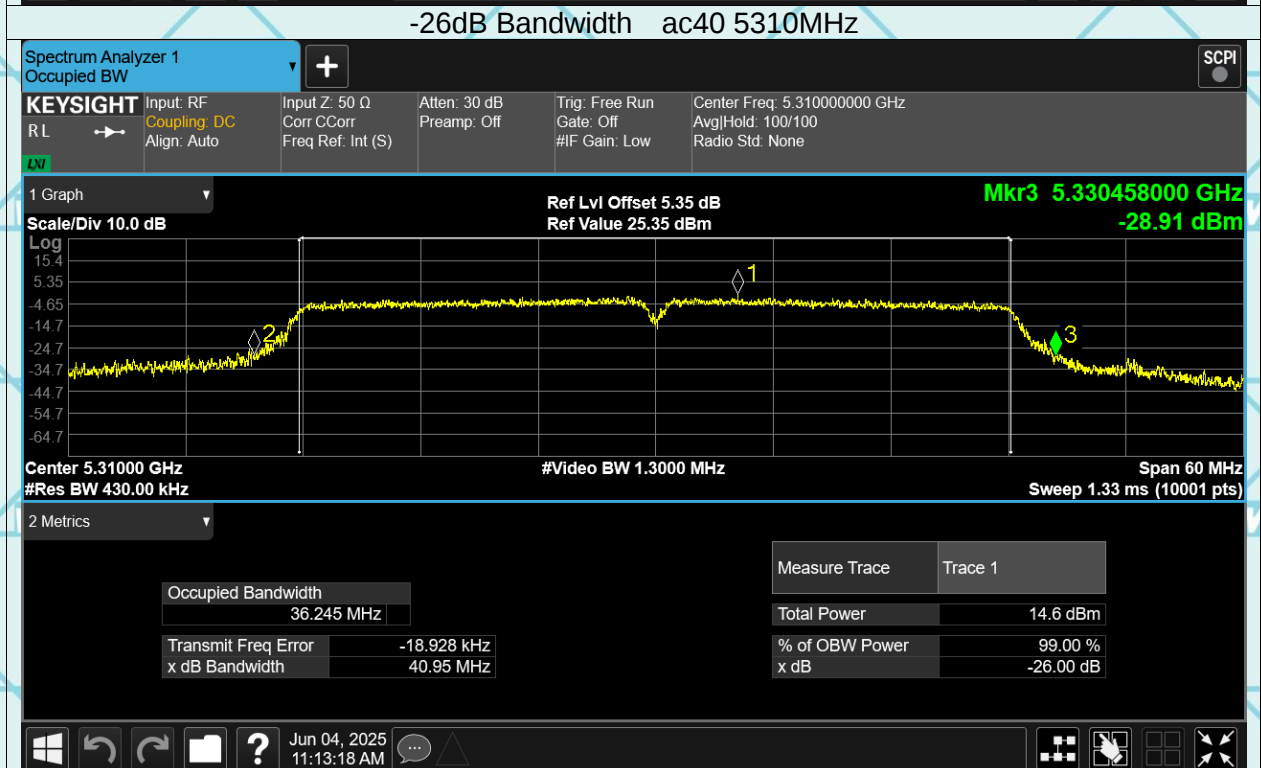
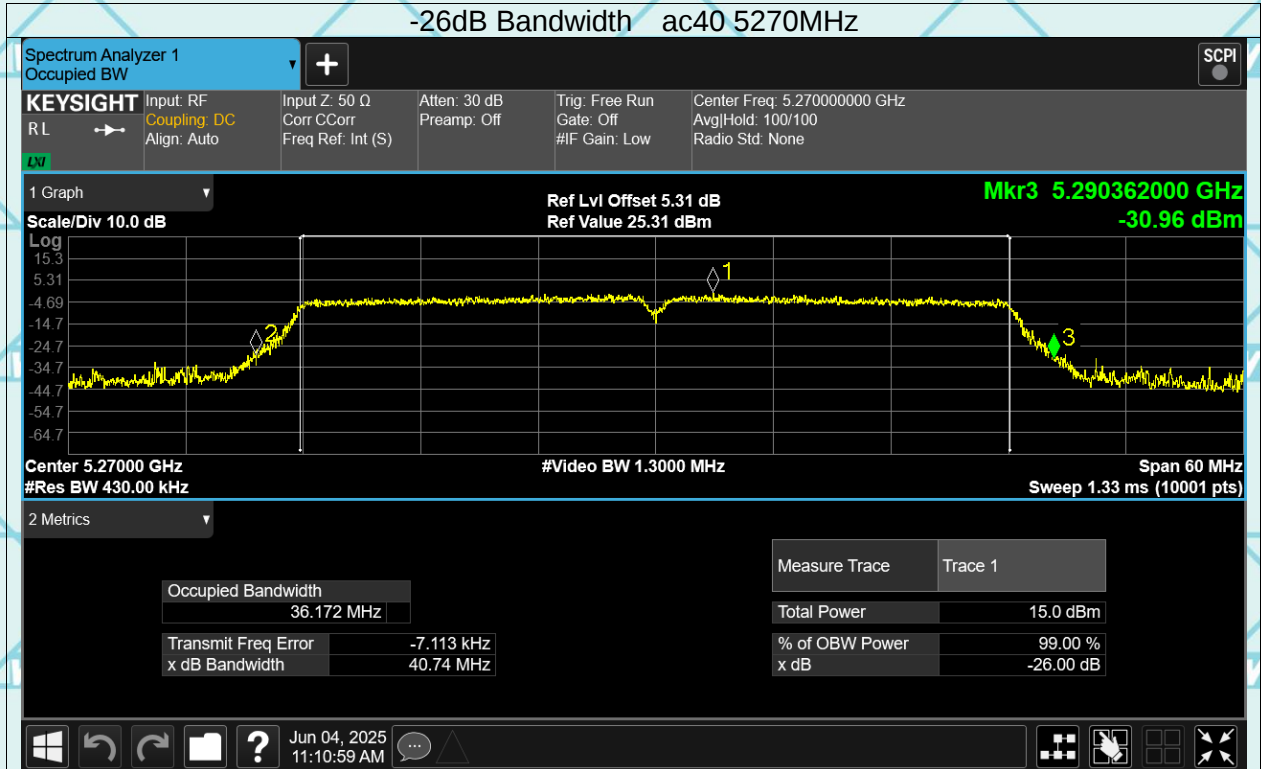


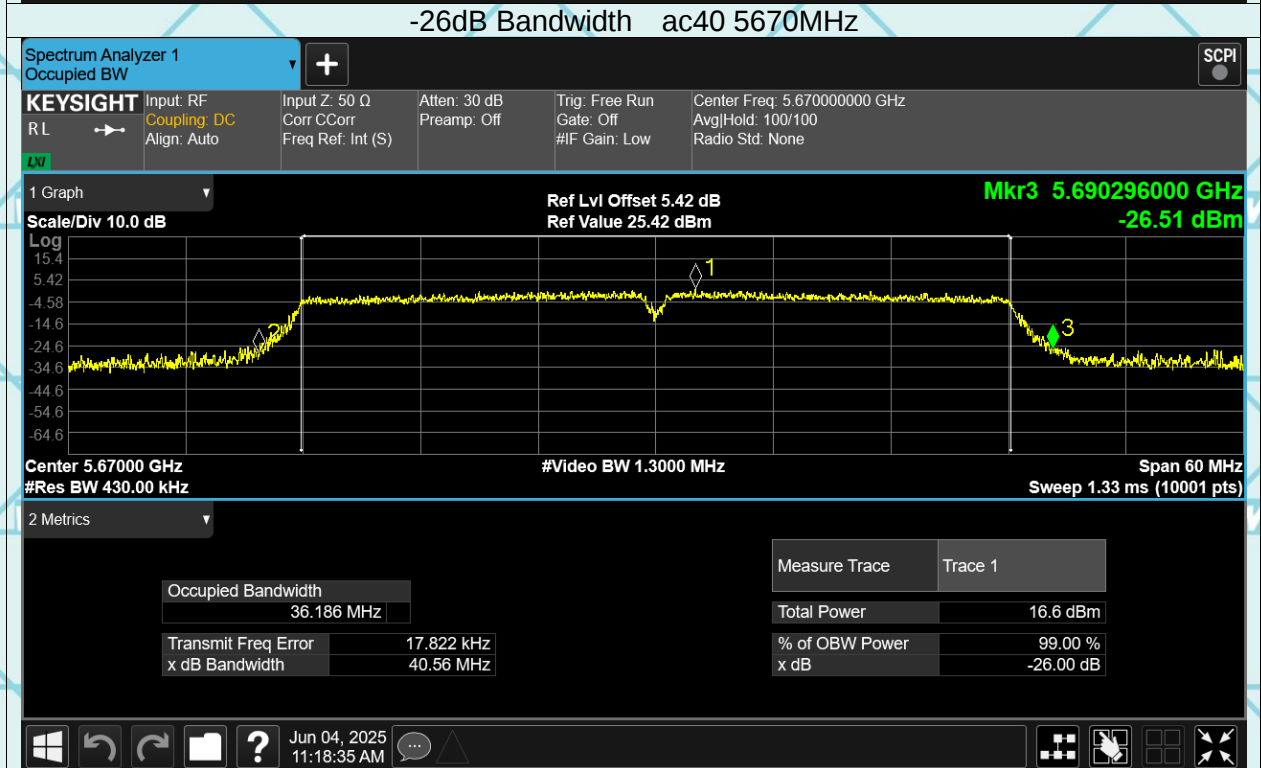
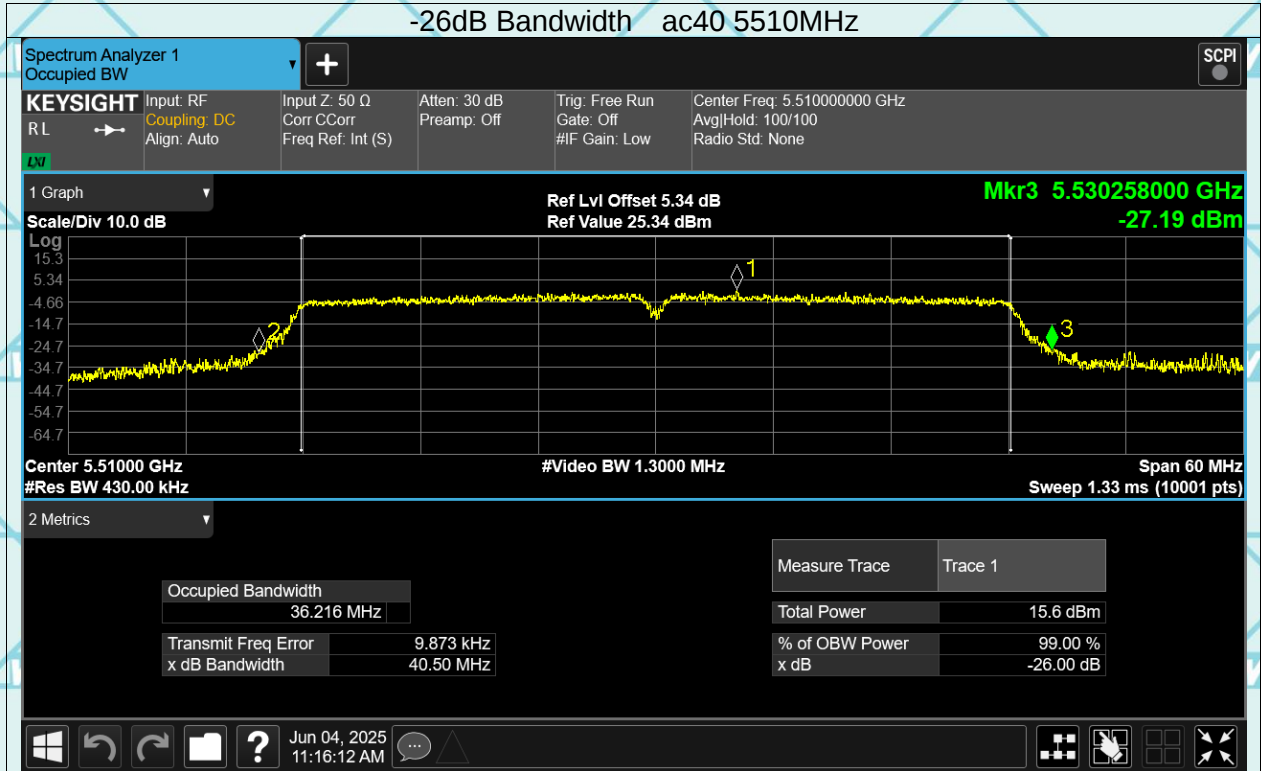


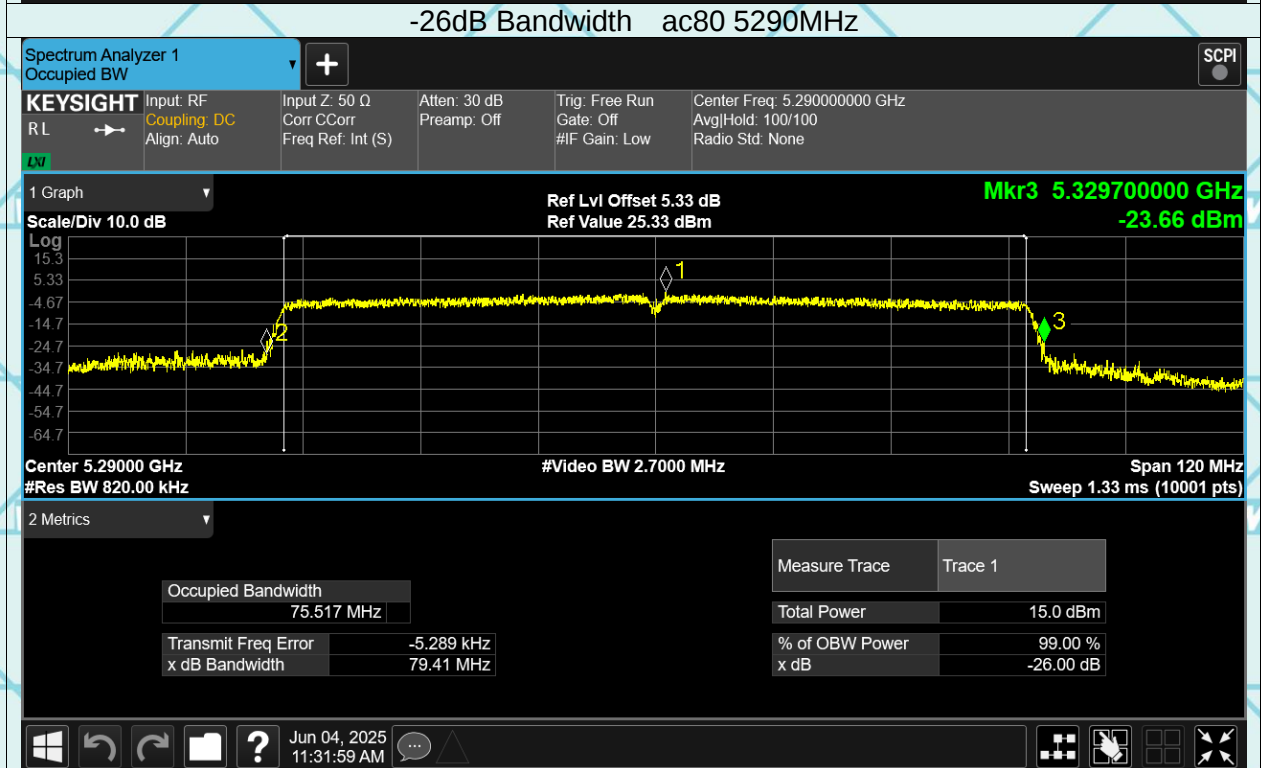
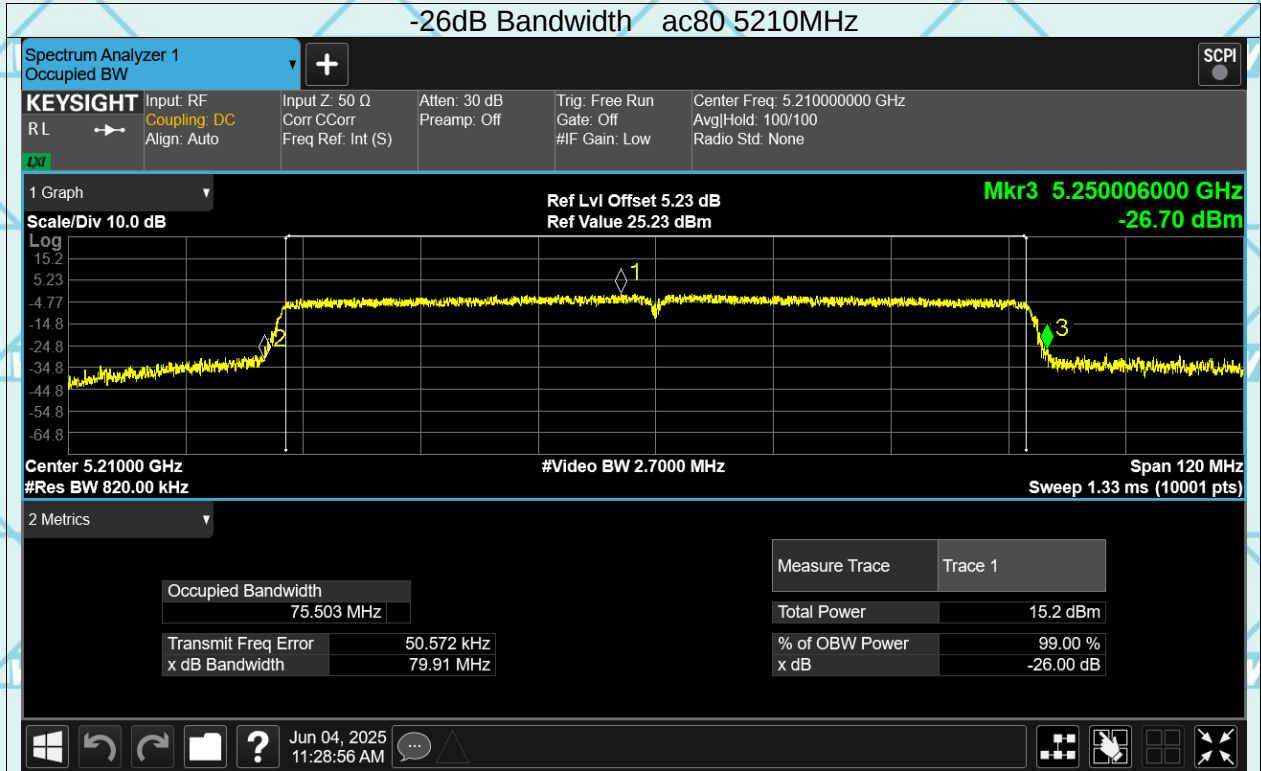


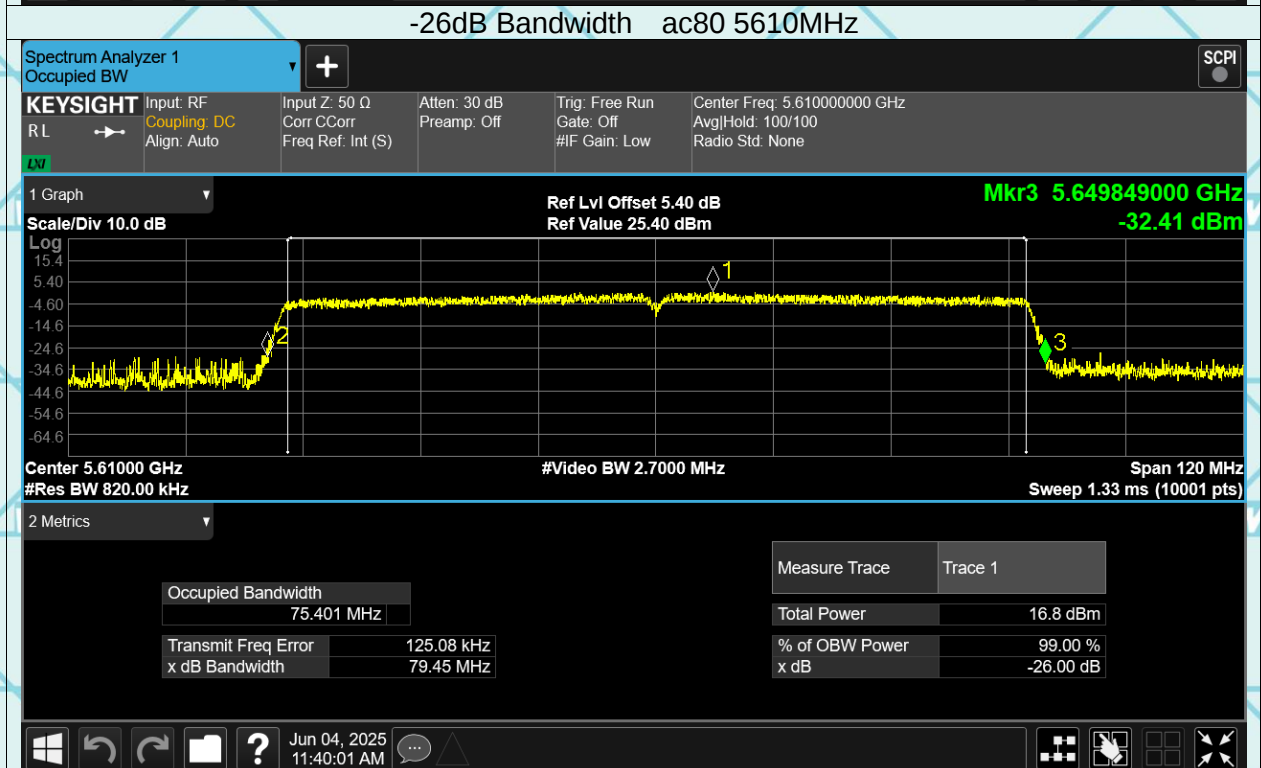
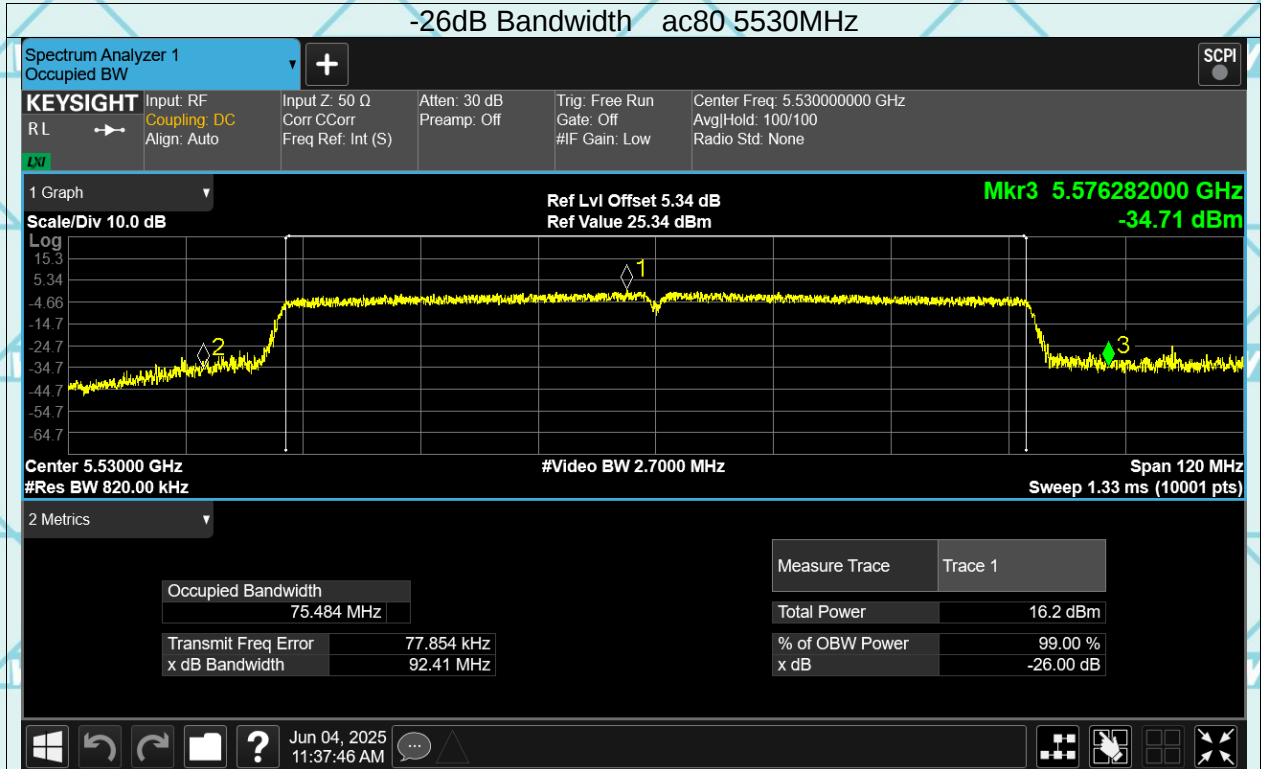


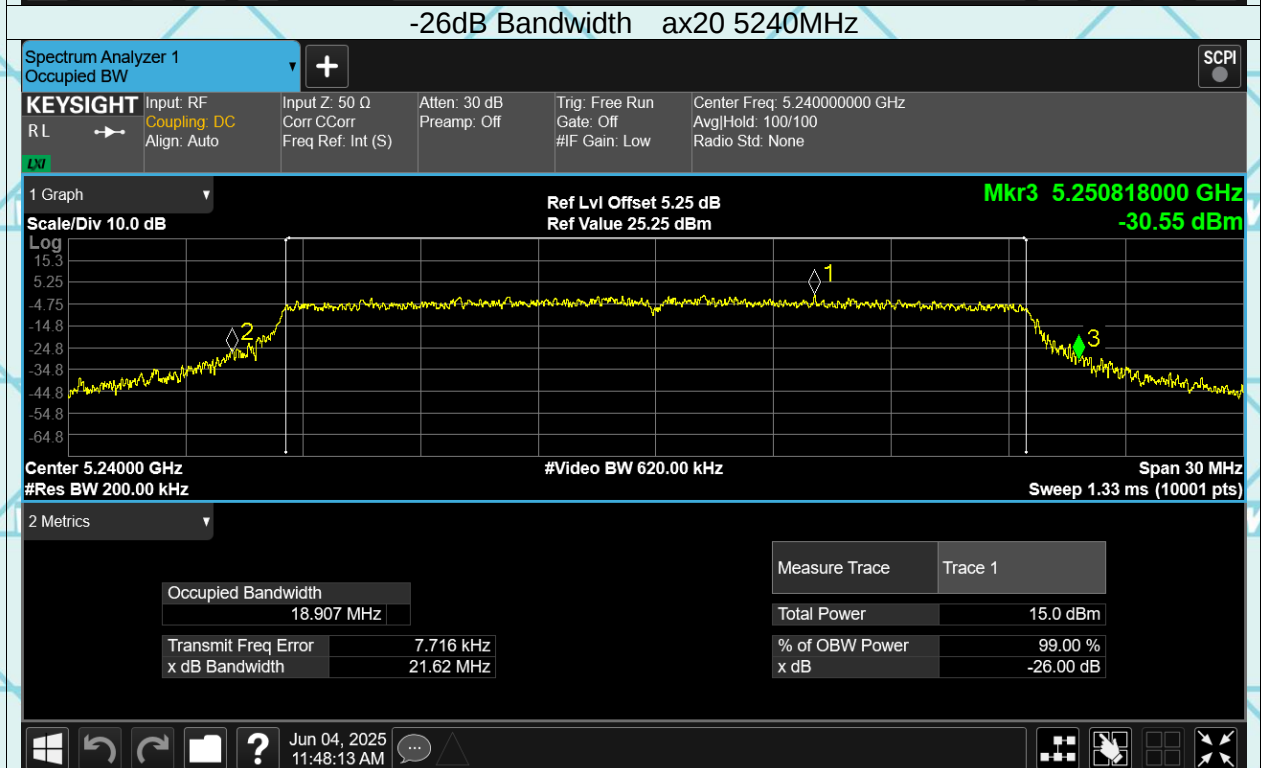
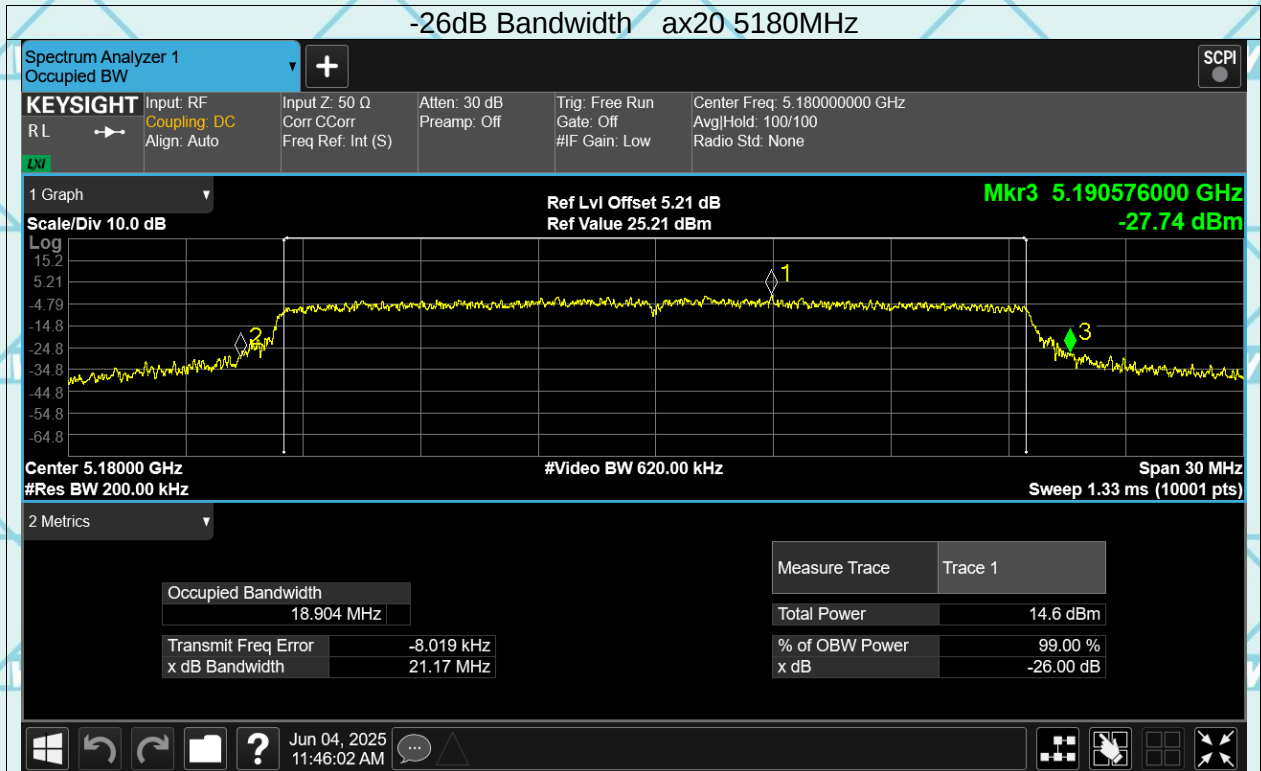


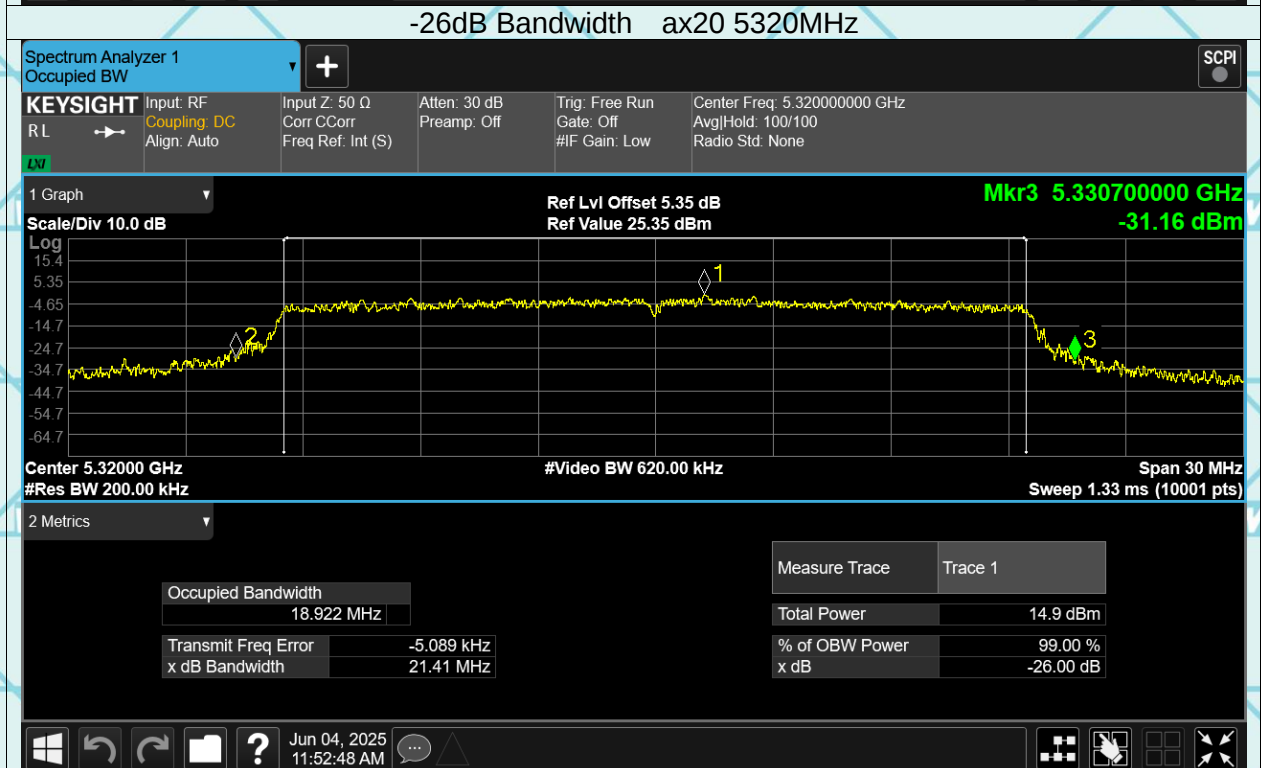
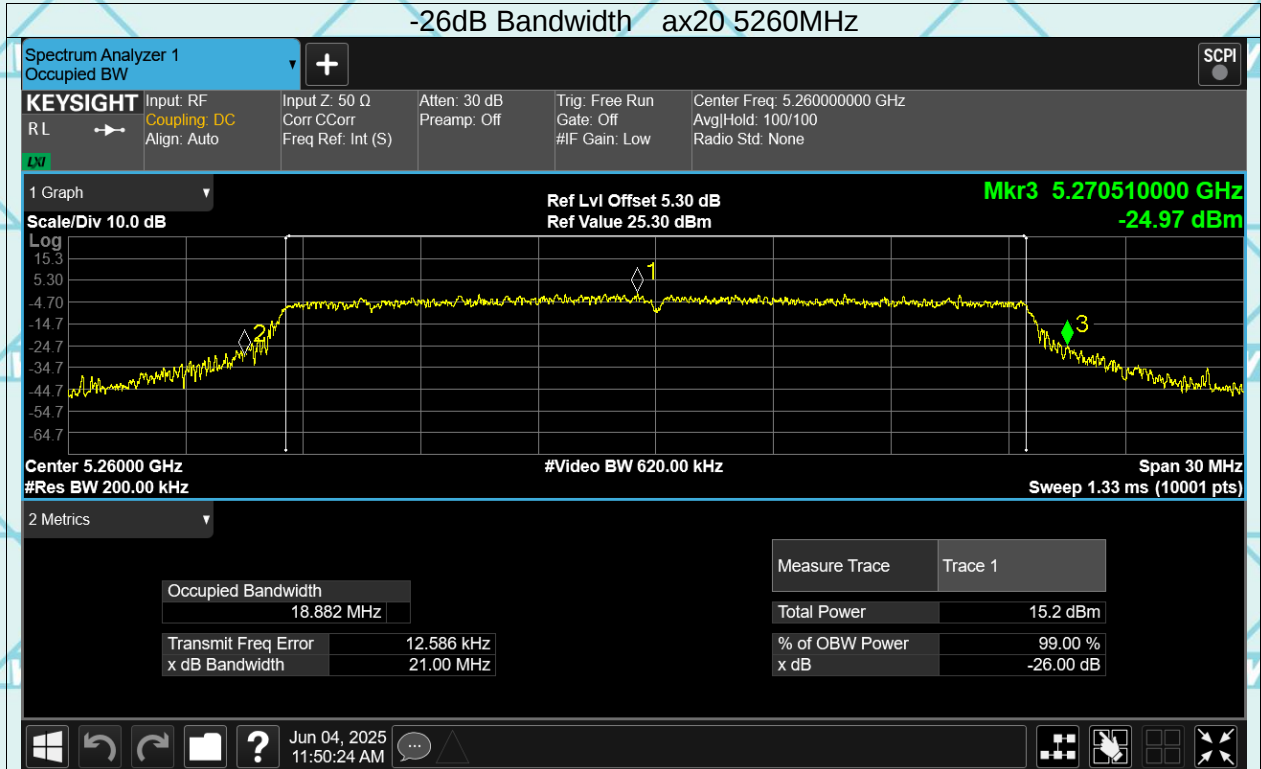


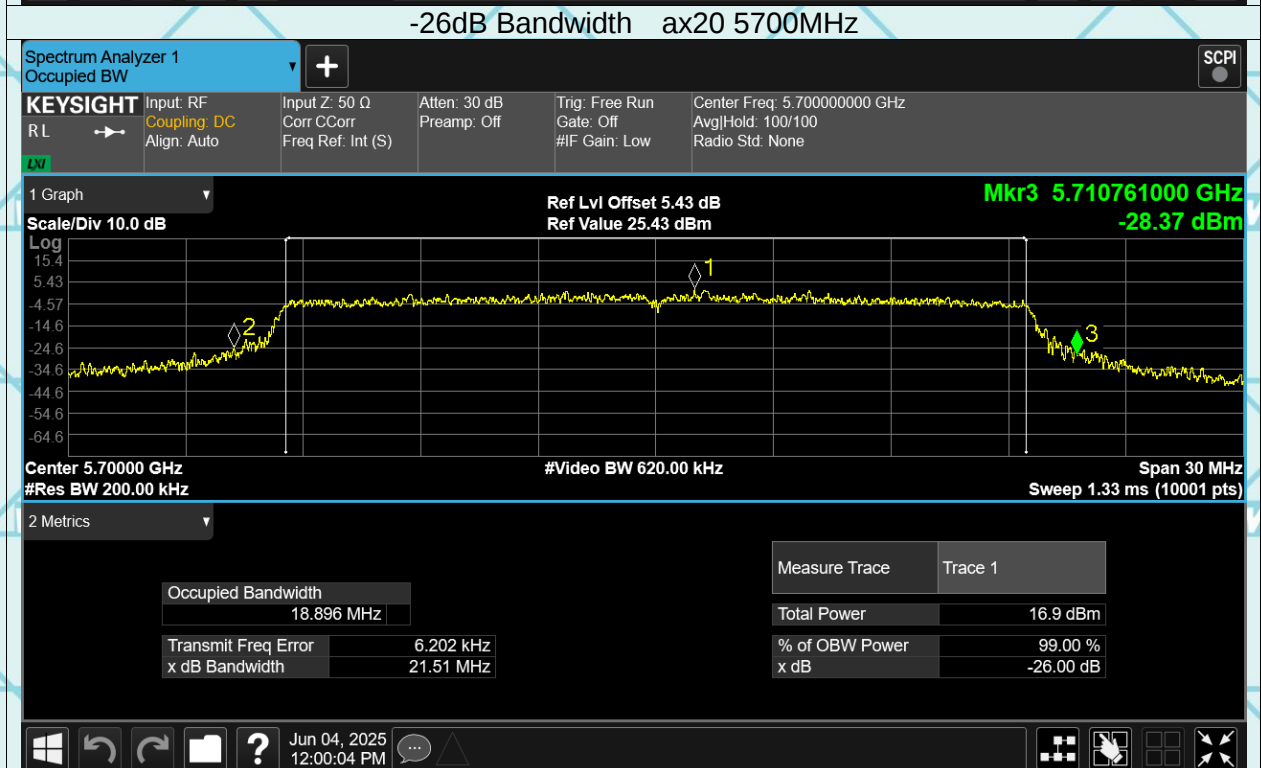
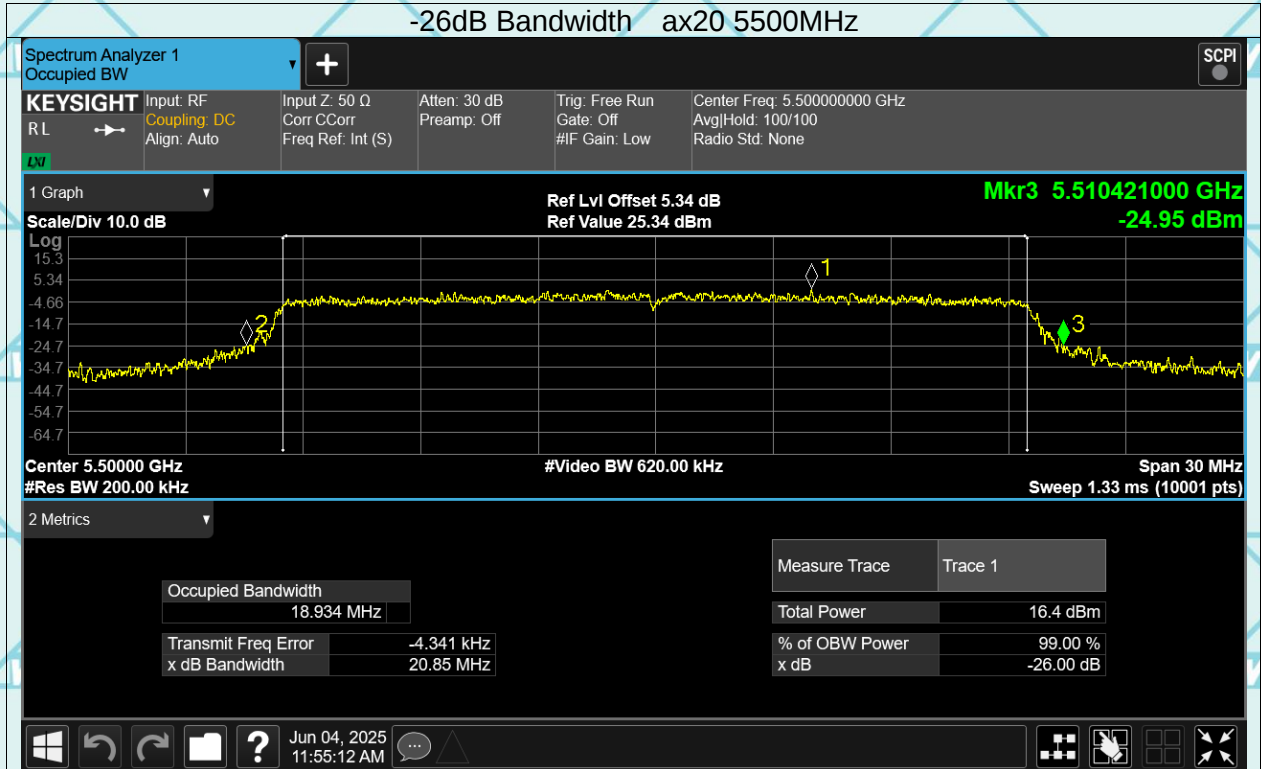


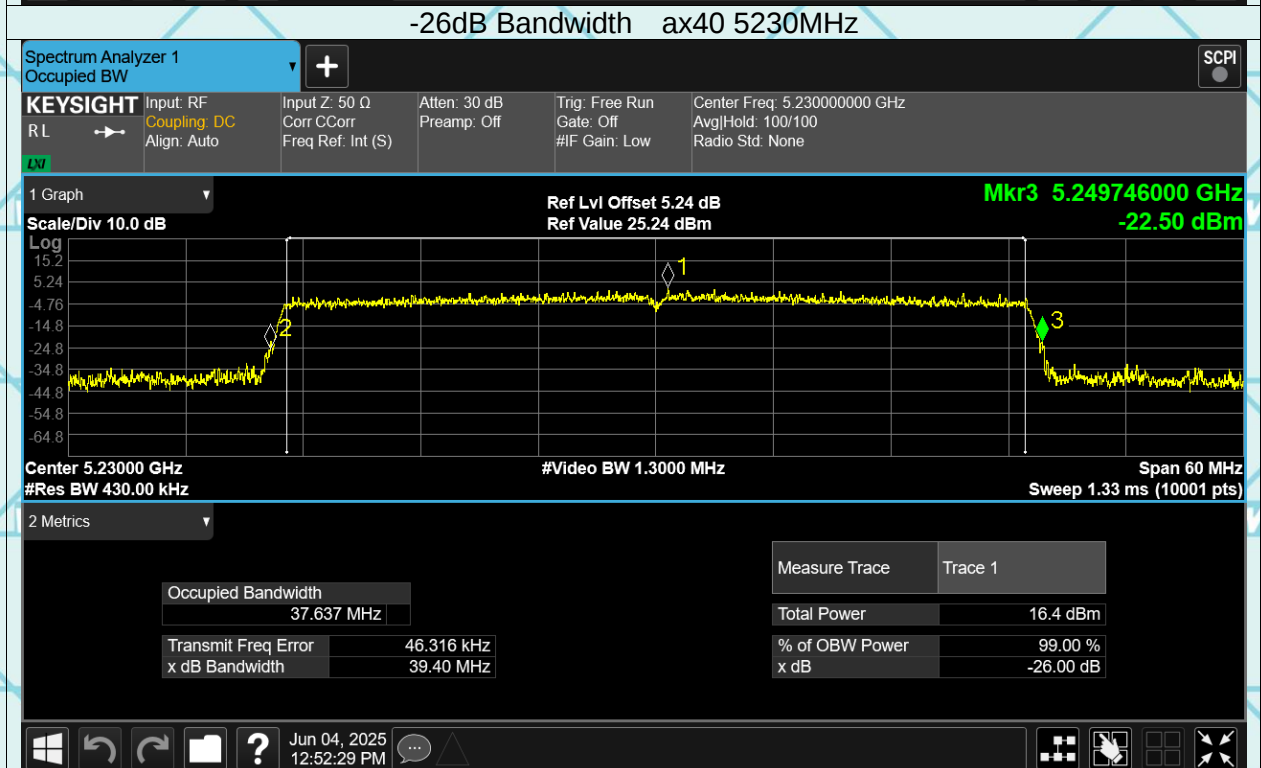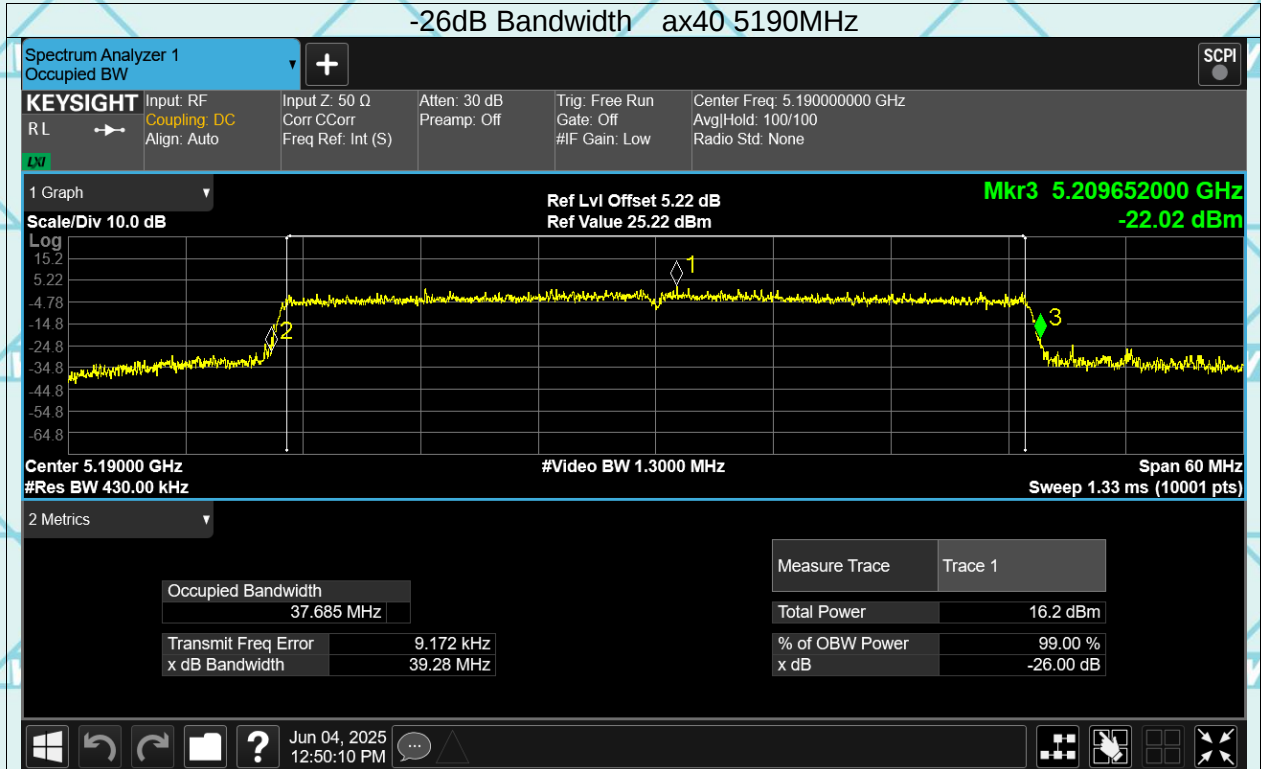

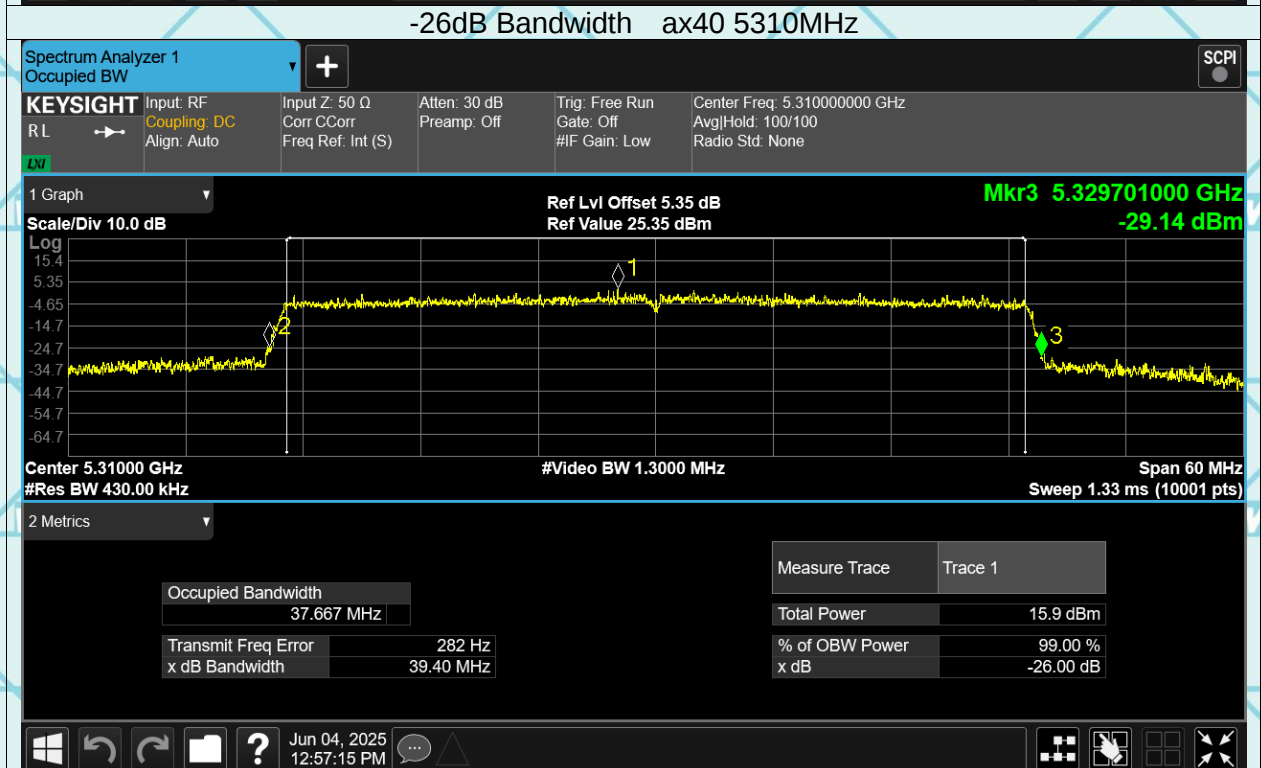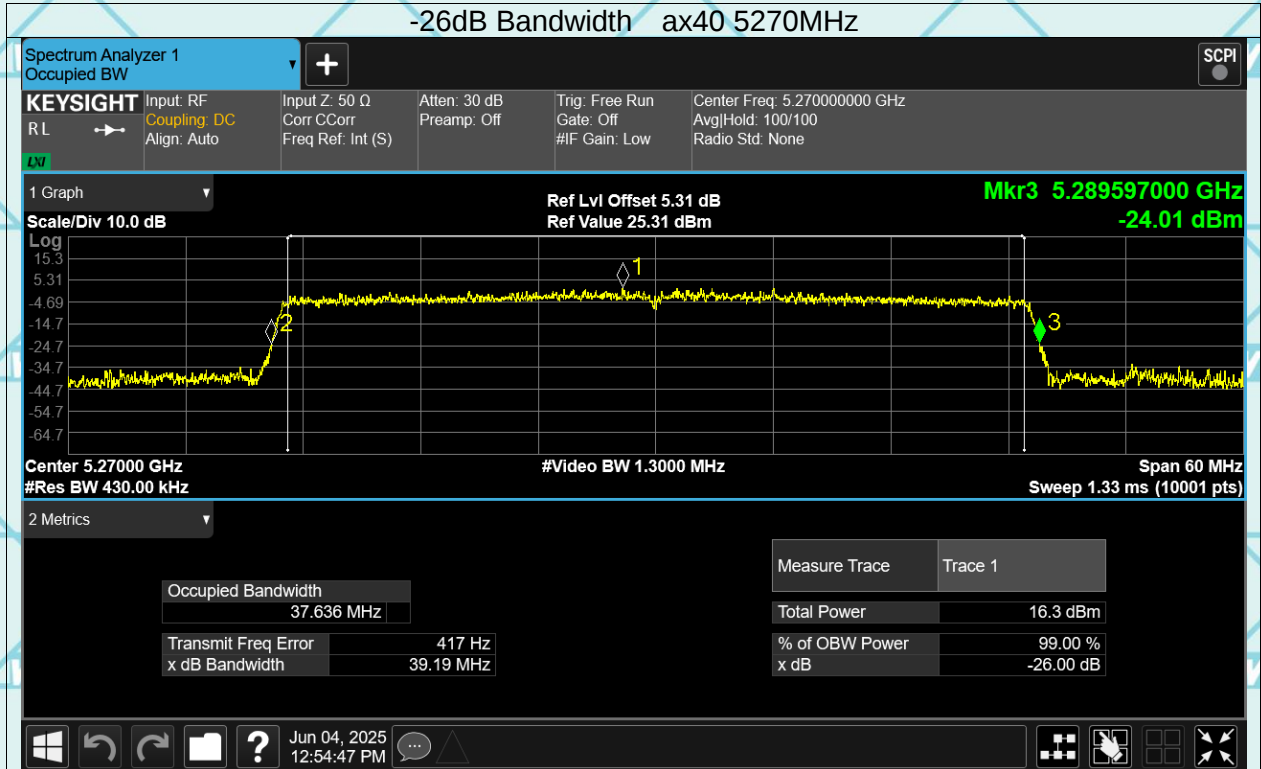

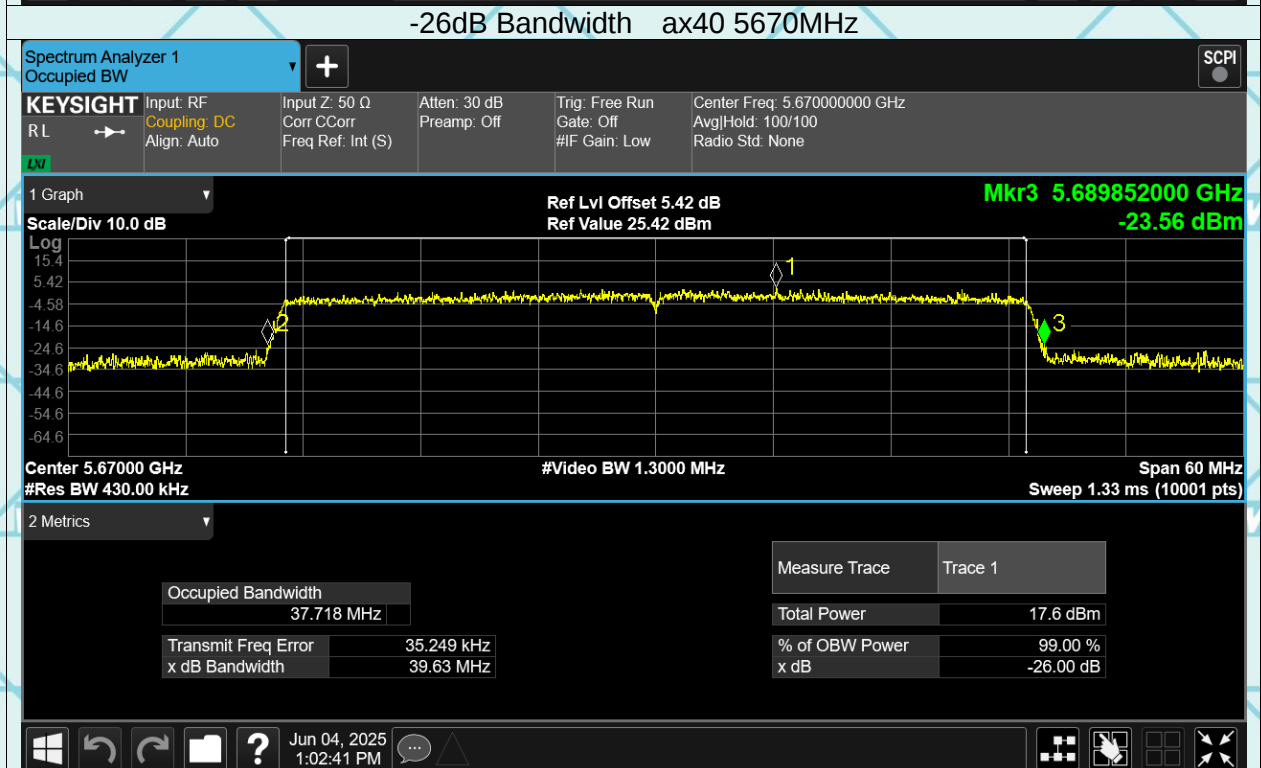
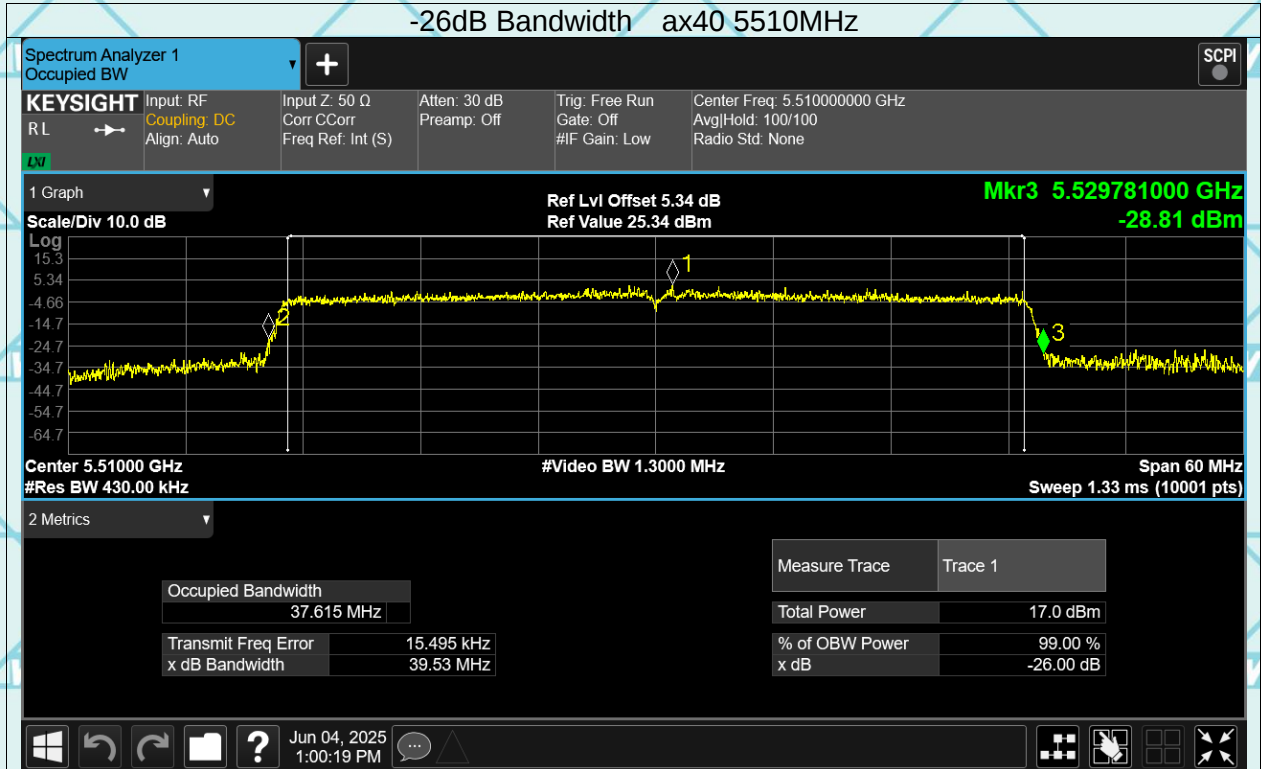


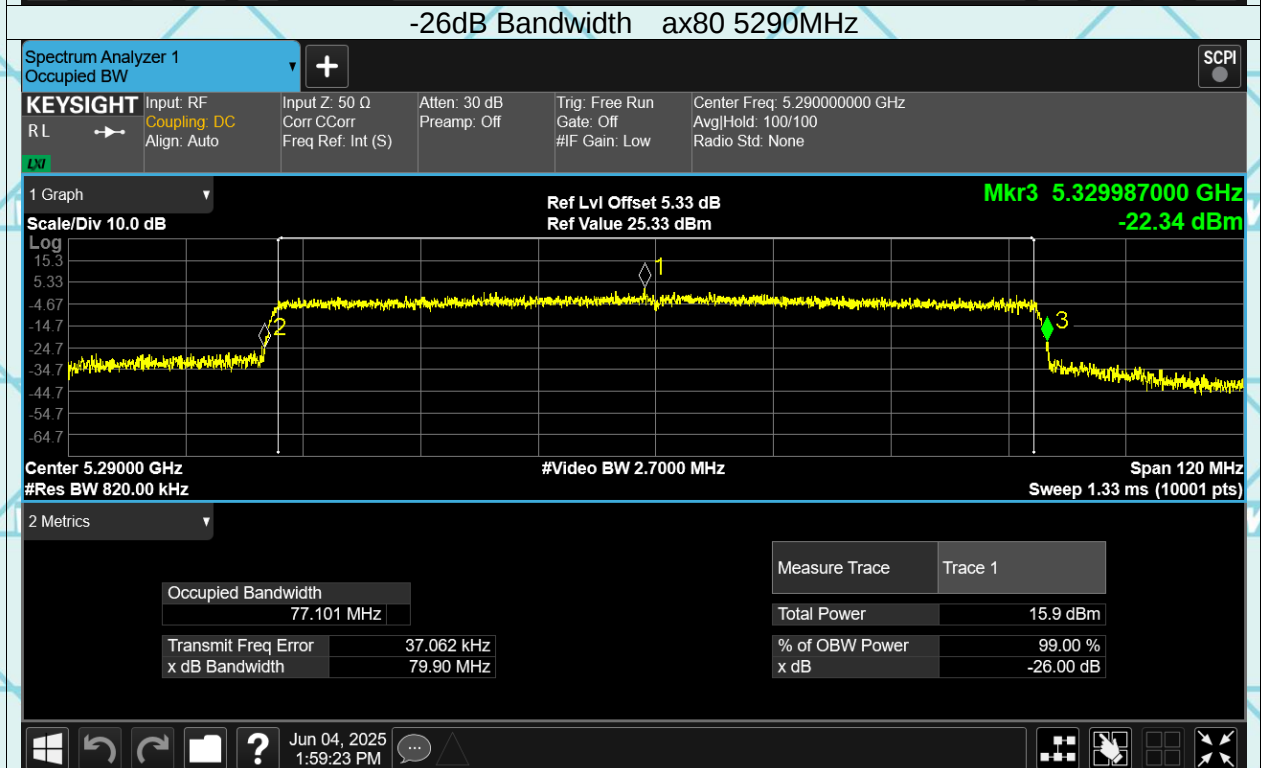
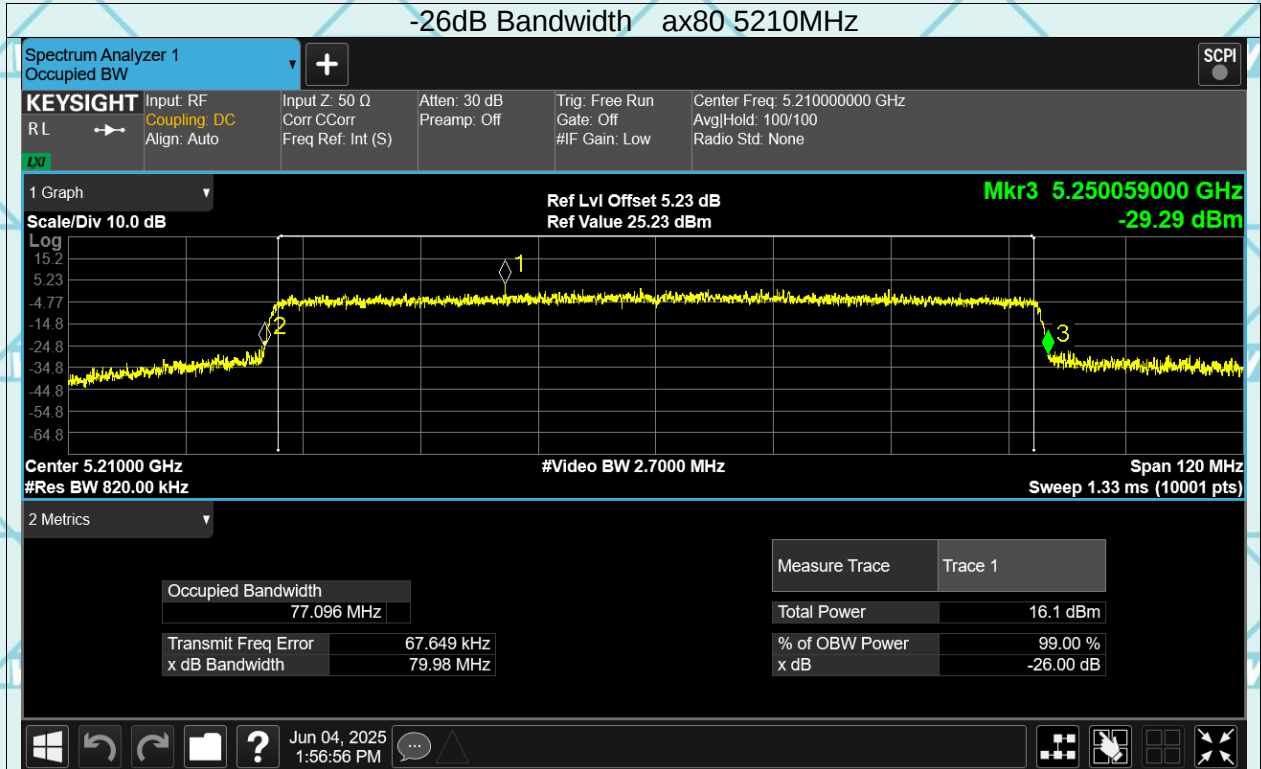


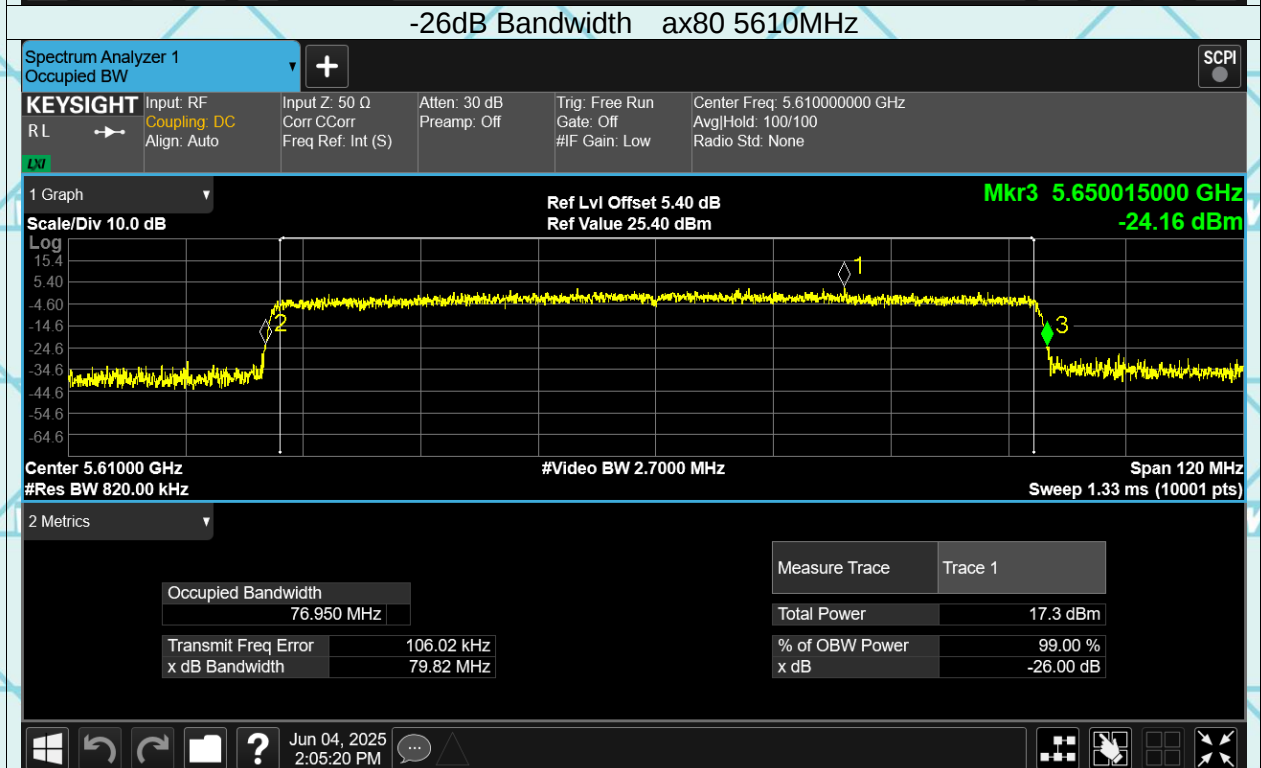
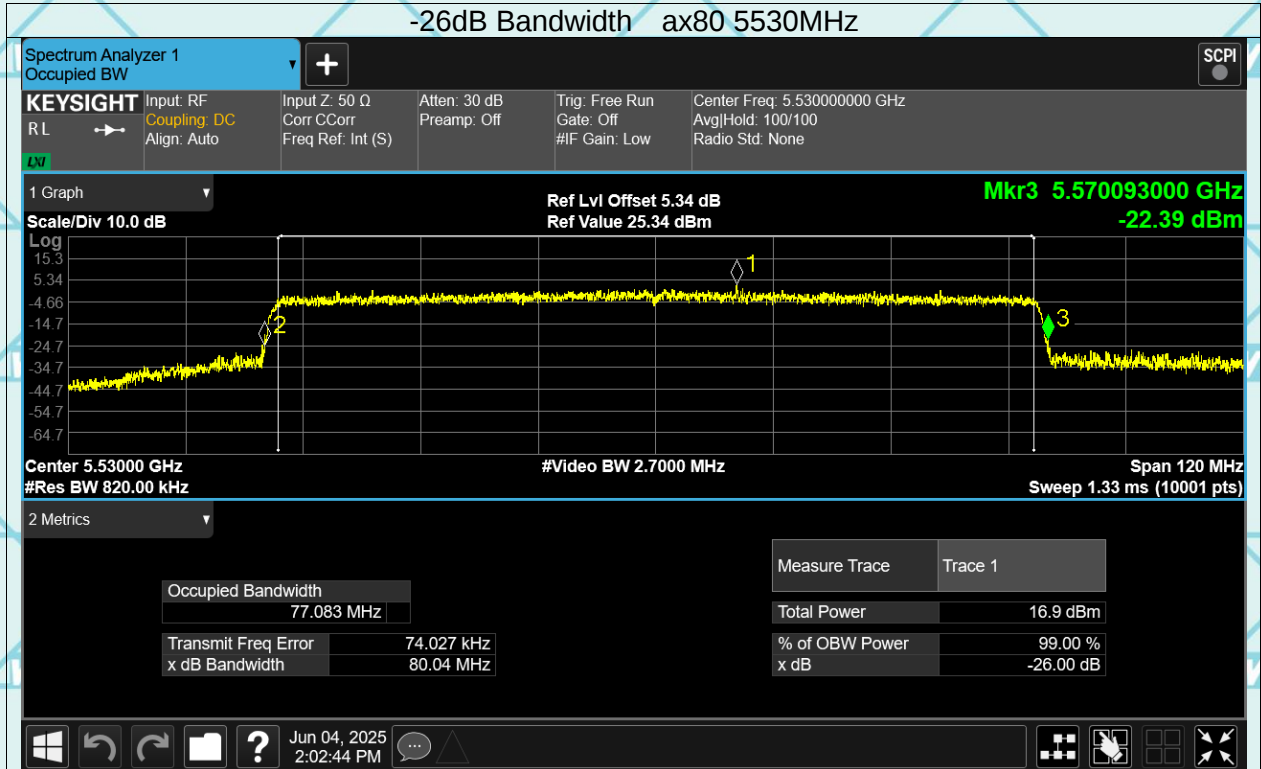




Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi2 Issued Date: 20 June 2025



-6dB&99% Bandwidth

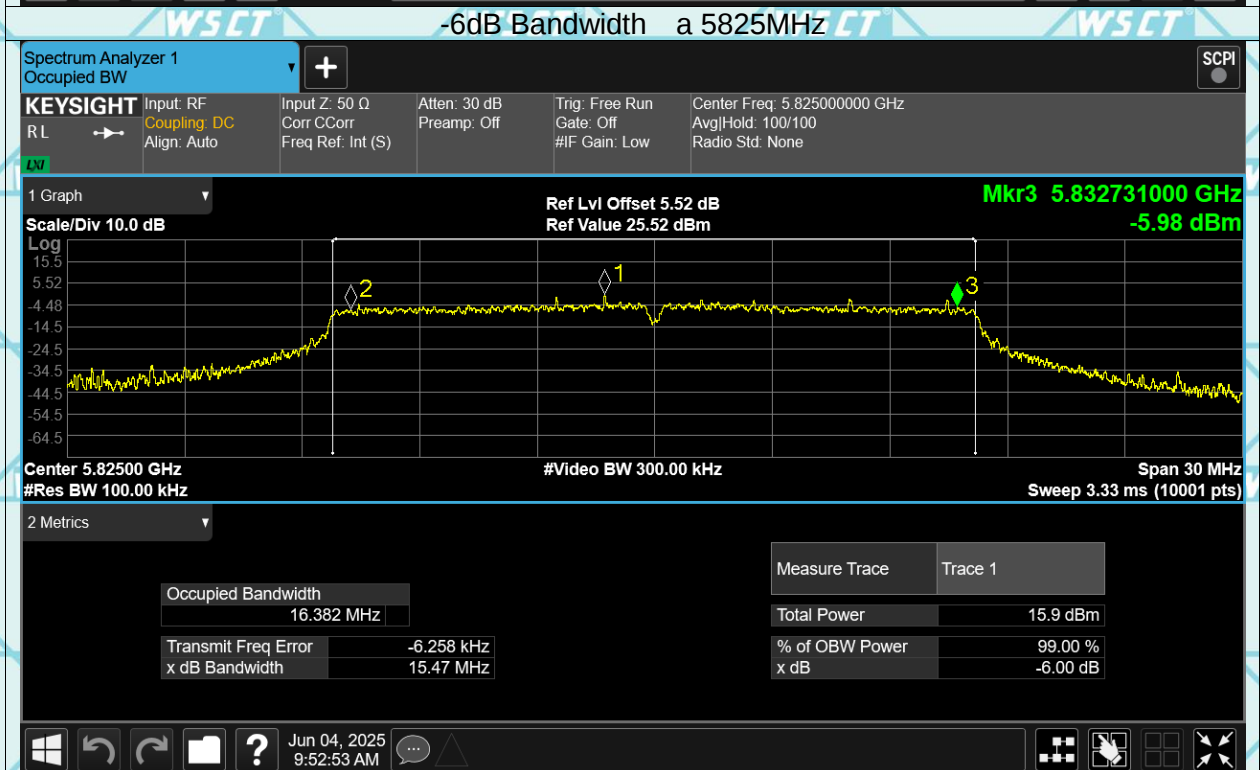
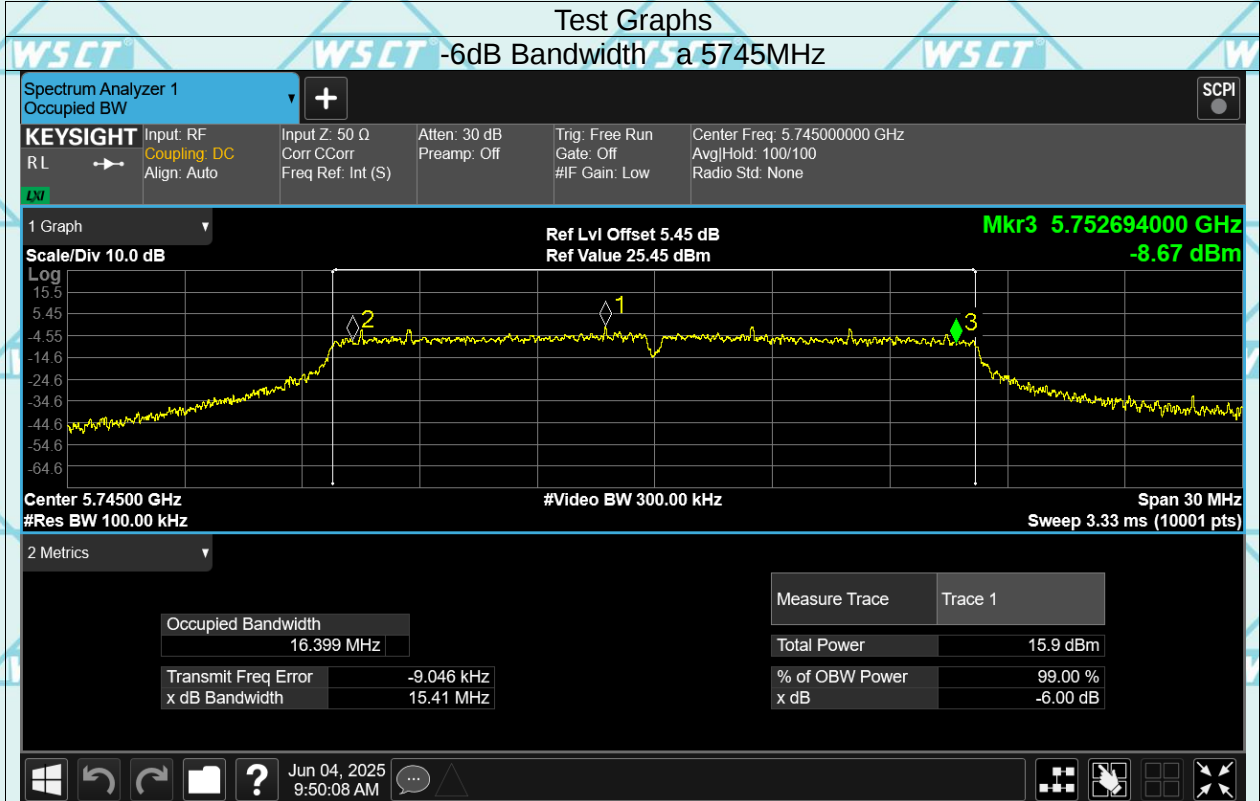


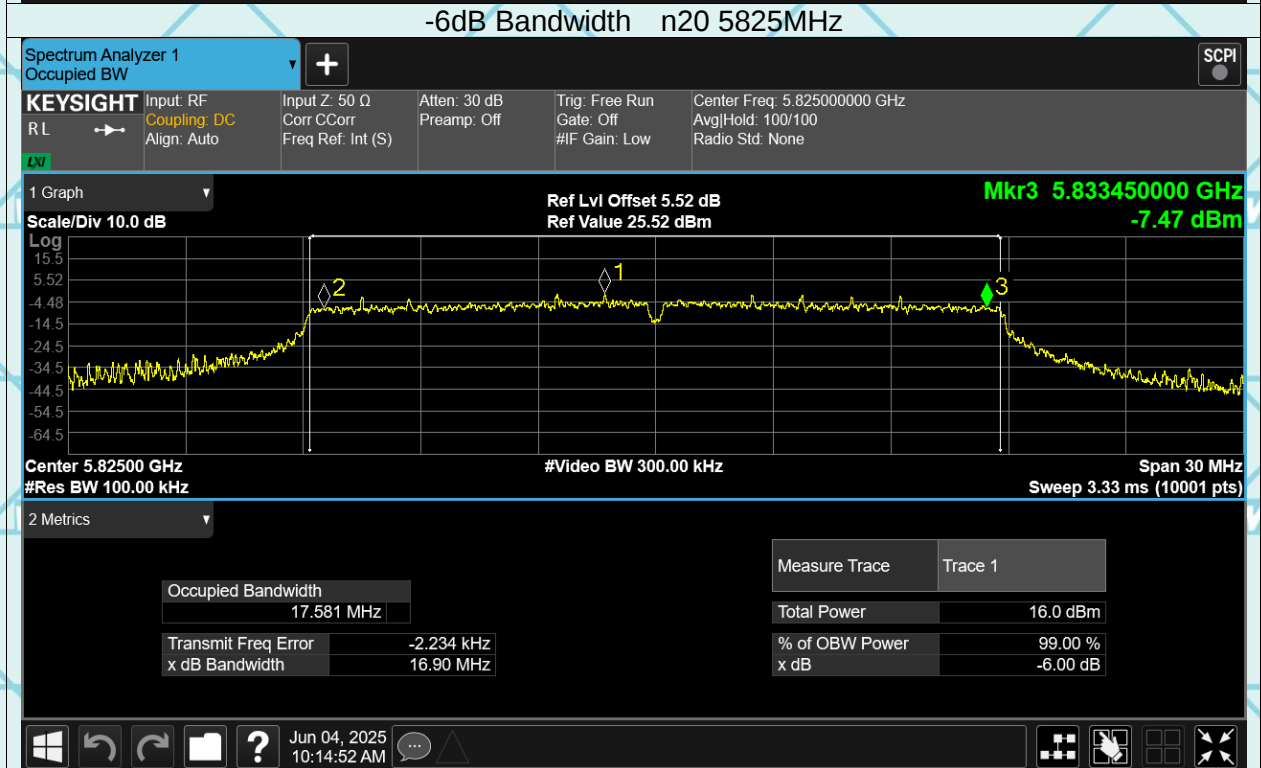
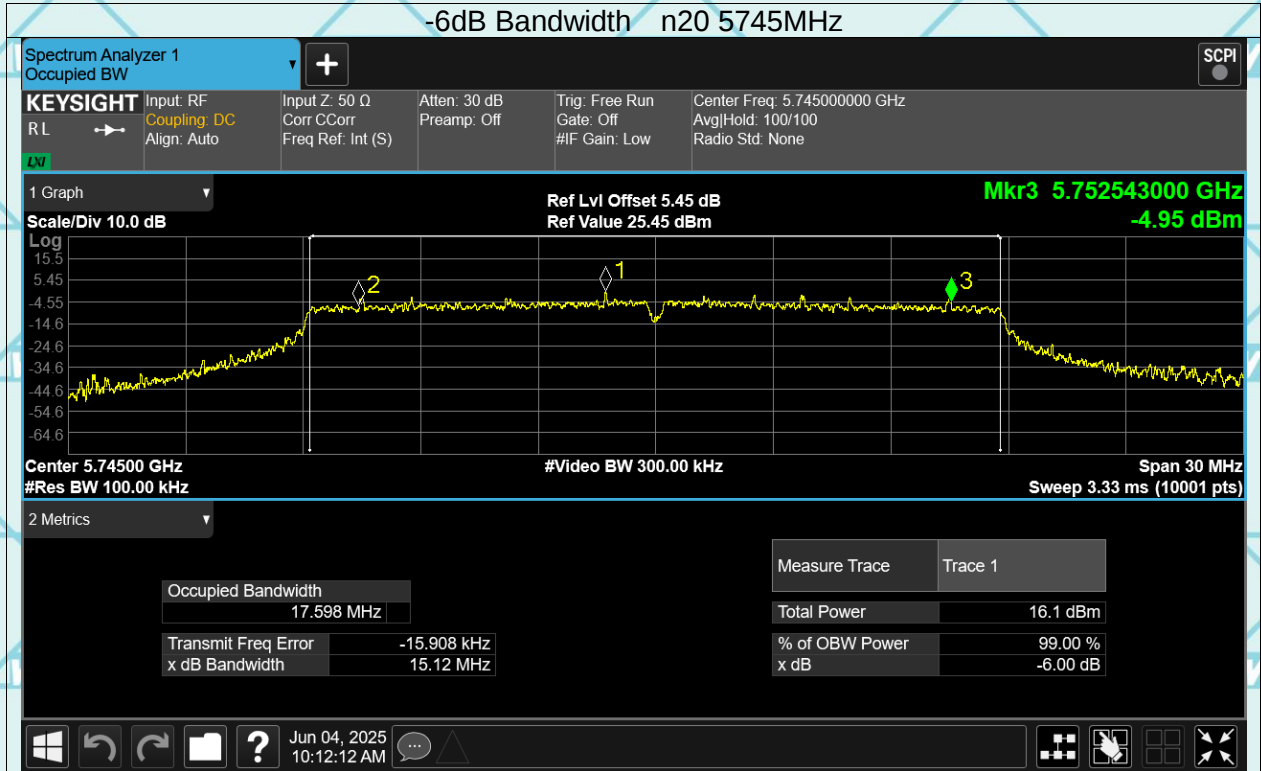


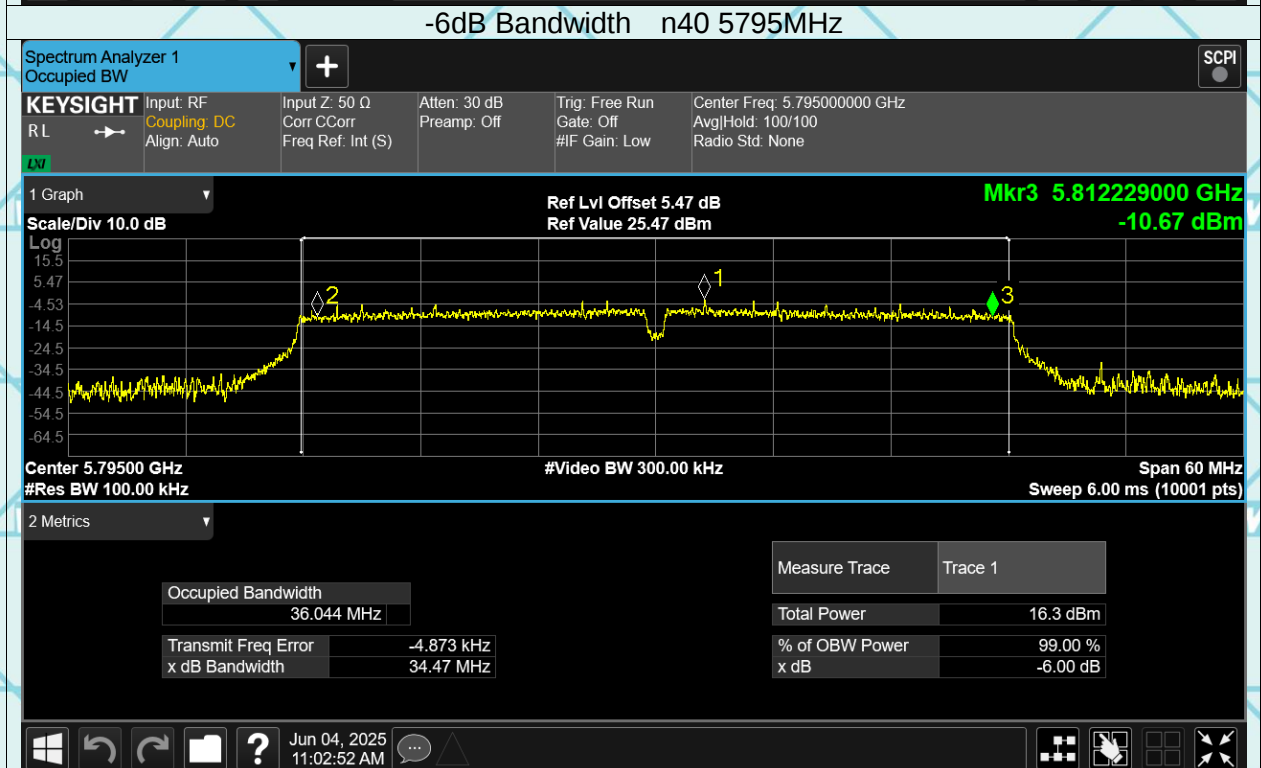
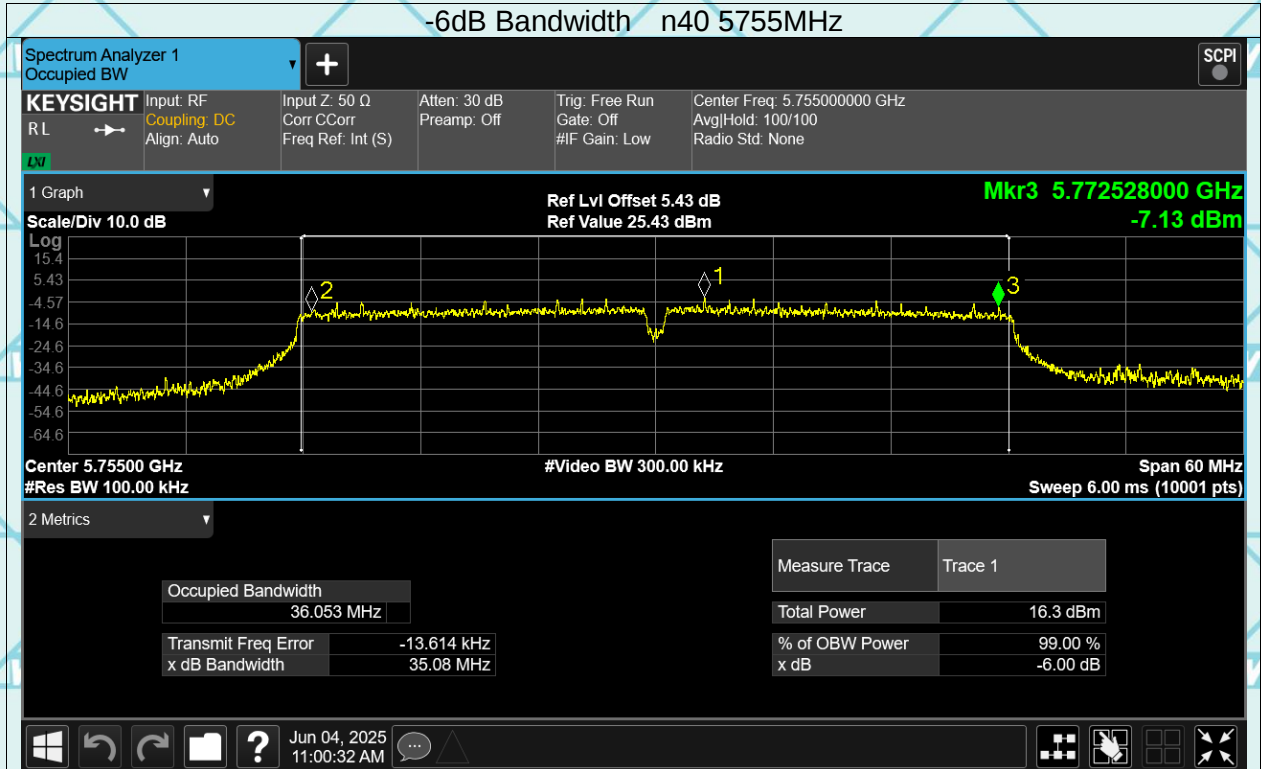


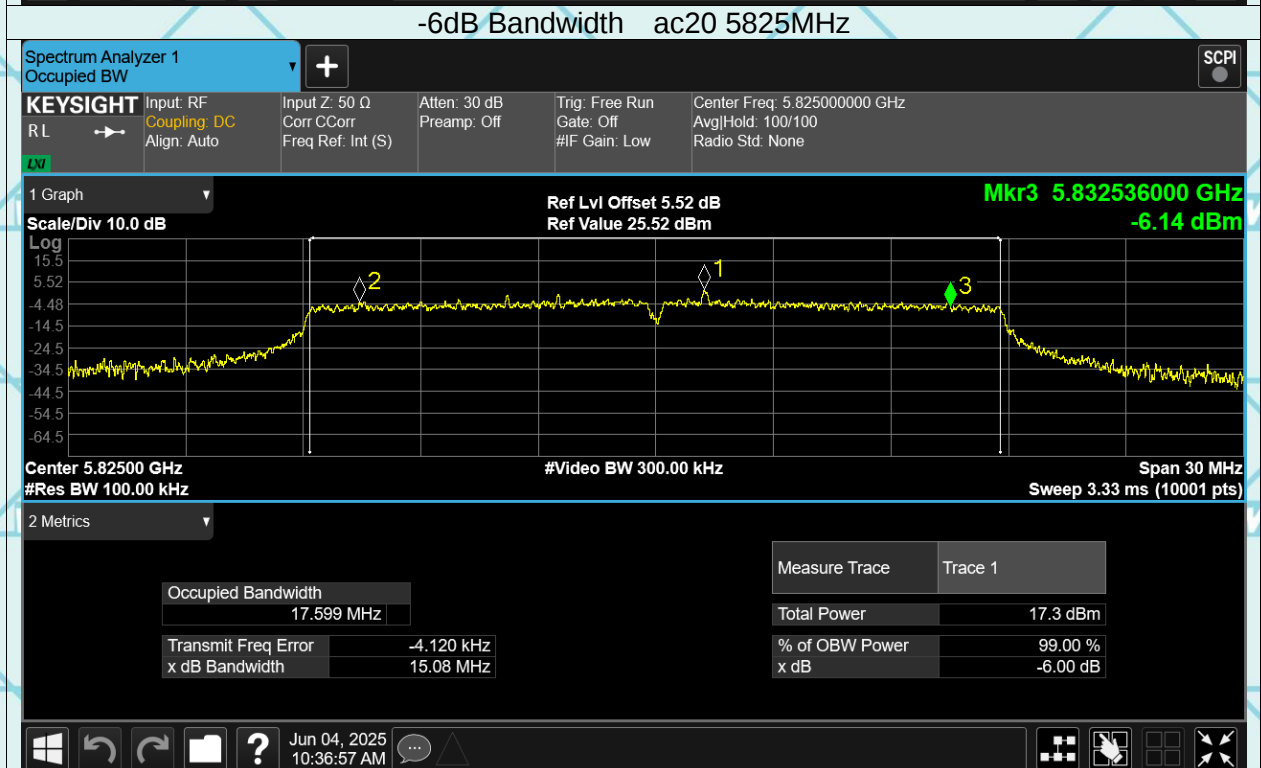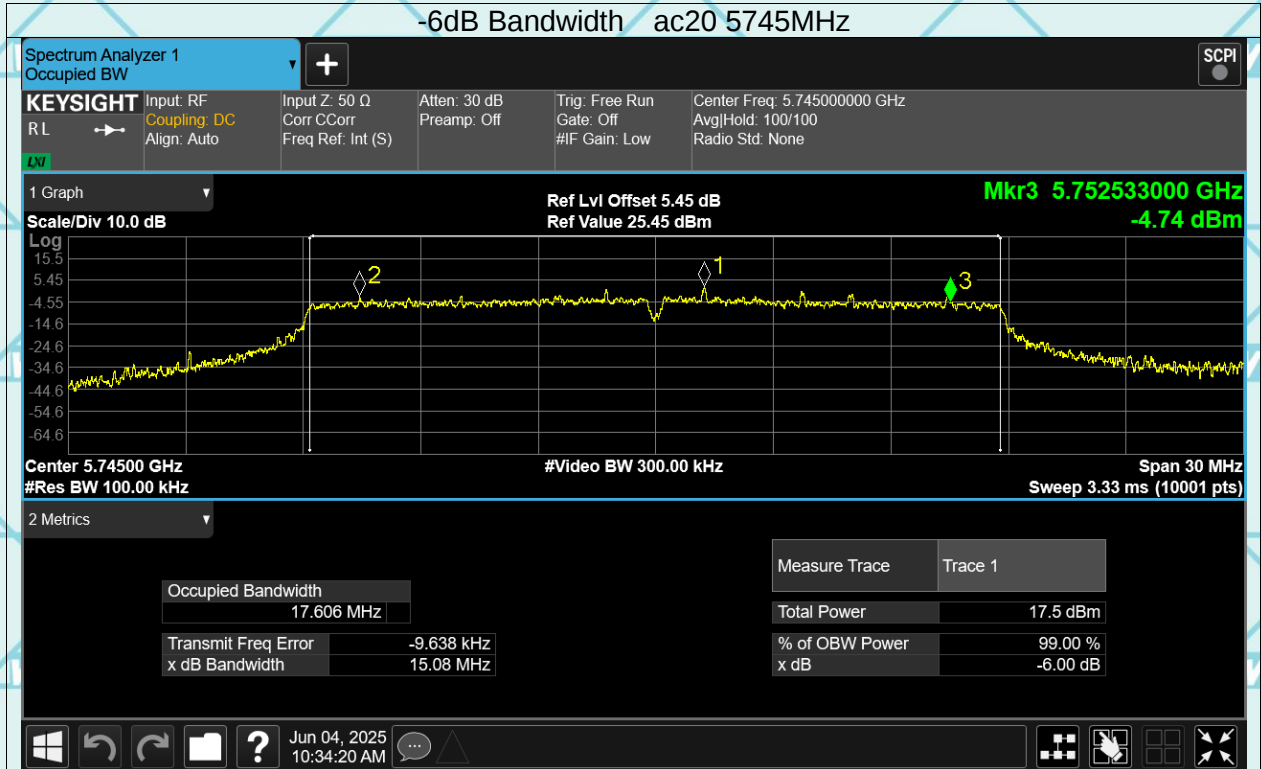

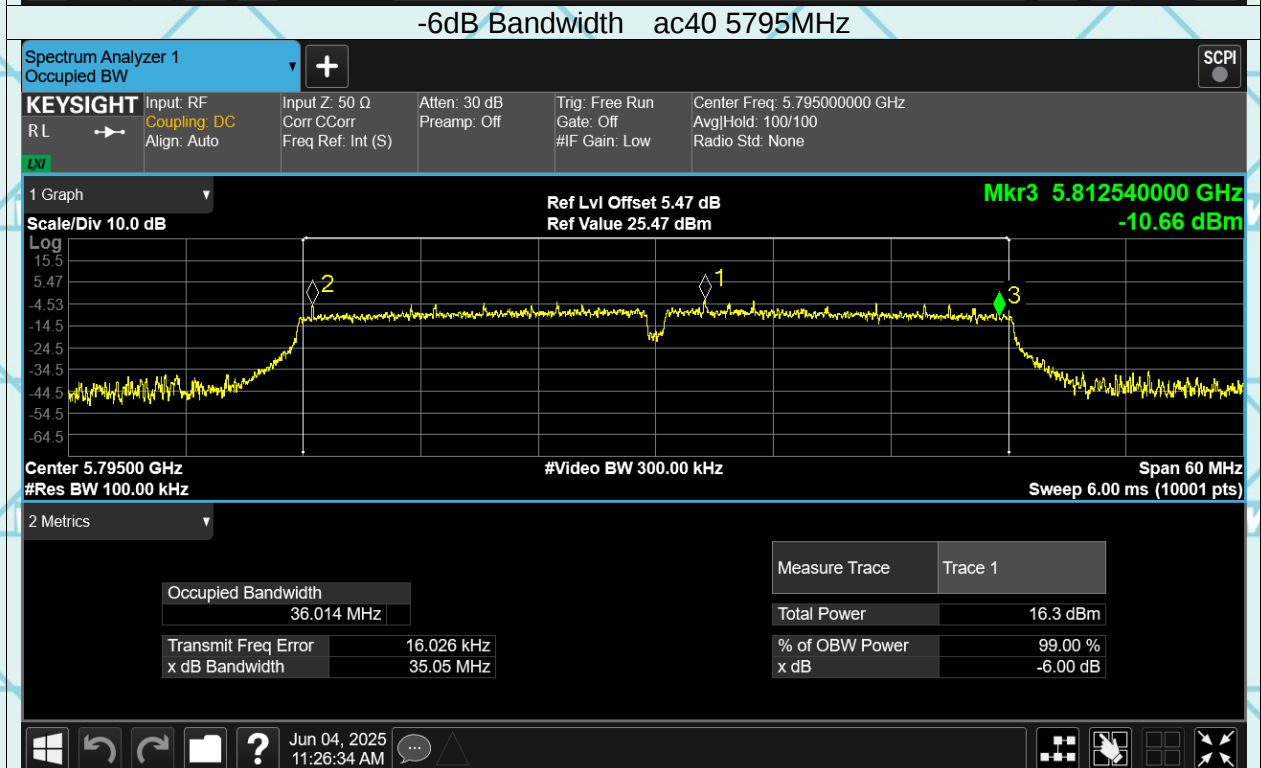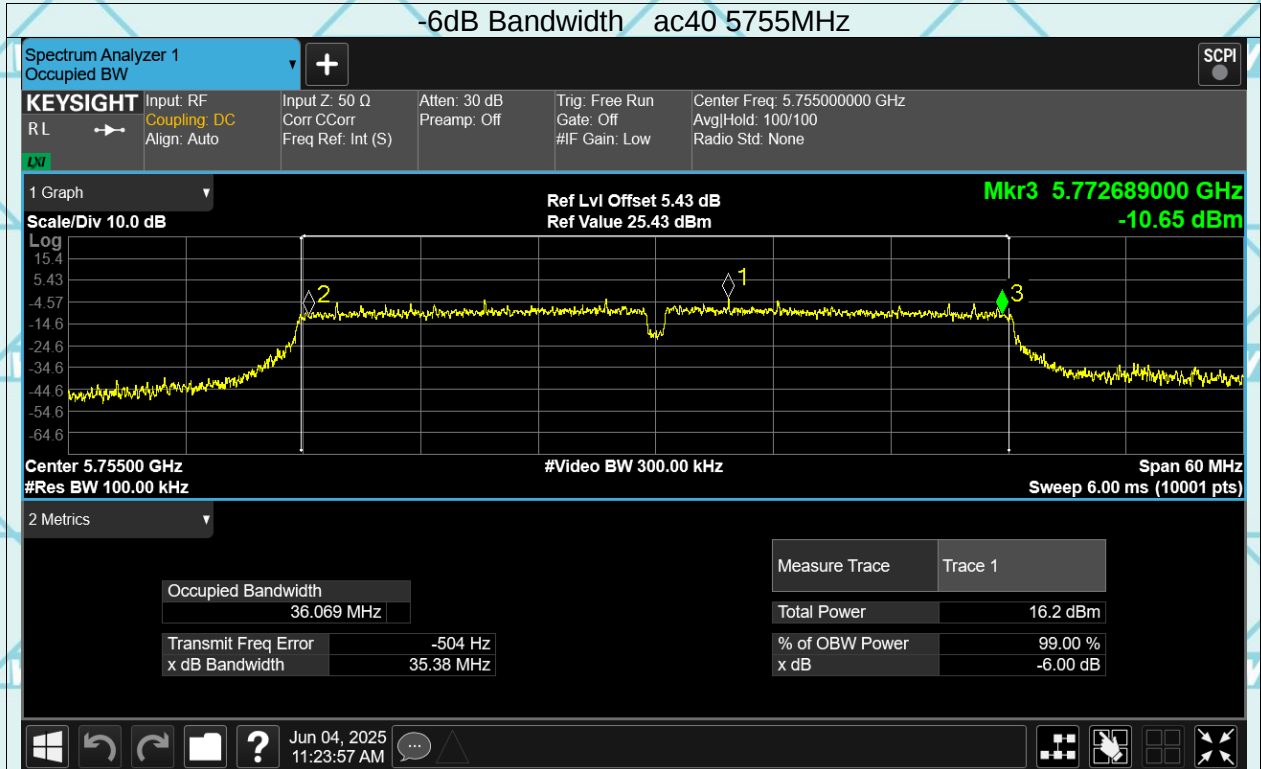

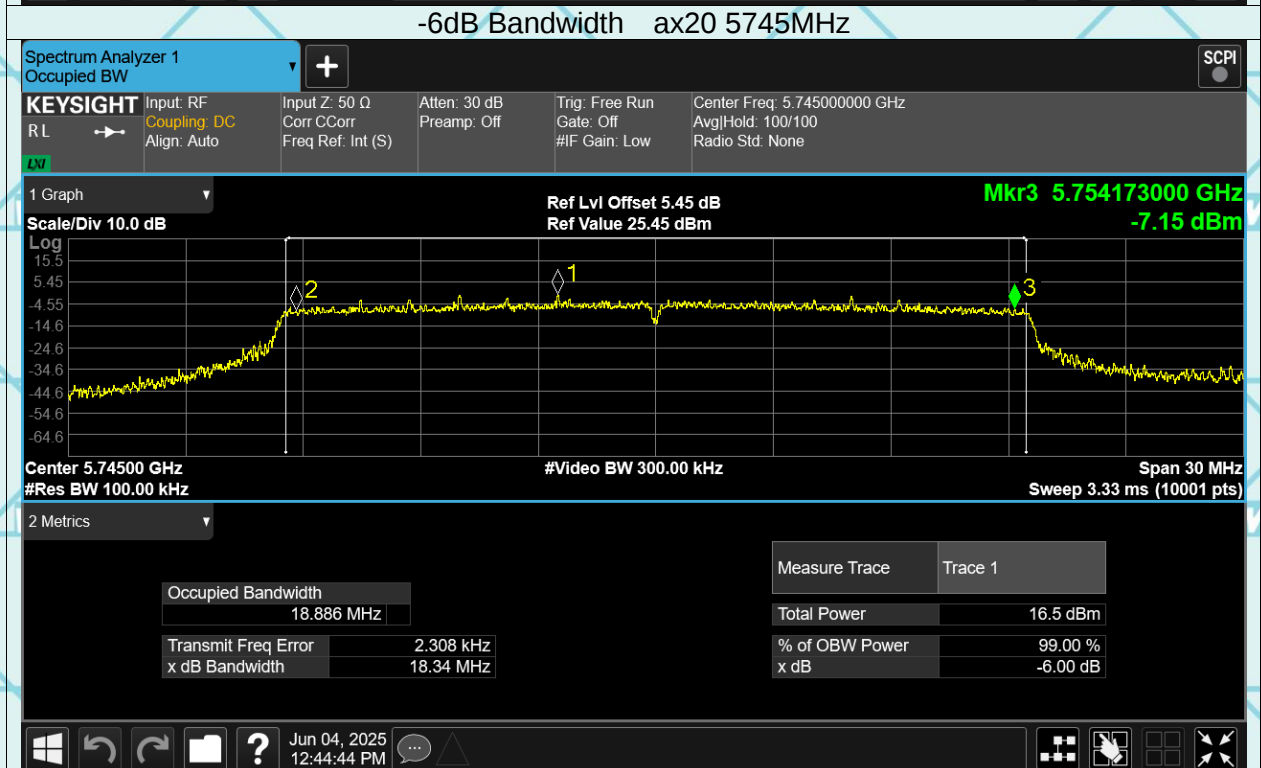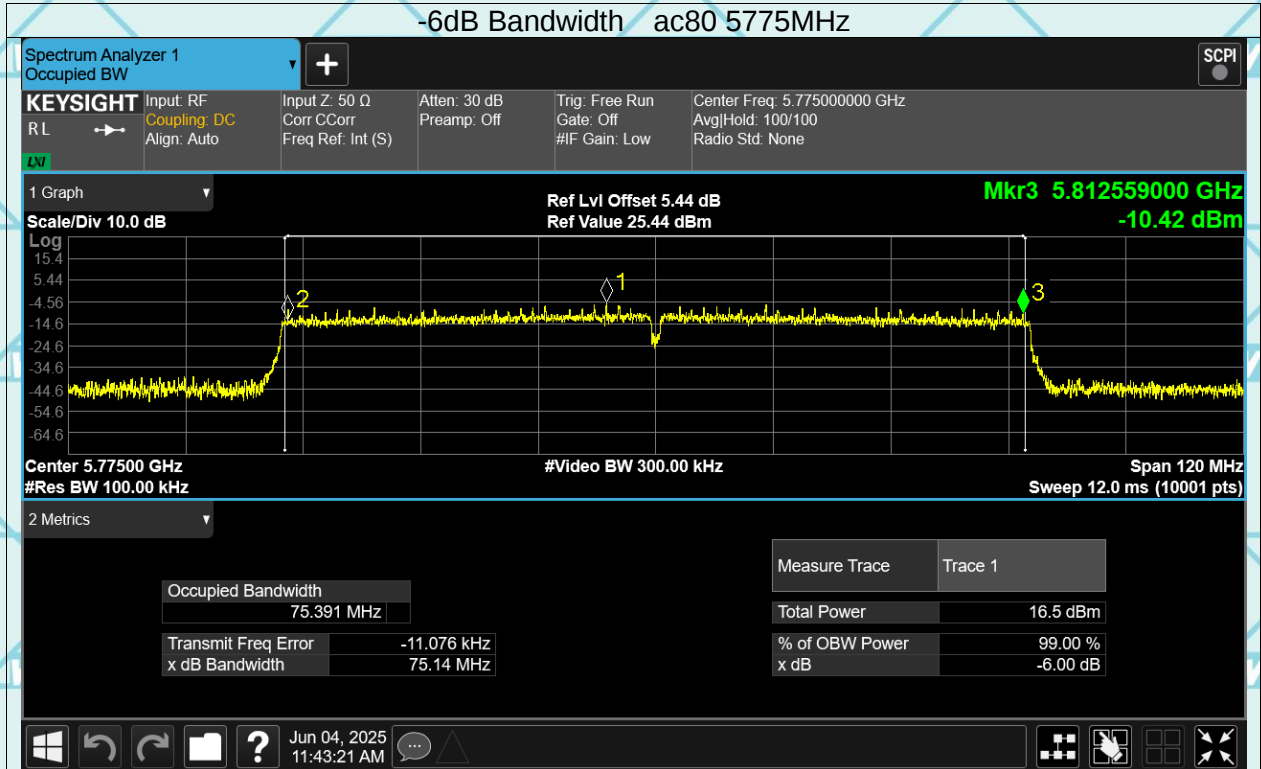

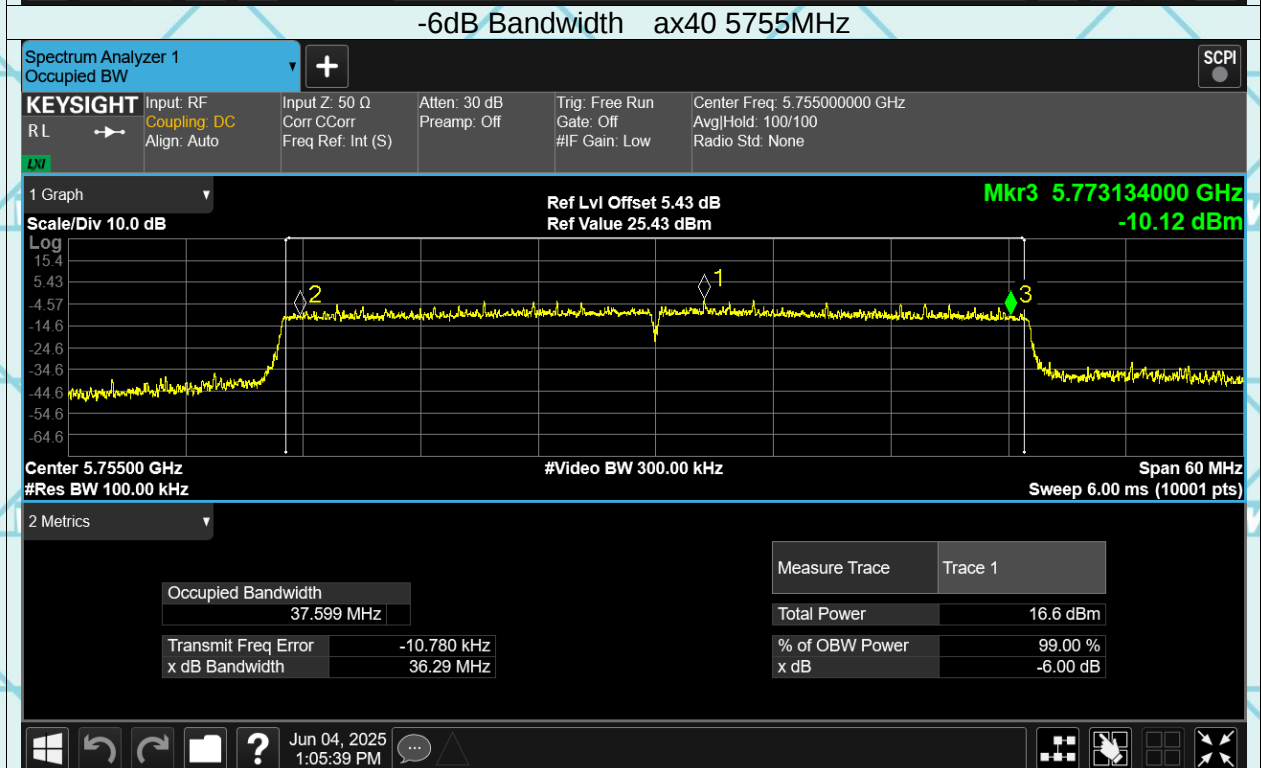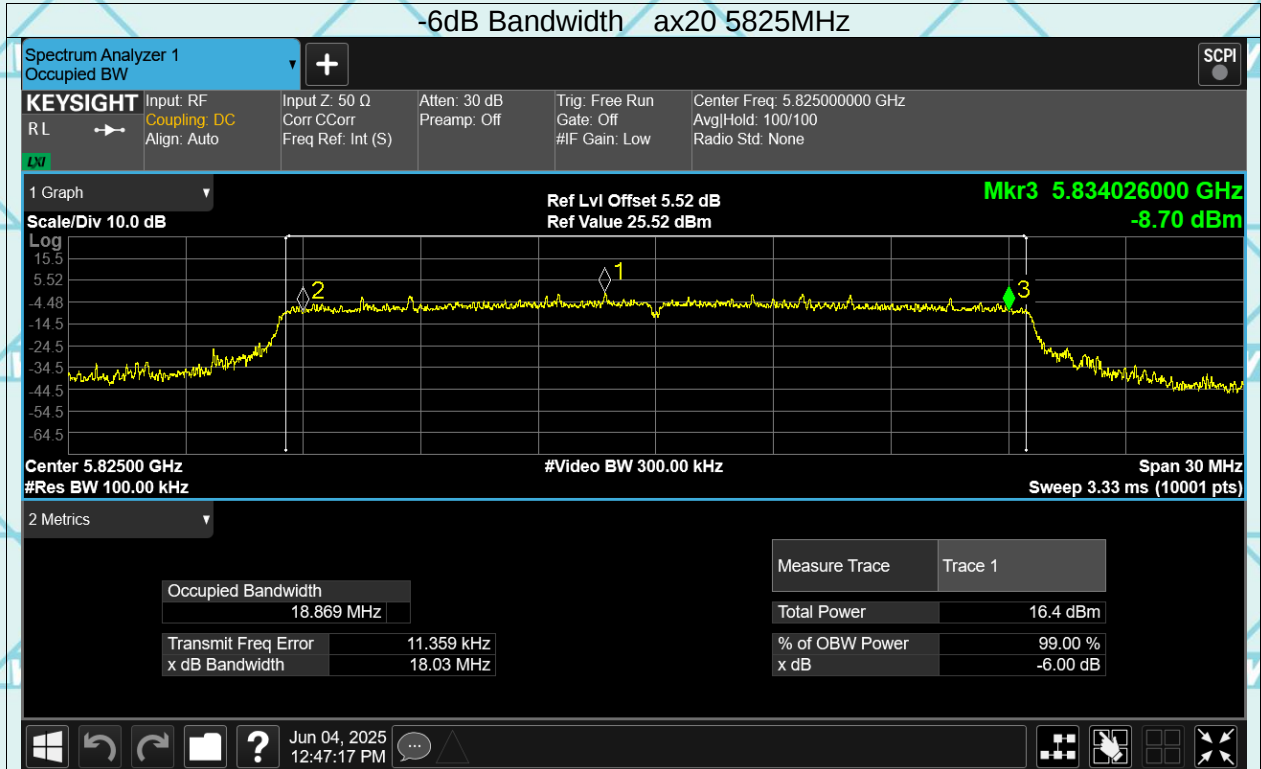

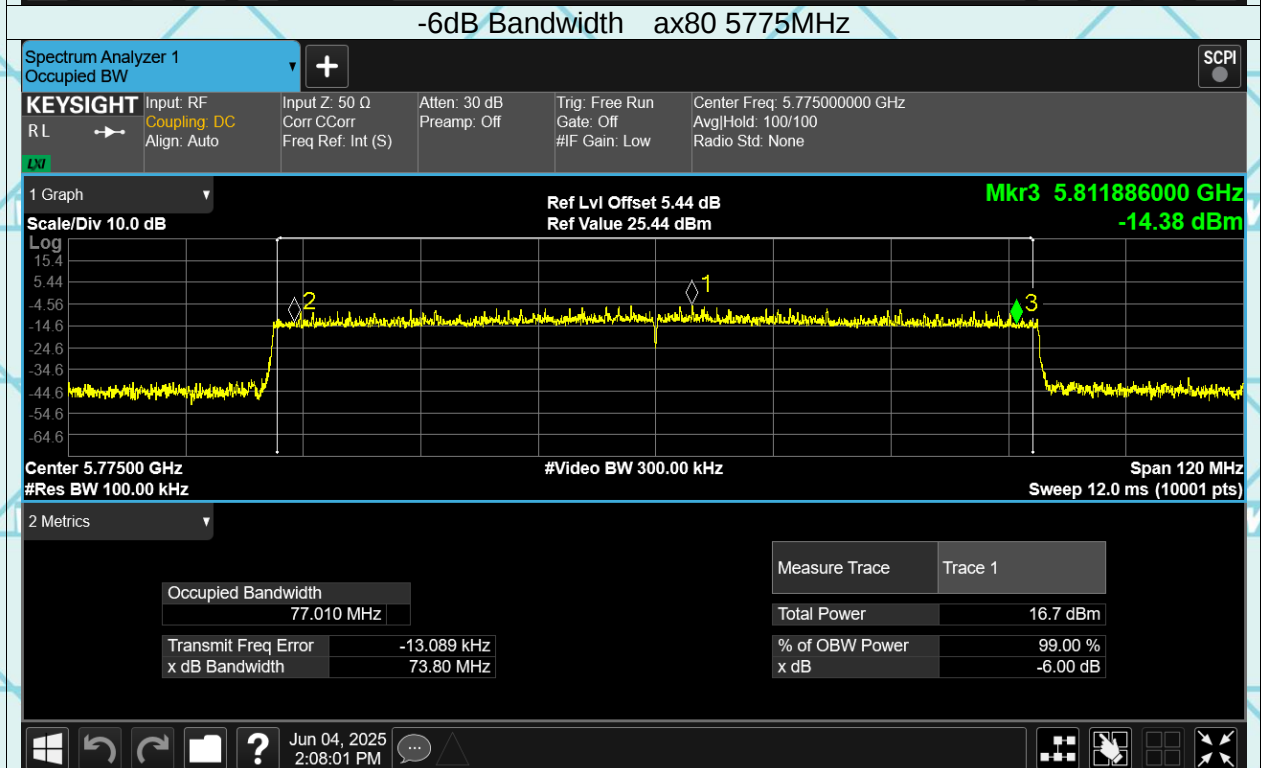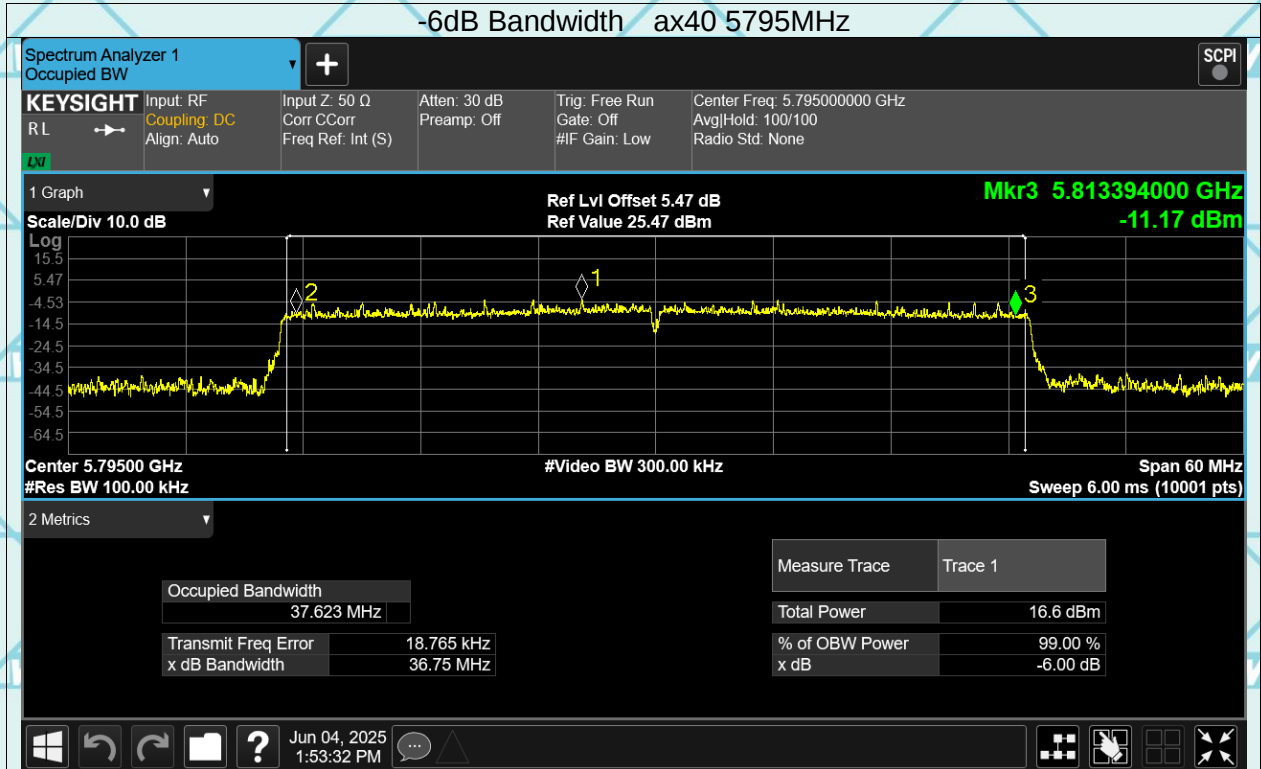

7.6 MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Maximum Conducted Output Power	Temperature	: 25 °C
Test Voltage	: DC 3.91V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	7.6	1.62	9.22	24	Pass
a	5240	8.11	1.62	9.73	24	Pass
a	5260	8.09	1.73	9.82	24	Pass
a	5320	7.5	1.62	9.12	24	Pass
a	5500	9.09	1.61	10.7	24	Pass
a	5700	9.87	1.63	11.5	24	Pass
a	5745	10	1.62	11.62	30	Pass
a	5825	9.93	1.61	11.54	30	Pass
n20	5180	7.38	1.73	9.11	24	Pass
n20	5240	7.71	1.73	9.44	24	Pass
n20	5260	7.79	1.71	9.5	24	Pass
n20	5320	7.38	1.71	9.09	24	Pass
n20	5500	9.15	1.71	10.86	24	Pass
n20	5700	9.76	1.73	11.49	24	Pass
n20	5745	9.61	1.71	11.32	30	Pass
n20	5825	9.65	1.71	11.36	30	Pass
n40	5190	6.93	2.92	9.85	24	Pass
n40	5230	6.92	2.94	9.86	24	Pass
n40	5270	6.79	2.94	9.73	24	Pass
n40	5310	6.61	2.94	9.55	24	Pass
n40	5510	6.53	2.92	9.45	24	Pass
n40	5670	9.11	2.86	11.97	24	Pass
n40	5755	8.58	2.92	11.5	30	Pass
n40	5795	8.24	2.92	11.16	30	Pass
ac20	5180	9.05	1.7	10.75	24	Pass
ac20	5240	9.49	1.72	11.21	24	Pass
ac20	5260	9.3	1.7	11	24	Pass
ac20	5320	8.39	1.7	10.09	24	Pass
ac20	5500	10.37	1.7	12.07	24	Pass
ac20	5700	10.99	1.7	12.69	24	Pass
ac20	5745	11.21	1.7	12.91	30	Pass
ac20	5825	11.21	1.7	12.91	30	Pass
ac40	5190	6.5	13.4	19.9	24	Pass
ac40	5230	6.98	3.52	10.5	24	Pass
ac40	5270	7.26	3.70	10.96	24	Pass
ac40	5310	6.95	3.71	10.66	24	Pass
ac40	5510	8.04	2.92	10.96	24	Pass
ac40	5670	8.43	2.92	11.35	24	Pass
ac40	5755	9.13	2.92	12.05	30	Pass
ac40	5795	8.97	2.8	11.77	30	Pass
ac80	5210	5.31	4.65	9.96	24	Pass
ac80	5290	4.66	4.66	9.32	24	Pass
ac80	5530	6.43	3.94	10.37	24	Pass
ac80	5610	6.66	3.08	9.74	24	Pass
ac80	5775	6.92	3.05	9.97	30	Pass
ax20	5180	6.2	2.04	8.24	24	Pass
ax20	5240	7.33	2.09	9.42	24	Pass
ax20	5260	7.35	2.09	9.44	24	Pass
ax20	5320	7.06	2.09	9.15	24	Pass
ax20	5500	8.65	2.09	10.74	24	Pass
ax20	5700	9.1	2.09	11.19	24	Pass
ax20	5745	8.66	2.09	10.75	30	Pass
ax20	5825	9.58	2.09	11.67	30	Pass
ax40	5190	6.13	3.36	9.49	24	Pass
ax40	5230	6.8	3.36	10.16	24	Pass

Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi2

Issued Date: 20 June 2025

ax40	5270	6.47	3.36	9.83	24	Pass
ax40	5310	6.28	3.36	9.64	24	Pass
ax40	5510	7.88	3.36	11.24	24	Pass
ax40	5670	8.3	3.39	11.69	24	Pass
ax40	5755	9.29	3.36	12.65	30	Pass
ax40	5795	8.23	3.36	11.59	30	Pass
ax80	5210	4.9	4.97	9.87	24	Pass
ax80	5290	4.97	5.04	10.01	24	Pass
ax80	5530	6.23	5.01	11.24	24	Pass
ax80	5610	6.23	5.01	11.24	24	Pass
ax80	5775	6.48	5.05	11.53	30	Pass

