




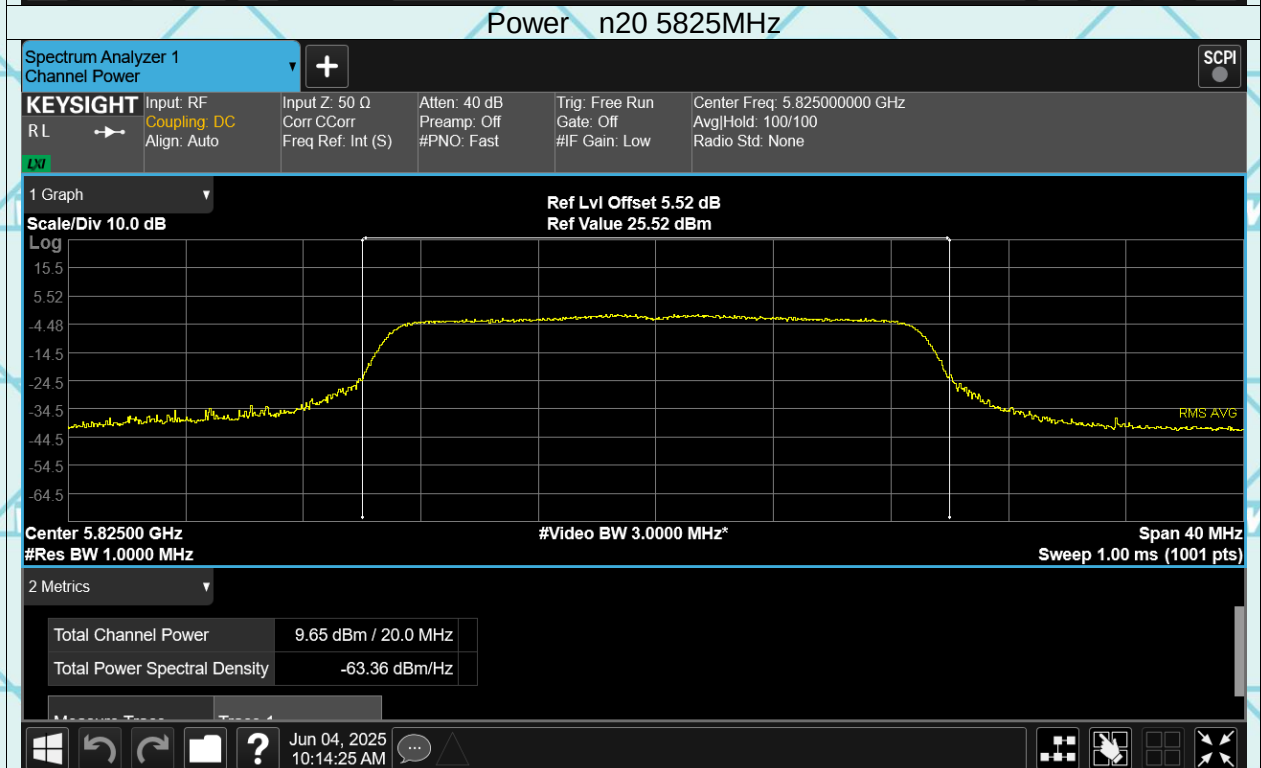
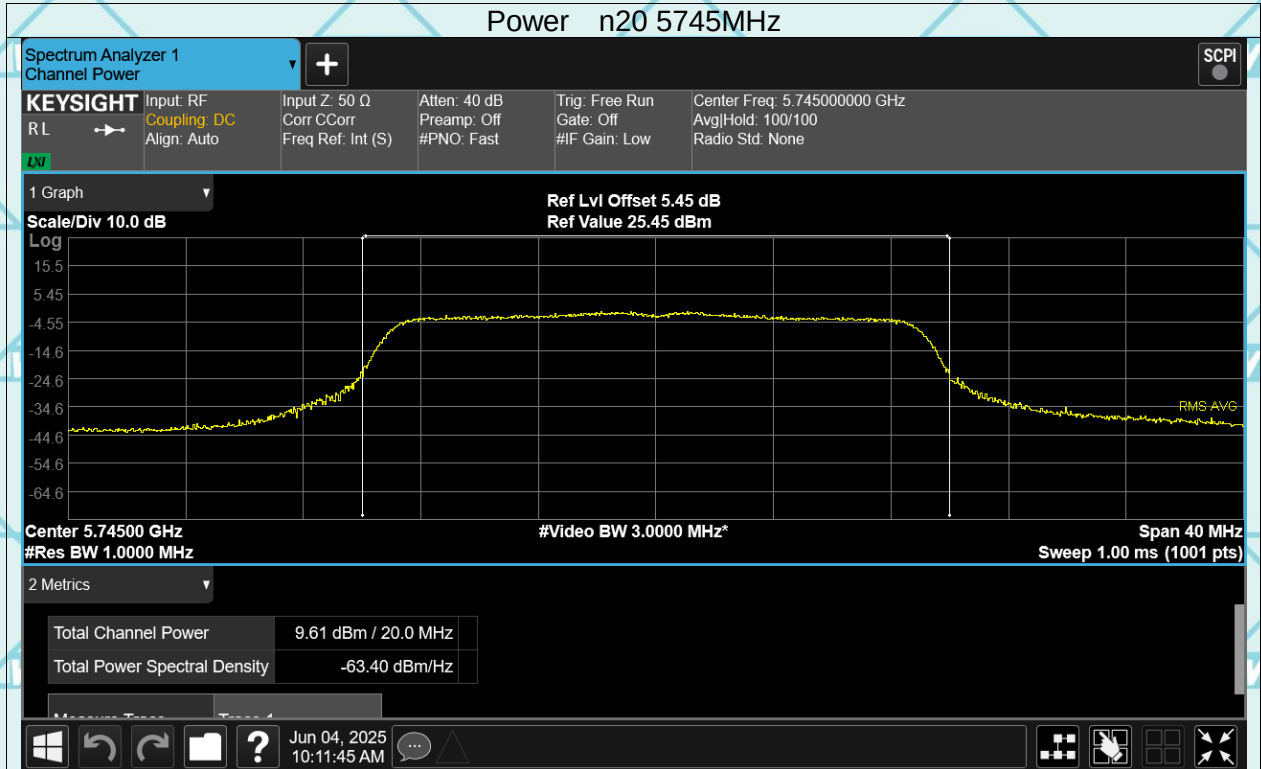
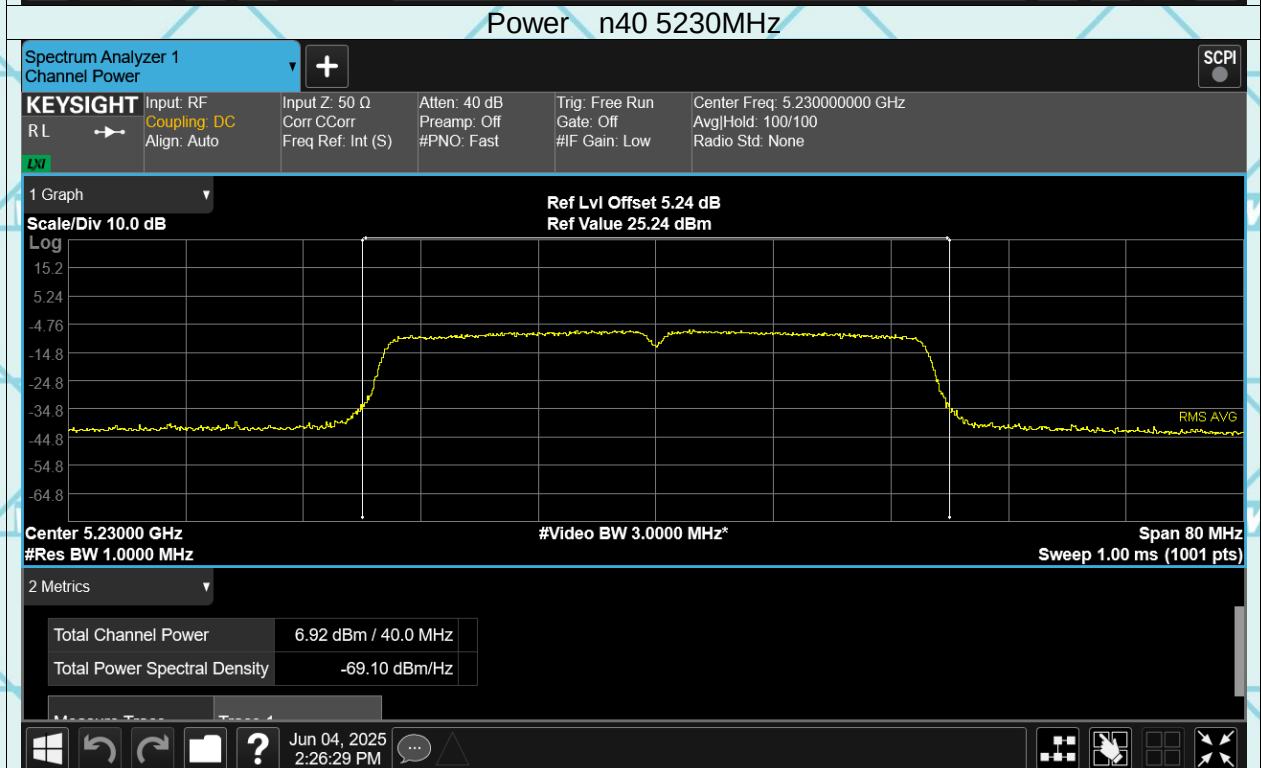
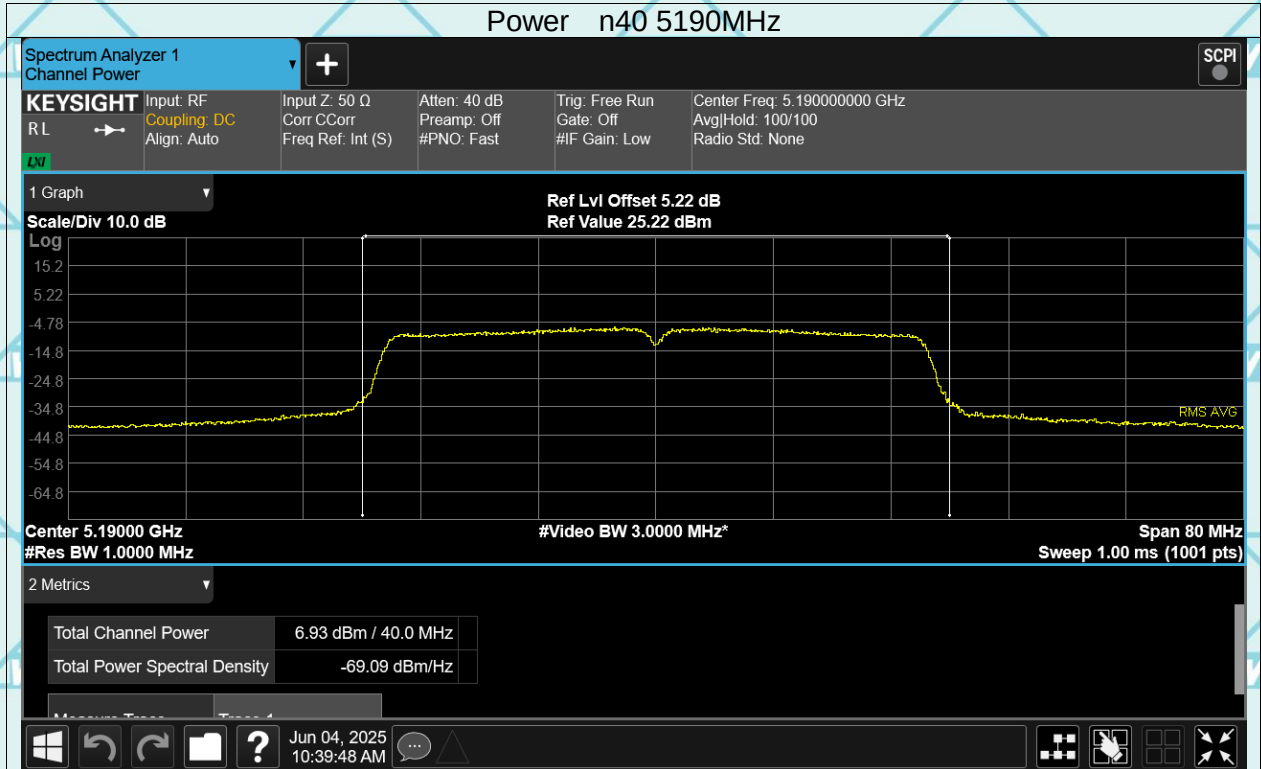
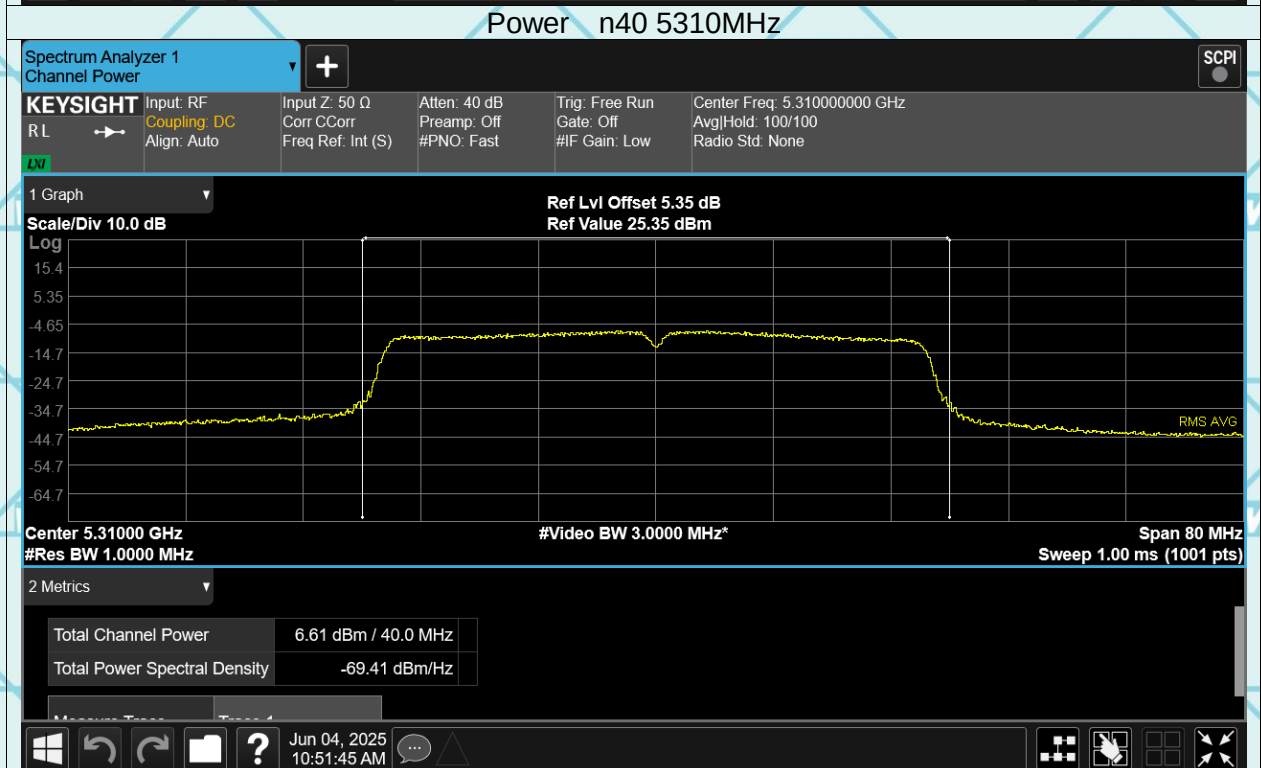



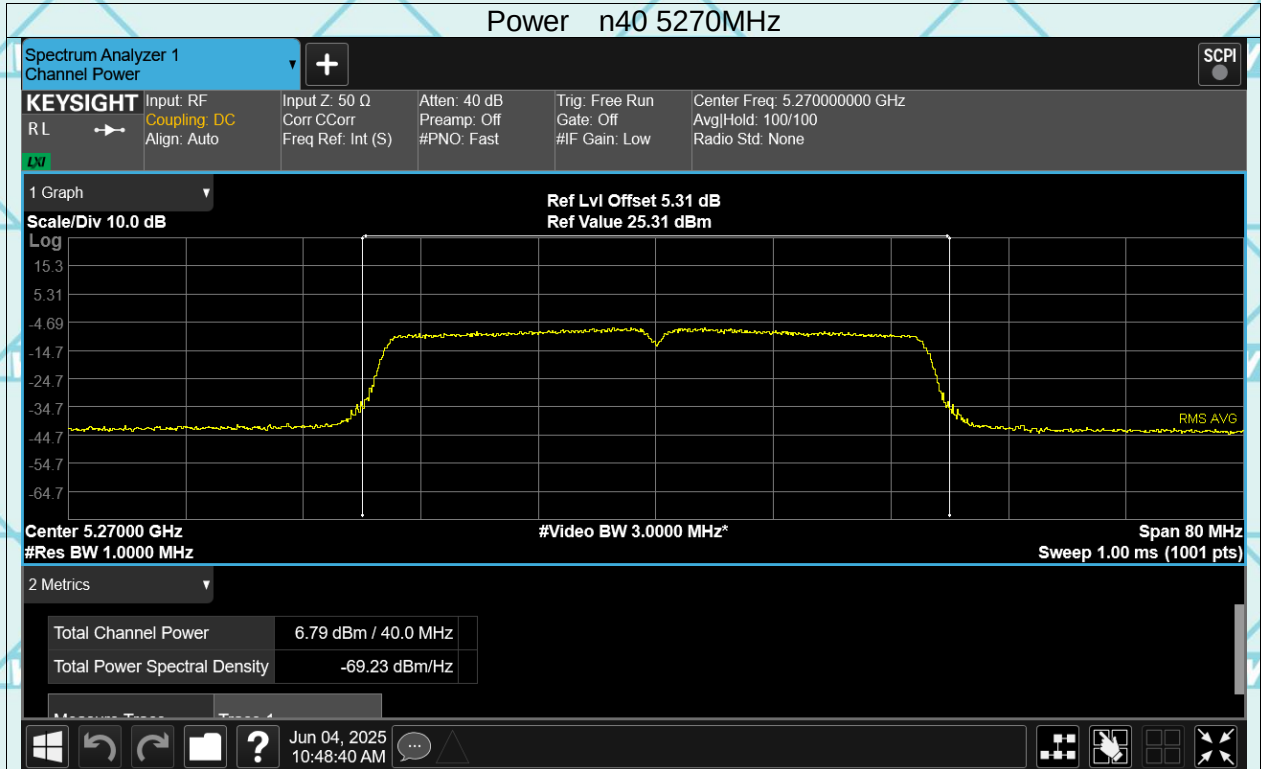



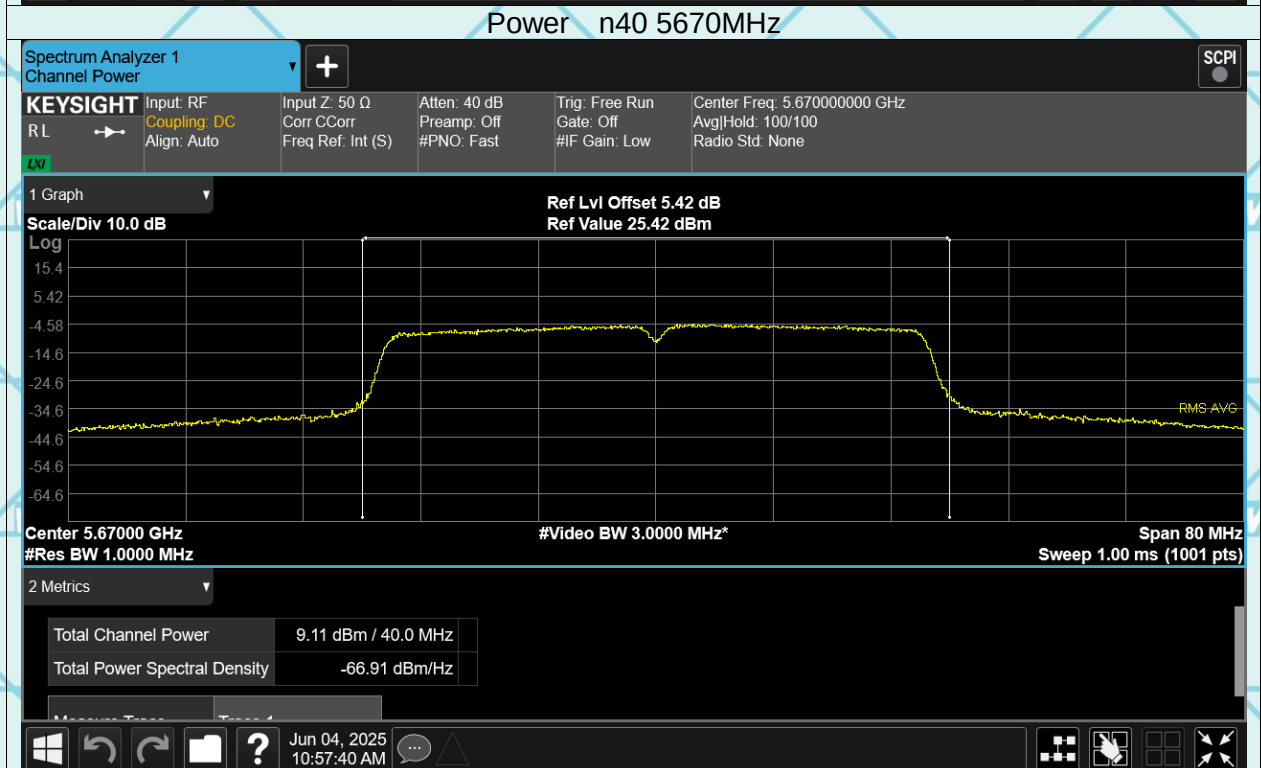



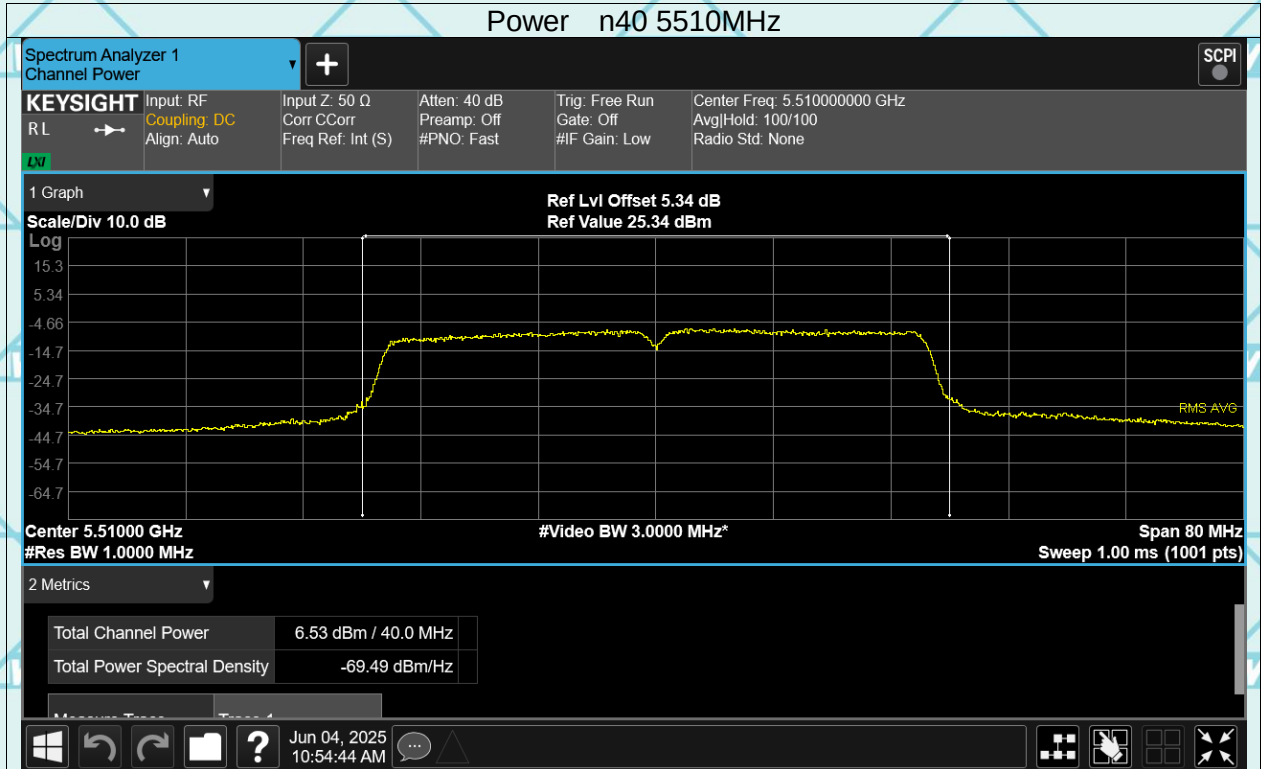



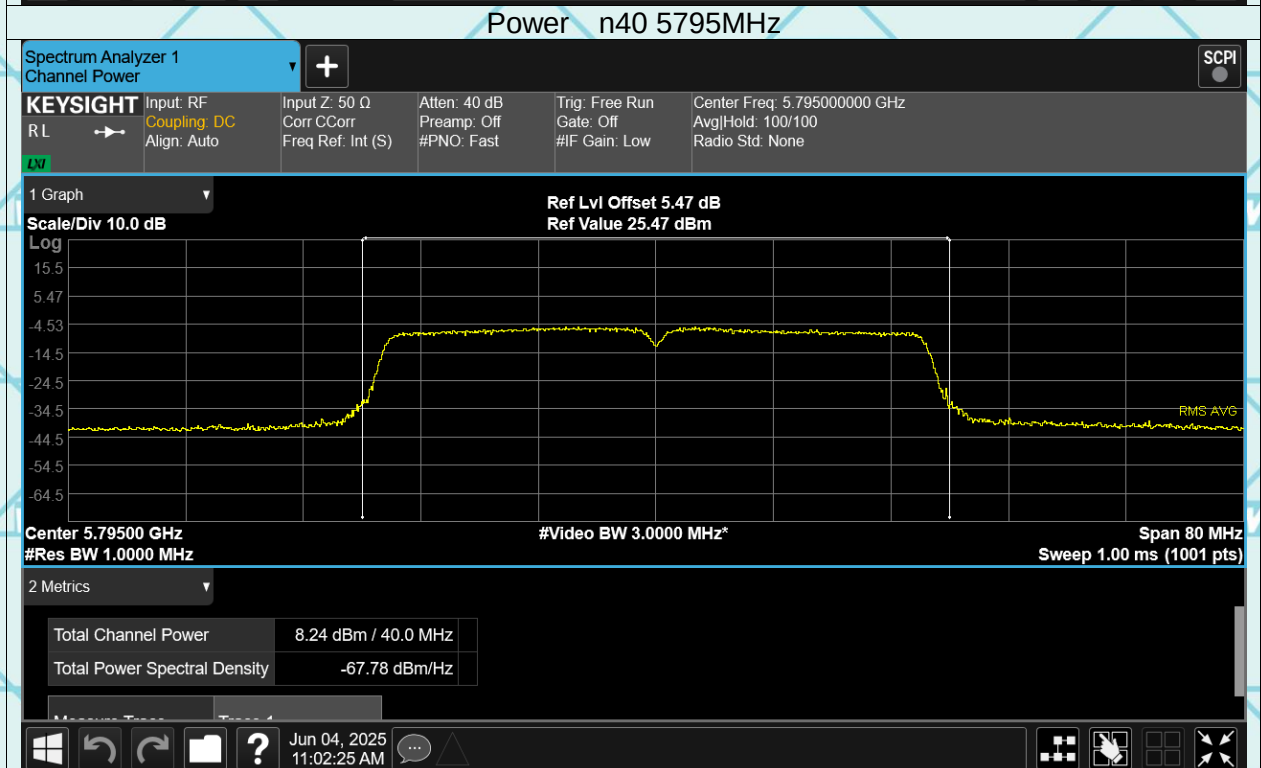



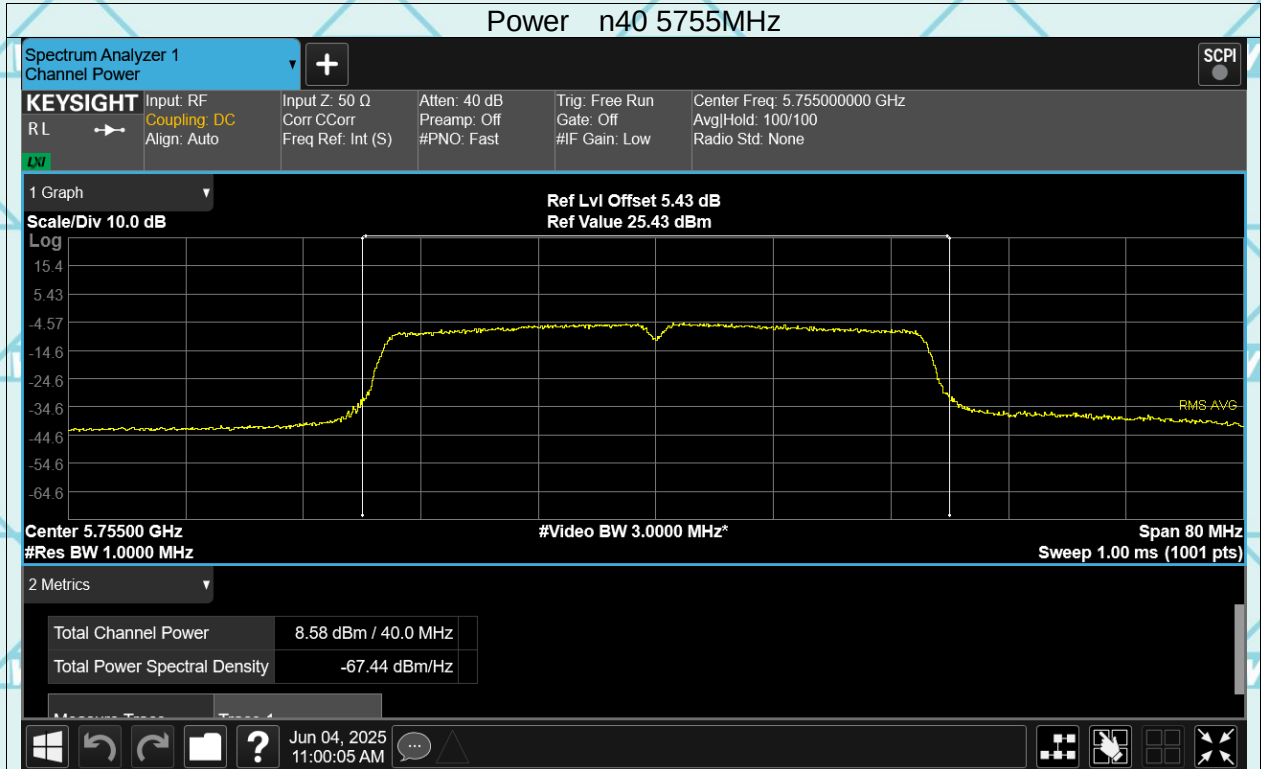


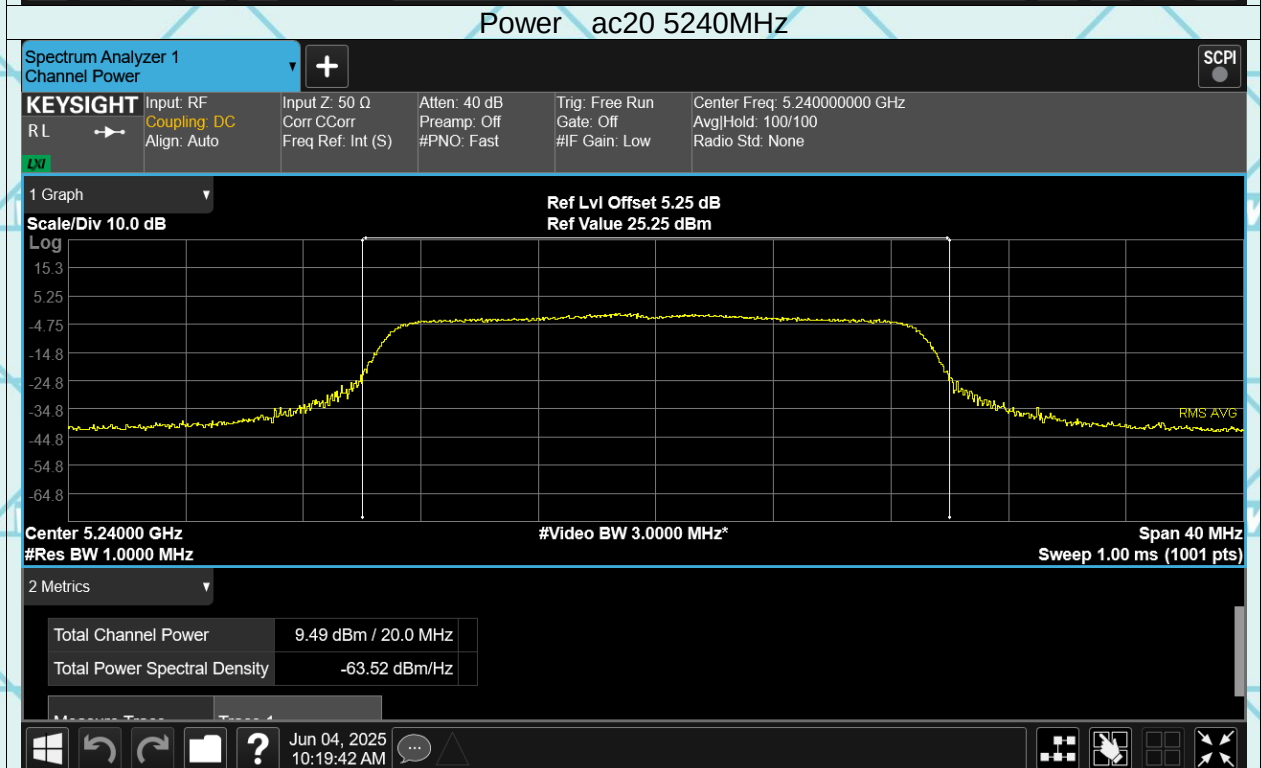
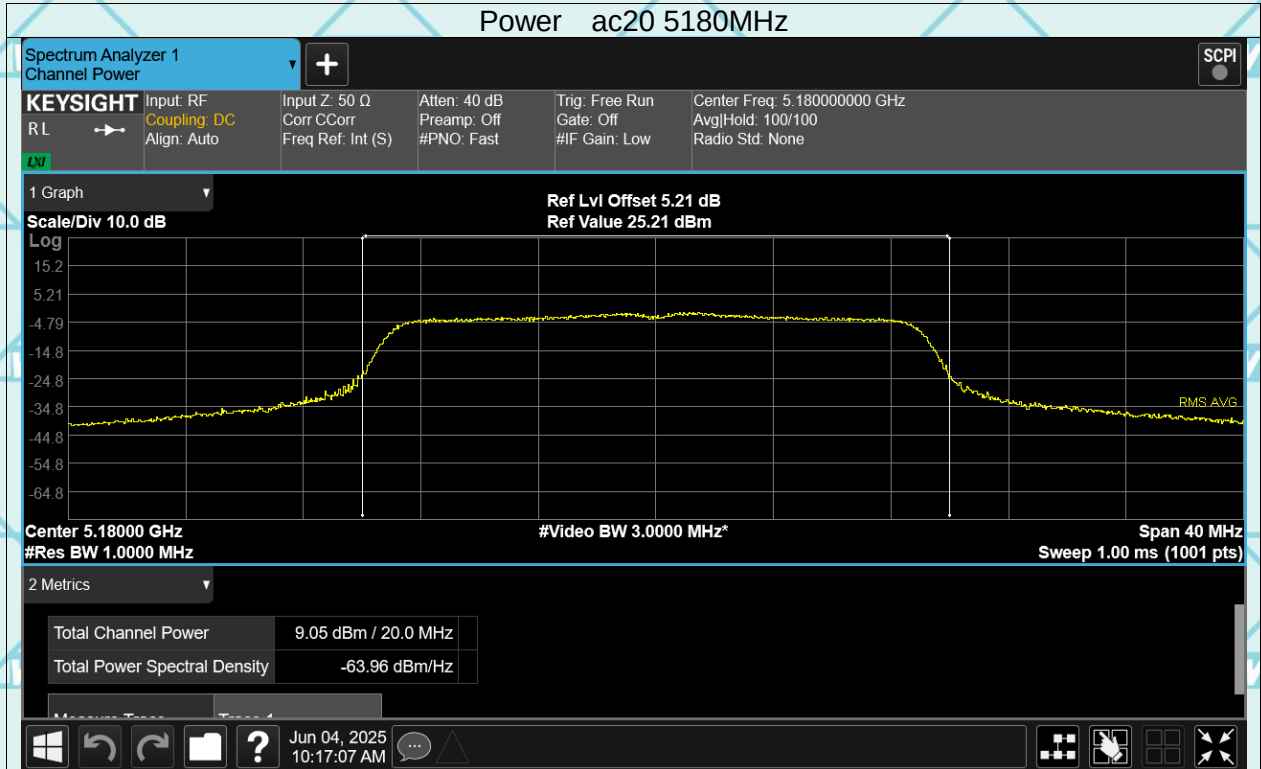


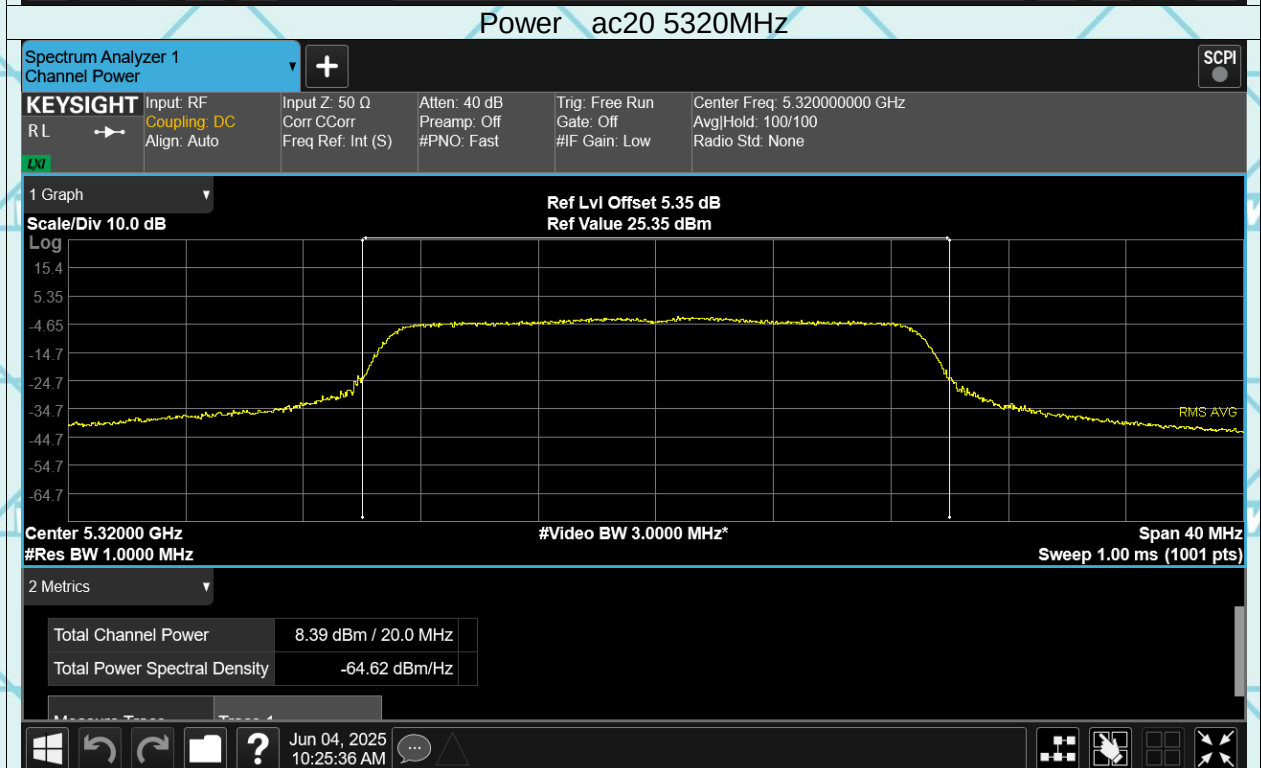
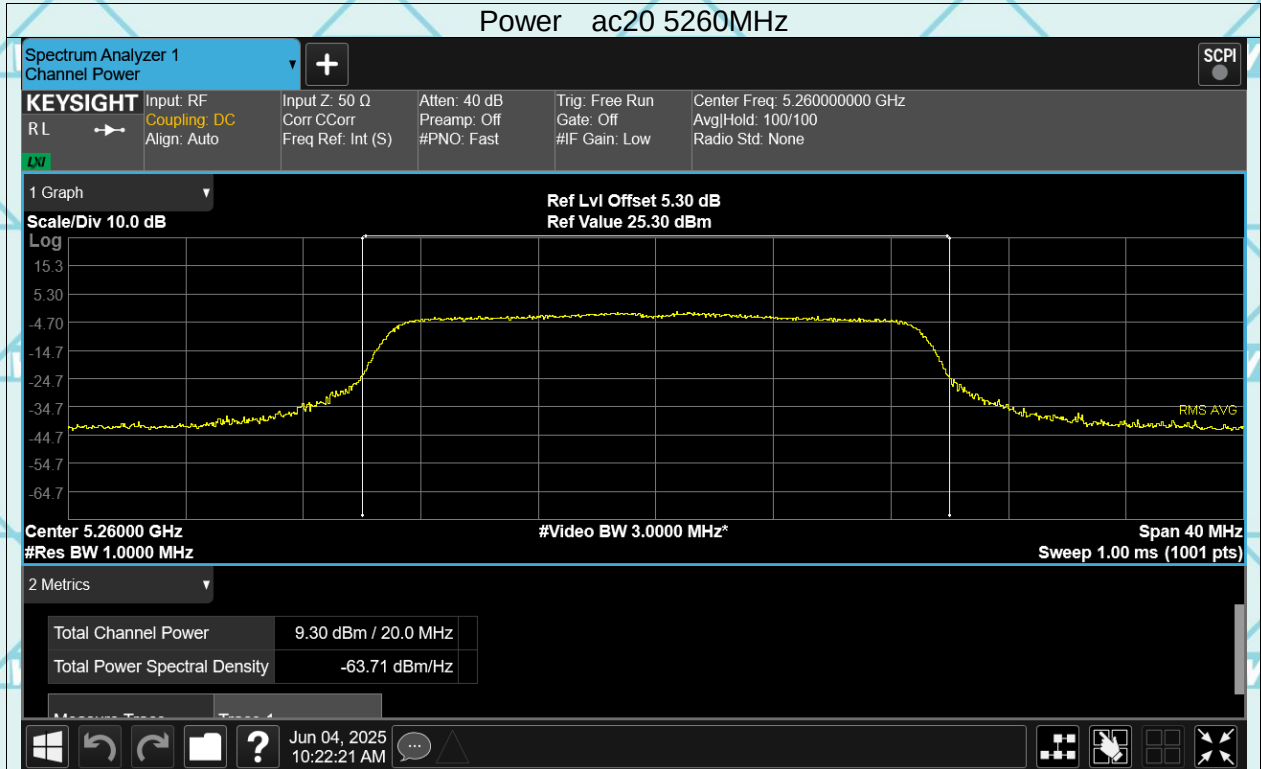


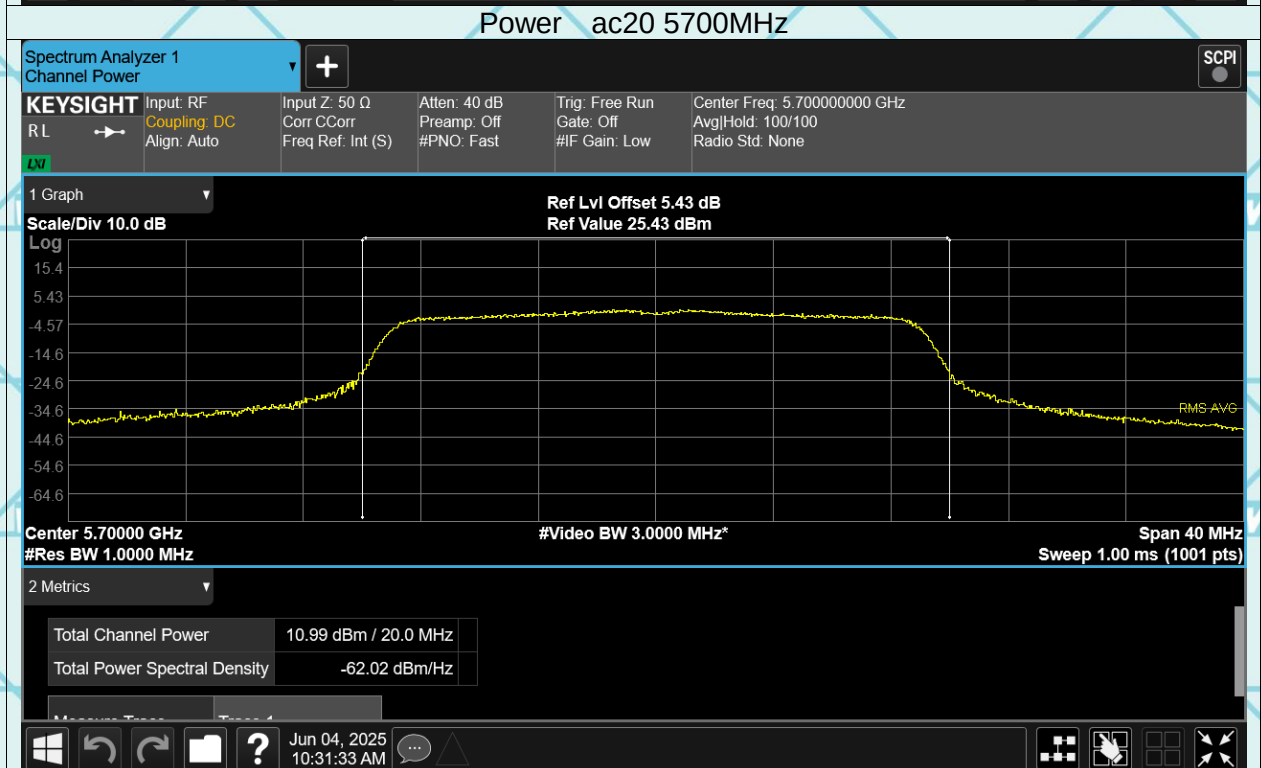
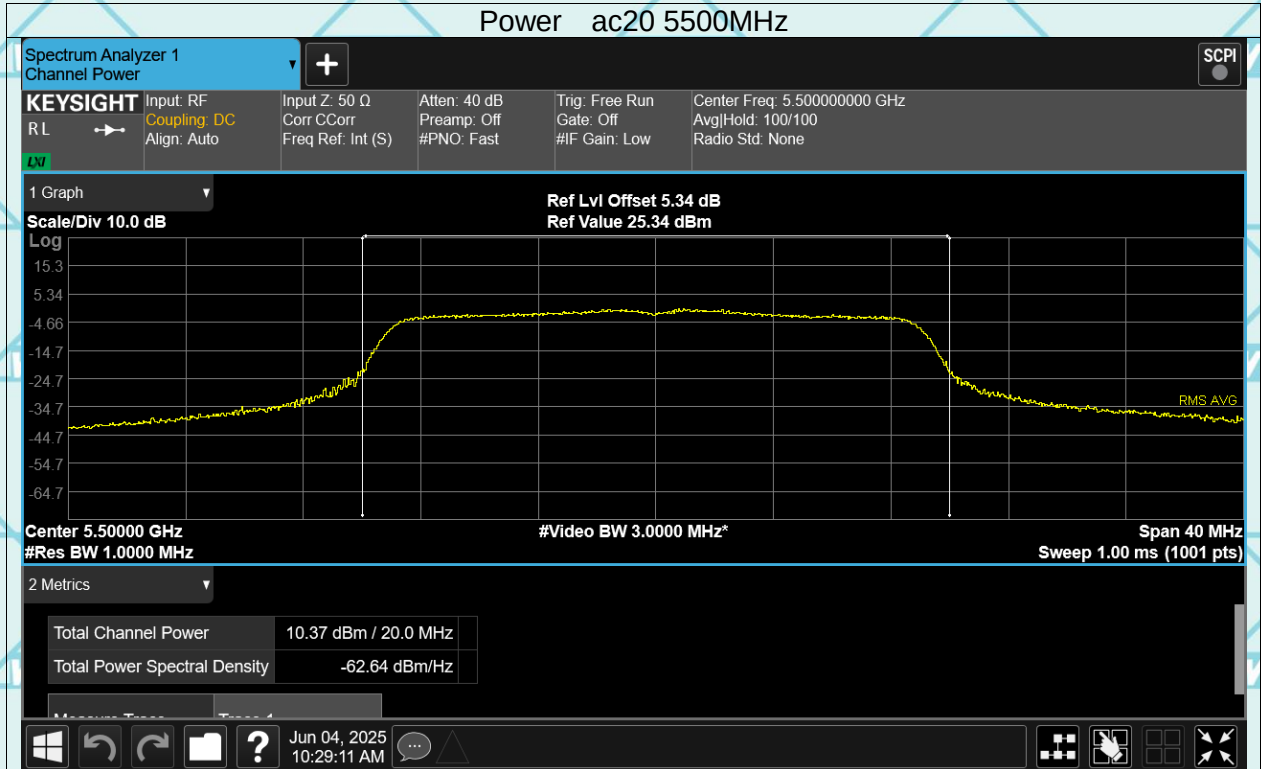


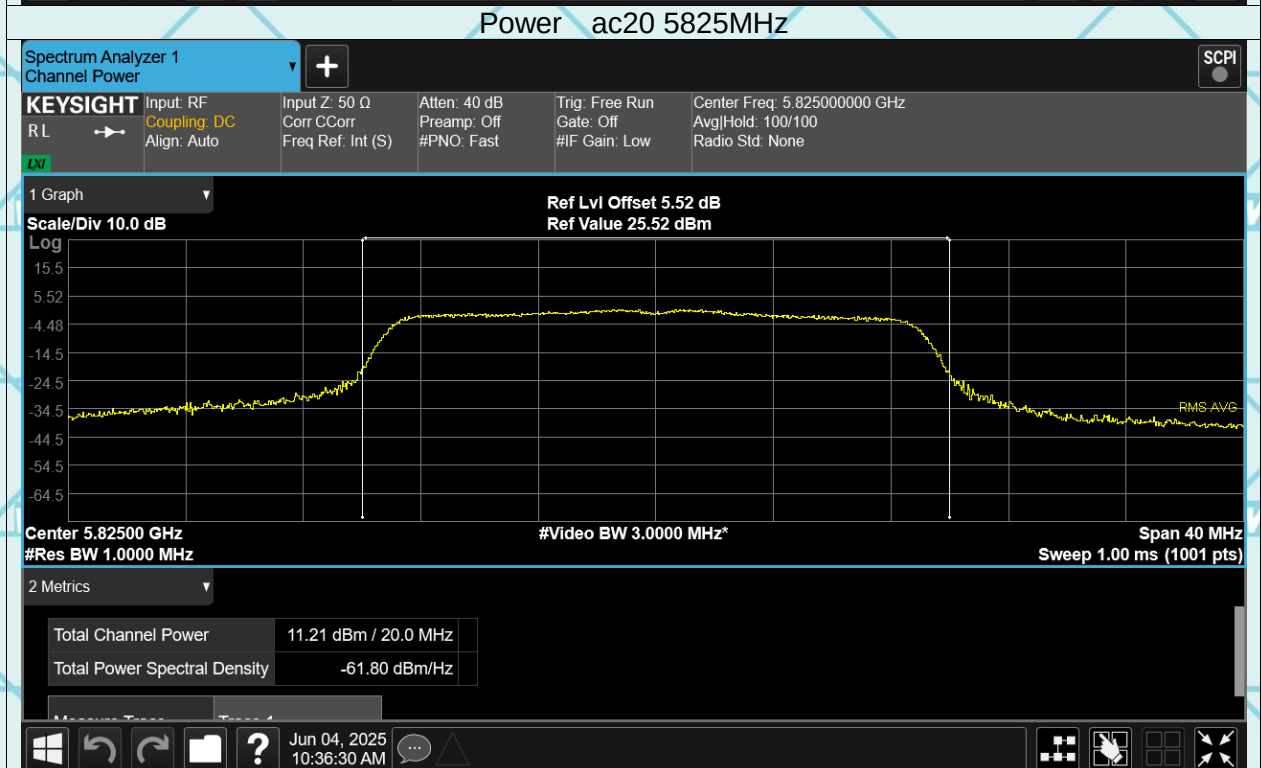
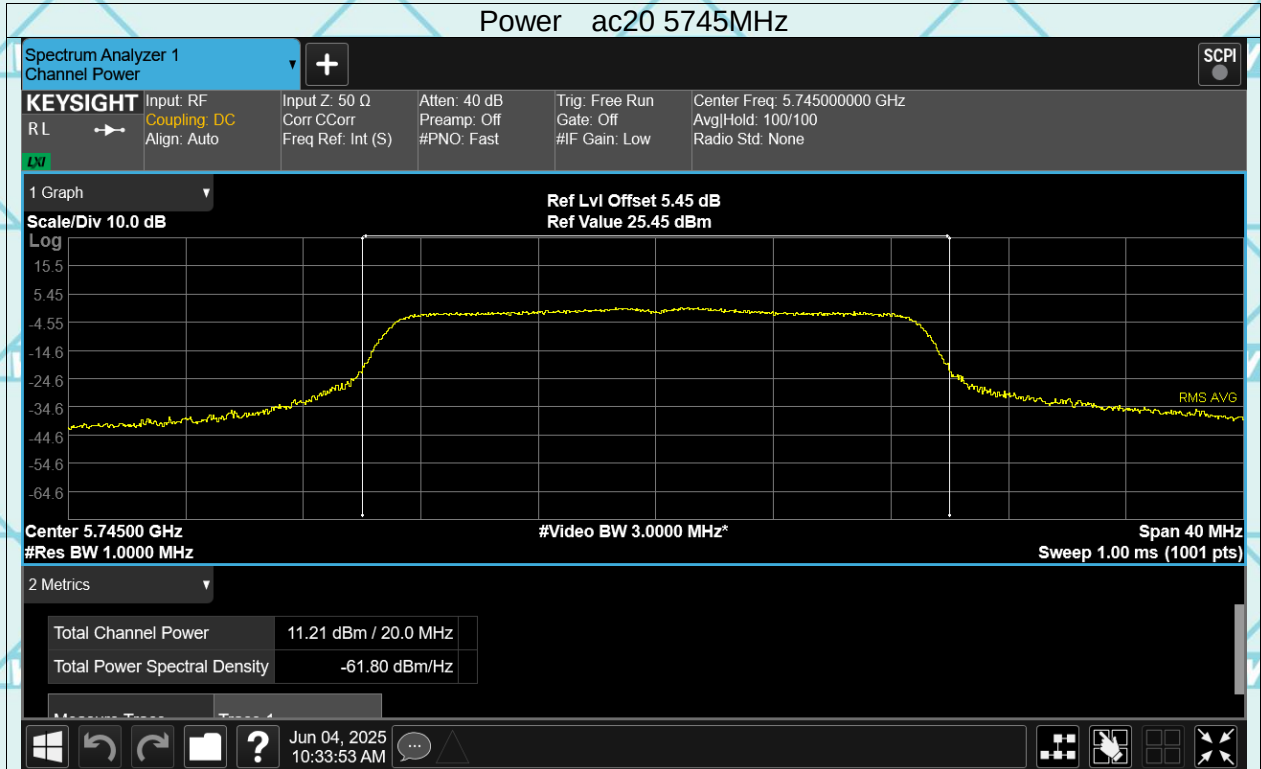


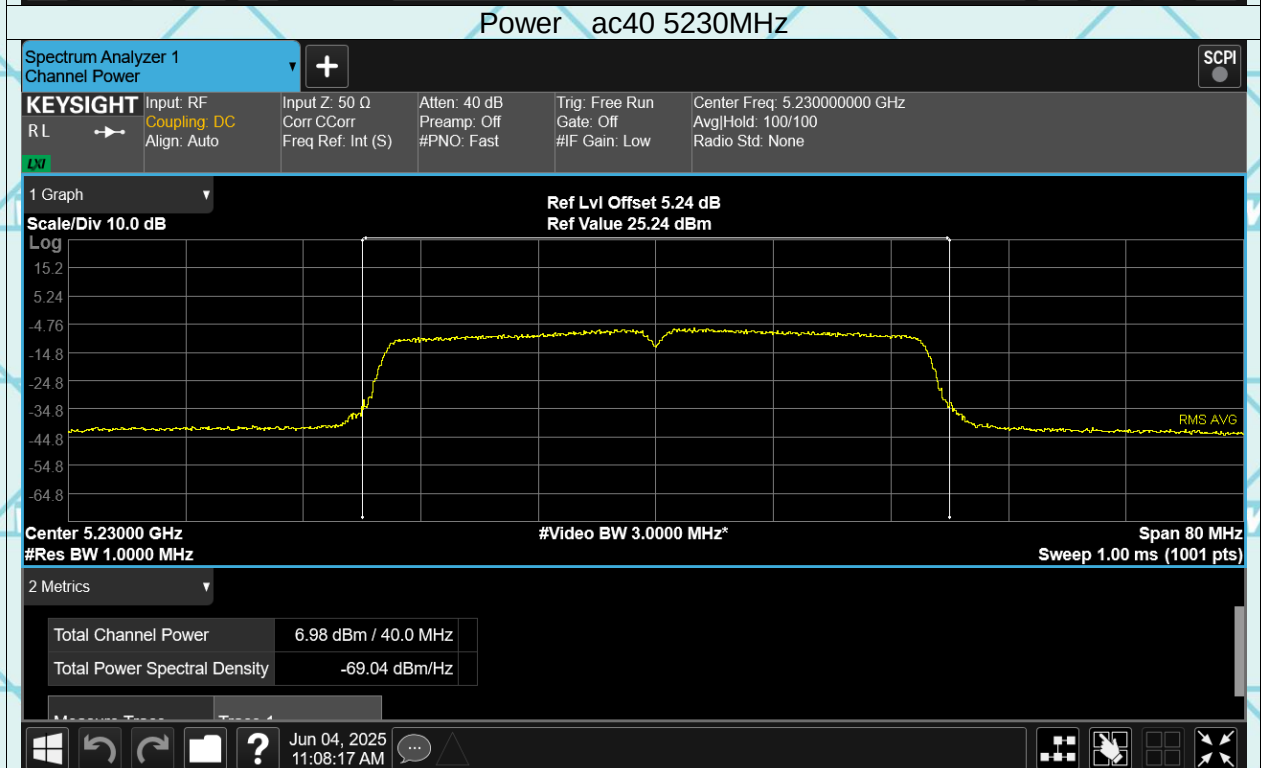
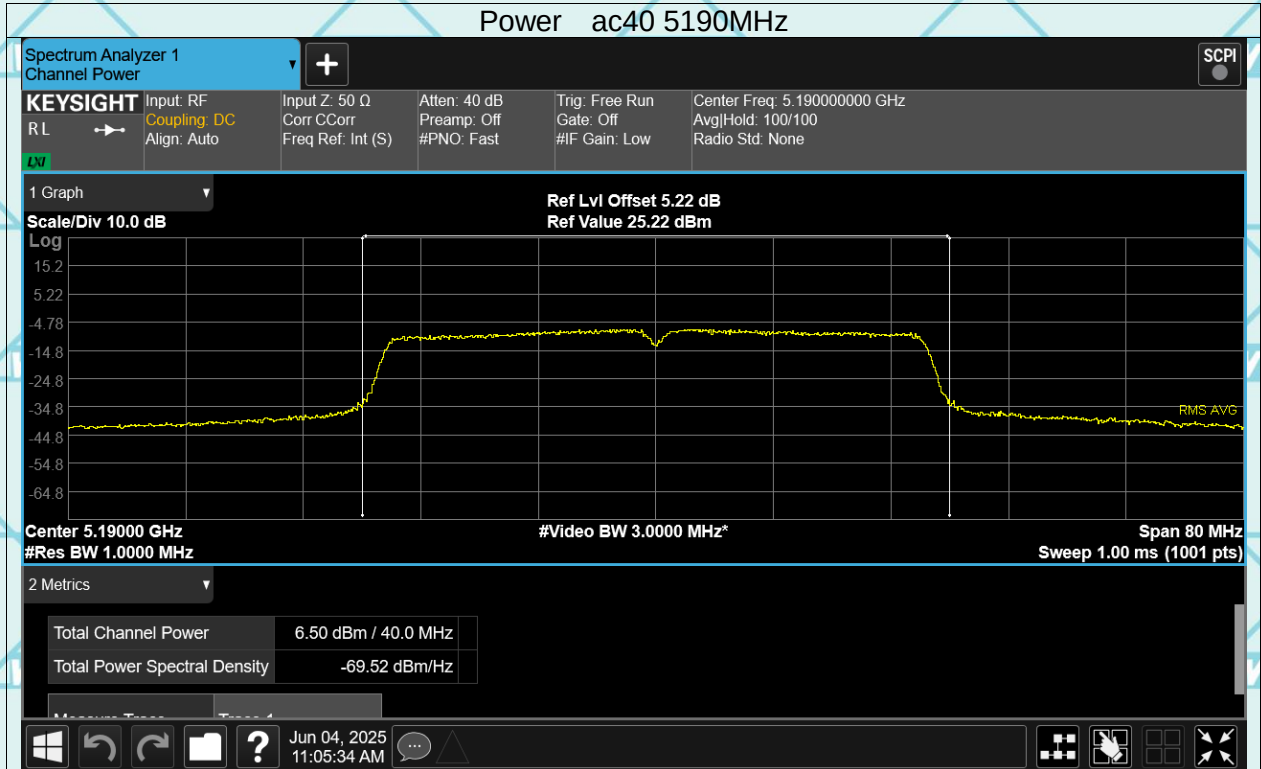


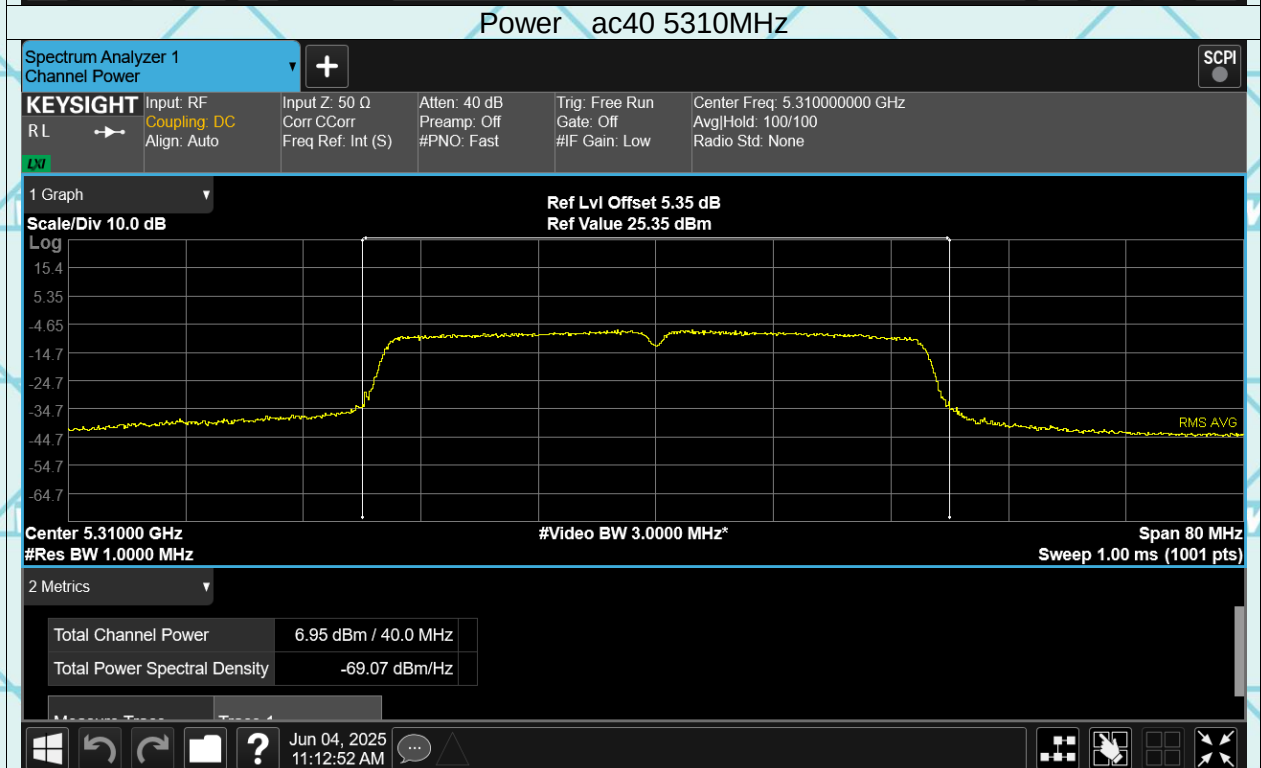
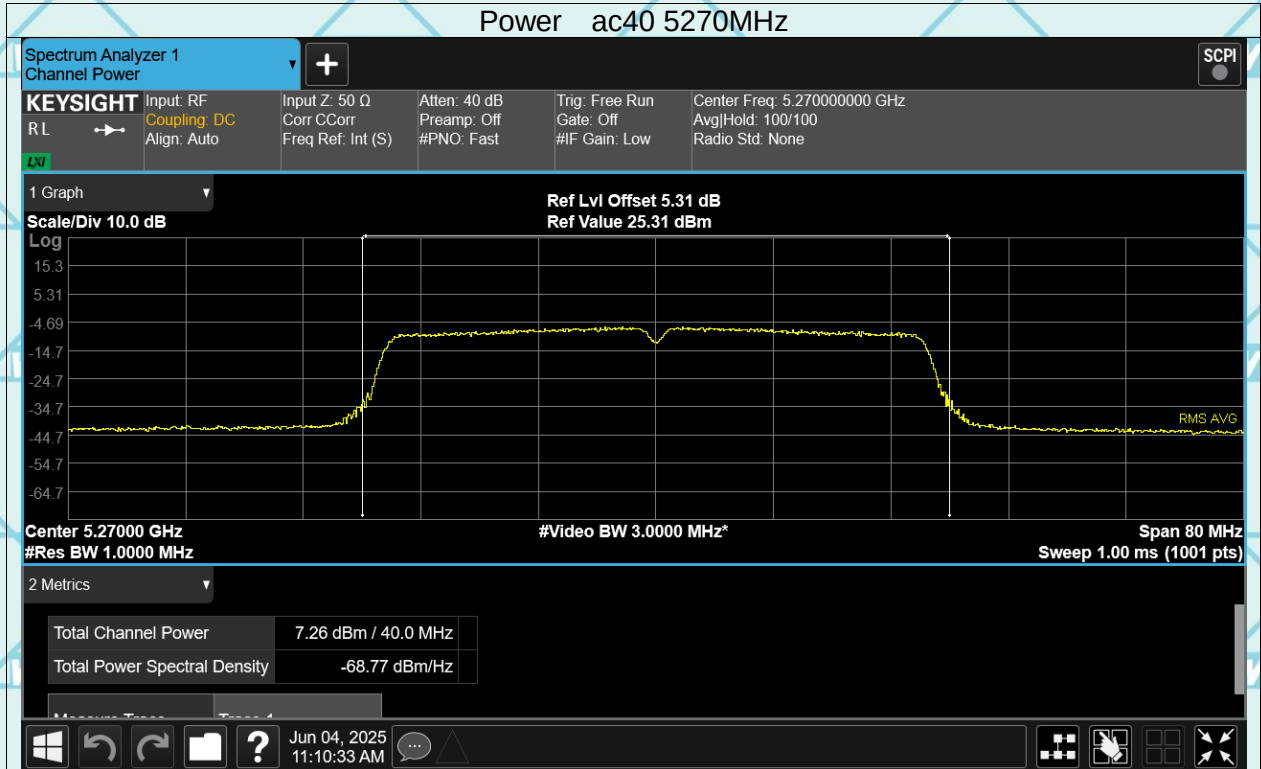


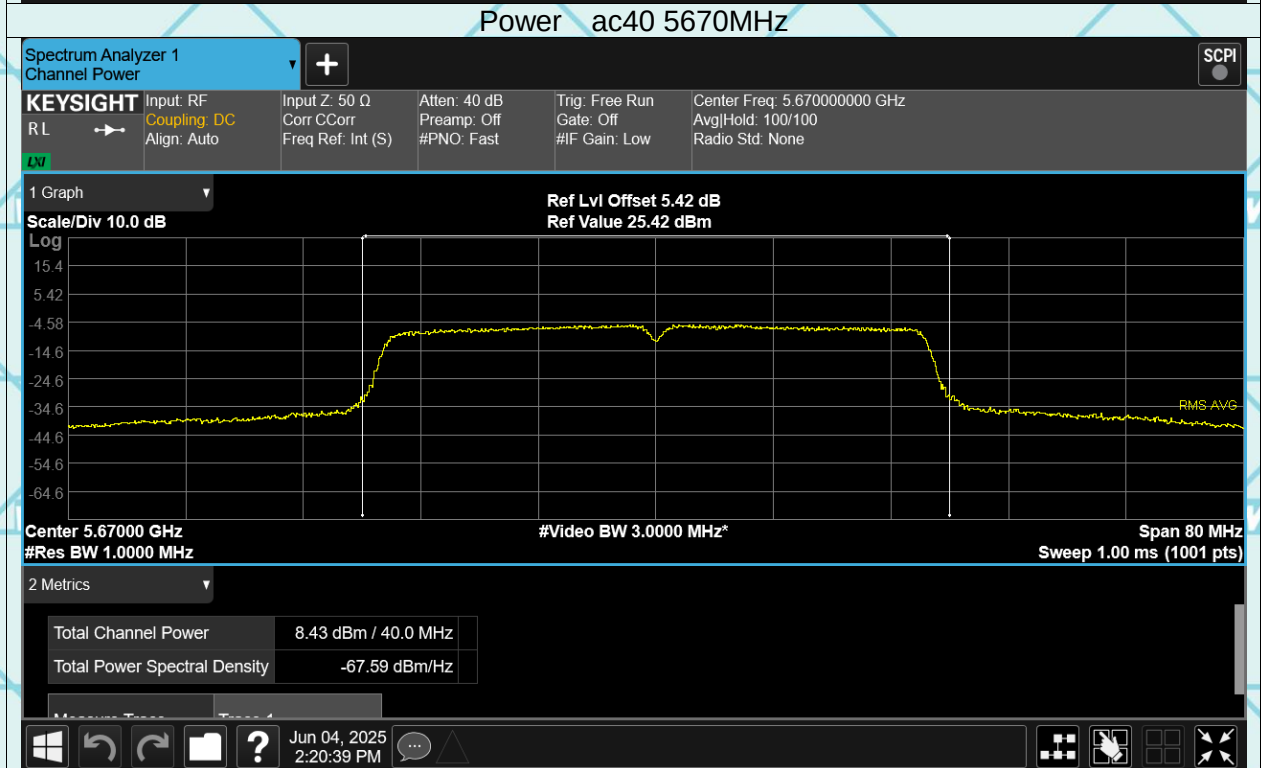
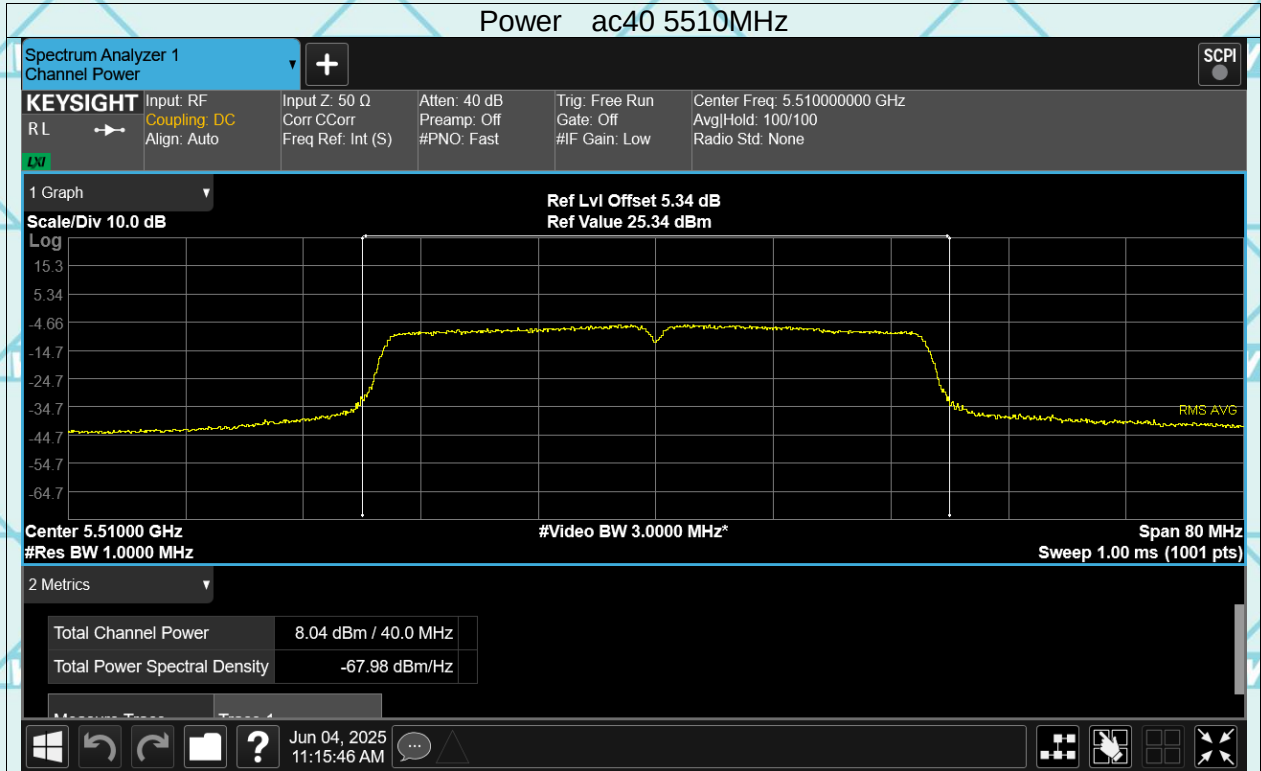


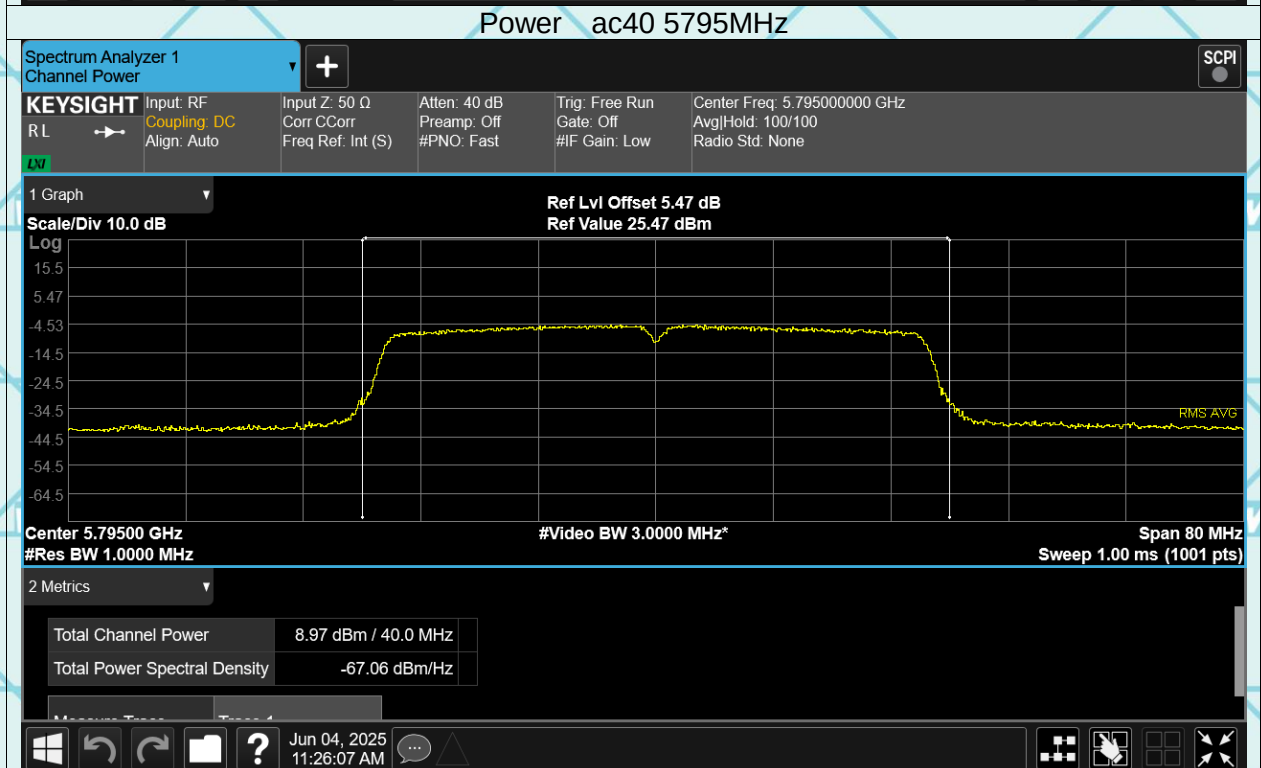
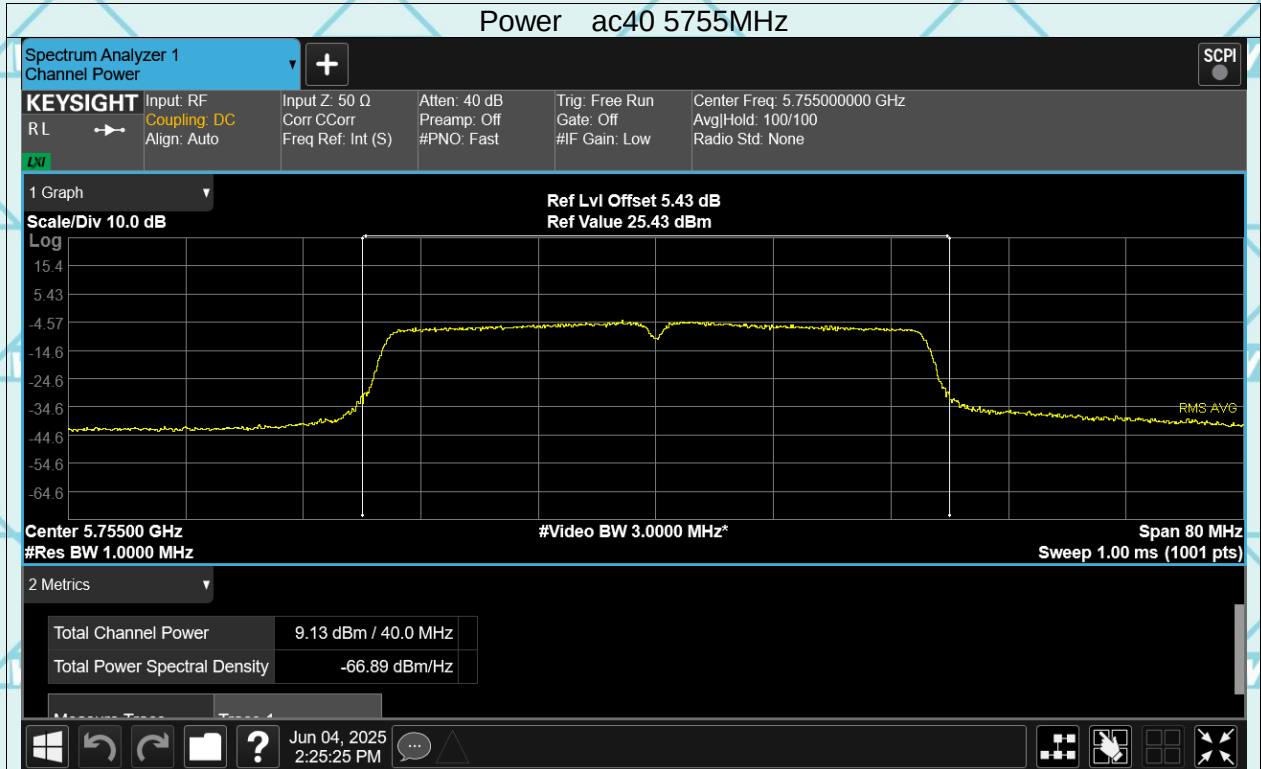


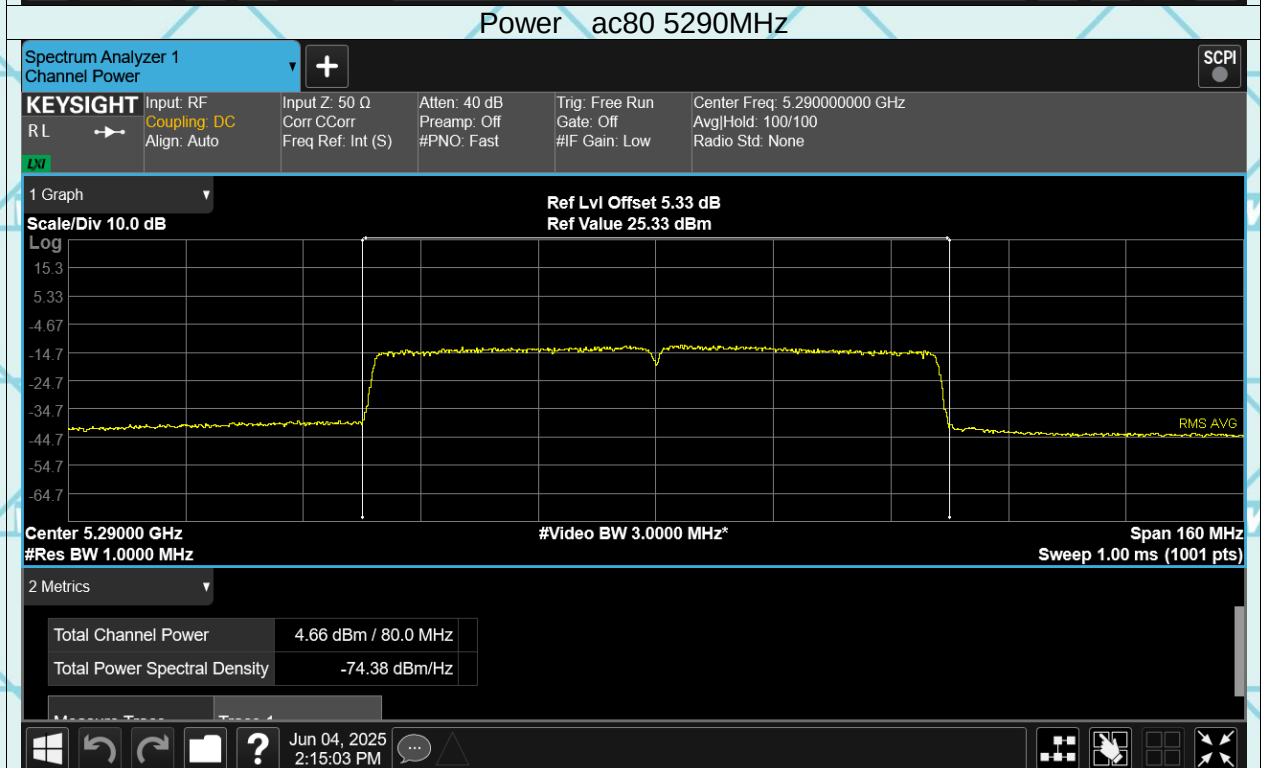
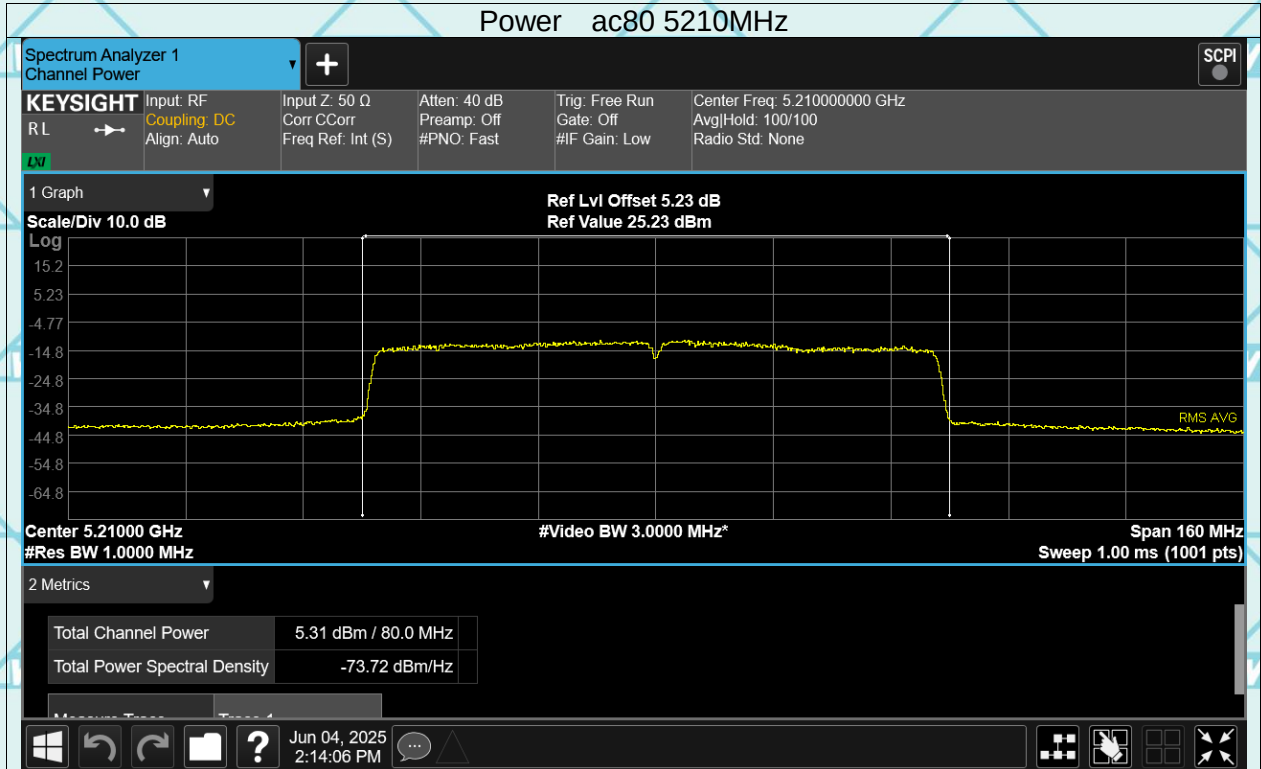


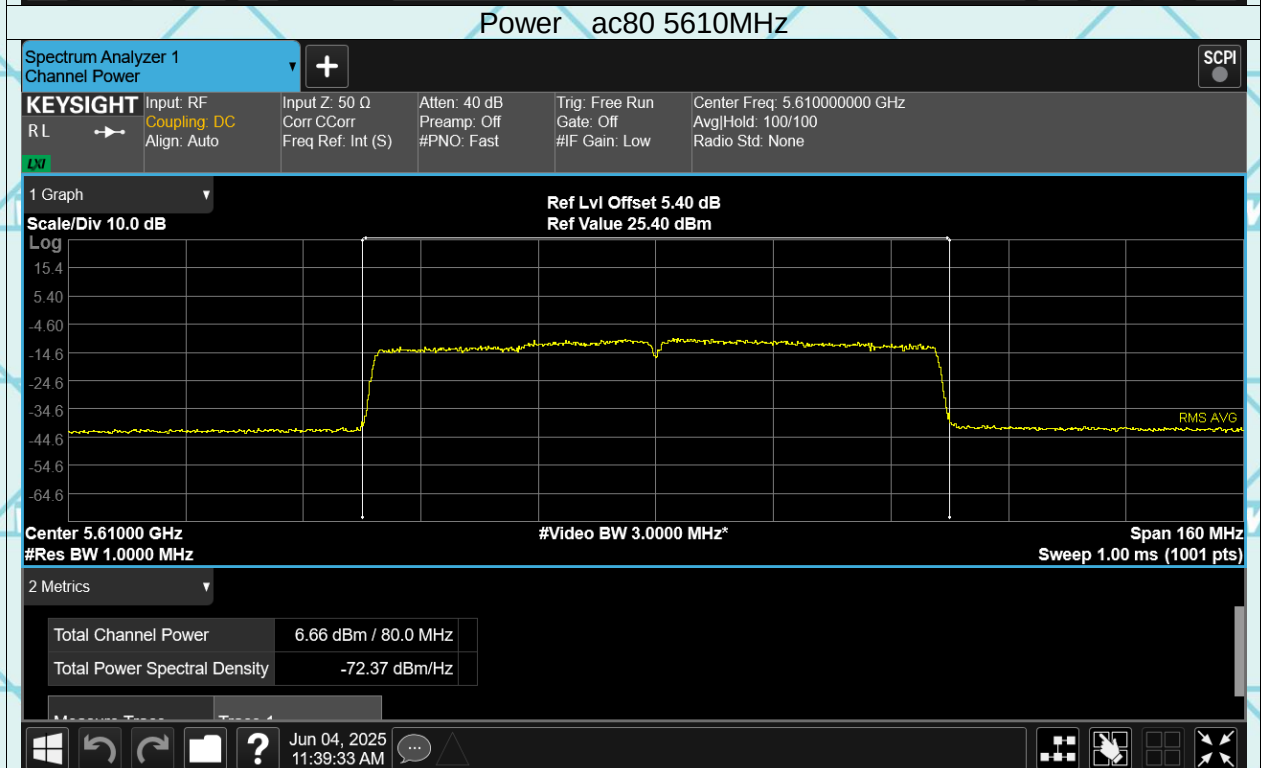
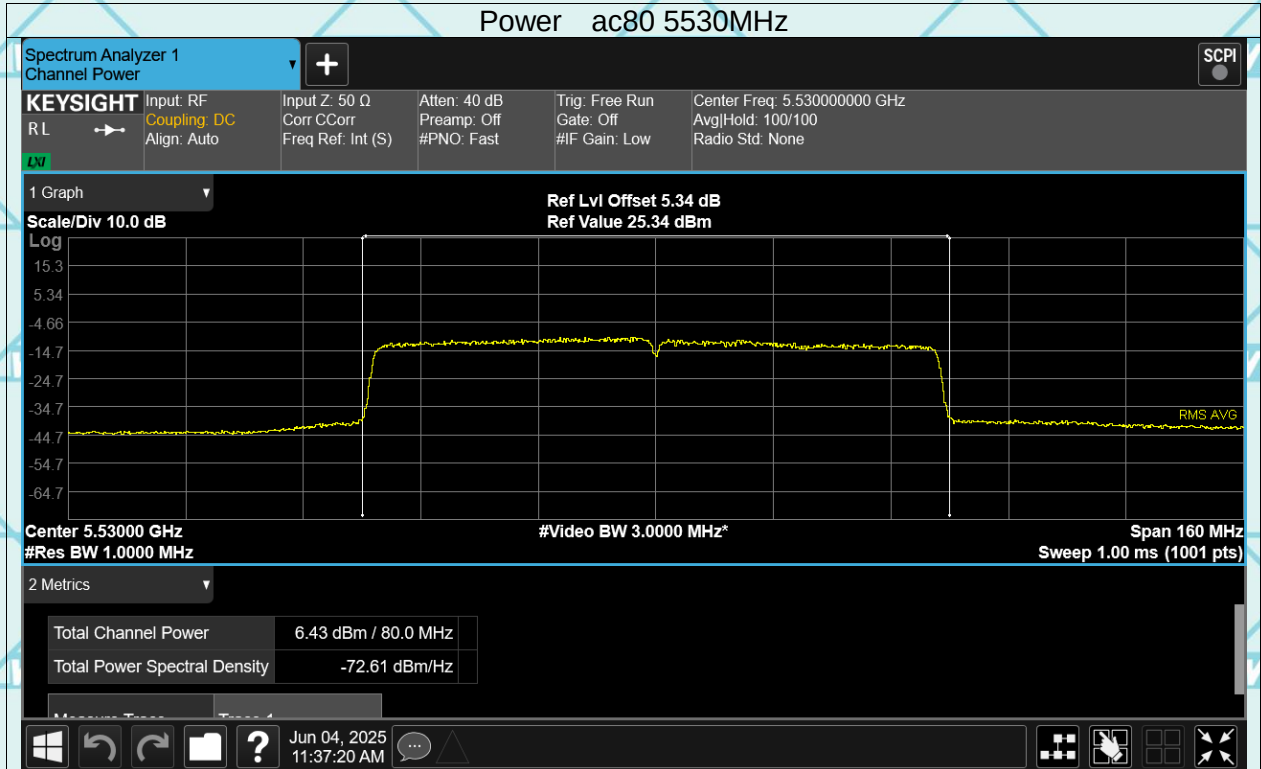


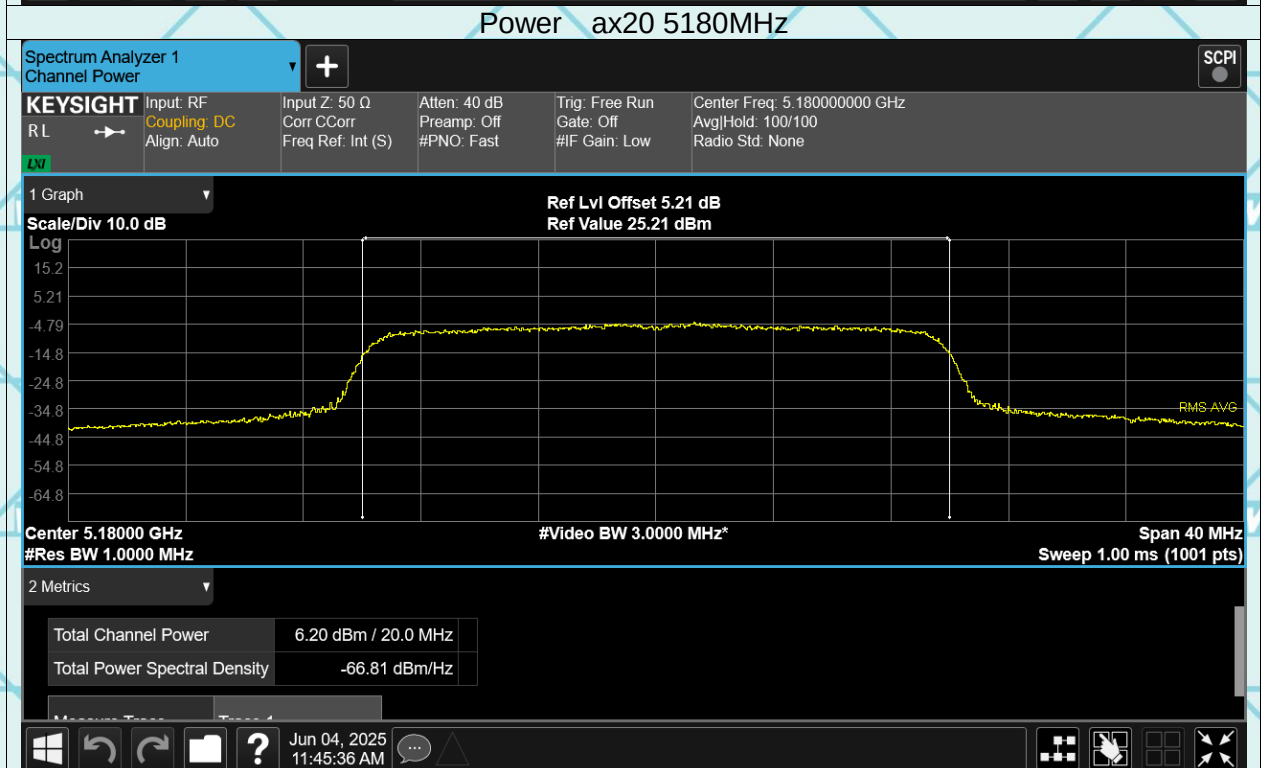
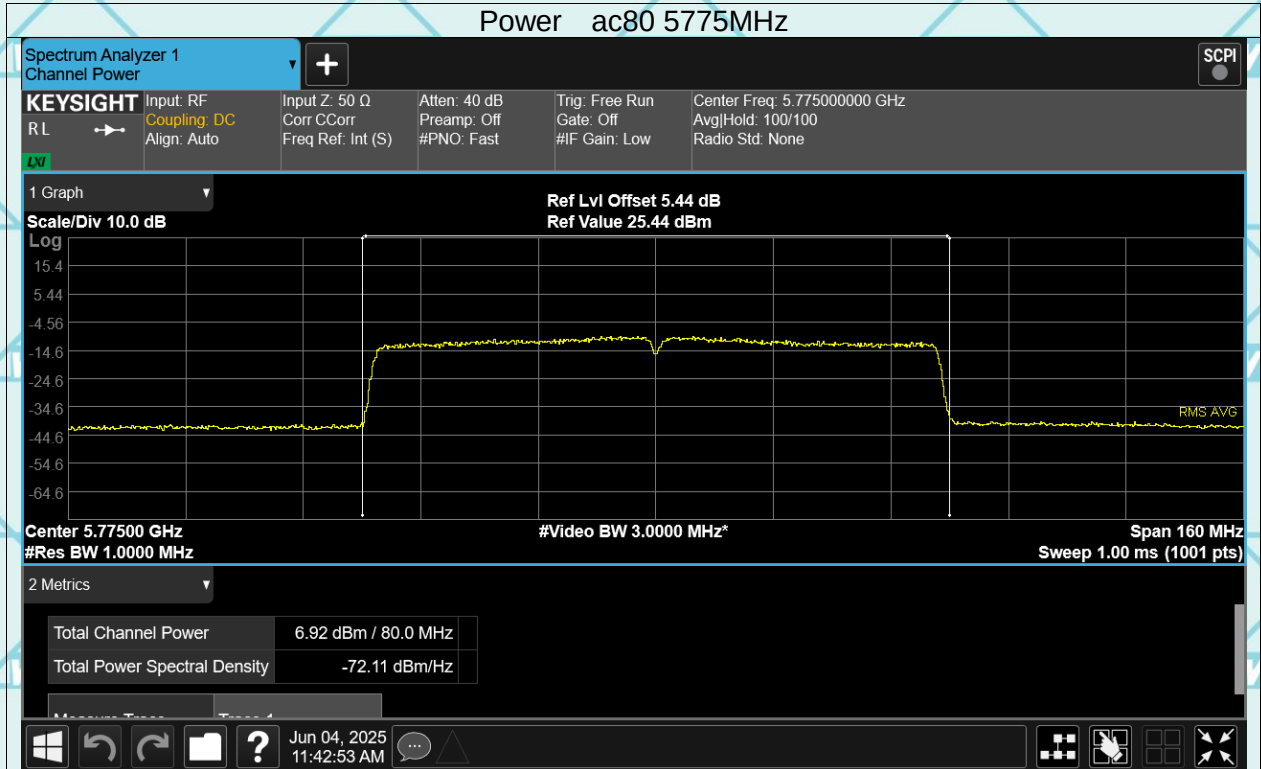


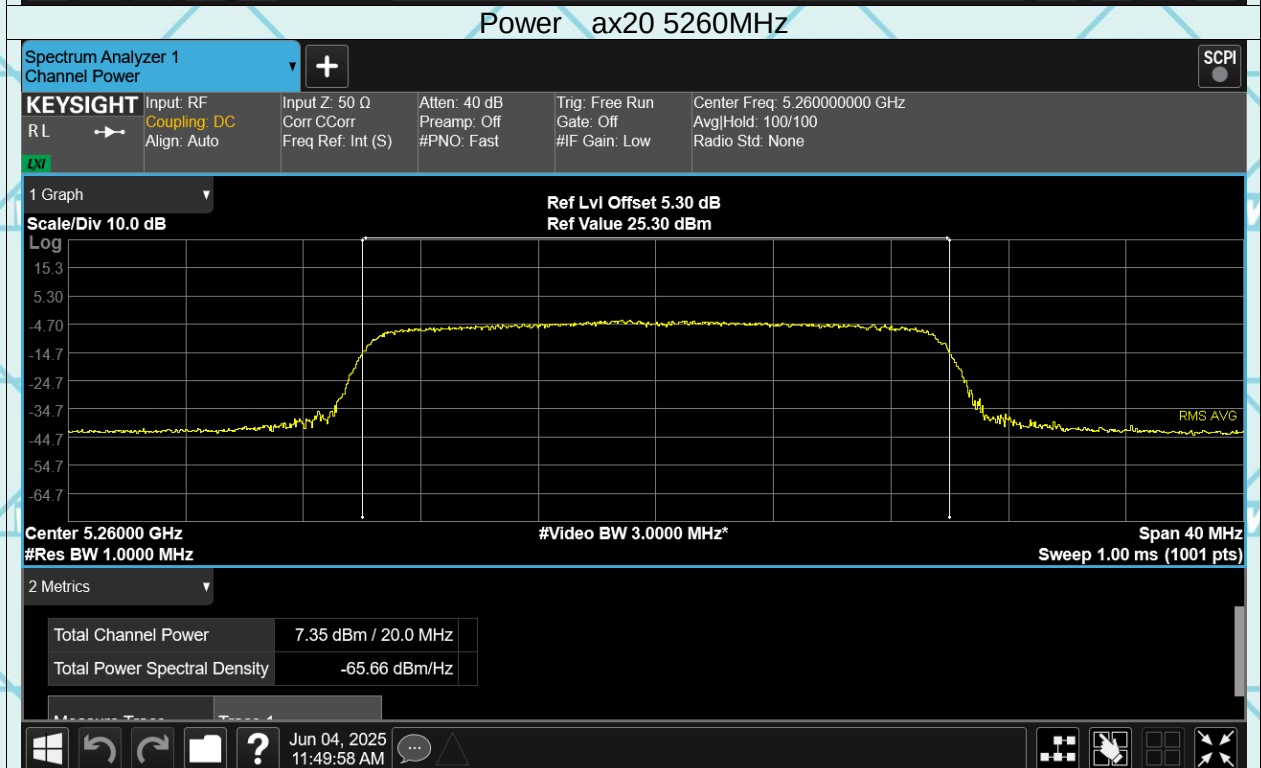
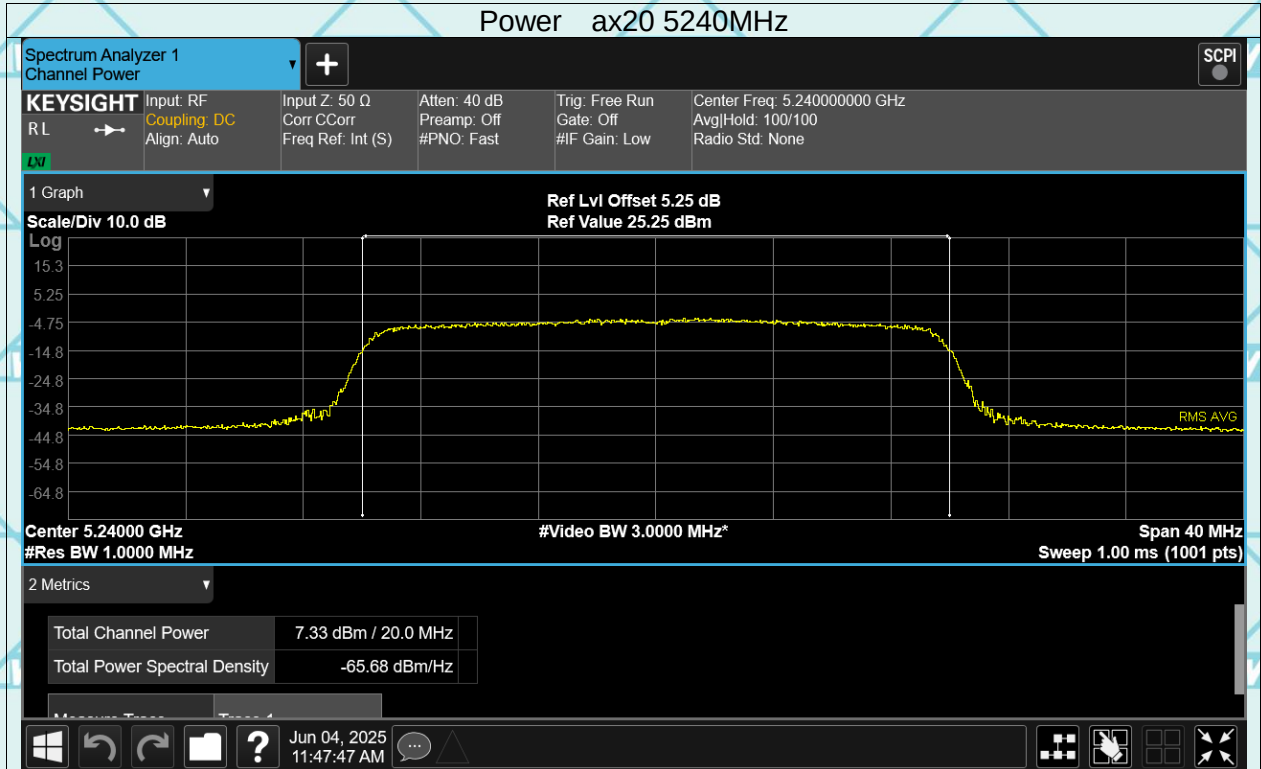


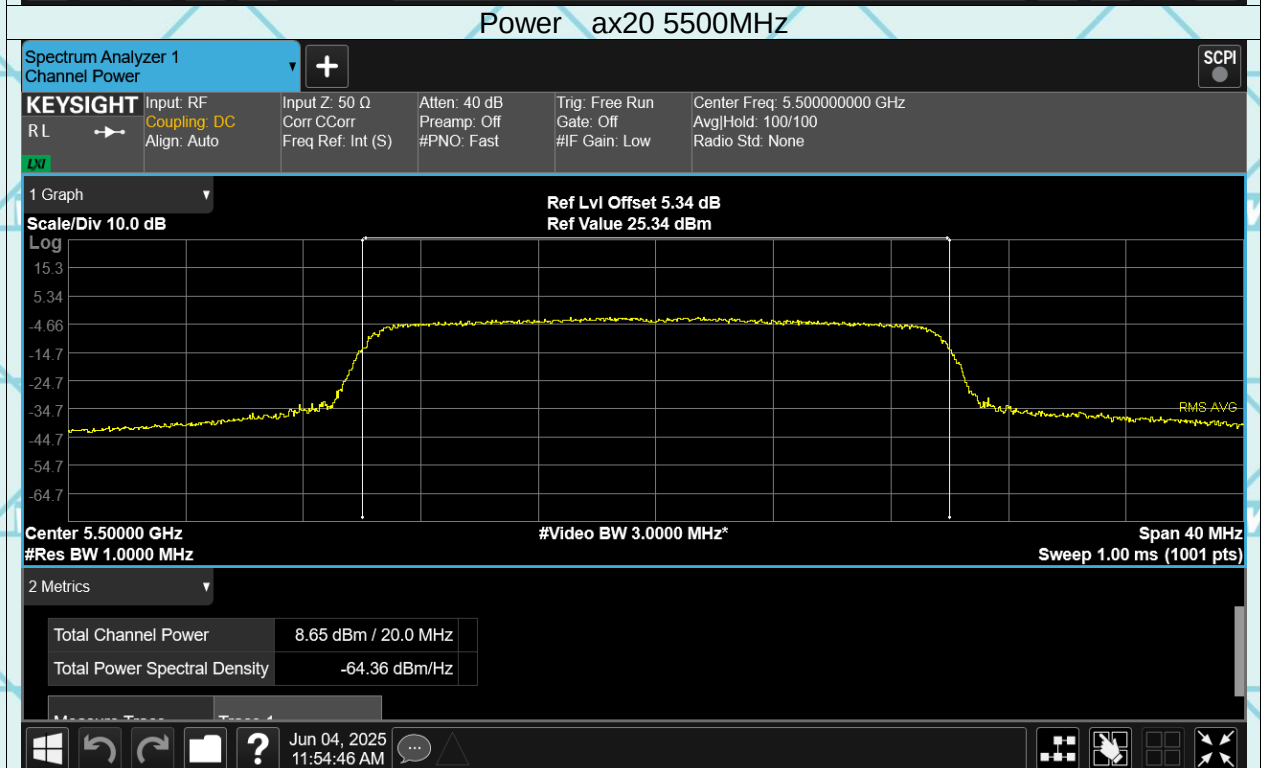
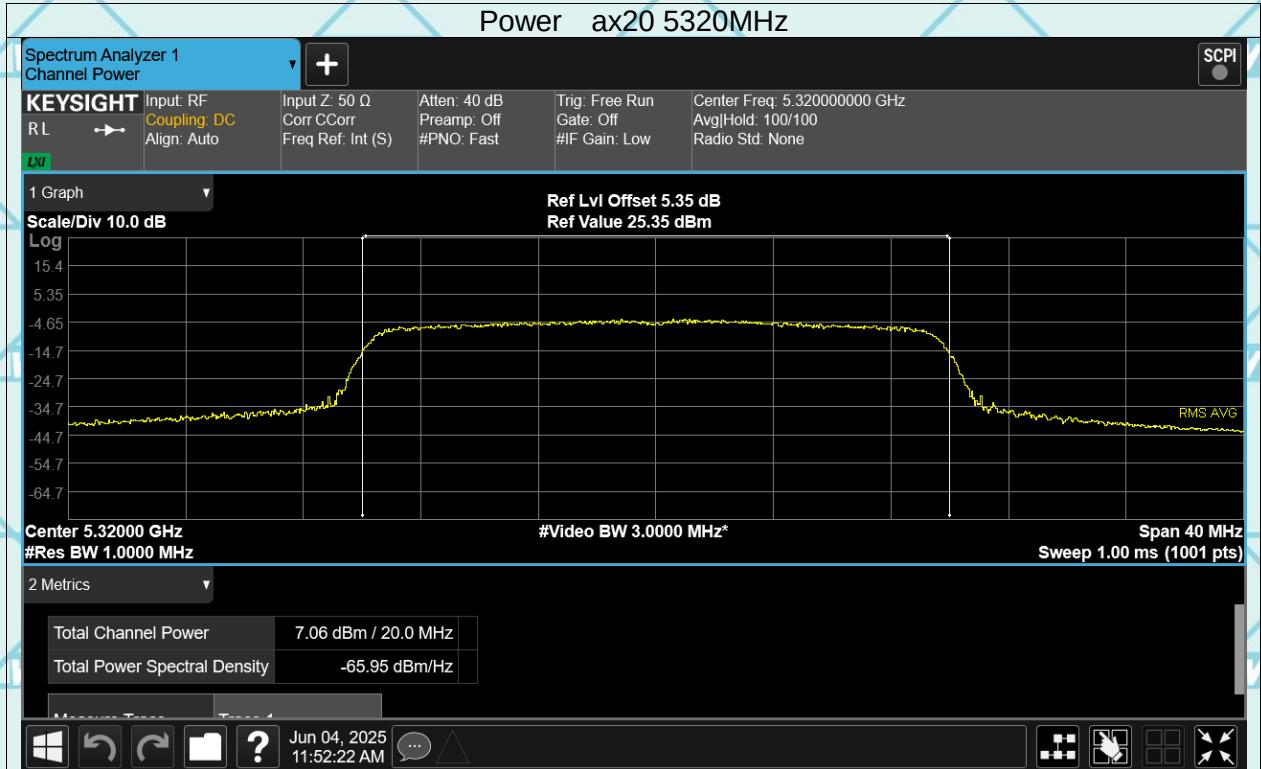


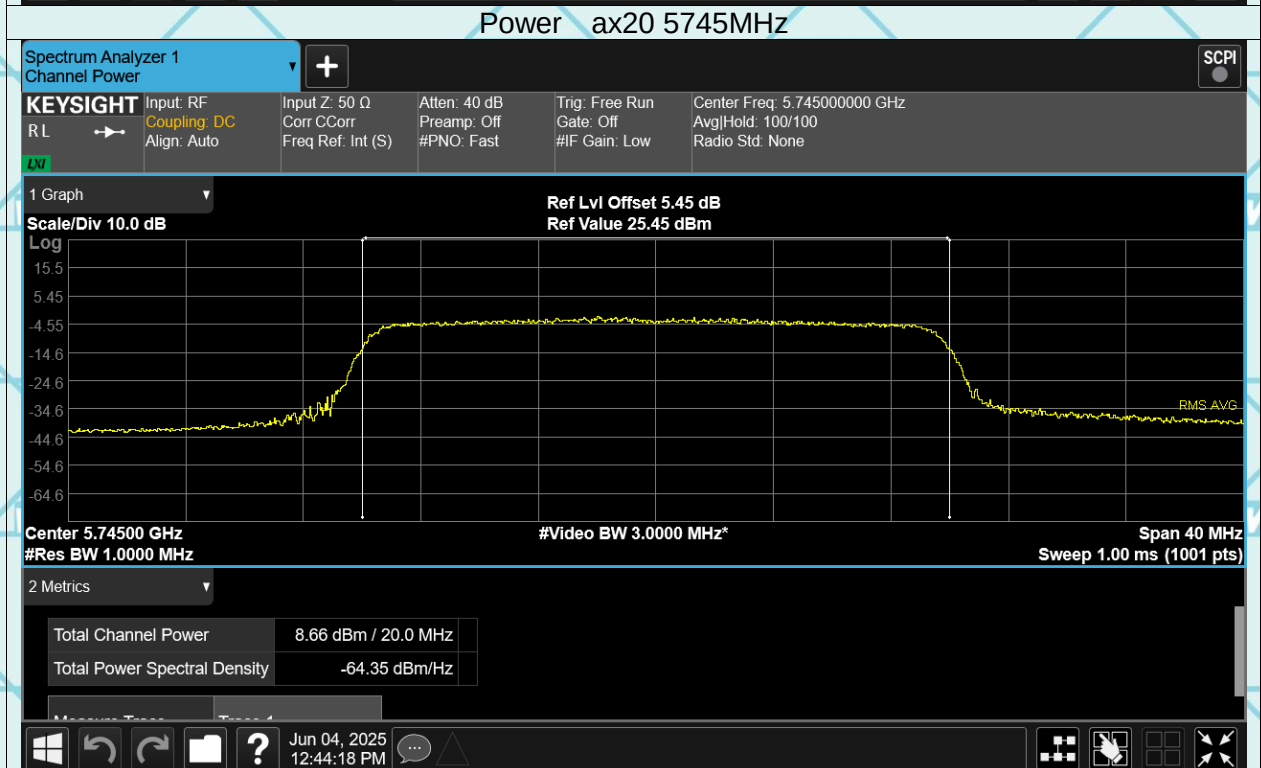
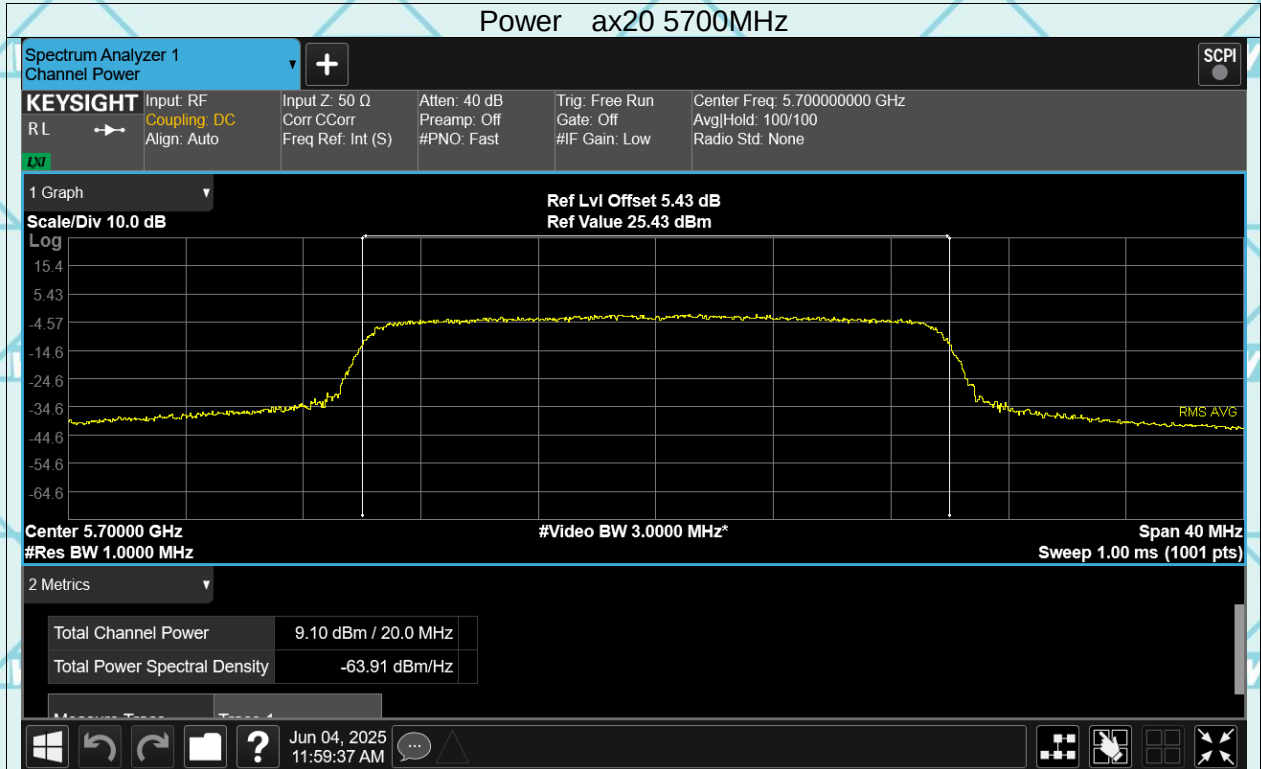


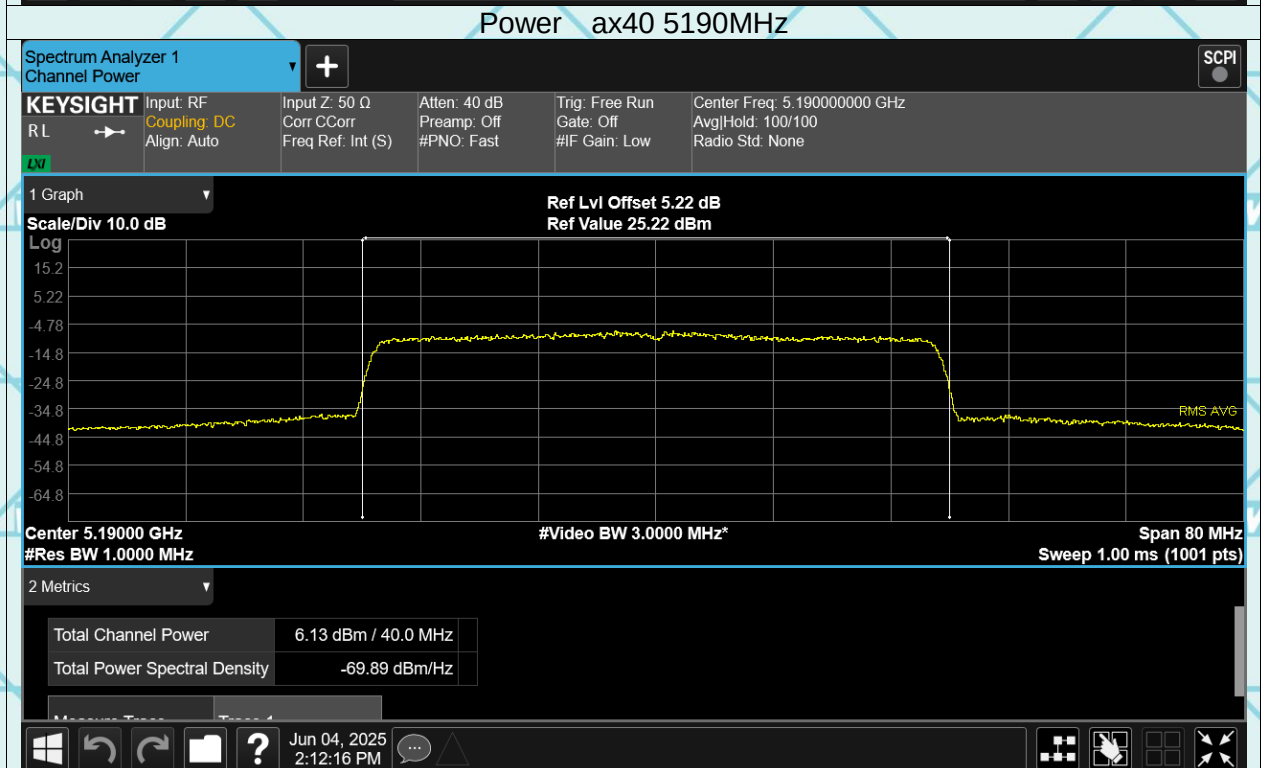
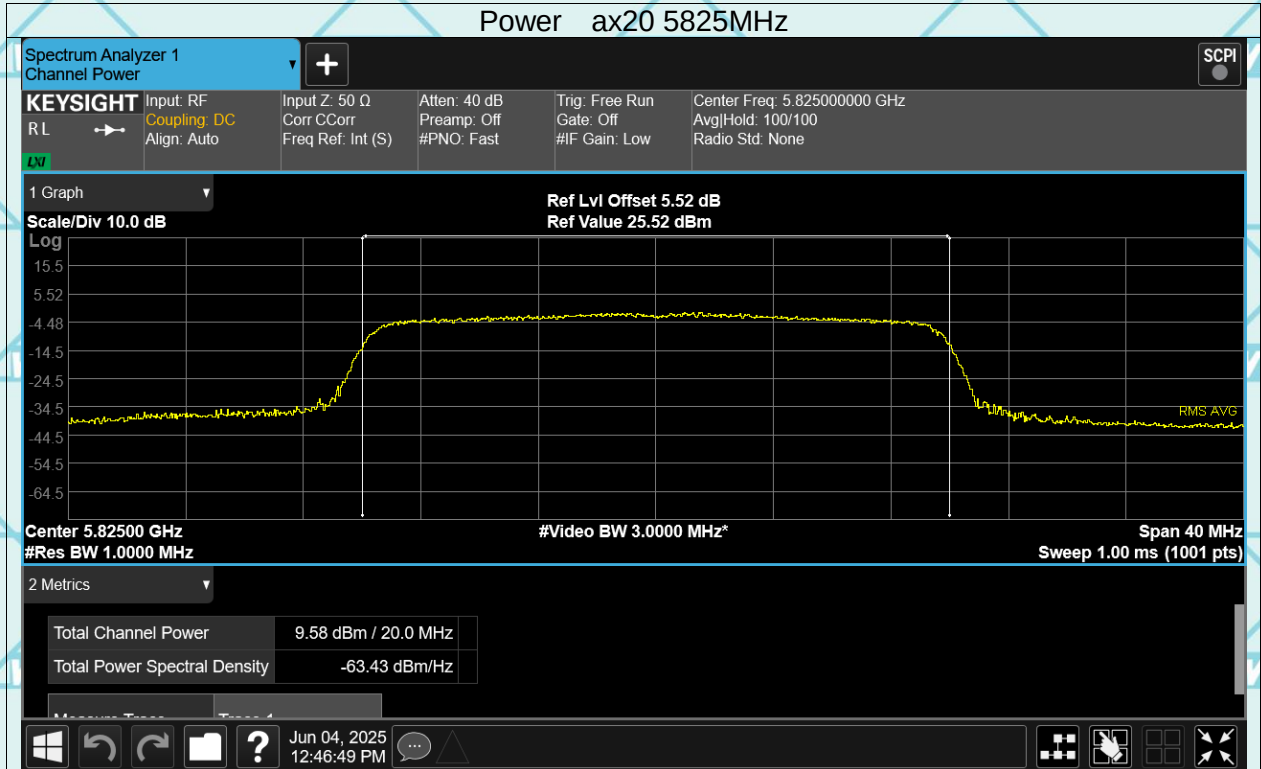


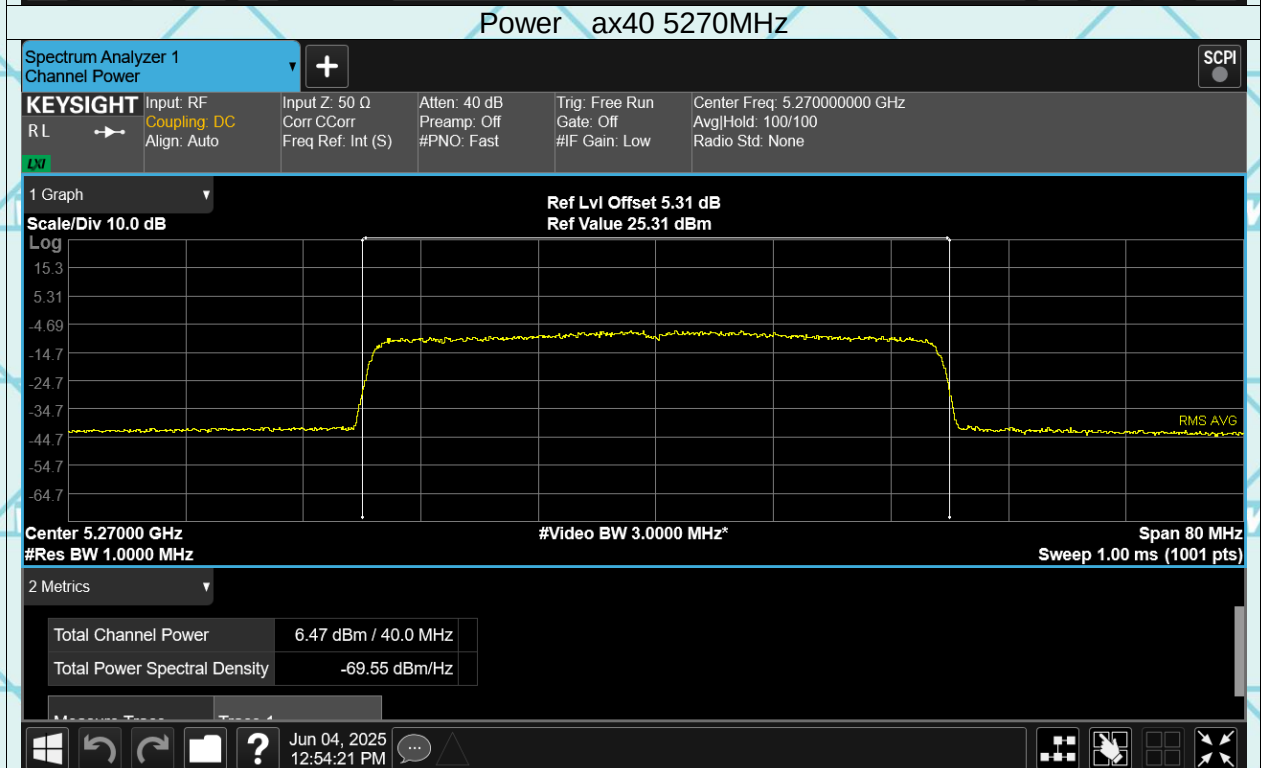
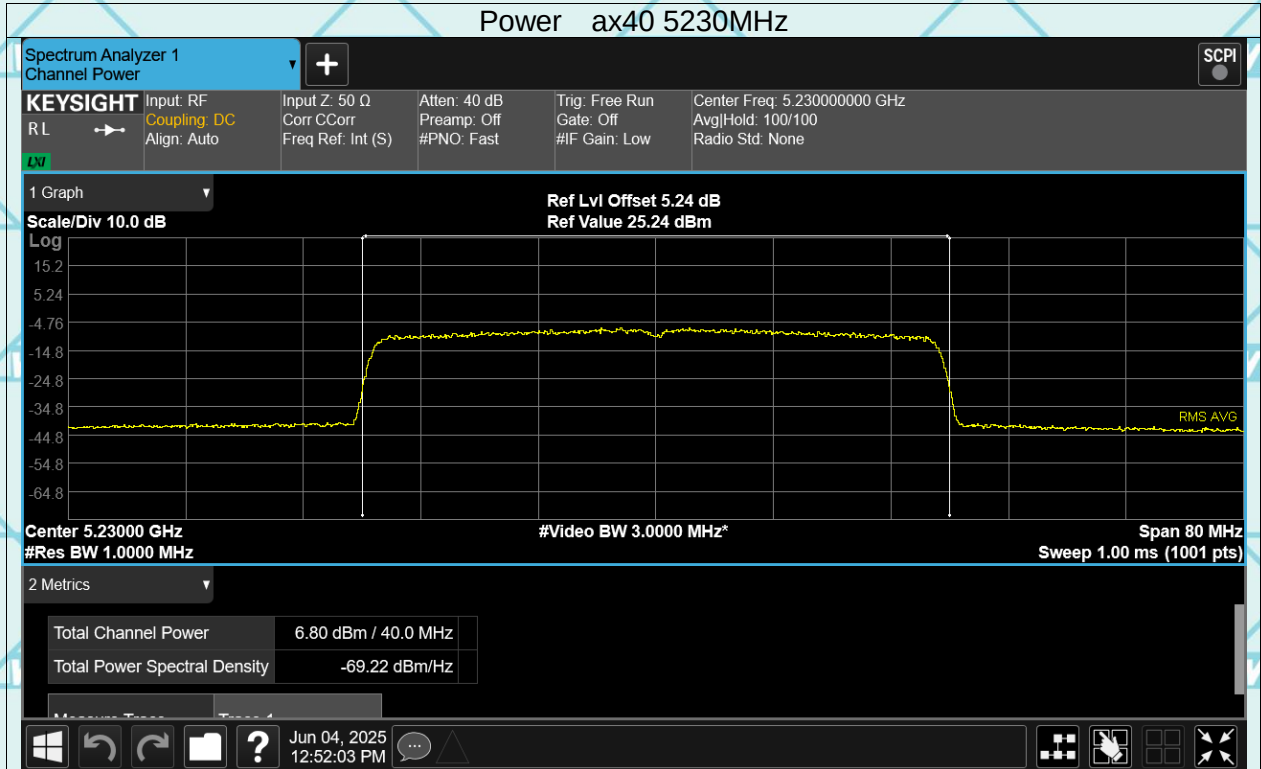


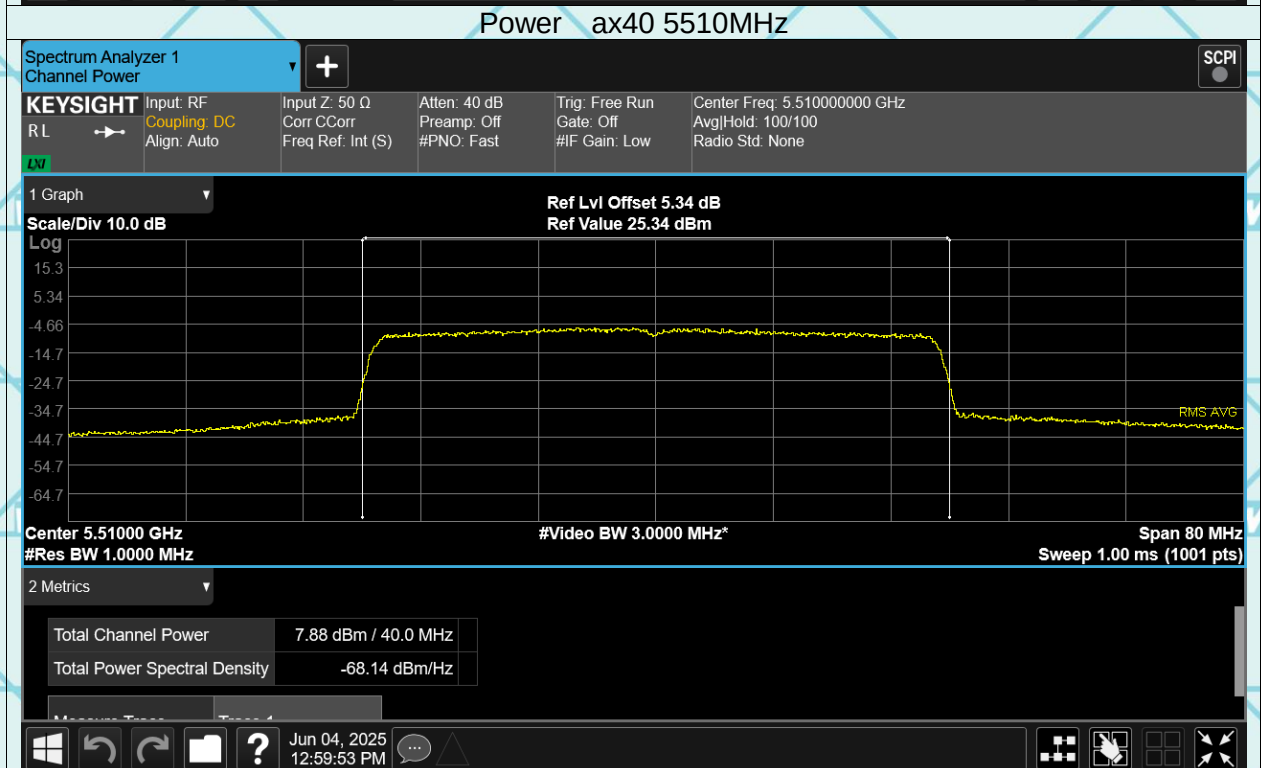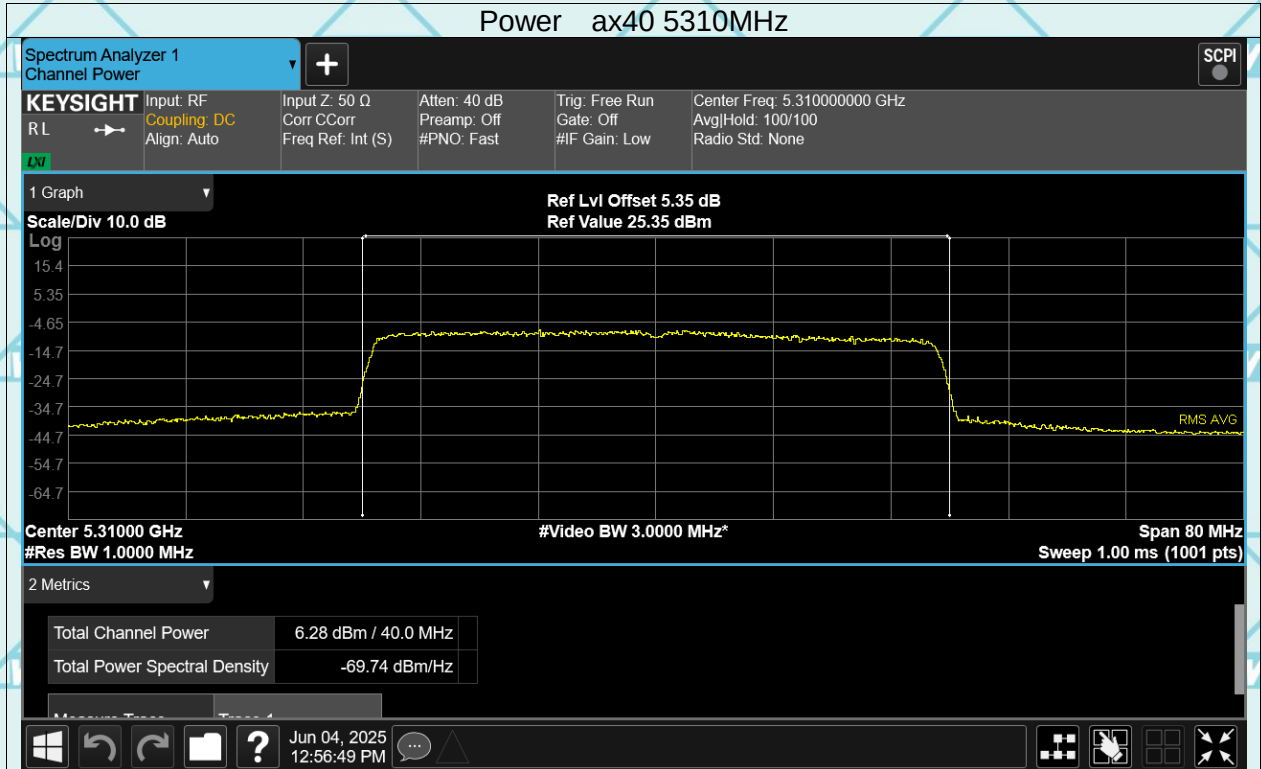

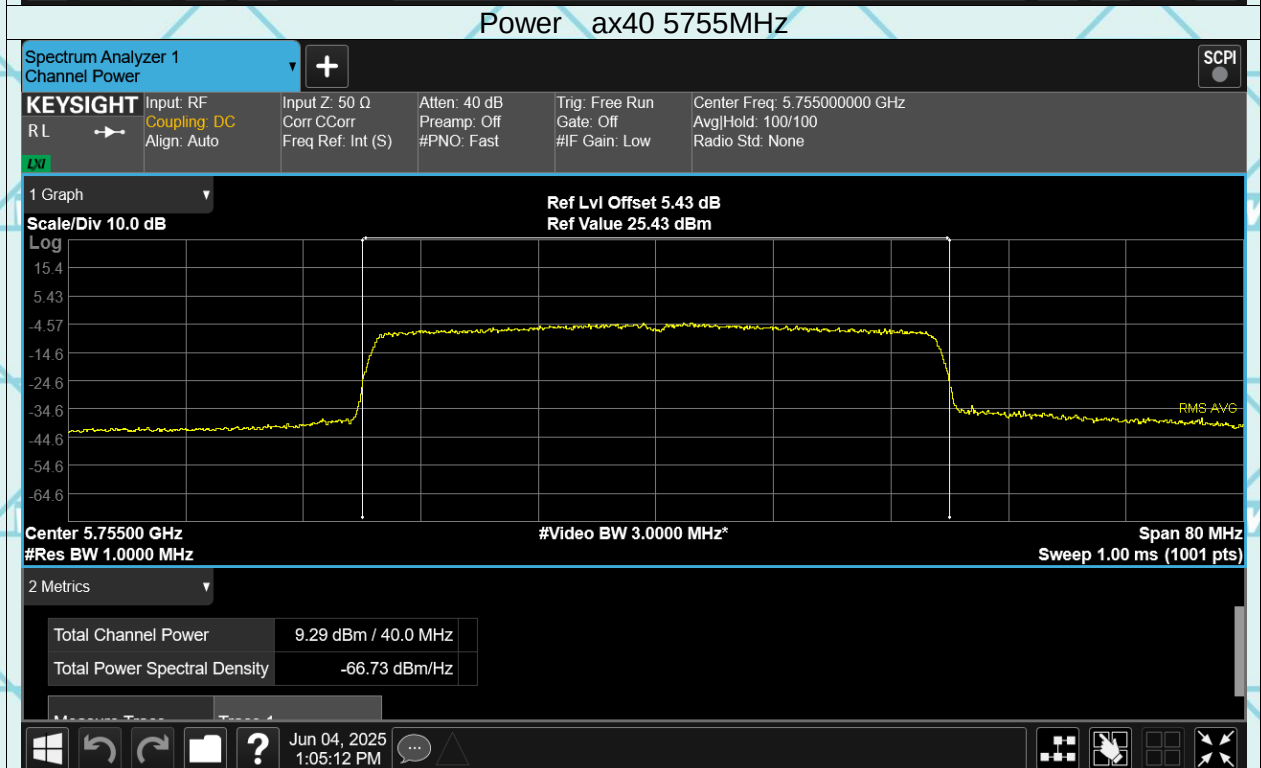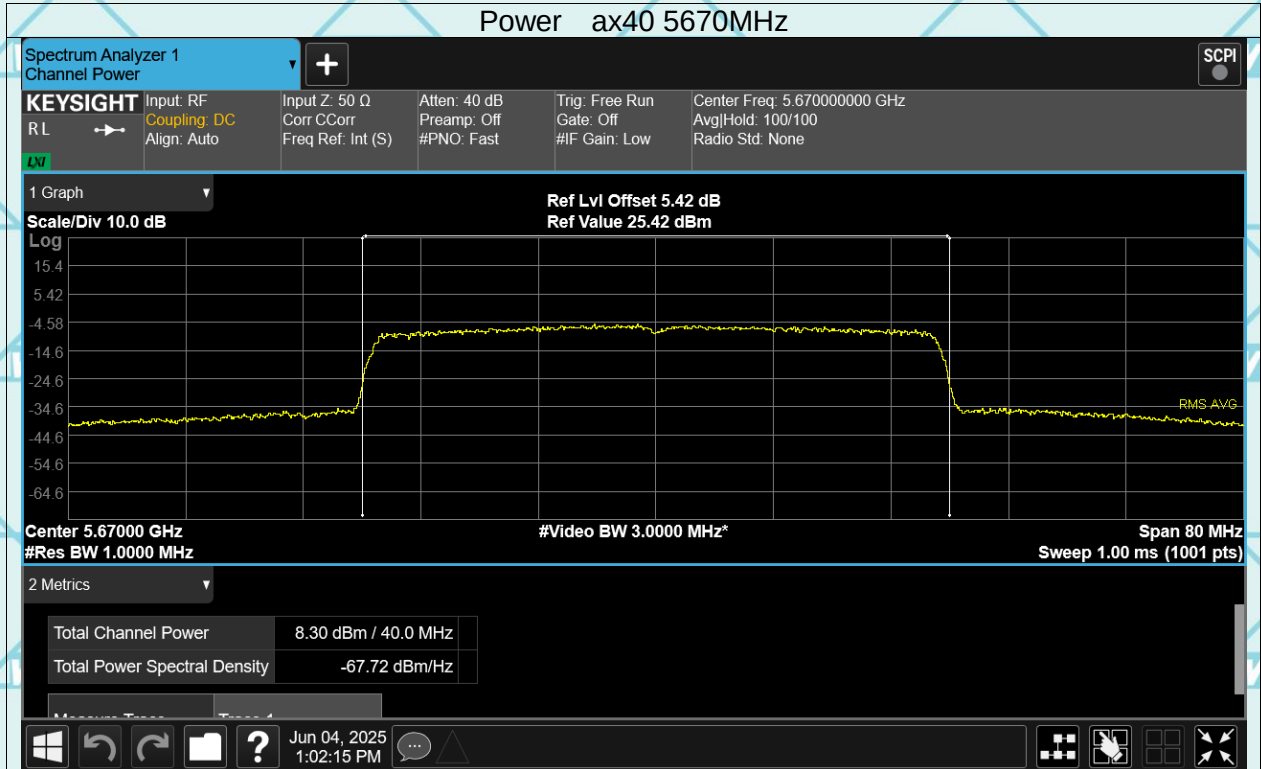

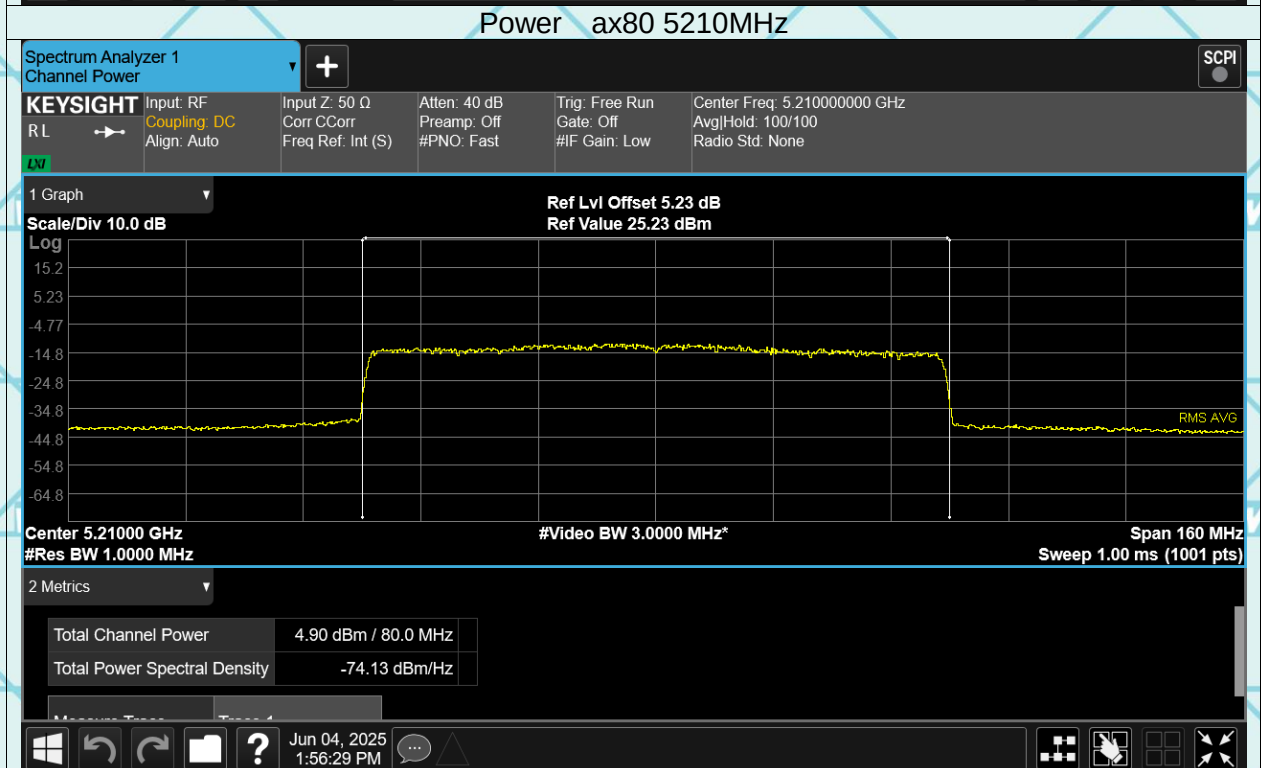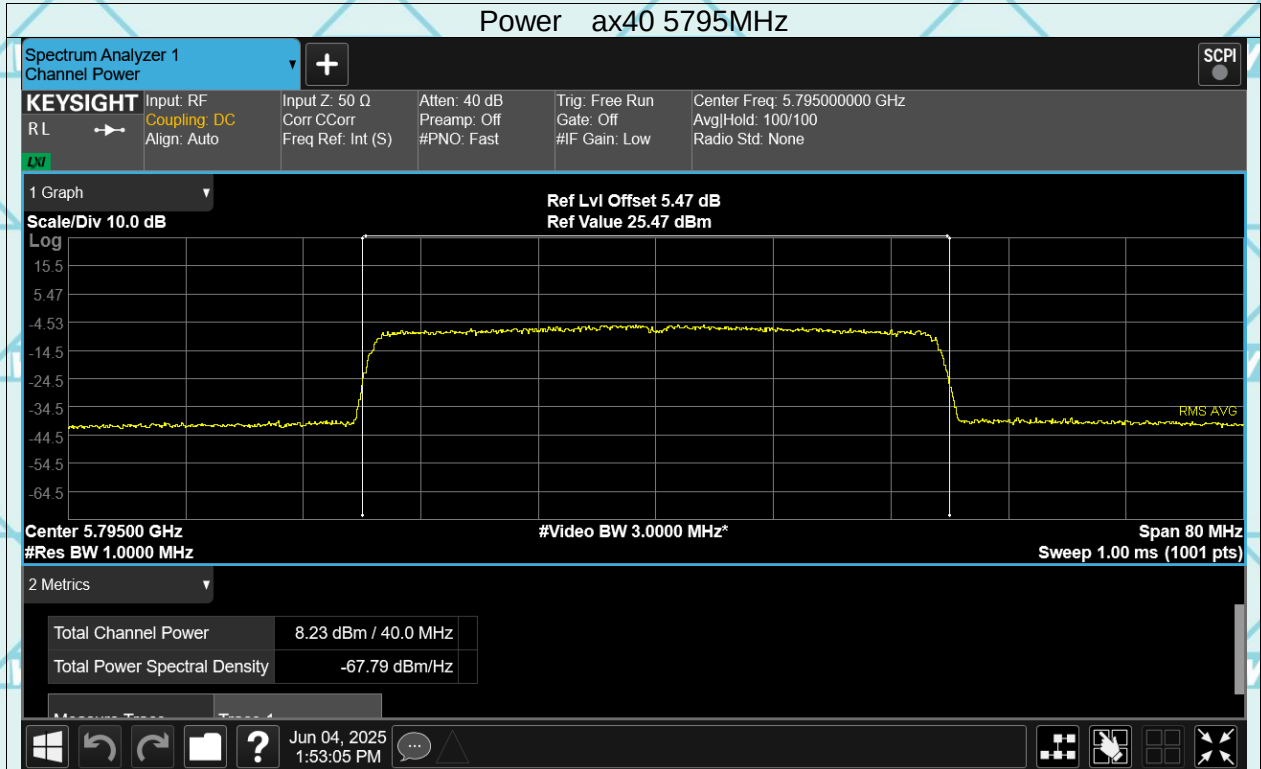

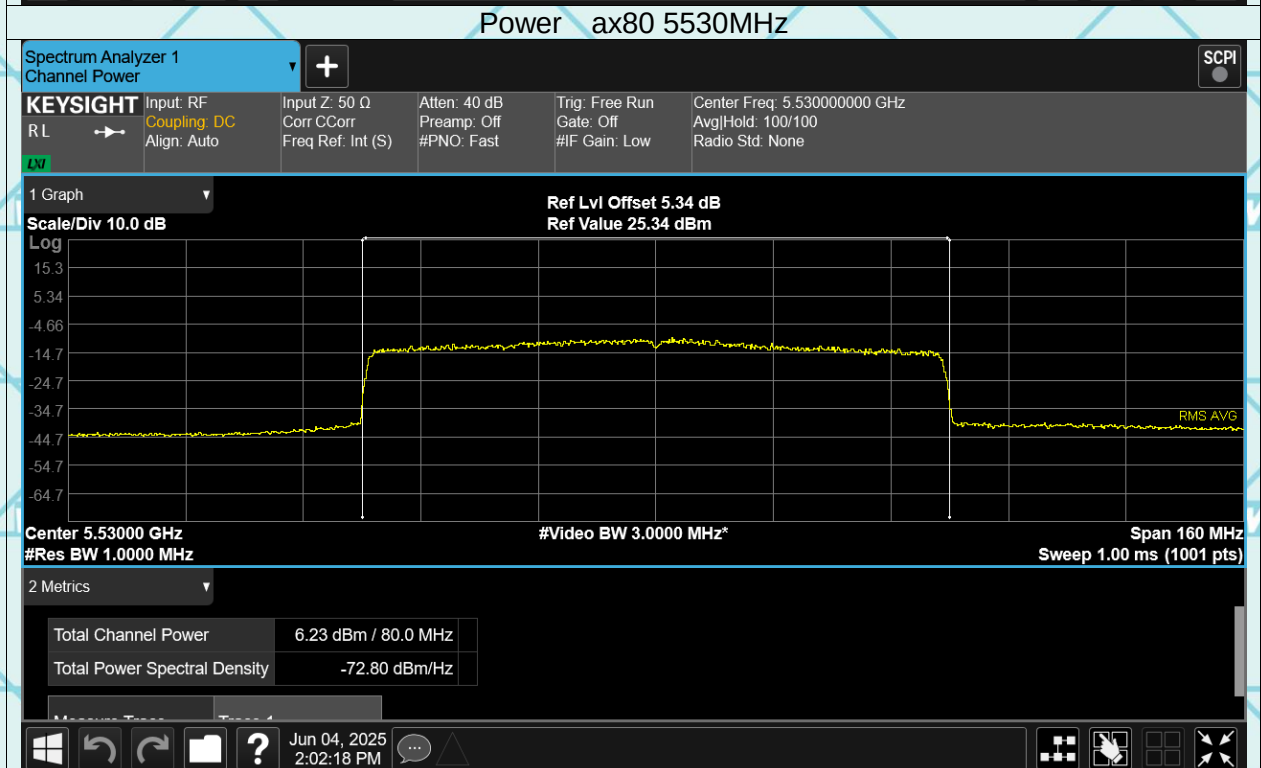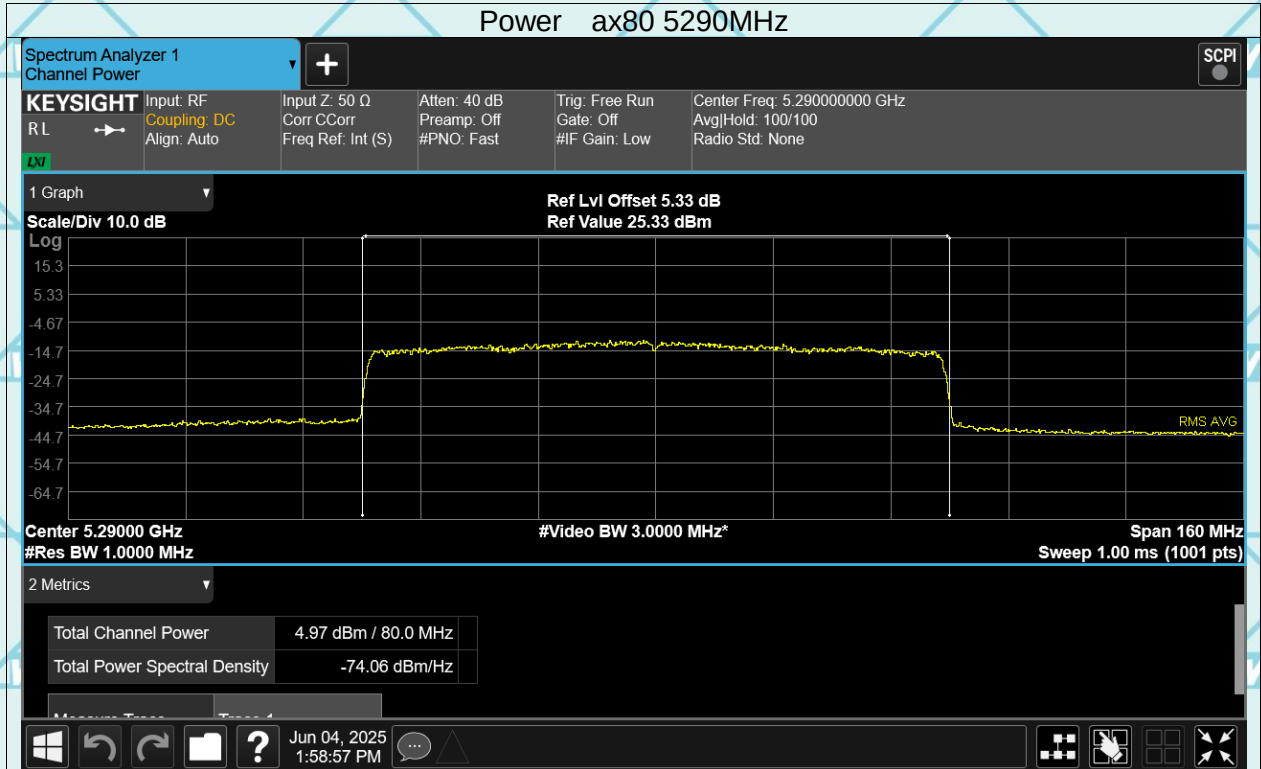

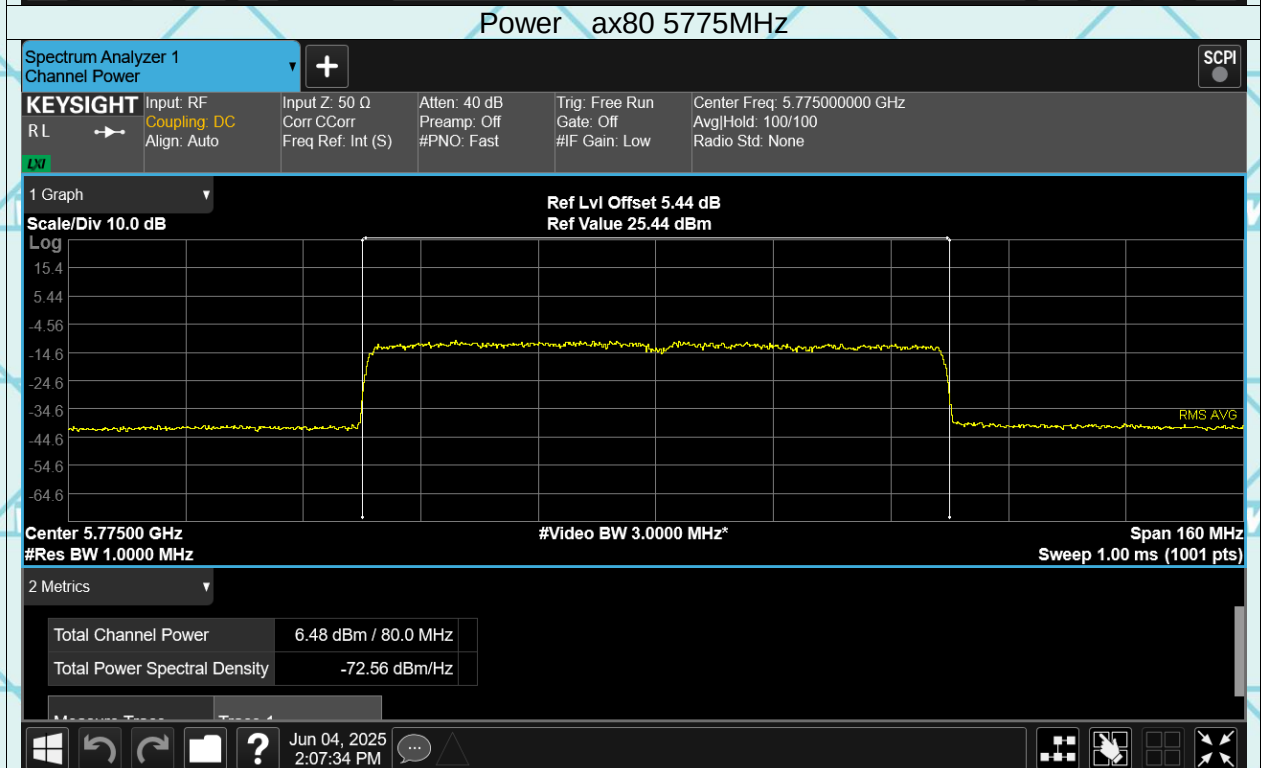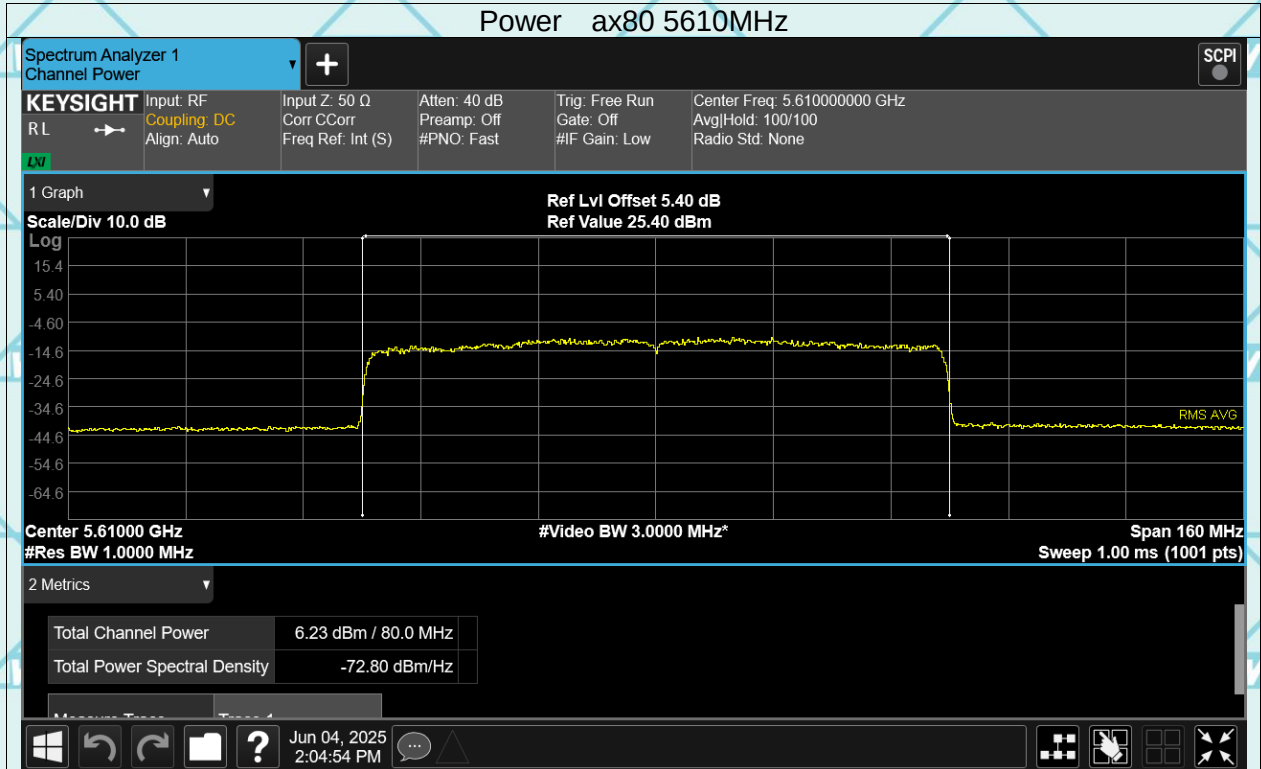

7.7 POWER SPECTRAL DENSITY

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Power Spectral Density	Temperature	: 25 °C
Test Voltage	: DC 3.91V	Humidity	: 56%RH
Test Result	: PASS		

Ant1

Mode	Frequency (MHz)	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
a	5180	-2.65	1.62	-1.03	11	Pass
a	5240	-2.18	1.62	-0.56	11	Pass
a	5260	-2.45	1.73	-0.72	11	Pass
a	5320	-2.75	1.62	-1.13	11	Pass
a	5500	-0.77	1.61	0.84	11	Pass
a	5700	-0.19	1.63	1.44	11	Pass
a	5745	-3.62	1.62	-2	30	Pass
a	5825	-4.03	1.61	-2.42	30	Pass
n20	5180	-3	1.73	-1.27	11	Pass
n20	5240	-2.69	1.73	-0.96	11	Pass
n20	5260	-2.4	1.71	-0.69	11	Pass
n20	5320	-3.01	1.71	-1.3	11	Pass
n20	5500	-1.45	1.71	0.26	11	Pass
n20	5700	-0.9	1.73	0.83	11	Pass
n20	5745	-3.91	1.71	-2.2	30	Pass
n20	5825	-3.82	1.71	-2.11	30	Pass
n40	5190	-6.38	2.92	-3.46	11	Pass
n40	5230	-5.75	2.94	-2.81	11	Pass
n40	5270	-5.53	2.94	-2.59	11	Pass
n40	5310	-5.8	2.94	-2.86	11	Pass
n40	5510	-5.14	2.92	-2.22	11	Pass
n40	5670	-4.41	2.86	-1.55	11	Pass
n40	5755	-6.77	2.92	-3.85	30	Pass
n40	5795	-7.2	2.92	-4.28	30	Pass
ac20	5180	-1.1	1.7	0.6	11	Pass
ac20	5240	-1.01	1.72	0.71	11	Pass
ac20	5260	-0.99	1.7	0.71	11	Pass
ac20	5320	-0.82	1.7	0.88	11	Pass
ac20	5500	0.5	1.7	2.2	11	Pass
ac20	5700	0.27	1.7	1.97	11	Pass
ac20	5745	-2.34	1.7	-0.64	30	Pass
ac20	5825	-2.5	1.7	-0.8	30	Pass
ac40	5190	-5.99	13.4	7.41	11	Pass
ac40	5230	-6.35	3.52	-2.83	11	Pass
ac40	5270	-6.09	3.7	-2.39	11	Pass
ac40	5310	-5.69	3.71	-1.98	11	Pass
ac40	5510	-5.71	2.92	-2.79	11	Pass
ac40	5670	-5.19	2.92	-2.27	11	Pass
ac40	5755	-7.7	2.92	-4.78	30	Pass
ac40	5795	-7.56	2.8	-4.76	30	Pass
ac80	5210	-10.74	4.65	-6.09	11	Pass
ac80	5290	-9.93	4.66	-5.27	11	Pass
ac80	5530	-9.29	3.94	-5.35	11	Pass
ac80	5610	-8.61	3.08	-5.53	11	Pass
ac80	5775	-11.55	3.05	-8.5	30	Pass
ax20	5180	-3.37	2.04	-1.33	11	Pass
ax20	5240	-2.81	2.09	-0.72	11	Pass
ax20	5260	-3.34	2.09	-1.25	11	Pass
ax20	5320	-3.24	2.09	-1.15	11	Pass
ax20	5500	-1.43	2.09	0.66	11	Pass
ax20	5700	-0.91	2.09	1.18	11	Pass
ax20	5745	-4.35	2.09	-2.26	30	Pass
ax20	5825	-3.77	2.09	-1.68	30	Pass
ax40	5190	-6.24	3.36	-2.88	11	Pass
ax40	5230	-5.41	3.36	-2.05	11	Pass
ax40	5270	-6.8	3.36	-3.44	11	Pass

Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi2

Issued Date: 20 June 2025

ax40	5310	-6.23	3.36	-2.87	11	Pass
ax40	5510	-4.89	3.36	-1.53	11	Pass
ax40	5670	-5.05	3.39	-1.66	11	Pass
ax40	5755	-7.21	3.36	-3.85	30	Pass
ax40	5795	-6.56	3.36	-3.2	30	Pass
ax80	5210	-9.82	4.97	-4.85	11	Pass
ax80	5290	-10.38	5.04	-5.34	11	Pass
ax80	5530	-9.37	5.01	-4.36	11	Pass
ax80	5610	-8.53	5.01	-3.52	11	Pass
ax80	5775	-11.59	5.05	-6.54	30	Pass

