

FCC PART 15.247 TEST REPORT

For

INFINIX MOBILITY LIMITED

FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET
FOTAN NT, Hong Kong

FCC ID: 2AIZN-X688C

Report Type: Original Report	Product Type: Mobile Phone
Report Number: RSZ201102004-00B	
Report Date: 2020-12-02	
Reviewed By: RF Engineer	Nancy Wang 
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE	11
APPLICABLE STANDARD	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	25
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	28

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(d) - BAND EDGES TESTING	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST DATA	55

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Mobile Phone
Tested Model	X688C
Frequency Range	Bluetooth: 2402~2480MHz
Transmit Power	Bluetooth:9.63dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	1.2dBi (It is provided by the applicant)
Voltage Range	DC 3.85 V from battery or DC 5.0V from adapter
Date of Test	2020-11-09 to 2020-11-26
Sample number	RSZ201102004-RF-S1(Assigned by BACL, Shenzhen)
Received date	2020-11-02
Sample/EUT Status	Good condition
Adapter information	Model: U100XSA Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

No exercise software was made to the EUT tested.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

For conducted emission:

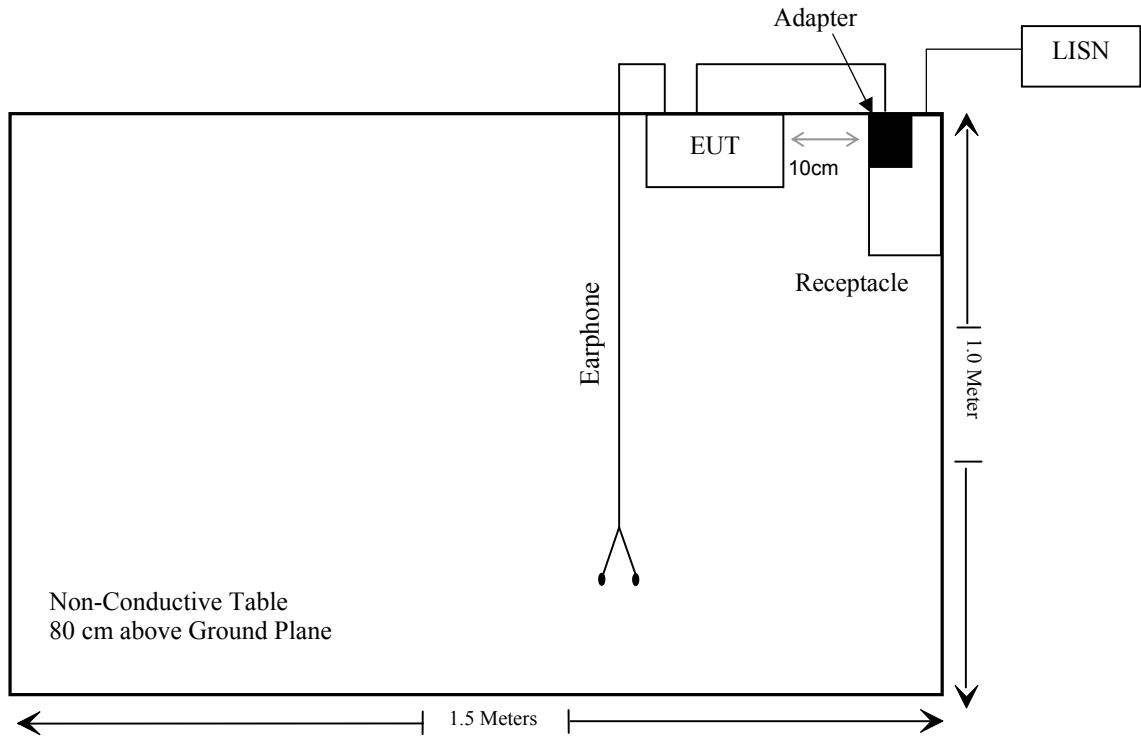

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknow	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknow	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknow	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknow	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/04/20	2021/04/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-021304	2017/12/06	2020/12/05

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2020/04/03	2021/04/02
WEINSCHTEL	3dB Attenuator	Unknown	F-03-EM121	2019/11/29	2020/11/28
Unknown	RF Cable	Unknown	2301 276	2019/11/29	2020/11/28

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2480	9.7	9.33	5	2.94	3.0	Yes

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 1.2 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Pass

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

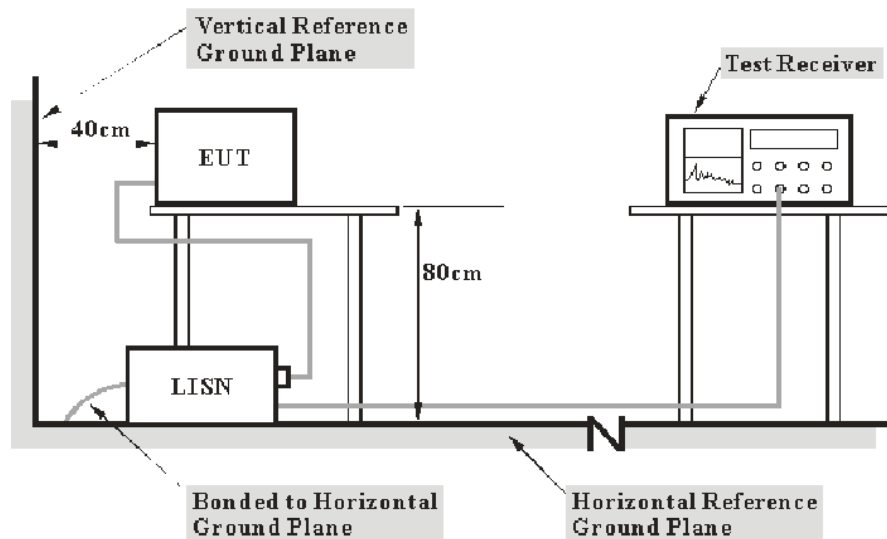

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2020-11-10.


EUT operation mode: Transmitting & charging (the worst case is GFSK Mode, Middle channel)

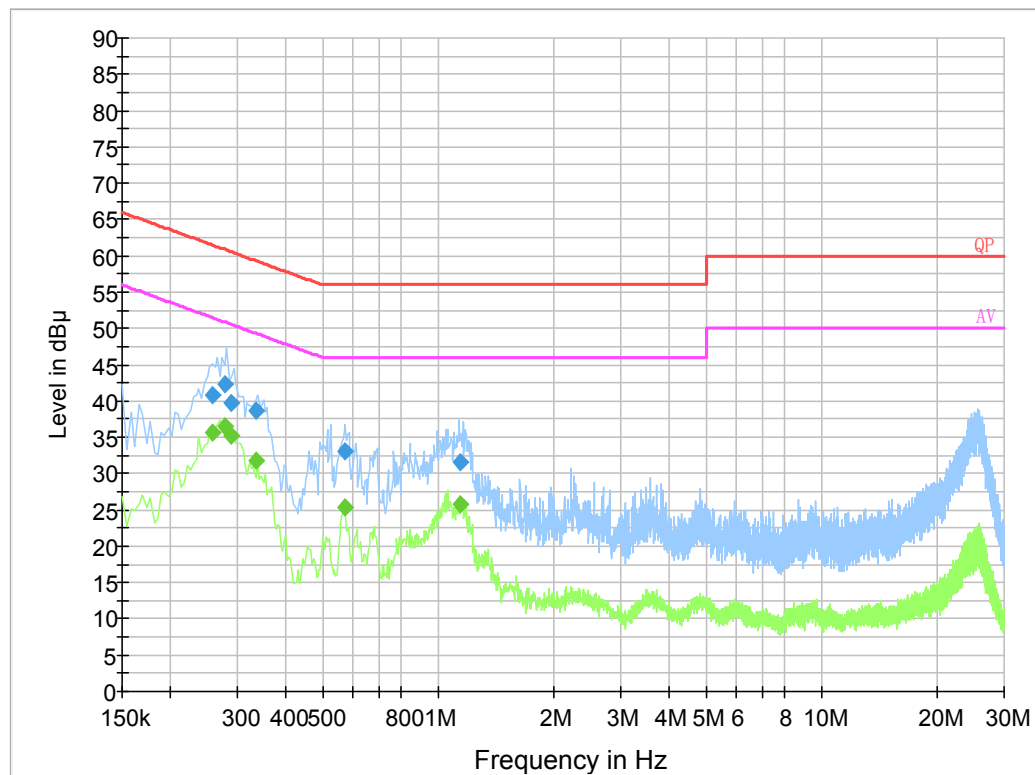AC 120V/60 Hz, Line**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.258500	40.8	9.000	L1	19.8	20.7	61.5
0.277500	42.4	9.000	L1	19.8	18.5	60.9
0.289500	39.7	9.000	L1	19.7	20.8	60.5
0.336930	38.6	9.000	L1	19.8	20.7	59.3
0.573390	33.1	9.000	L1	19.8	22.9	56.0
1.144930	31.5	9.000	L1	19.8	24.5	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.258500	35.6	9.000	L1	19.8	15.9	51.5
0.277500	36.4	9.000	L1	19.8	14.5	50.9
0.289500	35.2	9.000	L1	19.7	15.3	50.5
0.336930	31.8	9.000	L1	19.8	17.5	49.3
0.573390	25.3	9.000	L1	19.8	20.7	46.0
1.144930	25.8	9.000	L1	19.8	20.2	46.0

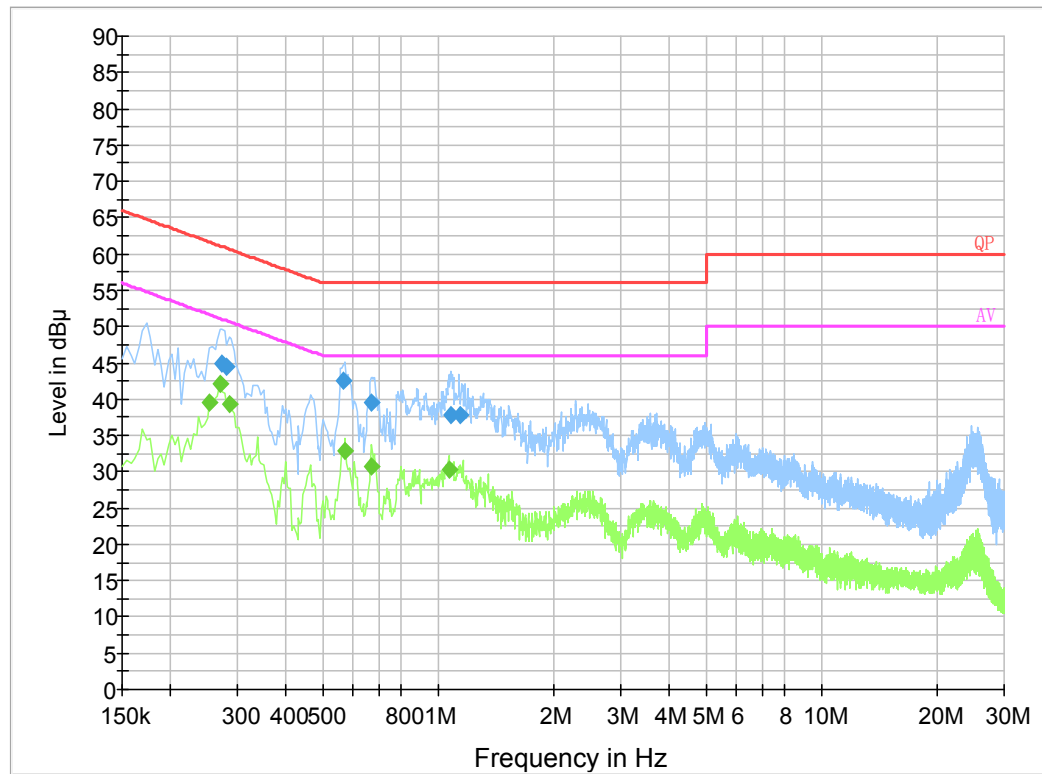AC 120V/60 Hz, Neutral**Final Result 1**



Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.273500	44.9	9.000	N	19.7	16.1	61.0
0.281500	44.5	9.000	N	19.7	16.3	60.8
0.565390	42.4	9.000	N	19.8	13.6	56.0
0.671950	39.4	9.000	N	19.8	16.6	56.0
1.081830	37.7	9.000	N	19.8	18.3	56.0
1.148990	37.8	9.000	N	19.8	18.2	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.254000	39.5	9.000	N	19.8	12.1	51.6
0.270000	42.2	9.000	N	19.7	8.9	51.1
0.286000	39.3	9.000	N	19.7	11.3	50.6
0.574000	32.9	9.000	N	19.8	13.1	46.0
0.670000	30.7	9.000	N	19.8	15.3	46.0
1.070000	30.4	9.000	N	19.8	15.6	46.0

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

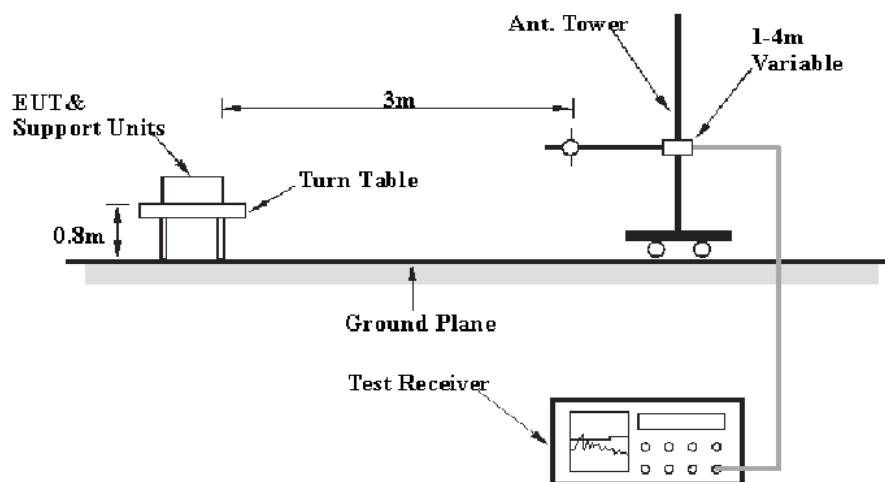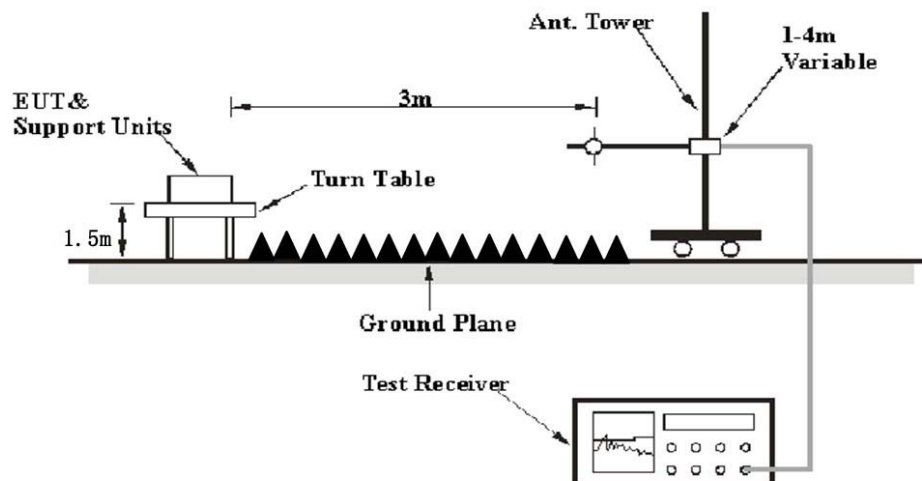EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Temperature:	27.4~30 °C
Relative Humidity:	42~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Charlie Cha on 2020-11-10 for below 1GHz and Leven Gan on 2020-11-09 and 2020-11-18 for above 1GHz.

EUT operation mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is GFSK Mode)

30 MHz~1 GHz: (the worst case is GFSK Mode, Middle channel)

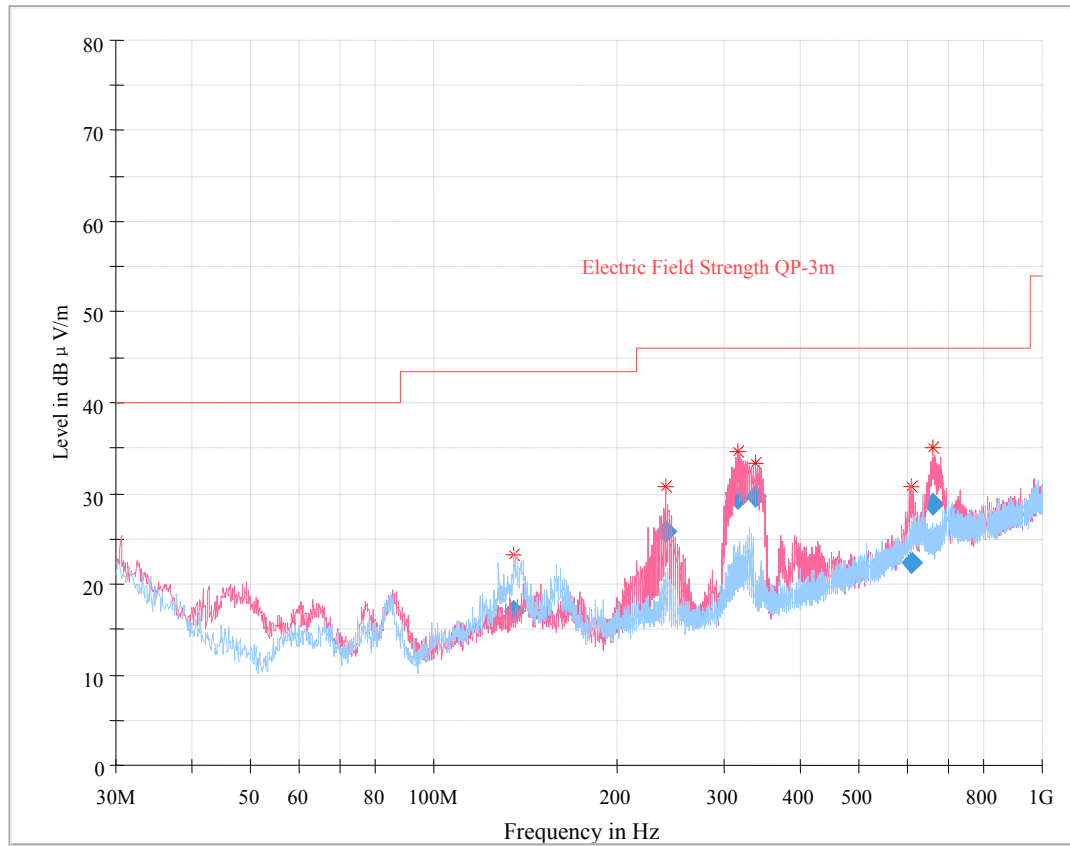

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
135.015500	17.05	43.50	26.45	317.0	H	72.0	-11.0
240.667375	25.78	46.00	20.22	161.0	V	42.0	-10.8
315.658375	29.44	46.00	16.56	102.0	V	176.0	-8.9
338.375500	29.69	46.00	16.31	108.0	V	134.0	-8.6
610.838125	22.45	46.00	23.55	131.0	V	160.0	-2.1
663.567750	28.73	46.00	17.27	134.0	V	102.0	-1.9

1 GHz - 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2388.47	28.45	PK	65	2.4	H	31.87	60.32	74	13.68
2388.47	14.12	Ave.	65	2.4	H	31.87	45.99	54	8.01
2484.52	28.73	PK	292	1.4	H	32.13	60.86	74	13.14
2484.52	14.25	Ave.	292	1.4	H	32.13	46.38	54	7.62
4804.00	44.37	PK	252	1.9	H	6.28	50.65	74	23.35
4804.00	30.42	Ave.	252	1.9	H	6.28	36.70	54	17.30
Middle Channel (2441 MHz)									
4882.00	44.52	PK	281	2.2	H	6.76	51.28	74	22.72
4882.00	30.44	Ave.	281	2.2	H	6.76	37.20	54	16.80
High Channel (2480 MHz)									
2387.55	28.69	PK	202	2.1	H	31.87	60.56	74	13.44
2387.55	14.17	Ave.	202	2.1	H	31.87	46.04	54	7.96
2483.96	28.82	PK	89	1.6	H	32.13	60.95	74	13.05
2483.96	14.27	Ave.	89	1.6	H	32.13	46.40	54	7.60
4960.00	44.48	PK	269	1.6	H	6.80	51.28	74	22.72
4960.00	30.72	Ave.	269	1.6	H	6.80	37.52	54	16.48

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude



The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.


Pre-scan with middle channel Peak Horizontal

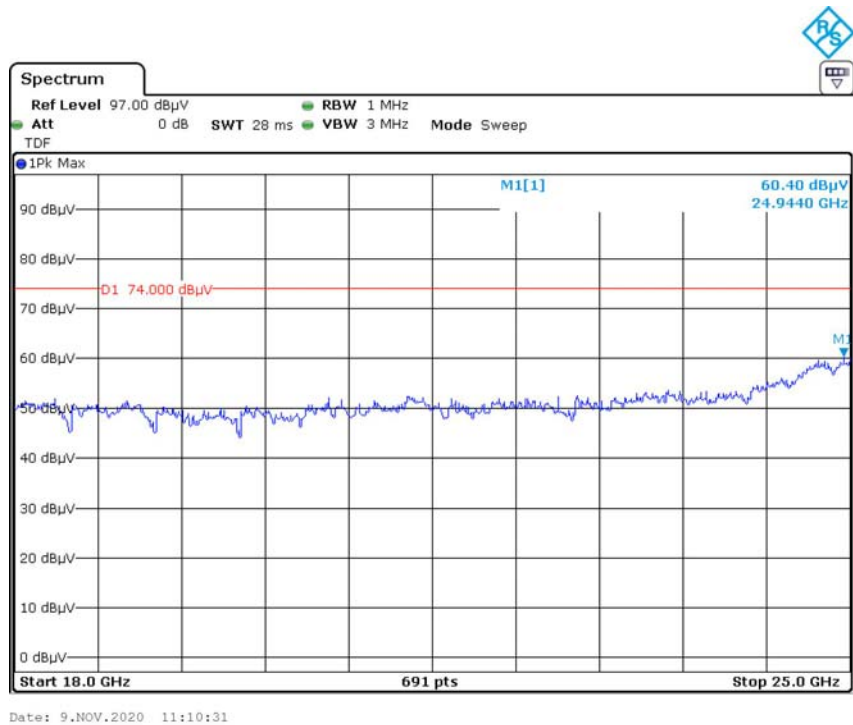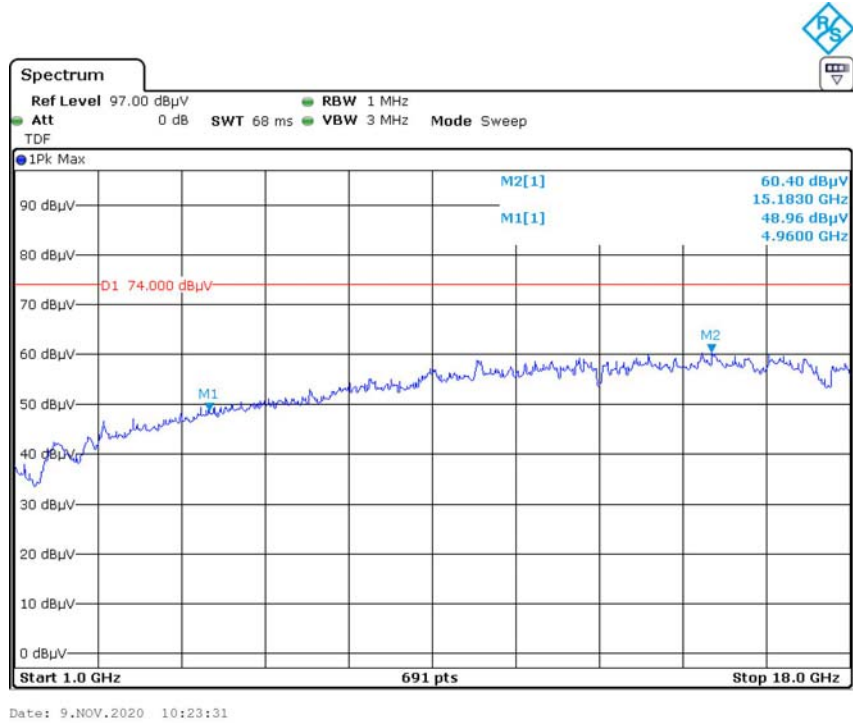


Vertical

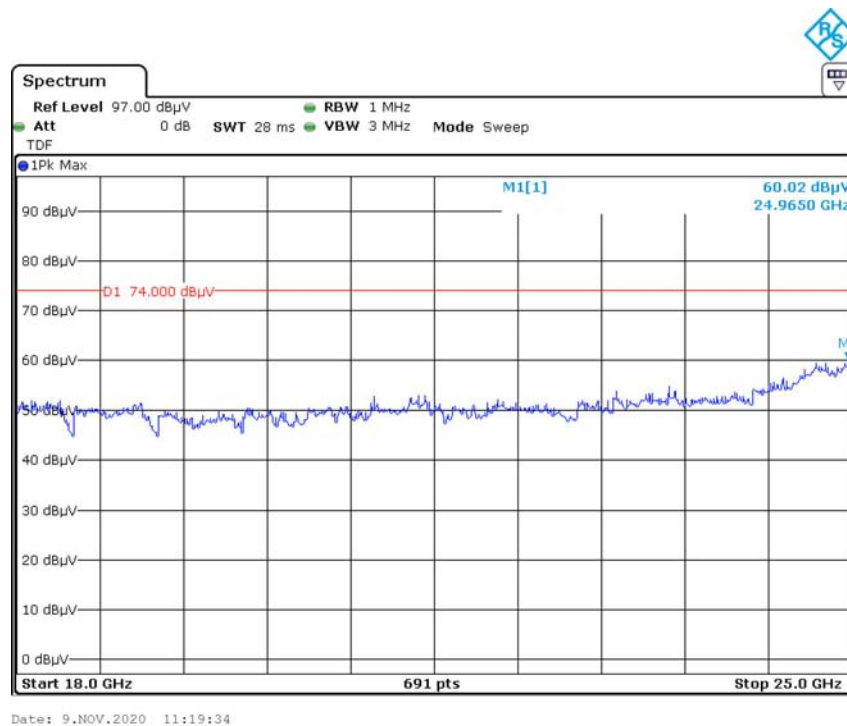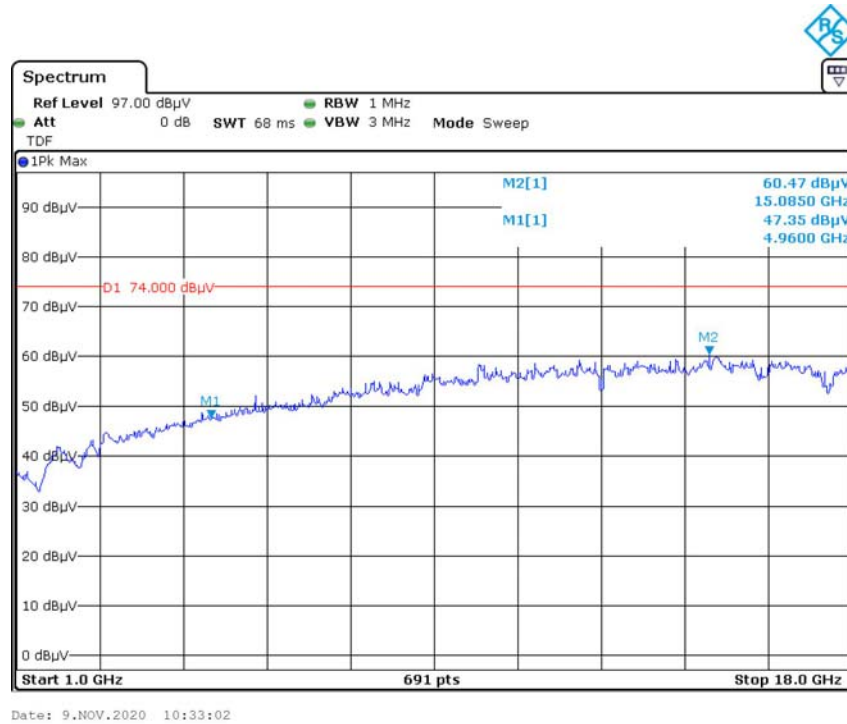

Pre-scan for Average Horizontal


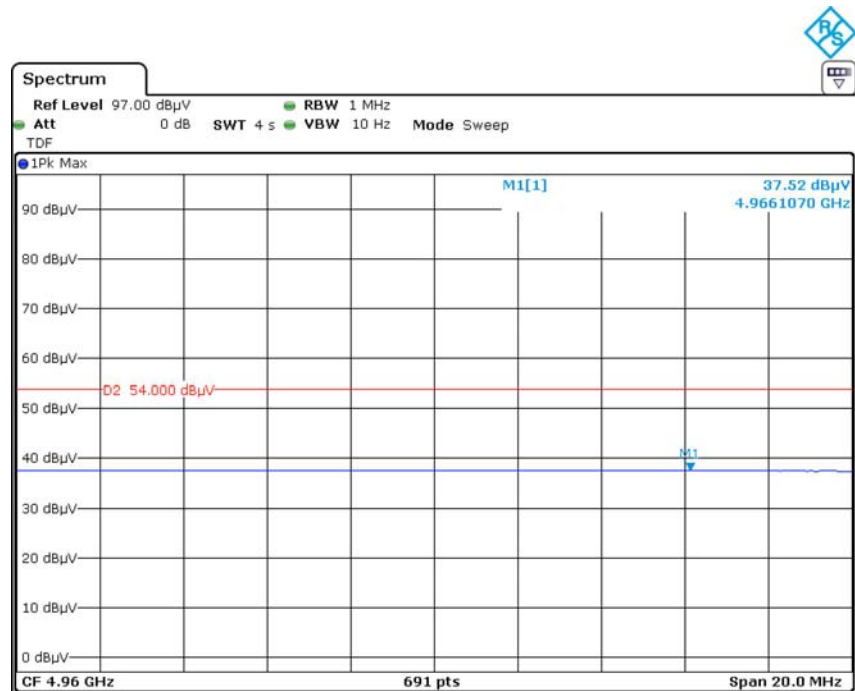


Date: 9.NOV.2020 10:27:16

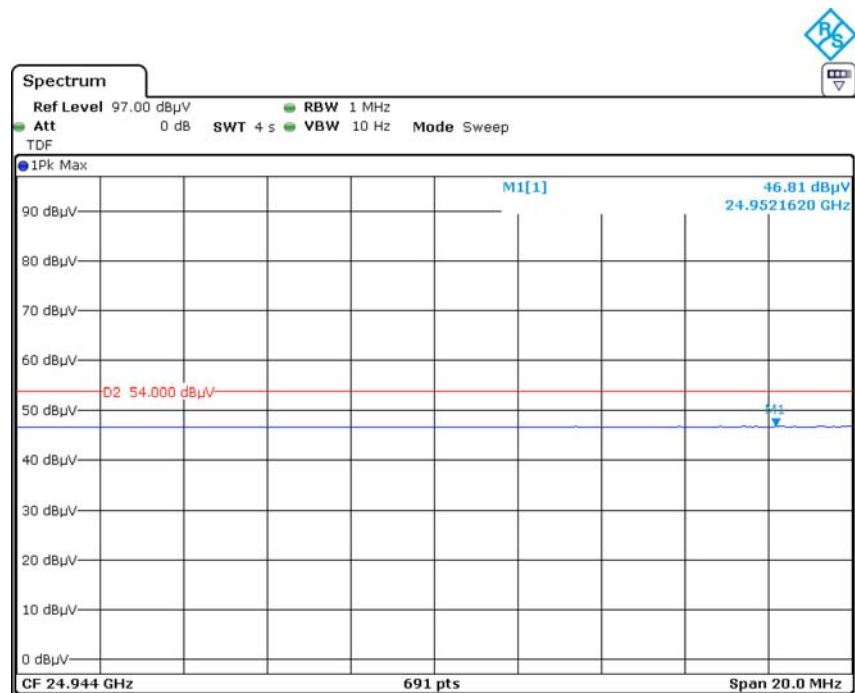

Date: 9.NOV.2020 11:14:59

Vertical

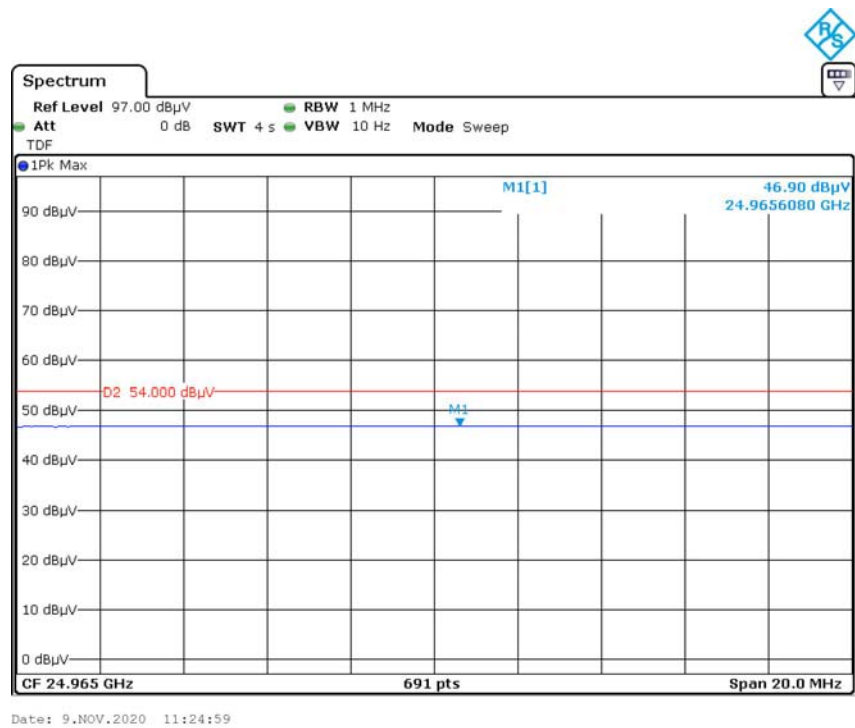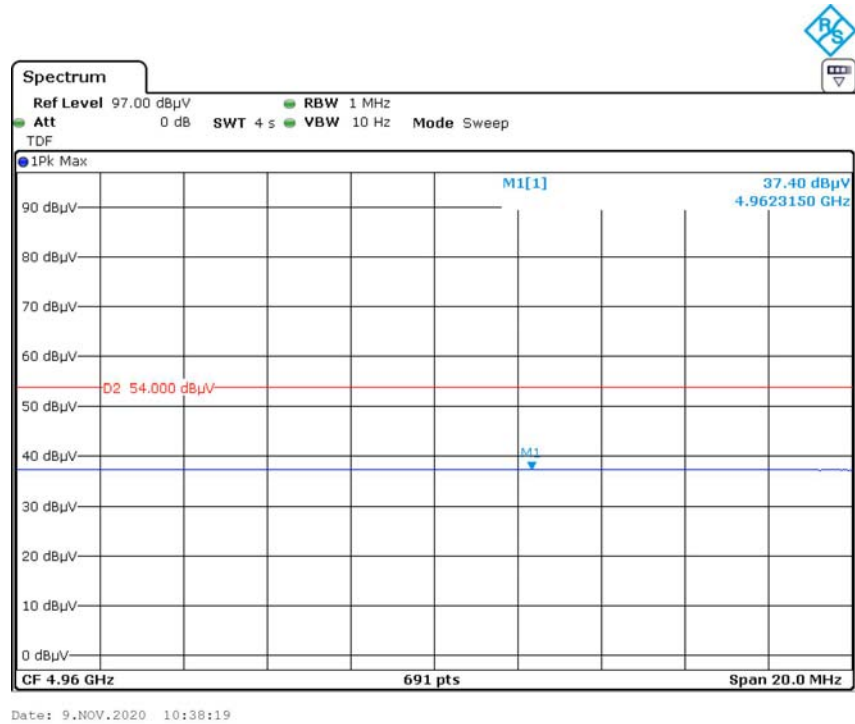

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	30 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 2020-11-09.

EUT operation mode: Transmitting

Result: Pass

Please refer to following table and plots.

Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
BDR(GFSK)					
Middle	0.984	1.000	0.667	> two-thirds of the 20 dB bandwidth	Pass
EDR($\pi/4$-DQPSK)					
Middle	1.016	1.240	0.827	> two-thirds of the 20 dB bandwidth	Pass
EDR(8DPSK)					
Middle	1.006	1.250	0.833	> two-thirds of the 20 dB bandwidth	Pass

Please refer to the following plots.

Ref 23.5 dBm Att 45 dB

RBW 100 kHz VBW 300 kHz SWT 2.5 ms

Marker 1 [T1] 7.20 dBm 2.440852564 GHz


Offset 3.5 dB Delta 1 [T1] -0.30 dB 983.974358965 kHz

1 PK MAXH

Center 2.4415 GHz 200 kHz/ Span 2 MHz

Page 26 of 61

EDR (8DPSK): Middle Channel

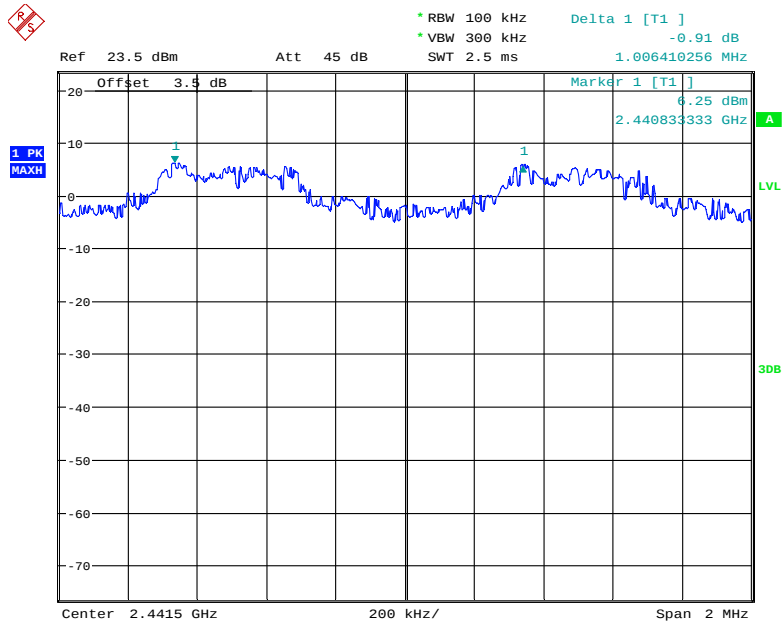

Date: 9.NOV.2020 08:48:47

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	30 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 2020-11-22 and 2020-11-26.

EUT operation mode: Transmitting

Result: Pass


Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.955
	Middle	2441	1.000
	High	2480	1.006
EDR ($\pi/4$-DQPSK)	Low	2402	1.240
	Middle	2441	1.240
	High	2480	1.247
EDR (8DPSK)	Low	2402	1.260
	Middle	2441	1.250
	High	2480	1.256

BDR (GFSK): Low Channel


Date: 22.NOV.2020 09:32:44

BDR (GFSK): Middle Channel

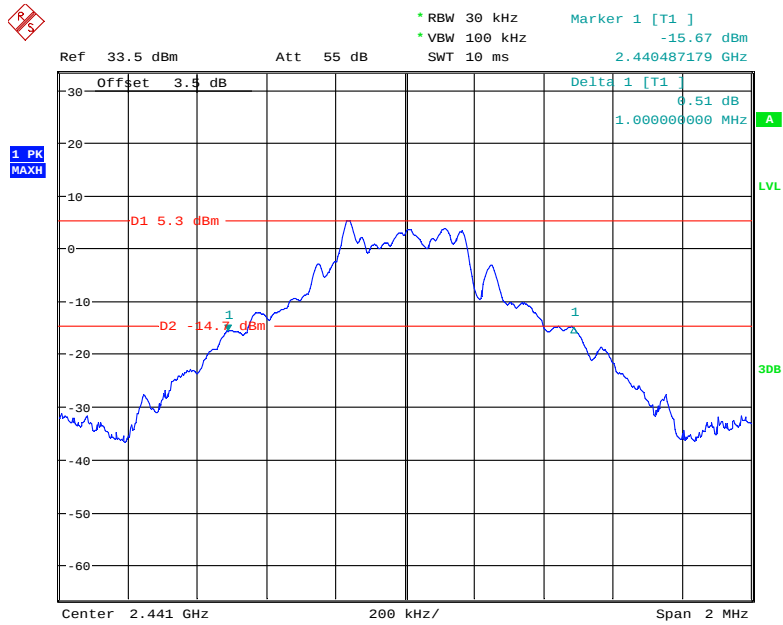


Date: 22.NOV.2020 09:34:14

BDR (GFSK): High Channel

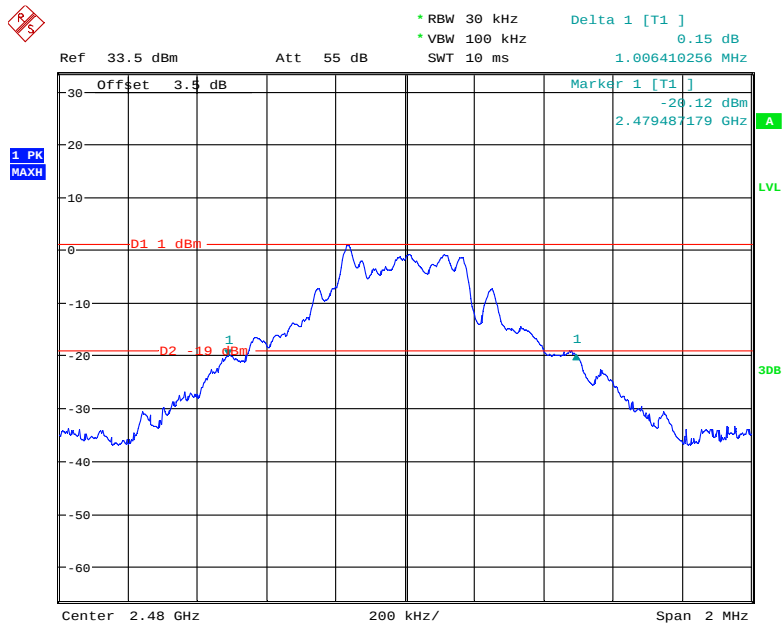


Date: 22.NOV.2020 09:35:11

EDR ($\pi/4$ -DQPSK): Low Channel

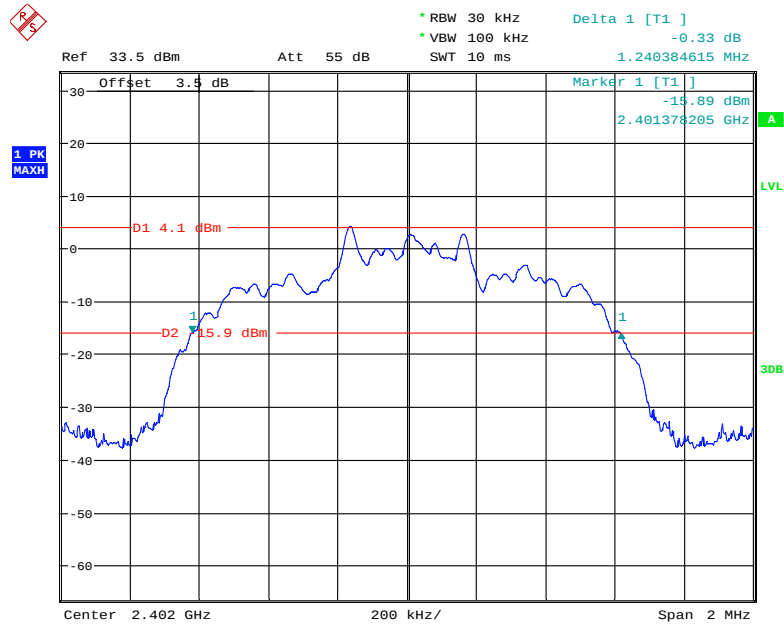


Date: 22.NOV.2020 09:45:24

EDR ($\pi/4$ -DQPSK): Middle Channel

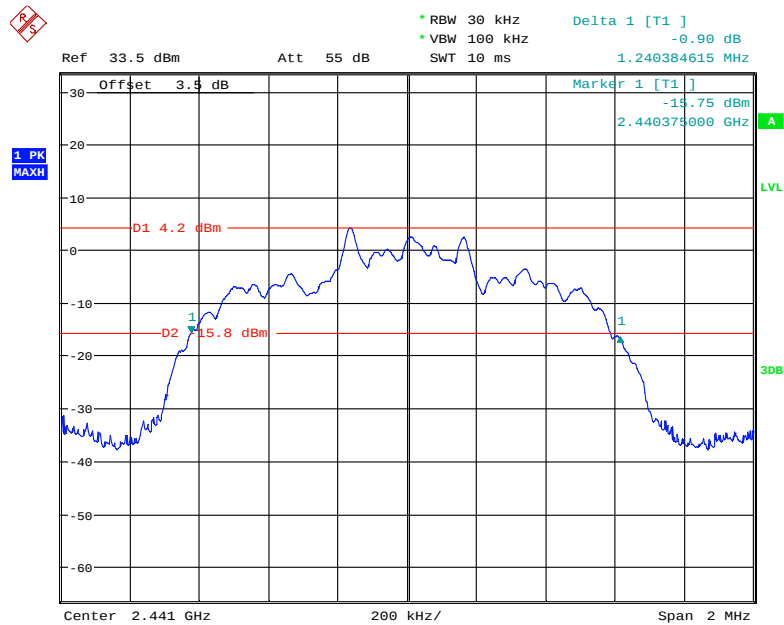


Date: 22.NOV.2020 09:44:44

EDR ($\pi/4$ -DQPSK): High Channel

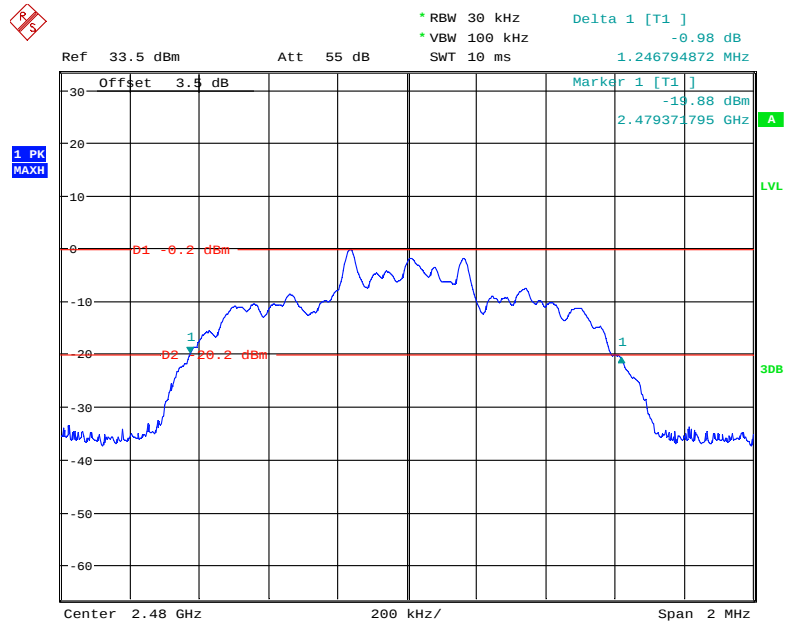


Date: 22.NOV.2020 09:44:01

EDR (8DPSK): Low Channel

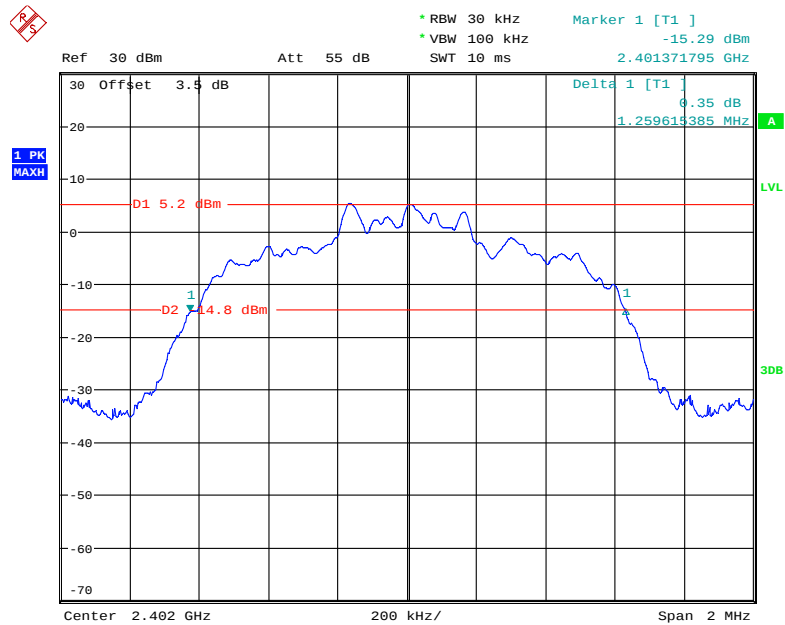


Date: 26.NOV.2020 08:17:12

EDR (8DPSK): Middle Channel

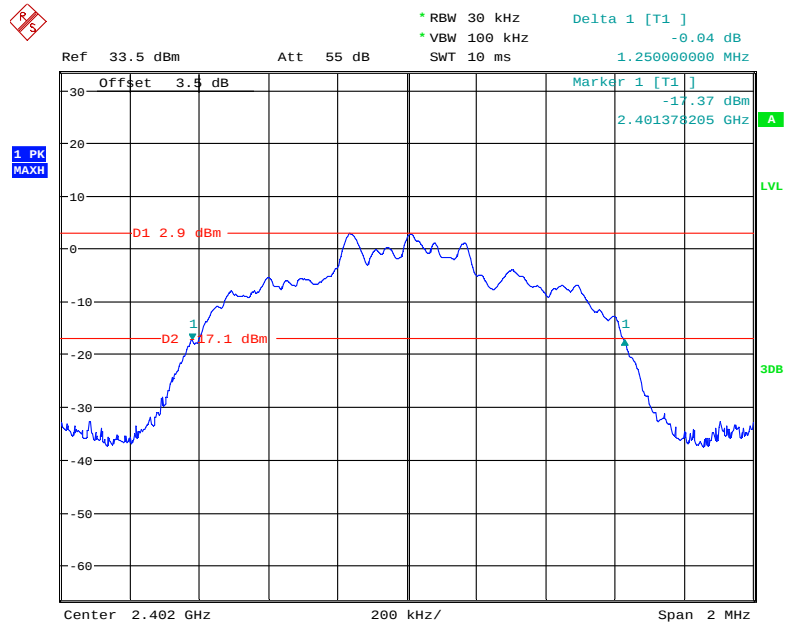

Date: 22.NOV.2020 09:40:39

EDR (8DPSK): High Channel

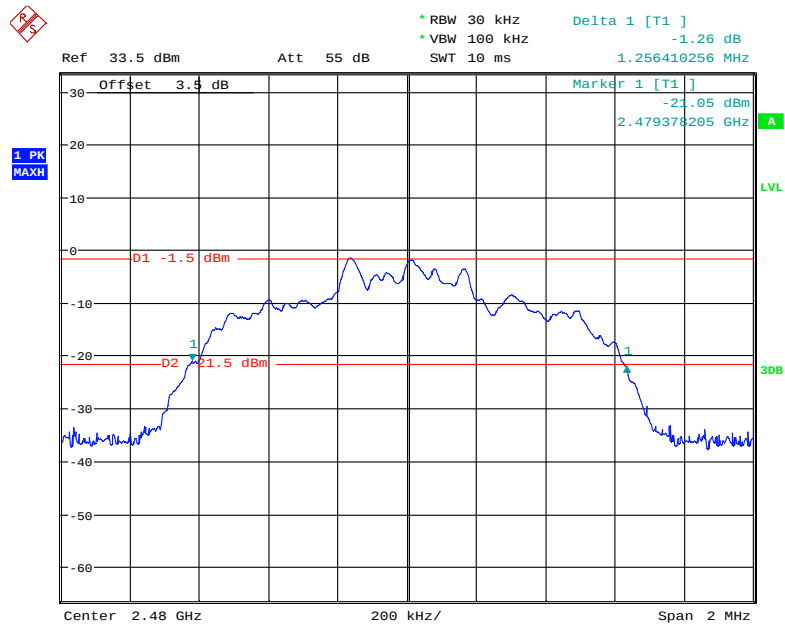

Date: 22.NOV.2020 09:42:10

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

Temperature:	30 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 2020-11-09.


EUT operation mode: Transmitting

Result: Pass

Please refer to following table and plots.


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

BDR (GFSK): Number of Hopping Channels

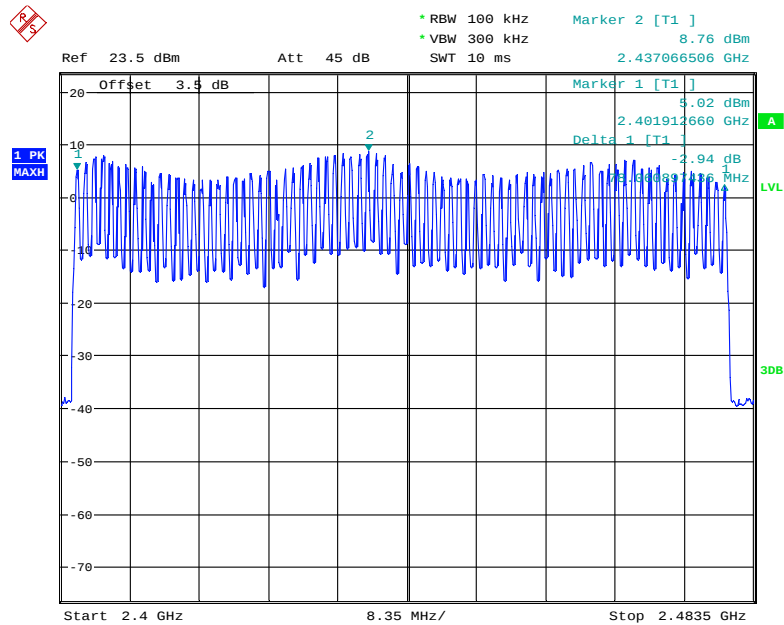


Date: 9.NOV.2020 09:02:38

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

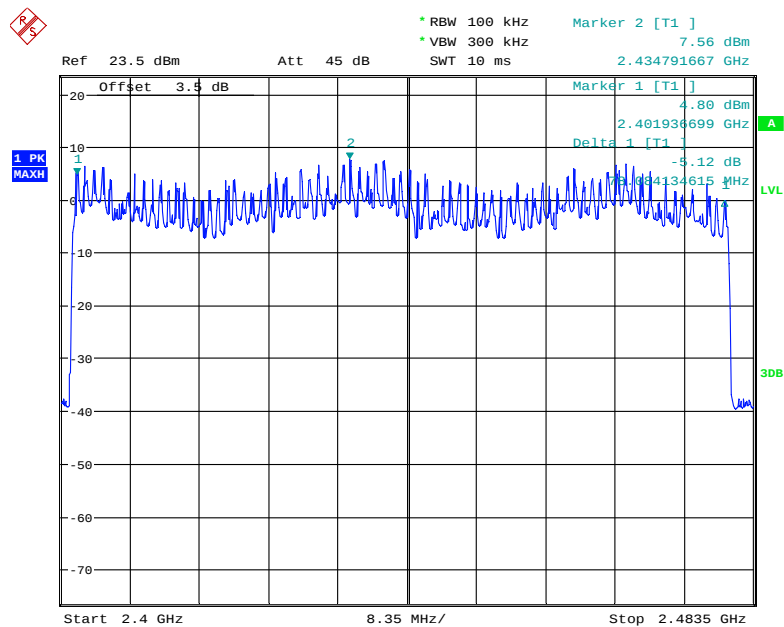

Date: 9.NOV.2020 08:54:42

EDR (8DPSK): Number of Hopping Channels

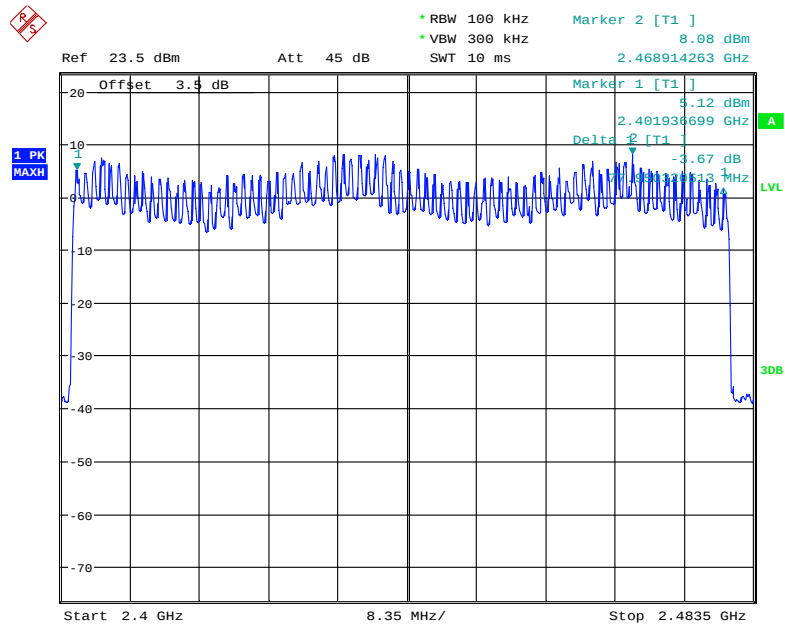

Date: 9.NOV.2020 08:52:46

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWEELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data**Environmental Conditions**

Temperature:	30 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 2020-11-22.

EUT operation mode: Transmitting

Result: Pass

Please refer to following table and plots

Test Mode	Channel	Pulse Time (ms)	Total Hops	Period Time (s)	Dwell Time (ms)	Limit (ms)	Result
Test mode: BDR mode(GFSK)							
DH 1	Hop	0.391	340	31.6	132.94	400	Pass
DH 3	Hop	1.660	150	31.6	249.00	400	Pass
DH 5	Hop	2.911	110	31.6	320.21	400	Pass
Test mode: EDR mode($\pi/4$ -DQPSK)							
2DH 1	Hop	0.395	320	31.6	126.40	400	Pass
2DH 3	Hop	1.663	150	31.6	249.45	400	Pass
2DH 5	Hop	2.911	130	31.6	378.43	400	Pass
Test mode: EDR mode(8 DPSK)							
3DH 1	Hop	0.396	320	31.6	126.72	400	Pass
3DH 3	Hop	1.660	190	31.6	315.40	400	Pass
3DH 5	Hop	2.923	120	31.6	350.76	400	Pass


Note 1: A period time=0.4*79=31.6(S), Dwell Time= Pulse Time* Total Hops

Note 2: Total hops =Hopping Number in 3.16s*10

Note 3: Hopping Number in 3.16s = Total of highest signals in 3.16s (Second high signals were other channel)


BDR (GFSK):

DH1

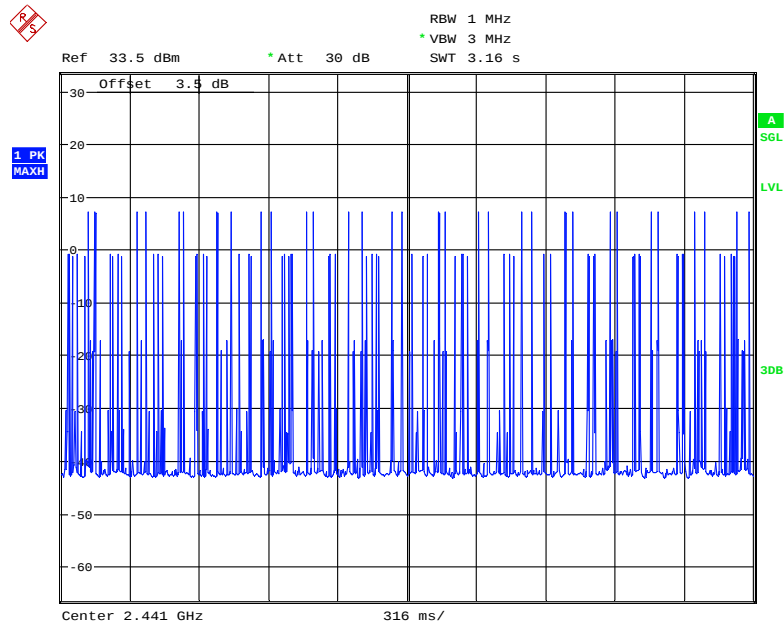


Date: 22.NOV.2020 10:04:27

Pulse time, Hop Channel, DH1

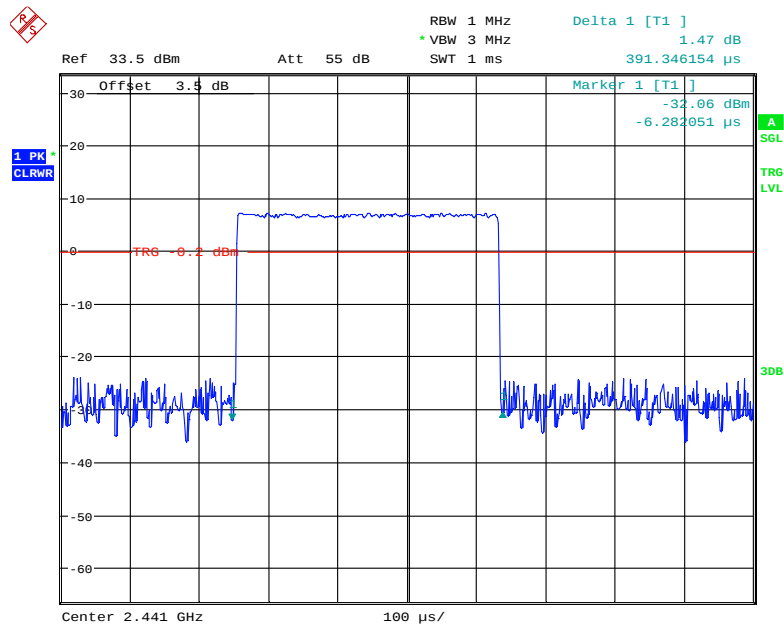


Date: 22.NOV.2020 09:51:42

DH3

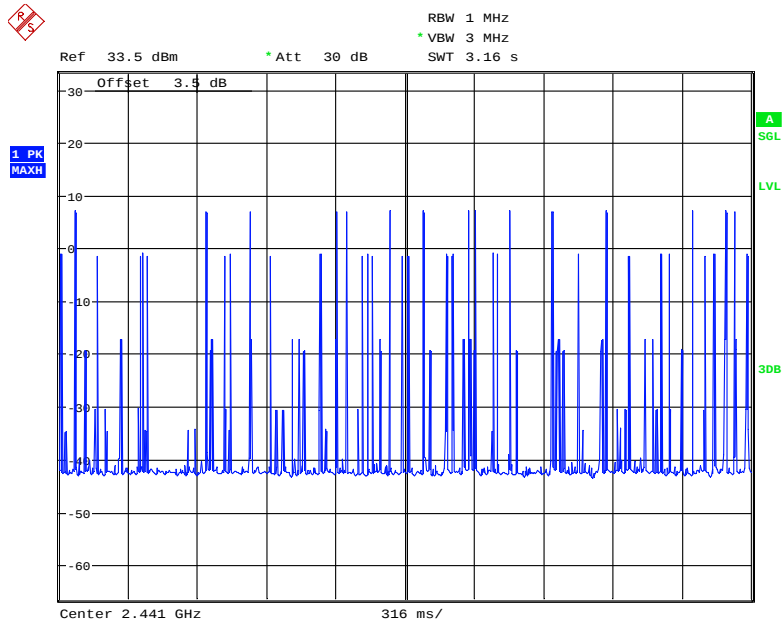


Date: 22.NOV.2020 10:03:50

Pulse time, Hop Channel, DH3

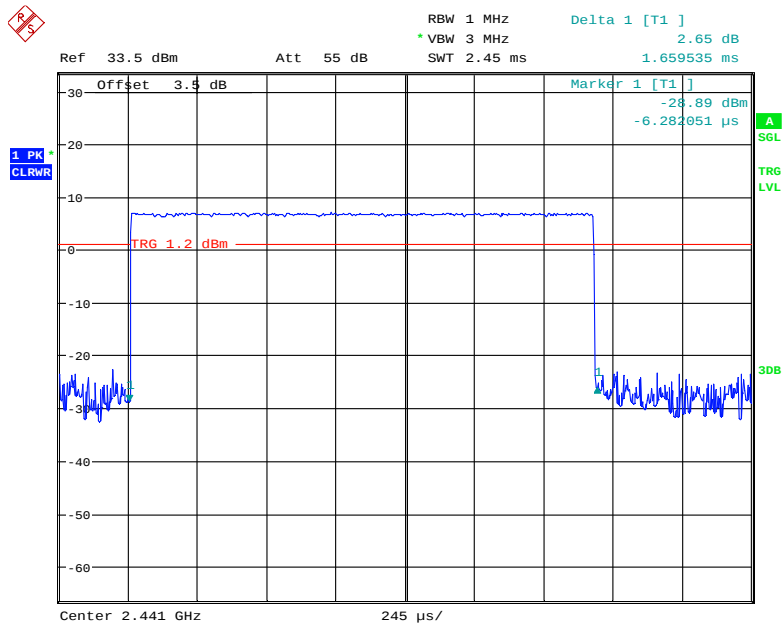


Date: 22.NOV.2020 09:52:42

DH5

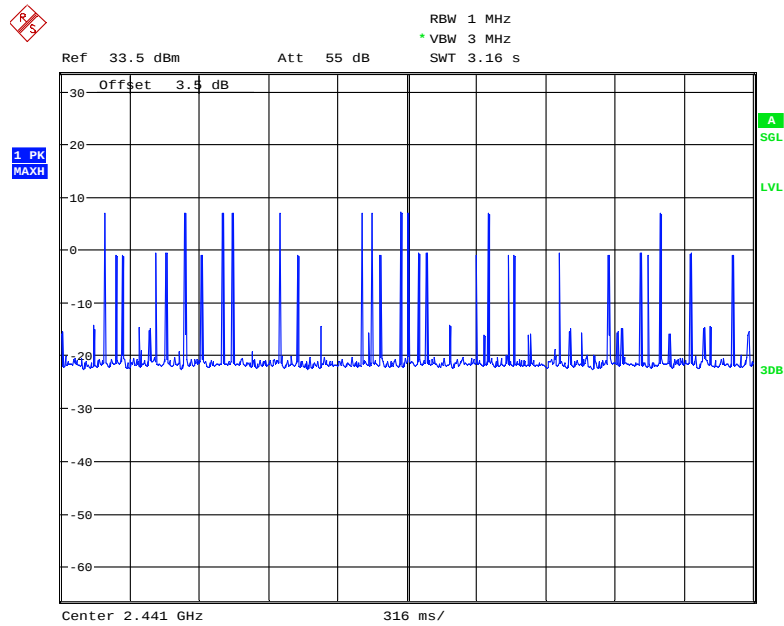

Date: 22.NOV.2020 10:00:28


Pulse time, Hop Channel, DH5

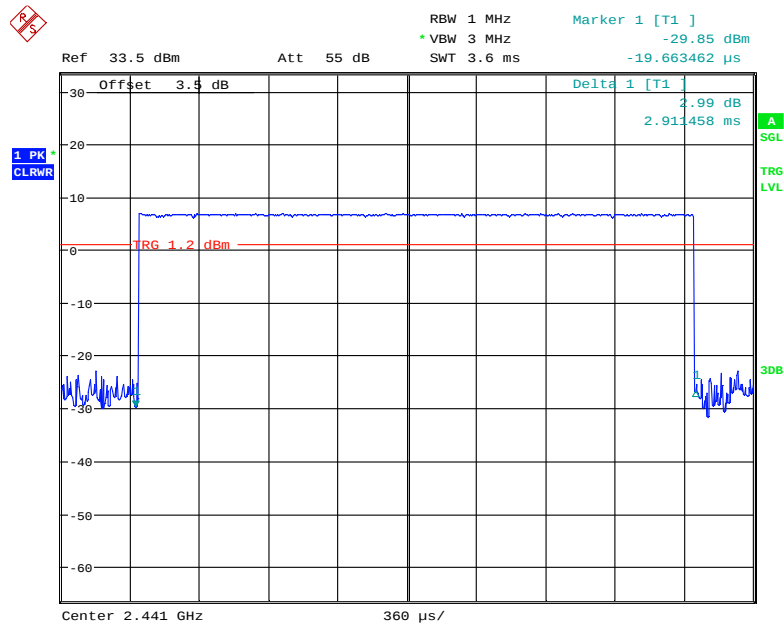

Date: 22.NOV.2020 09:58:36


EDR ($\pi/4$ -DQPSK):

2DH1

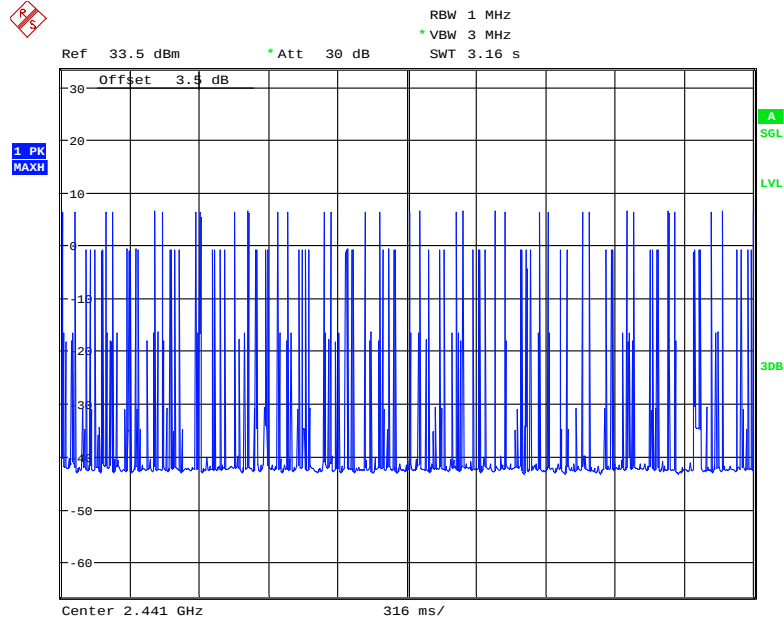


Date: 22.NOV.2020 10:04:56

Pulse time, Hop Channel, 2DH1

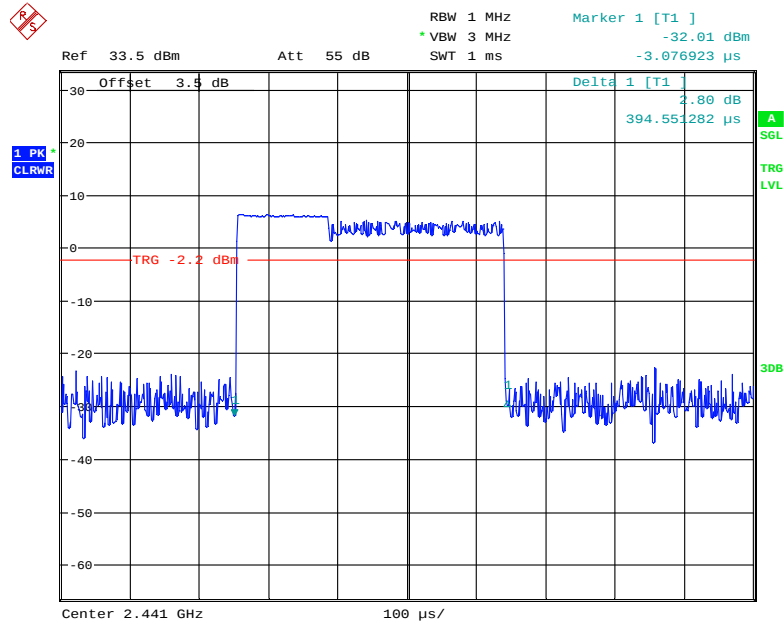


Date: 22.NOV.2020 09:48:56

2DH3

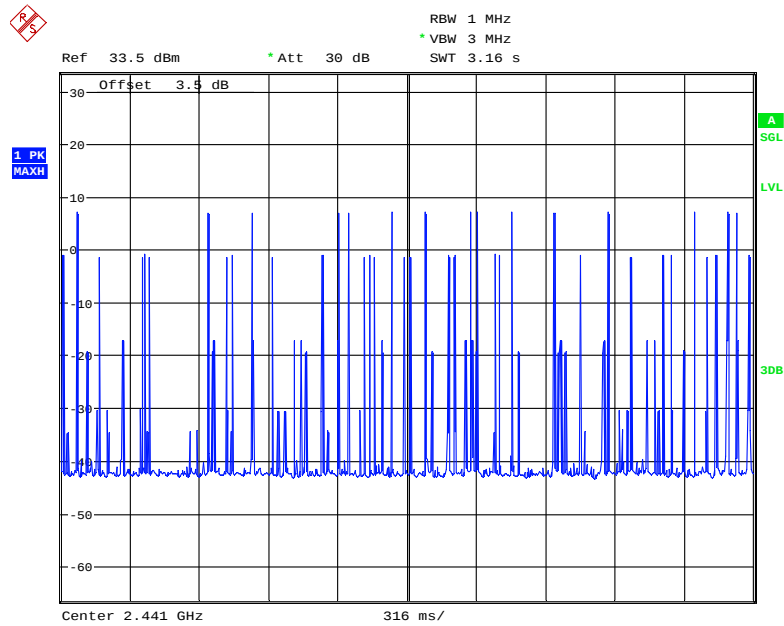


Date: 22.NOV.2020 10:03:44

Pulse time, Hop Channel, 2DH3

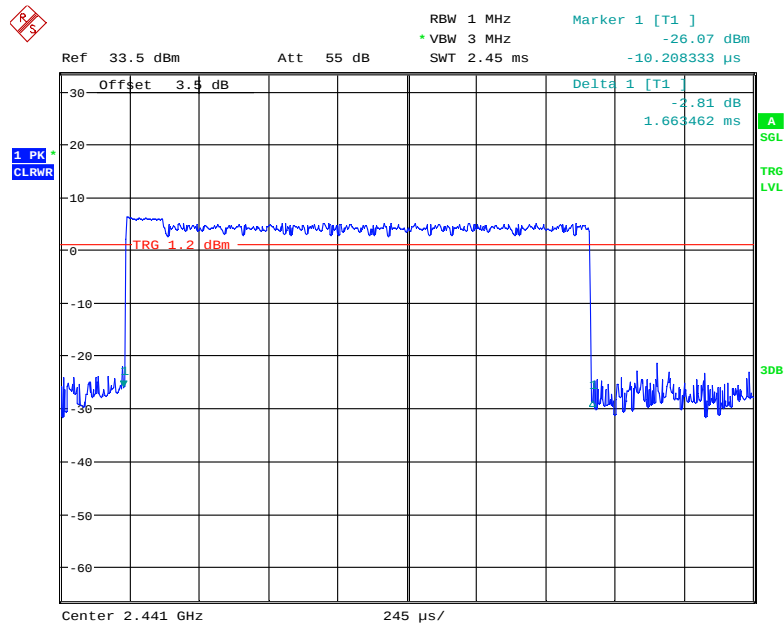


Date: 22.NOV.2020 09:53:31

2DH5

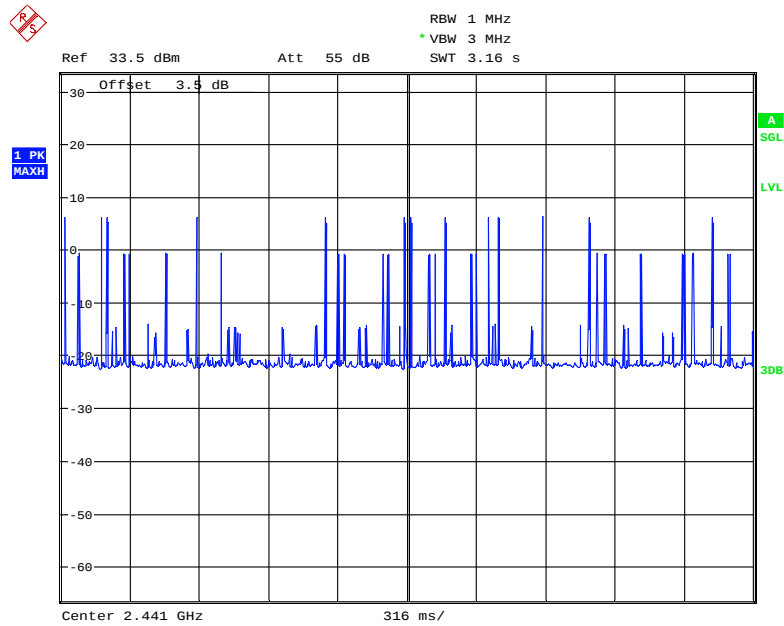


Date: 22.NOV.2020 10:01:06

Pulse time, Hop Channel, 2DH5

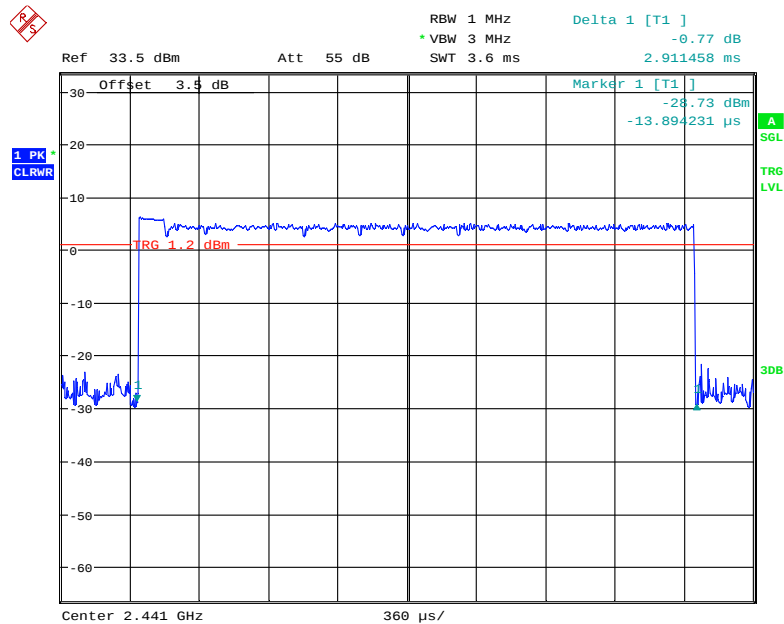


Date: 22.NOV.2020 09:58:06

EDR (8DPSK): 3DH1

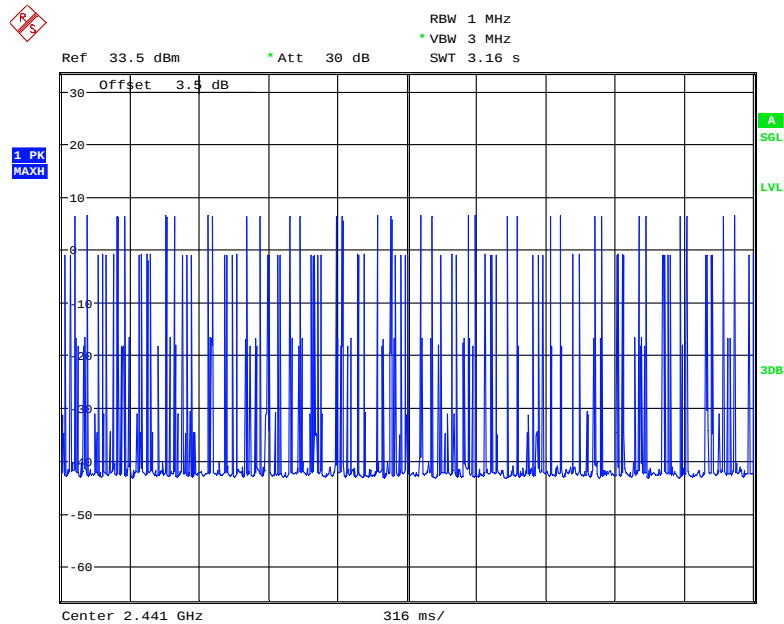


Date: 22.NOV.2020 10:05:21

Pulse time, Hop Channel, 3DH1

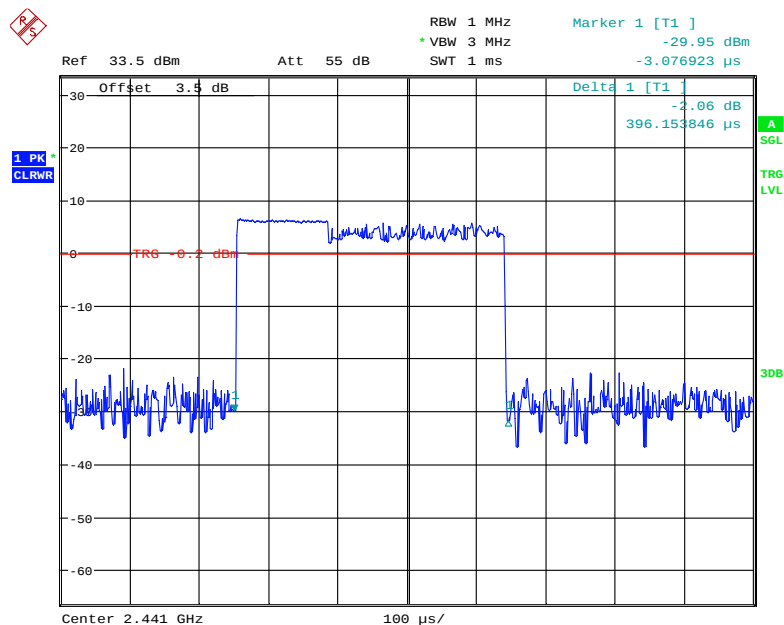


Date: 22.NOV.2020 09:51:10

3DH3

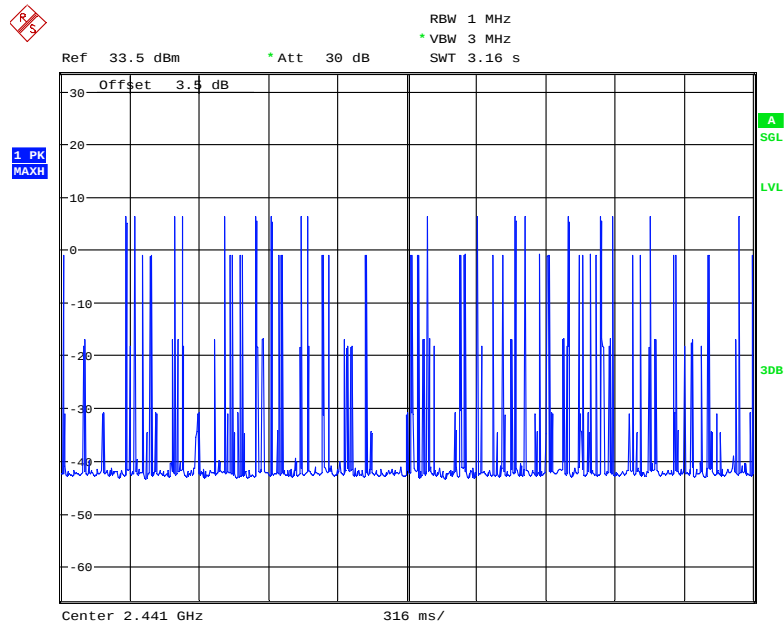


Date: 22.NOV.2020 10:02:34

Pulse time, Hop Channel, 3DH3

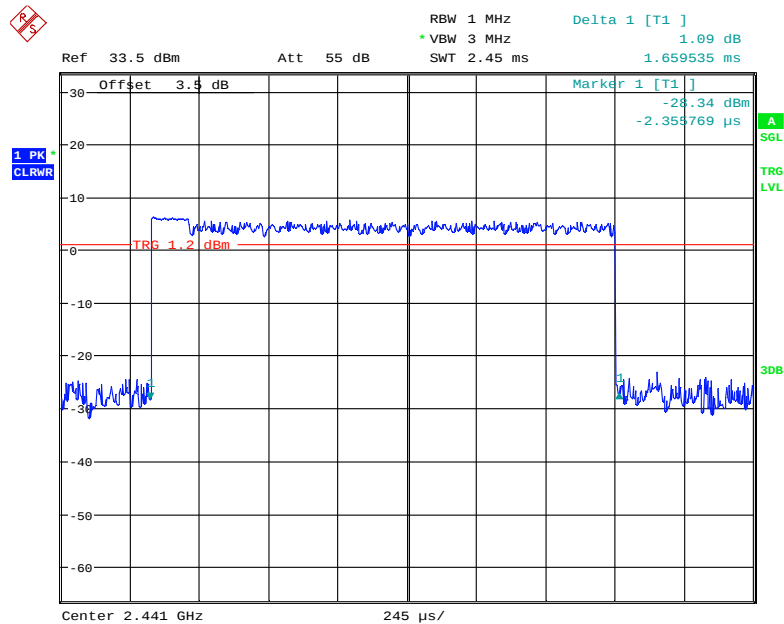


Date: 22.NOV.2020 09:54:25

3DH5

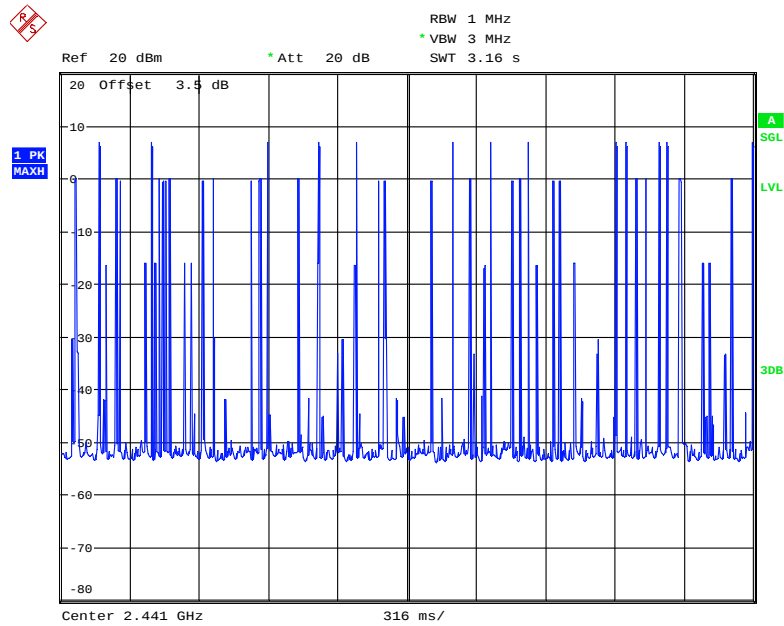

Date: 22.NOV.2020 10:33:05

Pulse time, Hop Channel, 3DH5

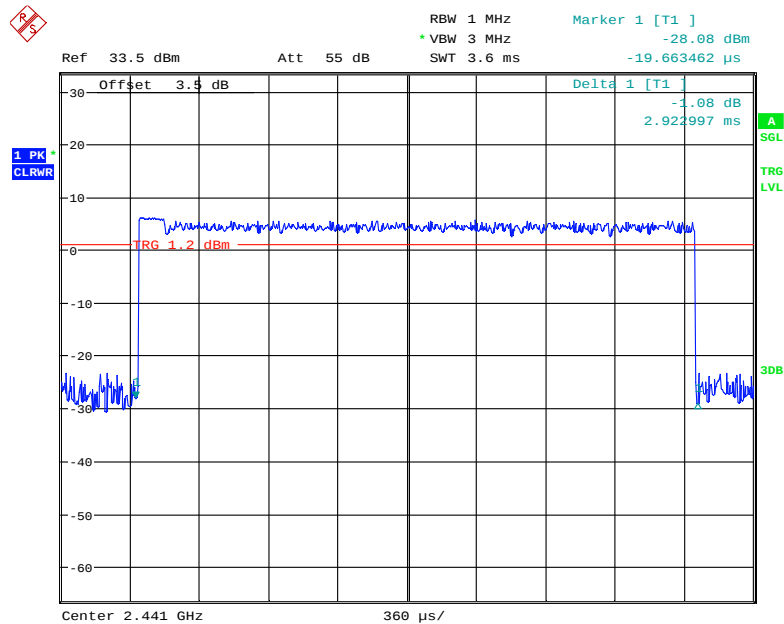

Date: 22.NOV.2020 09:57:35

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	30 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu from 2020-11-09 to 2020-11-22.


EUT operation mode: Transmitting

Result: Pass

Please refer to following table.


Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
BDR (GFSK)	Low	2402	7.16	21
	Middle	2441	7.98	21
	High	2480	2.68	21
	Max Channel	2437	9.63	21
EDR ($\pi/4$-DQPSK)	Low	2402	6.40	21
	Middle	2441	7.22	21
	High	2480	1.99	21
	Max Channel	2435	8.62	21
EDR (8DPSK)	Low	2402	6.44	21
	Middle	2441	7.21	21
	High	2480	2.00	21
	Max Channel	2469	8.96	21

BDR (GFSK): Low Channel

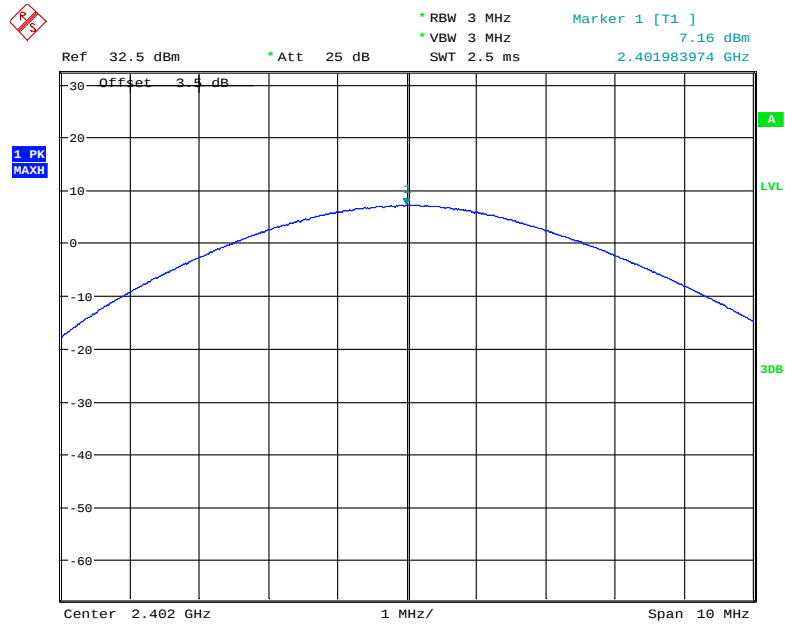


Date: 9.NOV.2020 06:51:24

BDR (GFSK): Middle Channel

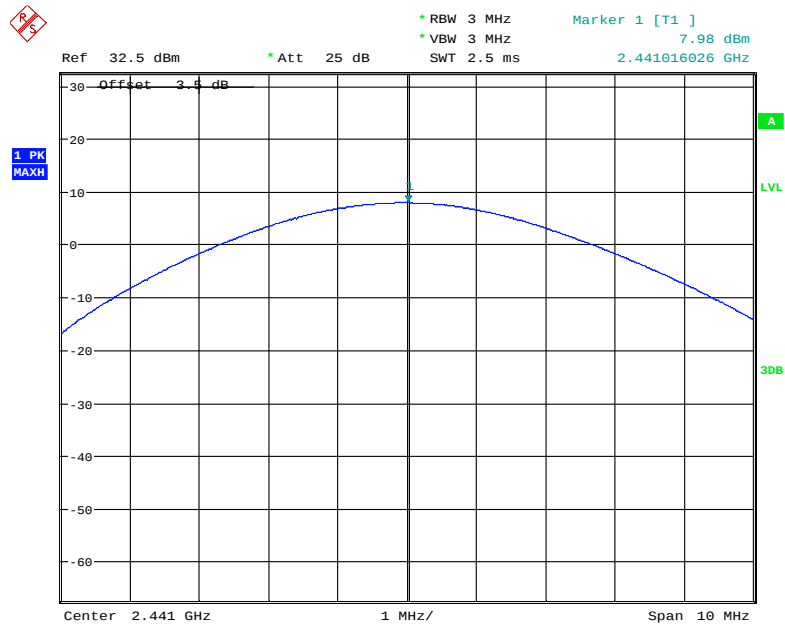


Date: 9.NOV.2020 06:52:44

BDR (GFSK): High Channel

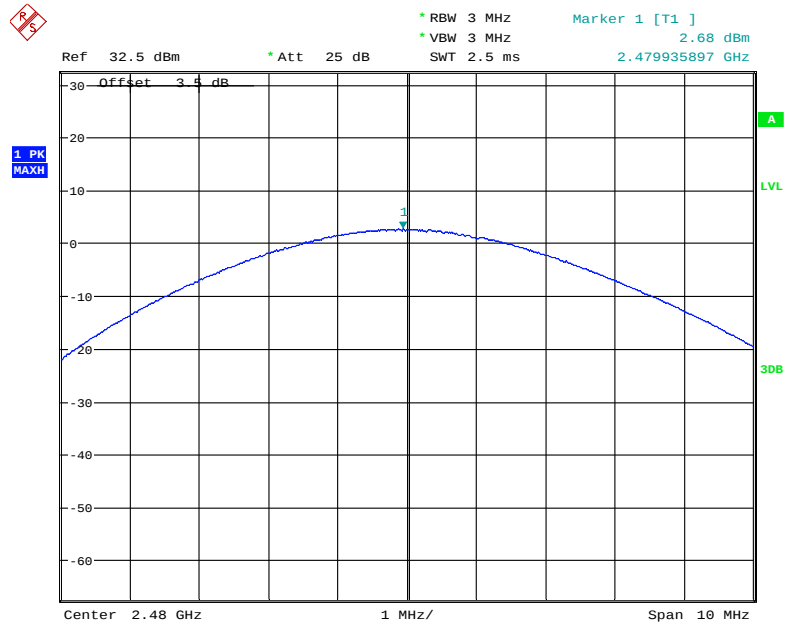


Date: 9.NOV.2020 06:53:06

BDR (GFSK): Max Channel

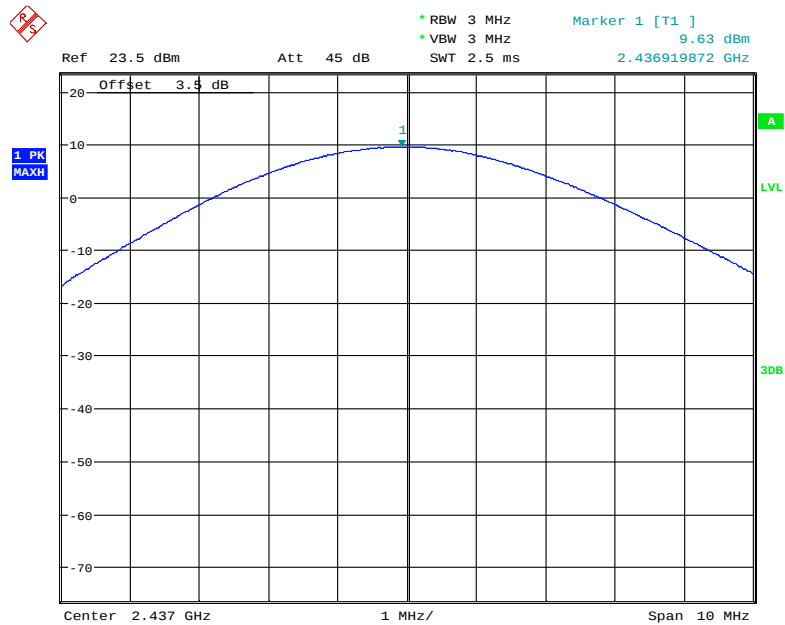


Date: 9.NOV.2020 09:14:08

EDR ($\pi/4$ -DQPSK): Low Channel

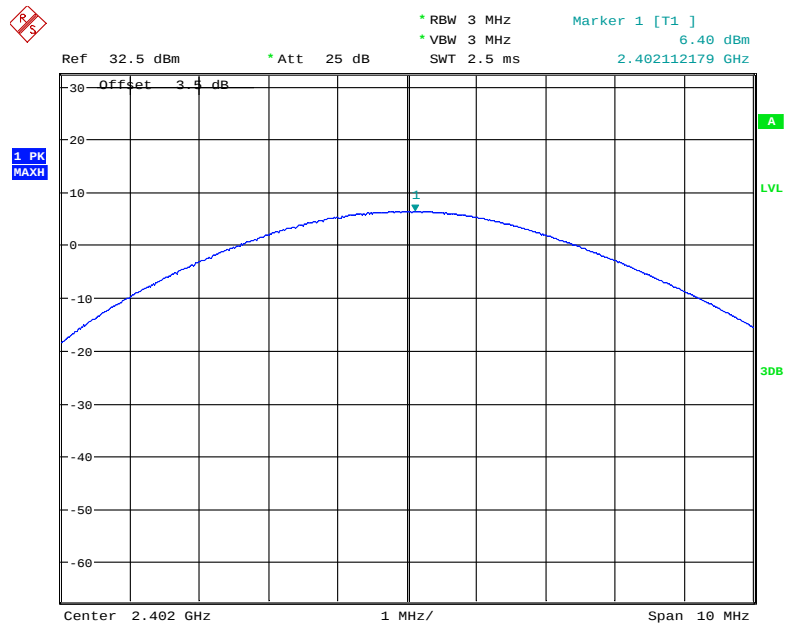


Date: 9.NOV.2020 06:54:39

EDR ($\pi/4$ -DQPSK): Middle Channel

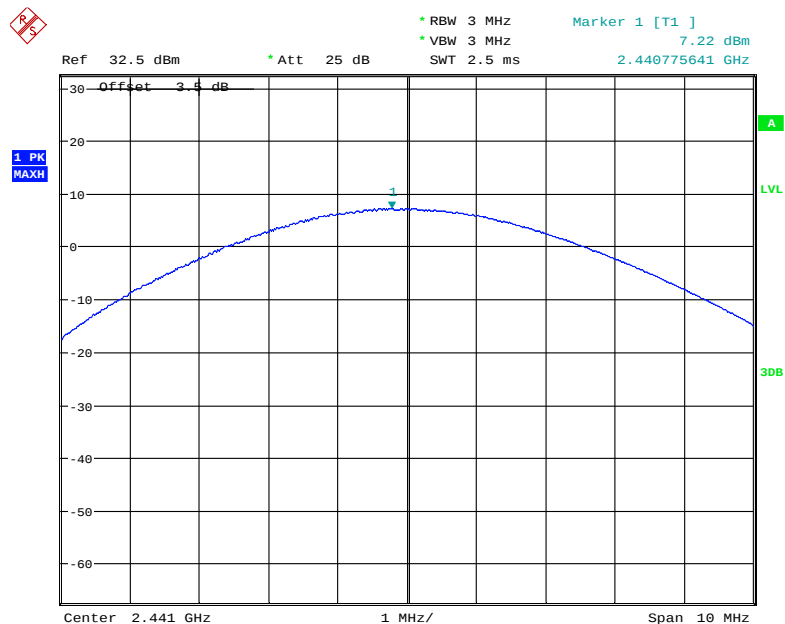


Date: 9.NOV.2020 06:54:16

EDR ($\pi/4$ -DQPSK): High Channel

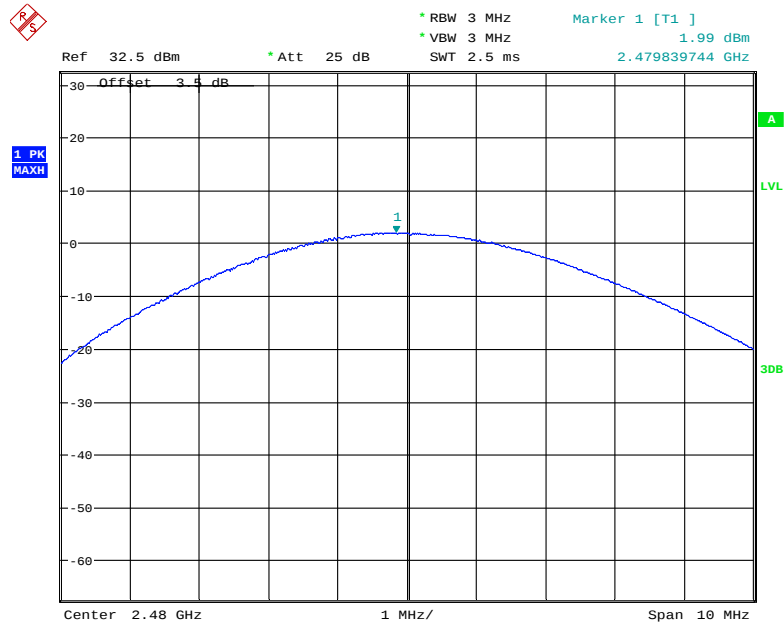


Date: 9.NOV.2020 06:53:52

EDR ($\pi/4$ -DQPSK): Max Channel

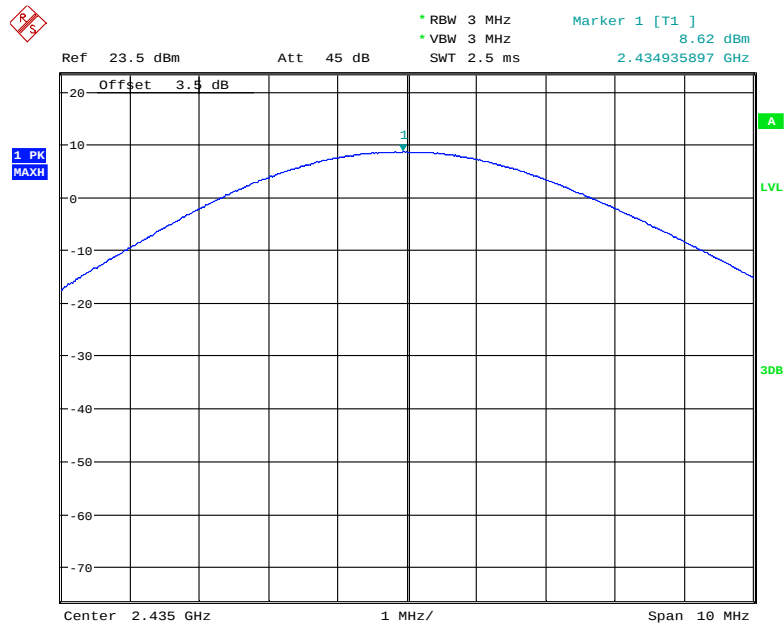


Date: 9.NOV.2020 09:15:35

EDR (8DPSK): Low Channel

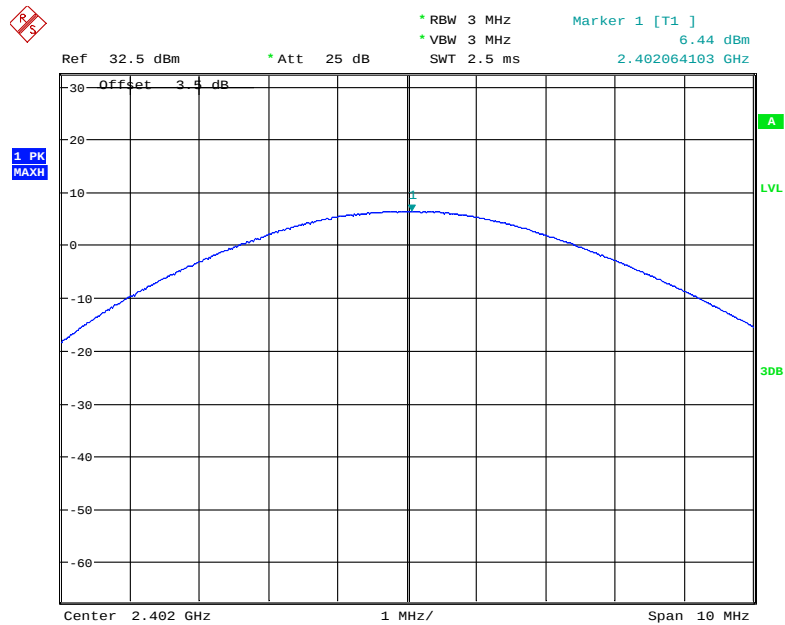


Date: 9.NOV.2020 06:55:14

EDR (8DPSK): Middle Channel

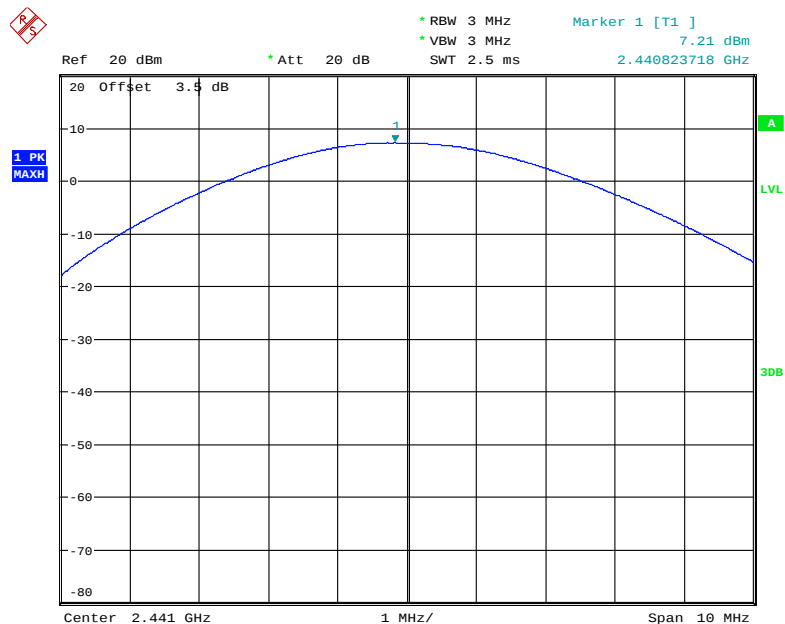


Date: 22.NOV.2020 10:24:55

EDR (8DPSK): High Channel

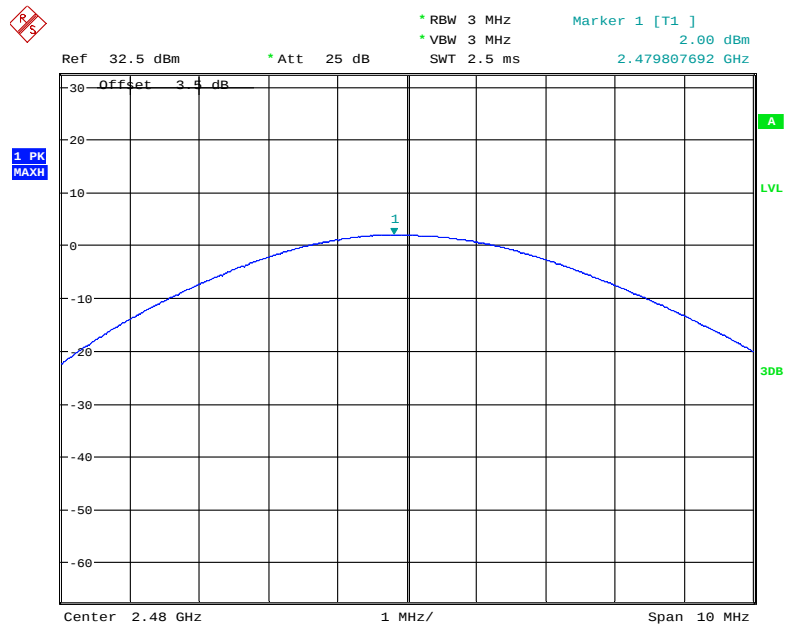

Date: 9.NOV.2020 06:56:19

EDR (8DPSK): Max Channel

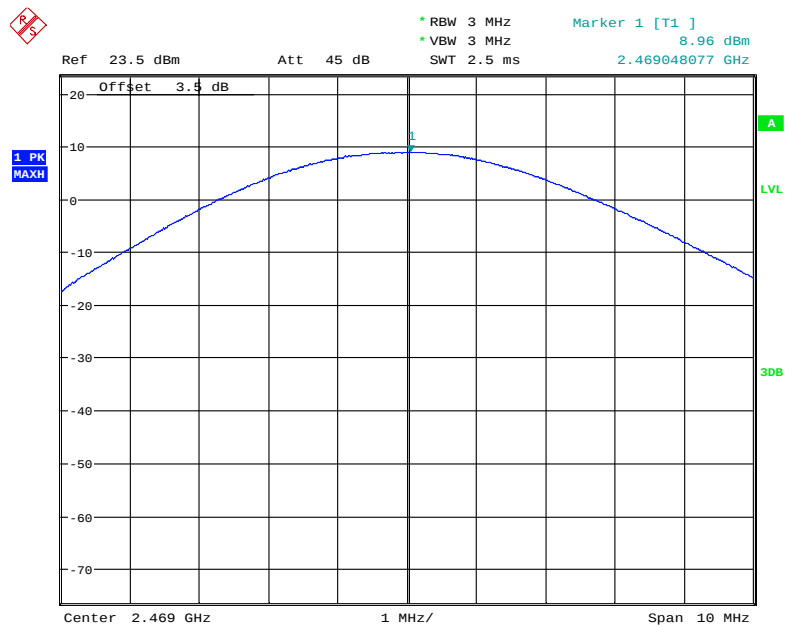

Date: 9.NOV.2020 09:18:13

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	30 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Coco Liu on 2020-11-09.


EUT operation mode: Transmitting

Test Result: Pass

Please refer to following plots.


BDR (GFSK): Band Edge-Left Side

Hopping

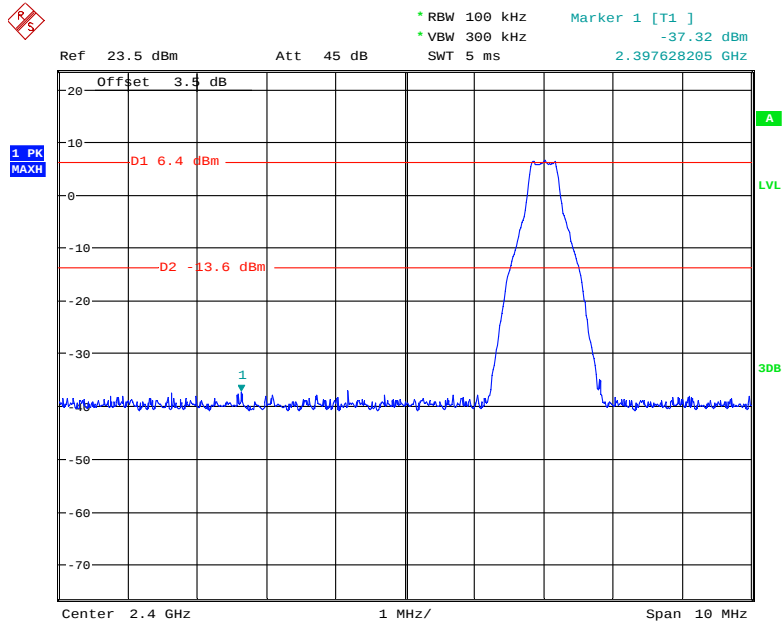

Date: 9.NOV.2020 08:24:58


Single

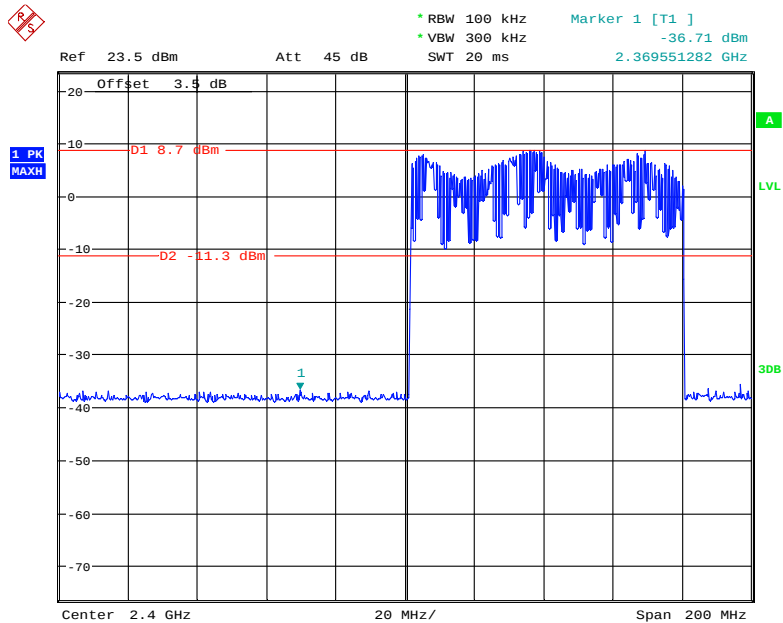

Date: 9.NOV.2020 08:39:12


BDR (GFSK): Band Edge-Right Side

Hopping

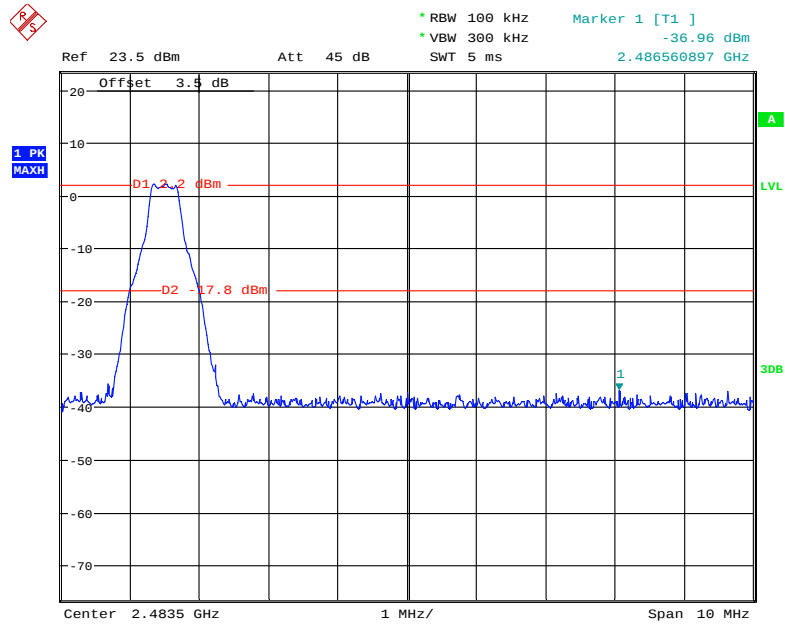


Date: 9.NOV.2020 08:25:47

Single

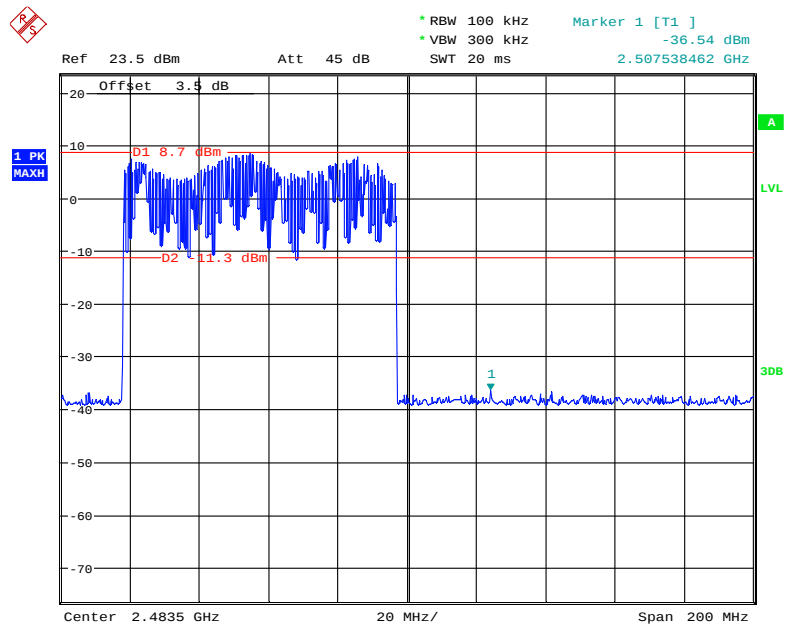


Date: 9.NOV.2020 08:40:46

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side Hopping

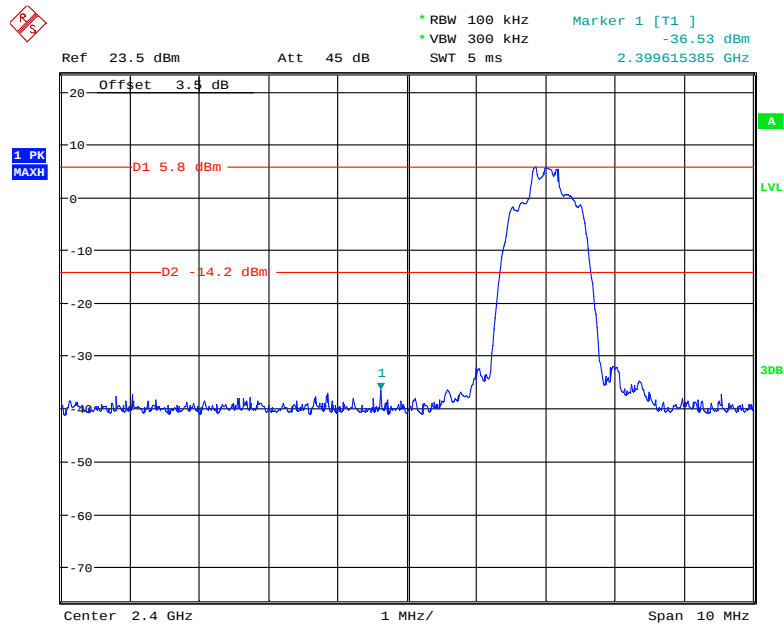


Date: 9.NOV.2020 08:24:18

Single

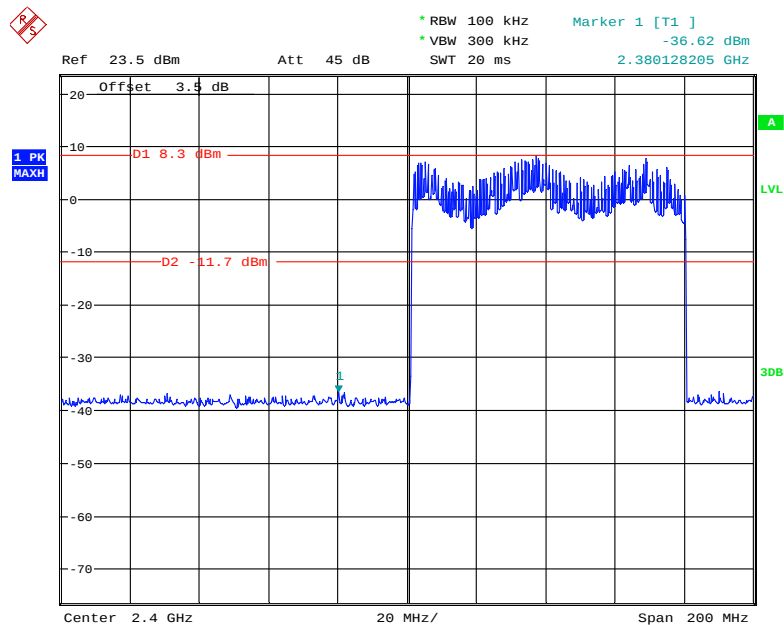


Date: 9.NOV.2020 08:34:09

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side Hopping

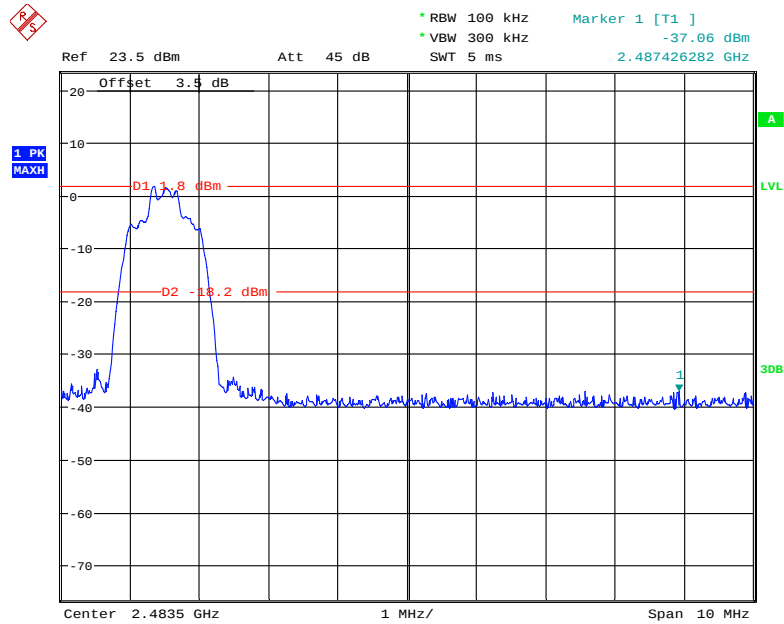


Date: 9.NOV.2020 08:26:48

Single

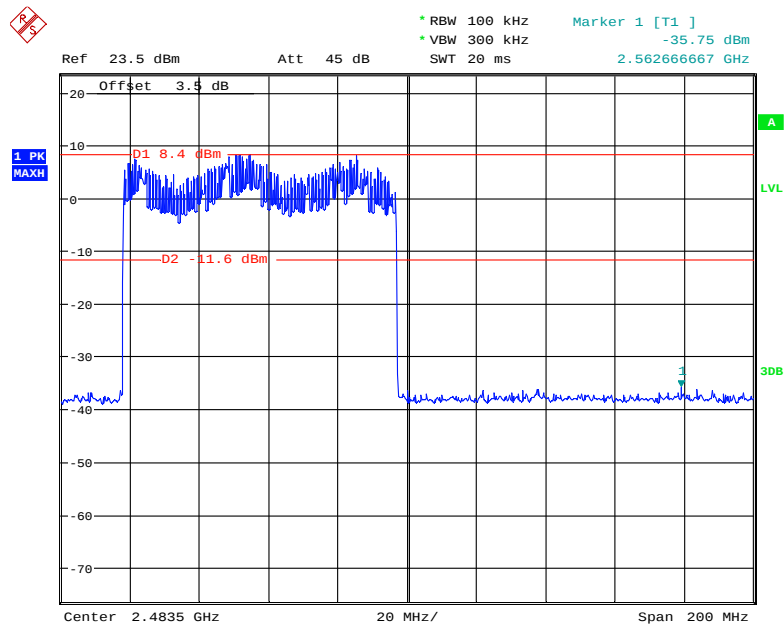


Date: 9.NOV.2020 08:31:43

EDR (8DPSK): Band Edge-Left Side Hopping

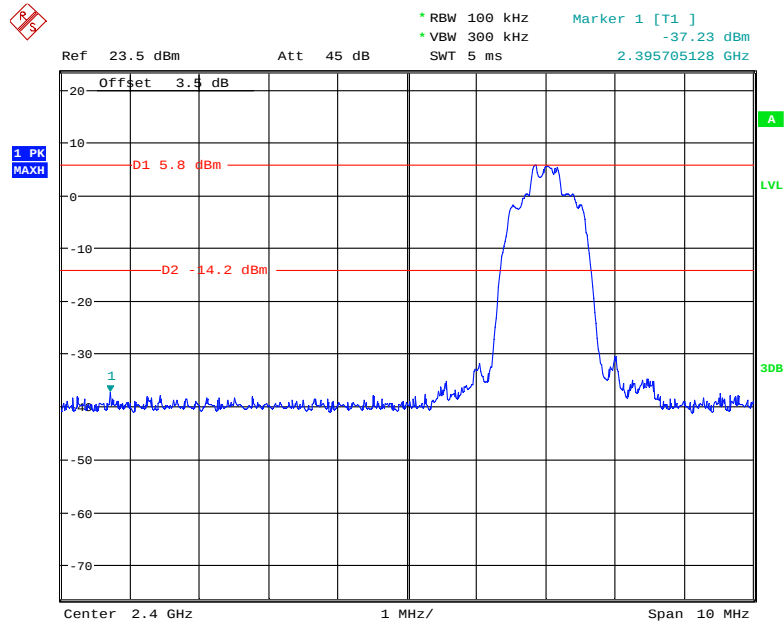

Date: 9.NOV.2020 08:23:44


Single

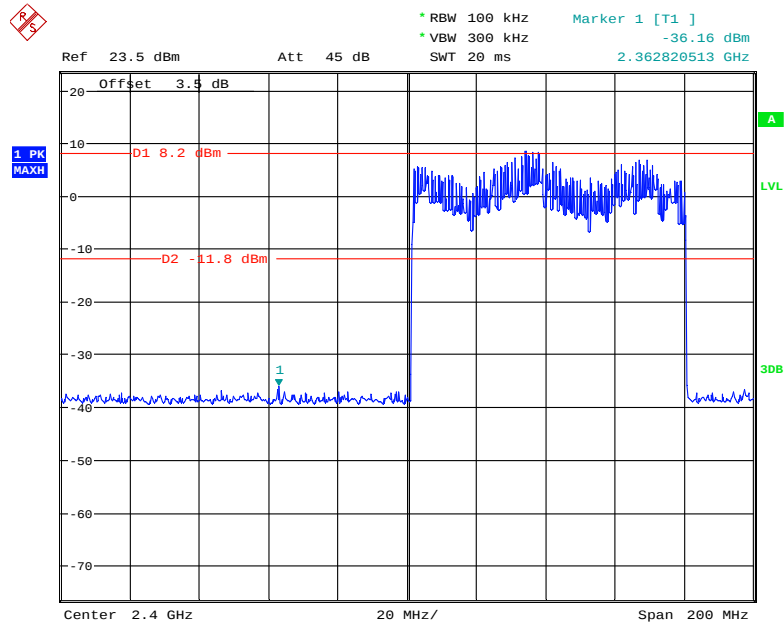

Date: 9.NOV.2020 08:44:47


EDR (8DPSK): Band Edge-Right Side

Hopping

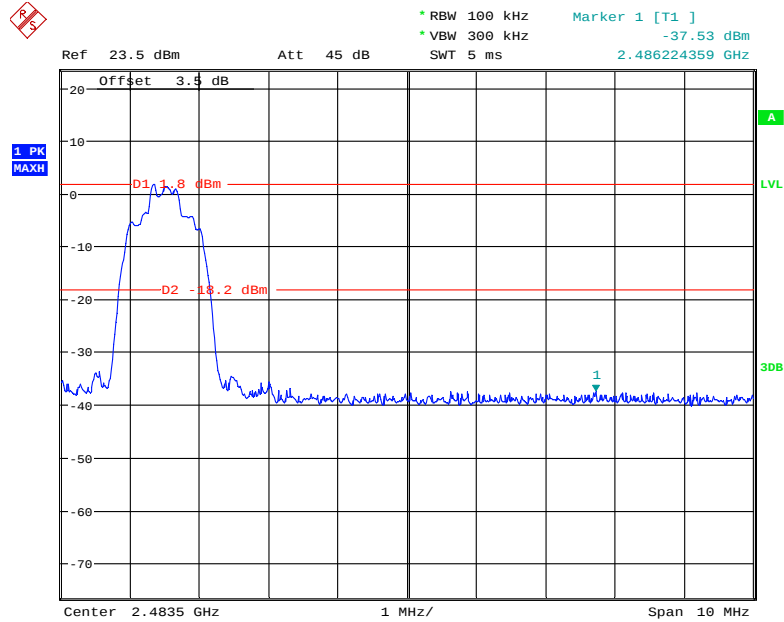

Date: 9.NOV.2020 08:22:45

Single

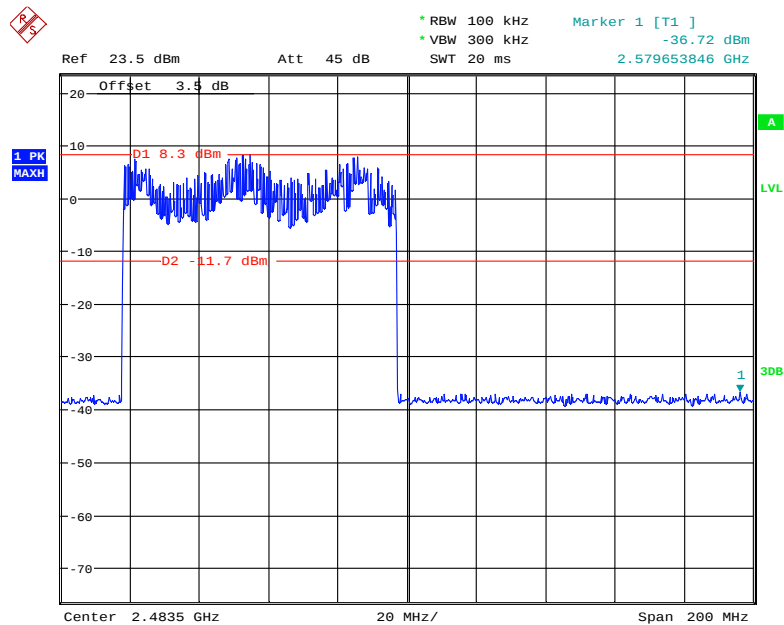

Date: 9.NOV.2020 08:43:07

***** END OF REPORT *****