



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: INFINIX MOBILITY LIMITED

Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT, Hong Kong

FCC ID: 2AIZN-YY5-X6850

Product Name: Mobile Phone

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New
Rules v02r01

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231061288-00D

Date Of Issue: 2023/12/5

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	9
1.2.3 Support Cable List and Details	9
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 AC LINE CONDUCTED EMISSIONS.....	13
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup	14
3.1.4 Test Procedure	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
3.2 RADIATION SPURIOUS EMISSIONS.....	16
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	19
3.3 EMISSION BANDWIDTH.....	20
3.3.1 Applicable Standard.....	20
3.3.2 EUT Setup.....	20
3.3.3 Test Procedure	20
3.4 MAXIMUM CONDUCTED OUTPUT POWER.....	22
3.4.1 Applicable Standard.....	22
3.4.2 EUT Setup.....	22
3.4.3 Test Procedure	22
3.5 MAXIMUM POWER SPECTRAL DENSITY	23
3.5.1 Applicable Standard.....	23
3.5.2 EUT Setup.....	23
3.5.3 Test Procedure	24
3.7 DUTY CYCLE	25
3.7.1 EUT Setup.....	25
3.7.2 Test Procedure	25
3.8 ANTENNA REQUIREMENT.....	26
3.8.1 Applicable Standard.....	26
3.8.2 Judgment.....	26

4. Test DATA AND RESULTS	27
4.1 AC LINE CONDUCTED EMISSIONS	27
4.2 RADIATION SPURIOUS EMISSIONS	30
4.3 EMISSION BANDWIDTH:	97
4.4 MAXIMUM CONDUCTED OUTPUT POWER:	123
4.5 MAXIMUM POWER SPECTRAL DENSITY:	126
4.6 DUTY CYCLE:	141
5. EUT PHOTOGRAPHS	146
6. TEST SETUP PHOTOGRAPHS	147

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231061288-00D	Original Report	2023/12/5

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	Mobile Phone
Trade Name:	Infinix
EUT Model:	X6850
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Average Output Power (Conducted):	Main ant: 11.95 dBm (5150-5250 MHz) 7.97 dBm (5725-5850 MHz) Aux ant: 11.68 dBm (5150-5250 MHz) 5.91 dBm (5725-5850 MHz)
Modulation Type:	802.11a/n/ac: OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
Rated Input Voltage:	DC 3.91V from battery or DC 5V/5-10V/11V/4-20V from adapter
Serial Number:	CE&RE: 2CGM-2(Normal), 2CGM-6(Lighting) RF: 2CGM-1
EUT Received Date:	2023/10/24
EUT Received Status:	Good
Note: the EUT has two version, a normal version and a lighting version, the two version was electrical identical.	

1.1.2 Operation Frequency Detail:

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825
Per section 15.31(m), the below frequencies were performed the test as below:			
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795
Per section 15.31(m), the below frequencies were performed the test as below:			
38	5190	151	5755
46	5230	159	5795

For 802.11ac vht80:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775
Per section 15.31(m), the below frequencies were performed the test as below:			
42	5210	155	5775

1.1.3 Antenna Information Detail▲:

Antenna	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain (dBi)
Main ant	Integral	50	5.15~5.25GHz	-2.31
			5.725~5.85GHz	-2.31
Aux ant	Integral	50	5.15~5.25GHz	-3.19
			5.725~5.85GHz	-3.19

The Method of §15.203 Compliance:

- ☒ Antenna was permanently attached to the unit.
☐ Antenna use a unique type of connector to attach to the EUT.
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

Accessory Description	S/N	Model	Parameters
Adapter 1	KX070129253A13	U700XSA	Input: AC 100-240V~50/60Hz, 2.0A Output: DC 5.0V, 3.0A, 15.0W or 5.0-10.0V, 7.0A MAX or 11.0V, 6.4A Max or 4.0-20.0V, 3.5A, 70.0W MAX
Adapter 2	CY07019513916	U700XSA	Input: AC 100-240V~50/60Hz, 2.0A Output: DC 5.0V, 3.0A, 15.0W or 5.0-10.0V, 7.0A MAX or 11.0V, 6.4A Max or 4.0-20.0V, 3.5A, 70.0W MAX

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:			The system was configured for testing in Engineering Mode, which was provided by the manufacturer. Note: The EUT has two versions, the two version was electrical identical, the normal version was selected to test. The EUT supply with two adapters, the worst case adapter was selected to test for AC line conducted and radiated emission below 1GHz according to DSS report test result. The lighting version was evaluated in DSS report and compliance with the limit. For above 1GHz, the adapter 1 was used to test.		
Equipment Modifications:			No		
EUT Exercise Software:			Engineering mode		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:					
5150-5250 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Main ant	Aux ant
802.11a	Lowest	5180	6Mbps	16.5	16.5
	Middle	5200	6Mbps	16.5	16.5
	Highest	5240	6Mbps	16.5	16.5
802.11n ht20	Lowest	5180	MCS0	16.5	16.5
	Middle	5200	MCS0	16.5	16.5
	Highest	5240	MCS0	16.5	16.5
802.11n ht40	Lowest	5190	MCS0	16	16.5
	Highest	5230	MCS0	16	16.5
802.11ac vht80	Middle	5210	MCS0	14	16.5
5725-5850 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting Main ant & Aux ant	
802.11a	Lowest	5745	6Mbps	16.5	
	Middle	5785	6Mbps	16.5	
	Highest	5825	6Mbps	16.5	
802.11n ht20	Lowest	5745	MCS0	16.5	
	Middle	5785	MCS0	16.5	
	Highest	5825	MCS0	16.5	
802.11n ht40	Lowest	5755	MCS0	16.5	
	Highest	5795	MCS0	16.5	
802.11ac vht80	Middle	5775	MCS0	16.5	
Note: The system support 802.11a/n ht20/n ht40/ac vht20/vht40/vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. According to the manufacturer, for 5G Wi-Fi, the EUT has two antennas, which will be switched through SW circuit according to environmental conditions during actual operation. Only one antenna is working at any moment in time.					

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1.0	Adapter	EUT

1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:

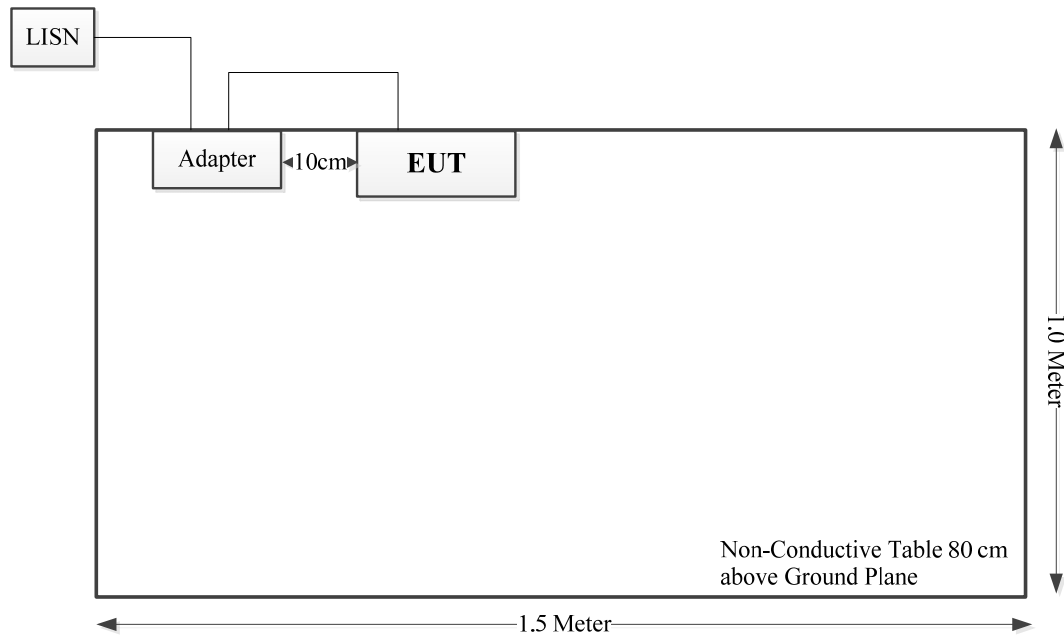

Spurious emissions:

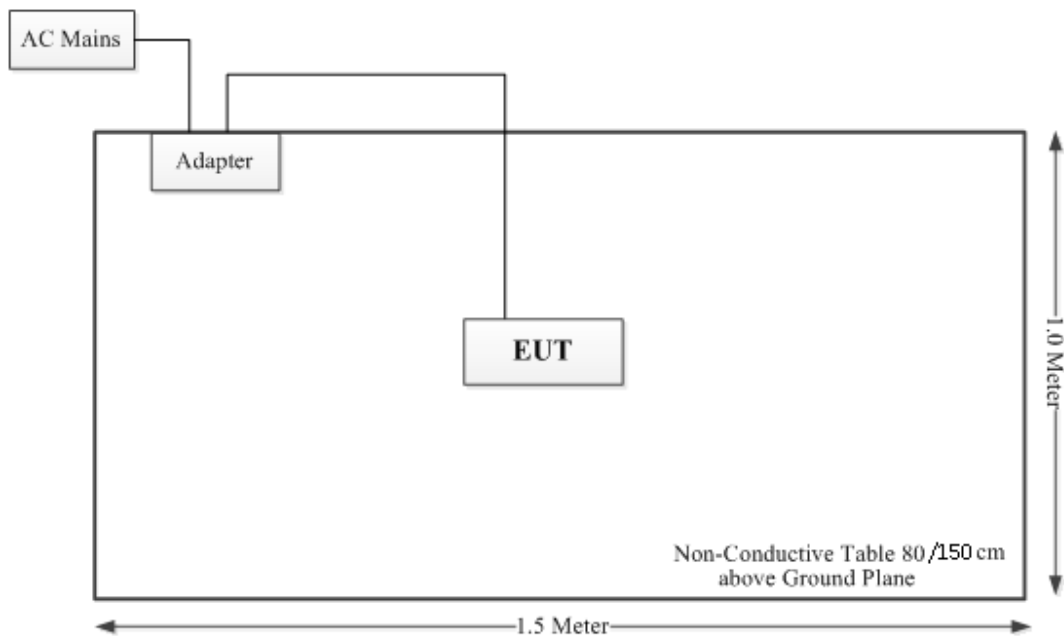

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB,30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard


FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
 - (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
 - (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
 - (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
 - (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
 - (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
 - (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
 - (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup


9 kHz-30MHz:

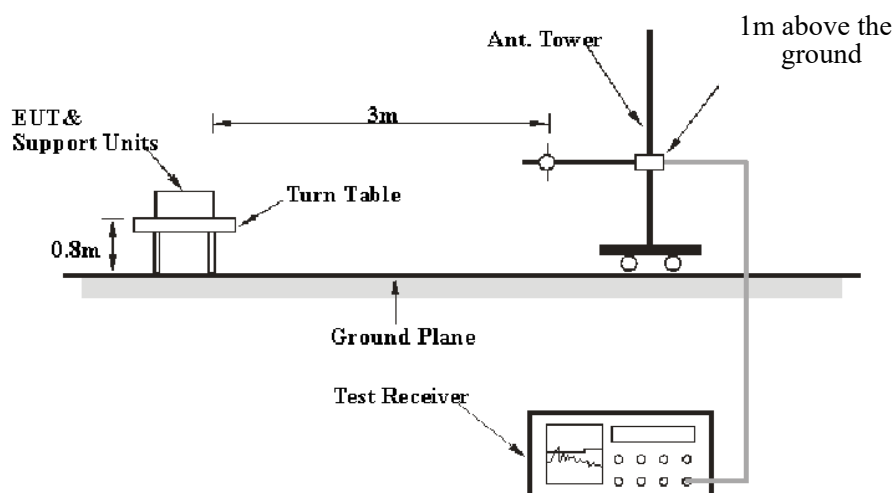

30MHz-1GHz:

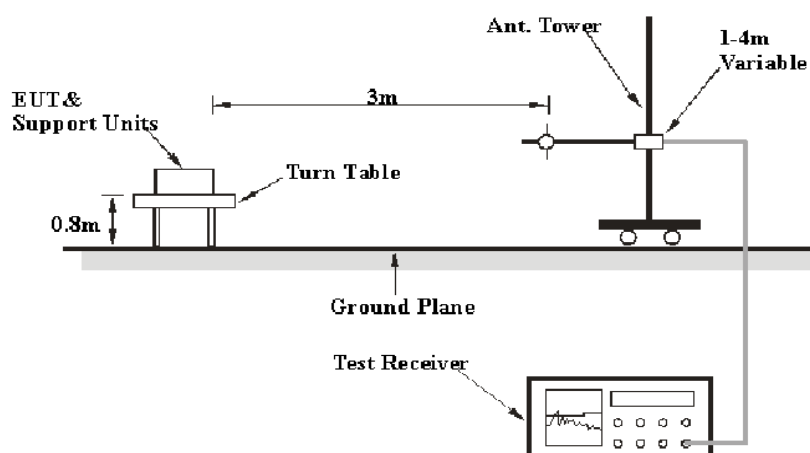

1-40 GHz:

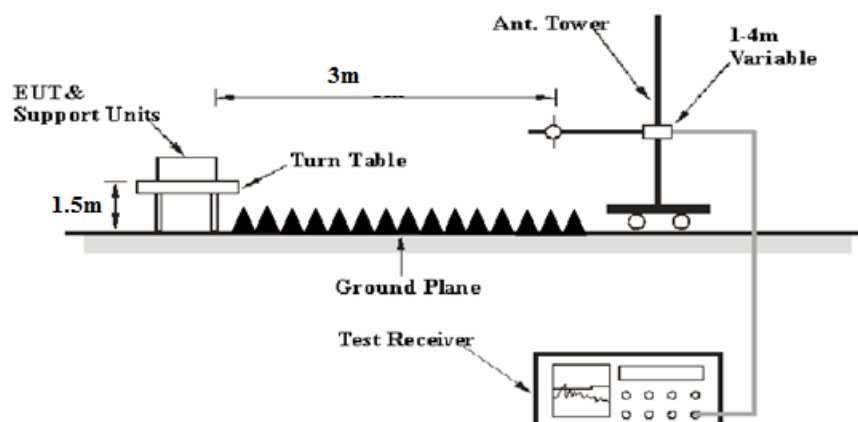

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-30MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	100 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth

3.3.1 Applicable Standard


FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.3.2 EUT Setup

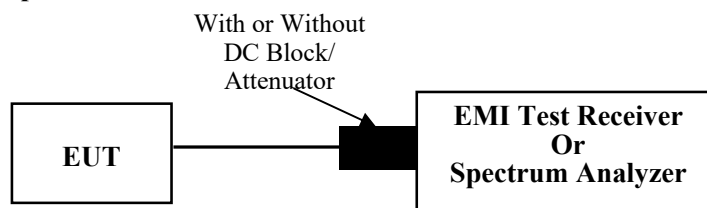

3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- Set RBW = 100 kHz.
 - Set the video bandwidth (VBW) ≥ 3 RBW.
 - Detector = Peak.
 - Trace mode = max hold.
 - Sweep = auto couple.
 - Allow the trace to stabilize.
 - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup

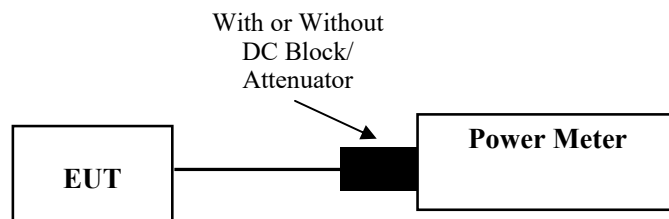

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.2

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum Power Spectral Density

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup

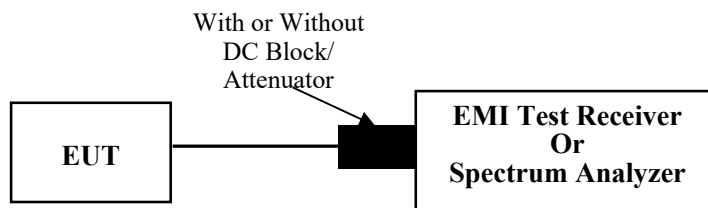

3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

3.7 Duty Cycle

3.7.1 EUT Setup

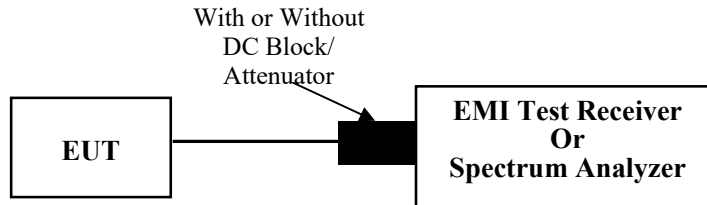

3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2CGM-2	Test Date:	2023/11/24
Test Site:	CE	Test Mode:	Transmitting(maximum output power mode 802.11a 5200MHz Main ant)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.2	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	---------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Project No.: CR231061288-RF
Tester: David Huang
Port: Line
Note: Transmitting(5G WIFI)

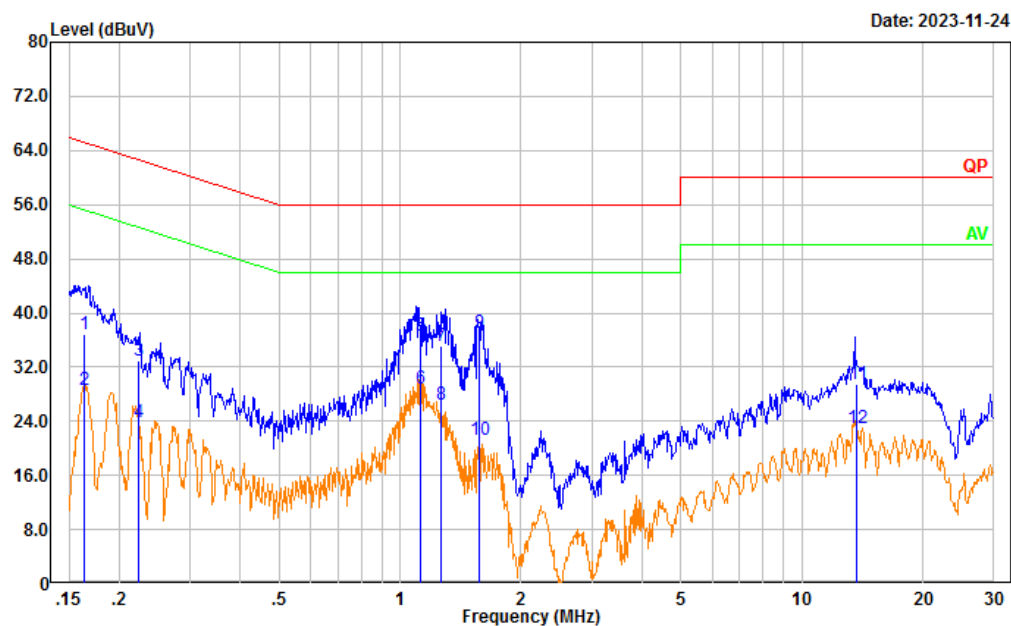

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.164	27.22	9.61	36.83	65.25	28.42	QP
2	0.164	19.10	9.61	28.71	55.25	26.54	Average
3	0.223	23.31	9.61	32.92	62.69	29.77	QP
4	0.223	14.24	9.61	23.85	52.69	28.84	Average
5	1.121	26.98	9.62	36.60	56.00	19.40	QP
6	1.121	19.14	9.62	28.76	46.00	17.24	Average
7	1.264	25.56	9.62	35.18	56.00	20.82	QP
8	1.264	16.85	9.62	26.47	46.00	19.53	Average
9	1.577	27.42	9.63	37.05	56.00	18.95	QP
10	1.577	11.63	9.63	21.26	46.00	24.74	Average
11	13.696	19.80	9.68	29.48	60.00	30.52	QP
12	13.696	13.39	9.68	23.07	50.00	26.93	Average

Project No.: CR231061288-RF
 Tester: David Huang
 Port: neutral
 Note: Transmitting(5G WIFI)

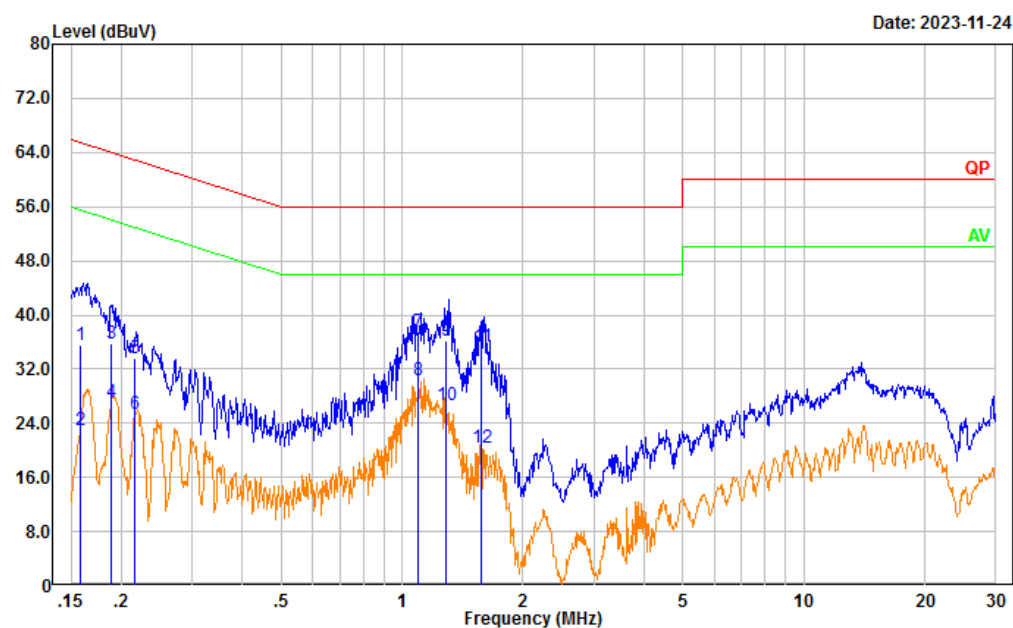

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.158	26.01	9.61	35.62	65.56	29.94	QP
2	0.158	13.29	9.61	22.90	55.56	32.66	Average
3	0.190	26.19	9.61	35.80	64.05	28.25	QP
4	0.190	17.52	9.61	27.13	54.05	26.92	Average
5	0.217	24.03	9.61	33.64	62.94	29.30	QP
6	0.217	15.67	9.61	25.28	52.94	27.66	Average
7	1.095	27.92	9.62	37.54	56.00	18.46	QP
8	1.095	20.79	9.62	30.41	46.00	15.59	Average
9	1.289	26.48	9.62	36.10	56.00	19.90	QP
10	1.289	16.98	9.62	26.60	46.00	19.40	Average
11	1.577	25.74	9.63	35.37	56.00	20.63	QP
12	1.577	10.66	9.63	20.29	46.00	25.71	Average

4.2 Radiation Spurious Emissions

Serial Number:	2CGM-2	Test Date:	2023/11/30~ 2023/12/1
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Carl Xue, Mack Huang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	25.3~25.5	Relative Humidity: (%)	45~55	ATM Pressure: (kPa)	101.3~101.4

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
BACL	Loop Antenna	1313-1P	3092721	2023/11/9	2026/11/8
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:


For 9kHz-30MHz, The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded

1) 30MHz-1GHz

5150-5250MHz (Transmitting maximum output power mode 802.11a Main ant)


Low Channel

Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: horizontal
Note: Transmitting(5G WIFI B1 2CGM-2 KX070129253A13)

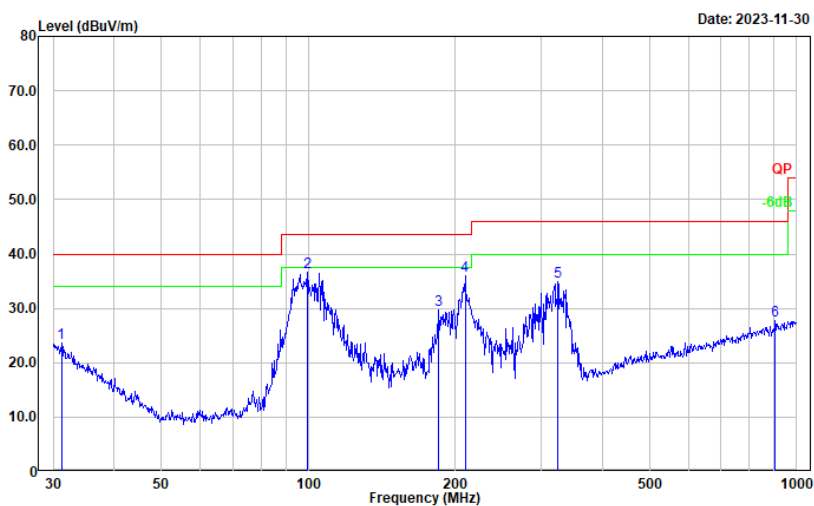

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.180	28.34	-4.69	23.65	40.00	16.35	Peak
2	99.528	51.02	-14.43	36.59	43.50	6.91	Peak
3	185.138	43.24	-13.51	29.73	43.50	13.77	Peak
4	209.313	48.51	-12.48	36.03	43.50	7.47	Peak
5	324.456	45.29	-10.41	34.88	46.00	11.12	Peak
6	903.309	28.48	-0.80	27.68	46.00	18.32	Peak


Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: vertical
Note: Transmitting(5G WIFI B1 2CGM-2 KX070129253A13)

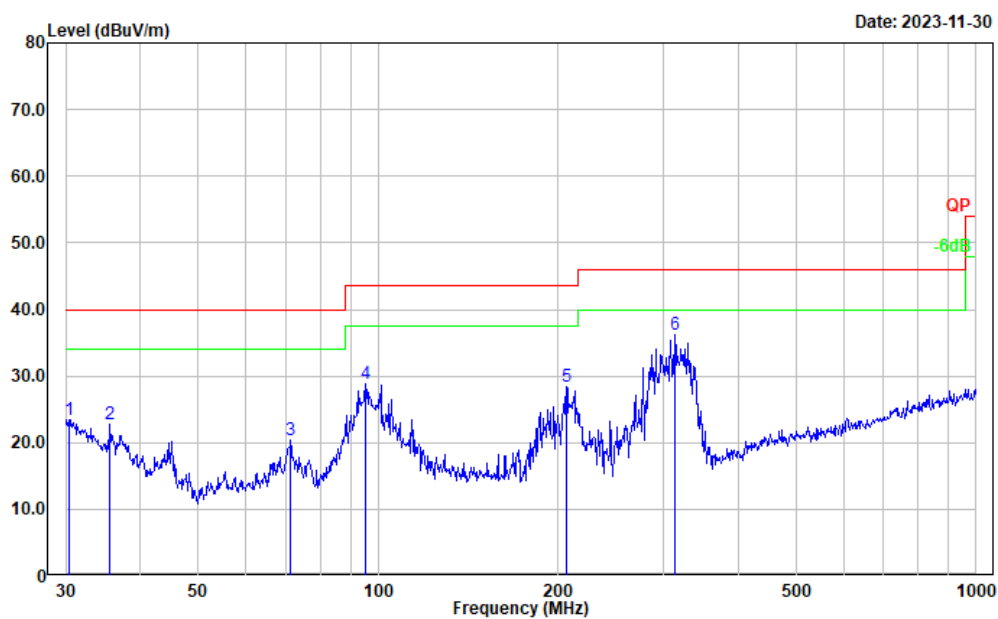


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	27.64	-4.13	23.51	40.00	16.49	Peak
2	35.624	30.89	-8.10	22.79	40.00	17.21	Peak
3	71.330	37.06	-16.70	20.36	40.00	19.64	Peak
4	95.427	44.34	-15.50	28.84	43.50	14.66	Peak
5	206.398	40.80	-12.40	28.40	43.50	15.10	Peak
6	313.276	46.76	-10.60	36.16	46.00	9.84	Peak

Middle Channel

Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: horizontal
Note: Transmitting(5G WIFI B1 2CGM-2 KX070129253A13)

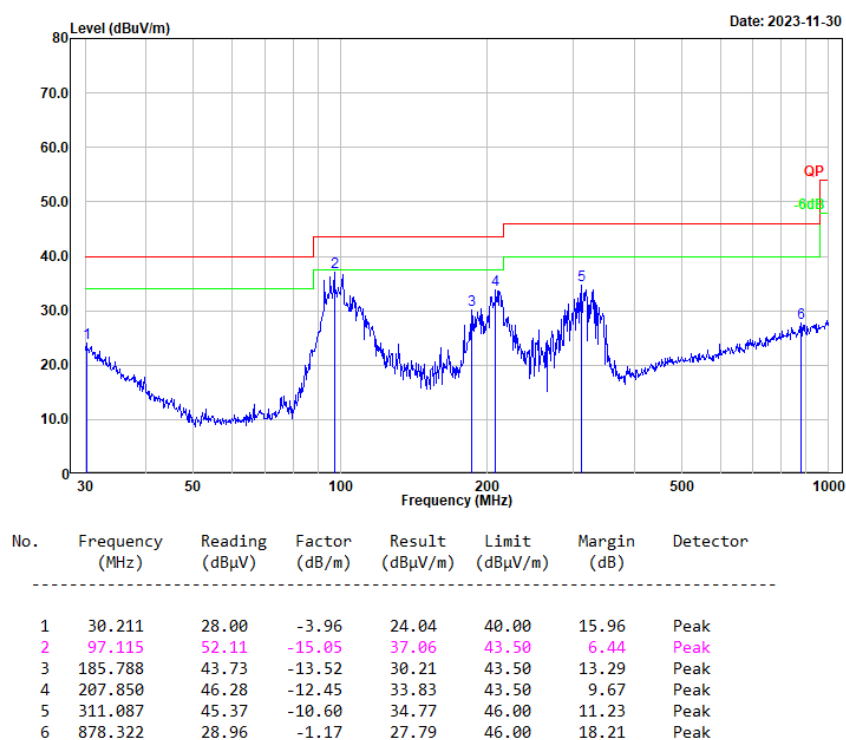


Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: vertical
Note: Transmitting(5G WIFI B1 2CGM-2 KX070129253A13)

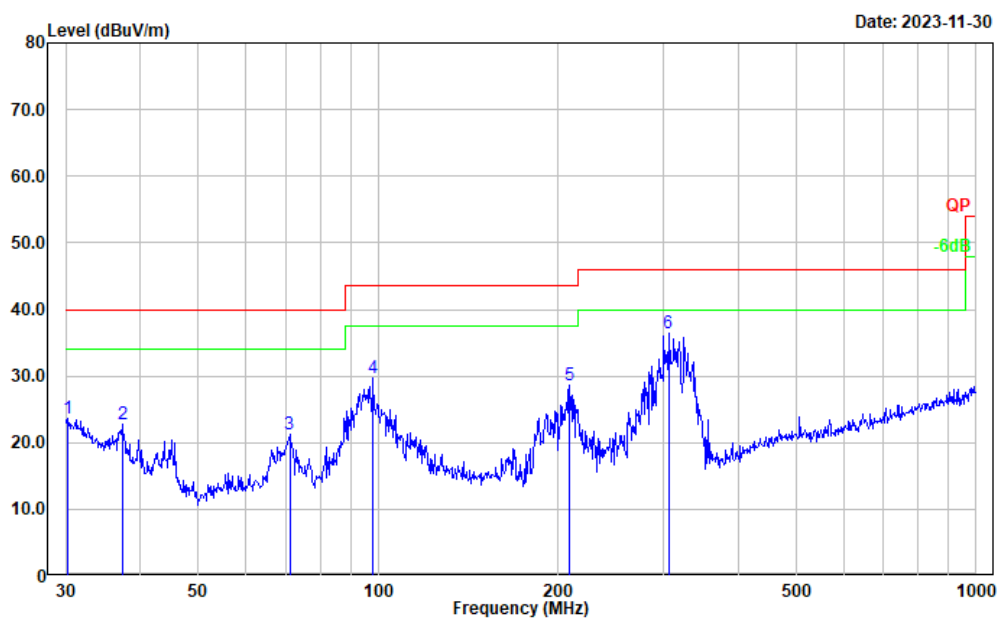


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	27.62	-4.04	23.58	40.00	16.42	Peak
2	37.285	32.06	-9.35	22.71	40.00	17.29	Peak
3	71.080	37.84	-16.68	21.16	40.00	18.84	Peak
4	98.142	44.54	-14.75	29.79	43.50	13.71	Peak
5	208.580	41.10	-12.46	28.64	43.50	14.86	Peak
6	305.680	47.07	-10.57	36.50	46.00	9.50	Peak

High Channel

Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: horizontal
Note: Transmitting(5G WIFI B1 2CGM-2 KX070129253A13)

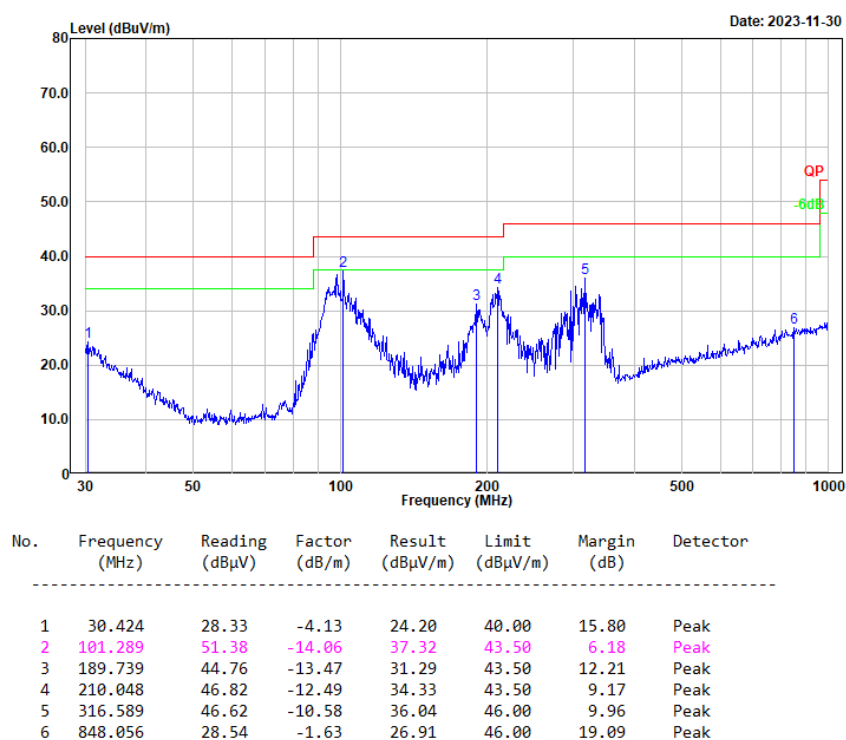


Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: vertical
Note: Transmitting(5G WIFI B1 2CGM-2 KX070129253A13)

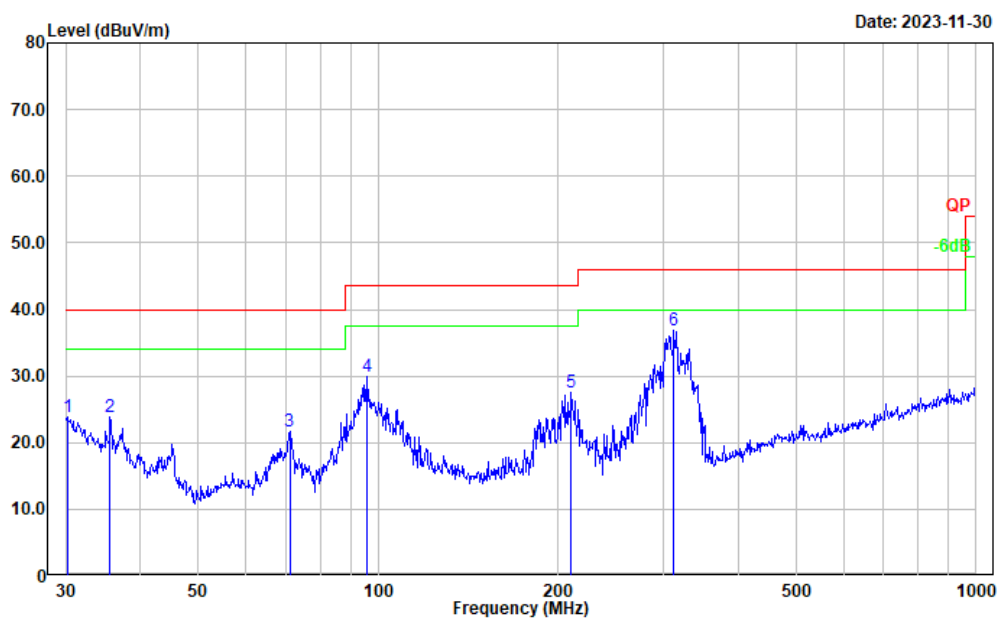


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	27.79	-3.96	23.83	40.00	16.17	Peak
2	35.624	31.85	-8.10	23.75	40.00	16.25	Peak
3	71.080	38.29	-16.68	21.61	40.00	18.39	Peak
4	95.762	45.30	-15.40	29.90	43.50	13.60	Peak
5	210.048	39.92	-12.49	27.43	43.50	16.07	Peak
6	312.179	47.41	-10.60	36.81	46.00	9.19	Peak

5725-5850MHz (Transmitting maximum output power mode 802.11ac40 Main ant)
Low Channel

Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: horizontal
Note: Transmitting(5G WIFI B4 2CGM-2 KX070129253A13)

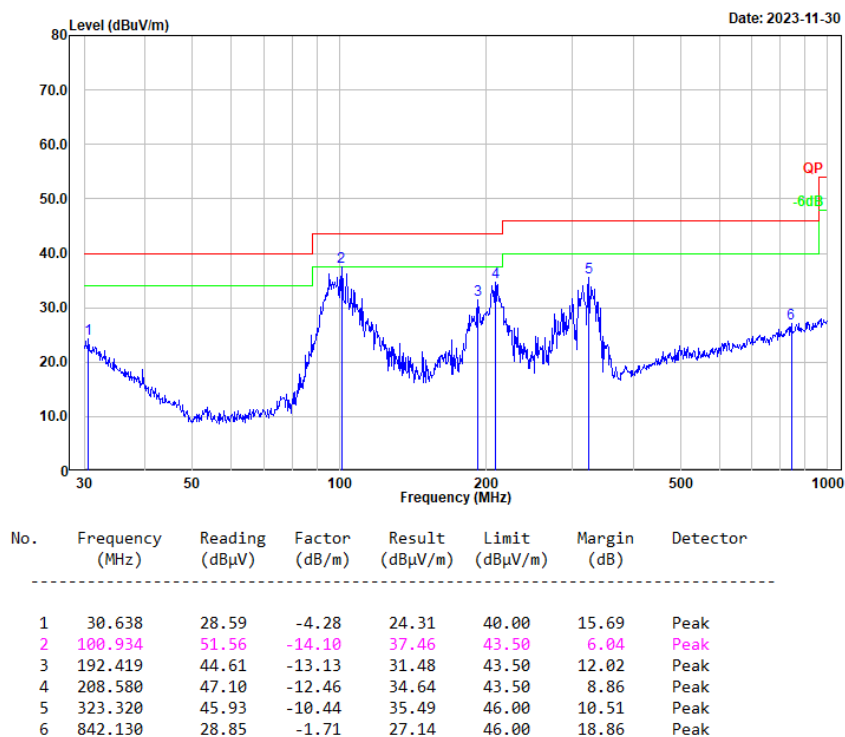


Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: vertical
Note: Transmitting(5G WIFI B4 2CGM-2 KX070129253A13)

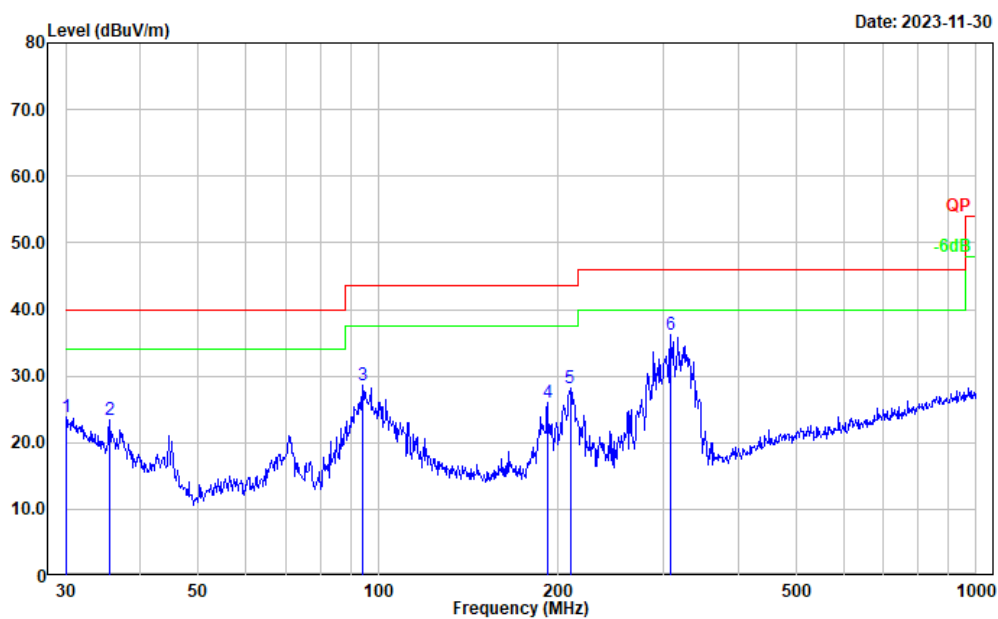


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.63	-3.80	23.83	40.00	16.17	Peak
2	35.624	31.61	-8.10	23.51	40.00	16.49	Peak
3	94.098	44.45	-15.90	28.55	43.50	14.95	Peak
4	191.745	39.18	-13.21	25.97	43.50	17.53	Peak
5	209.313	40.70	-12.48	28.22	43.50	15.28	Peak
6	308.913	46.72	-10.60	36.12	46.00	9.88	Peak

Middle Channel

Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: horizontal
Note: Transmitting(5G WIFI B4 2CGM-2 KX070129253A13)

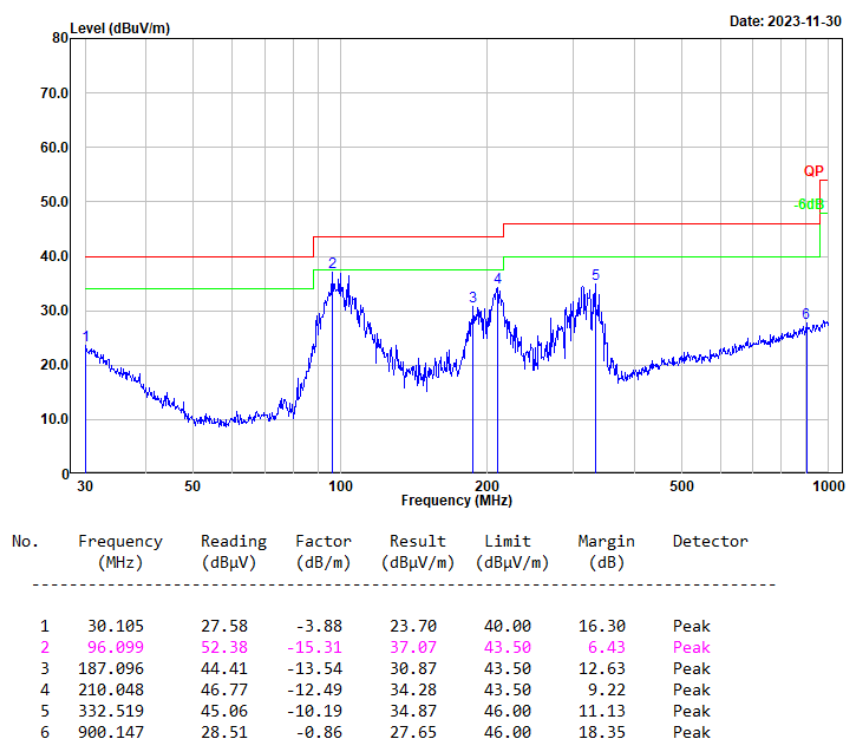


Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: vertical
Note: Transmitting(5G WIFI B4 2CGM-2 KX070129253A13)

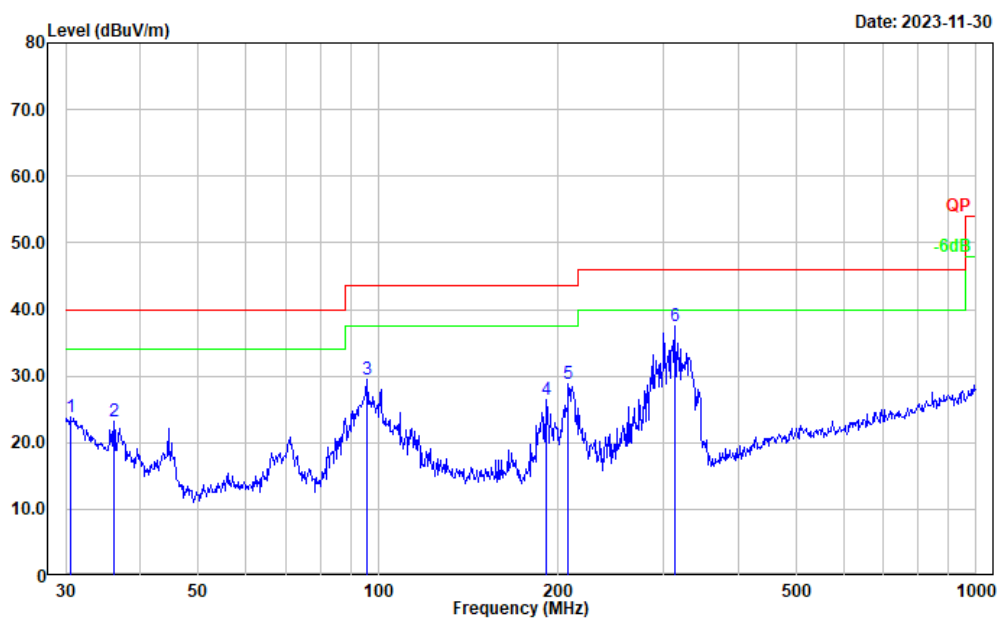


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	28.04	-4.20	23.84	40.00	16.16	Peak
2	36.127	31.67	-8.48	23.19	40.00	16.81	Peak
3	95.762	44.92	-15.40	29.52	43.50	13.98	Peak
4	191.074	39.67	-13.30	26.37	43.50	17.13	Peak
5	207.850	41.26	-12.45	28.81	43.50	14.69	Peak
6	313.276	48.09	-10.60	37.49	46.00	8.51	Peak

High Channel

Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: horizontal
Note: Transmitting(5G WIFI B4 2CGM-2 KX070129253A13)

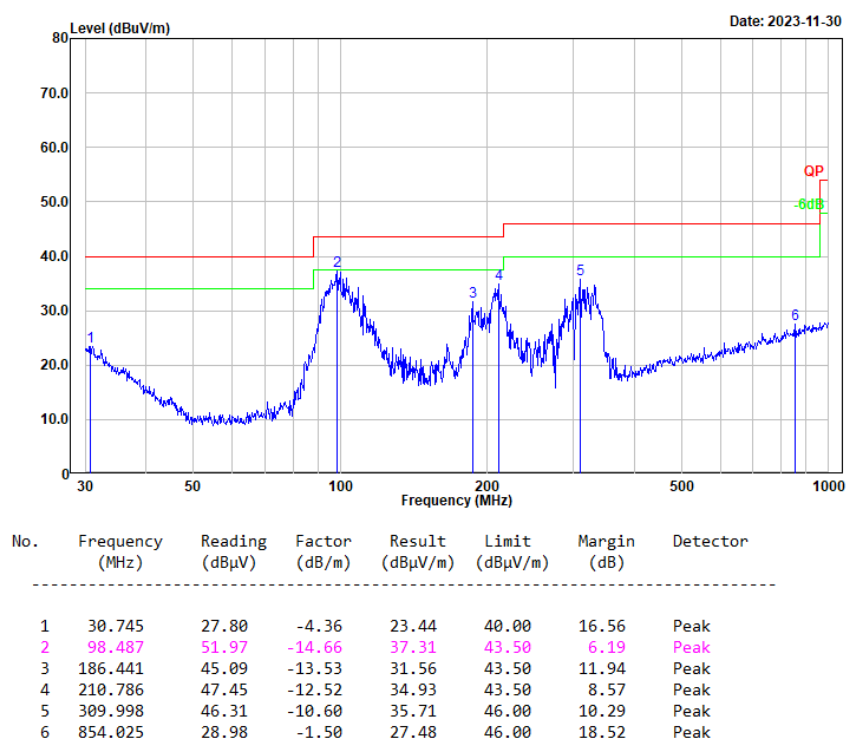

Project No.: CR231061288-RF
Tester: Carl Xue
Polarization: vertical
Note: Transmitting(5G WIFI B4 2CGM-2 KX070129253A13)

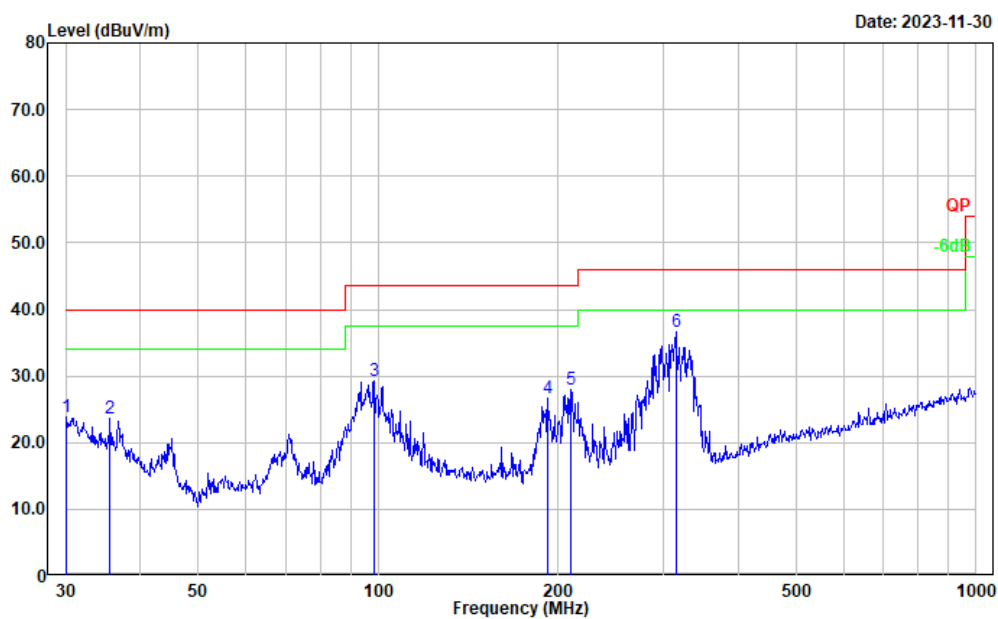

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.61	-3.80	23.81	40.00	16.19	Peak
2	35.624	31.79	-8.10	23.69	40.00	16.31	Peak
3	98.487	43.88	-14.66	29.22	43.50	14.28	Peak
4	191.745	39.86	-13.21	26.65	43.50	16.85	Peak
5	210.048	40.53	-12.49	28.04	43.50	15.46	Peak
6	314.377	47.21	-10.60	36.61	46.00	9.39	Peak

2) 1GHz-40GHz:**Main ant****5150-5250MHz:****802.11a Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180 MHz							
5150.000	48.45	PK	H	11.67	60.12	74.00	13.88
5150.000	33.87	AV	H	11.67	45.54	54.00	8.46
5150.000	48.58	PK	V	11.67	60.25	74.00	13.75
5150.000	33.99	AV	V	11.67	45.66	54.00	8.34
10360.000	34.17	PK	H	20.47	54.64	68.20	13.56
10360.000	34.33	PK	V	20.47	54.80	68.20	13.40
Middle Channel: 5200 MHz							
10400.000	34.47	PK	H	20.54	55.01	68.20	13.19
10400.000	34.62	PK	V	20.54	55.16	68.20	13.04
High Channel: 5240 MHz							
5350.000	46.00	PK	H	11.94	57.94	74.00	16.06
5350.000	32.61	AV	H	11.94	44.55	54.00	9.45
5350.000	46.12	PK	V	11.94	58.06	74.00	15.94
5350.000	32.73	AV	V	11.94	44.67	54.00	9.33
10480.000	34.81	PK	H	20.42	55.23	68.20	12.97
10480.000	34.95	PK	V	20.42	55.37	68.20	12.83

802.11ac vht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5180	MHz		
5150.000	50.45	PK	H	11.67	62.12	74.00	11.88
5150.000	34.23	AV	H	11.67	45.90	54.00	8.10
5150.000	50.67	PK	V	11.67	62.34	74.00	11.66
5150.000	34.39	AV	V	11.67	46.06	54.00	7.94
10360.000	34.40	PK	H	20.47	54.87	68.20	13.33
10360.000	34.56	PK	V	20.47	55.03	68.20	13.17
Middle Channel:				5200	MHz		
10400.000	34.70	PK	H	20.54	55.24	68.20	12.96
10400.000	34.87	PK	V	20.54	55.41	68.20	12.79
High Channel:				5240	MHz		
5350.000	46.15	PK	H	11.94	58.09	74.00	15.91
5350.000	32.79	AV	H	11.94	44.73	54.00	9.27
5350.000	46.28	PK	V	11.94	58.22	74.00	15.78
5350.000	32.91	AV	V	11.94	44.85	54.00	9.15
10480.000	34.02	PK	H	20.42	54.44	68.20	13.76
10480.000	34.16	PK	V	20.42	54.58	68.20	13.62

802.11ac vht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5150.000	54.27	PK	H	11.67	65.94	74.00	8.06
5150.000	38.63	AV	H	11.67	50.30	54.00	3.70
5150.000	54.49	PK	V	11.67	66.16	74.00	7.84
5150.000	38.85	AV	V	11.67	50.52	54.00	3.48
10380.000	34.86	PK	H	20.51	55.37	68.20	12.83
10380.000	34.03	PK	V	20.51	54.54	68.20	13.66
High Channel: 5230 MHz							
5350.000	46.08	PK	H	11.94	58.02	74.00	15.98
5350.000	33.27	AV	H	11.94	45.21	54.00	8.79
5350.000	46.21	PK	V	11.94	58.15	74.00	15.85
5350.000	33.39	AV	V	11.94	45.33	54.00	8.67
10460.000	34.36	PK	H	20.45	54.81	68.20	13.39
10460.000	34.53	PK	V	20.45	54.98	68.20	13.22

802.11ac vht80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel:				5210	MHz		
5150.000	52.73	PK	H	11.67	64.40	74.00	9.60
5150.000	39.02	AV	H	11.67	50.69	54.00	3.31
5150.000	52.96	PK	V	11.67	64.63	74.00	9.37
5150.000	39.24	AV	V	11.67	50.91	54.00	3.09
5350.000	47.10	PK	H	11.94	59.04	74.00	14.96
5350.000	34.34	AV	H	11.94	46.28	54.00	7.72
5350.000	47.28	PK	V	11.94	59.22	74.00	14.78
5350.000	34.51	AV	V	11.94	46.45	54.00	7.55
10420.000	34.62	PK	H	20.51	55.13	68.20	13.07
10420.000	34.79	PK	V	20.51	55.30	68.20	12.90

5725-5850MHz**802.11a Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5745	MHz		
11490.000	34.32	PK	H	21.49	55.81	74.00	18.19
11490.000	22.45	AV	H	21.49	43.94	54.00	10.06
11490.000	34.17	PK	V	21.49	55.66	74.00	18.34
11490.000	22.31	AV	V	21.49	43.80	54.00	10.20
Middle Channel:				5785	MHz		
11570.000	34.10	PK	H	21.71	55.81	74.00	18.19
11570.000	22.18	AV	H	21.71	43.89	54.00	10.11
11570.000	34.94	PK	V	21.71	56.65	74.00	17.35
11570.000	22.03	AV	V	21.71	43.74	54.00	10.26
High Channel:				5825	MHz		
11650.000	34.54	PK	H	22.04	56.58	74.00	17.42
11650.000	22.63	AV	H	22.04	44.67	54.00	9.33
11650.000	34.38	PK	V	22.04	56.42	74.00	17.58
11650.000	22.52	AV	V	22.04	44.56	54.00	9.44

802.11ac vht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5745	MHz		
11490.000	34.17	PK	H	21.49	55.66	74.00	18.34
11490.000	22.32	AV	H	21.49	43.81	54.00	10.19
11490.000	34.01	PK	V	21.49	55.50	74.00	18.50
11490.000	22.14	AV	V	21.49	43.63	54.00	10.37
Middle Channel:				5785	MHz		
11570.000	34.00	PK	H	21.71	55.71	74.00	18.29
11570.000	22.11	AV	H	21.71	43.82	54.00	10.18
11570.000	34.83	PK	V	21.71	56.54	74.00	17.46
11570.000	22.94	AV	V	21.71	44.65	54.00	9.35
High Channel:				5825	MHz		
11650.000	34.37	PK	H	22.04	56.41	74.00	17.59
11650.000	22.50	AV	H	22.04	44.54	54.00	9.46
11650.000	34.18	PK	V	22.04	56.22	74.00	17.78
11650.000	22.31	AV	V	22.04	44.35	54.00	9.65

802.11ac vht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5755	MHz		
11510.000	34.04	PK	H	21.48	55.52	74.00	18.48
11510.000	22.61	AV	H	21.48	44.09	54.00	9.91
11510.000	34.87	PK	V	21.48	56.35	74.00	17.65
11510.000	22.45	AV	V	21.48	43.93	54.00	10.07
High Channel:				5795	MHz		
11590.000	34.68	PK	H	21.78	56.46	74.00	17.54
11590.000	22.23	AV	H	21.78	44.01	54.00	9.99
11590.000	34.51	PK	V	21.78	56.29	74.00	17.71
11590.000	22.07	AV	V	21.78	43.85	54.00	10.15

802.11ac vht80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel:				5775	MHz		
11550.000	34.03	PK	H	21.63	55.66	74.00	18.34
11550.000	22.79	AV	H	21.63	44.42	54.00	9.58
11550.000	34.86	PK	V	21.63	56.49	74.00	17.51
11550.000	22.60	AV	V	21.63	44.23	54.00	9.77

Aux ant**5150-5250MHz:****802.11a Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180 MHz							
5150.000	48.53	PK	H	11.67	60.20	74.00	13.80
5150.000	33.16	AV	H	11.67	44.83	54.00	9.17
5150.000	49.05	PK	V	11.67	60.72	74.00	13.28
5150.000	34.04	AV	V	11.67	45.71	54.00	8.29
10360.000	34.07	PK	H	20.47	54.54	68.20	13.66
10360.000	34.58	PK	V	20.47	55.05	68.20	13.15
Middle Channel: 5200 MHz							
10400.000	34.24	PK	H	20.54	54.78	68.20	13.42
10400.000	34.90	PK	V	20.54	55.44	68.20	12.76
High Channel: 5240 MHz							
5350.000	46.00	PK	H	11.94	57.94	74.00	16.06
5350.000	32.89	AV	H	11.94	44.83	54.00	9.17
5350.000	46.47	PK	V	11.94	58.41	74.00	15.59
5350.000	33.14	AV	V	11.94	45.08	54.00	8.92
10480.000	34.46	PK	H	20.42	54.88	68.20	13.32
10480.000	34.19	PK	V	20.42	54.61	68.20	13.59

802.11ac vht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180 MHz							
5150.000	47.44	PK	H	11.67	59.11	74.00	14.89
5150.000	33.35	AV	H	11.67	45.02	54.00	8.98
5150.000	47.72	PK	V	11.67	59.39	74.00	14.61
5150.000	33.81	AV	V	11.67	45.48	54.00	8.52
10360.000	34.50	PK	H	20.47	54.97	68.20	13.23
10360.000	34.84	PK	V	20.47	55.31	68.20	12.89
Middle Channel: 5200 MHz							
10400.000	34.01	PK	H	20.54	54.55	68.20	13.65
10400.000	34.40	PK	V	20.54	54.94	68.20	13.26
High Channel: 5240 MHz							
5350.000	46.10	PK	H	11.94	58.04	74.00	15.96
5350.000	32.88	AV	H	11.94	44.82	54.00	9.18
5350.000	46.46	PK	V	11.94	58.40	74.00	15.60
5350.000	33.09	AV	V	11.94	45.03	54.00	8.97
10480.000	34.33	PK	H	20.42	54.75	68.20	13.45
10480.000	34.57	PK	V	20.42	54.99	68.20	13.21

802.11ac vht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5150.000	52.83	PK	H	11.67	64.50	74.00	9.50
5150.000	37.12	AV	H	11.67	48.79	54.00	5.21
5150.000	54.05	PK	V	11.67	65.72	74.00	8.28
5150.000	37.39	AV	V	11.67	49.06	54.00	4.94
10380.000	34.66	PK	H	20.51	55.17	68.20	13.03
10380.000	34.64	PK	V	20.51	55.15	68.20	13.05
High Channel: 5230 MHz							
5350.000	45.85	PK	H	11.94	57.79	74.00	16.21
5350.000	32.99	AV	H	11.94	44.93	54.00	9.07
5350.000	46.20	PK	V	11.94	58.14	74.00	15.86
5350.000	33.24	AV	V	11.94	45.18	54.00	8.82
10460.000	34.27	PK	H	20.45	54.72	68.20	13.48
10460.000	34.51	PK	V	20.45	54.96	68.20	13.24

802.11ac vht80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel:				5210	MHz		
5150.000	52.85	PK	H	11.67	64.52	74.00	9.48
5150.000	38.64	AV	H	11.67	50.31	54.00	3.69
5150.000	53.59	PK	V	11.67	65.26	74.00	8.74
5150.000	39.11	AV	V	11.67	50.78	54.00	3.22
5350.000	46.06	PK	H	11.94	58.00	74.00	16.00
5350.000	33.59	AV	H	11.94	45.53	54.00	8.47
5350.000	46.67	PK	V	11.94	58.61	74.00	15.39
5350.000	33.92	AV	V	11.94	45.86	54.00	8.14
10420.000	34.88	PK	H	20.51	55.39	68.20	12.81
10420.000	34.66	PK	V	20.51	55.17	68.20	13.03

5725-5850MHz**802.11a Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5745	MHz		
11490.000	34.73	PK	H	21.49	56.22	74.00	17.78
11490.000	22.06	AV	H	21.49	43.55	54.00	10.45
11490.000	34.54	PK	V	21.49	56.03	74.00	17.97
11490.000	22.02	AV	V	21.49	43.51	54.00	10.49
Middle Channel:				5785	MHz		
11570.000	34.72	PK	H	21.71	56.43	74.00	17.57
11570.000	22.65	AV	H	21.71	44.36	54.00	9.64
11570.000	34.00	PK	V	21.71	55.71	74.00	18.29
11570.000	22.88	AV	V	21.71	44.59	54.00	9.41
High Channel:				5825	MHz		
11650.000	34.29	PK	H	22.04	56.33	74.00	17.67
11650.000	22.58	AV	H	22.04	44.62	54.00	9.38
11650.000	34.99	PK	V	22.04	57.03	74.00	16.97
11650.000	22.65	AV	V	22.04	44.69	54.00	9.31

802.11ac vht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5745	MHz		
11490.000	34.92	PK	H	21.49	56.41	74.00	17.59
11490.000	22.10	AV	H	21.49	43.59	54.00	10.41
11490.000	34.41	PK	V	21.49	55.90	74.00	18.10
11490.000	22.07	AV	V	21.49	43.56	54.00	10.44
Middle Channel:				5785	MHz		
11570.000	34.83	PK	H	21.71	56.54	74.00	17.46
11570.000	22.61	AV	H	21.71	44.32	54.00	9.68
11570.000	34.08	PK	V	21.71	55.79	74.00	18.21
11570.000	22.82	AV	V	21.71	44.53	54.00	9.47
High Channel:				5825	MHz		
11650.000	34.27	PK	H	22.04	56.31	74.00	17.69
11650.000	22.46	AV	H	22.04	44.50	54.00	9.50
11650.000	34.84	PK	V	22.04	56.88	74.00	17.12
11650.000	22.61	AV	V	22.04	44.65	54.00	9.35

802.11ac vht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5755	MHz		
11510.000	34.53	PK	H	21.48	56.01	74.00	17.99
11510.000	22.38	AV	H	21.48	43.86	54.00	10.14
11510.000	34.87	PK	V	21.48	56.35	74.00	17.65
11510.000	22.65	AV	V	21.48	44.13	54.00	9.87
High Channel:				5795	MHz		
11590.000	34.66	PK	H	21.78	56.44	74.00	17.56
11590.000	22.70	AV	H	21.78	44.48	54.00	9.52
11590.000	34.24	PK	V	21.78	56.02	74.00	17.98
11590.000	22.90	AV	V	21.78	44.68	54.00	9.32

802.11ac vht80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel:				5775	MHz		
11550.000	34.86	PK	H	21.63	56.49	74.00	17.51
11550.000	22.12	AV	H	21.63	43.75	54.00	10.25
11550.000	34.50	PK	V	21.63	56.13	74.00	17.87
11550.000	22.29	AV	V	21.63	43.92	54.00	10.08

Test plots for Band Edge Measurements (Radiated)

Main ant

802.11a

Test Channel:

5745MHz

Ant. Polar. :


Horizontal

Project No.: CR231061288-RF

Tester: Mack Huang

Polarization: Horizontal

Note:

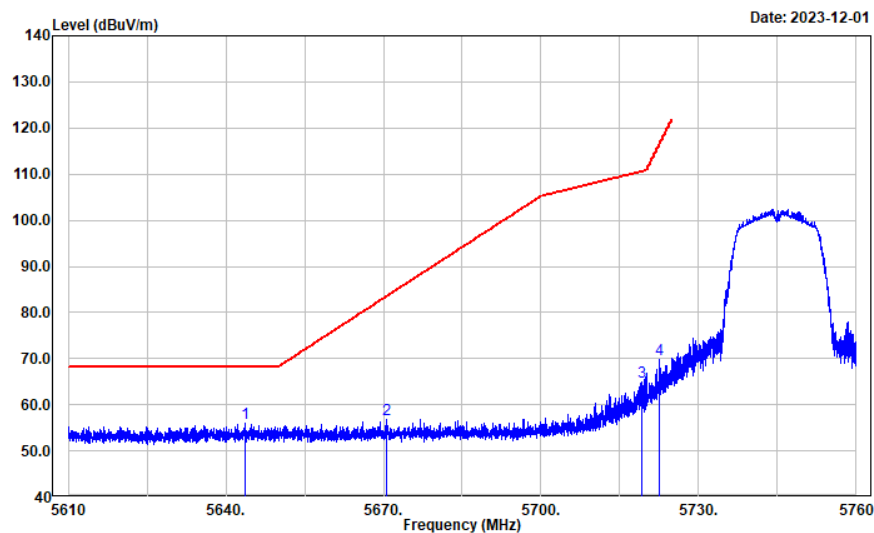

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5643.727	43.79	12.29	56.08	68.20	12.12	Peak
2	5670.702	44.44	12.42	56.86	83.56	26.70	Peak
3	5719.252	52.27	12.57	64.84	110.59	45.75	Peak
4	5722.553	57.19	12.57	69.76	116.62	46.86	Peak

802.11a


Test Channel:

5745MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

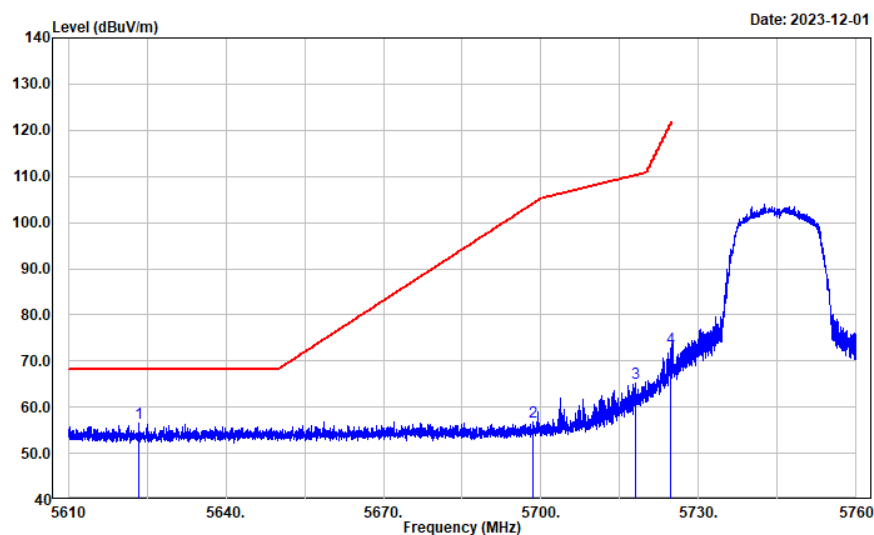

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5623.413	44.23	12.18	56.41	68.20	11.79	Peak
2	5698.397	44.28	12.55	56.83	104.02	47.19	Peak
3	5717.932	52.71	12.57	65.28	110.22	44.94	Peak
4	5724.563	60.24	12.57	72.81	121.20	48.39	Peak

802.11a


Test Channel:

5825MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

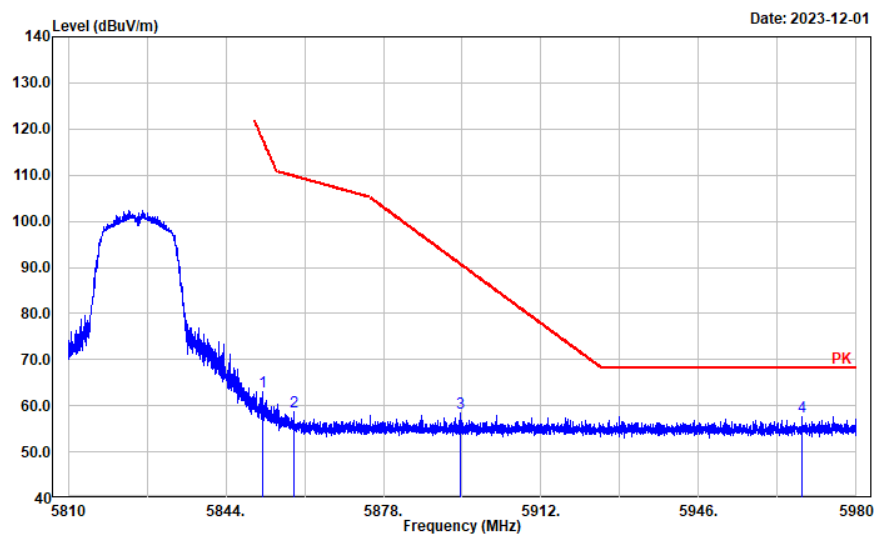

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5851.828	50.38	12.78	63.16	118.03	54.87	Peak
2	5858.698	45.90	12.80	58.70	109.76	51.06	Peak
3	5894.711	45.36	12.99	58.35	90.58	32.23	Peak
4	5968.302	44.48	13.11	57.59	68.20	10.61	Peak

802.11a


Test Channel:

5825MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

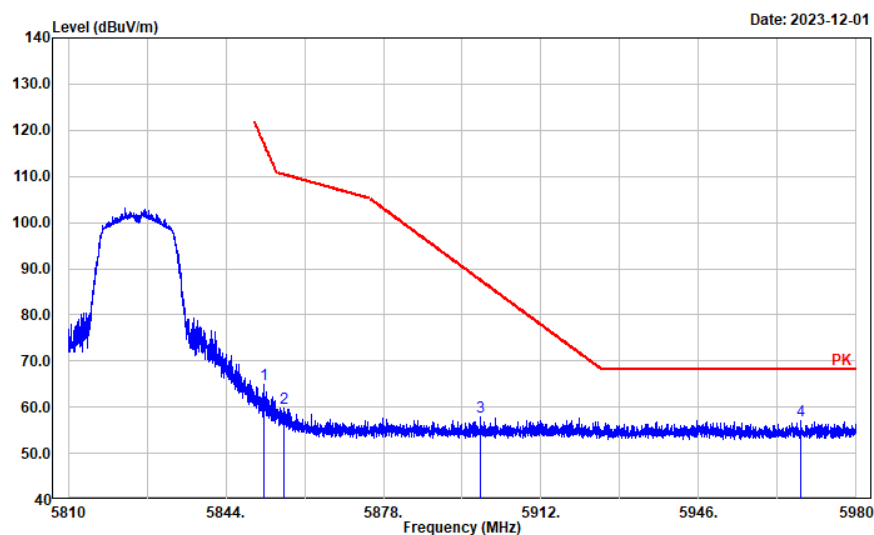

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5852.305	52.22	12.78	65.00	116.94	51.94	Peak
2	5856.487	47.00	12.81	59.81	110.38	50.57	Peak
3	5898.860	44.92	13.02	57.94	87.50	29.56	Peak
4	5967.996	44.04	13.11	57.15	68.20	11.05	Peak

802.11ac vht20


Test Channel:

5745MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

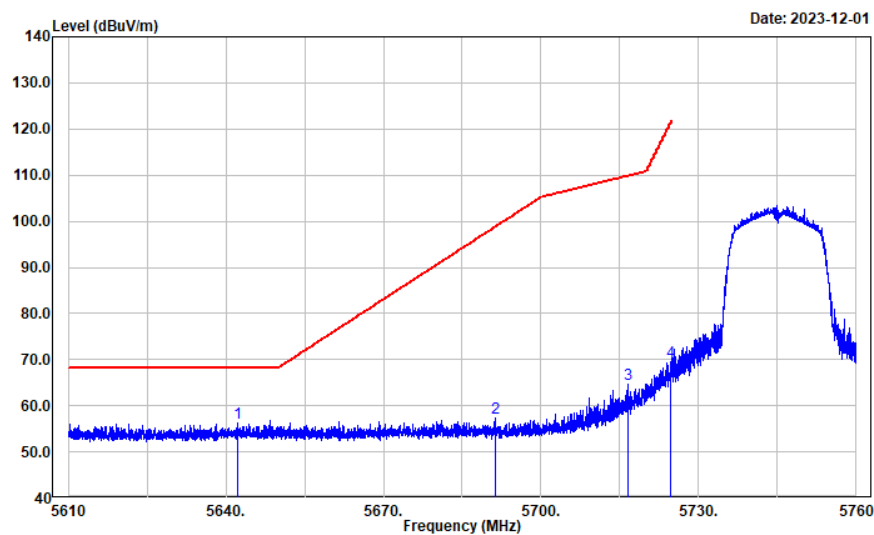

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5642.347	44.03	12.28	56.31	68.20	11.89	Peak
2	5691.376	44.79	12.51	57.30	98.84	41.54	Peak
3	5716.521	52.19	12.56	64.75	109.83	45.08	Peak
4	5724.653	57.05	12.57	69.62	121.41	51.79	Peak

802.11ac vht20


Test Channel:

5745MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

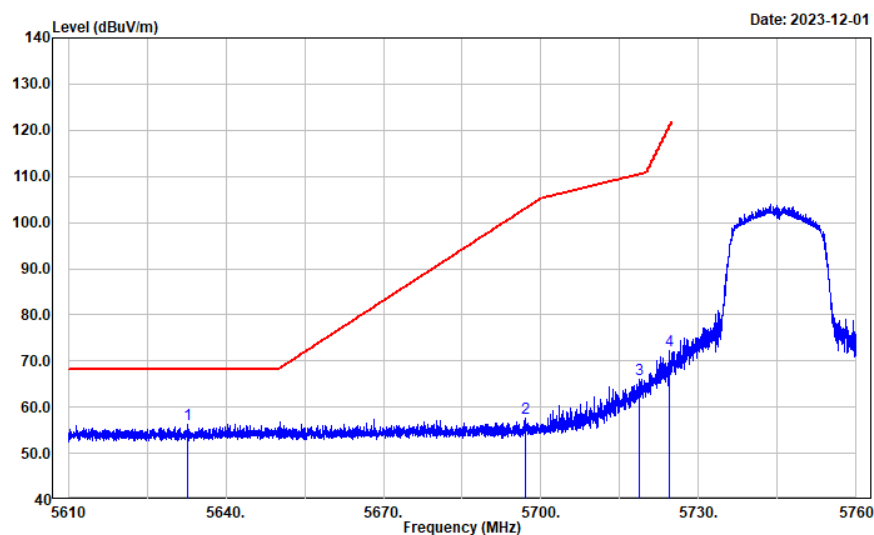

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5632.805	43.99	12.23	56.22	68.20	11.98	Peak
2	5697.137	45.18	12.54	57.72	103.09	45.37	Peak
3	5718.772	53.42	12.57	65.99	110.46	44.47	Peak
4	5724.533	59.59	12.57	72.16	121.14	48.98	Peak

802.11ac vht20


Test Channel:

5825MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

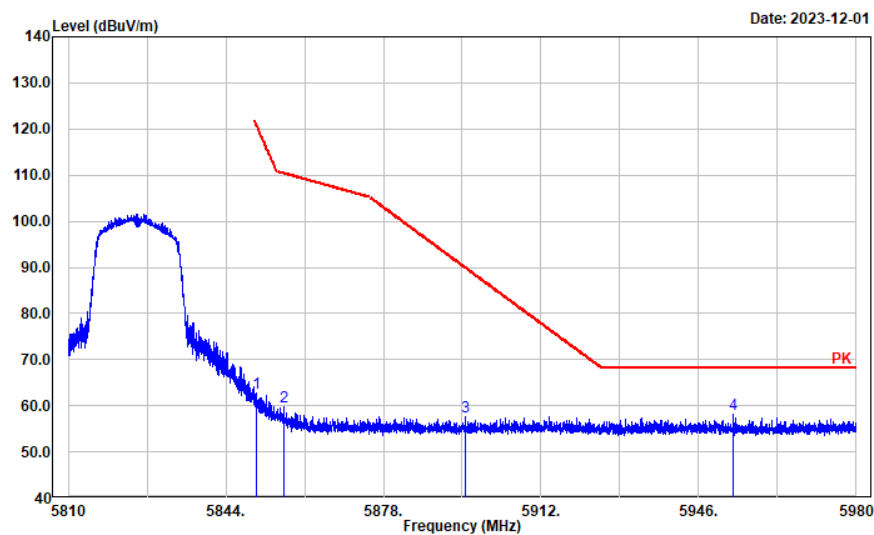

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.672	49.86	12.77	62.63	120.67	58.04	Peak
2	5856.555	46.91	12.81	59.72	110.36	50.64	Peak
3	5895.697	44.74	12.99	57.73	89.85	32.12	Peak
4	5953.509	44.98	13.06	58.04	68.20	10.16	Peak

802.11ac vht20


Test Channel:

5825MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

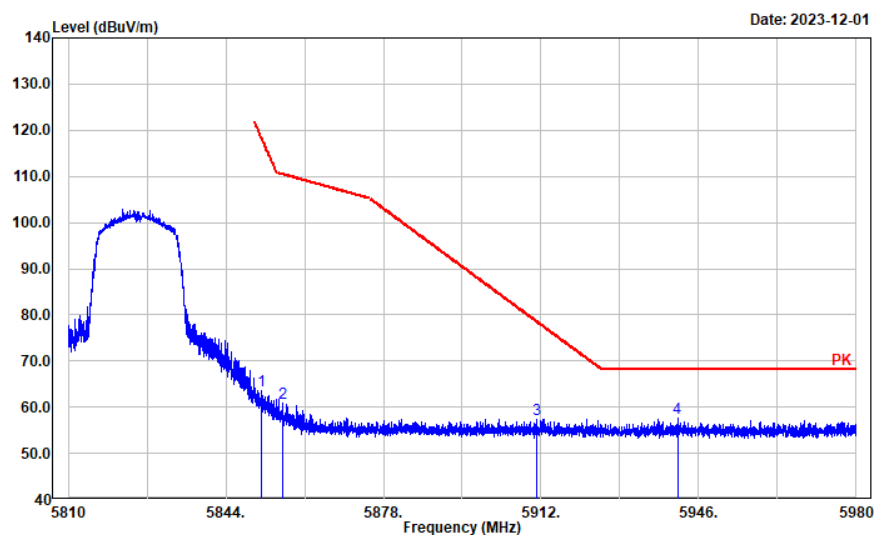

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5851.692	50.84	12.78	63.62	118.34	54.72	Peak
2	5856.147	48.09	12.80	60.89	110.48	49.59	Peak
3	5911.034	44.37	13.03	57.40	78.50	21.10	Peak
4	5941.437	44.56	13.04	57.60	68.20	10.60	Peak

802.11ac vht40


Test Channel:

5755MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

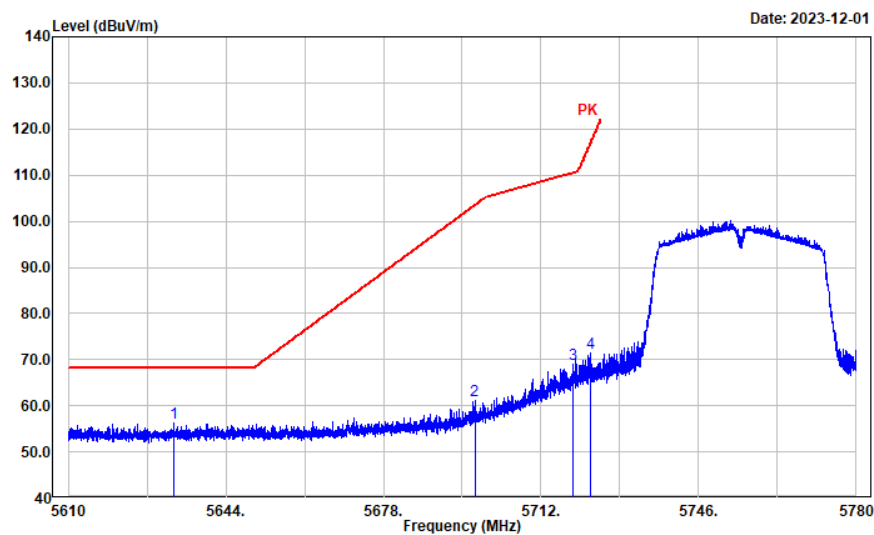

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5632.750	43.91	12.22	56.13	68.20	12.07	Peak
2	5697.704	48.63	12.54	61.17	103.51	42.34	Peak
3	5718.992	56.55	12.57	69.12	110.52	41.40	Peak
4	5722.767	58.80	12.57	71.37	117.11	45.74	Peak

802.11ac vht40


Test Channel:

5755MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

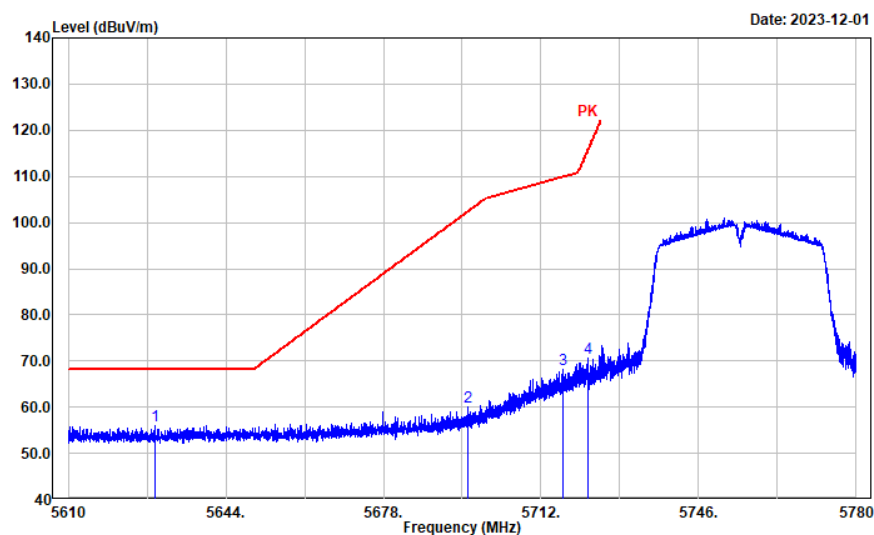

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5628.636	43.92	12.20	56.12	68.20	12.08	Peak
2	5696.309	47.41	12.53	59.94	102.48	42.54	Peak
3	5716.679	55.73	12.57	68.30	109.87	41.57	Peak
4	5722.019	58.09	12.57	70.66	115.40	44.74	Peak

802.11ac vht40


Test Channel:

5795MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

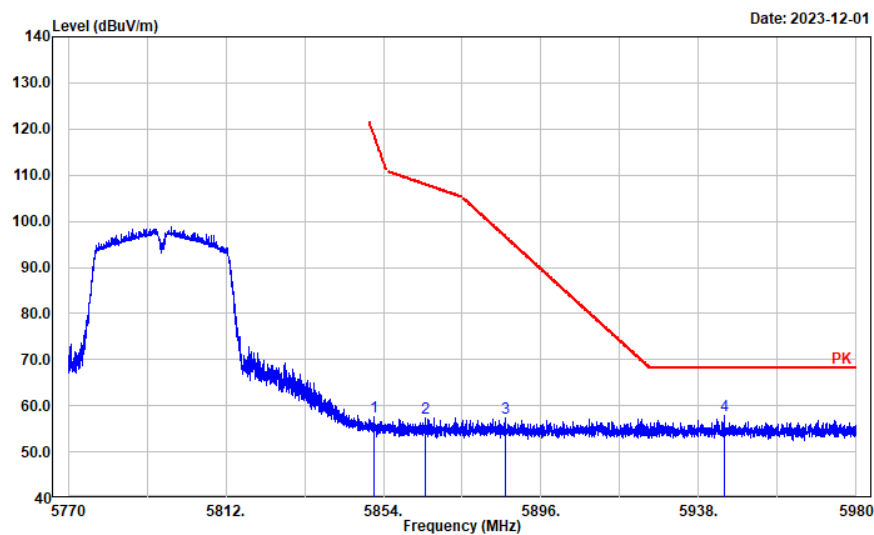

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5851.580	44.90	12.78	57.68	118.60	60.92	Peak
2	5865.191	44.59	12.84	57.43	107.94	50.51	Peak
3	5886.531	44.35	12.96	57.31	96.64	39.33	Peak
4	5944.881	44.79	13.03	57.82	68.20	10.38	Peak

802.11ac vht40


Test Channel:

5795MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

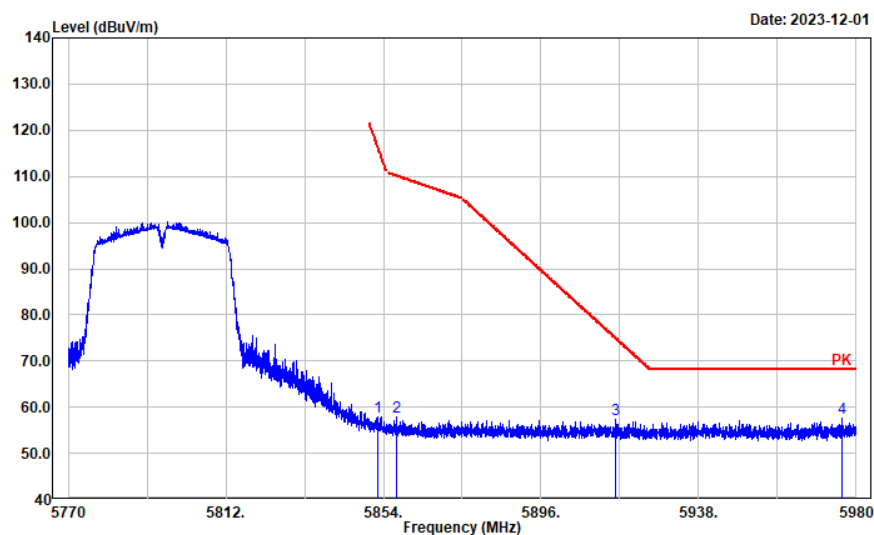

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5852.630	45.18	12.78	57.96	116.20	58.24	Peak
2	5857.545	45.10	12.81	57.91	110.09	52.18	Peak
3	5915.811	44.41	13.03	57.44	74.98	17.54	Peak
4	5976.219	44.43	13.14	57.57	68.20	10.63	Peak

802.11ac vht80


Test Channel:

5775MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

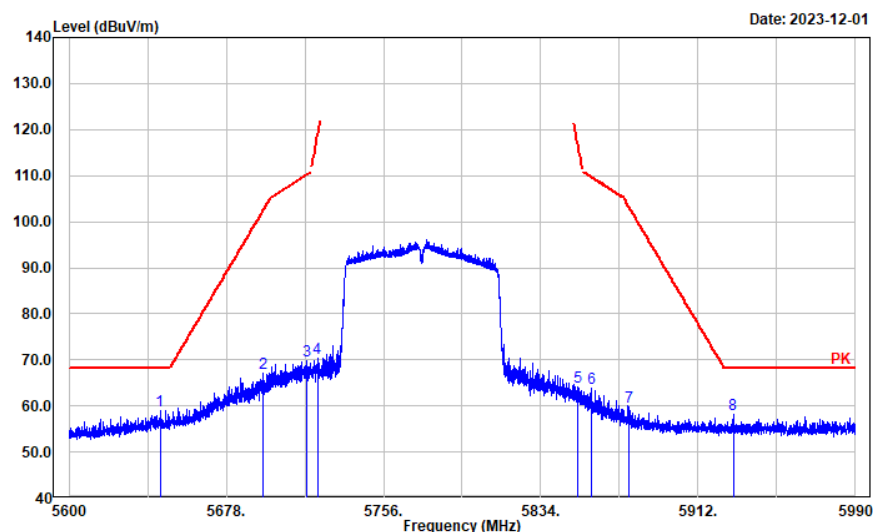

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5645.171	46.63	12.29	58.92	68.20	9.28	Peak
2	5695.959	54.51	12.53	67.04	102.22	35.18	Peak
3	5718.116	57.20	12.57	69.77	110.27	40.50	Peak
4	5723.187	57.65	12.57	70.22	118.07	47.85	Peak
5	5852.380	51.46	12.78	64.24	116.77	52.53	Peak
6	5859.012	51.14	12.81	63.95	109.68	45.73	Peak
7	5877.735	46.97	12.90	59.87	103.17	43.30	Peak
8	5929.382	45.09	13.03	58.12	68.20	10.08	Peak

802.11ac vht80


Test Channel:

5775MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

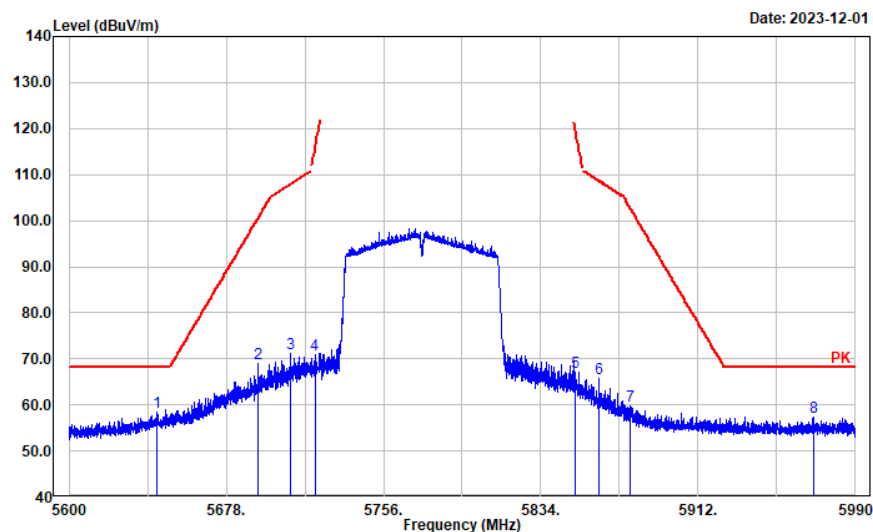

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5643.611	46.06	12.29	58.35	68.20	9.85	Peak
2	5694.009	56.38	12.52	68.90	100.78	31.88	Peak
3	5709.690	58.66	12.56	71.22	107.92	36.70	Peak
4	5721.938	58.20	12.57	70.77	115.22	44.45	Peak
5	5850.820	54.37	12.77	67.14	120.33	53.19	Peak
6	5862.834	52.93	12.83	65.76	108.60	42.84	Peak
7	5878.594	46.90	12.91	59.81	102.53	42.72	Peak
8	5969.326	44.26	13.11	57.37	68.20	10.83	Peak

Aux ant

802.11a


Test Channel:

5745MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

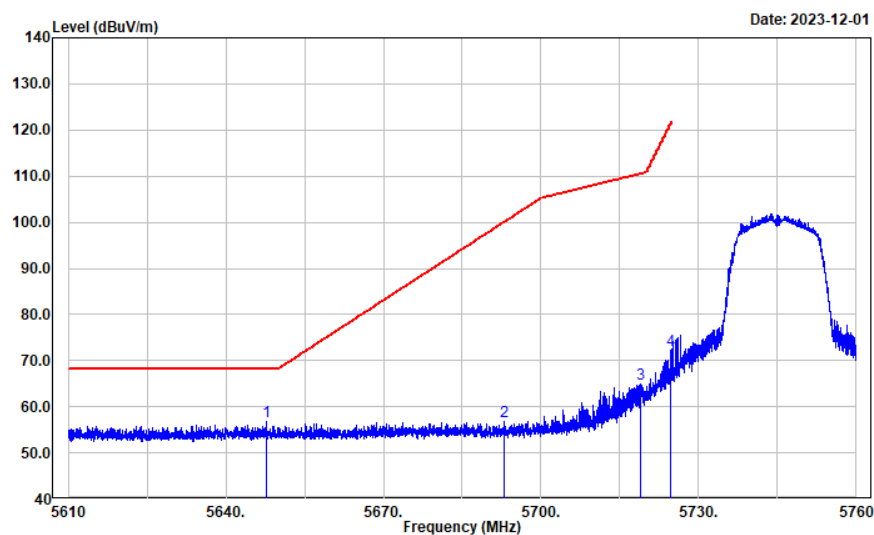

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5647.748	44.57	12.32	56.89	68.20	11.31	Peak
2	5693.086	44.38	12.52	56.90	100.10	43.20	Peak
3	5719.012	52.26	12.57	64.83	110.52	45.69	Peak
4	5724.773	59.70	12.57	72.27	121.68	49.41	Peak

802.11a


Test Channel:

5745MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

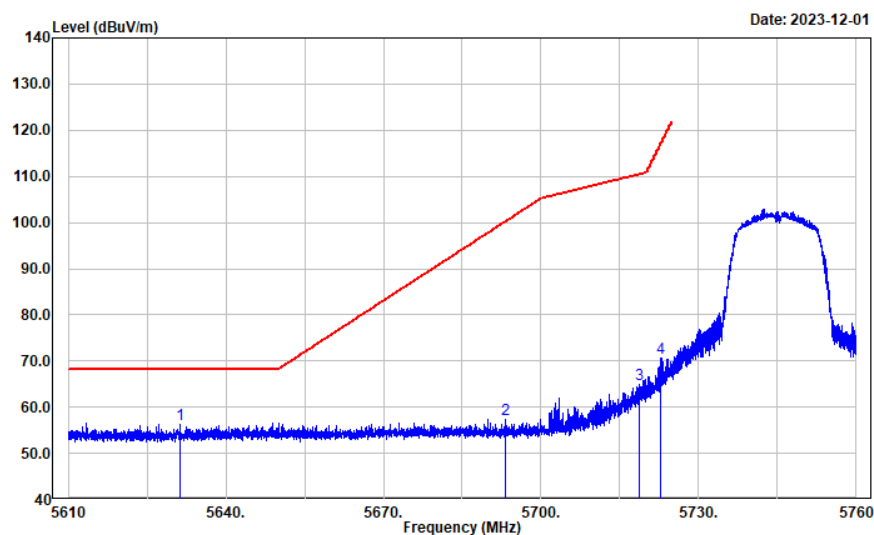

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5631.274	44.09	12.22	56.31	68.20	11.89	Peak
2	5693.177	44.75	12.52	57.27	100.17	42.90	Peak
3	5718.622	52.36	12.57	64.93	110.41	45.48	Peak
4	5722.763	58.18	12.57	70.75	117.10	46.35	Peak

802.11a


Test Channel:

5825MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

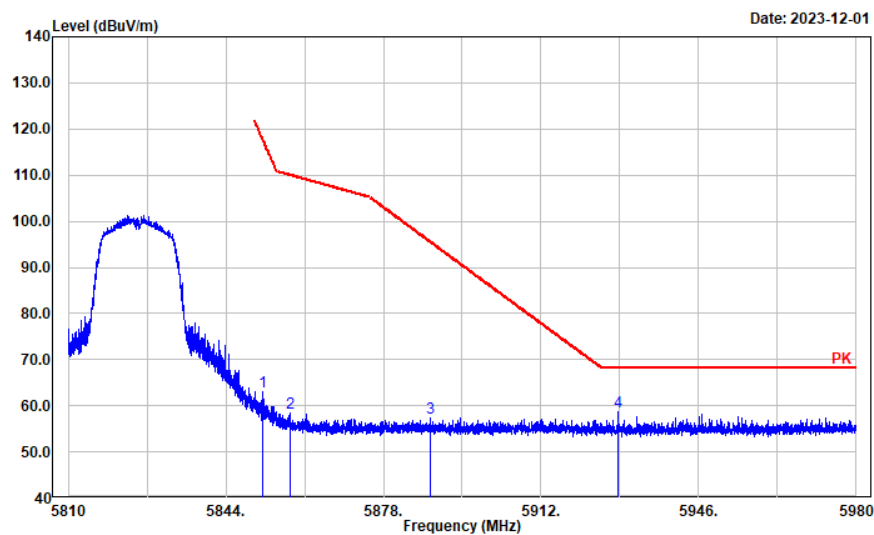

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5851.930	50.34	12.78	63.12	117.80	54.68	Peak
2	5857.780	45.64	12.81	58.45	110.02	51.57	Peak
3	5888.012	44.36	12.96	57.32	95.54	38.22	Peak
4	5928.582	45.67	13.03	58.70	68.20	9.50	Peak

802.11a


Test Channel:

5825MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

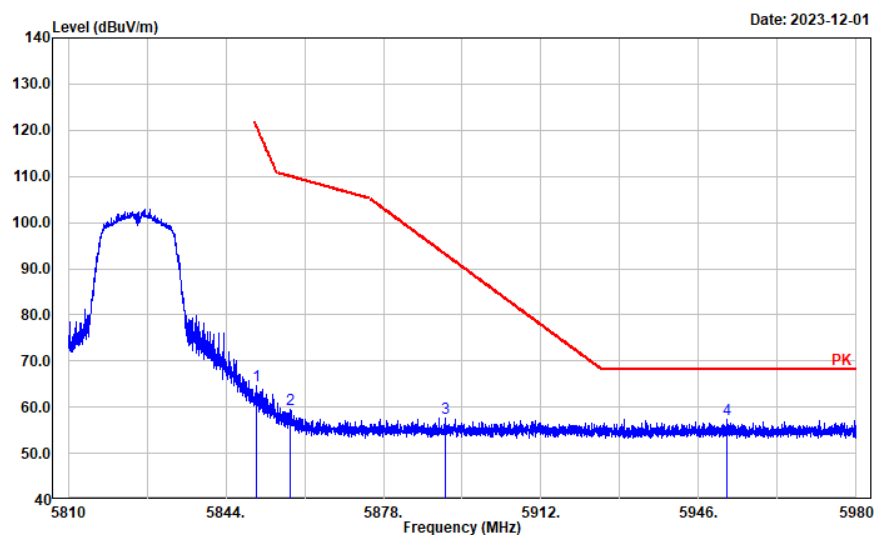

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.672	51.93	12.77	64.70	120.67	55.97	Peak
2	5857.780	46.59	12.81	59.40	110.02	50.62	Peak
3	5891.480	44.71	12.99	57.70	92.97	35.27	Peak
4	5951.979	44.24	13.04	57.28	68.20	10.92	Peak

802.11ac vht20


Test Channel:

5745MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

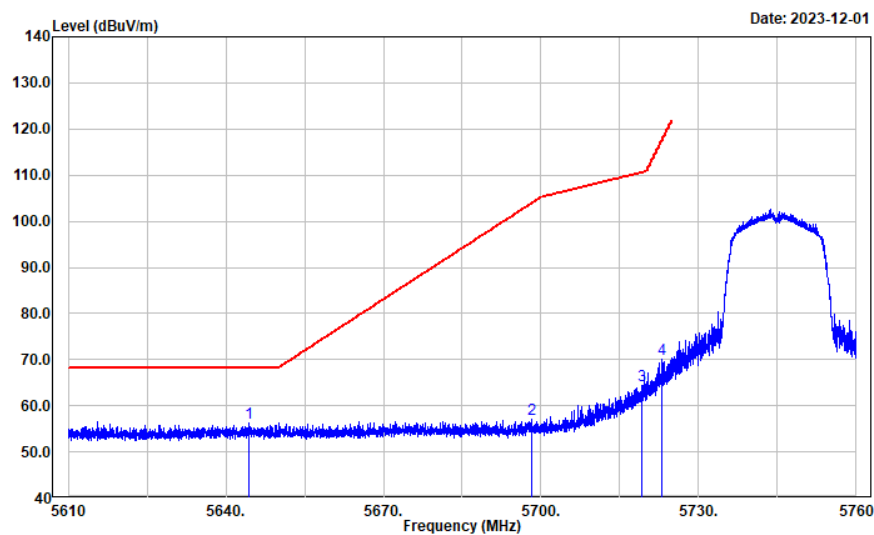

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5644.477	43.93	12.29	56.22	68.20	11.98	Peak
2	5698.248	44.41	12.54	56.95	103.91	46.96	Peak
3	5719.132	51.86	12.57	64.43	110.56	46.13	Peak
4	5723.063	57.58	12.57	70.15	117.78	47.63	Peak

802.11ac vht20


Test Channel:

5745MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

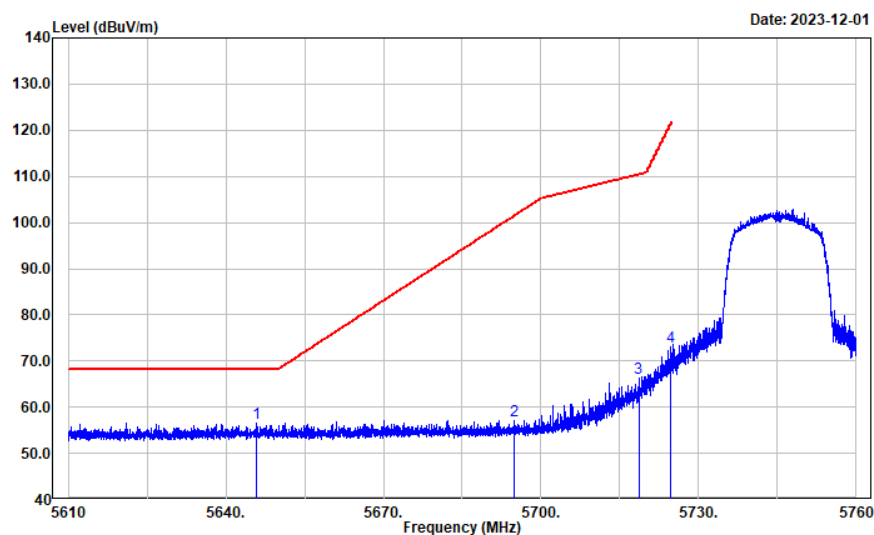

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5645.827	44.19	12.29	56.48	68.20	11.72	Peak
2	5694.797	44.64	12.52	57.16	101.36	44.20	Peak
3	5718.592	53.64	12.57	66.21	110.41	44.20	Peak
4	5724.623	60.39	12.57	72.96	121.34	48.38	Peak

802.11ac vht20


Test Channel:

5825MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

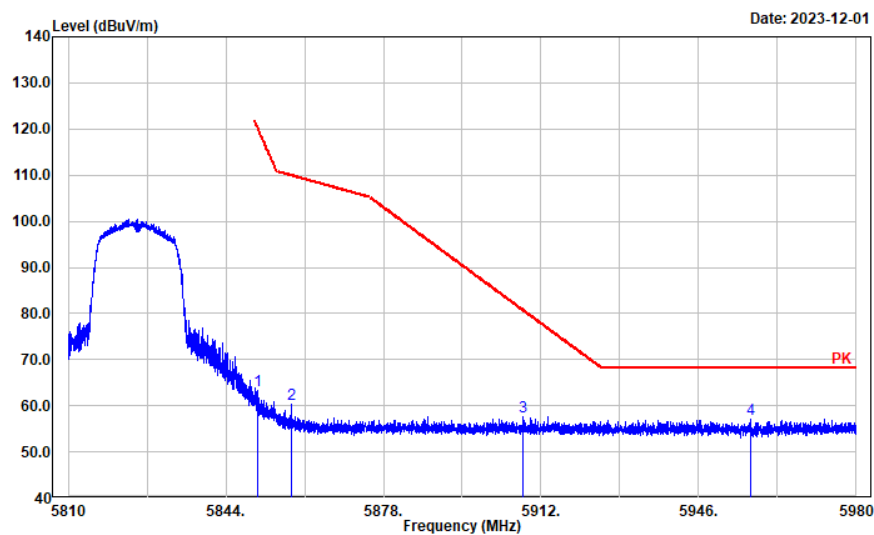

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.842	50.43	12.77	63.20	120.28	57.08	Peak
2	5858.085	47.44	12.81	60.25	109.93	49.68	Peak
3	5908.076	44.54	13.02	57.56	80.69	23.13	Peak
4	5957.113	43.95	13.06	57.01	68.20	11.19	Peak

802.11ac vht20


Test Channel:

5825MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

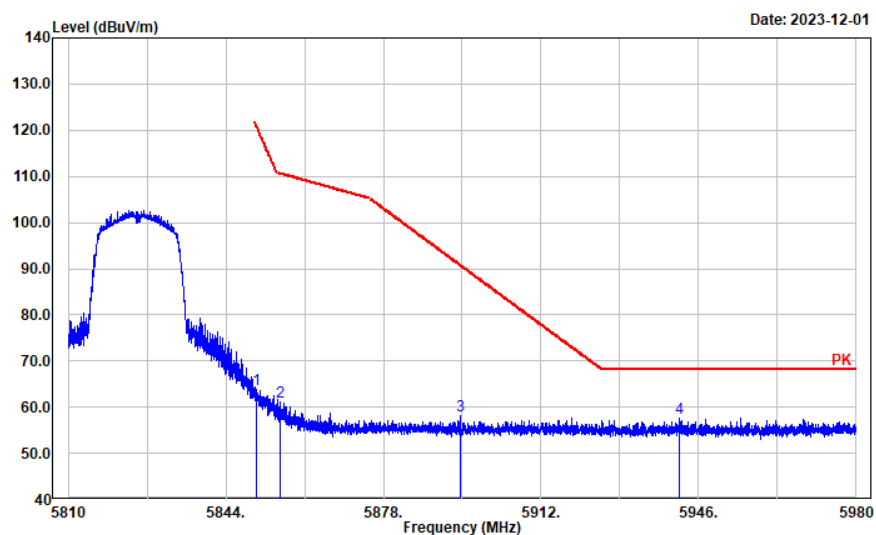

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.502	51.07	12.77	63.84	121.06	57.22	Peak
2	5855.705	48.33	12.80	61.13	110.60	49.47	Peak
3	5894.609	45.25	12.99	58.24	90.65	32.41	Peak
4	5941.913	44.72	13.03	57.75	68.20	10.45	Peak

802.11ac vht40


Test Channel:

5755MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

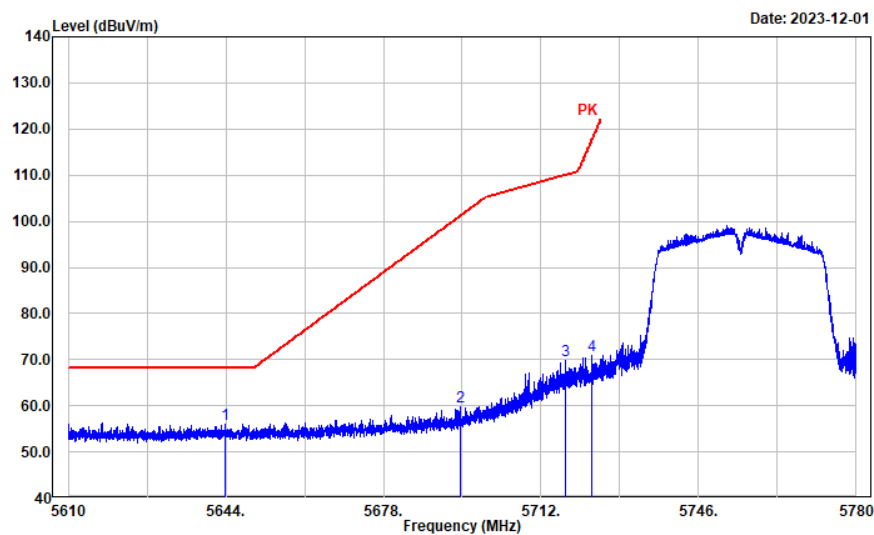

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5643.769	43.77	12.29	56.06	68.20	12.14	Peak
2	5694.541	47.14	12.52	59.66	101.18	41.52	Peak
3	5717.326	57.19	12.57	69.76	110.05	40.29	Peak
4	5723.004	58.38	12.57	70.95	117.65	46.70	Peak

802.11ac vht40


Test Channel:

5755MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

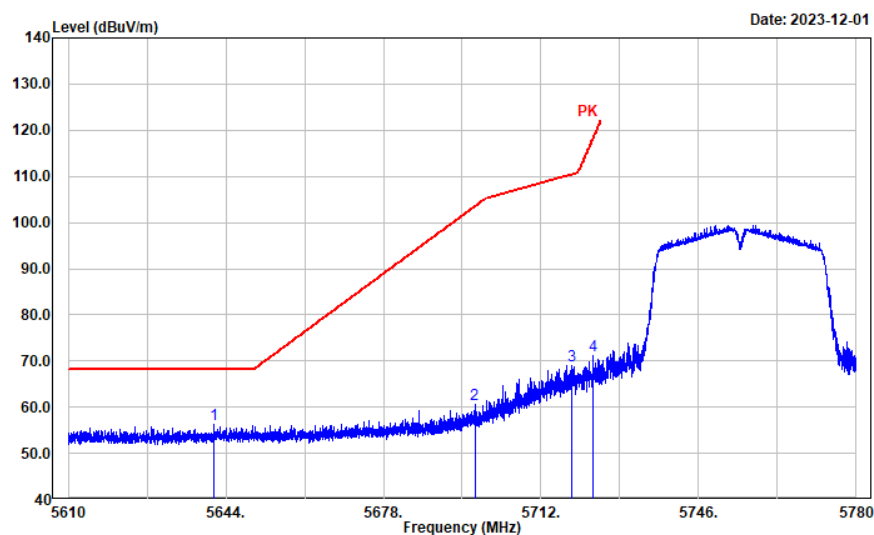

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5641.422	43.90	12.28	56.18	68.20	12.02	Peak
2	5697.704	48.09	12.54	60.63	103.51	42.88	Peak
3	5718.550	56.47	12.57	69.04	110.39	41.35	Peak
4	5723.243	58.65	12.57	71.22	118.19	46.97	Peak

802.11ac vht40


Test Channel:

5795MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

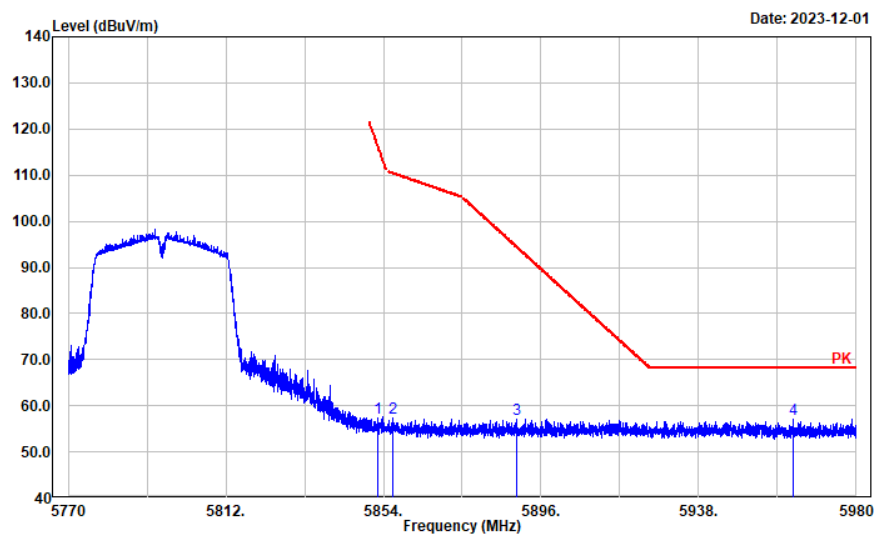

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5852.588	44.44	12.78	57.22	116.30	59.08	Peak
2	5856.537	44.51	12.81	57.32	110.37	53.05	Peak
3	5889.514	44.18	12.97	57.15	94.43	37.28	Peak
4	5963.323	43.86	13.09	56.95	68.20	11.25	Peak

802.11ac vht40


Test Channel:

5795MHz

Ant. Polar. :

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note:

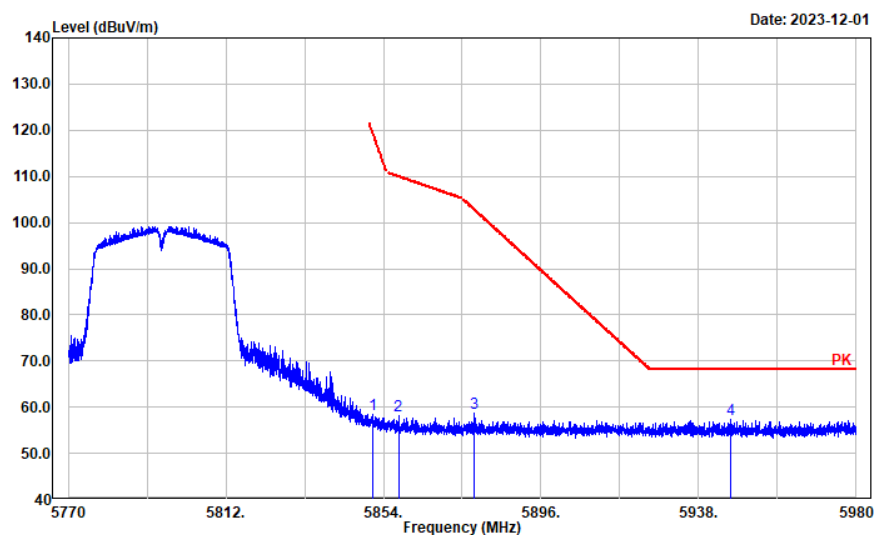

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5851.118	45.75	12.77	58.52	119.65	61.13	Peak
2	5858.008	45.22	12.81	58.03	109.96	51.93	Peak
3	5878.087	45.71	12.90	58.61	102.91	44.30	Peak
4	5946.604	44.39	13.03	57.42	68.20	10.78	Peak

802.11ac vht80


Test Channel:

5775MHz

Ant. Polar. :

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

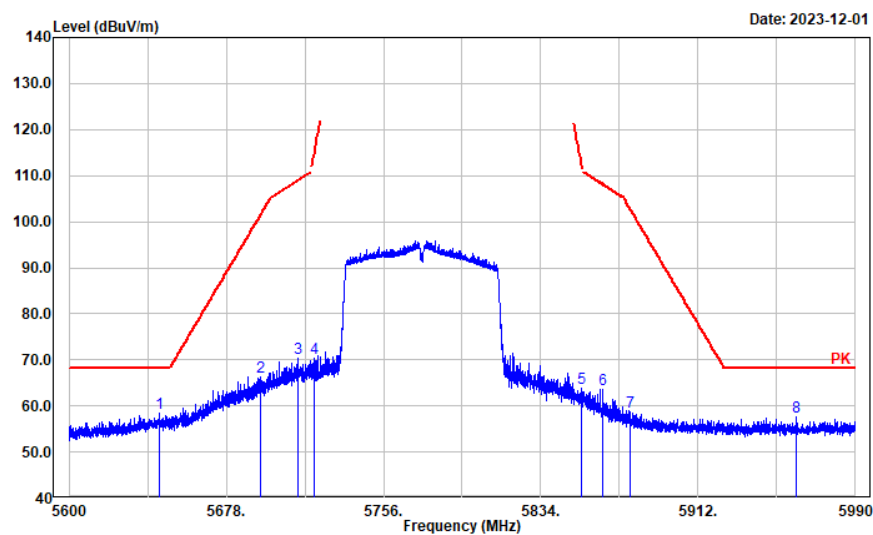

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5645.015	46.06	12.29	58.35	68.20	9.85	Peak
2	5694.789	53.87	12.52	66.39	101.36	34.97	Peak
3	5713.669	57.75	12.56	70.31	109.03	38.72	Peak
4	5721.626	57.86	12.57	70.43	114.51	44.08	Peak
5	5854.331	51.13	12.80	63.93	112.32	48.39	Peak
6	5864.551	50.79	12.84	63.63	108.12	44.49	Peak
7	5878.204	45.88	12.91	58.79	102.82	44.03	Peak
8	5960.900	44.48	13.08	57.56	68.20	10.64	Peak

802.11ac vht80


Test Channel:

5775MHz

Ant. Polar. :

Vertical


Project No.: CR231061288-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:

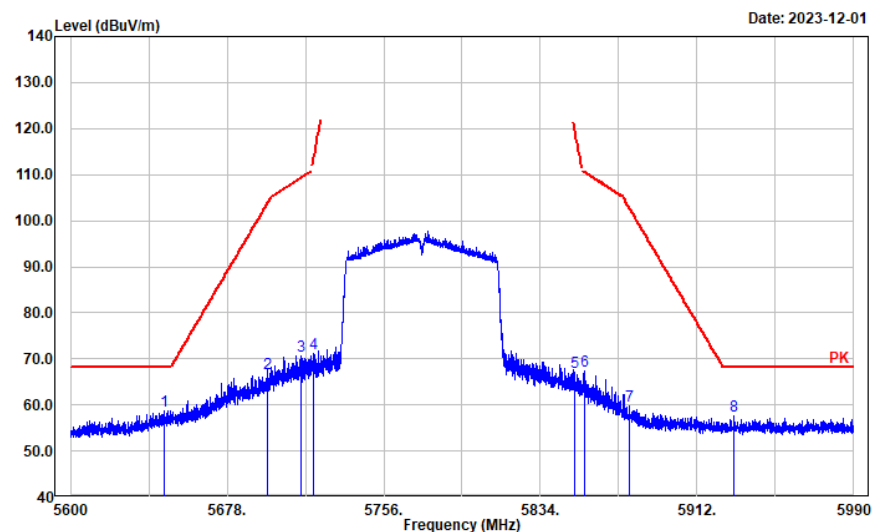

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5646.575	46.36	12.31	58.67	68.20	9.53	Peak
2	5698.065	54.18	12.54	66.72	103.77	37.05	Peak
3	5714.917	58.19	12.56	70.75	109.38	38.63	Peak
4	5720.924	58.53	12.57	71.10	112.91	41.81	Peak
5	5850.898	54.25	12.77	67.02	120.15	53.13	Peak
6	5856.125	54.68	12.80	67.48	110.48	43.00	Peak
7	5878.438	46.90	12.91	59.81	102.65	42.84	Peak
8	5930.552	44.66	13.04	57.70	68.20	10.50	Peak

Listed with the worst harmonic margin test plot (802.11a, 5825MHz)


Main ant

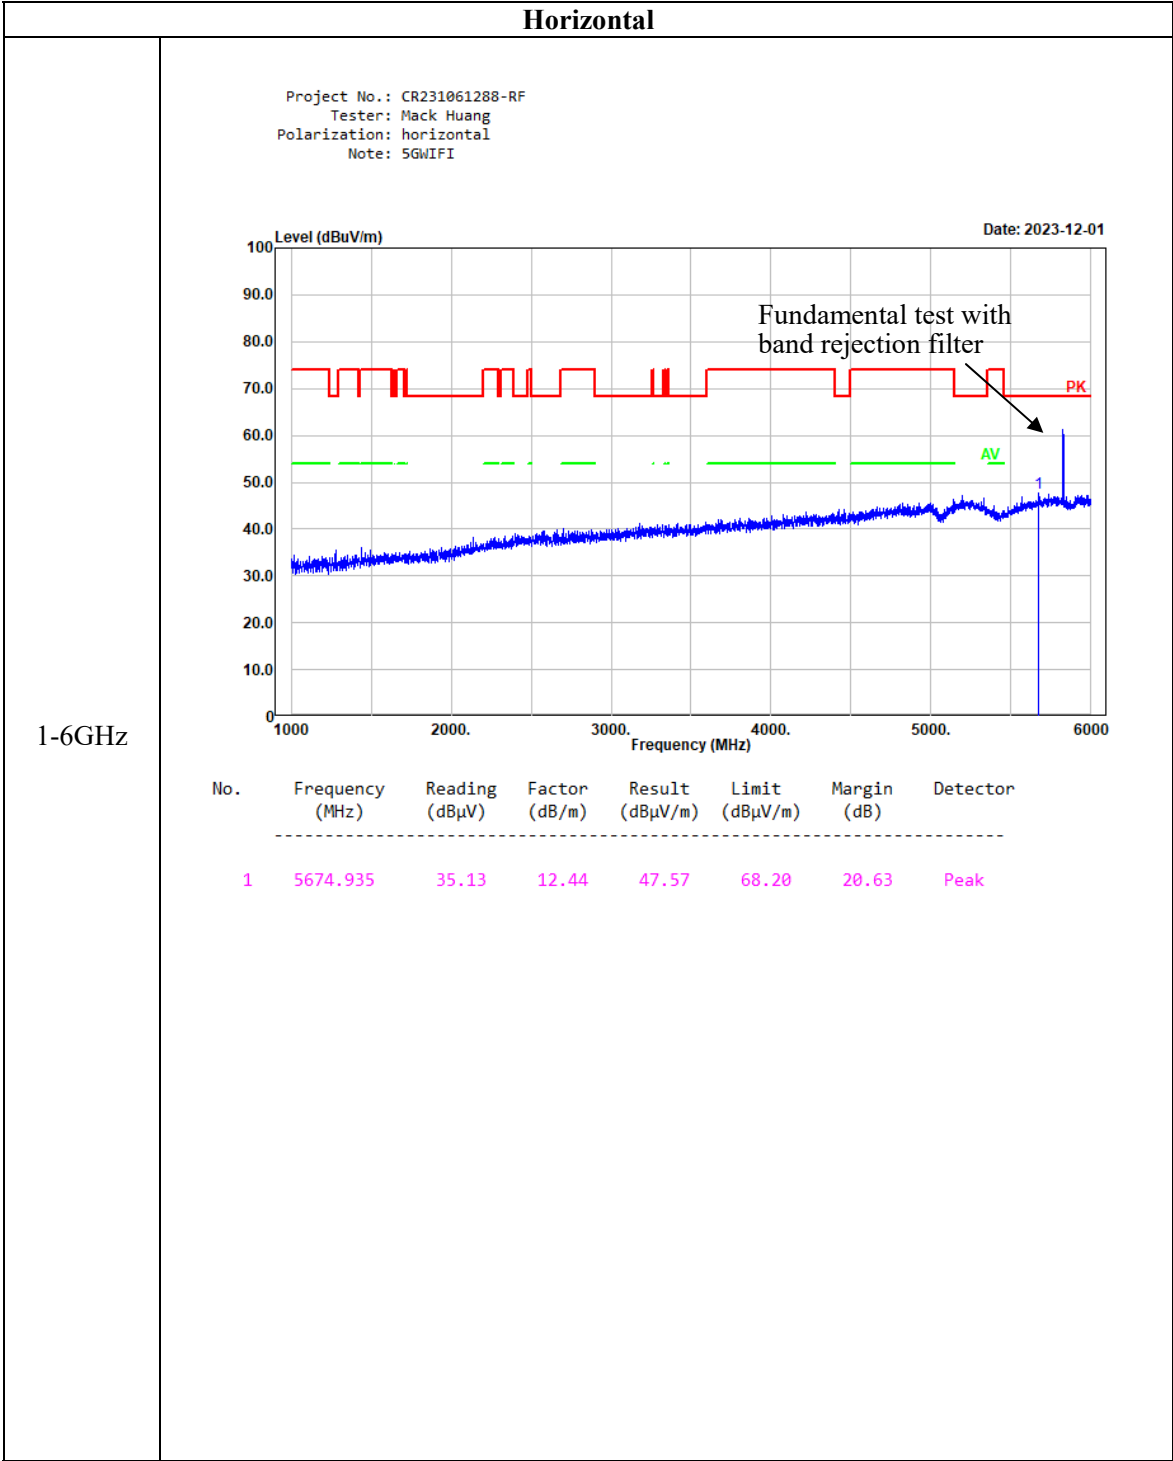


Horizontal

6-18GHz

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: horizontal
Note: 5GWiFi

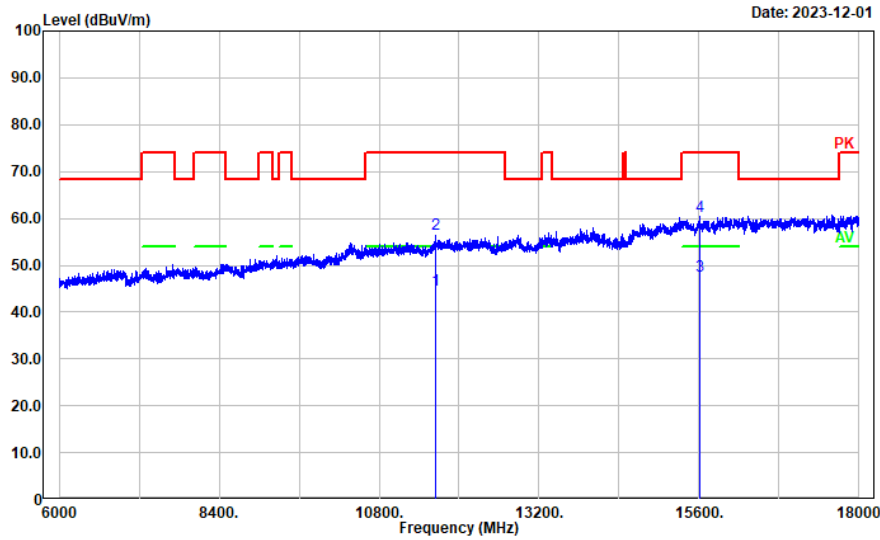

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	22.63	22.04	44.67	54.00	9.33	Average
2	11650.000	34.54	22.04	56.58	74.00	17.42	Peak
3	15606.720	22.93	24.71	47.64	54.00	6.36	Average
4	15606.720	35.71	24.71	60.42	74.00	13.58	Peak

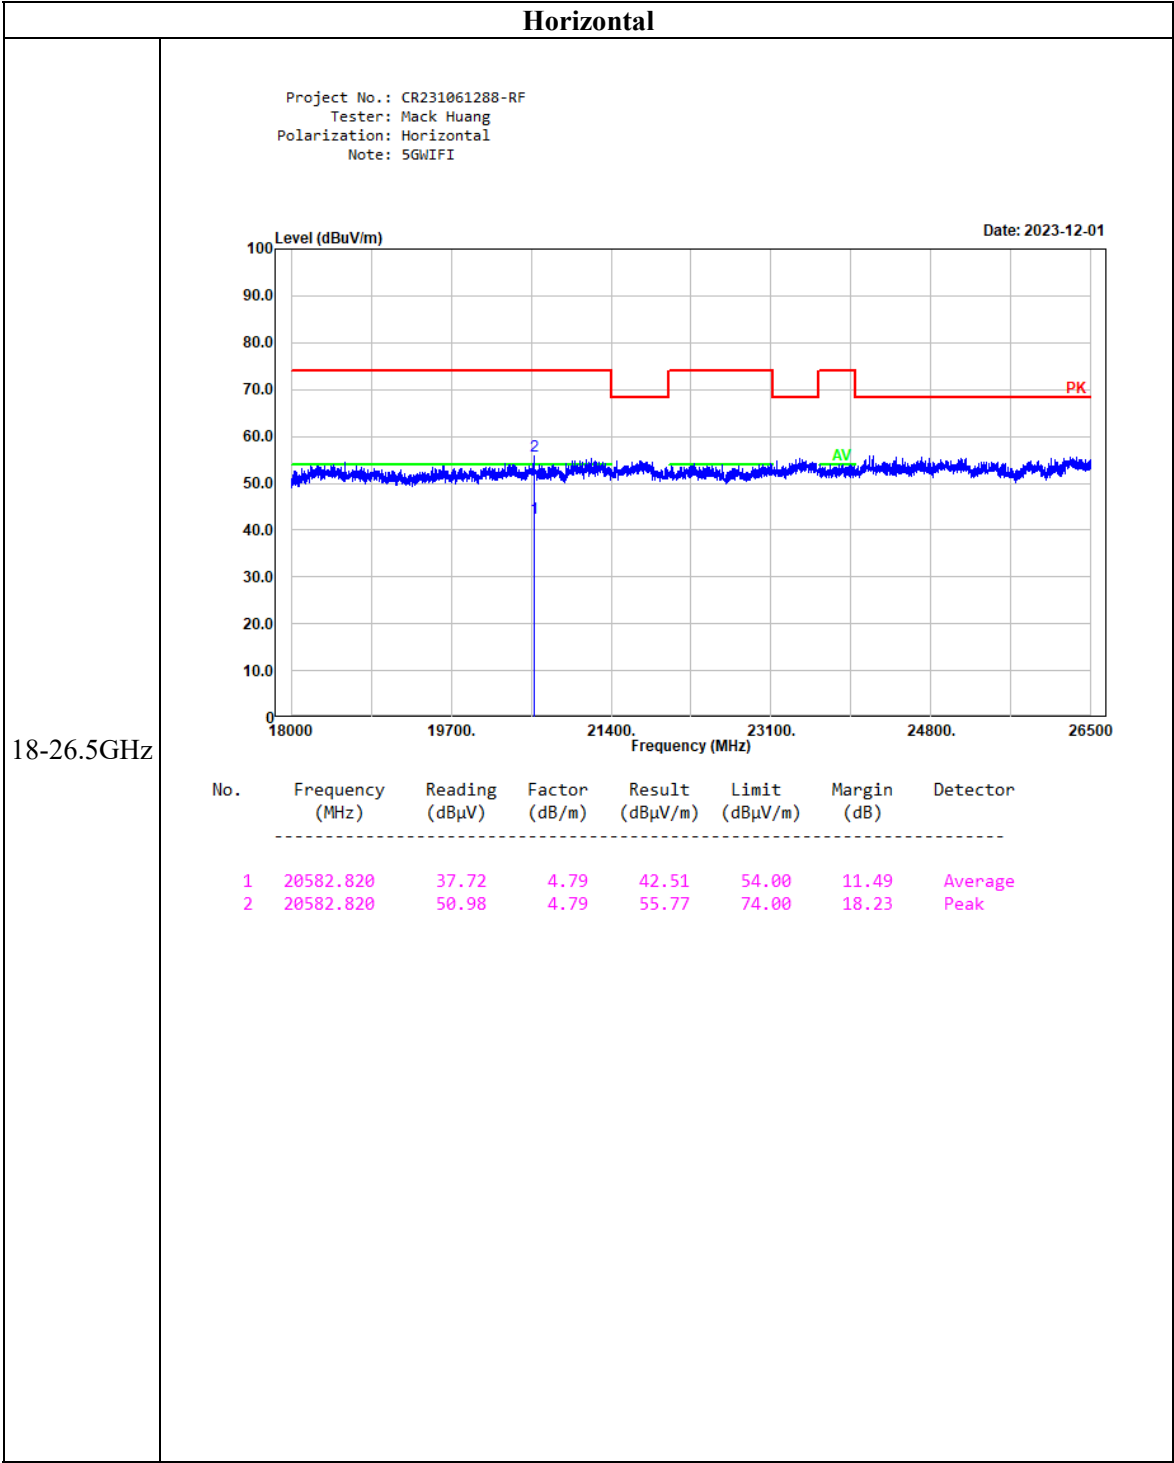


18-26.5GHz

Horizontal

26.5-40GHz


Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note: 5GWiFi

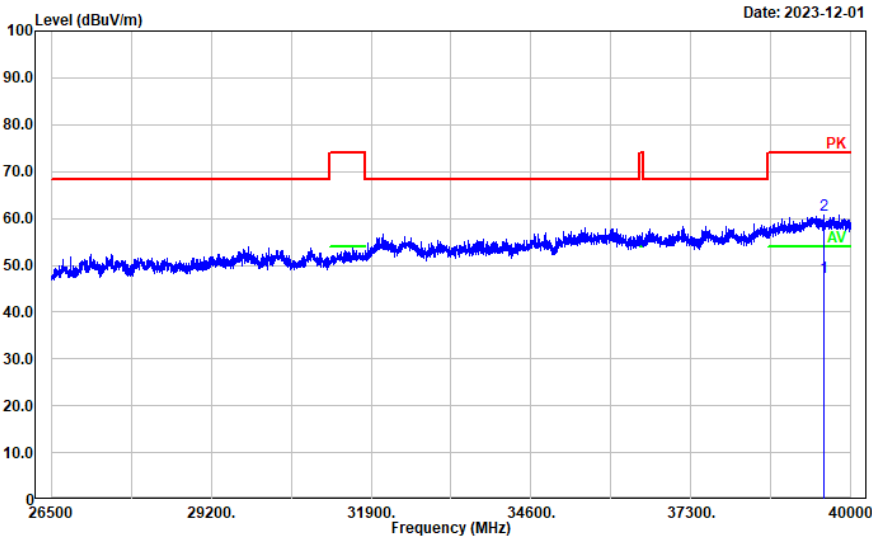

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39551.710	37.56	9.96	47.52	54.00	6.48	Average
2	39551.710	50.84	9.96	60.80	74.00	13.20	Peak

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note: 5GWiFi

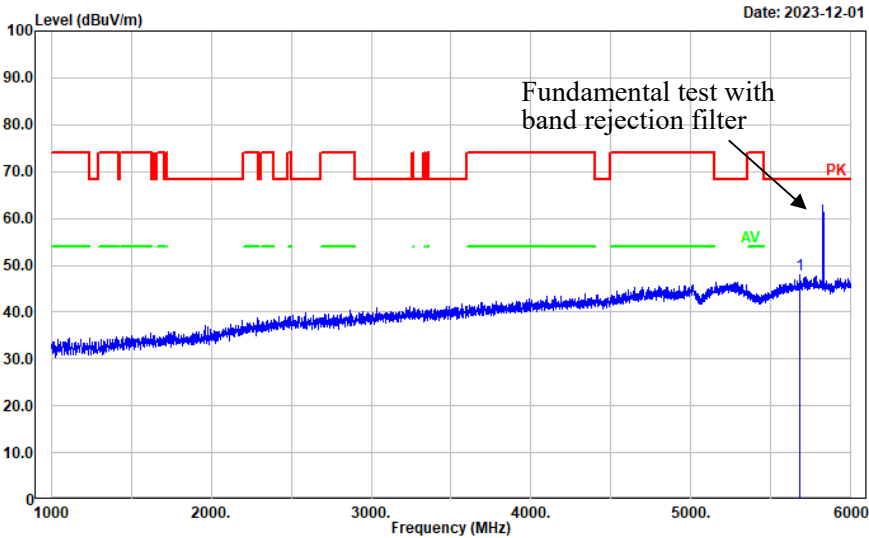


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5677.936	35.62	12.45	48.07	68.20	20.13	Peak


Vertical

6-18GHz

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note: 5GWiFi

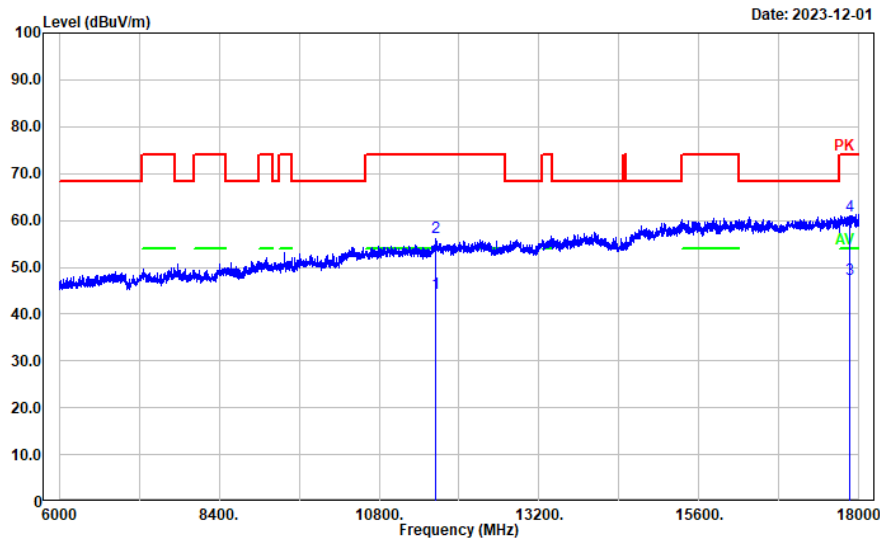

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11650.000	22.52	22.04	44.56	54.00	9.44	Average
2	11650.000	34.38	22.04	56.42	74.00	17.58	Peak
3	17865.570	15.38	32.00	47.38	54.00	6.62	Average
4	17865.570	28.87	32.00	60.87	74.00	13.13	Peak

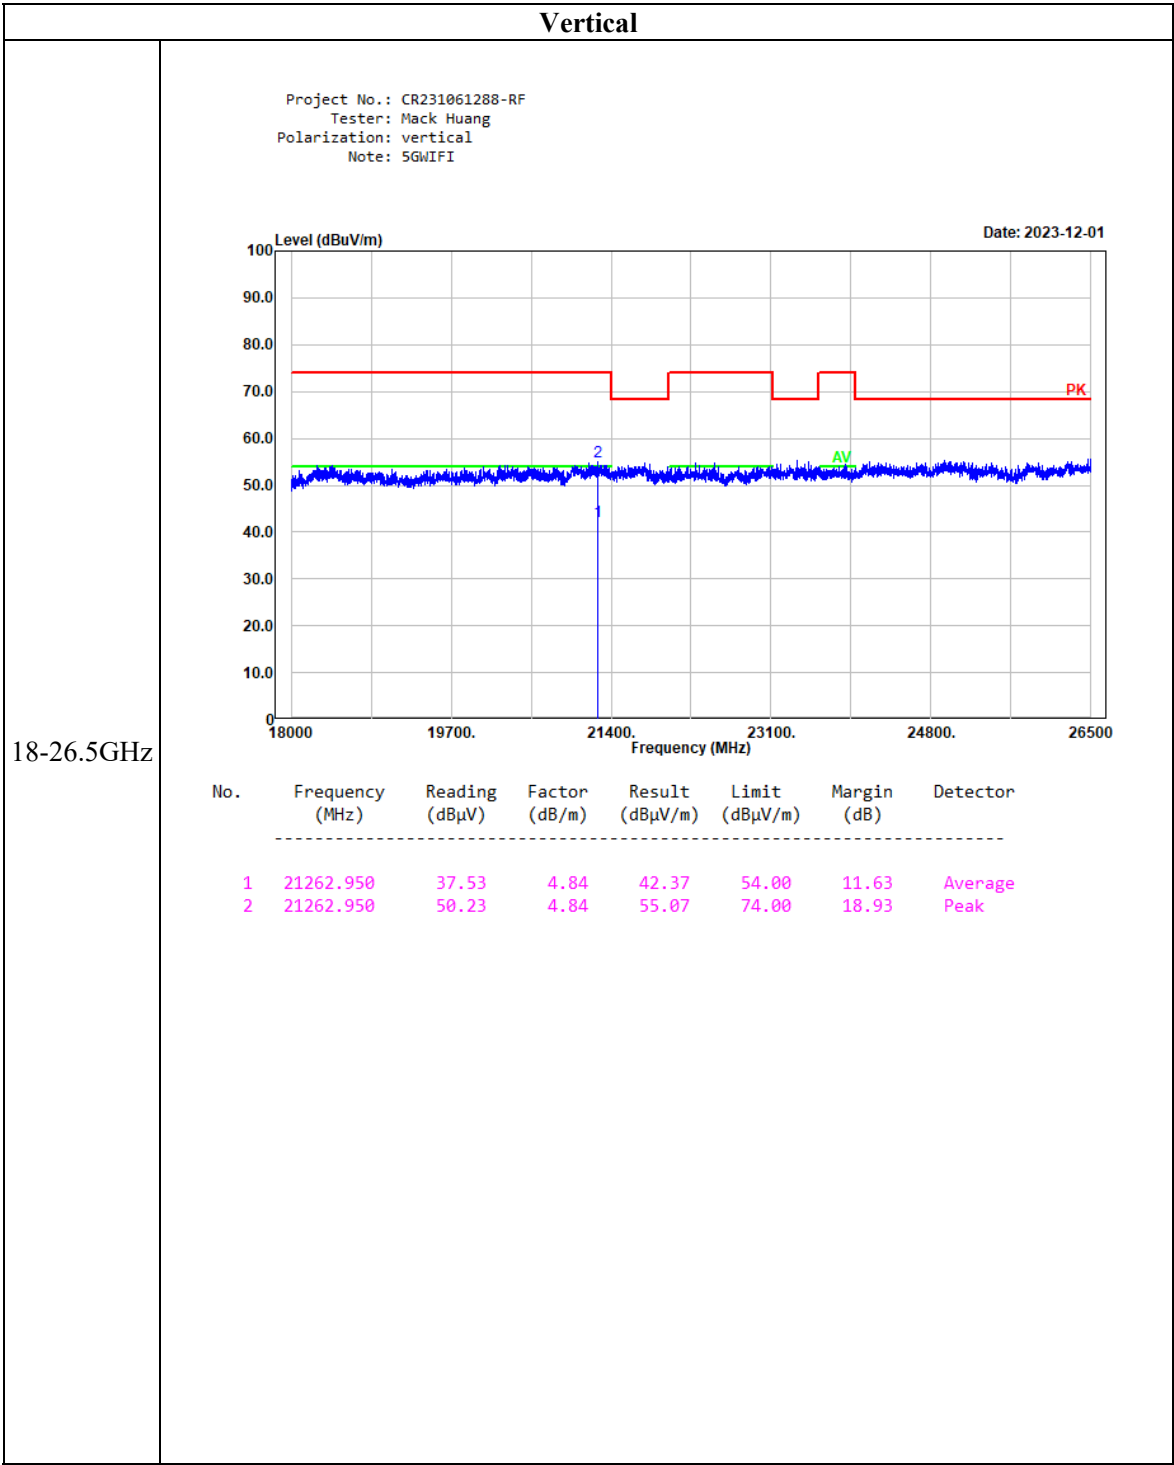


18-26.5GHz

Vertical

26.5-40GHz

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note: 5GWiFi

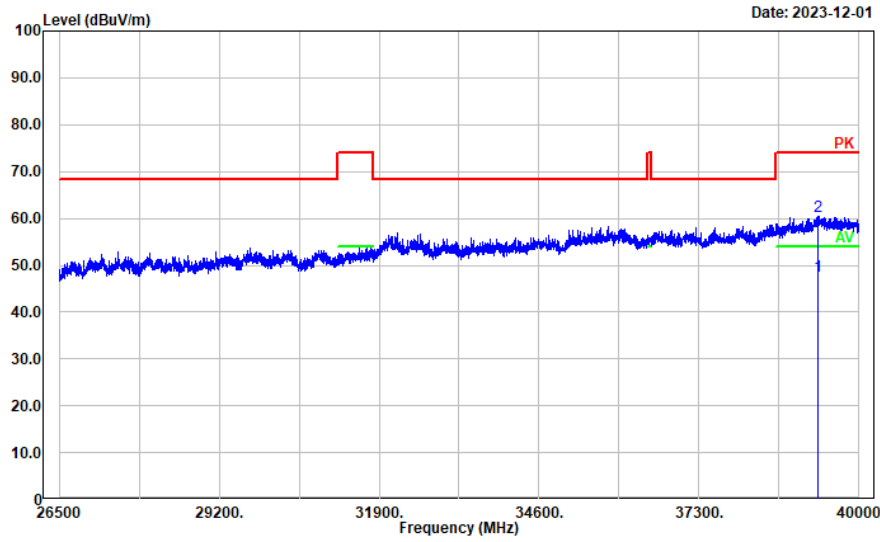


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39300.560	37.50	10.18	47.68	54.00	6.32	Average
2	39300.560	50.35	10.18	60.53	74.00	13.47	Peak

Aux ant

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: horizontal
Note: 5GWiFi

Date: 2023-12-01

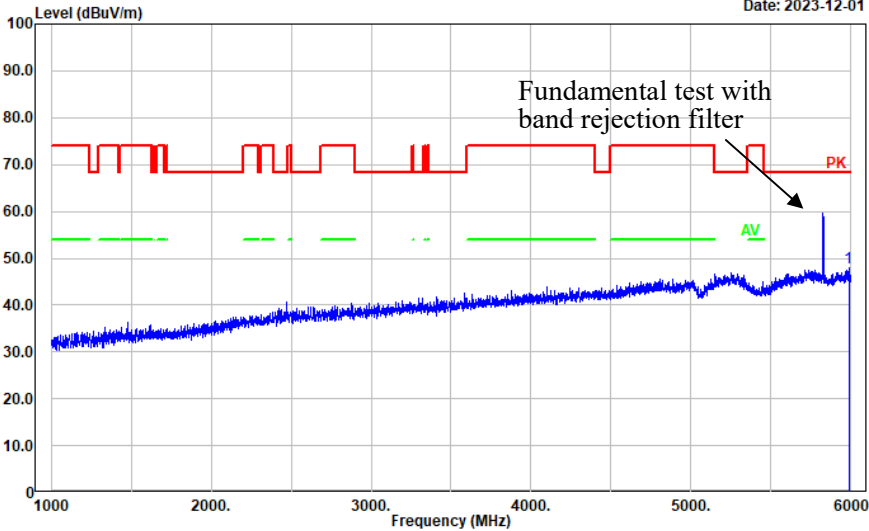


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5984.997	34.65	13.18	47.83	68.20	20.37	Peak

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: horizontal
Note: 5GWiFi

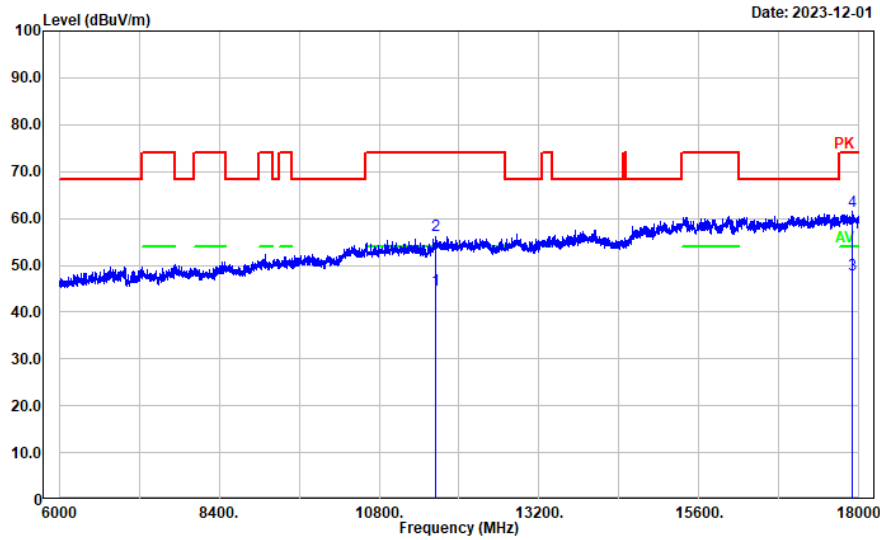


6-18GHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11650.000	22.58	22.04	44.62	54.00	9.38	Average
2	11650.000	34.29	22.04	56.33	74.00	17.67	Peak
3	17906.380	15.78	32.20	47.98	54.00	6.02	Average
4	17906.380	29.42	32.20	61.62	74.00	12.38	Peak

Horizontal

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note: 5GWiFi

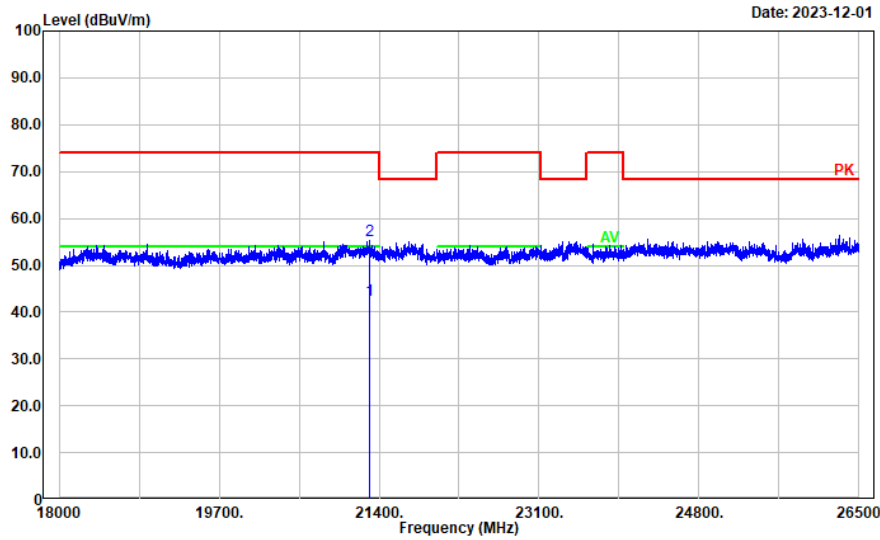


18-26.5GHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	21296.960	37.76	4.78	42.54	54.00	11.46	Average
2	21296.960	50.38	4.78	55.16	74.00	18.84	Peak

Horizontal

26.5-40GHz

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: Horizontal
Note: 5GWiFi

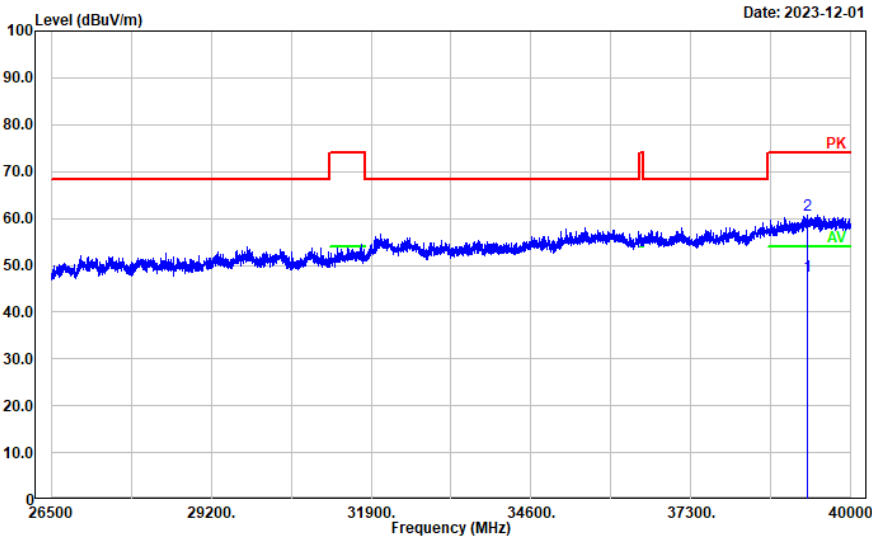


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39268.150	37.47	10.17	47.64	54.00	6.36	Average
2	39268.150	50.47	10.17	60.64	74.00	13.36	Peak

Vertical

1-6GHz


Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note: 5GWiFi

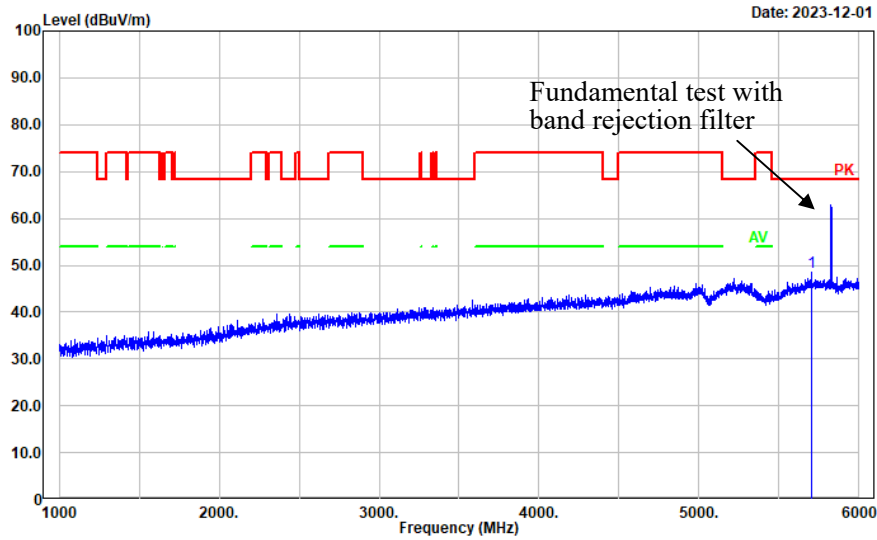

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5702.940	35.95	12.55	48.50	68.20	19.70	Peak


Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note: 5GWiFi

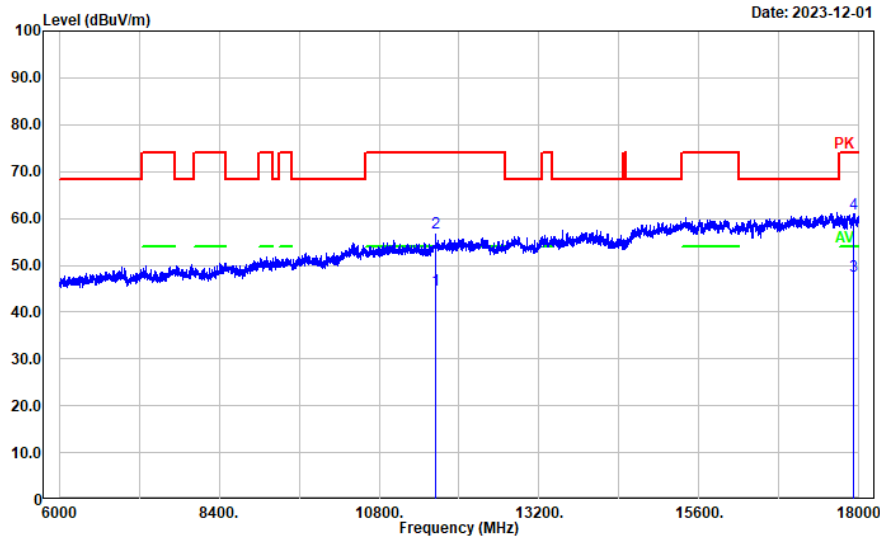


6-18GHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11650.000	22.65	22.04	44.69	54.00	9.31	Average
2	11650.000	34.99	22.04	57.03	74.00	16.97	Peak
3	17915.980	15.47	32.24	47.71	54.00	6.29	Average
4	17915.980	28.75	32.24	60.99	74.00	13.01	Peak

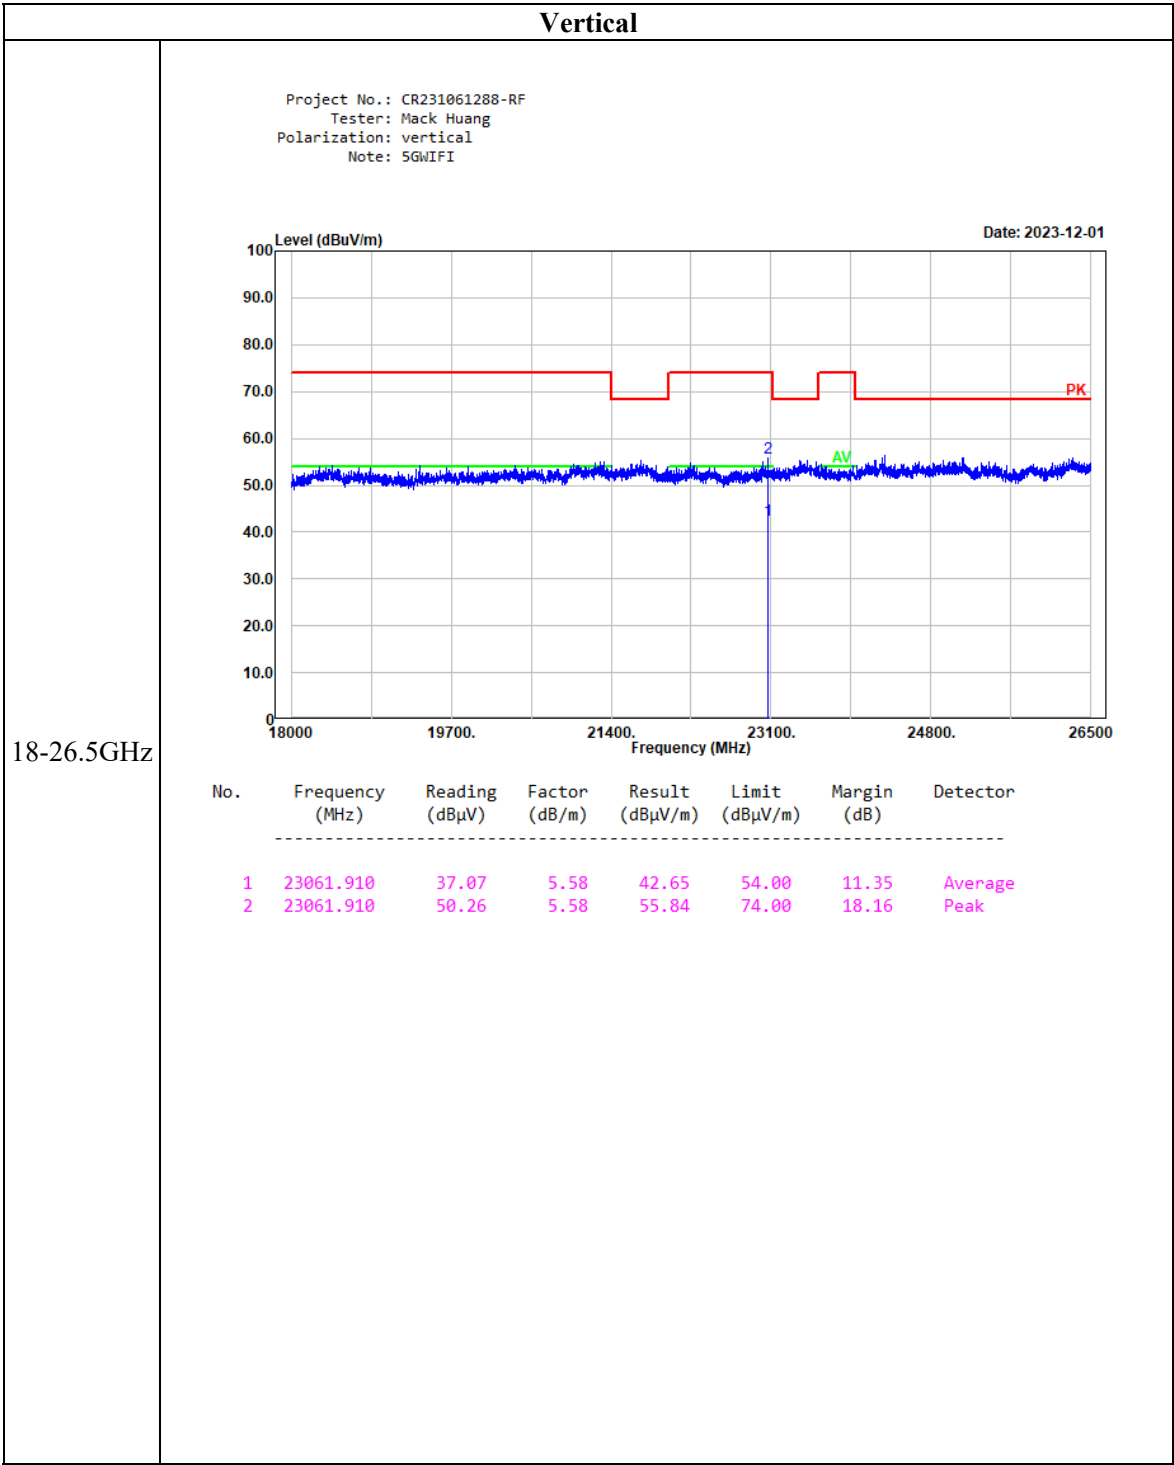

Vertical

Project No.: CR231061288-RF
Tester: Mack Huang
Polarization: vertical
Note: 5GWiFi

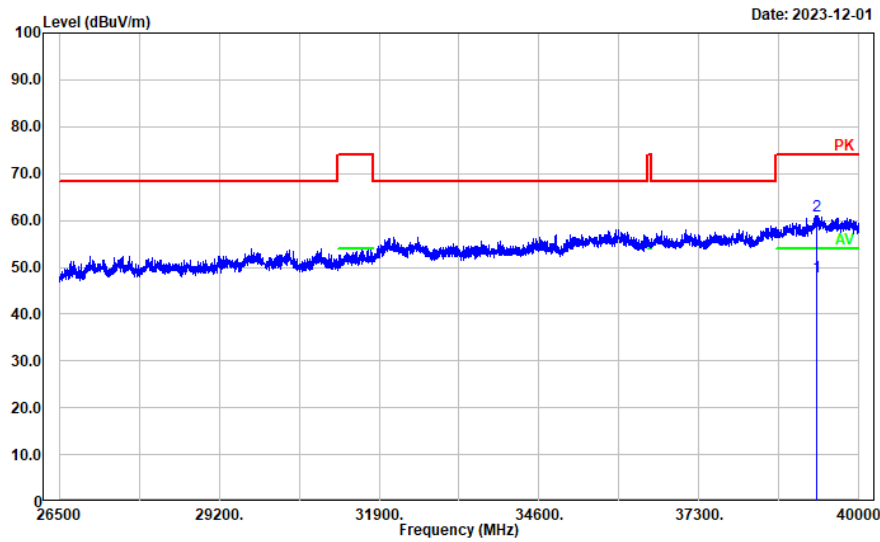

26.5-40GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39281.660	37.77	10.18	47.95	54.00	6.05	Average
2	39281.660	50.84	10.18	61.02	74.00	12.98	Peak

4.3 Emission Bandwidth:

Serial Number:	2CGM-1	Test Date:	2023-11-24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.1	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023-03-31	2024-03-30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Main ant

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	20.68	17.04
	5200	20.8	17.12
	5240	20.96	17.12
802.11ac vht20	5180	21.24	17.96
	5200	25.68	17.88
	5240	21.96	17.96
802.11ac vht40	5190	45.12	36.4
	5230	45.2	36.32
802.11ac vht80	5210	81.92	75.36
Note: the device not operate with any part of OBW within U-NII 2A band			

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.4	17.28
	5785	16.4	17.28
	5825	16.4	17.28
802.11ac vht20	5745	17.68	18.08
	5785	17.64	18.08
	5825	17.64	18.08
802.11ac vht40	5755	36.48	36.56
	5795	36.24	36.56
802.11ac vht80	5775	76.2	75.68
Note: 6dB Emission Bandwidth Limit: ≥ 0.5 MHz the device not operate with any part of OBW within U-NII 2C band			

Aux ant

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	20.44	17
	5200	20.56	17.08
	5240	20.6	17.16
802.11ac vht20	5180	21.92	17.92
	5200	24	17.96
	5240	22.44	17.96
802.11ac vht40	5190	41.28	36.4
	5230	41.2	36.4
802.11ac vht80	5210	82.08	75.36
Note: the device not operate with any part of OBW within U-NII 2A band			


5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.4	17.16
	5785	16.4	17.12
	5825	16.44	17.2
802.11ac vht20	5745	17.68	18.04
	5785	17.68	18.04
	5825	17.68	18
802.11ac vht40	5755	36.08	36.48
	5795	36.24	36.48
802.11ac vht80	5775	76.2	75.52
Note: 6dB Emission Bandwidth Limit: ≥ 0.5 MHz the device not operate with any part of OBW within U-NII 2C band			

Main ant
5150-5250MHz:


26dB Emission Bandwidth

802.11a
Lowest Channel

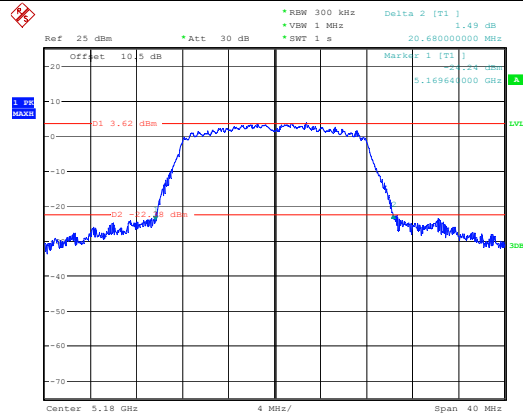


ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:24:46

802.11a
Middle Channel

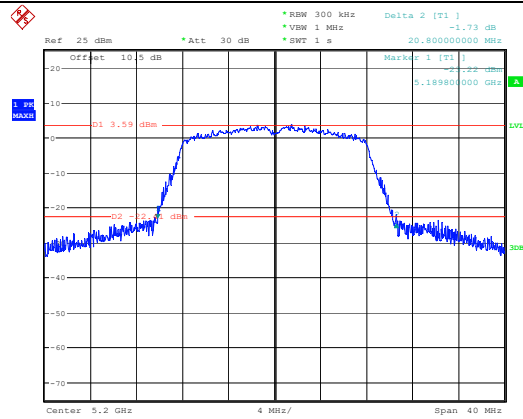




ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:28:49

802.11a
Highest Channel

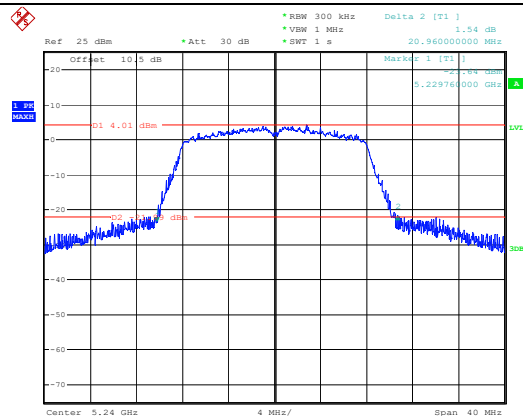

ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:30:52


26dB Emission Bandwidth

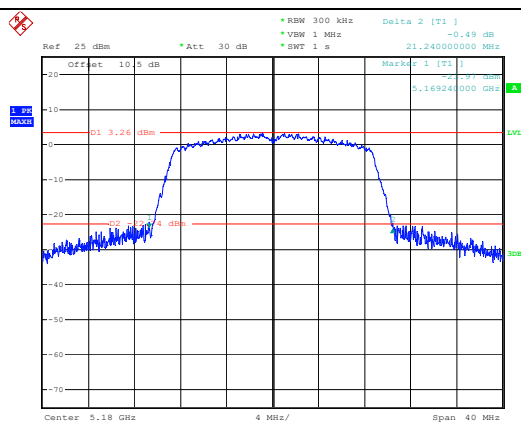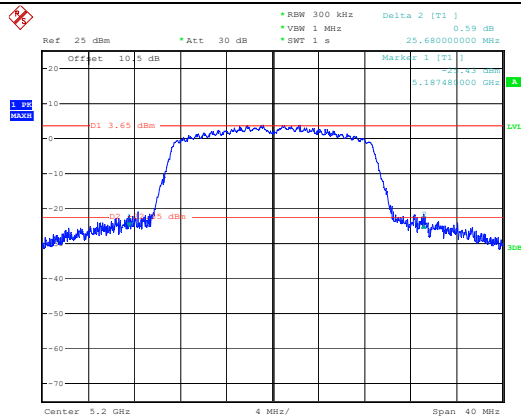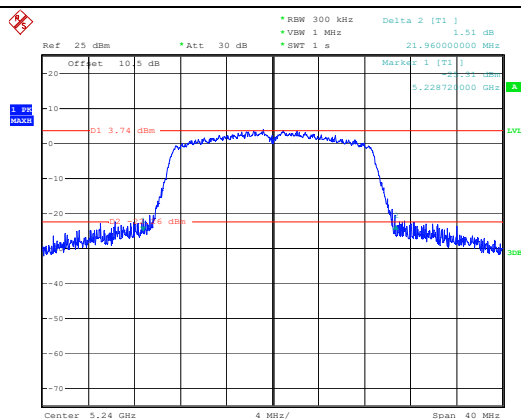802.11ac vht20
Lowest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:41:41802.11ac vht20
Middle ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:44:31802.11ac vht20
Highest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:46:26

5725-5850MHz:


6dB Emission Bandwidth

802.11a
Lowest Channel

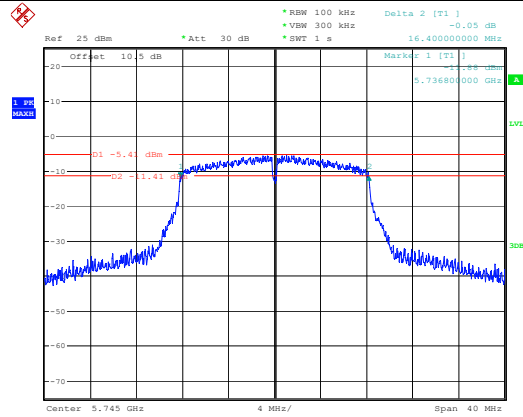


ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:33:47

802.11a
Middle Channel

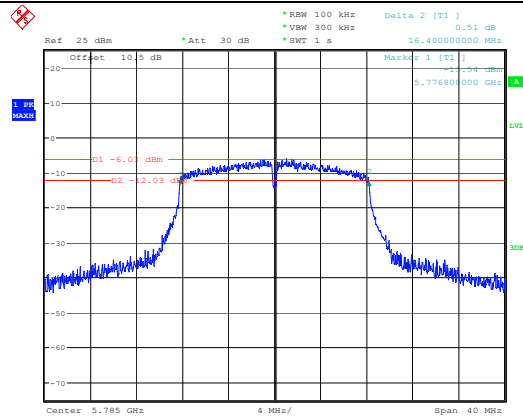



ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:36:02


802.11a
Highest Channel

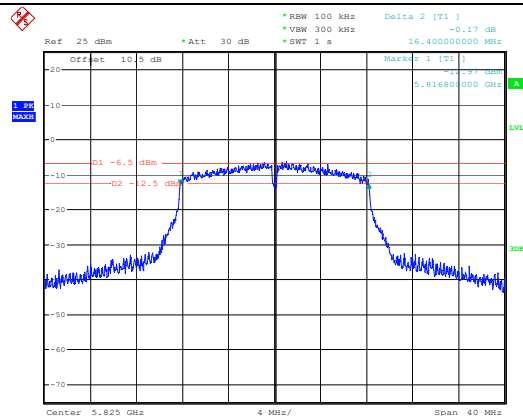

ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:38:12

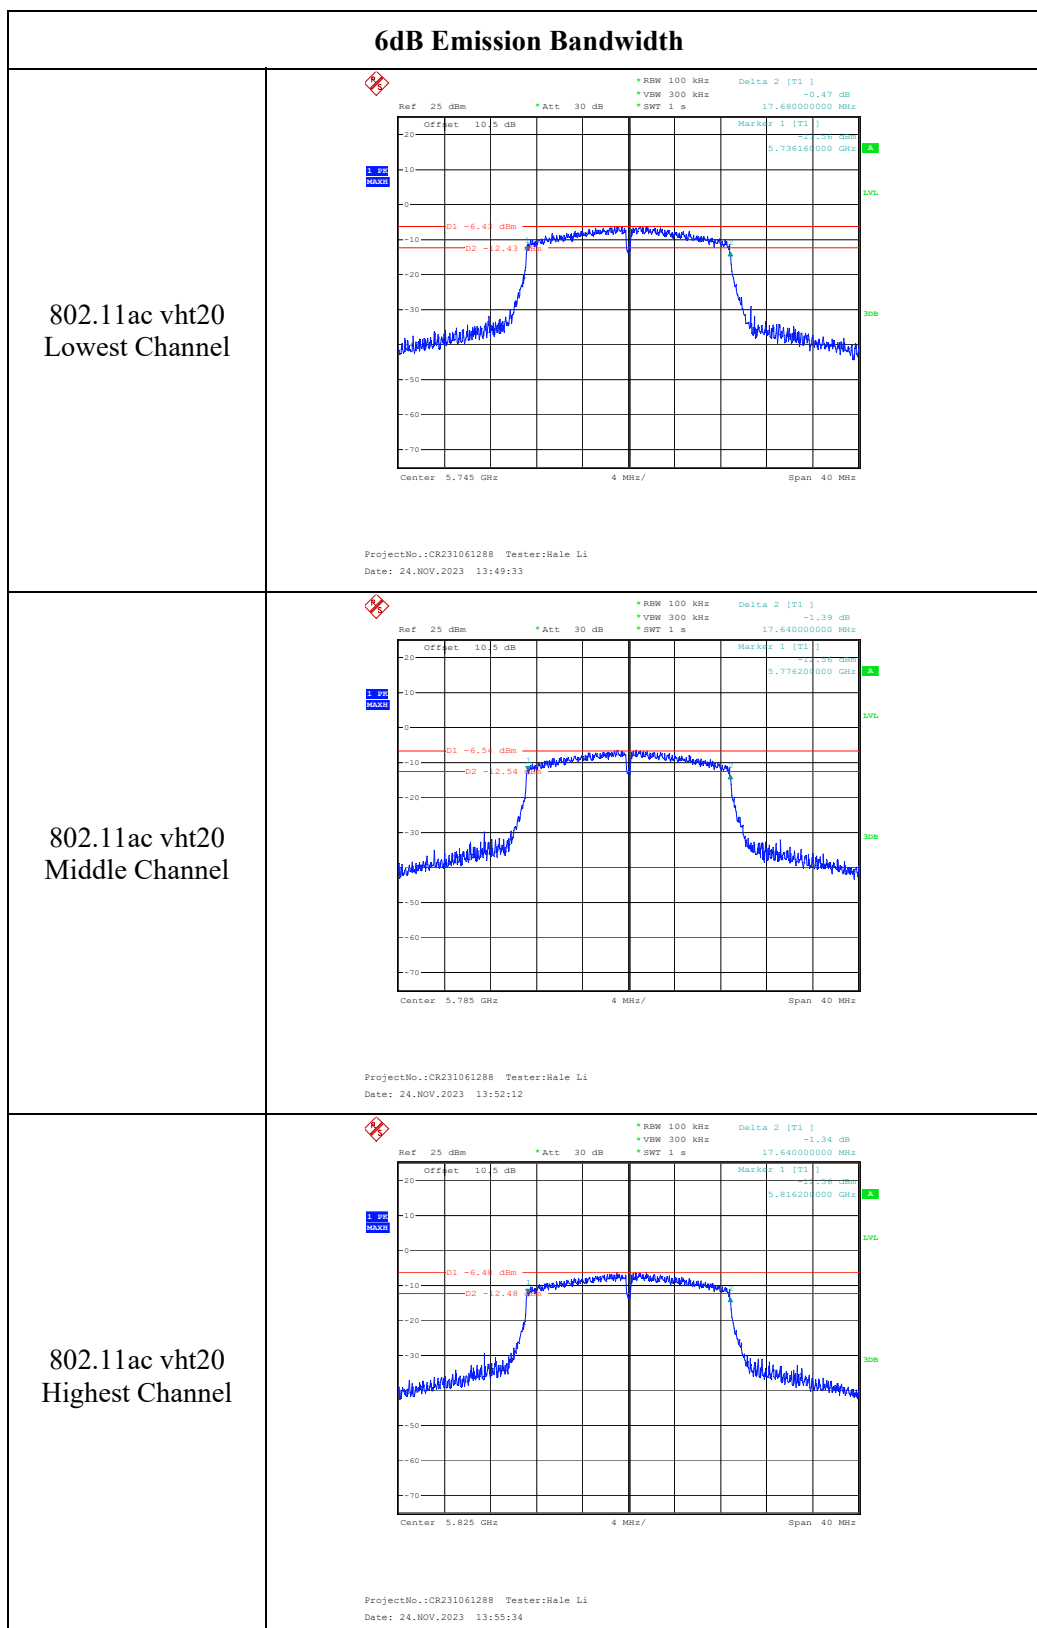

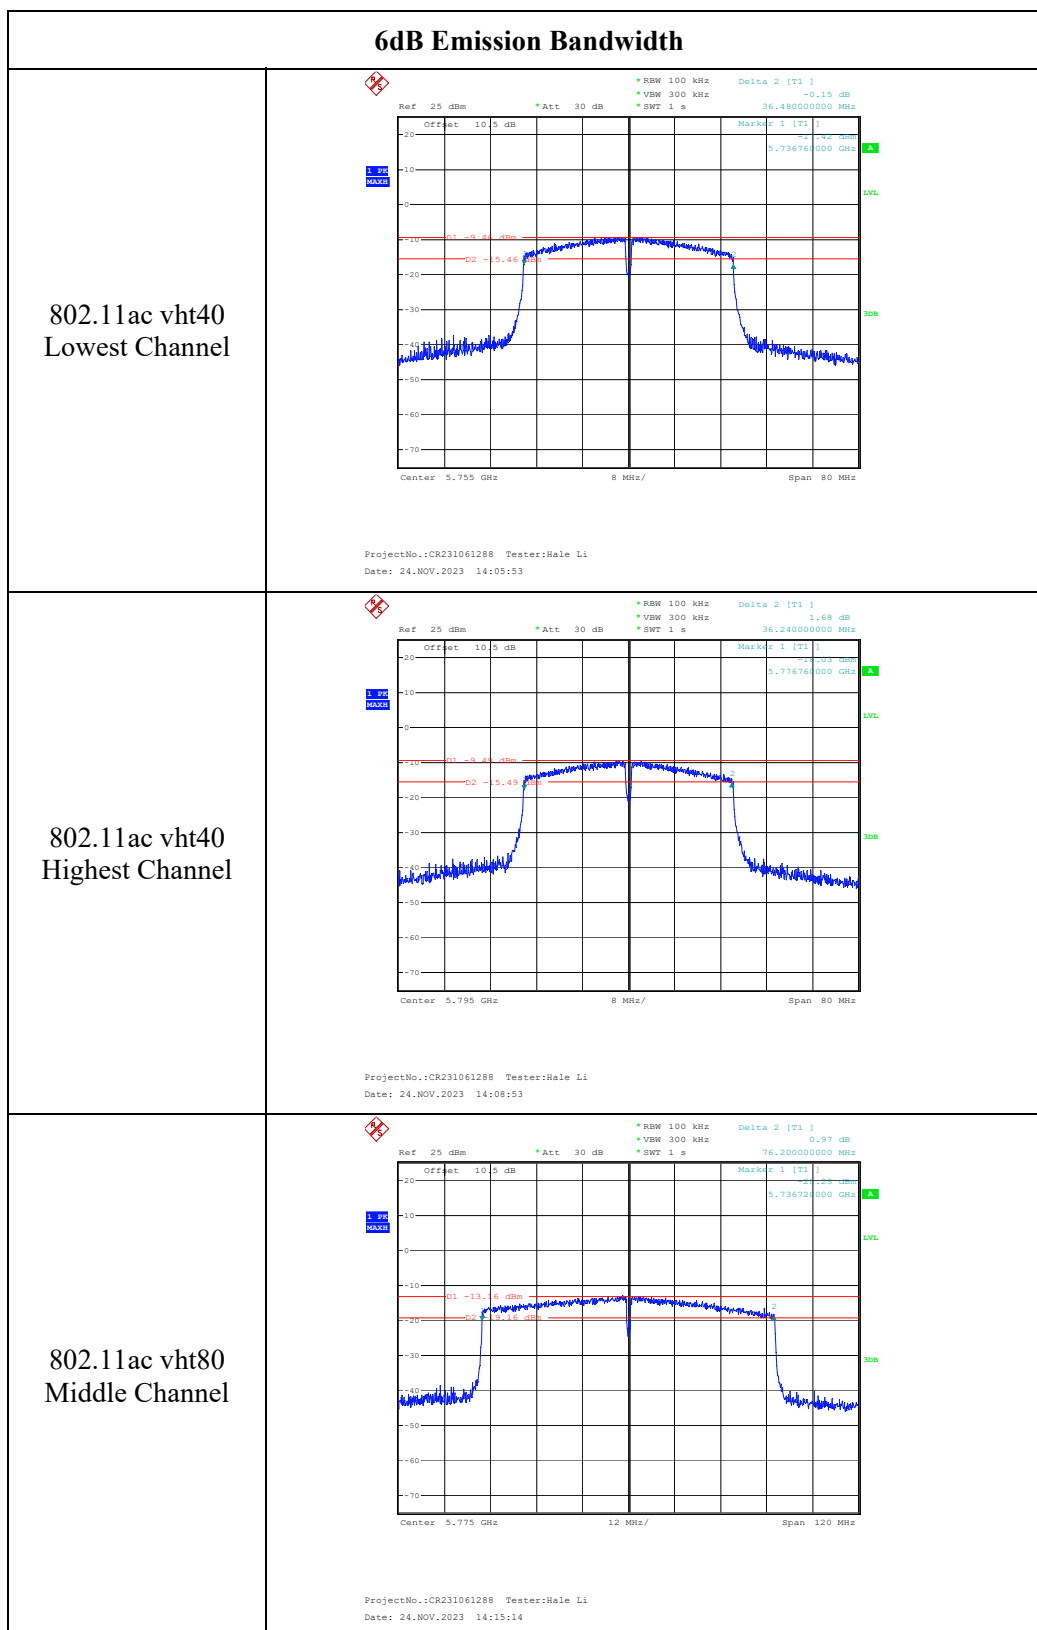


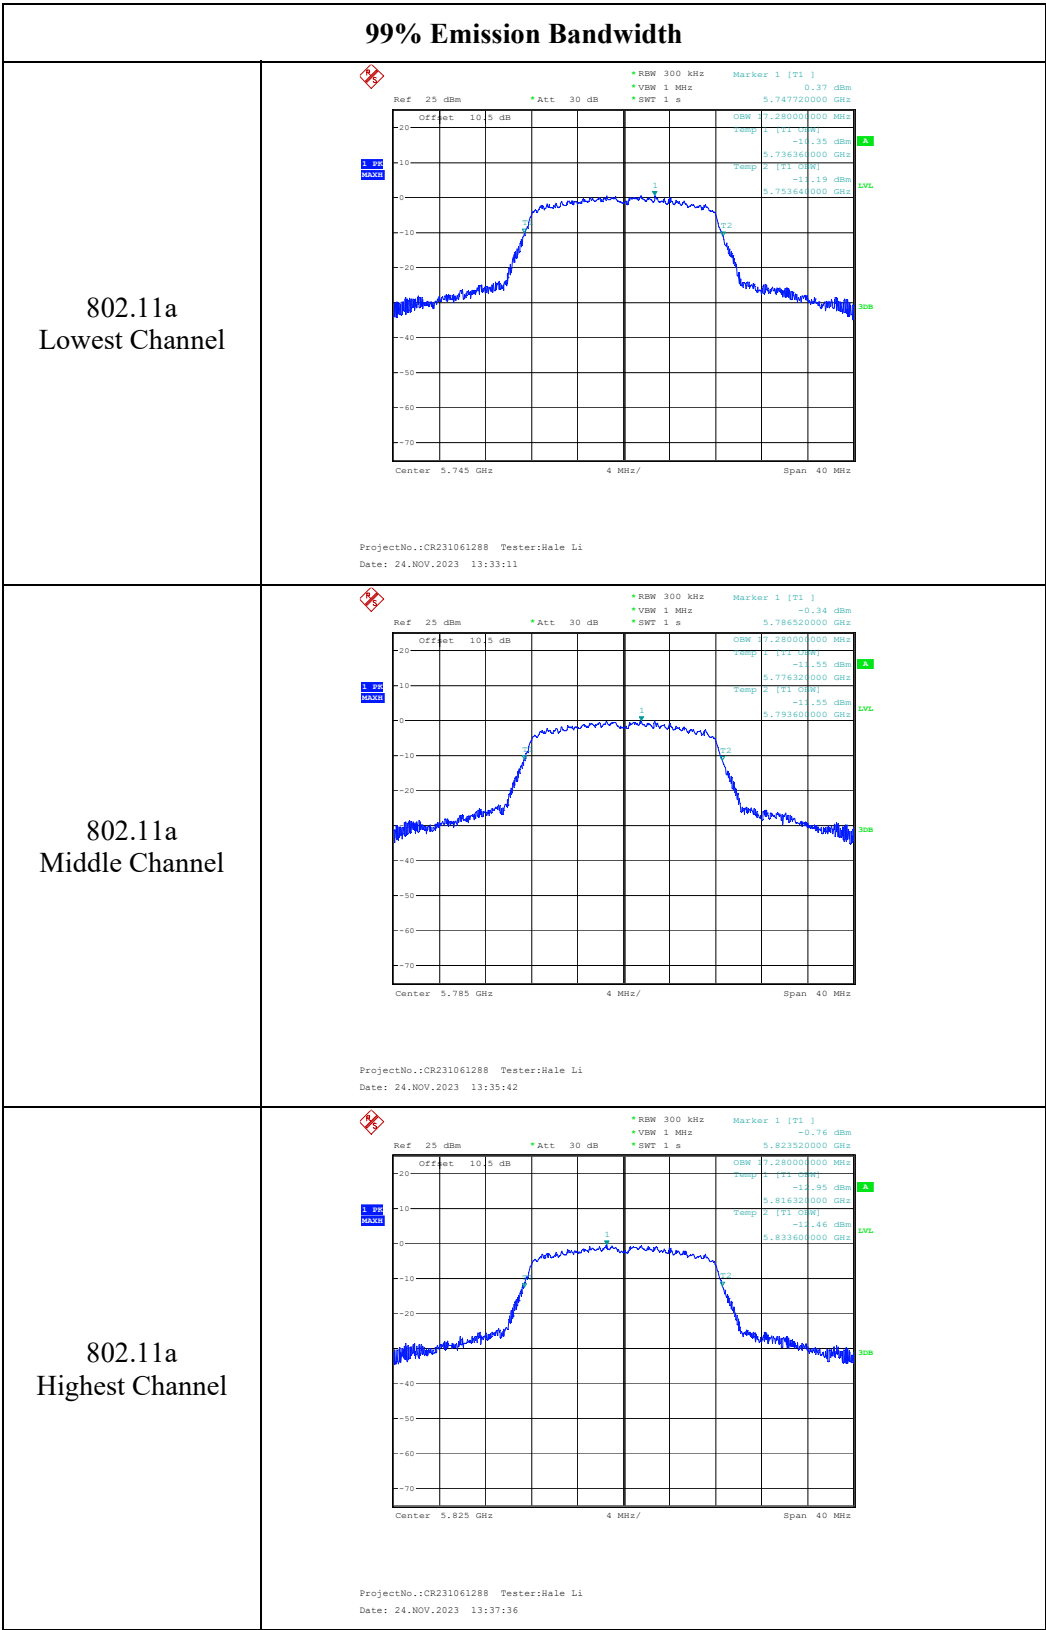

Aux ant
5150-5250MHz:


26dB Emission Bandwidth

802.11a
Lowest Channel

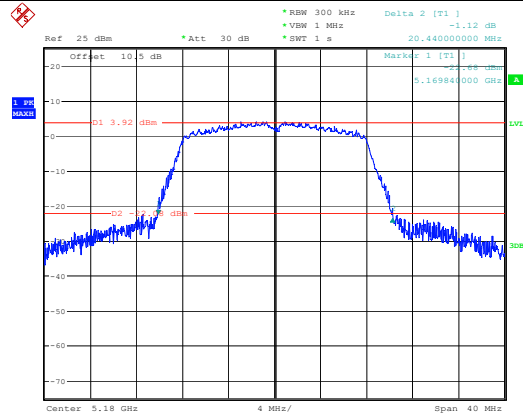


ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:23:55

802.11a
Middle Channel

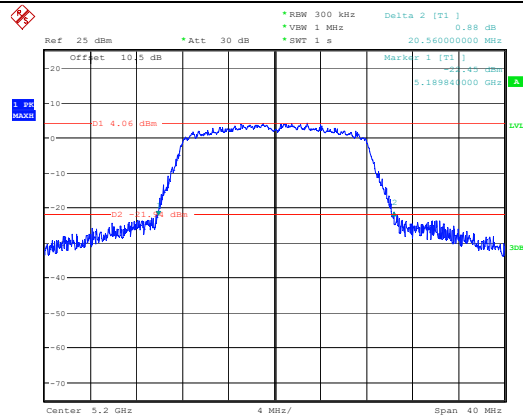

ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:26:37

802.11a
Highest Channel

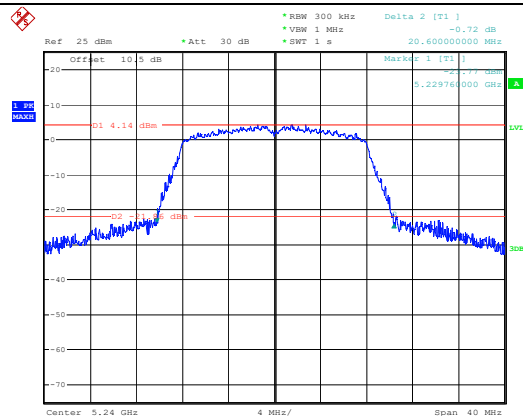


ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:28:41

5725-5850MHz:


6dB Emission Bandwidth

802.11a
Lowest Channel

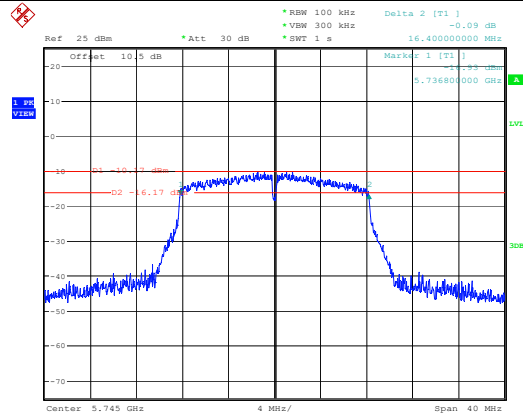


ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:34:08

802.11a
Middle Channel

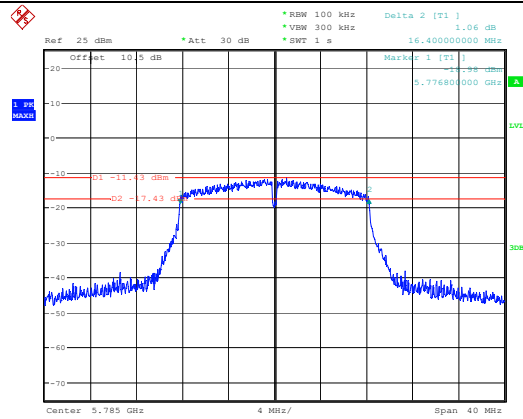





ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:36:54

802.11a
Highest Channel



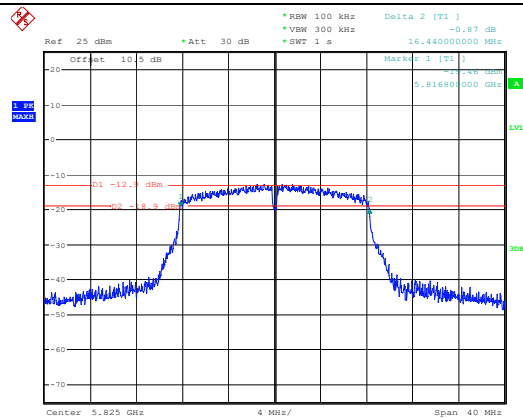



ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:39:19

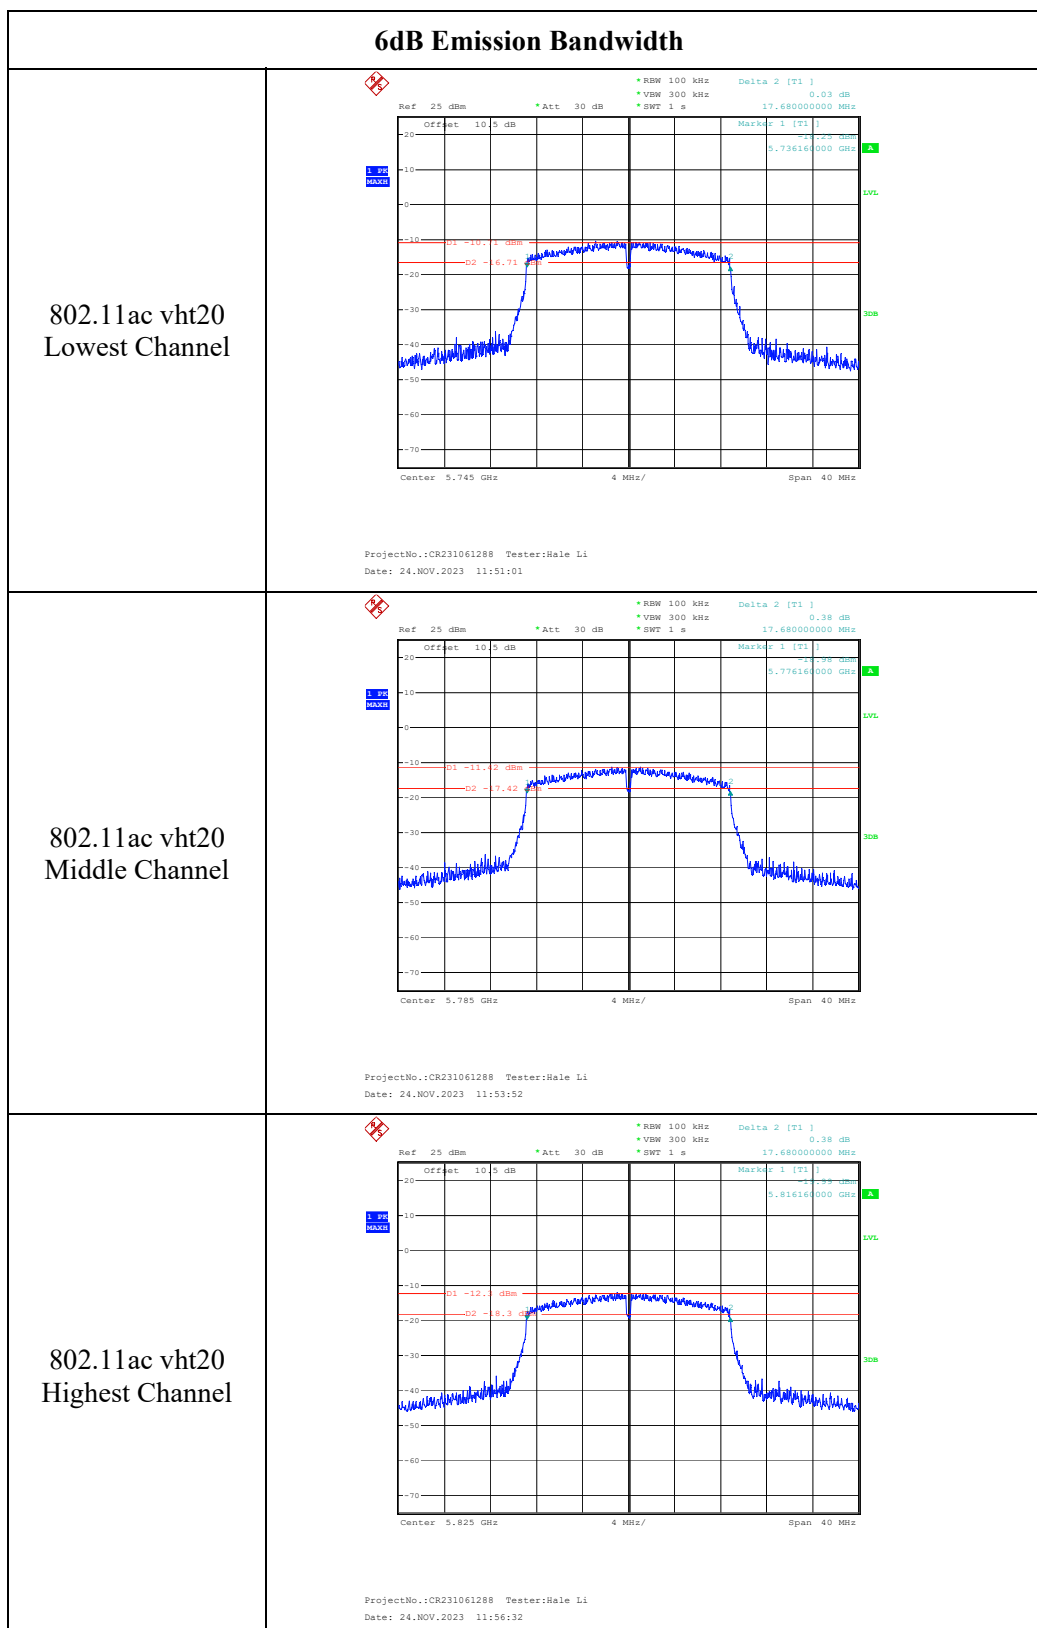

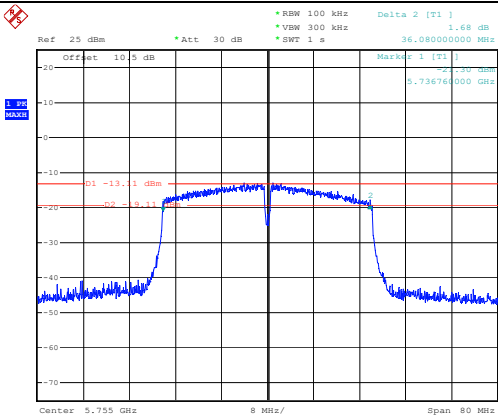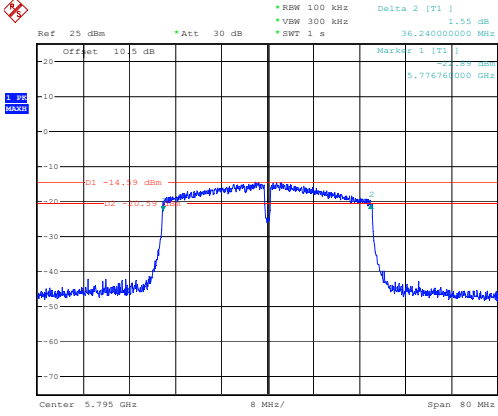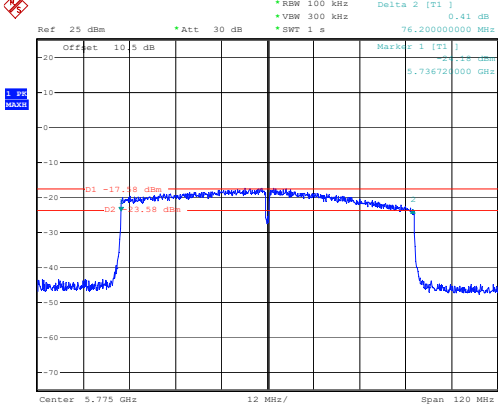6dB Emission Bandwidth	
802.11ac vht40 Lowest Channel	 Ref: 25 dBm *Att: 30 dB *RBW: 100 kHz *VSW: 300 kHz *SWT: 1 s Delta 2 [T1]: 1.68 dB 36.05000000 MHz Offset: 10.5 dB Markers: 1 [T1]: 5.73676000 GHz 2 [T2]: 5.73676000 GHz D1: -13.11 dBm D2: -13.11 dBm Center: 5.795 GHz 8 MHz/ Span: 80 MHz ProjectNo.:CR231061288 Tester:Hale Li Date: 24.NOV.2023 13:09:16
802.11ac vht40 Highest Channel	 Ref: 25 dBm *Att: 30 dB *RBW: 100 kHz *VSW: 300 kHz *SWT: 1 s Delta 2 [T1]: 1.55 dB 36.24000000 MHz Offset: 10.5 dB Markers: 1 [T1]: 5.77876000 GHz 2 [T2]: 5.77876000 GHz D1: -14.59 dBm D2: -14.59 dBm Center: 5.795 GHz 8 MHz/ Span: 80 MHz ProjectNo.:CR231061288 Tester:Hale Li Date: 24.NOV.2023 13:12:35
802.11ac vht80 Middle Channel	 Ref: 25 dBm *Att: 30 dB *RBW: 100 kHz *VSW: 300 kHz *SWT: 1 s Delta 2 [T1]: 0.41 dB 76.20000000 MHz Offset: 10.5 dB Markers: 1 [T1]: 5.73672000 GHz 2 [T2]: 5.73672000 GHz D1: -17.18 dBm D2: -13.58 dBm Center: 5.775 GHz 12 MHz/ Span: 120 MHz ProjectNo.:CR231061288 Tester:Hale Li Date: 24.NOV.2023 13:18:51

99% Emission Bandwidth

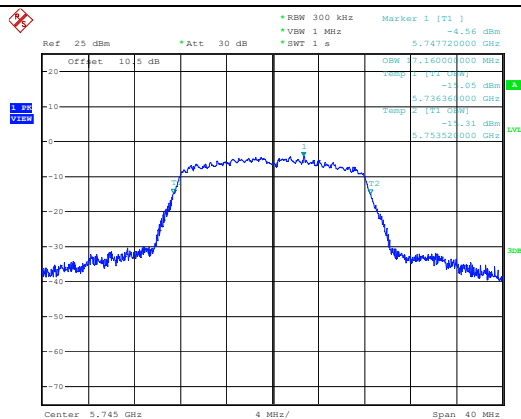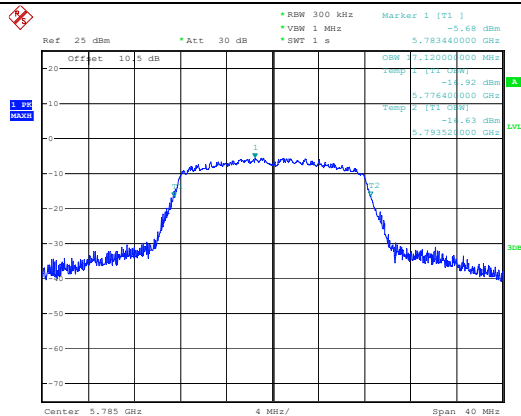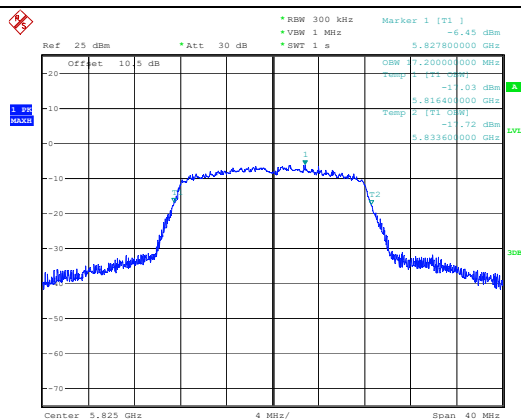802.11a
Lowest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:33:50802.11a
Middle ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:36:37802.11a
Highest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:38:59

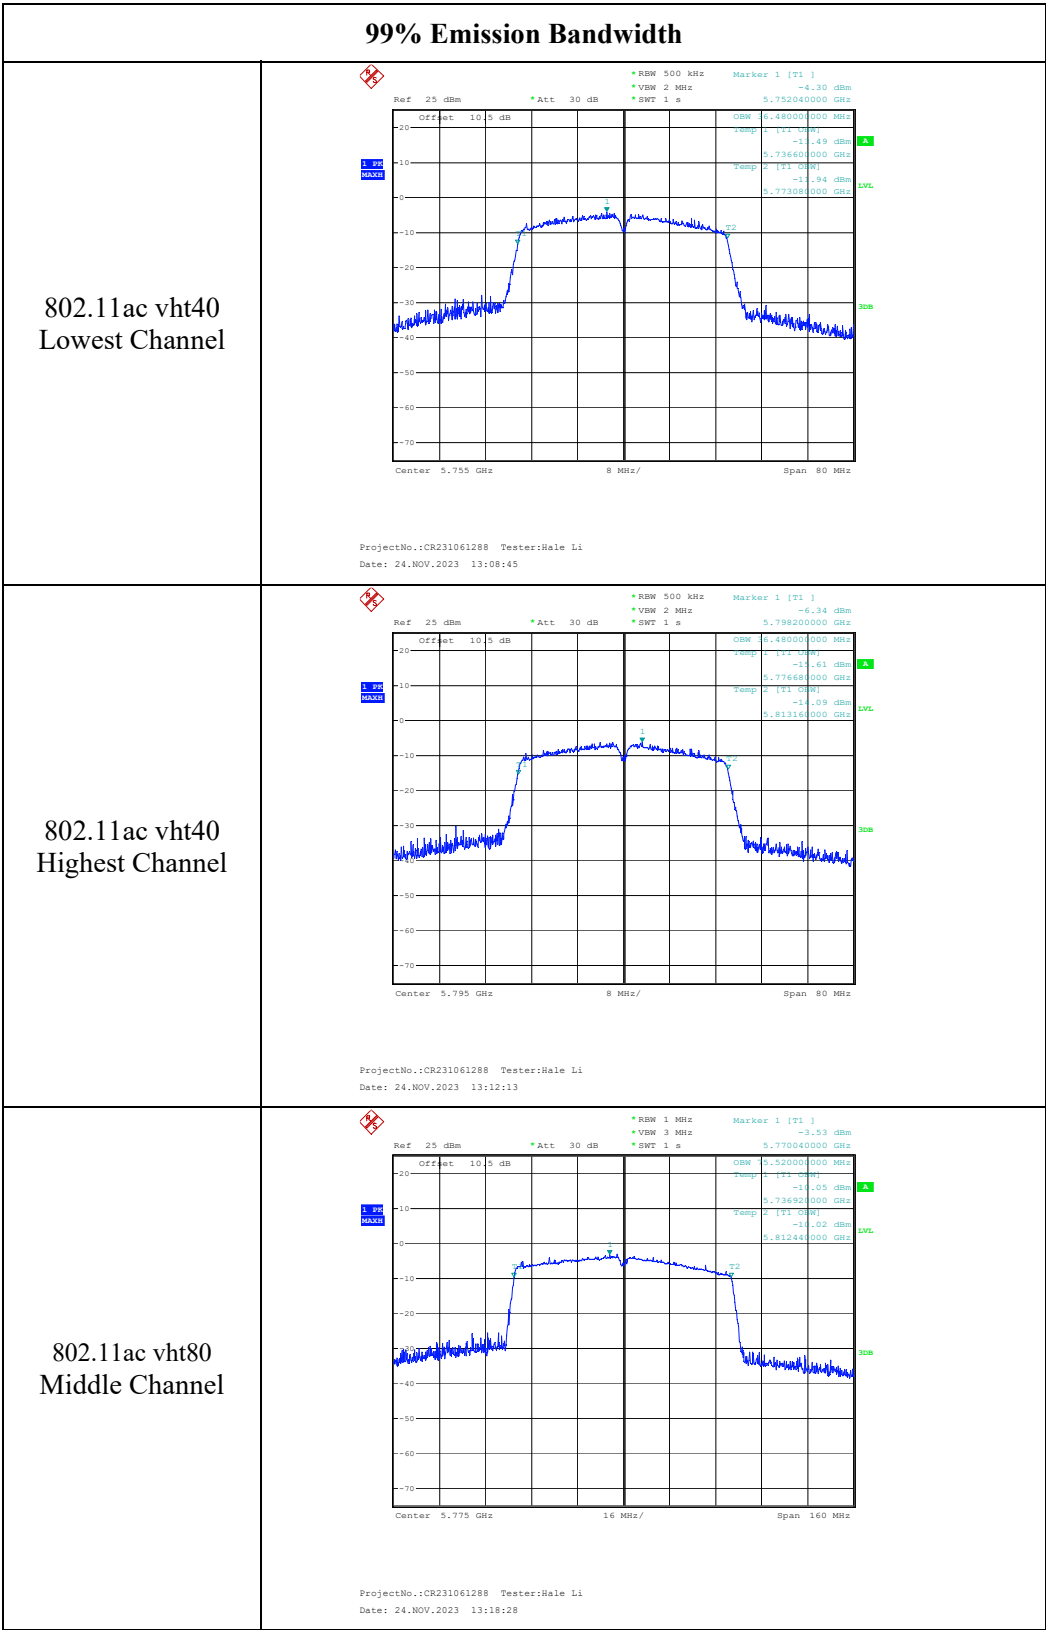

4.4 Maximum Conducted Output Power:

Serial Number:	2CGM-1	Test Date:	2023-11-24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.1	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Main ant

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5180	11.73	24
	5200	11.95	24
	5240	11.89	24
802.11ac vht20	5180	11.92	24
	5200	11.65	24
	5240	11.70	24
802.11ac vht40	5190	10.96	24
	5230	11.02	24
802.11ac vht80	5210	8.58	24
Note: The device is a client device. The duty cycle factor has been calculated into the test data.			

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	7.84	30
	5785	7.31	30
	5825	6.74	30
802.11ac vht20	5745	7.81	30
	5785	7.28	30
	5825	6.74	30
802.11ac vht40	5755	7.97	30
	5795	7.09	30
802.11ac vht80	5775	7.01	30
Note: The duty cycle factor has been calculated into the test data.			

Aux ant
5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5180	11.68	24
	5200	11.65	24
	5240	11.15	24
802.11ac vht20	5180	11.5	24
	5200	11.45	24
	5240	10.95	24
802.11ac vht40	5190	11.45	24
	5230	11.04	24
802.11ac vht80	5210	10.36	24
Note: The device is a client device. The duty cycle factor has been calculated into the test data.			

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	5.91	30
	5785	5.29	30
	5825	4.85	30
802.11ac vht20	5745	5.69	30
	5785	5.2	30
	5825	4.74	30
802.11ac vht40	5755	5.44	30
	5795	4.94	30
802.11ac vht80	5775	4.84	30
Note: The duty cycle factor has been calculated into the test data.			

4.5 Maximum power spectral density:

Serial Number:	2CGM-1	Test Date:	2023-11-24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.1	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101
----------------------	------	---------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023-03-31	2024-03-30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Main ant
5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)
802.11a	5180	0.07	/	0.07	11
	5200	0.27	/	0.27	11
	5240	0.57	/	0.57	11
802.11ac vht20	5180	-0.44	/	-0.44	11
	5200	0	/	0.00	11
	5240	0.16	/	0.16	11
802.11ac vht40	5190	-3.41	/	-3.41	11
	5230	-3.68	/	-3.68	11
802.11ac vht80	5210	-9.29	/	-9.29	11

Note:

The device is a client device.

Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.

5725-5850 MHz

Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
				Result	Limit
802.11a	5745	-6.01	/	-6.01	30
	5785	-6.58	/	-6.58	30
	5825	-7.01	/	-7.01	30
802.11ac vht20	5745	-6.68	/	-6.68	30
	5785	-6.91	/	-6.91	30
	5825	-6.63	/	-6.63	30
802.11ac vht40	5755	-9.68	/	9.68	30
	5795	-10.01	/	10.01	30
802.11ac vht80	5775	-13.29	/	-13.29	30

Note:

Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.

Aux ant

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
				Result	Limit
802.11a	5180	0.94	/	0.94	11
	5200	0.82	/	0.82	11
	5240	0.73	/	0.73	11
802.11ac vht20	5180	0.55	/	0.55	11
	5200	0.64	/	0.64	11
	5240	0.44	/	0.44	11
802.11ac vht40	5190	-2.62	/	-2.62	11
	5230	-2.71	/	-2.71	11
802.11ac vht80	5210	-6.89	/	-6.89	11

Note:

The device is a client device.

Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.


5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
				Result	Limit
802.11a	5745	-10.75	/	-10.75	30
	5785	-12.02	/	-12.02	30
	5825	-12.93	/	-12.93	30
802.11ac vht20	5745	-10.88	/	-10.88	30
	5785	-11.88	/	-11.88	30
	5825	-12.77	/	-12.77	30
802.11ac vht40	5755	-13.65	/	-13.65	30
	5795	-15.09	/	-15.09	30
802.11ac vht80	5775	-18.14	/	-18.14	30

Note:


Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.

Main ant
5150-5250MHz:

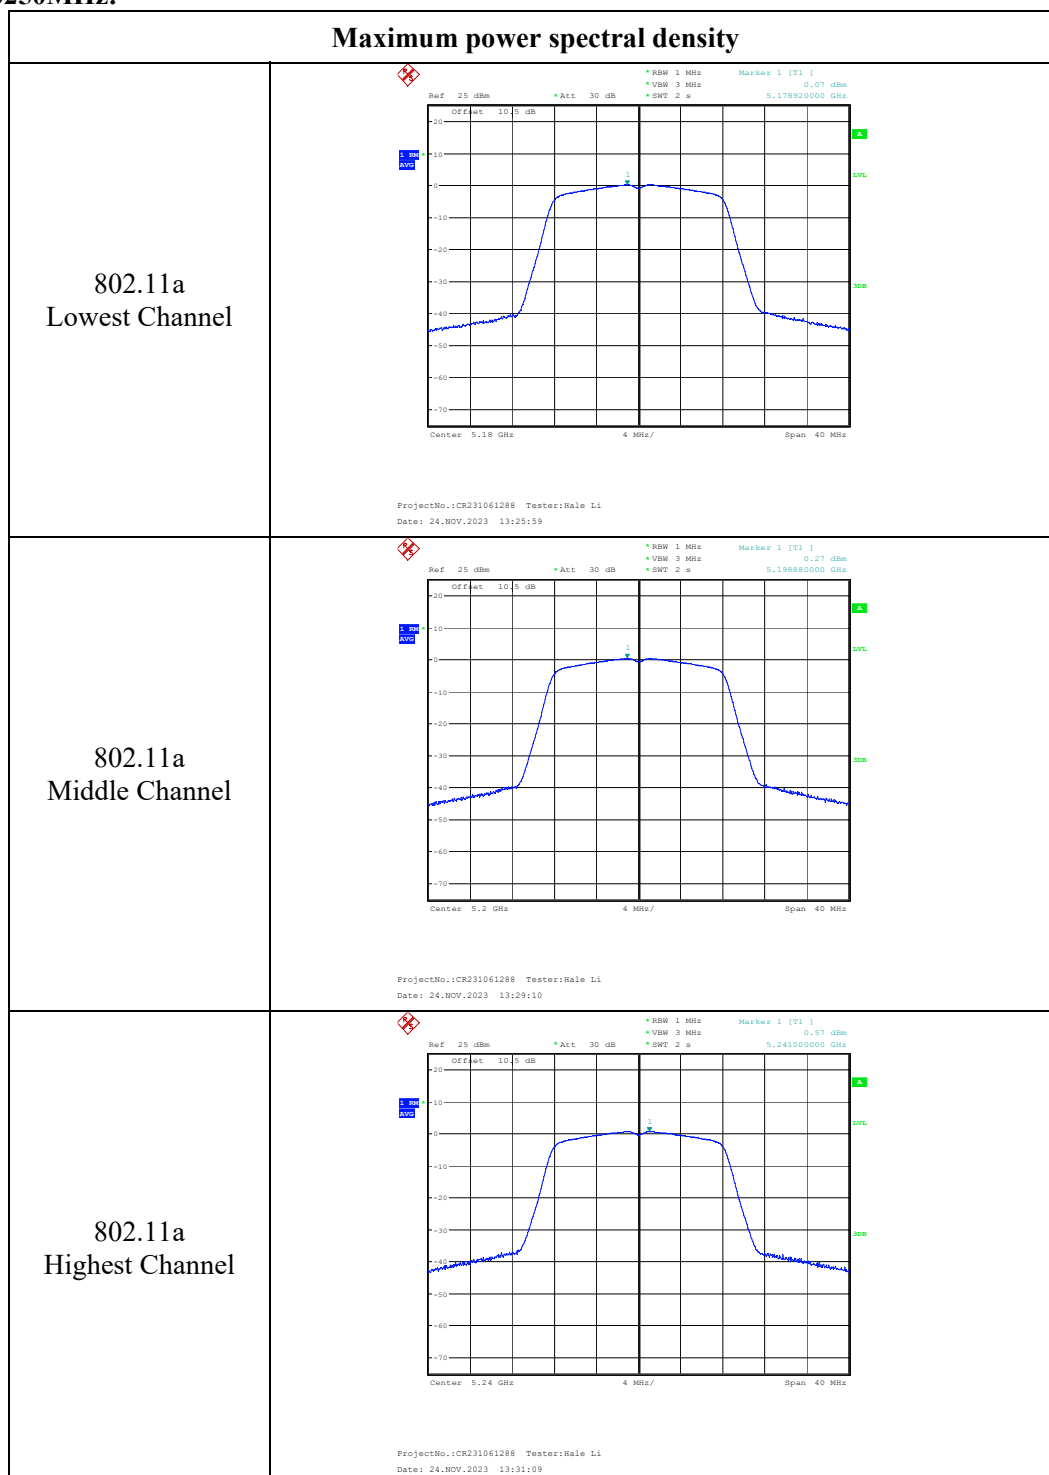


Maximum power spectral density

802.11ac vht20
Lowest Channel

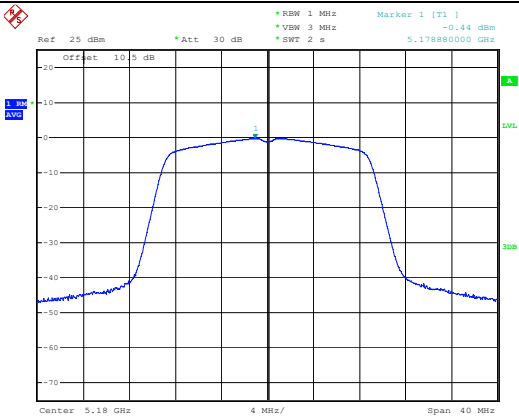


ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:42:01

802.11ac vht20
Middle Channel

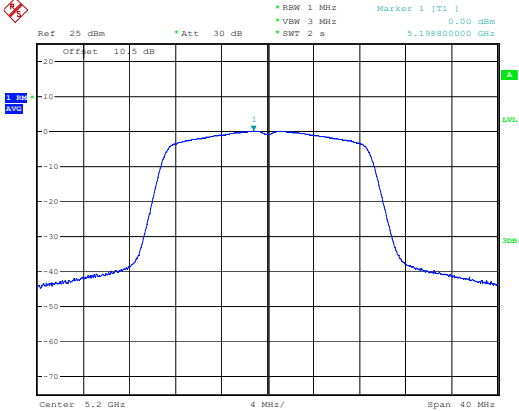




ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:44:51

802.11ac vht20
Highest Channel

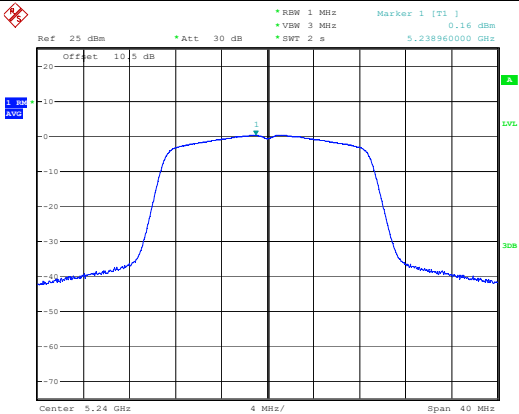




ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:46:41




Maximum power spectral density

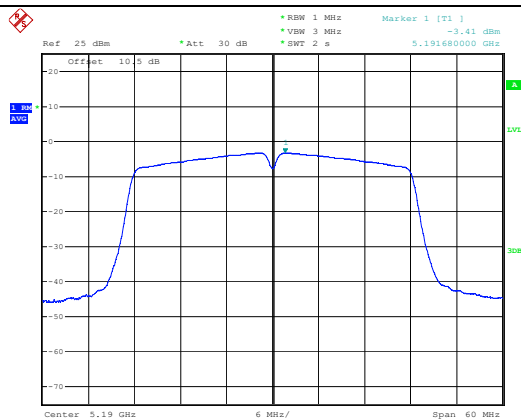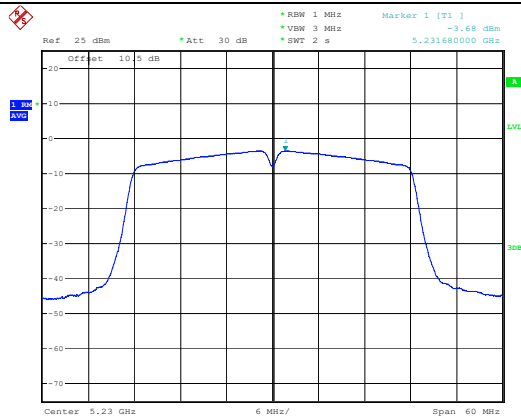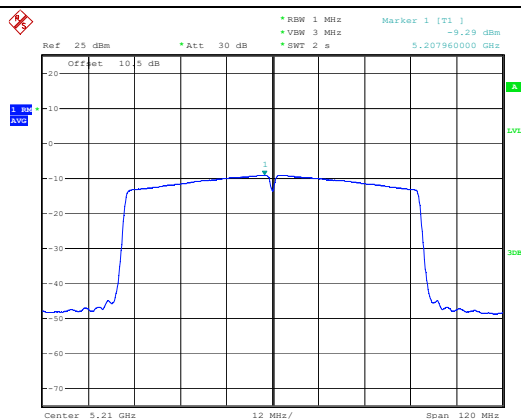802.11ac vht40
Lowest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:58:49802.11ac vht40
Highest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 14:02:21802.11ac vht80
Middle ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 14:12:35


5725-5850MHz

Maximum power spectral density

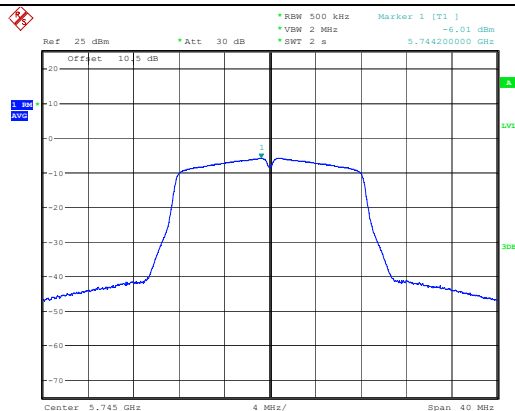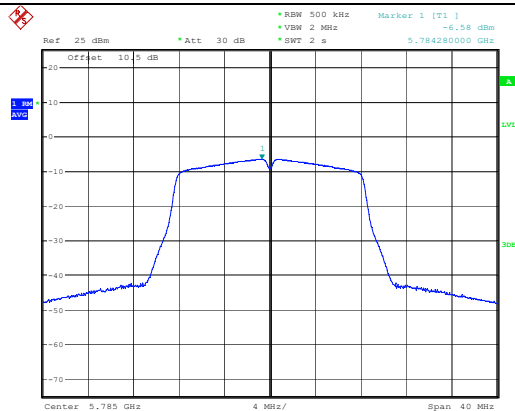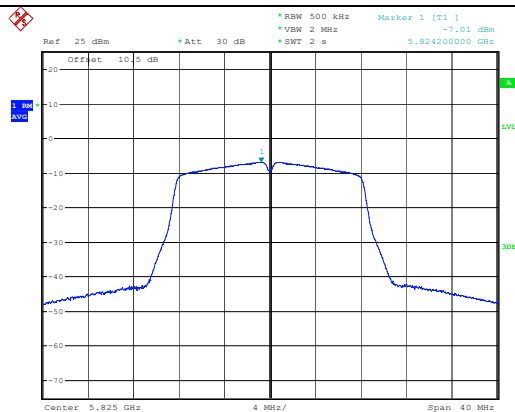802.11a
Lowest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:34:08802.11a
Middle ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:36:22802.11a
Highest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:38:33

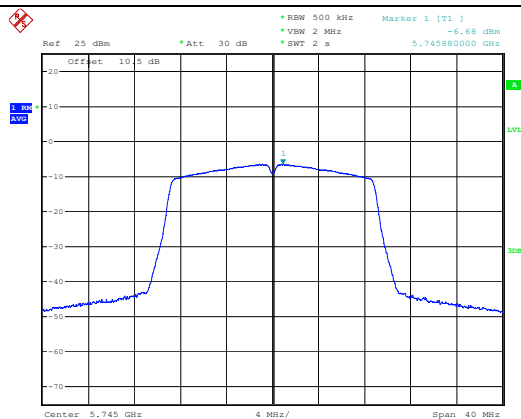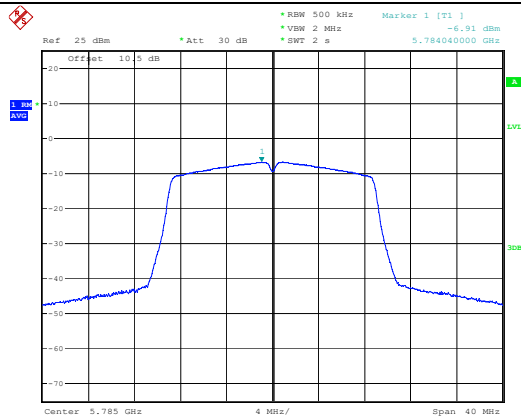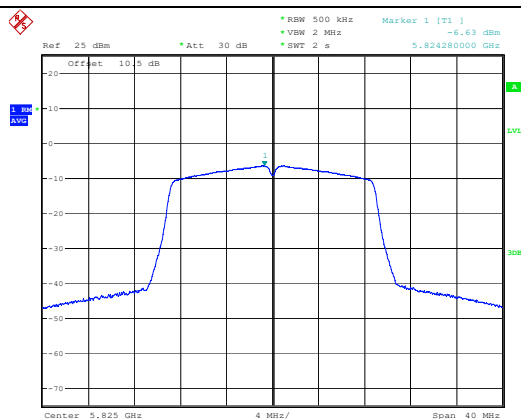Maximum power spectral density802.11ac vht20
Lowest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:49:53802.11ac vht20
Middle ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:52:33802.11ac vht20
Highest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 13:55:54


802.11ac vht40
Lowest Channel



ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 14:09:14


ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 14:15:31

Aux ant
5150-5250MHz:

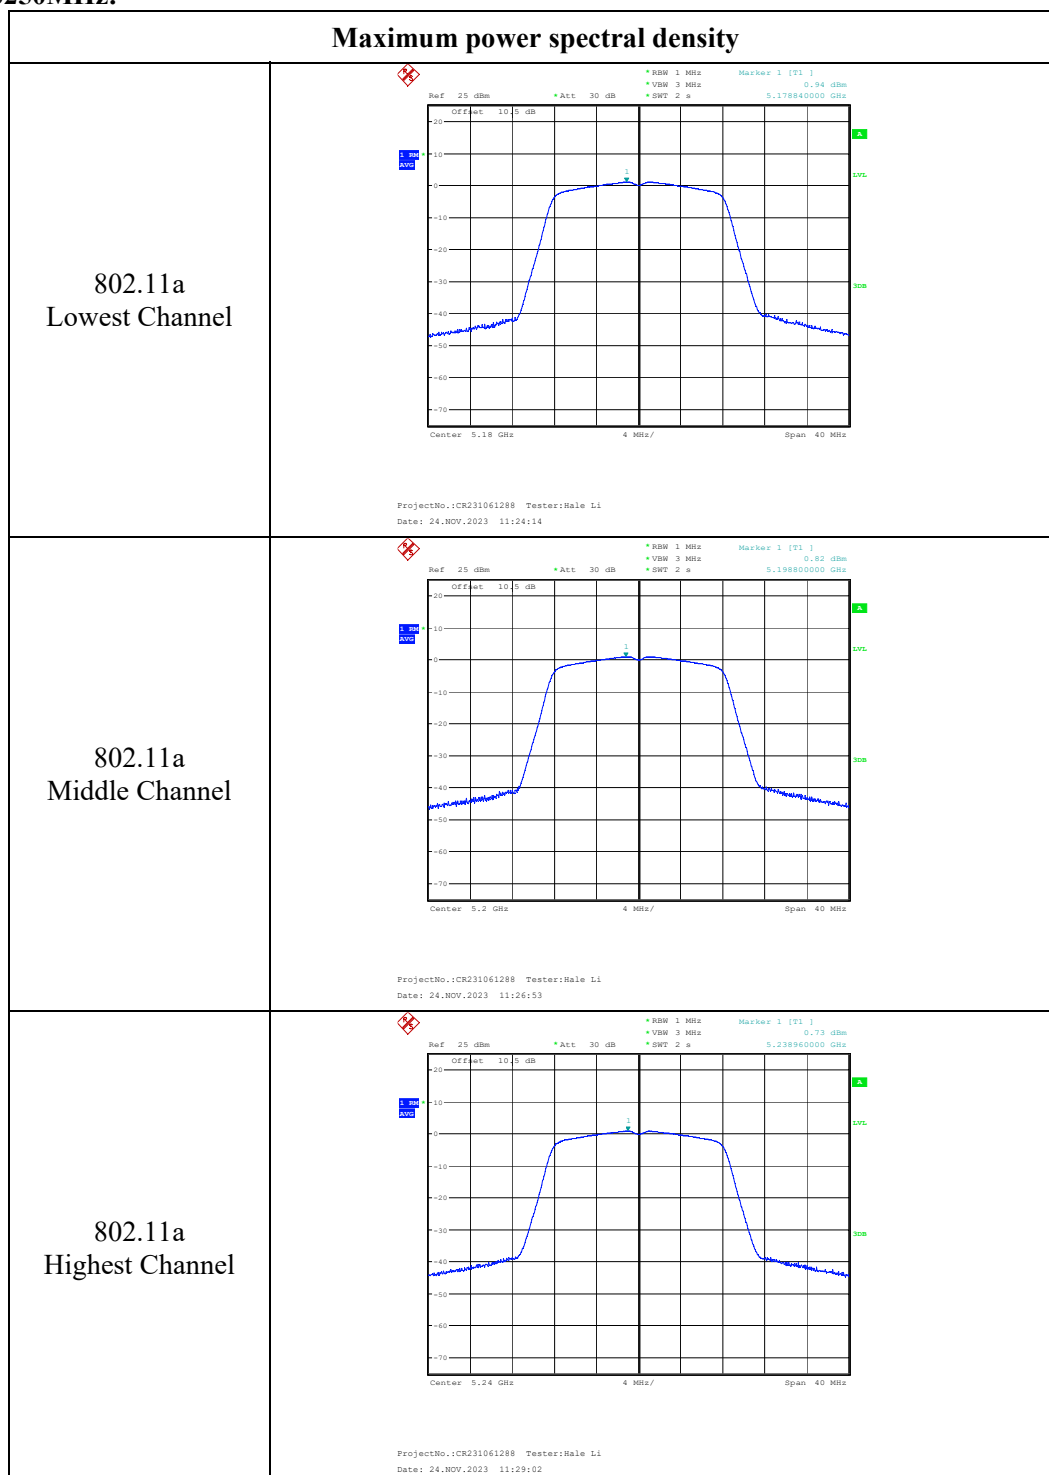


Maximum power spectral density

802.11ac vht20
Lowest Channel

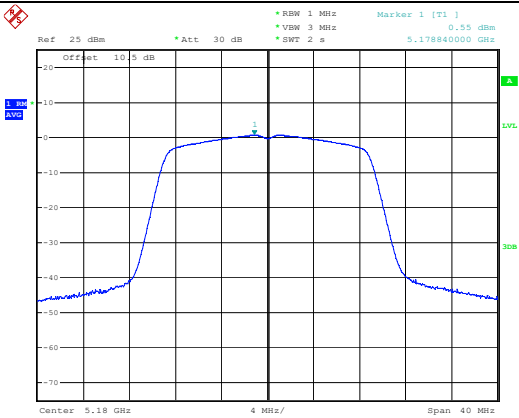


ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:43:37

802.11ac vht20
Middle Channel

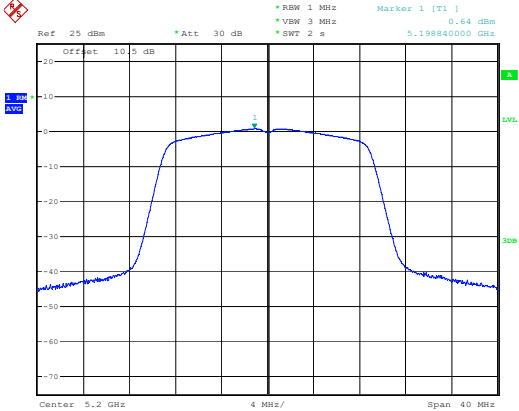

ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:46:38




802.11ac vht20
Highest Channel

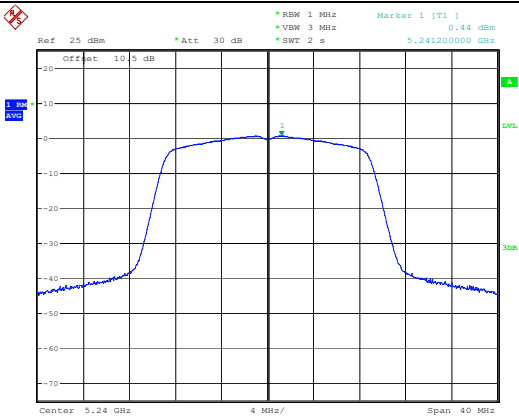

ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:48:31


5725-5850MHz

Maximum power spectral density

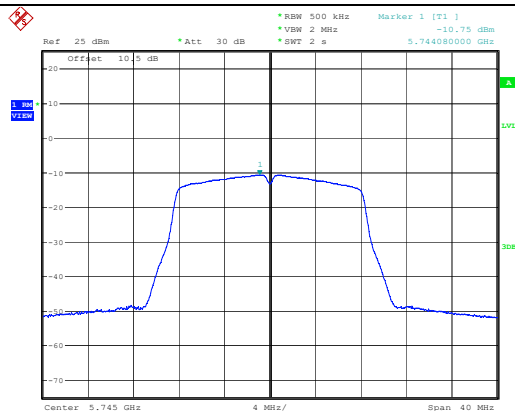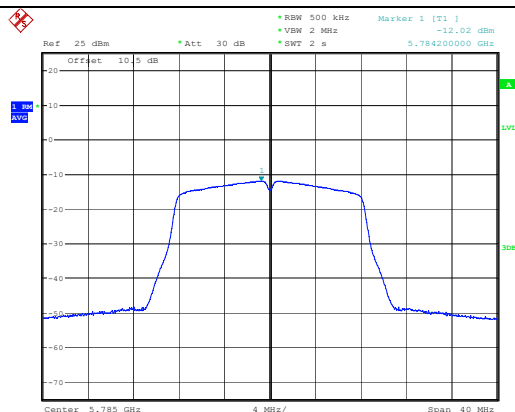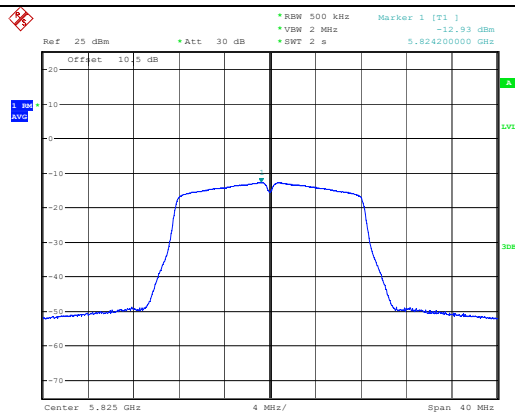802.11a
Lowest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:34:28802.11a
Middle ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:37:13802.11a
Highest ChannelProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:39:37


Maximum power spectral density

802.11ac vht20
Lowest Channel

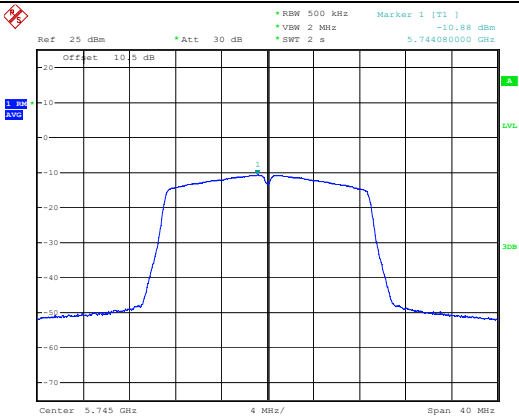


ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:51:23

802.11ac vht20
Middle Channel

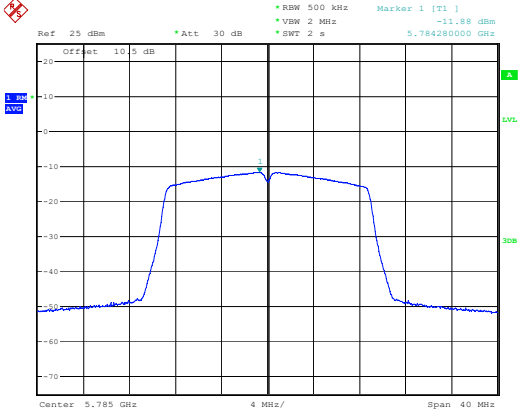

ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:54:12

802.11ac vht20
Highest Channel

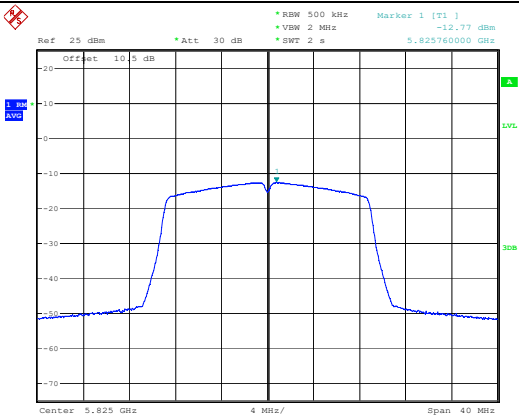

ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 11:56:52

4.6 Duty Cycle:

Serial Number:	2CGM-1	Test Date:	2023-11-24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	26.1	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023-03-31	2024-03-30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).




Test Data:**Main ant**

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (Hz)
802.11a	20	20	100.00	/	10
802.11ac vt20	20	20	100.00	/	10
802.11ac vt40	20	20	100.00	/	10
802.11ac vht80	20	20	100.00	/	10

Aux ant


Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (Hz)
802.11a	20	20	100.00	/	10
802.11ac vt20	20	20	100.00	/	10
802.11ac vt40	20	20	100.00	/	10
802.11ac vht80	20	20	100.00	/	10

Main ant

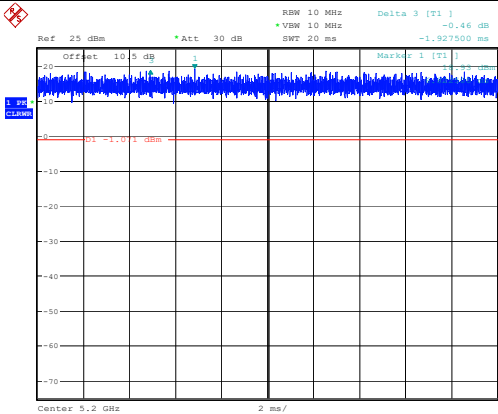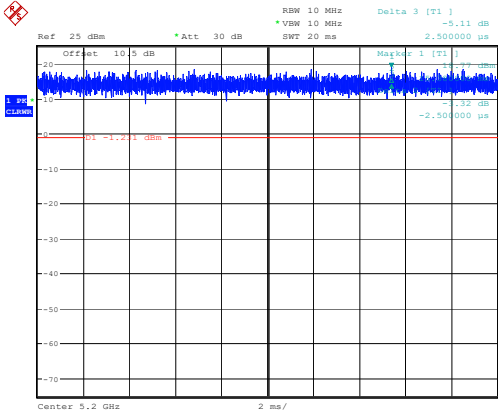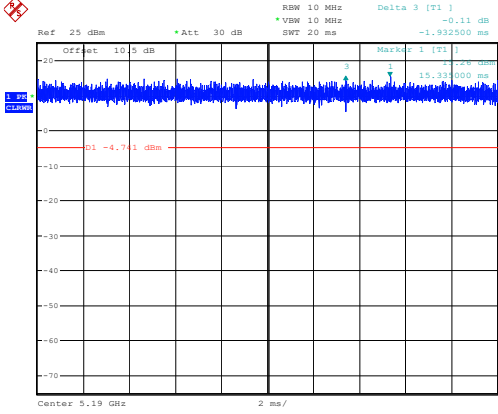Duty Cycle	
802.11a	 Ref: 25 dBm, Att: 30 dB, RBW: 10 MHz, Delta 3 [T1]: -0.46 dB, VSW: 10 MHz, SWT: 20 ms, Marker 1 [T1]: -1.92 dBm Offset: 10.5 dB, Marker 1 [T1]: -1.92 dBm Center: 5.2 GHz, 2 ms ProjectNo.: CR231061288 Tester: Hale Li Date: 24.NOV.2023 13:27:41
802.11ac vht20	 Ref: 25 dBm, Att: 30 dB, RBW: 10 MHz, Delta 3 [T1]: -5.11 dB, VSW: 10 MHz, SWT: 20 ms, Marker 1 [T1]: -1.21 dBm Offset: 10.5 dB, Marker 1 [T1]: -1.21 dBm Center: 5.2 GHz, 2 ms ProjectNo.: CR231061288 Tester: Hale Li Date: 24.NOV.2023 13:42:59
802.11ac vht40	 Ref: 25 dBm, Att: 30 dB, RBW: 10 MHz, Delta 3 [T1]: -0.11 dB, VSW: 10 MHz, SWT: 20 ms, Marker 1 [T1]: -4.71 dBm Offset: 10.5 dB, Marker 1 [T1]: -4.71 dBm Center: 5.19 GHz, 2 ms ProjectNo.: CR231061288 Tester: Hale Li Date: 24.NOV.2023 13:57:07







802.11ac vht80

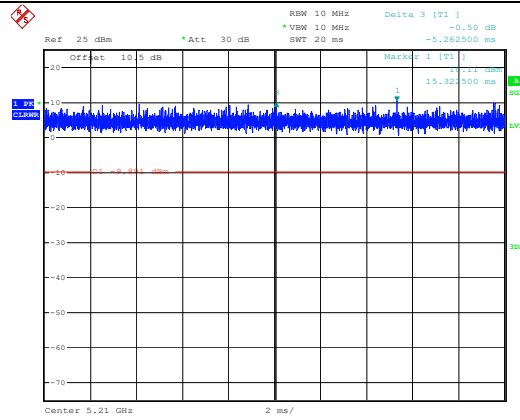

ProjectNo.:CR231061288 Tester:Hale Li
Date: 24.NOV.2023 14:10:14

Aux ant

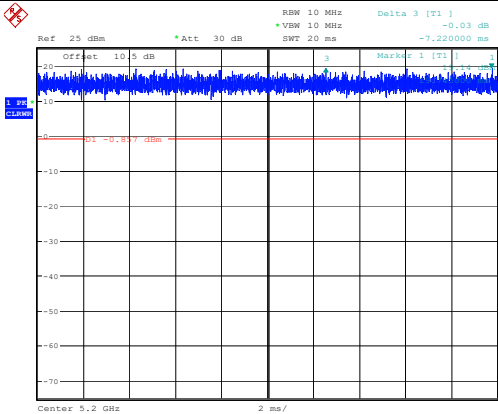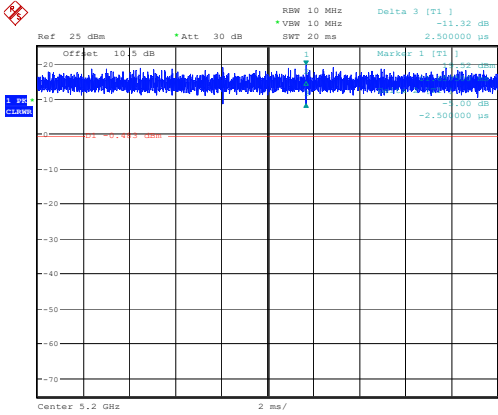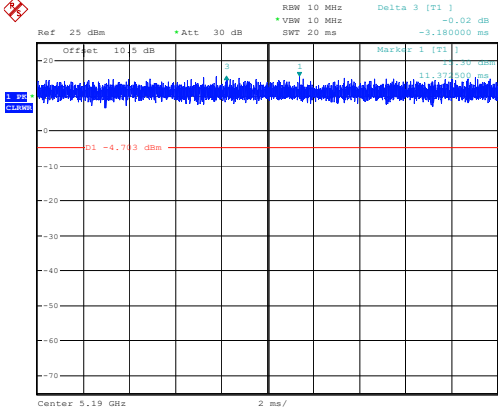Duty Cycle	
802.11a	 Ref: 25 dBm, Att: 30 dB, RBW: 10 MHz, Delta 3 [T1]: -0.03 dB, VSW: 10 MHz, SWT: 20 ms, -7.220000 ms Offset: 10.5 dB, Marker 1 [T1]: 1 Center: 5.2 GHz, 2 ms ProjectNo.: CR231061288, Tester: Hale Li, Date: 24.NOV.2023 11:25:29
802.11ac vht20	 Ref: 25 dBm, Att: 30 dB, RBW: 10 MHz, Delta 3 [T1]: -11.32 dB, VSW: 10 MHz, SWT: 20 ms, 2.500000 us Offset: 10.5 dB, Marker 1 [T1]: 1 Center: 5.2 GHz, 2 ms ProjectNo.: CR231061288, Tester: Hale Li, Date: 24.NOV.2023 11:44:53
802.11ac vht40	 Ref: 25 dBm, Att: 30 dB, RBW: 10 MHz, Delta 3 [T1]: -0.02 dB, VSW: 10 MHz, SWT: 20 ms, -3.180000 ms Offset: 10.5 dB, Marker 1 [T1]: 1 Center: 5.19 GHz, 2 ms ProjectNo.: CR231061288, Tester: Hale Li, Date: 24.NOV.2023 12:00:06

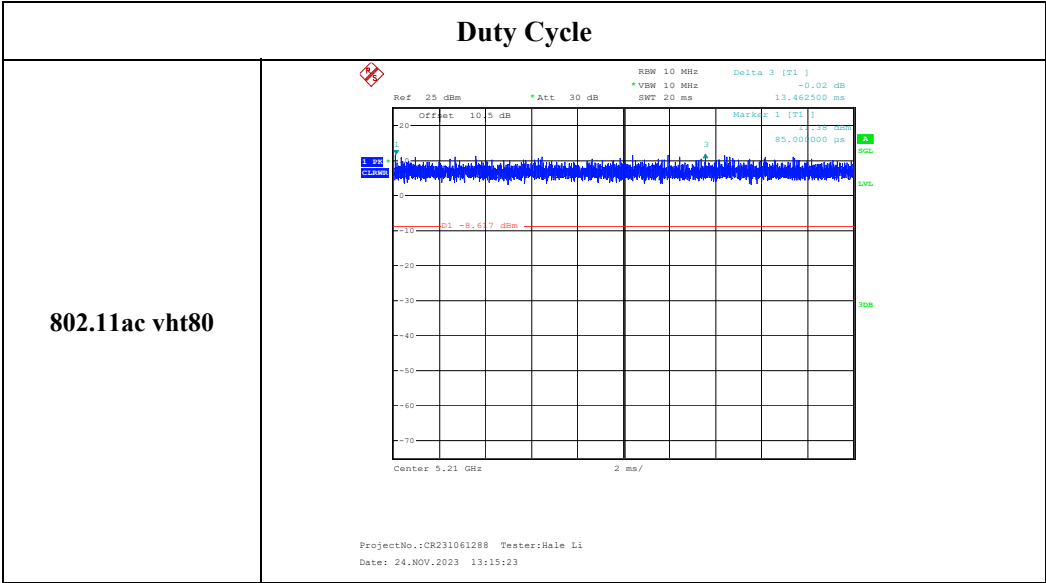

5. EUT PHOTOGRAPHS

Please refer to the attachment CR231061288-EXP EUT EXTERNAL PHOTOGRAPHS and
CR231061288-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231061288-00D-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====