

Plot: 1#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.066$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

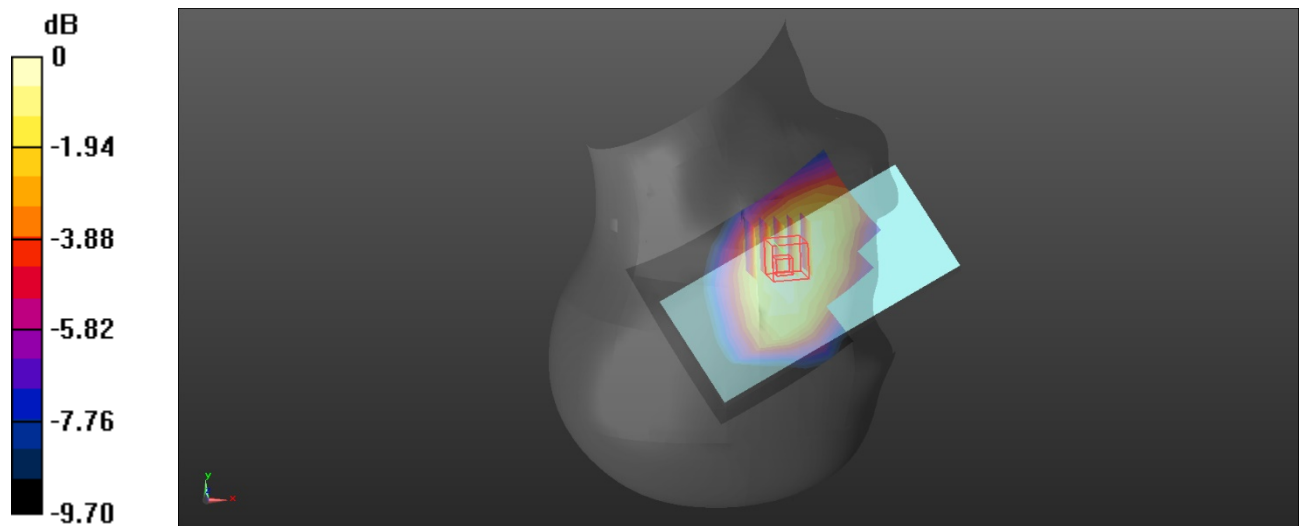Head Right Cheek/GSM 850 Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0356 W/kg **Head Right Cheek/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.376 V/m ; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.0430 W/kg **SAR(1 g) = 0.028 W/kg ; SAR(10 g) = 0.022 W/kg** Maximum value of SAR (measured) = 0.0359 W/kg  $0 \text{ dB} = 0.0359 \text{ W/kg} = -14.45 \text{ dBW/kg}$

Plot: 2#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 836.6 MHz;Duty Cycle: 1:2

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.066$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/GSM 850 Mid/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.377 W/kg


Body Back/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.89 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.381 W/kg

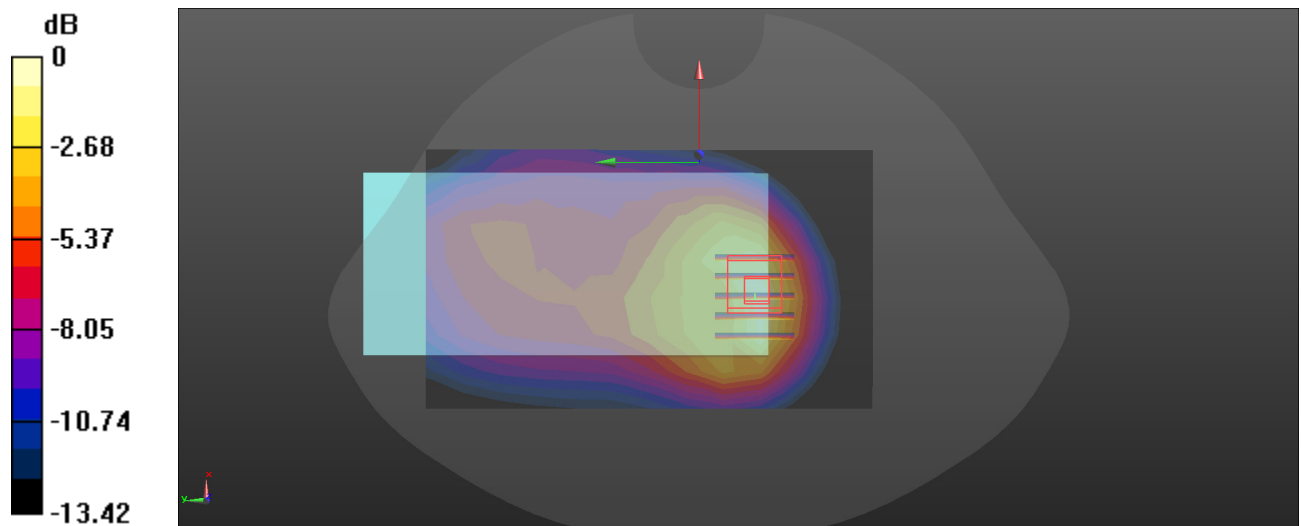

0 dB = 0.381 W/kg = -4.19 dBW/kg

Plot: 3#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 836.6 MHz;Duty Cycle: 1:2

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.066$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/GSM 850 Mid/Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.806 W/kg


Head Left Cheek/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.072 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 0.819 W/kg

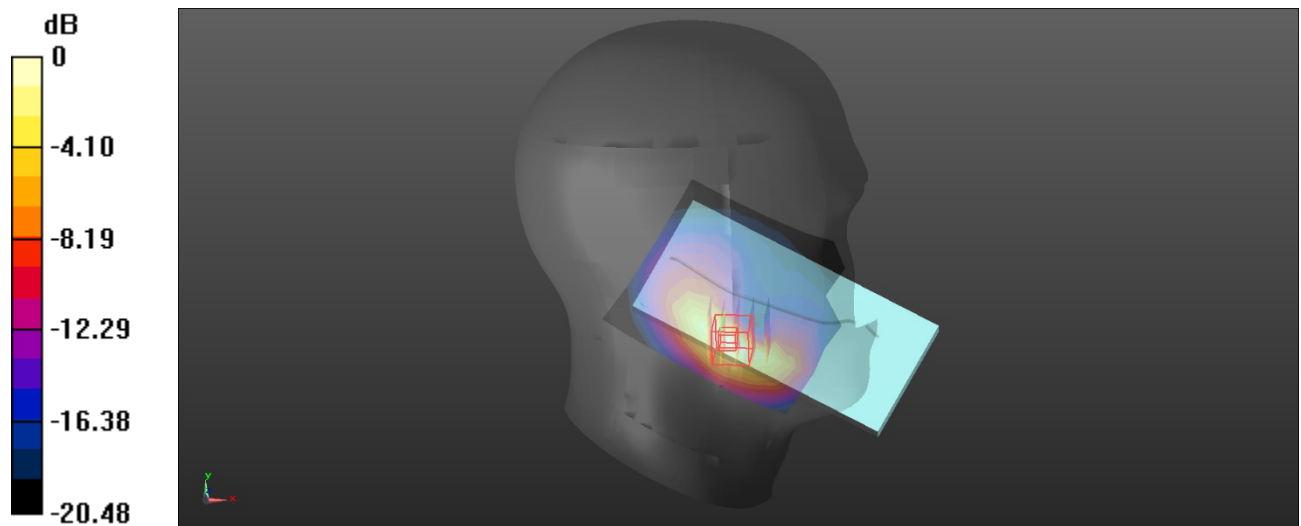

0 dB = 0.819 W/kg = -0.87 dBW/kg

Plot: 4#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 836.6 MHz;Duty Cycle: 1:2

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.066$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/GSM 850 Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.520 W/kg


Body Left/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.24 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.633 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.528 W/kg

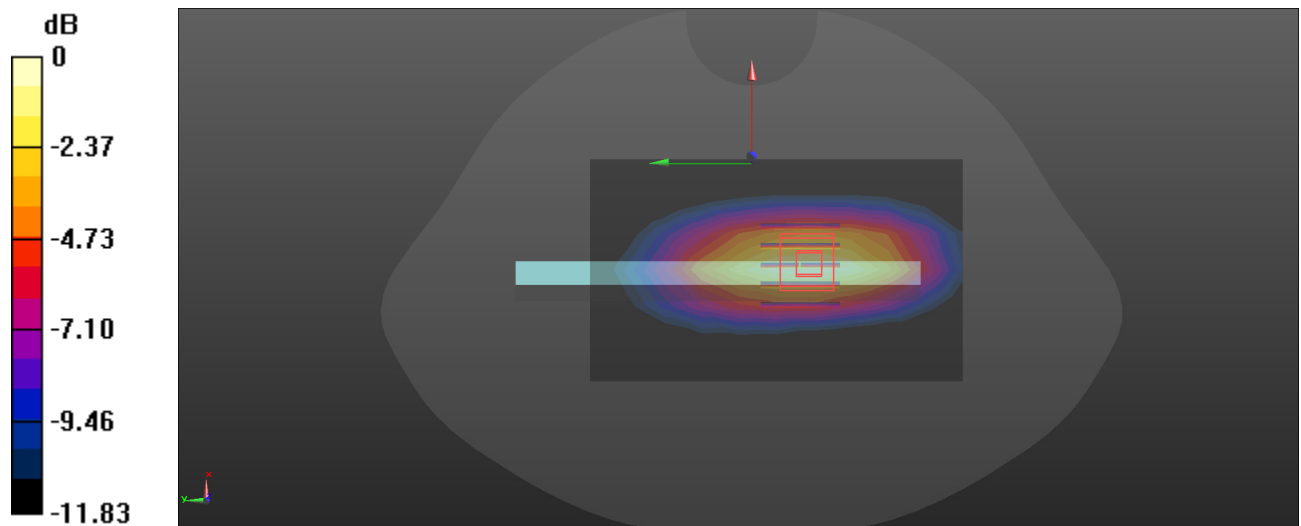

0 dB = 0.528 W/kg = -2.77 dBW/kg

Plot: 5#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.391 \text{ S/m}$; $\epsilon_r = 40.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

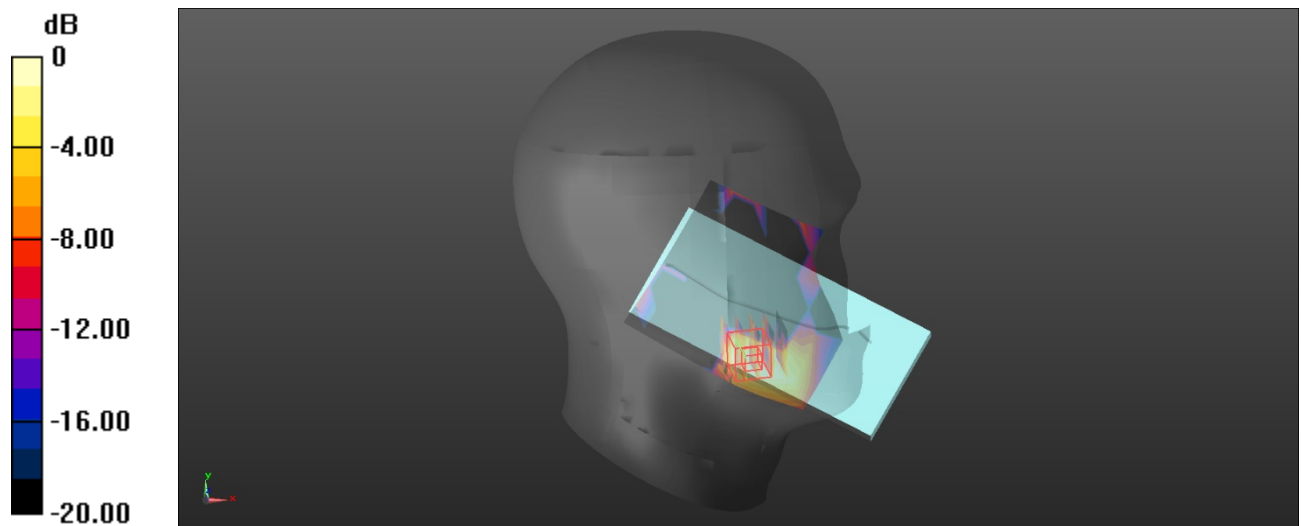Head Left Cheek/GSM 1900 Mid/Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.00573 W/kg **Head Left Cheek/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 0.5130 V/m ; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.00720 W/kg **SAR(1 g) = 0.00304 W/kg ; SAR(10 g) = 0.00149 W/kg** Maximum value of SAR (measured) = 0.00497 W/kg  $0 \text{ dB} = 0.00497 \text{ W/kg} = -23.04 \text{ dBW/kg}$

Plot: 6#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.391 \text{ S/m}$; $\epsilon_r = 40.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/GSM 1900 Mid/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.581 W/kg


Body Bottom/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.97 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.620 W/kg

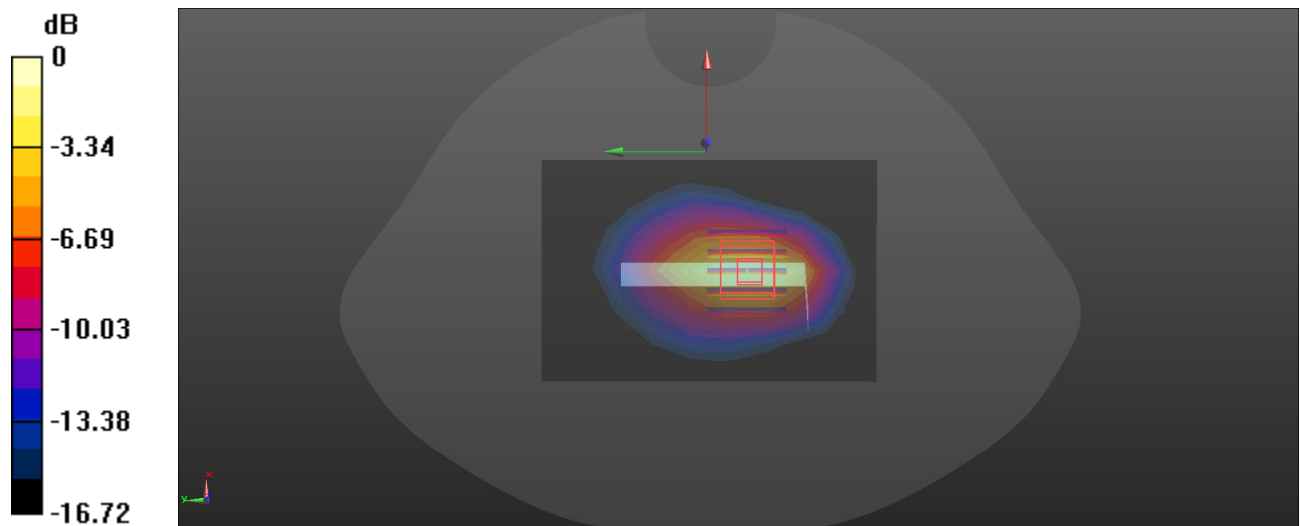

0 dB = 0.620 W/kg = -2.08 dBW/kg

Plot: 7#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.391 \text{ S/m}$; $\epsilon_r = 40.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

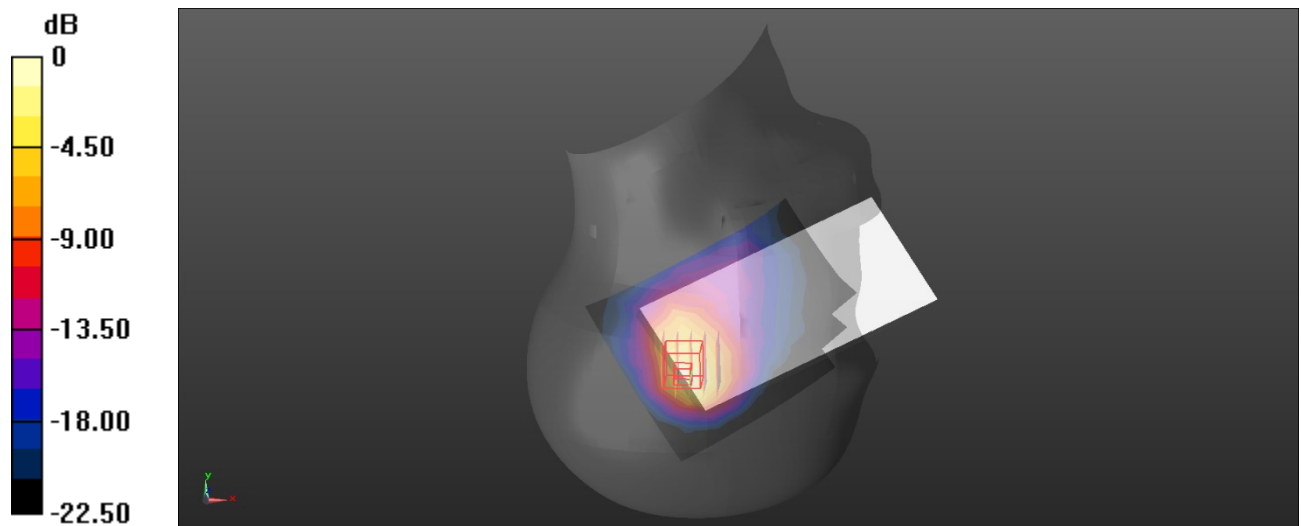Head Right Tilt/GSM 1900 Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.818 W/kg **Head Right Tilt/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.30 V/m ; Power Drift = 0.00 dB Peak SAR (extrapolated) = 1.02 W/kg **SAR(1 g) = 0.459 W/kg ; SAR(10 g) = 0.219 W/kg** Maximum value of SAR (measured) = 0.735 W/kg  $0 \text{ dB} = 0.735 \text{ W/kg} = -1.34 \text{ dBW/kg}$

Plot: 8#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.391 \text{ S/m}$; $\epsilon_r = 40.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/GSM 1900 Mid/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.543 W/kg


Body Top/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.59 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.539 W/kg

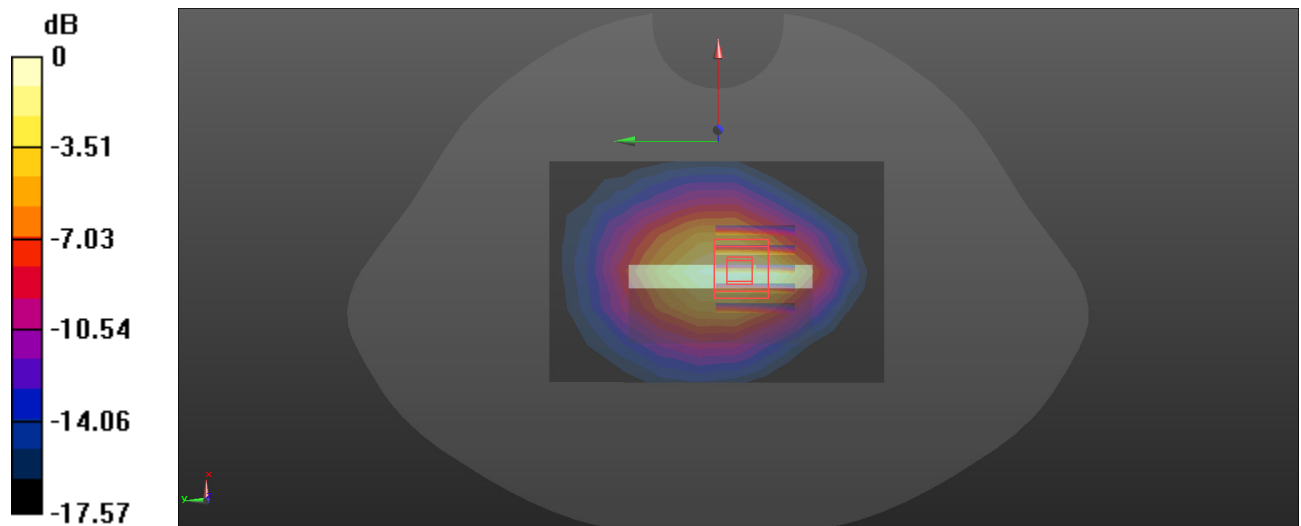

Plot: 9#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.391 \text{ S/m}$; $\epsilon_r = 40.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

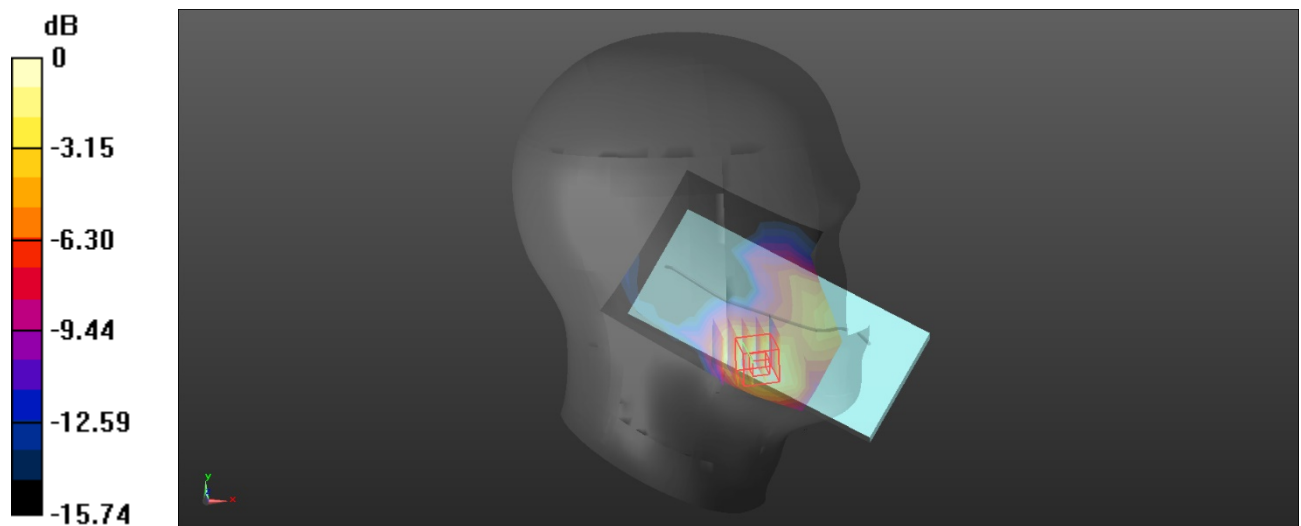Head Left Cheek/WCDMA Band 2 Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0325 W/kg **Head Left Cheek/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.388 V/m ; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.0380 W/kg **SAR(1 g) = 0.023 W/kg ; SAR(10 g) = 0.015 W/kg** Maximum value of SAR (measured) = 0.0318 W/kg  $0 \text{ dB} = 0.0318 \text{ W/kg} = -14.98 \text{ dBW/kg}$

Plot: 10#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.391 \text{ S/m}$; $\epsilon_r = 40.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/WCDMA Band 2 Mid/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.263 W/kg


Body Bottom/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.34 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.274 W/kg

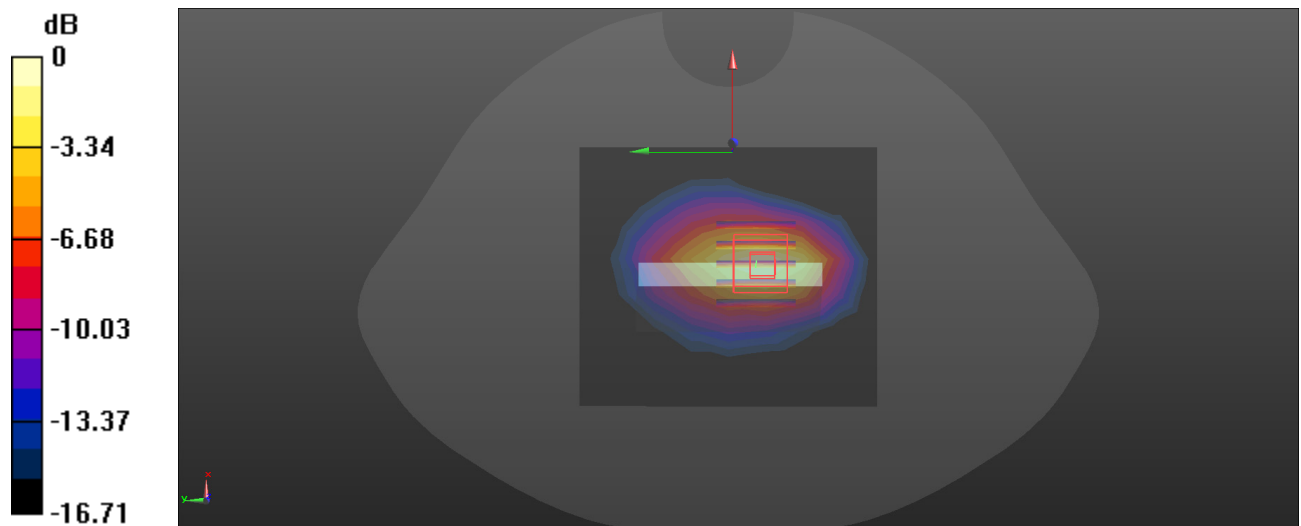

0 dB = 0.274 W/kg = -5.62 dBW/kg

Plot: 11#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.391 \text{ S/m}$; $\epsilon_r = 40.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WCDMA Band 2 Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.594 W/kg


Head Right Tilt/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.37 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.987 W/kg

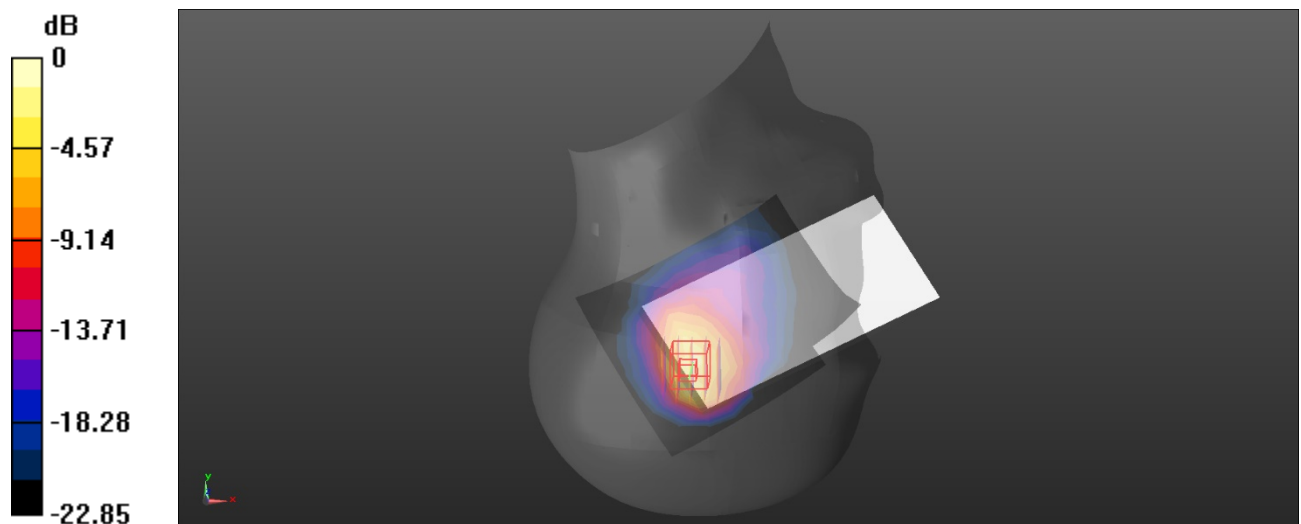

0 dB = 0.987 W/kg = -0.06 dBW/kg

Plot: 12#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.391 \text{ S/m}$; $\epsilon_r = 40.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WCDMA Band 2 Mid/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.237 W/kg


Body Top/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.26 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.243 W/kg

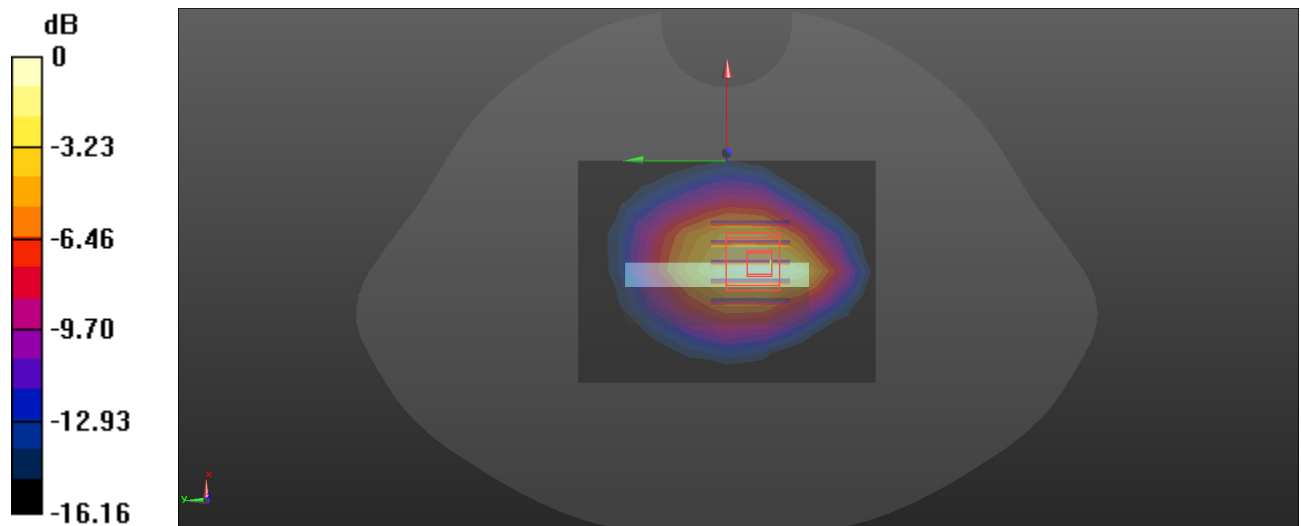

0 dB = 0.243 W/kg = -6.14 dBW/kg

Plot: 13#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.217$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.73, 7.73, 7.73) @ 1732.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WCDMA Band 4 Mid/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0161 W/kg


Head Left Cheek/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.015 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00802 W/kg

Maximum value of SAR (measured) = 0.0175 W/kg

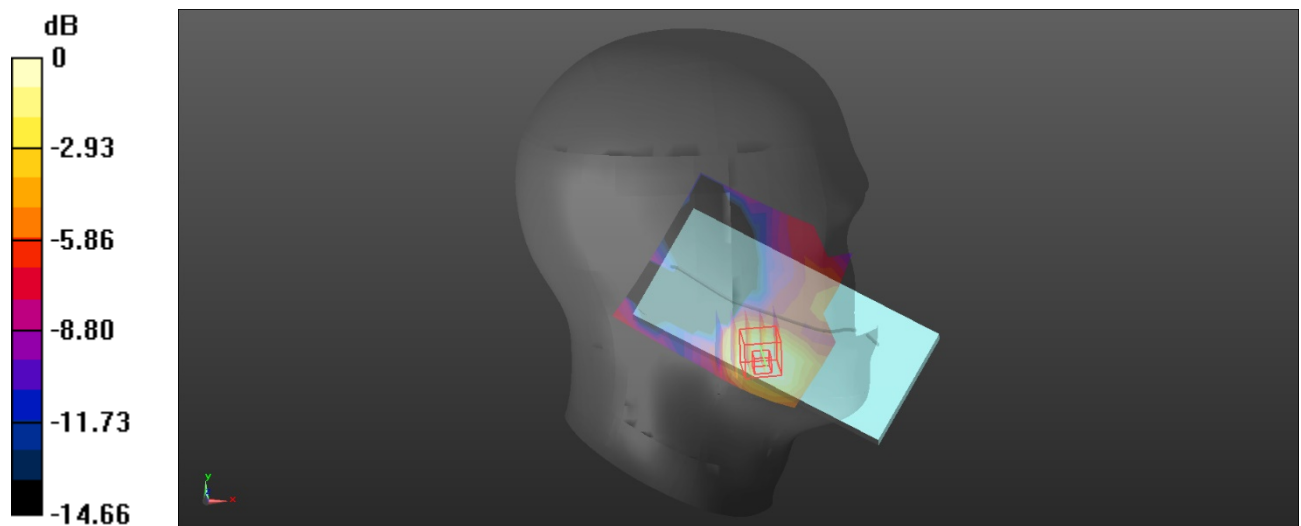

0 dB = 0.0175 W/kg = -17.57 dBW/kg

Plot: 14#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.217$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.73, 7.73, 7.73) @ 1732.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/WCDMA Band 4 Mid/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.223 W/kg


Body Bottom/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.27 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

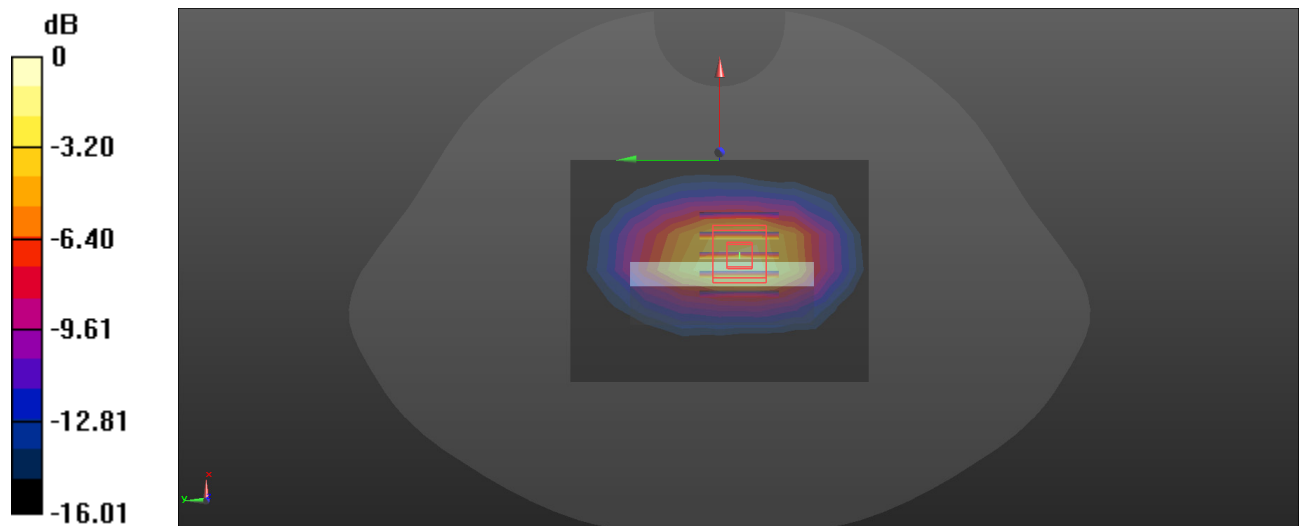

0 dB = 0.312 W/kg = -5.06 dBW/kg

Plot: 15#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.217$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.73, 7.73, 7.73) @ 1732.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WCDMA Band 4 Mid/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.480 W/kg


Head Right Tilt/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.72 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.767 W/kg

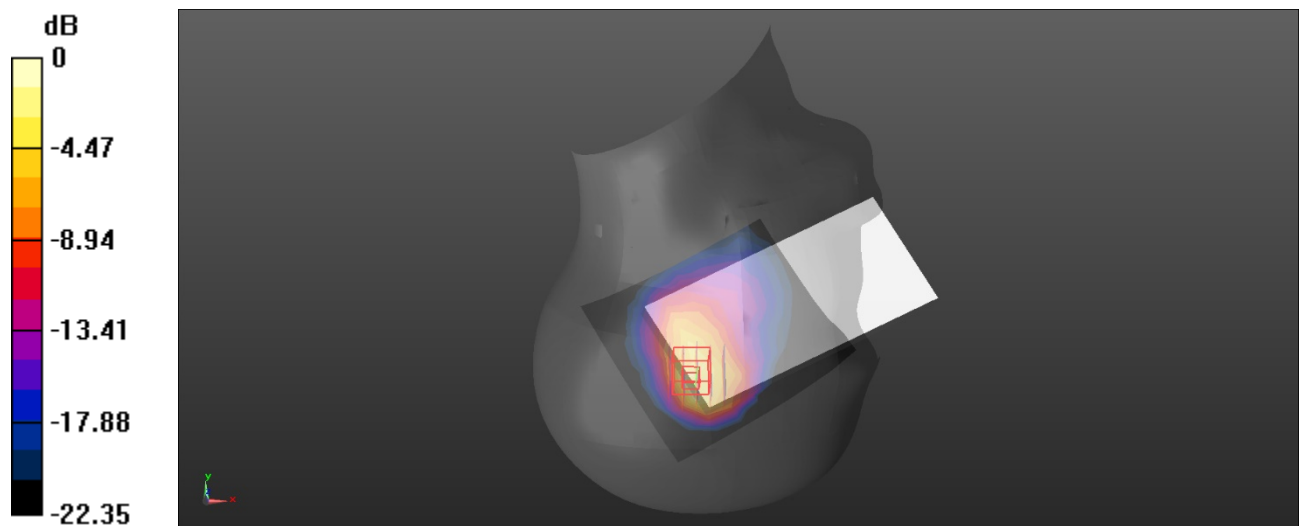

Plot: 16#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.217$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.73, 7.73, 7.73) @ 1732.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WCDMA Band 4 Mid/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.107 W/kg


Body Top/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.582 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

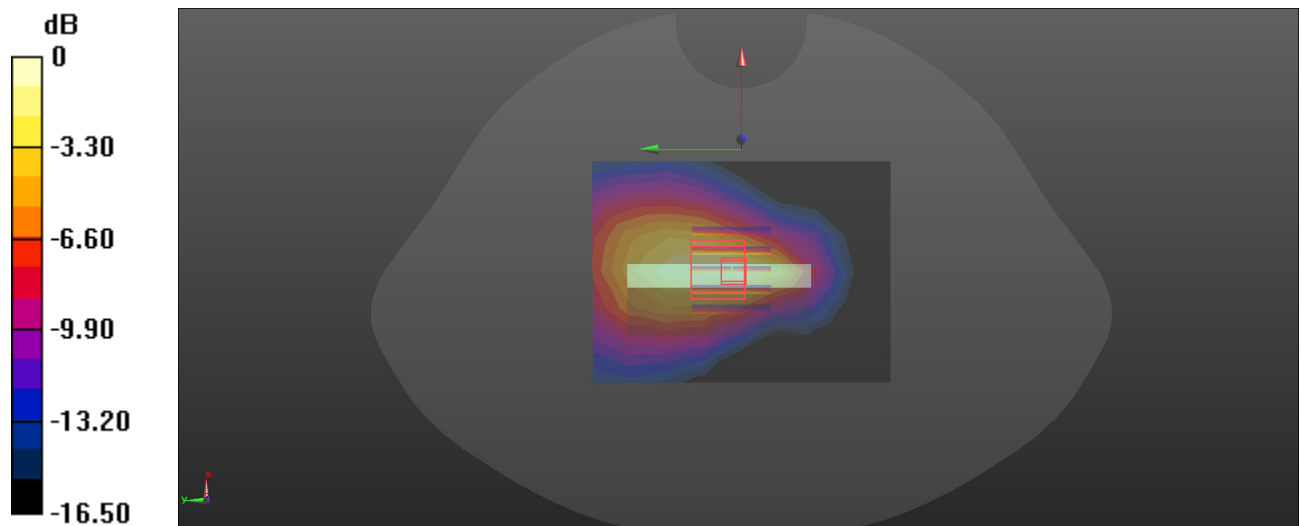

0 dB = 0.106 W/kg = -9.75 dBW/kg

Plot: 17#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.066$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WCDMA Band 5 Mid/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0493 W/kg


Head Left Cheek/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.099 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0493 W/kg

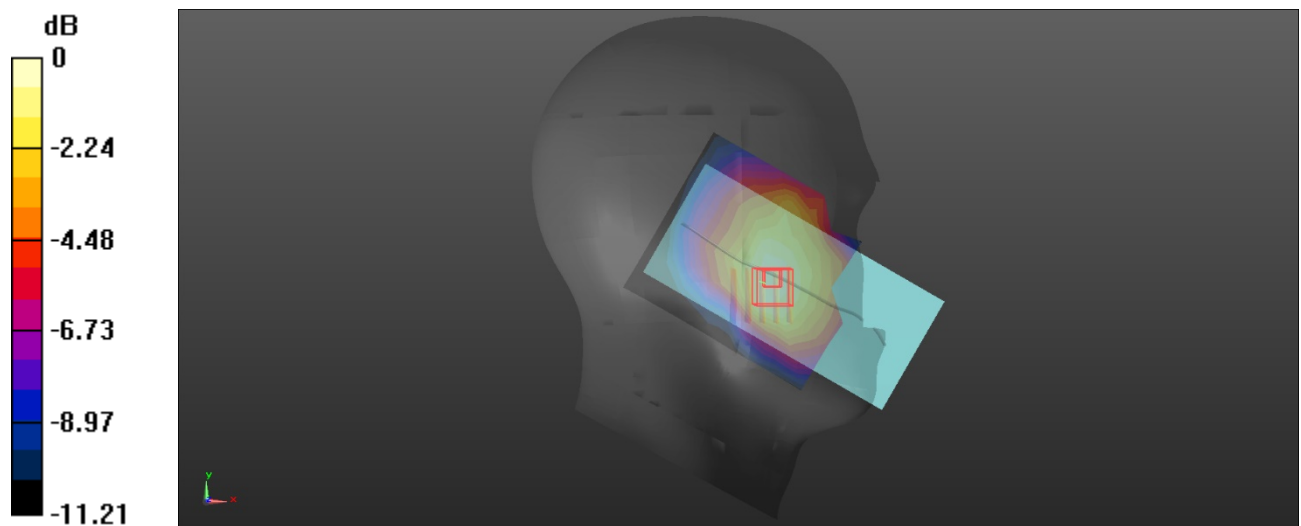

0 dB = 0.0493 W/kg = -13.07 dBW/kg

Plot: 18#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.066$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

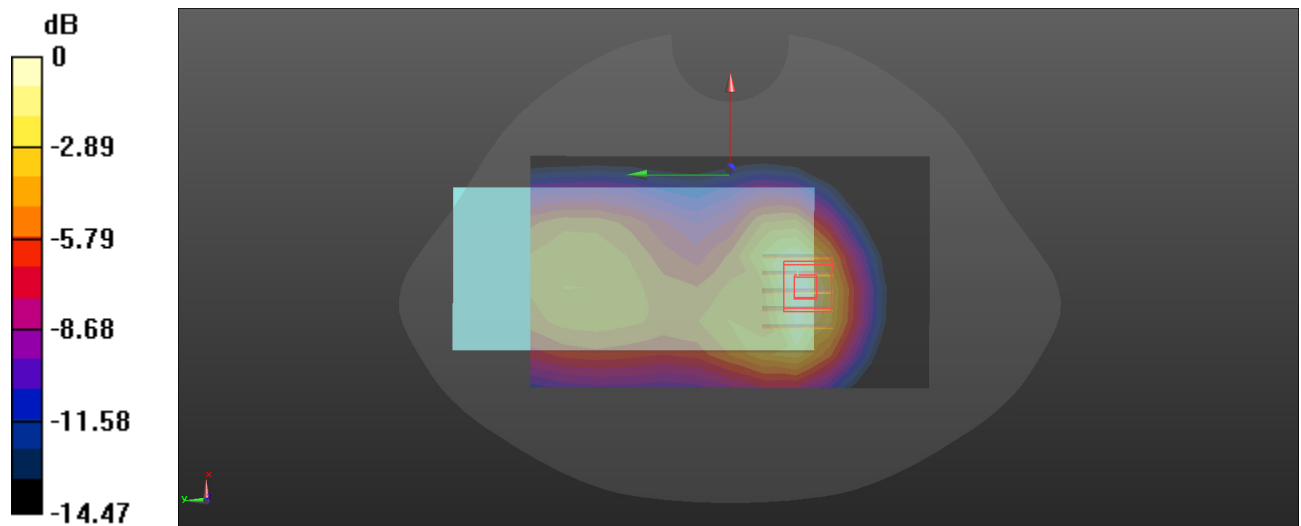Body Back/WCDMA Band 5 Mid/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.295 W/kg **Body Back/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.701 V/m ; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.387 W/kg **SAR(1 g) = 0.203 W/kg ; SAR(10 g) = 0.117 W/kg** Maximum value of SAR (measured) = 0.297 W/kg  $0 \text{ dB} = 0.297 \text{ W/kg} = -5.27 \text{ dBW/kg}$

Plot: 19#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.066$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WCDMA Band 5 Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.461 W/kg


Head Left Cheek/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.499 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.892 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.645 W/kg

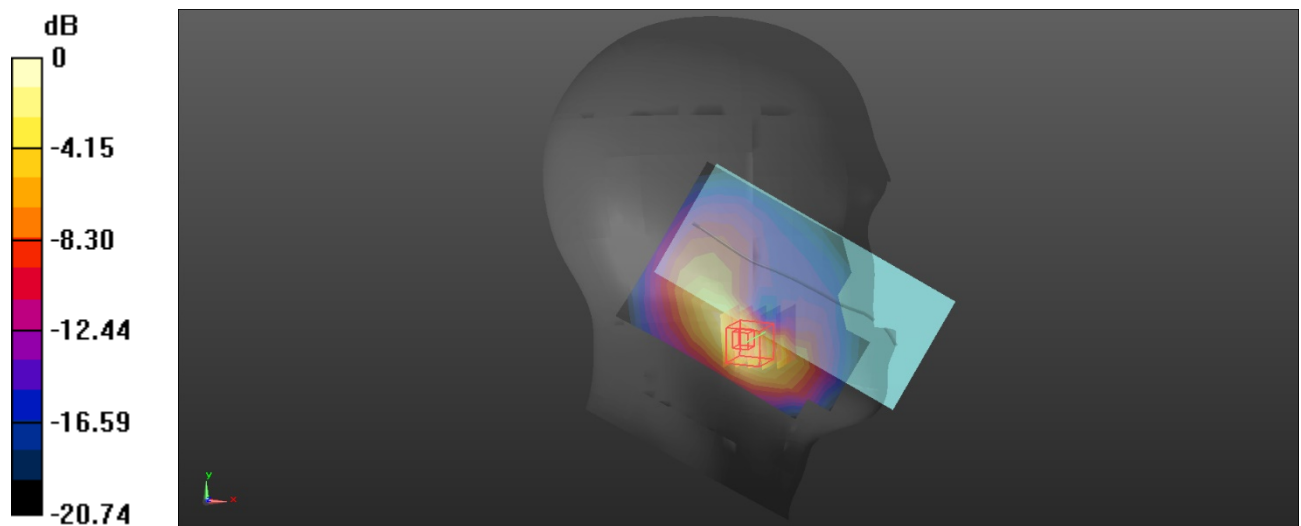

0 dB = 0.645 W/kg = -1.90 dBW/kg

Plot: 20#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.066$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/WCDMA Band 5 Mid/Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.639 W/kg


Body Left/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.60 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.650 W/kg

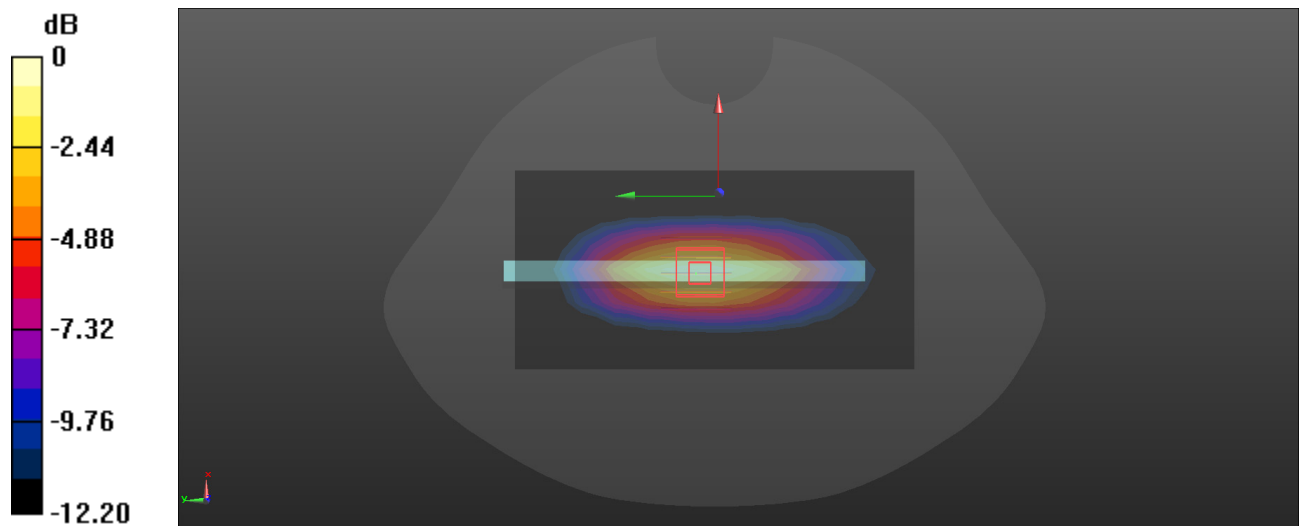

0 dB = 0.650 W/kg = -1.87 dBW/kg

Plot: 21#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.418$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1882.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/LTE Band 25 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0531 W/kg


Head Right Cheek/LTE Band 25 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.244 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0556 W/kg

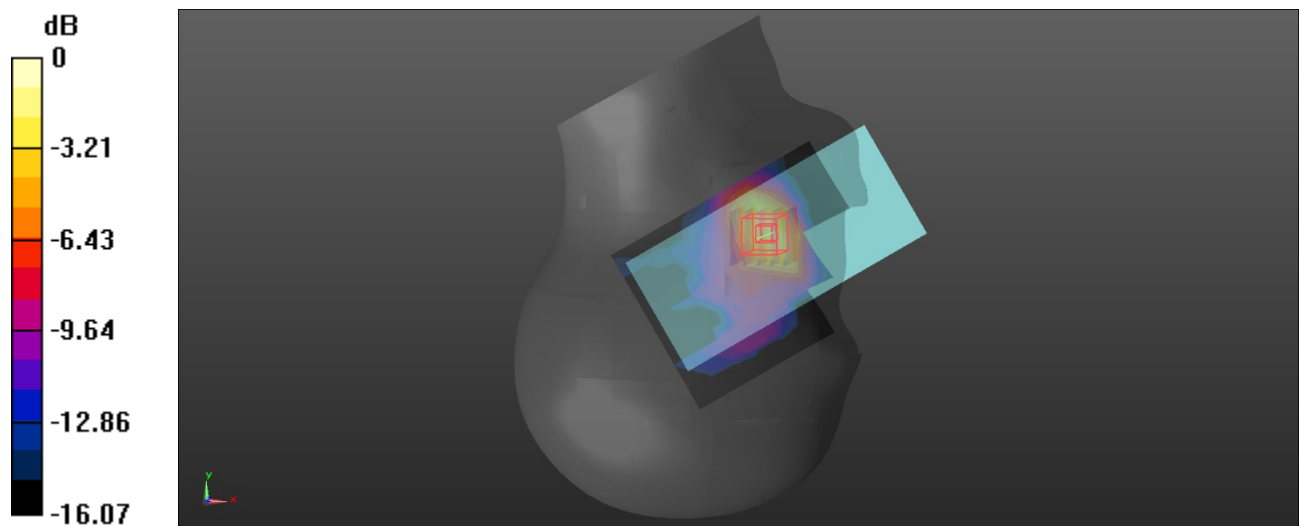

0 dB = 0.0556 W/kg = -12.55 dBW/kg

Plot: 22#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.418$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1882.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/LTE Band 25 1RB Mid/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.268 W/kg


Body Bottom/LTE Band 25 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.952 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.256 W/kg

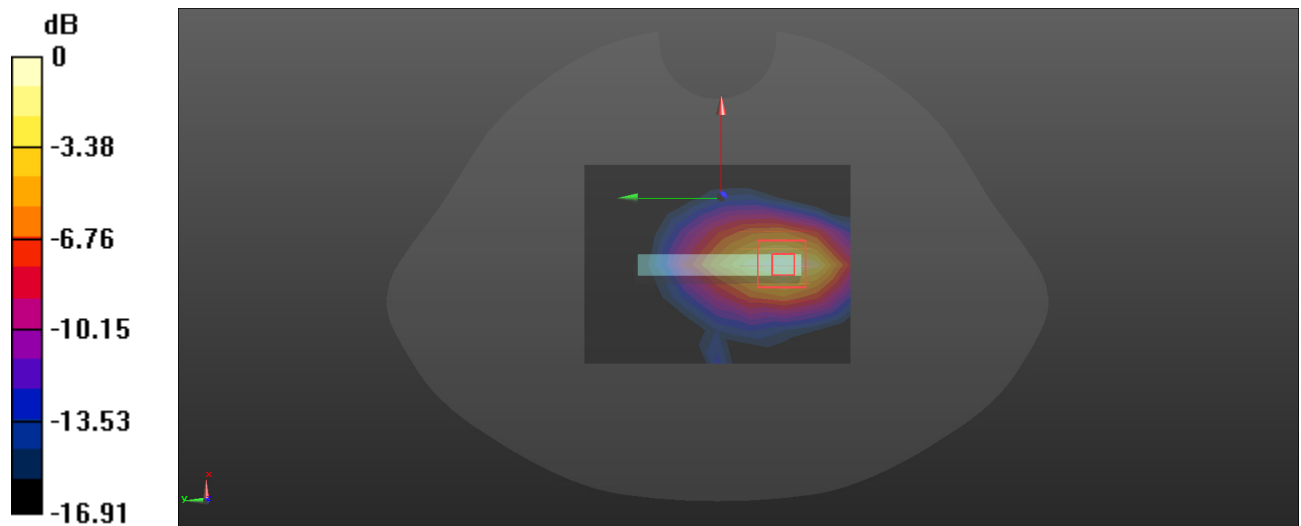

0 dB = 0.256 W/kg = -5.92 dBW/kg

Plot: 23#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.418$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1882.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/LTE Band 25 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.925 W/kg


Head Right Tilt/LTE Band 25 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.52 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.898 W/kg

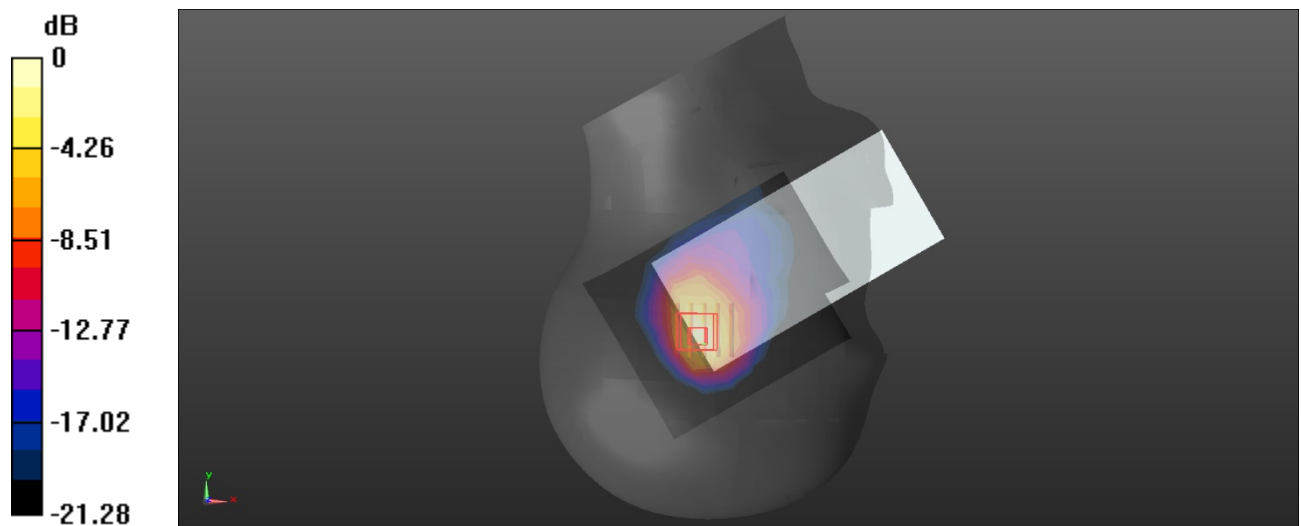

0 dB = 0.898 W/kg = -0.47 dBW/kg

Plot: 24#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.418$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.38, 7.38, 7.38) @ 1882.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/LTE Band 25 1RB Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.201 W/kg


Body Top/LTE Band 25 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.665 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

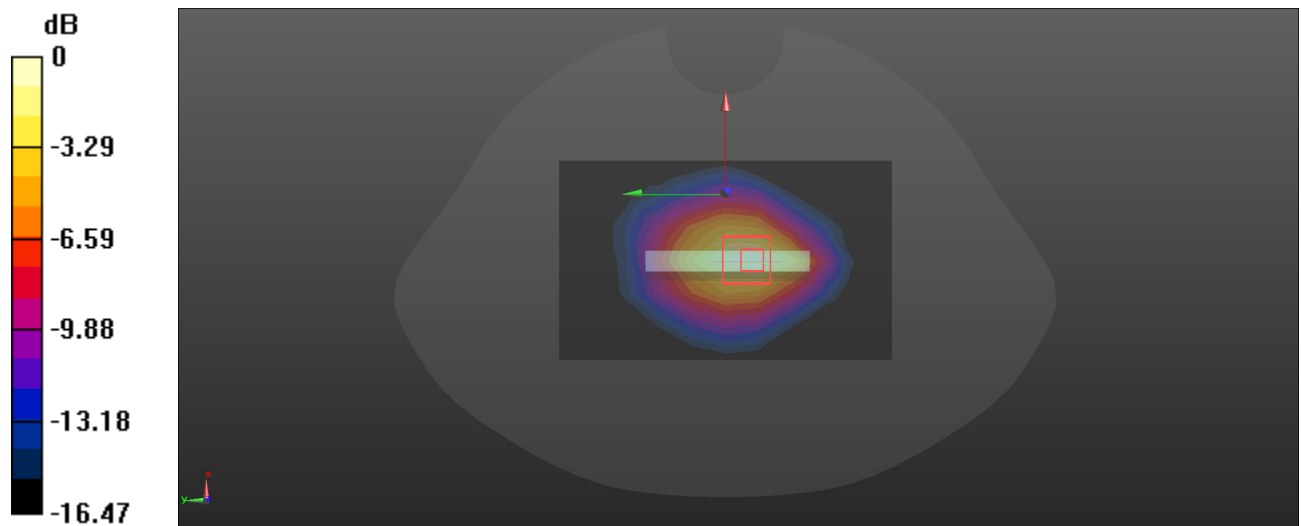

0 dB = 0.200 W/kg = -6.99 dBW/kg

Plot: 25#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.821$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 831.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/LTE Band 26 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0453 W/kg


Head Right Cheek/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.328 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0458 W/kg

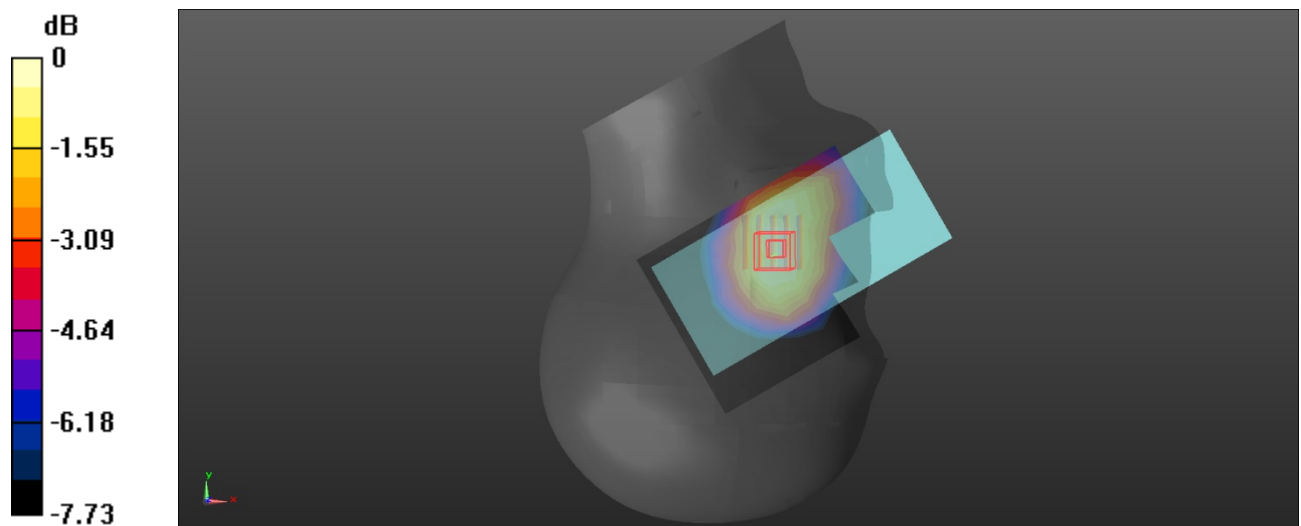

0 dB = 0.0458 W/kg = -13.39 dBW/kg

Plot: 26#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.821$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 831.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/LTE Band 26 1RB Mid/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.127 W/kg


Body Back/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.448 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.134 W/kg

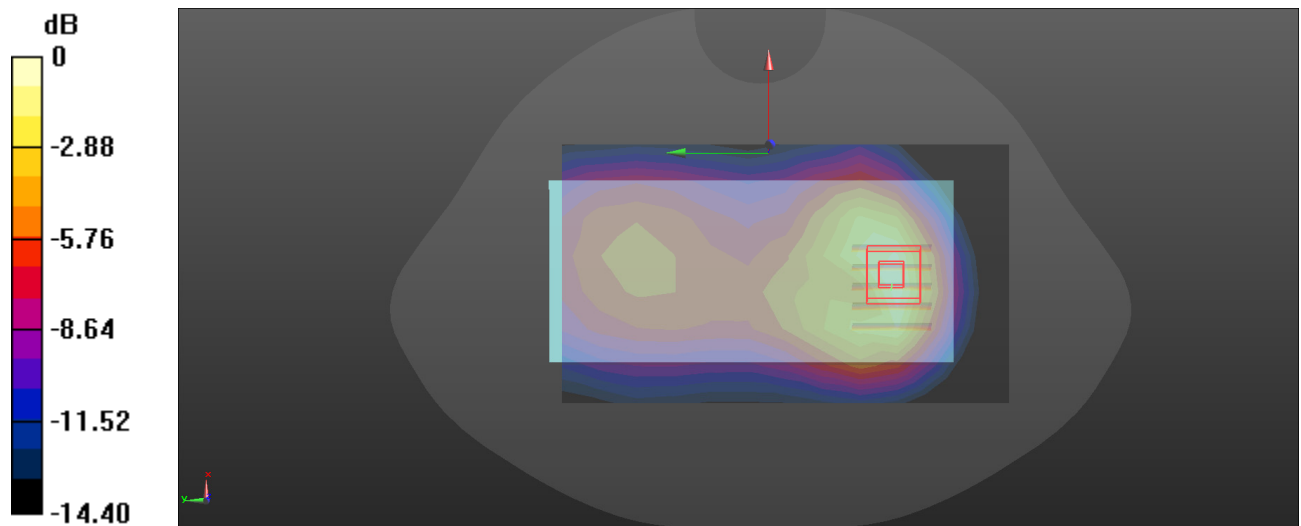

0 dB = 0.134 W/kg = -8.73 dBW/kg

Plot: 27#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 821.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 821.5$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.836$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 821.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/LTE Band 26 1RB Low/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 W/kg


Head Left Cheek/LTE Band 26 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.998 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.940 W/kg; SAR(10 g) = 0.504 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

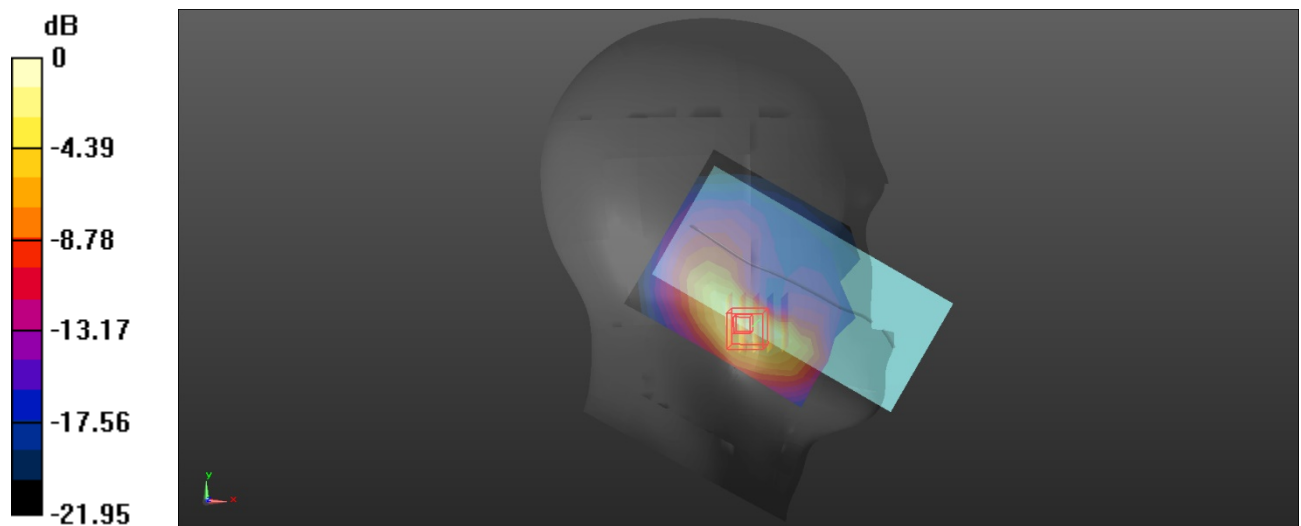

0 dB = 1.46 W/kg = 1.64 dBW/kg

Plot: 28#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.821$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 831.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/LTE Band 26 1RB Mid/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.886 W/kg


Body Left/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.79 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.380 W/kg

Maximum value of SAR (measured) = 0.865 W/kg

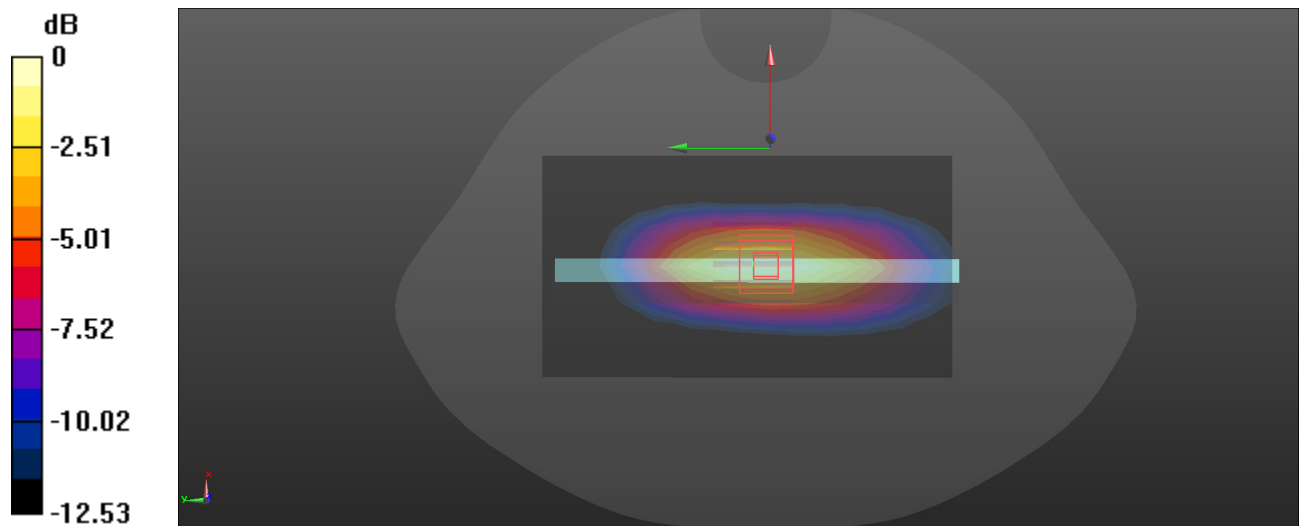

0 dB = 0.865 W/kg = -0.63 dBW/kg

Plot: 29#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.876$ S/m; $\epsilon_r = 38.178$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.85, 6.85, 6.85) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/LTE Band 7 1RB Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0397 W/kg


Head Right Cheek/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.147 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0376 W/kg

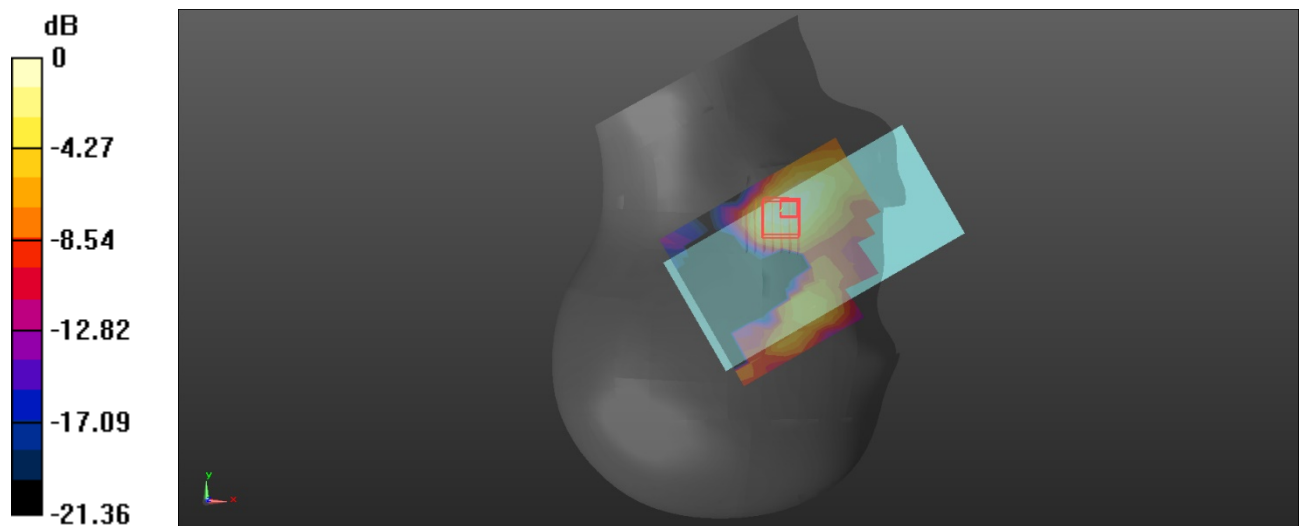

0 dB = 0.0376 W/kg = -14.25 dBW/kg

Plot: 30#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.876 \text{ S/m}$; $\epsilon_r = 38.178$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.85, 6.85, 6.85) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/LTE Band 7 1RB Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.156 W/kg


Body Bottom/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.746 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

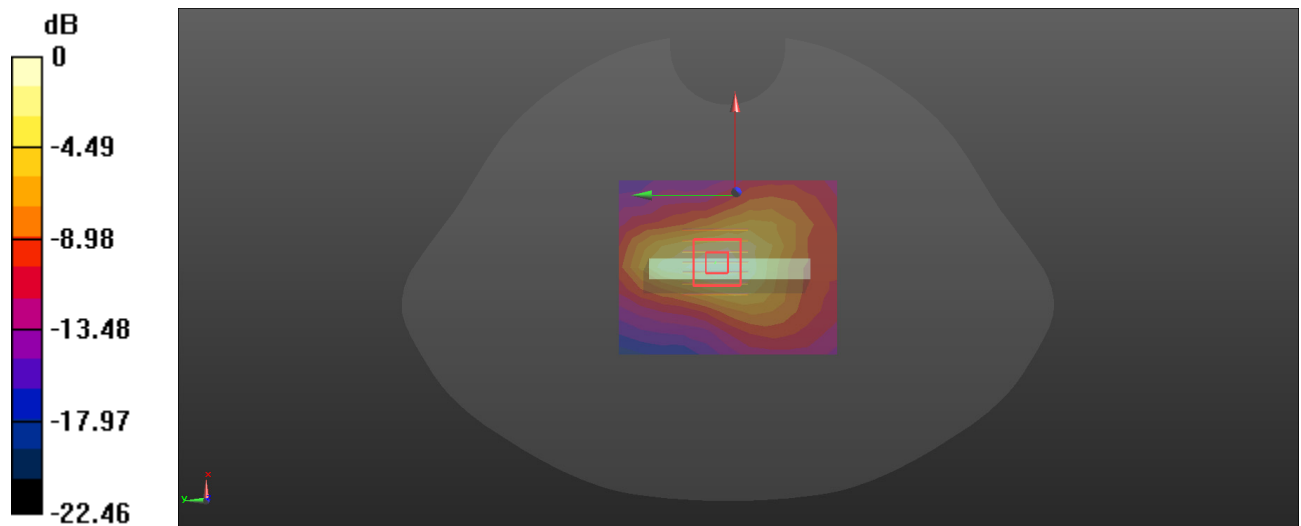

0 dB = 0.162 W/kg = -7.90 dBW/kg

Plot: 31#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.876$ S/m; $\epsilon_r = 38.178$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.85, 6.85, 6.85) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/LTE Band 7 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.901 W/kg


Head Right Tilt/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.66 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

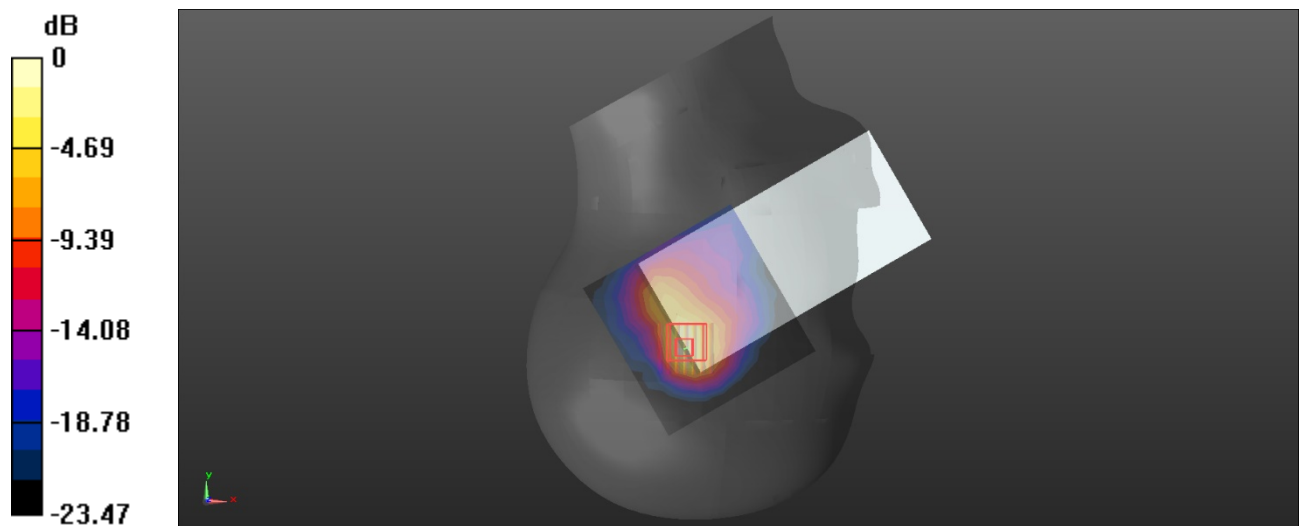

0 dB = 1.07 W/kg = 0.29 dBW/kg

Plot: 32#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.876 \text{ S/m}$; $\epsilon_r = 38.178$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.85, 6.85, 6.85) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/LTE Band 7 1RB Mid/Area Scan (9x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.161 W/kg


Body Top/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.609 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.165 W/kg

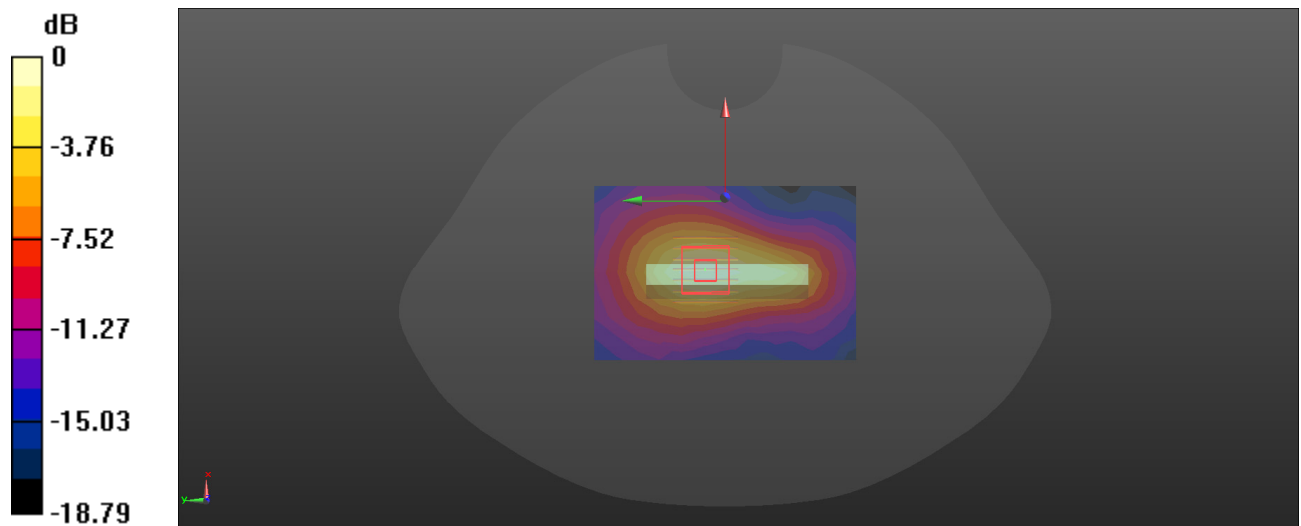

0 dB = 0.165 W/kg = -7.83 dBW/kg

Plot: 33#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.594$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/LTE Band 12 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0800 W/kg


Head Right Cheek/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.790 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0767 W/kg

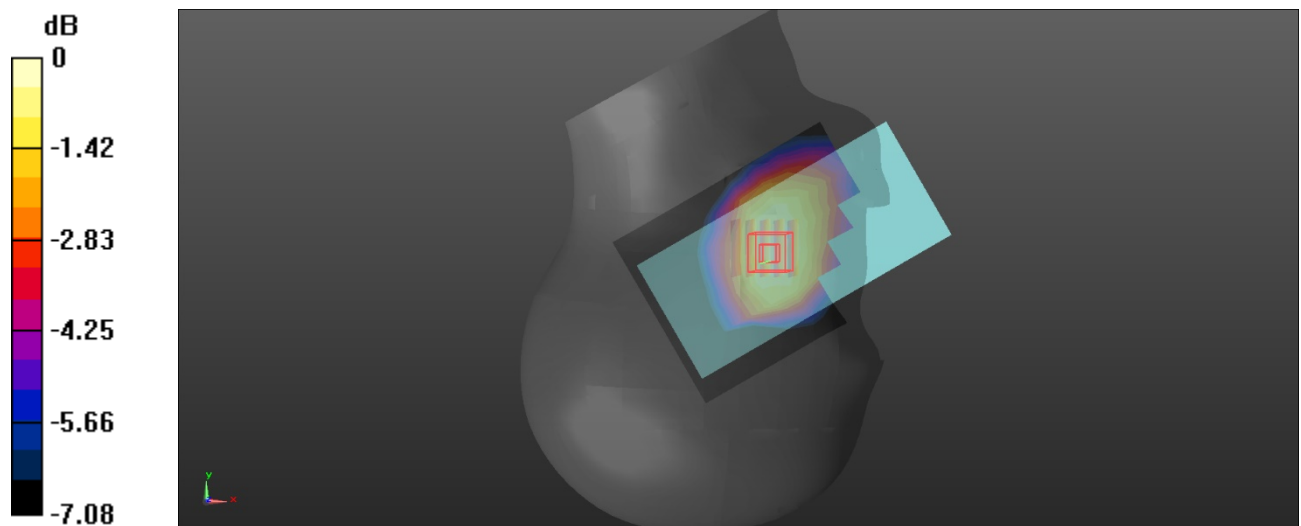

0 dB = 0.0767 W/kg = -11.15 dBW/kg

Plot: 34#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.594$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/LTE Band 12 1RB Mid/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.173 W/kg


Body Back/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.643 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.169 W/kg

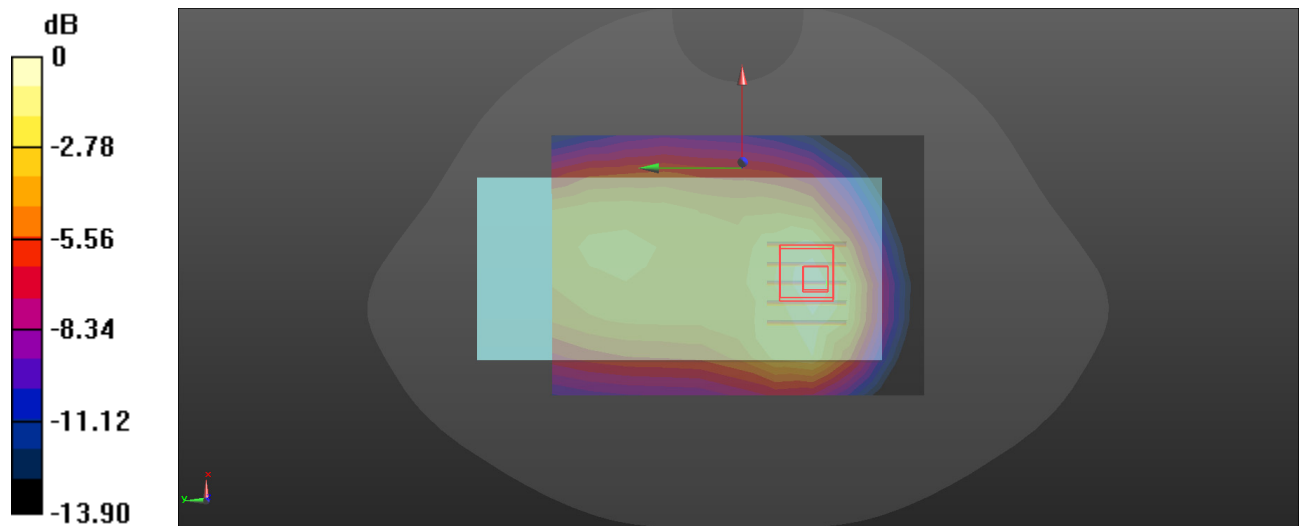

0 dB = 0.169 W/kg = -7.72 dBW/kg

Plot: 35#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.594$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/LTE Band 12 1RB Mid/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.750 W/kg


Head Left Cheek/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.828 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.729 W/kg; SAR(10 g) = 0.395 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

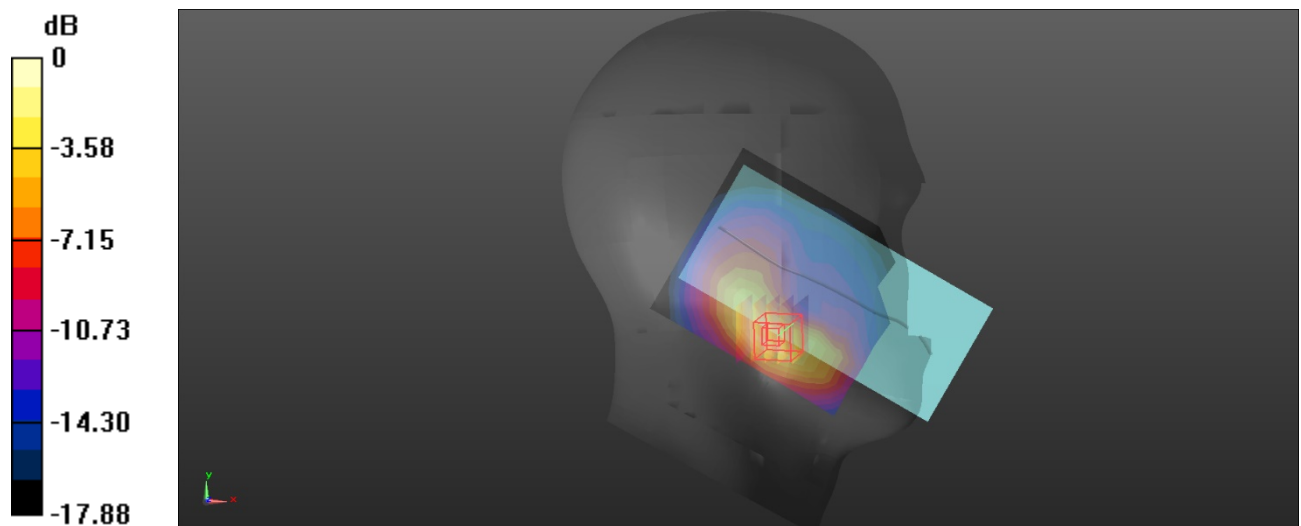

0 dB = 1.18 W/kg = 0.72 dBW/kg

Plot: 36#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.594$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/LTE Band 12 1RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.742 W/kg


Body Left/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.68 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.385 W/kg

Maximum value of SAR (measured) = 0.836 W/kg

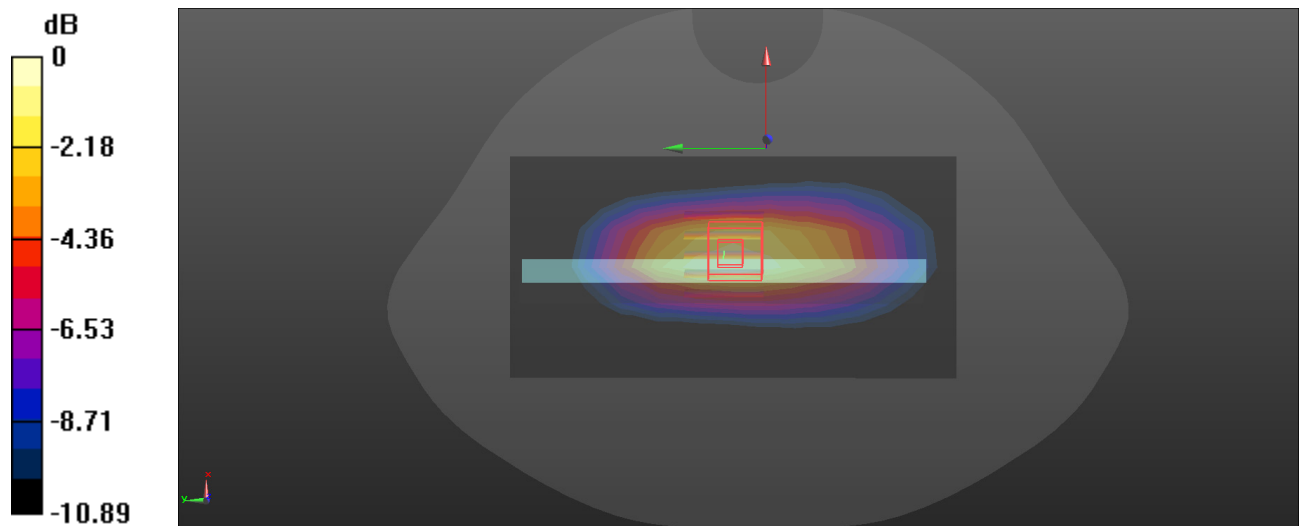

0 dB = 0.836 W/kg = -0.78 dBW/kg

Plot: 37#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.105$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.4, 9.4, 9.4) @ 782 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/LTE Band 13 1RB Mid/Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0767 W/kg


Head Left Cheek/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.813 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0792 W/kg

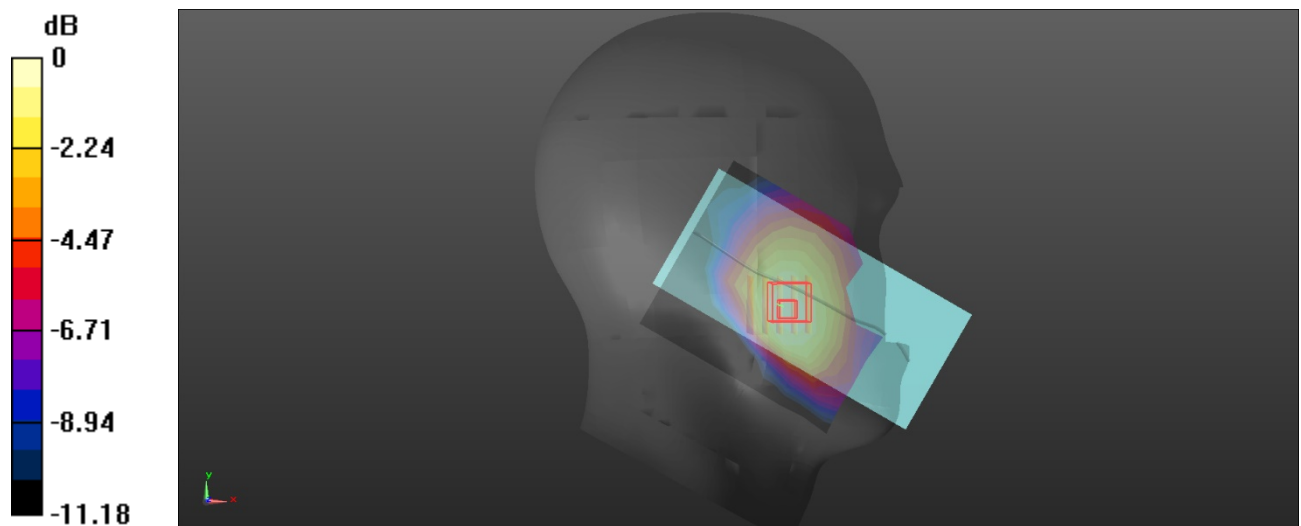 $0 \text{ dB} = 0.0792 \text{ W/kg} = -11.01 \text{ dBW/kg}$

Plot: 38#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.105$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.4, 9.4, 9.4) @ 782 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

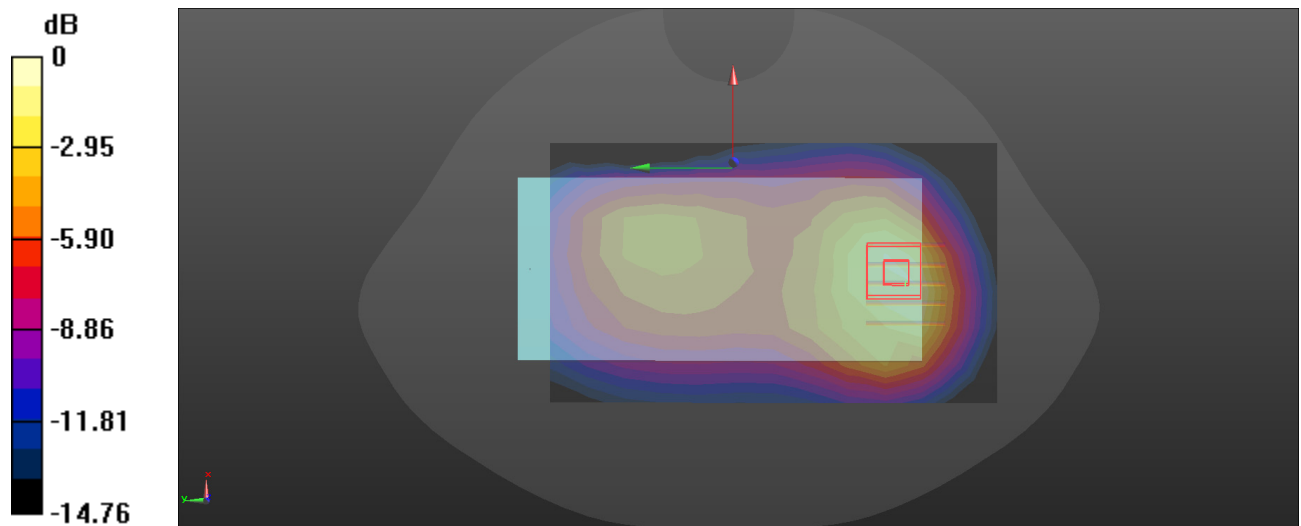Body Back/LTE Band 13 1RB Mid/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.175 W/kg **Body Back/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.419 V/m ; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.276 W/kg **SAR(1 g) = 0.141 W/kg ; SAR(10 g) = 0.082 W/kg** Maximum value of SAR (measured) = 0.213 W/kg  $0 \text{ dB} = 0.213 \text{ W/kg} = -6.72 \text{ dBW/kg}$

Plot: 39#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.105$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.4, 9.4, 9.4) @ 782 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/LTE Band 13 1RB Mid/Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.738 W/kg


Head Left Cheek/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.736 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.385 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

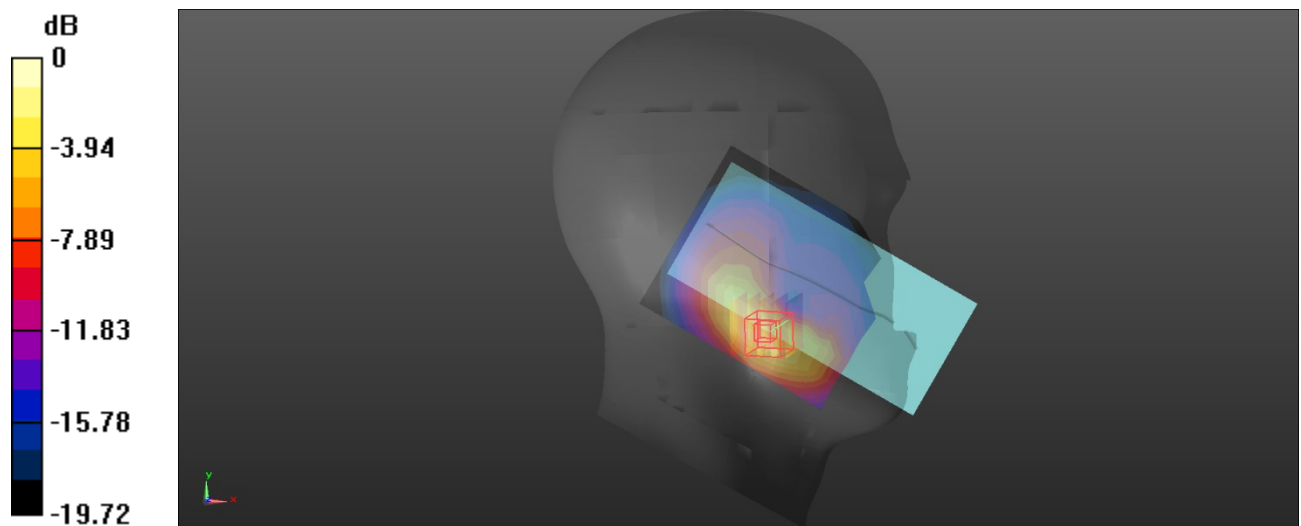 $0 \text{ dB} = 1.12 \text{ W/kg} = 0.49 \text{ dBW/kg}$

Plot: 40#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.105$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.4, 9.4, 9.4) @ 782 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/LTE Band 13 1RB Mid/Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.788 W/kg


Body Left/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.40 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.393 W/kg

Maximum value of SAR (measured) = 0.888 W/kg

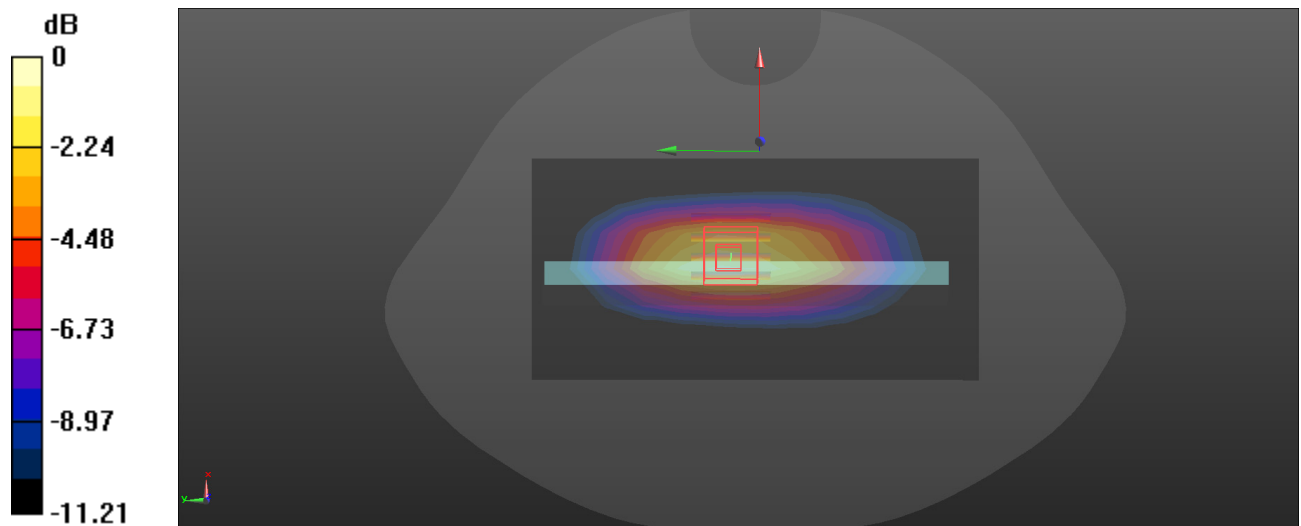

0 dB = 0.888 W/kg = -0.52 dBW/kg

Plot: 41#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 37.948$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.65, 6.65, 6.65) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/LTE Band 38 1RB Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0806 W/kg


Head Right Cheek/LTE Band 38 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.776 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0837 W/kg

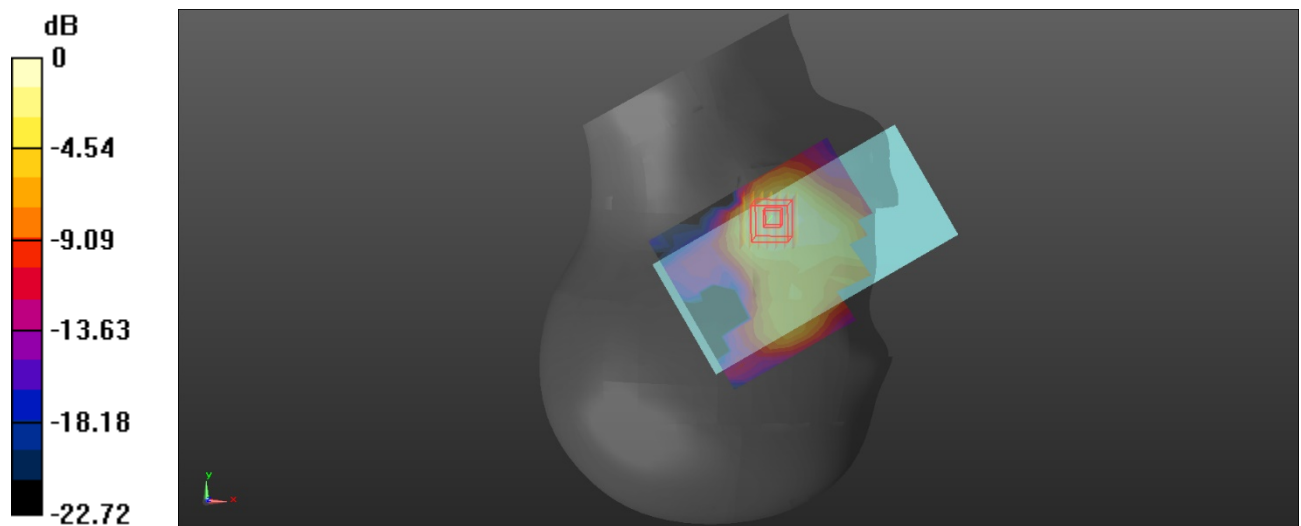

0 dB = 0.0837 W/kg = -10.77 dBW/kg

Plot: 42#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.956 \text{ S/m}$; $\epsilon_r = 37.948$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.65, 6.65, 6.65) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

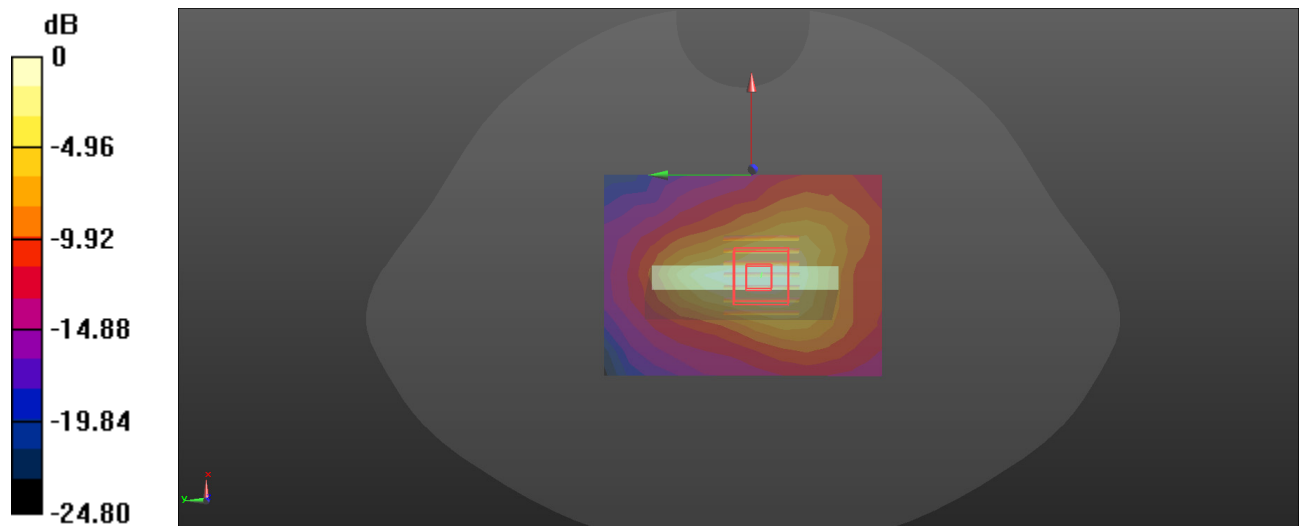Body Bottom/LTE Band 38 1RB Mid/Area Scan (9x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.156 W/kg **Body Bottom/LTE Band 38 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.439 V/m ; Power Drift = -0.19 dB Peak SAR (extrapolated) = 0.187 W/kg **SAR(1 g) = 0.101 W/kg ; SAR(10 g) = 0.052 W/kg** Maximum value of SAR (measured) = 0.156 W/kg  $0 \text{ dB} = 0.156 \text{ W/kg} = -8.07 \text{ dBW/kg}$

Plot: 43#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.956 \text{ S/m}$; $\epsilon_r = 37.948$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.65, 6.65, 6.65) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/LTE Band 38 1RB Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.919 W/kg


Head Right Tilt/LTE Band 38 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.04 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.931 W/kg

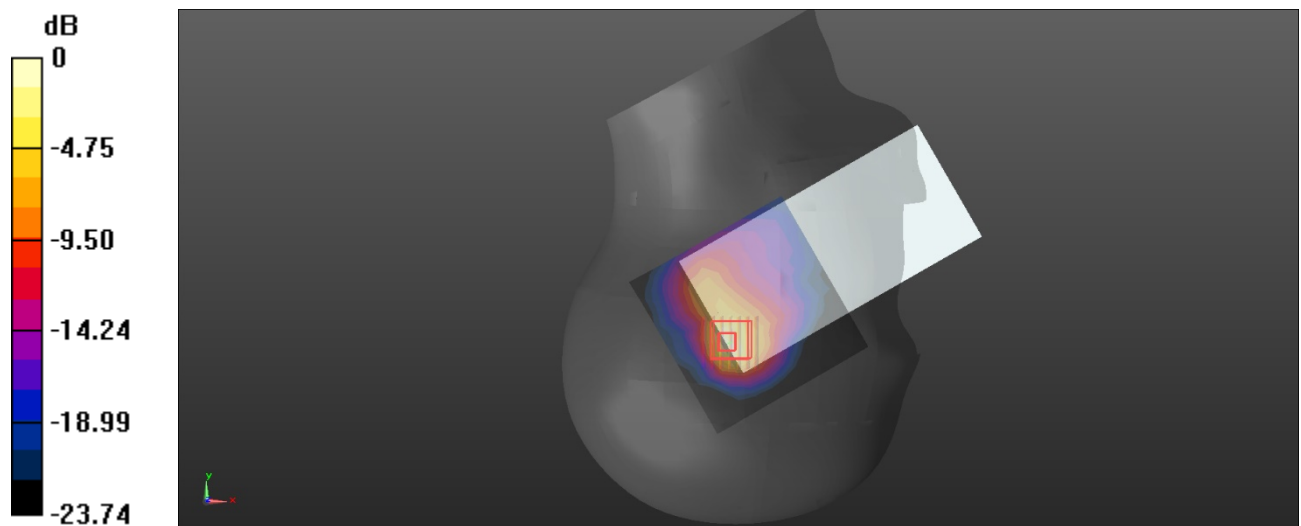

0 dB = 0.931 W/kg = -0.31 dBW/kg

Plot: 44#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 37.948$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.65, 6.65, 6.65) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/LTE Band 38 1RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.123 W/kg


Body Top/LTE Band 38 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.296 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

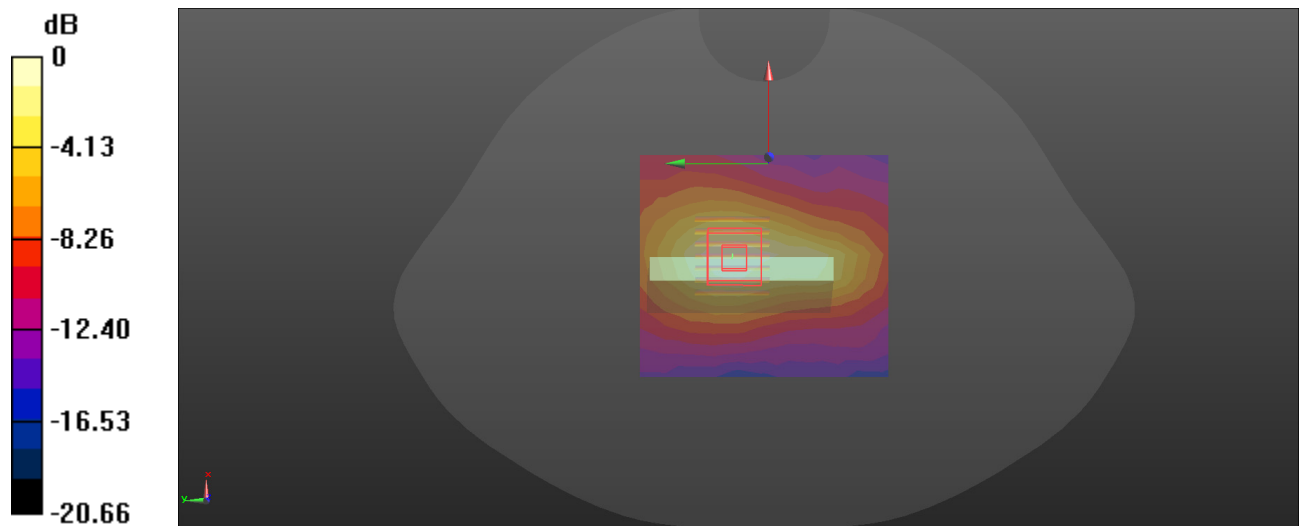

0 dB = 0.125 W/kg = -9.03 dBW/kg

Plot: 45#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.016$ S/m; $\epsilon_r = 37.733$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.65, 6.65, 6.65) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/LTE Band 41 1RB Mid/Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0241 W/kg


Head Right Tilt/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.2060 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0240 W/kg

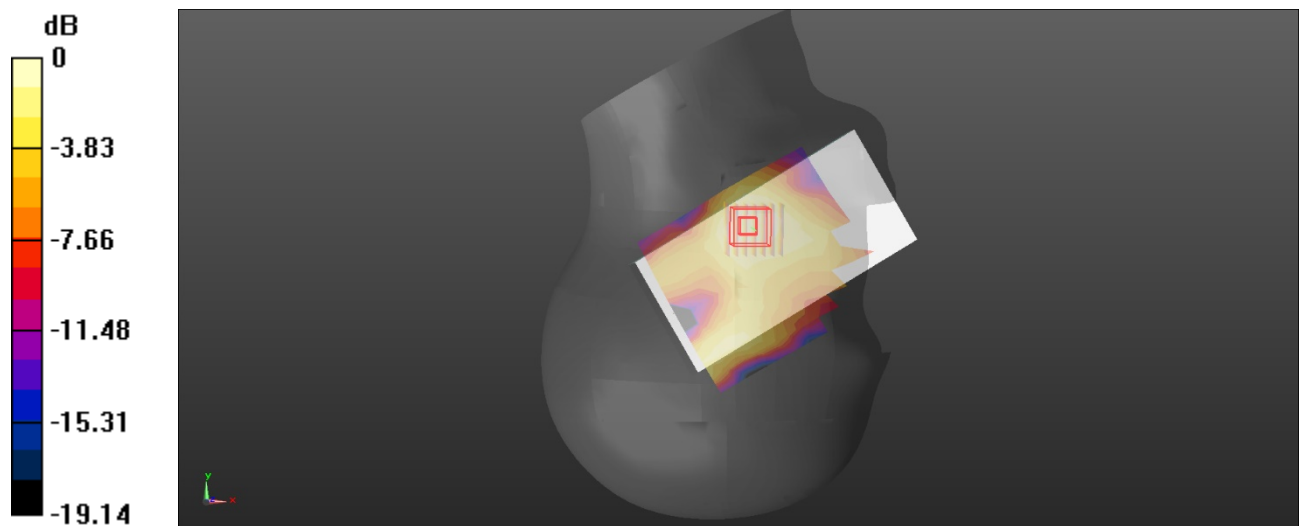

0 dB = 0.0240 W/kg = -16.20 dBW/kg

Plot: 46#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.016$ S/m; $\epsilon_r = 37.733$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.65, 6.65, 6.65) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/LTE Band 41 1RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.156 W/kg


Body Bottom/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.671 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.160 W/kg

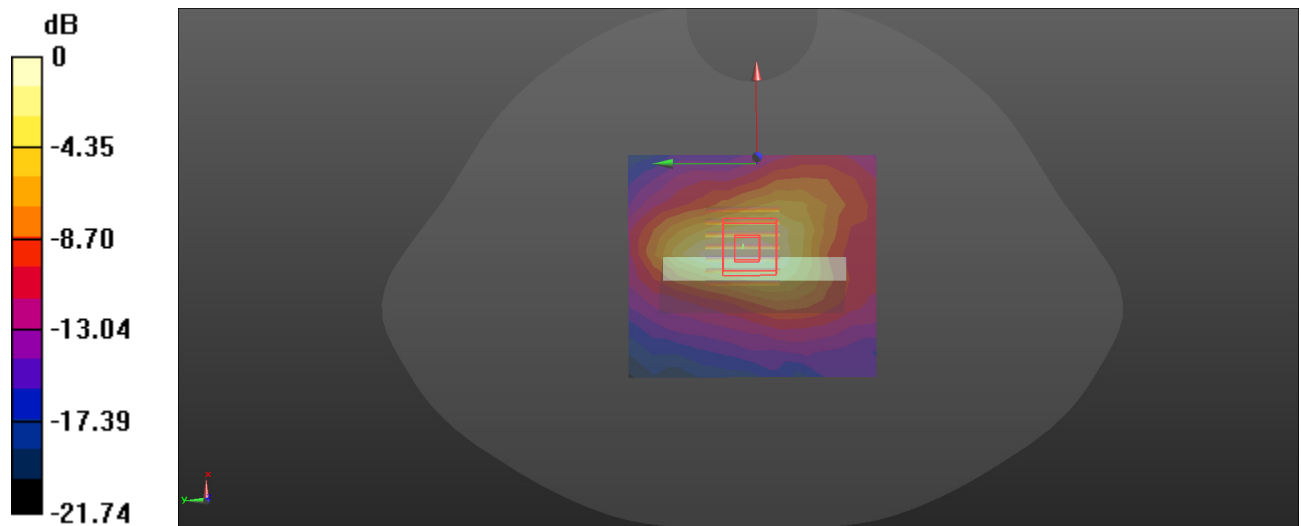

0 dB = 0.160 W/kg = -7.96 dBW/kg

Plot: 47#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.016$ S/m; $\epsilon_r = 37.733$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.65, 6.65, 6.65) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/LTE Band 41 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.867 W/kg


Head Right Tilt/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.303 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

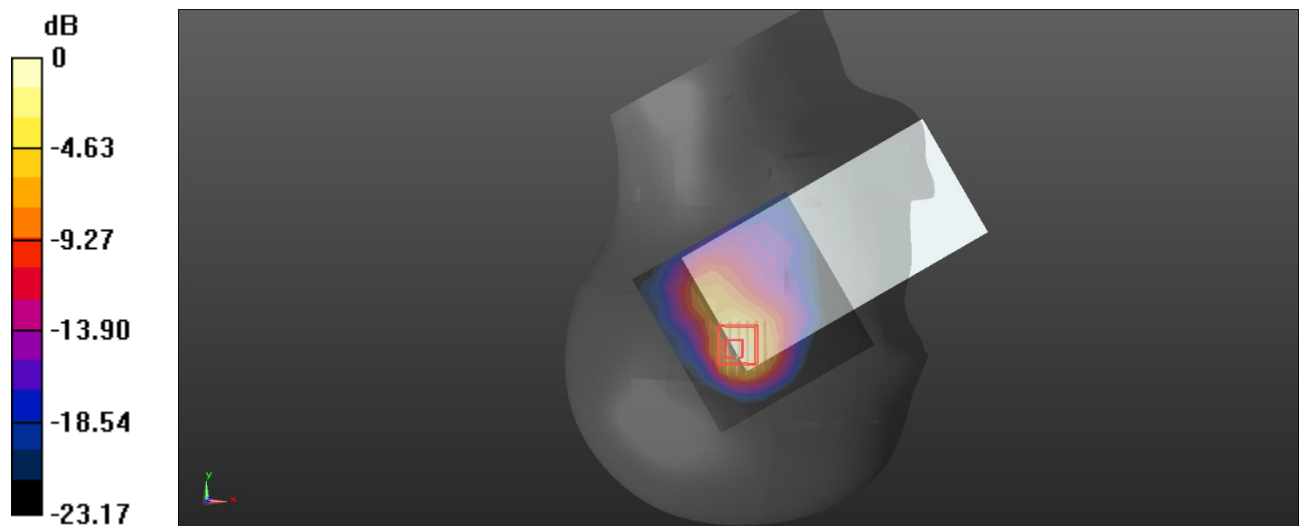

0 dB = 0.817 W/kg = -0.88 dBW/kg

Plot: 48#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 2.016 \text{ S/m}$; $\epsilon_r = 37.733$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.65, 6.65, 6.65) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/LTE Band 41 1RB Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.130 W/kg


Body Back/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.464 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

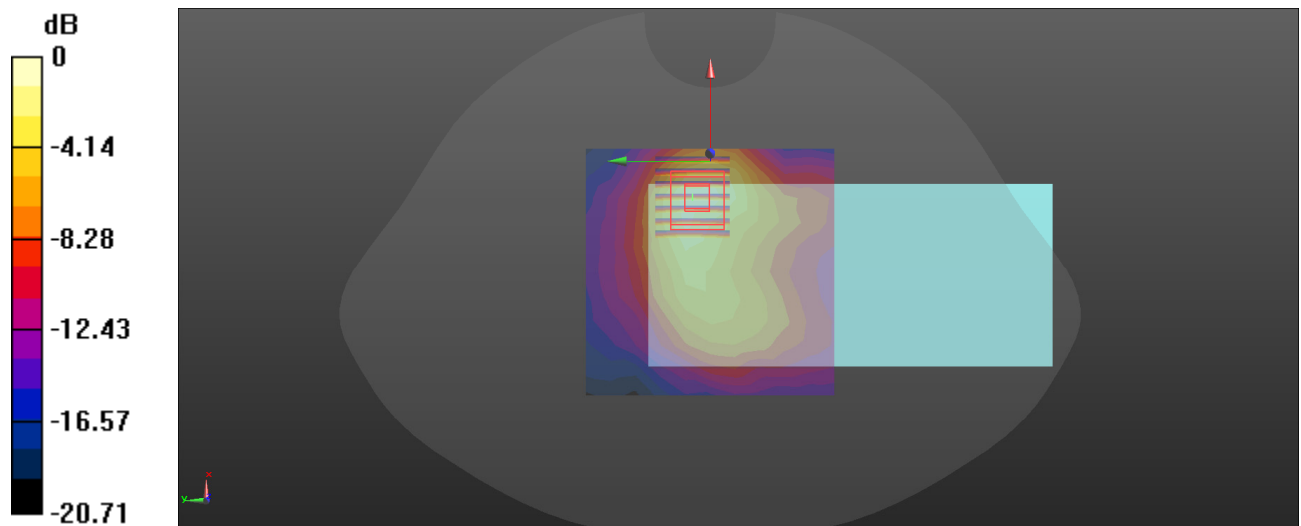

0 dB = 0.142 W/kg = -8.48 dBW/kg

Plot: 49#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.355 \text{ S/m}$; $\epsilon_r = 39.018$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.73, 7.73, 7.73) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/LTE Band 66 1RB Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0344 W/kg


Head Right Cheek/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.635 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0375 W/kg

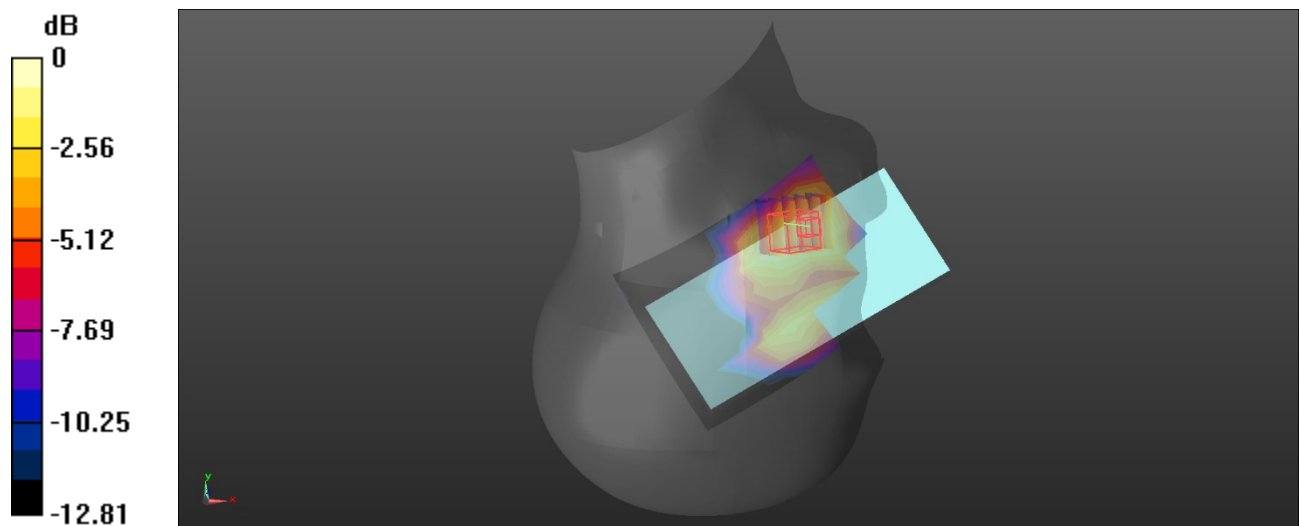 $0 \text{ dB} = 0.0375 \text{ W/kg} = -14.26 \text{ dBW/kg}$

Plot: 50#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.355 \text{ S/m}$; $\epsilon_r = 39.018$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.73, 7.73, 7.73) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/LTE Band 66 1RB Mid/Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.139 W/kg


Body Back/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.491 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

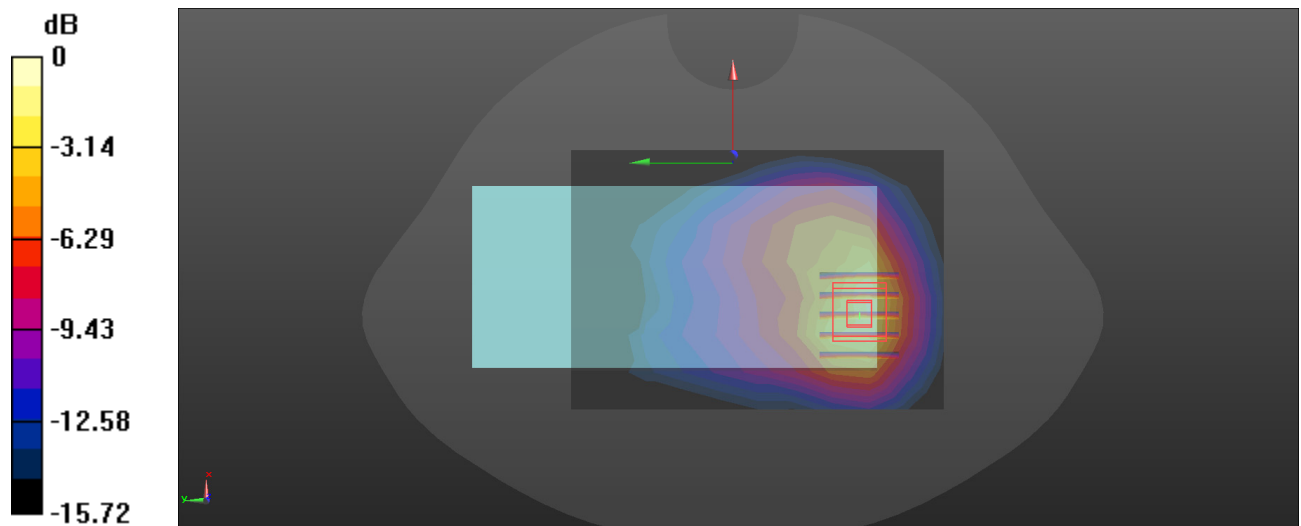

0 dB = 0.161 W/kg = -7.93 dBW/kg

Plot: 51#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.355 \text{ S/m}$; $\epsilon_r = 39.018$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.73, 7.73, 7.73) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/LTE Band 66 1RB Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.862 W/kg


Head Right Tilt/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.48 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

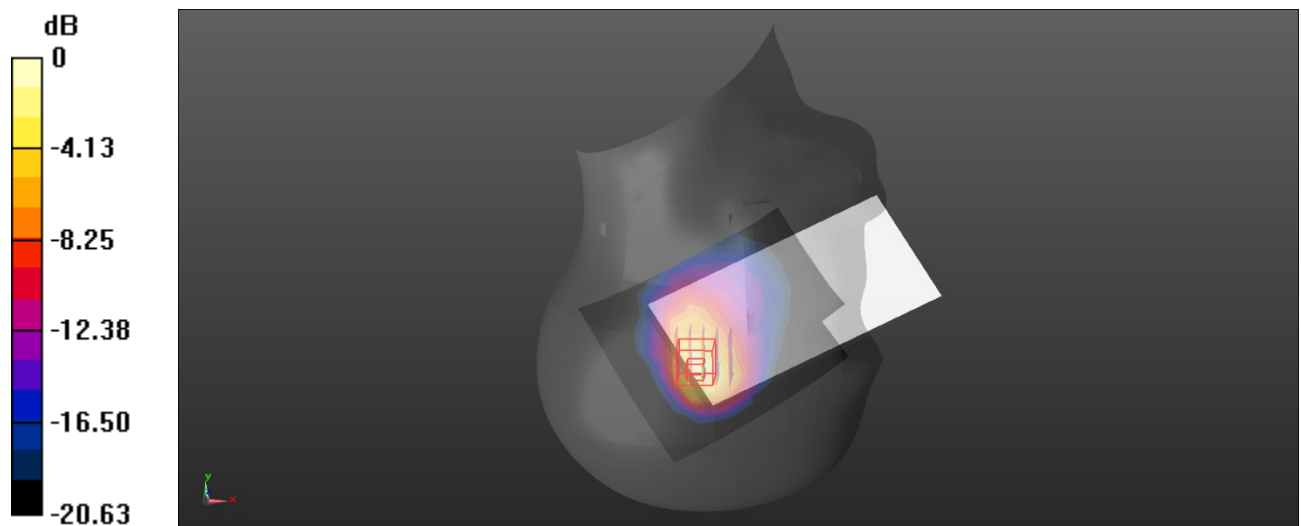

0 dB = 0.792 W/kg = -1.01 dBW/kg

Plot: 52#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.355 \text{ S/m}$; $\epsilon_r = 39.018$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(7.73, 7.73, 7.73) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/LTE Band 66 1RB Mid/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.113 W/kg


Body Top/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.192 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

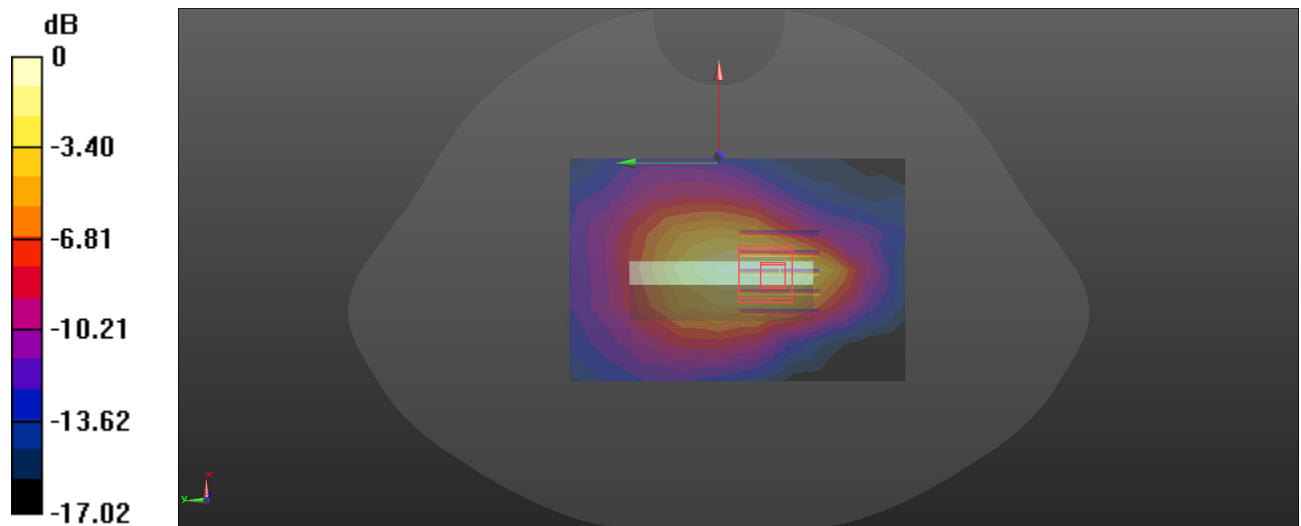

0 dB = 0.125 W/kg = -9.03 dBW/kg

Plot: 53#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.748 \text{ S/m}$; $\epsilon_r = 39.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.85, 6.85, 6.85) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.381 W/kg


Head Left Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.475 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.564 W/kg

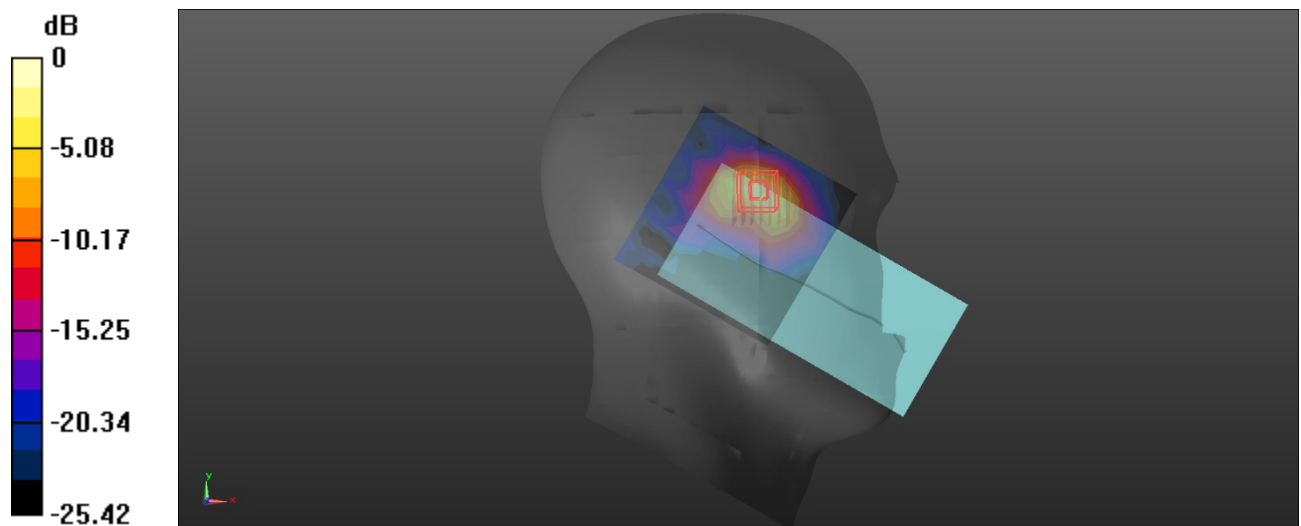

0 dB = 0.564 W/kg = -2.49 dBW/kg

Plot: 54#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.748 \text{ S/m}$; $\epsilon_r = 39.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.85, 6.85, 6.85) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 802.11b Mid/Area Scan (9x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0862 W/kg


Body Right/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.002 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

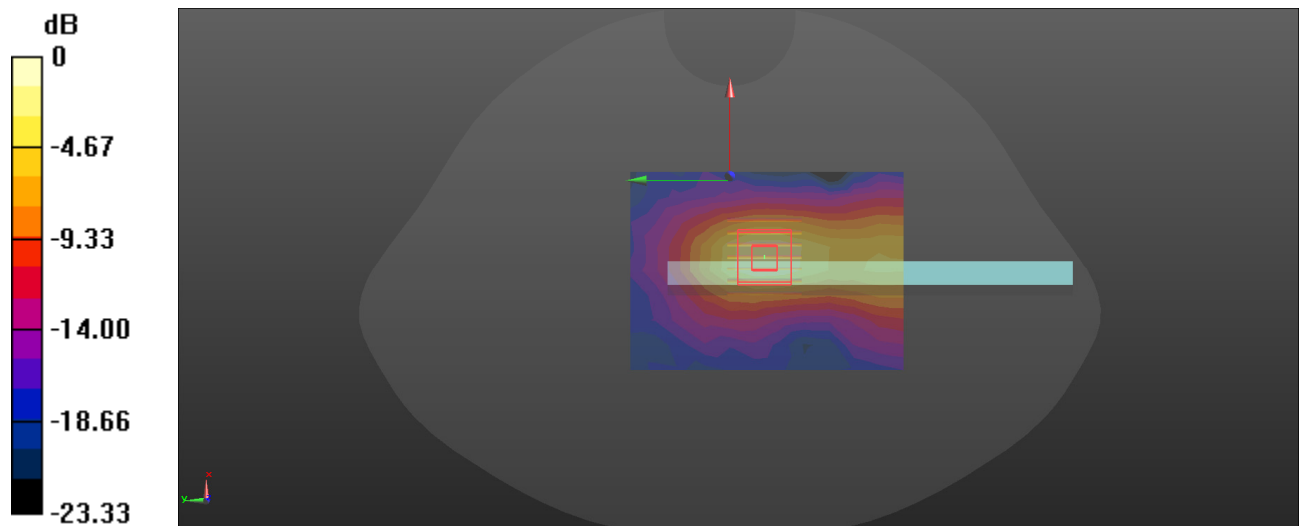

0 dB = 0.123 W/kg = -9.10 dBW/kg

Plot: 55#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.748 \text{ S/m}$; $\epsilon_r = 39.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.85, 6.85, 6.85) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

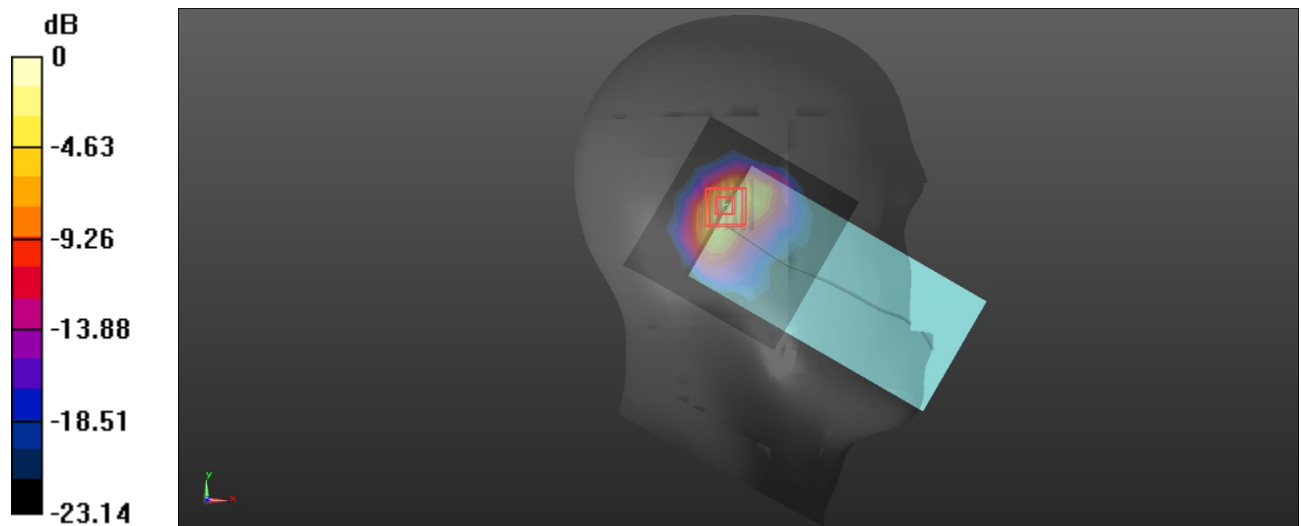Head Left Tilt/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.440 W/kg **Head Left Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.154 V/m ; Power Drift = -0.18 dB Peak SAR (extrapolated) = 0.731 W/kg **SAR(1 g) = 0.307 W/kg ; SAR(10 g) = 0.127 W/kg** Maximum value of SAR (measured) = 0.565 W/kg  $0 \text{ dB} = 0.565 \text{ W/kg} = -2.48 \text{ dBW/kg}$

Plot: 56#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.748 \text{ S/m}$; $\epsilon_r = 39.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(6.85, 6.85, 6.85) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0922 W/kg


Body Top/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.559 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0951 W/kg

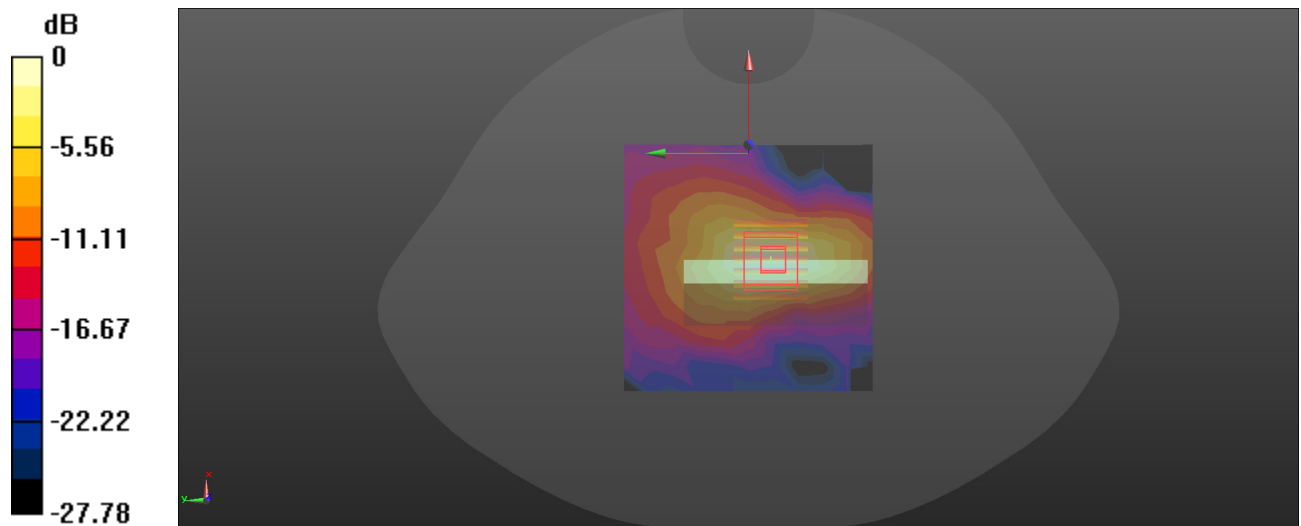

0 dB = 0.0951 W/kg = -10.22 dBW/kg

Plot: 57#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.027

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.739 \text{ S/m}$; $\epsilon_r = 35.602$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(5, 5, 5) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.340 W/kg


Head Left Cheek/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.8860 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

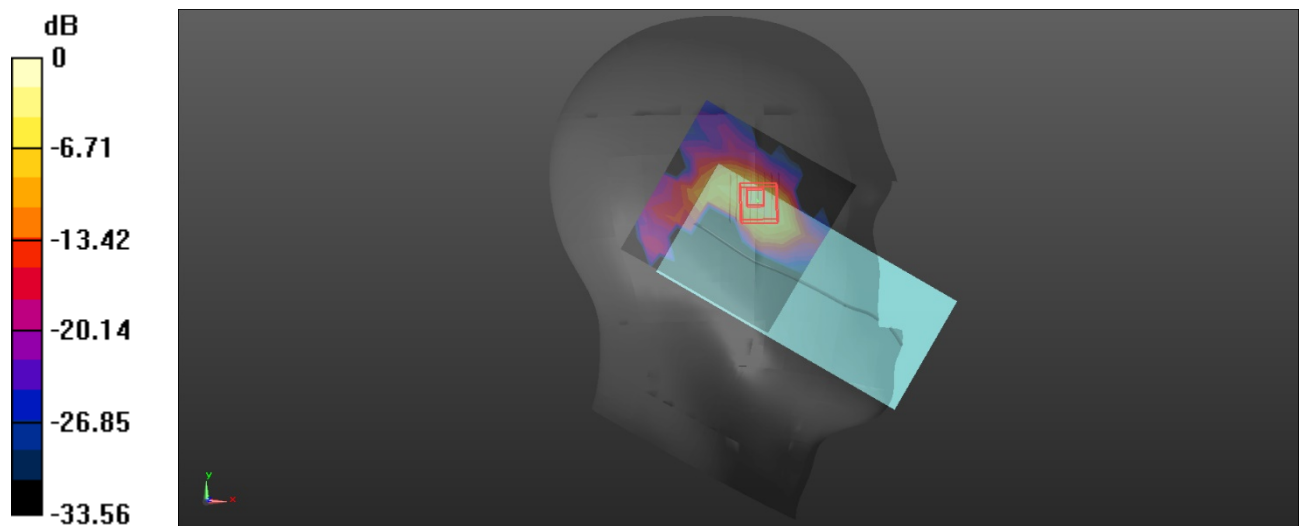

0 dB = 0.690 W/kg = -1.61 dBW/kg

Plot: 58#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.027

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.739 \text{ S/m}$; $\epsilon_r = 35.602$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(5, 5, 5) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

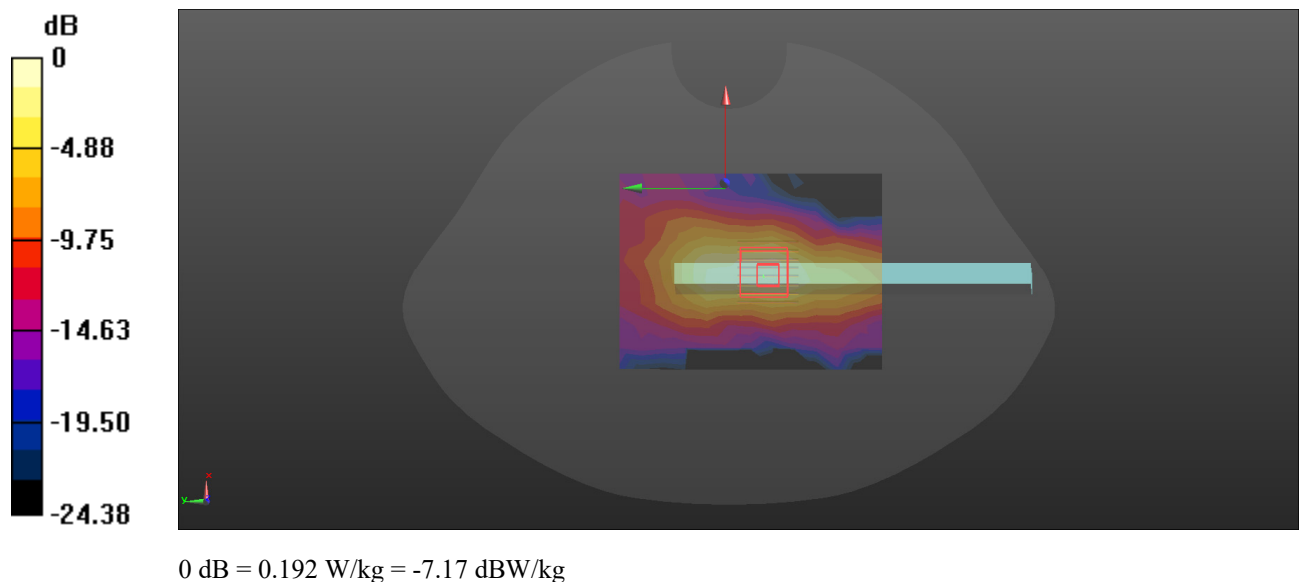Body Right/WLAN 5.2G 802.11a Mid/Area Scan (10x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.171 W/kg **Body Right/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.171 V/m ; Power Drift = -0.14 dB Peak SAR (extrapolated) = 0.283 W/kg **SAR(1 g) = 0.094 W/kg ; SAR(10 g) = 0.034 W/kg** Maximum value of SAR (measured) = 0.192 W/kg 

Plot: 59#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.027

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.801 \text{ S/m}$; $\epsilon_r = 34.776$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(5, 5, 5) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.757 W/kg


Head Left Cheek/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.261 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.778 W/kg

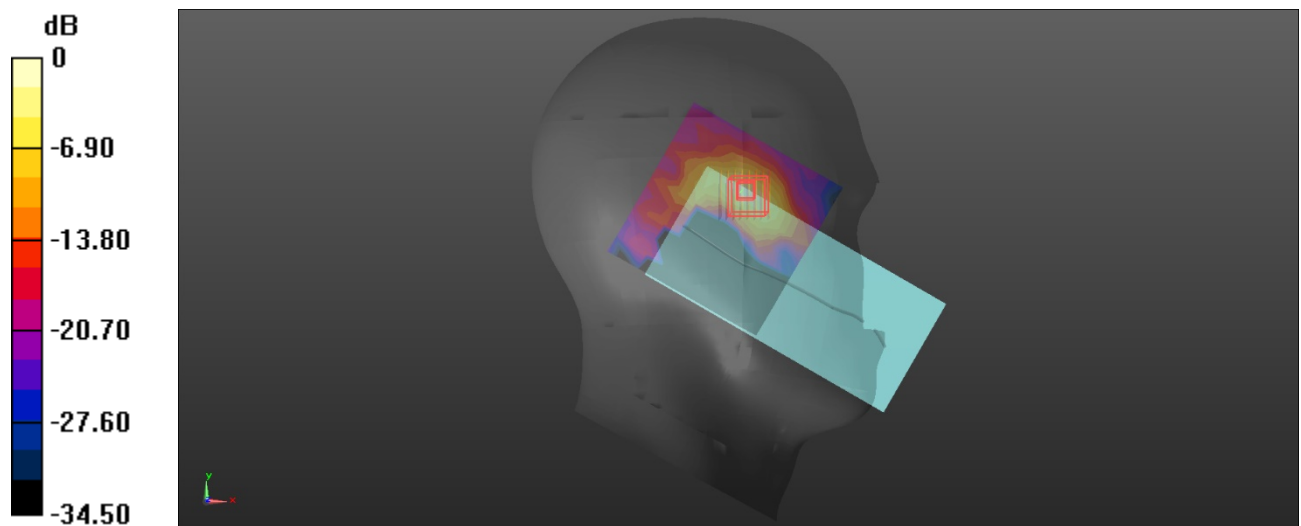

0 dB = 0.778 W/kg = -1.09 dBW/kg

Plot: 60#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**


Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.027

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.801 \text{ S/m}$; $\epsilon_r = 34.776$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(5, 5, 5) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

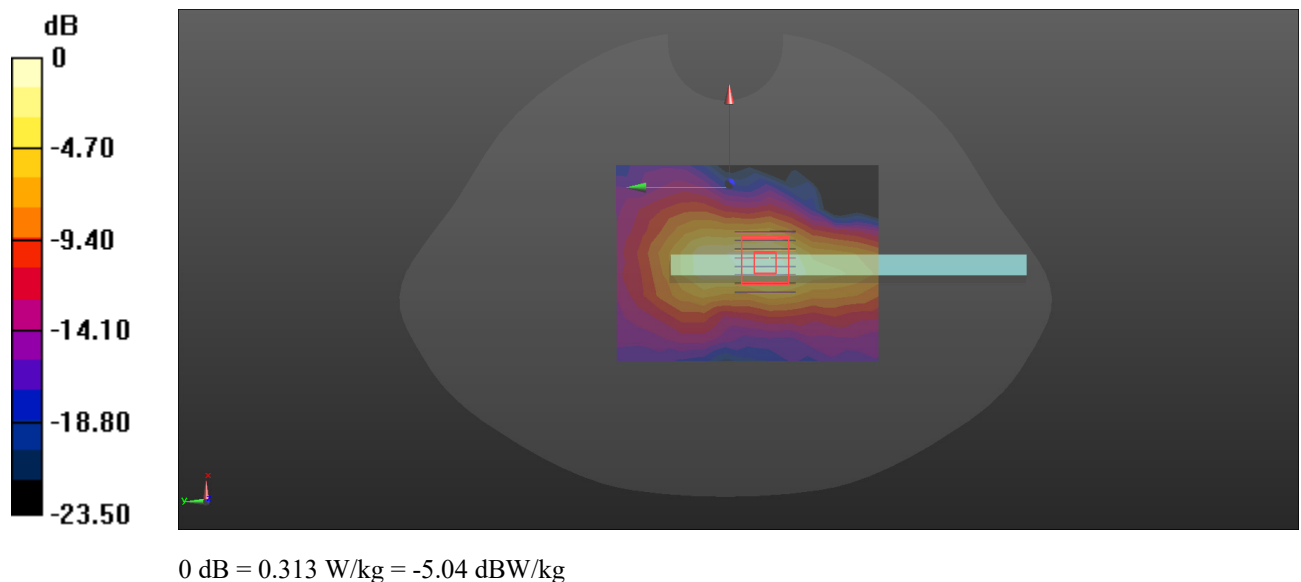Body Right/WLAN 5.3G 802.11a Mid/Area Scan (10x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.264 W/kg **Body Right/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 5.342 V/m ; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.456 W/kg **SAR(1 g) = 0.155 W/kg ; SAR(10 g) = 0.060 W/kg** Maximum value of SAR (measured) = 0.313 W/kg 

Plot: 61#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.027

Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.163 \text{ S/m}$; $\epsilon_r = 35.051$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(4.35, 4.35, 4.35) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.736 W/kg


Head Left Cheek/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.770 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.828 W/kg

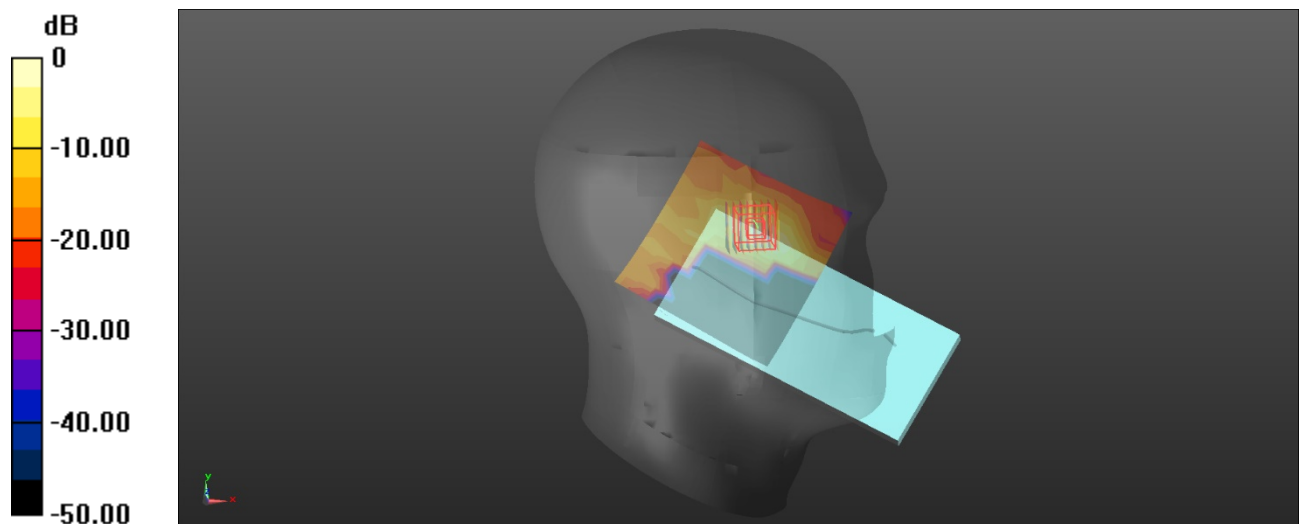

0 dB = 0.828 W/kg = -0.82 dBW/kg

Plot: 62#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.027

Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.163 \text{ S/m}$; $\epsilon_r = 35.051$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(4.35, 4.35, 4.35) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 5.6G 802.11a Mid/Area Scan (10x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.257 W/kg


Body Right/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.895 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

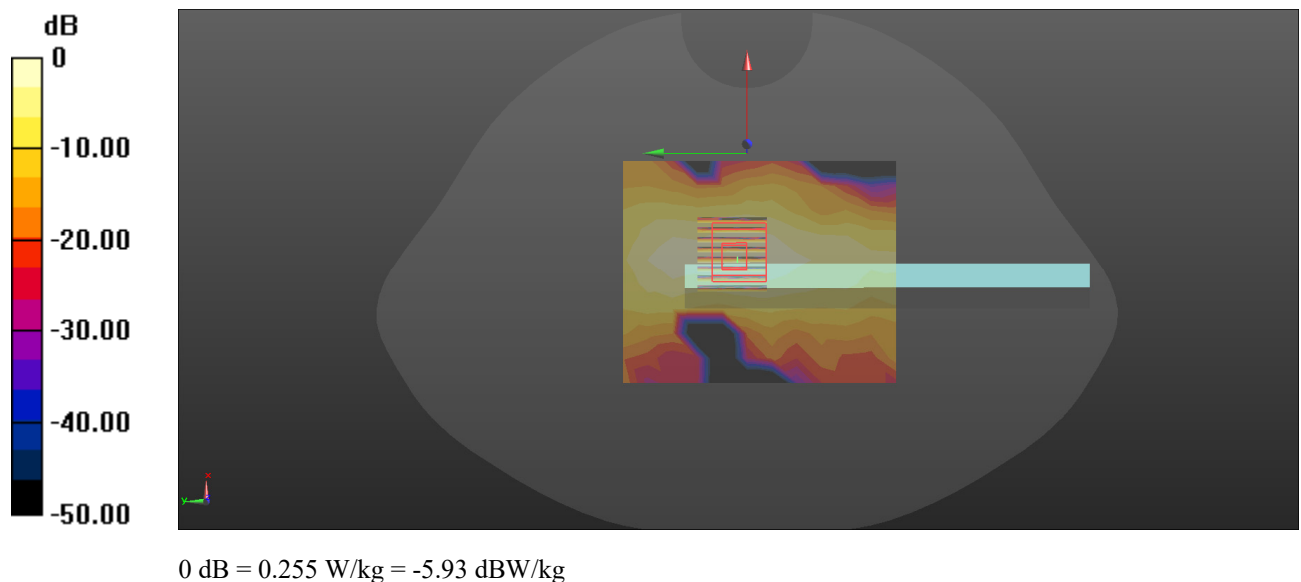

Plot: 63#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.027

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.374 \text{ S/m}$; $\epsilon_r = 35.927$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(4.55, 4.55, 4.55) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.707 W/kg


Head Left Cheek/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.784 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.727 W/kg

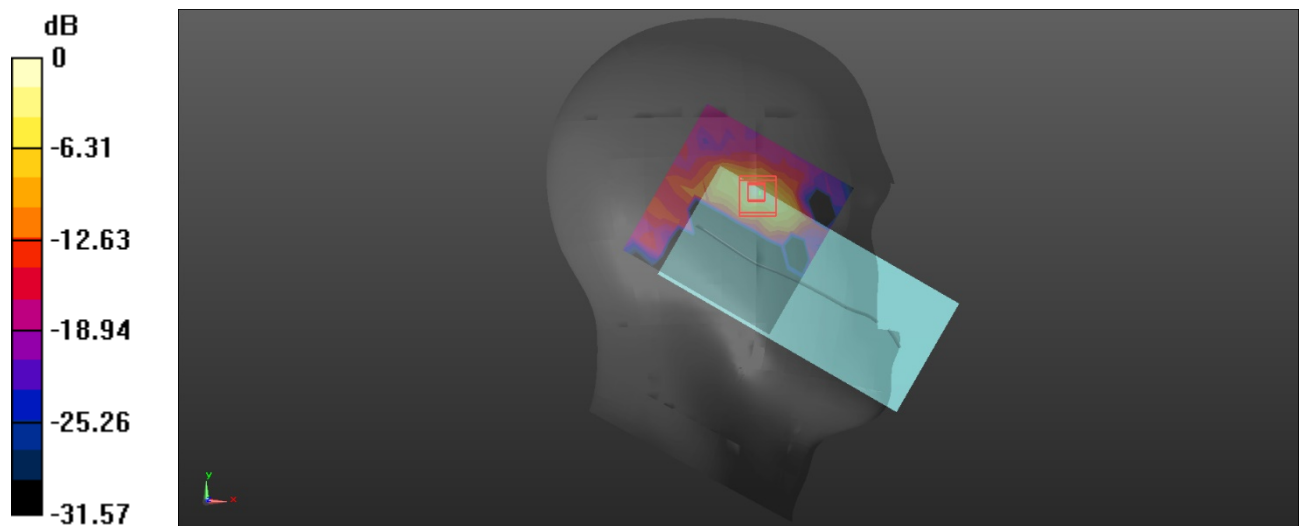

0 dB = 0.727 W/kg = -1.38 dBW/kg

Plot: 64#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.027

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.374 \text{ S/m}$; $\epsilon_r = 35.927$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(4.55, 4.55, 4.55) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 5.8G 802.11a Mid/Area Scan (10x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.288 W/kg


Body Right/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.929 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

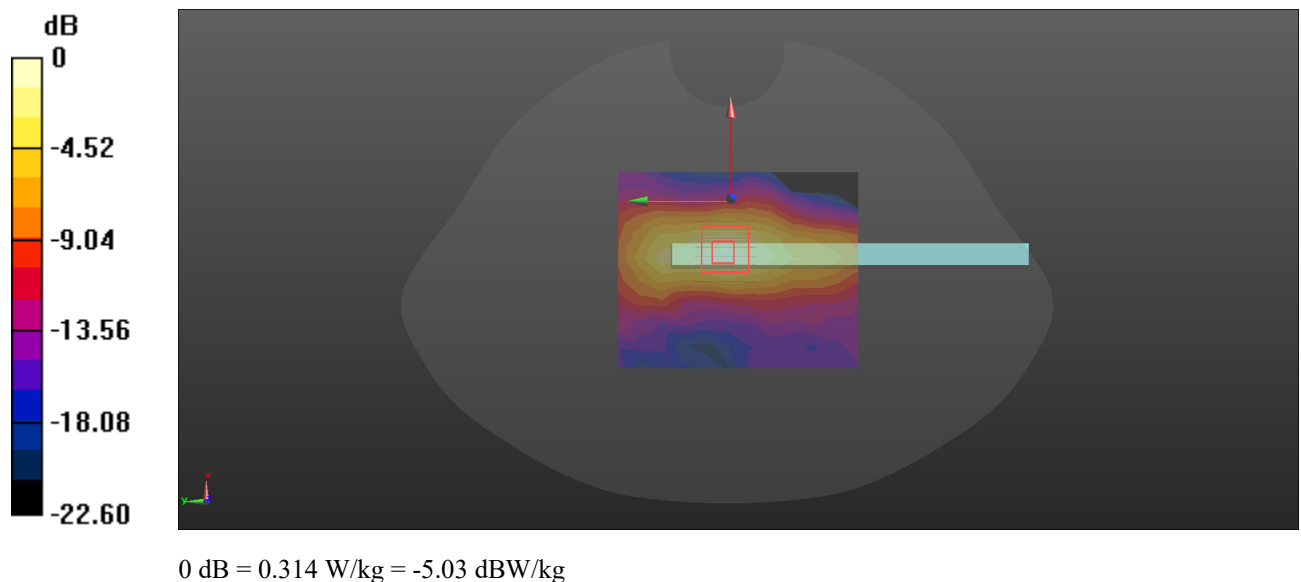

Plot: 65#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-3**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 821.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 821.5$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.836$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 821.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type:s QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/LTE Band 26 1 RB Low/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.38 W/kg


Head Left Cheek/LTE Band 26 1 RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.664 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.472 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

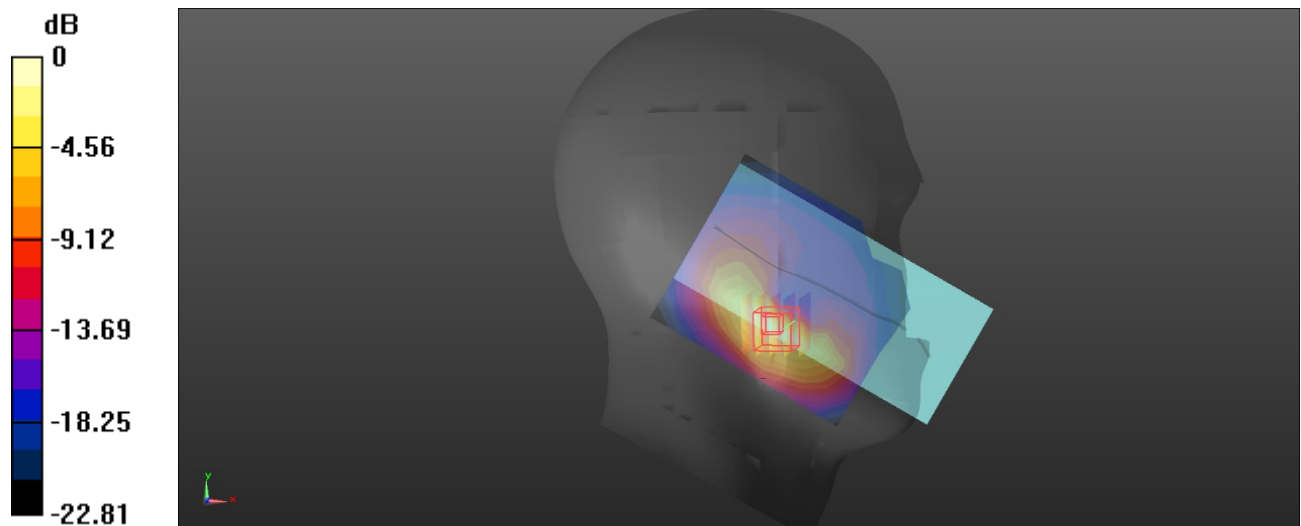

0 dB = 1.39 W/kg = 1.43 dBW/kg

Plot: 66#**DUT: Mobile Phone; Type: X6858; Serial: 2TGR-3**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.821$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7783; ConvF(9.1, 9.1, 9.1) @ 831.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1724; Calibrated: 3/28/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/LTE Band 26 1RB Mid/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.689 W/kg


Body Left/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.12 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.800 W/kg

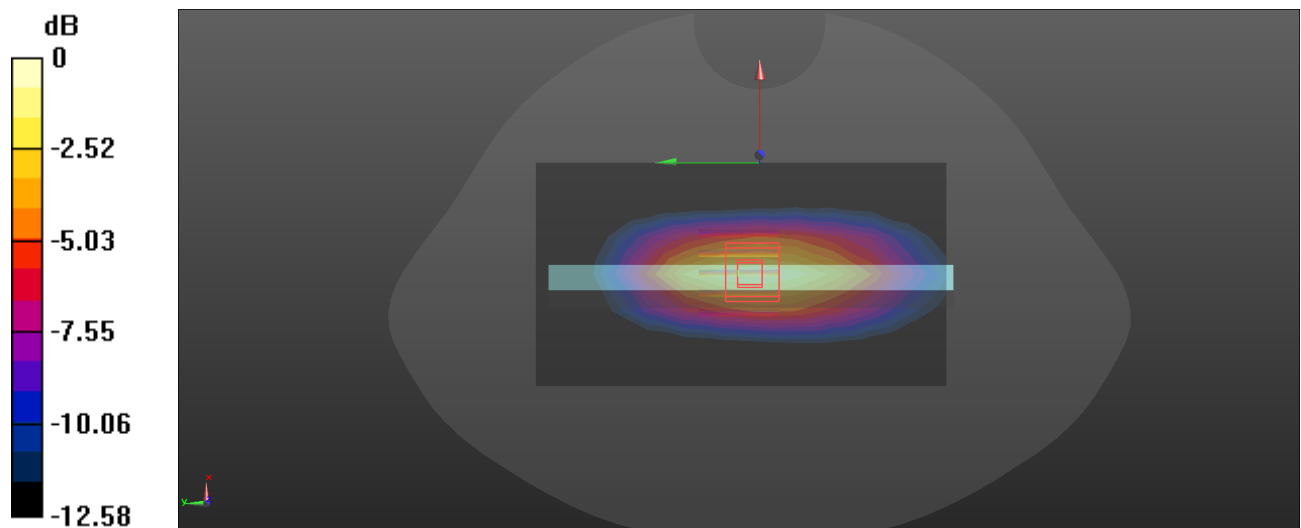

0 dB = 0.800 W/kg = -0.97 dBW/kg